FCC REPORT

(GSM & WCDMA)

Applicant:	Plus One Marketing Ltd.
Address of Applicant:	Sumitomofudosan Hibiya building 2F, 2-8-6 Shinbashi, Minatoku, Tokyo, Japan

Equipment Under Test (EUT)

Product Name:	Smart Phone
Model No.:	ÖWN Fun+, FTU161G
Trade mark:	ÖWN, Freetel
FCC ID:	2AG5L-FTU161G
Applicable standards:	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part 22 Subpart H FCC CFR Title 47 Part 24 Subpart E
Date of sample receipt:	15 Mar., 2016
Date of Test:	15 Mar., to 23 Mar., 2016
Date of report issued:	23 Mar., 2016
Test Result:	PASS*

*   In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Bruce Zhang
Laboratory Manager

2. Version

Version No.	Date	Description
00	*23 Mar., 2016*	*Original*

Tested by: *Casey Chen*   **Date:**   *23 Mar., 2016*

Test Engineer

Reviewed by: *Wimer Zhang*   **Date:**   *23 Mar., 2016*

Project Engineer

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 2 of 62

3. Contents

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Peak-to-Average Power Ratio	Part 24.232 (d)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 4 of 62

5. General Information

5.1 Client Information

Applicant:	Plus One Marketing Ltd.
Address of Applicant:	Sumitomofudosan Hibiya building 2F, 2-8-6 Shinbashi, Minatoku, Tokyo, Japan
Manufacturer	Nollec Wireless Co.,Ltd.
Address of Manufacturer:	Tower A North, TCL Building, High-tech Industrial Park, Nanshan Dist, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	Smart Phone
Model No.:	ÖWN Fun+, FTU161G
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band II: 1852.4 MHz -1907.6 MHz
Modulation type:	GSM/GPRS:GMSK, UMTS:QPSK, EGPRS: 8PSK
Antenna type:	Internal Antenna
Antenna gain:	GSM 850: 0.5 dBi PCS 1900: 1.5 dBi WCDMA Band II: 1.5 dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V-2800mAh
AC adapter:	Model: ÖWN Fun+ Input:100-300V AC,50/60Hz 0.2A Output:5V DC MAX 1A
Remark:	The No.: ÖWN Fun+, FTU161G were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCISE1603028
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 5 of 62

Operation Frequency List:

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
….	….	….	….
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
…	…	…	…
250	848.60	809	1909.60
251	848.80	810	1909.80

WCDMA Band II	
Channel:	Frequency (MHz)
9262	1852.40
9263	1852.60
….	….
9399	1879.80
9400	1880.00
9401	1880.20
…	…
9537	1907.40
9538	1907.60

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 6 of 62

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80

WCDMA Band II		
Channel		Frequency(MHz)
Lowest channel	9262	1852.40
Middle channel	9400	1880.00
Highest channel	9538	1907.60

5.3 Test modes

Voice mode	Keep the EUT in voice mode on GSM 850 and PCS 1900 respectively.
Data mode (GPRS)	Keep the EUT in GPRS mode on GSM 850 and PCS 1900 respectively.
Data mode (EGPRS)	Keep the EUT in EGPRS mode on GSM 850 and PCS 1900 respectively.
Voice mode (AMR 12.2 kbps)	Keep the EUT in voice mode on WCDMA Band II respectively.
Data mode (RMC 12.2kbps)	Keep the EUT in RMC on WCDMA Band II respectively.
Data mode (HSDPA Subtest 1~4)	Keep the EUT in HSDPA mode on WCDMA Band II respectively.
Data mode (HSUPA Subtest 1~5)	Keep the EUT in HSUPA mode on WCDMA Band II respectively.
Remark:	Just the worst case mode shown in report.

5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**
Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**
The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**
Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 8 of 62

5.8 Test Instruments list

| Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	03-28-2015	03-28-2016
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	03-28-2015	03-28-2016
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2015	03-31-2016
6	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	04-01-2015	03-31-2016
7	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2015	03-31-2016
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	04-01-2015	03-31-2016
9	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
10	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
11	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP 30	CCIS0023	03-28-2015	03-28-2016
12	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	03-28-2015	03-28-2016
13	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2015	03-31-2016
14	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	03-28-2015	03-28-2016
15	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-08-2015	04-08-2016
16	DC Power Supply	Shenzhen XinNuoEr Technologies Co., Ltd.	WYK-10020K	CCIS0201	10-31-2015	10-30-2016
17	Temperature Humidity Chamber	Fo Shan Heng Pu Electronics Co., Ltd.	HPGDS-500	CCIS0240	11-18-2015	11-27-2016

6. System test configuration

6.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.
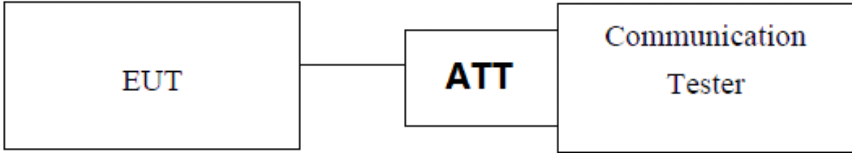
6.3 Configuration of Tested System
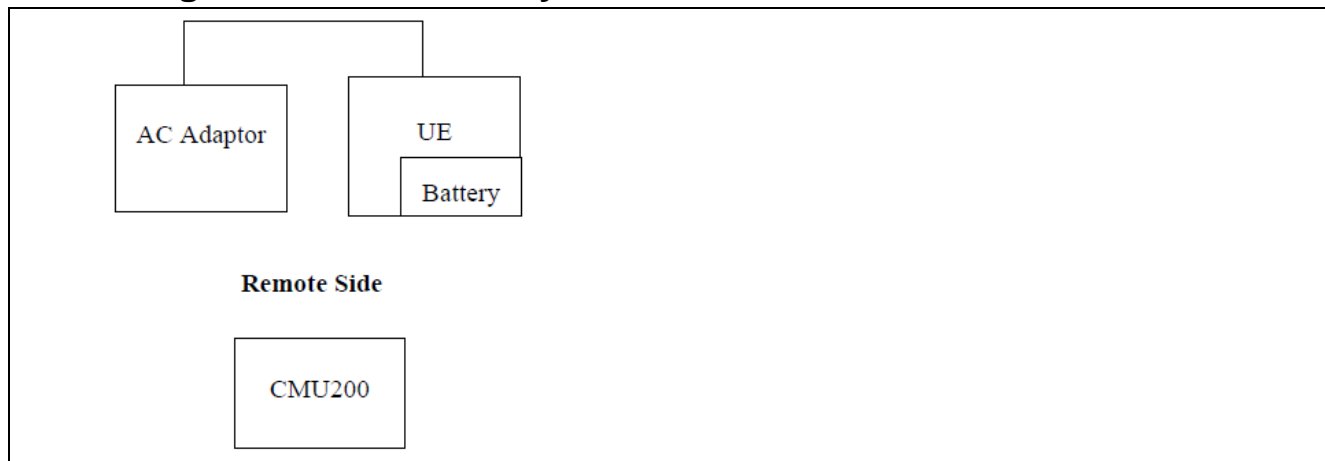
6.4 Description of Test Modes

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for three modes (GSM850, PCS1900, WCDMA Band V and WCDMA Band II) with power adaptor, earphone and Data cable. The worst-case H mode for GSM850, PCS1900, WCDMA Band V and WCDMA Band II.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
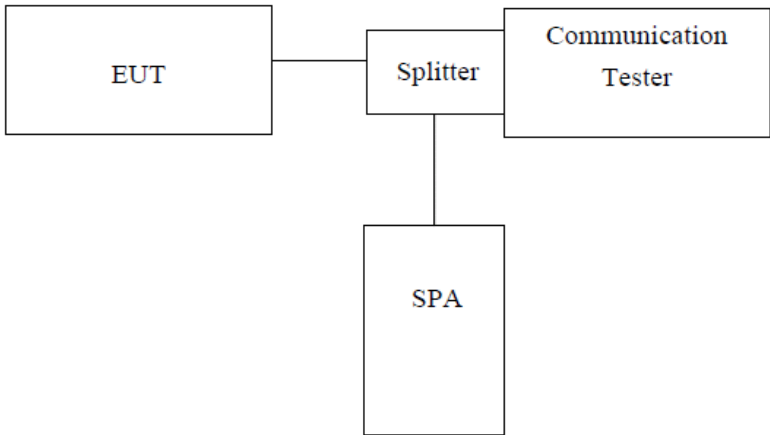No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 10 of 62

6.5 Conducted Output Power

Test Requirement:	FCC part 22.913(a), FCC part 24.232(b)
Test Method:	FCC part 2.1046
Limit:	GSM 850: 7W PCS 1900: 2W WCDMA Band II: 2W
Test setup:	 Note: Measurement setup for testing on Antenna connector
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 11 of 62

EUT Mode	Burst Average power (dBm)			Limit(dBm)
	128	190	251	
	824.20MHz	836.60MHz	848.80MHz	
GSM 850	32.59	32.65	32.63	38.45
GPRS 850 (1 Uplink slot)	32.33	32.47	32.45	
GPRS 850 (2 Uplink slot)	31.50	31.65	31.61	
GPRS 850 (3 Uplink slot)	29.65	29.86	29.88	
GPRS 850 (4 Uplink slot)	28.45	28.66	28.65	
EGPRS 850 (1 Uplink slot)	26.14	26.12	26.05	
EGPRS 850 (2 Uplink slot)	24.95	24.93	24.86	
EGPRS 850 (3 Uplink slot)	22.96	22.89	22.97	
EGPRS 850 (4 Uplink slot)	21.83	21.78	21.66	
EUT Mode	Burst Average power (dBm)			Limit(dBm)
	512	661	810	
	1850.20MHz	1880.00MHz	1909.80MHz	
PCS 1900	29.10	29.36	29.67	33.00
GPRS 1900 (1 Uplink slot)	28.97	29.19	29.49	
GPRS 1900 (2 Uplink slot)	28.21	28.44	28.77	
GPRS 1900 (3 Uplink slot)	26.44	26.67	26.99	
GPRS 1900 (4 Uplink slot)	25.31	25.53	25.89	
EGPRS 1900 (1 Uplink slot)	25.66	25.49	25.25	
EGPRS 1900 (2 Uplink slot)	24.11	24.04	23.77	
EGPRS 1900 (3 Uplink slot)	21.64	21.62	21.37	
EGPRS 1900 (4 Uplink slot)	20.24	20.15	19.84	

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 12 of 62

EUT Mode		Burst Average power (dBm)			Limit(dBm)
		9262	9400	9538	
		1852.40MHz	1880.00MHz	1907.60MHz	
UMTS 1900 HSDPA	Subtest 1	20.84	21.35	20.90	33.00
	Subtest 2	20.47	20.54	20.50	
	Subtest 3	18.96	19.25	18.76	
	Subtest 4	18.97	19.29	18.87	
UMTS 1900 HSUPA	Subtest 1	21.00	21.15	21.01	
	Subtest 2	21.08	21.35	20.98	
	Subtest 3	19.28	19.36	19.13	
	Subtest 4	21.06	21.50	21.07	
	Subtest 5	20.08	20.31	20.11	
UMTS 1900 RMC	12.2kbps	22.11	22.52	22.13	
UMTS 1900 AMR	12.2kbps	21.84	22.26	21.76	

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 13 of 62

6.6 Occupy Bandwidth

|	
Test Requirement:	FCC part 22.913(a), FCC part 24.232(b)
Test Method:	FCC part 2.1049
Test setup:	Note: Measurement setup for testing on Antenna connector
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 14 of 62

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.2	250	320
	190	836.6	244	316
	251	848.8	244	318
EGPRS850	128	824.2	250	316
	190	836.6	246	324
	251	848.8	252	324
PCS 1900	512	1850.2	248	310
	661	1880.0	244	312
	810	1909.8	244	316
EGPRS1900	512	1850.2	244	304
	661	1880.0	244	298
	810	1909.8	246	306
WCDMA BAND II 12.2k RMC	9262	1852.4	4160	4700
	9400	1880.0	4180	4700
	9538	1907.6	4200	4700

Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.
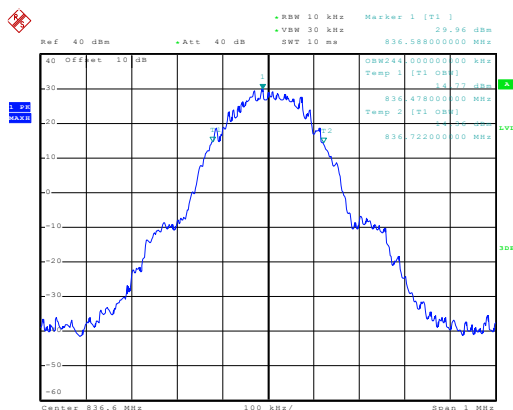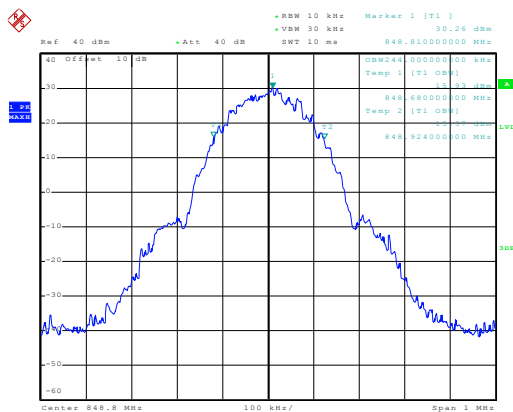

Test plot as follows:

99% Occupy bandwidth

GSM850
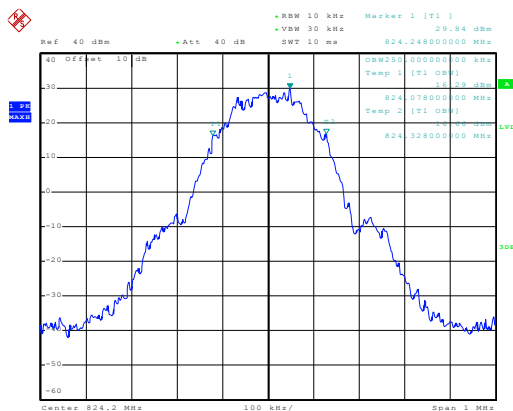
Date: 13.MAR.2016 10:43:09

Lowest channel

Date: 13.MAR.2016 10:43:44
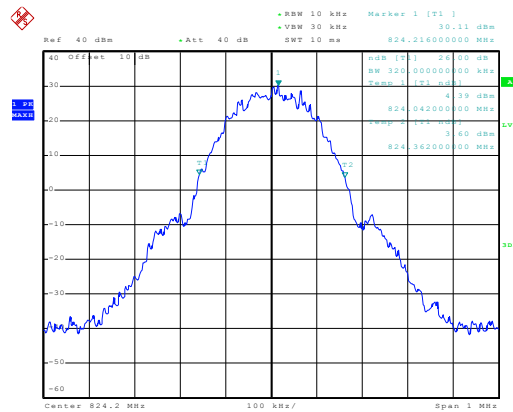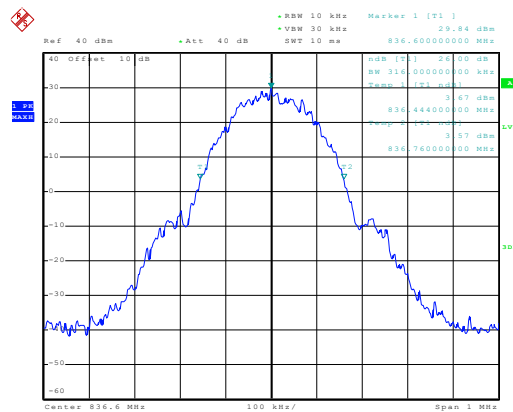
Middle channel
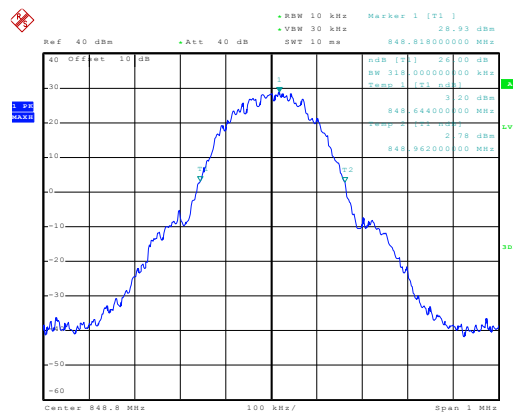

Date: 13.MAR.2016 10:44:00

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 16 of 62

26dB Emission Bandwidth

GSM850

Date: 13.MAR.2016 10:43:20

Lowest channel

Date: 13.MAR.2016 10:43:33

Middle channel

Date: 13.MAR.2016 10:44:15

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

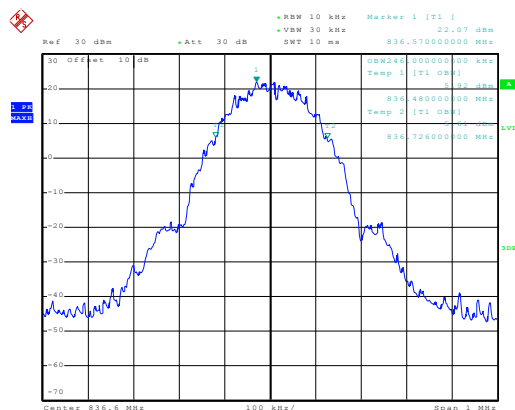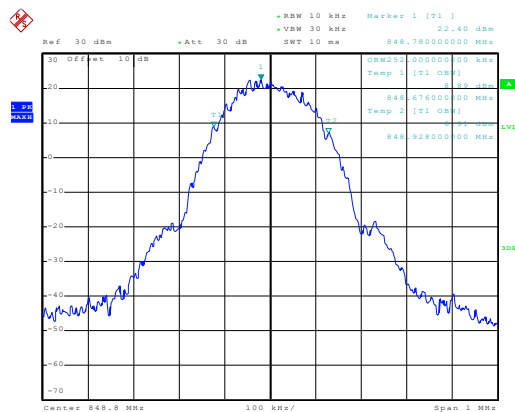Page 17 of 62

99% Occupy bandwidth
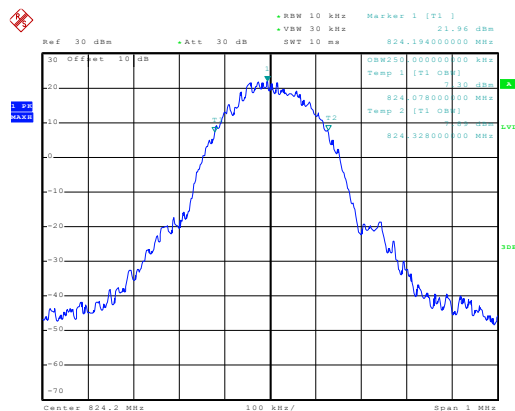
EGPRS850

Date: 13.MAR.2016 10:42:12

Lowest channel

Date: 13.MAR.2016 10:41:38

Middle channel

Date: 13.MAR.2016 10:41:20
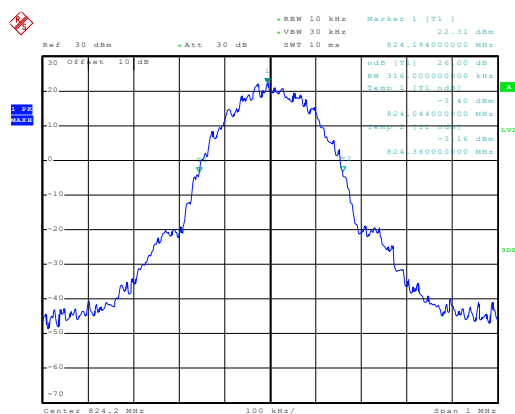
Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

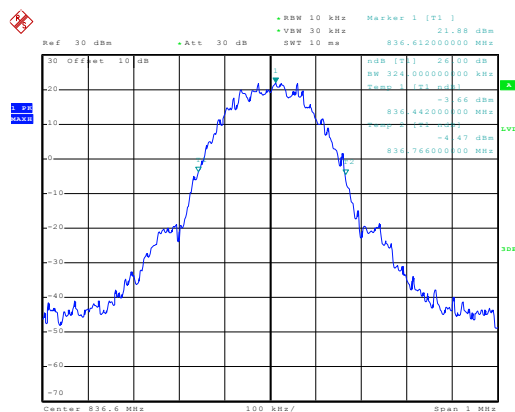Project No.: CCISE1603028
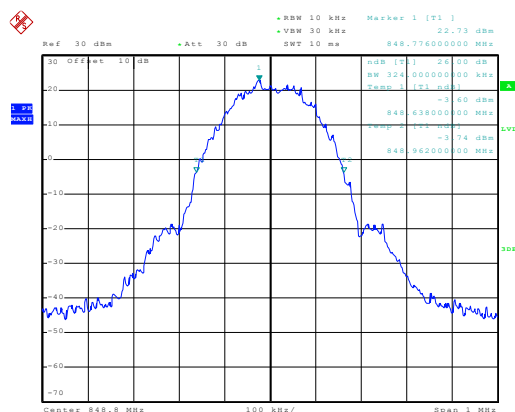
Page 18 of 62

26dB Emission Bandwidth

EGPRS850

Date: 13.MAR.2016 10:42:02

Lowest channel

Date: 13.MAR.2016 10:41:48

Middle channel

Date: 13.MAR.2016 10:41:10

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

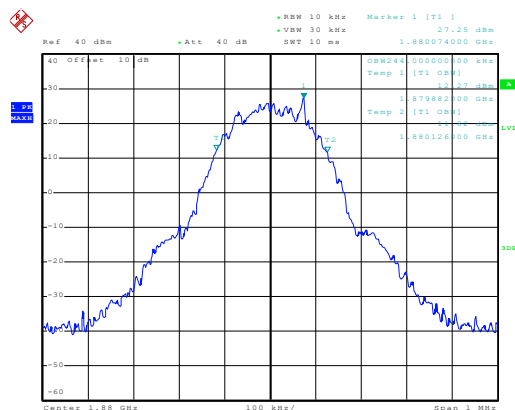Page 19 of 62

99% Occupy bandwidth

PCS 1900
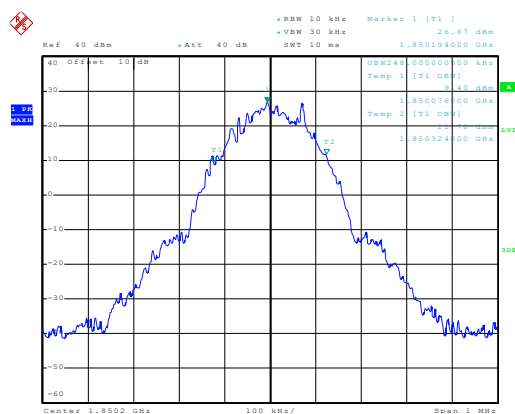
Date: 13.MAR.2016 10:52:34

Lowest channel

Date: 13.MAR.2016 10:53:14

Middle channel

Date: 13.MAR.2016 10:53:36

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

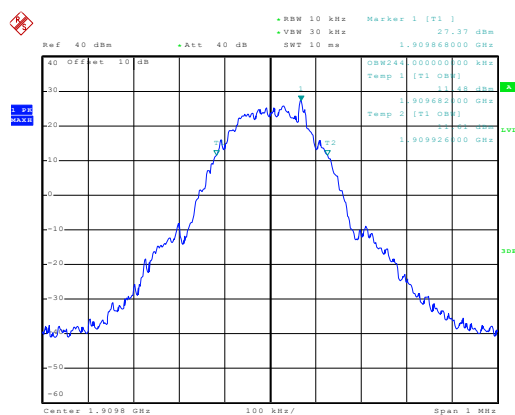Page 20 of 62

26dB Emission Bandwidth

PCS 1900
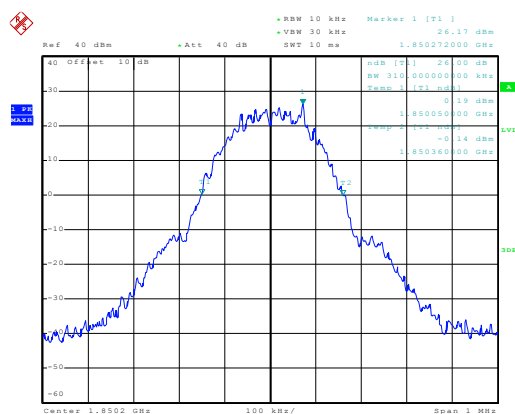
Date: 13.MAR.2016 10:52:43

Lowest channel

Date: 13.MAR.2016 10:53:00

Middle channel
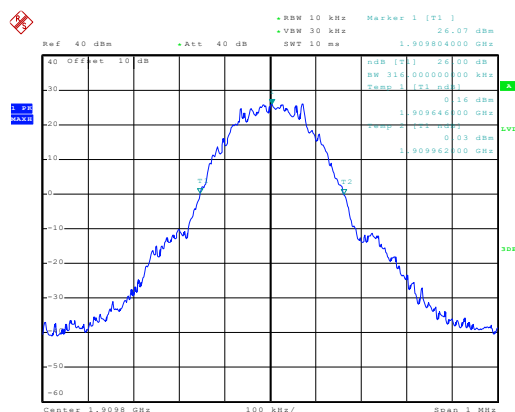
Date: 13.MAR.2016 10:53:48

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 21 of 62

99% Occupy bandwidth
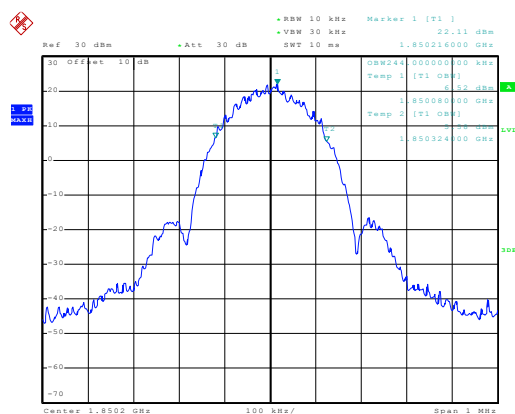
EGPRS 1900

Date: 13.MAR.2016 11:12:03

Lowest channel
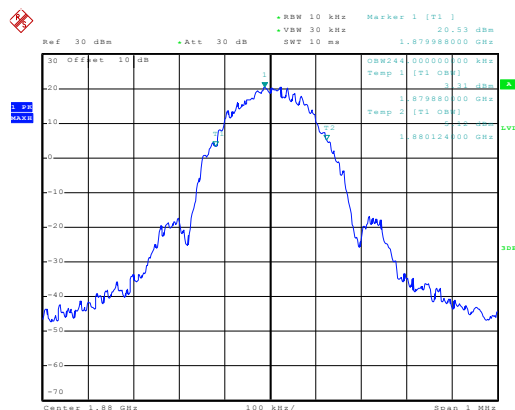
Date: 13.MAR.2016 11:11:36

Middle channel

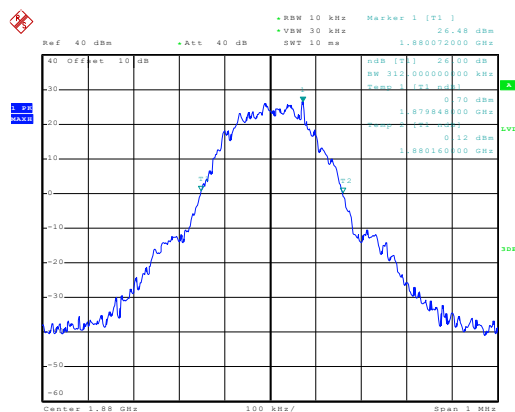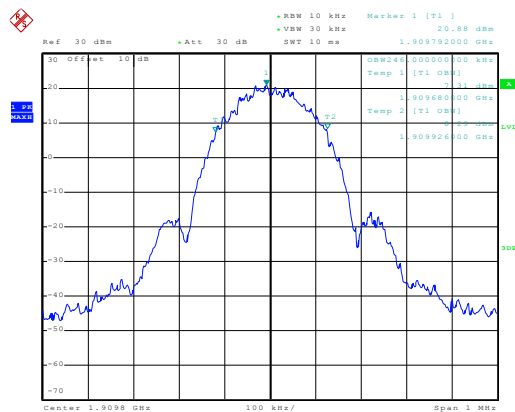Date: 13.MAR.2016 11:11:00

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 22 of 62

26dB Emission Bandwidth

EGPRS 1900
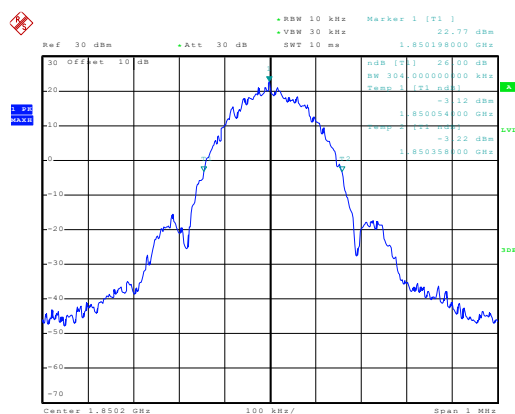
Date: 13.MAR.2016 11:12:19

Lowest channel
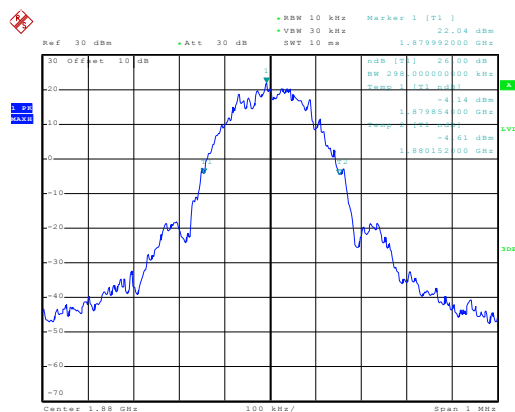
Date: 13.MAR.2016 11:11:26

Middle channel
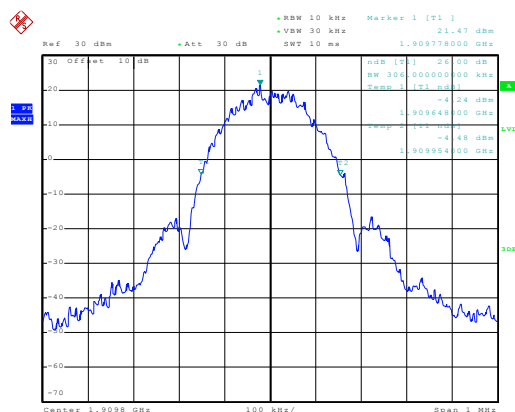
Date: 13.MAR.2016 11:11:12

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 23 of 62

99% Occupy bandwidth

UMTS 1900 12.2k RMC
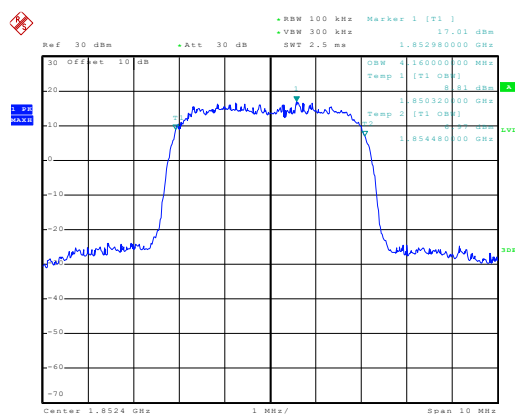
Date: 13.MAR.2016 10:36:34

Lowest channel
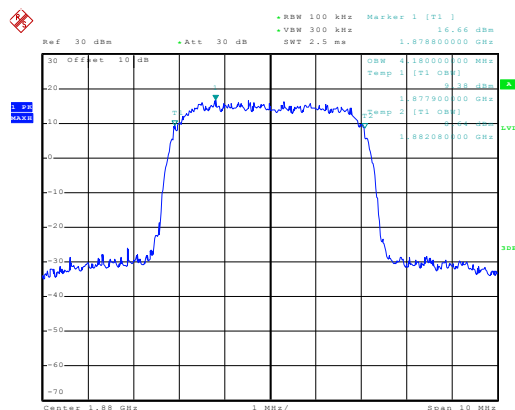
Date: 13.MAR.2016 10:36:16

Middle channel
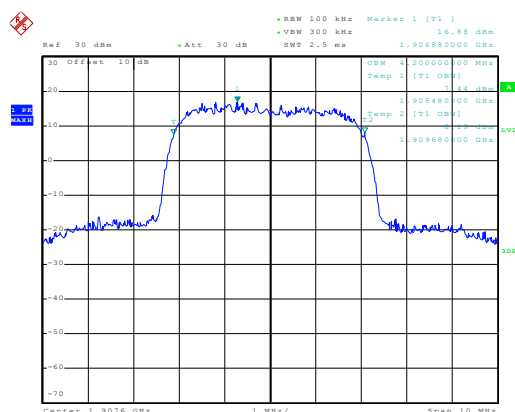
Date: 13.MAR.2016 10:35:45

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 24 of 62

26dB Emission Bandwidth

UMTS 1900 12.2k RMC
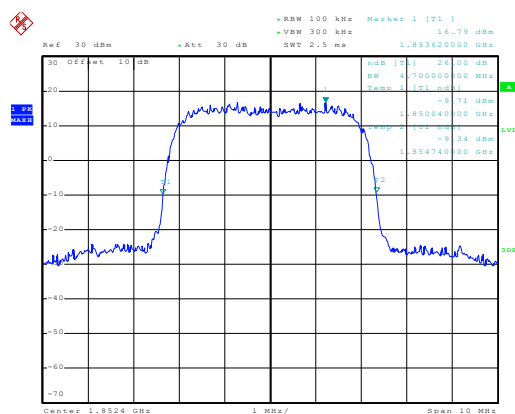
Date: 13.MAR.2016 10:36:41

Lowest channel
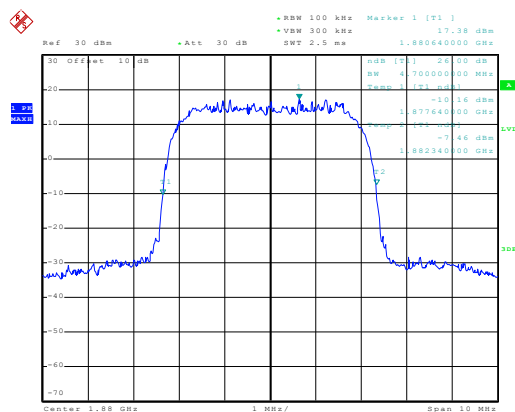
Date: 13.MAR.2016 10:36:09

Middle channel
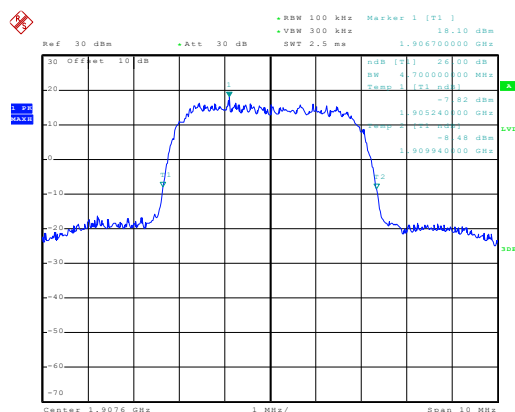
Date: 13.MAR.2016 10:35:53

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 25 of 62

6.7 Peak-to-Average Power Ratio

Test Requirement:	FCC part 24.232(d)
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	*Note: Measurement setup for testing on Antenna connector*
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, RBW ≥ OBW, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case)

Modulation	Test channel	PAPR
GSM 850	190	0.07
EGPRS 850	190	0.12
PCS 1900	661	0.08
EGPRS 1900	661	0.11
UMTS 1900 RMC	9400	3.04

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCISE1603028
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 26 of 62

Test plots as below:

Middle channel

Modulation: GSM 850
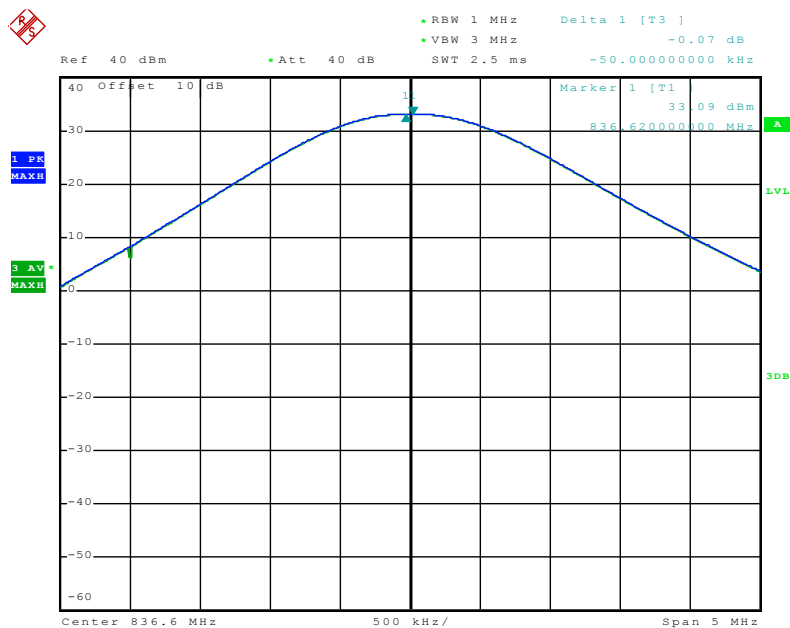
Date: 13.MAR.2016 10:55:23

Middle channel

Modulation: EGPRS 850

Date: 13.MAR.2016 10:56:37

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 27 of 62
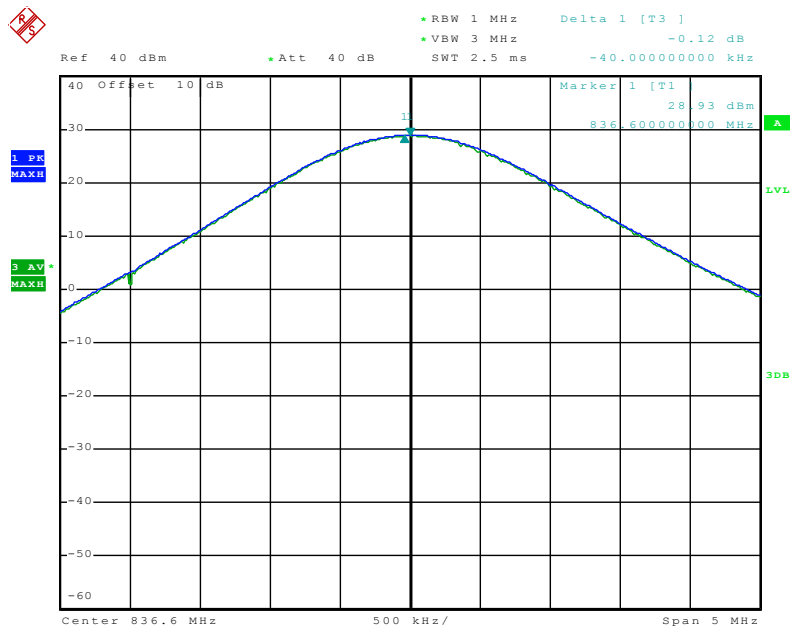
Middle channel

Modulation: PCS 1900

```
                                          *RBW 1 MHz    Delta 1 [T3 ]
                                          *VBW 3 MHz           -0.08 dB
              Ref  40 dBm     *Att  40 dB  SWT 2.5 ms    0.000000000 Hz
               40  Offset  10 dB                    Marker 1 [T1
                                                        1      29.40 dBm
                                                  1          1.880070000 GHz    A
   1 PK                                                                          
   MAXH                                                                          LVL
                                                                                
   3 AV                                                                         
   MAXH                                                                          3DB
   Center 1.88 GHz          500 kHz/               Span 5 MHz
```
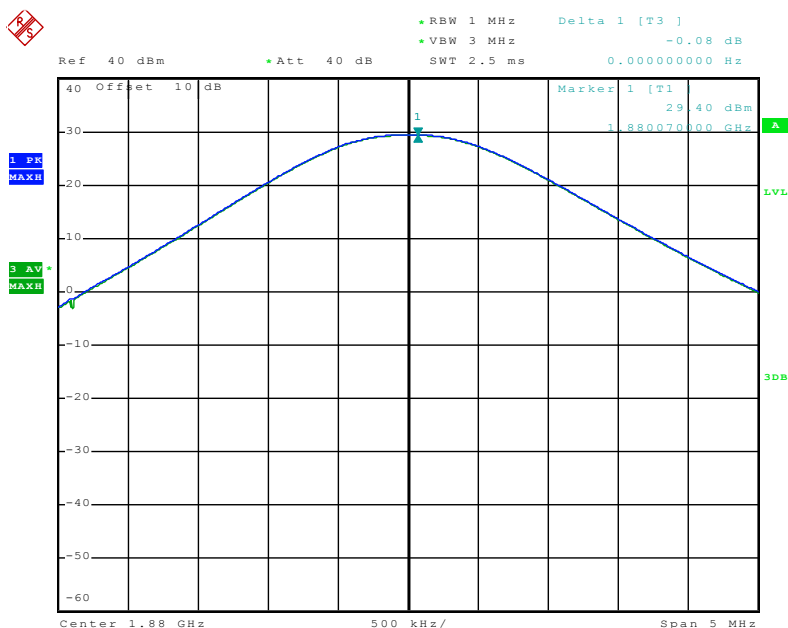
Date: 13.MAR.2016 10:54:45

Middle channel

Modulation: EGPRS 1900

```
                                          *RBW 1 MHz    Delta 1 [T3 ]
                                          *VBW 3 MHz           -0.11 dB
              Ref  40 dBm     *Att  40 dB  SWT 2.5 ms    0.000000000 Hz
               40  Offset  10 dB                    Marker 1 [T1
                                                        1      28.89 dBm
                                                           1.880000000 GHz    A
   1 PK                                                                          
   MAXH                                                                          LVL
                                                                                
   3 AV                                                                         
   MAXH                                                                          3DB
   Center 1.88 GHz          500 kHz/               Span 5 MHz
```

Date: 13.MAR.2016 10:59:19

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 28 of 62

Middle channel

Modulation: WCDMA BAND II RMC

```
                                    RBW 10 MHz
      Ref  40 dBm          * Att  40 dB      AQT 3.125 ms
        Offset  10 dB
```

Complementary Cumulative Distribution Function (100000 samples)

```
                   Trace 1
      Mean     22.37 dBm
      Peak     25.89 dBm
      Crest     3.52 dB

      10 %      1.76 dB
       1 %      2.60 dB
       .1 %     3.04 dB
       .01 %    3.24 dB
```
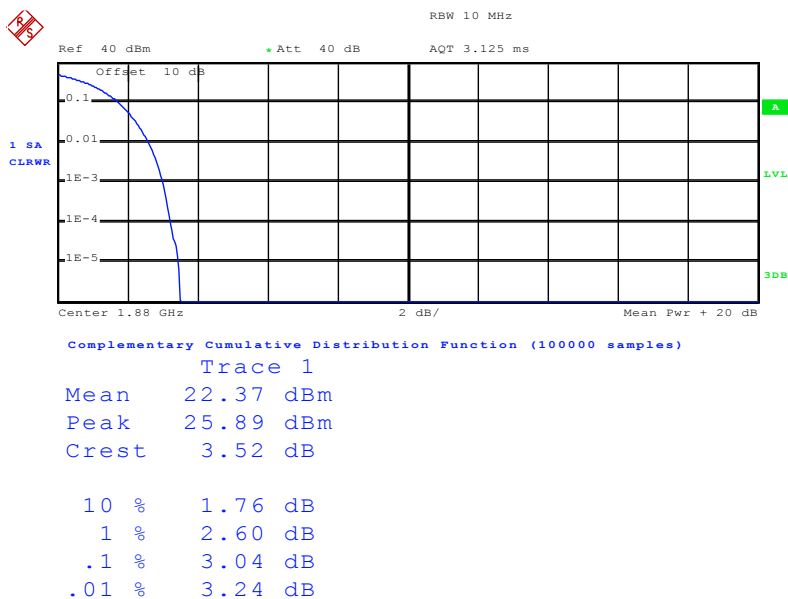
Date: 13.MAR.2016 11:02:30

6.8 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

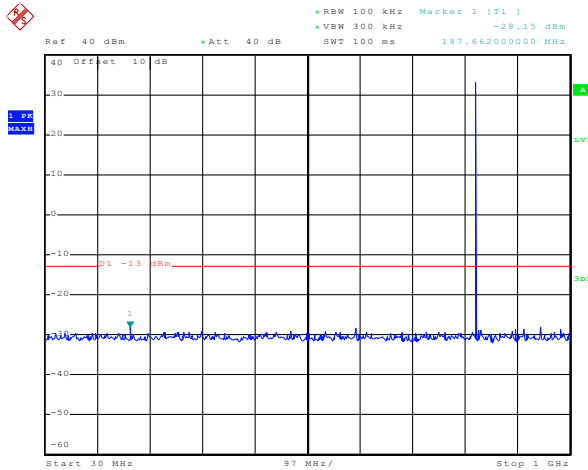## 6.9 Out of band emission at antenna terminals

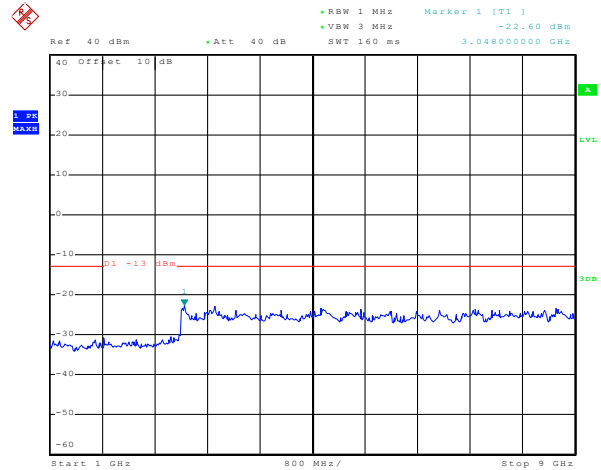|	
Test Requirement:	FCC part 22.917(a), FCC part 24.238(a)
Test Method:	FCC part 2.1051
Limit:	-13dBm
Test setup:	 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	5 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 6 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 7 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 8 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows:

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 30 of 62

Spurious emission

GSM 850

Lowest Channel

30MHz~1GHz

1GHz~9GHz

Middle channel

30MHz~1GHz

1GHz~9GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 31 of 62
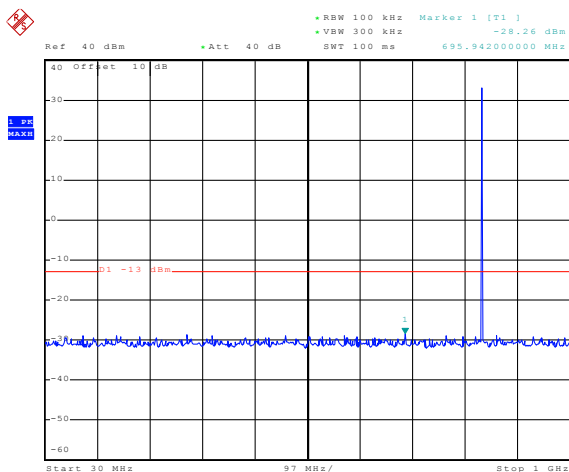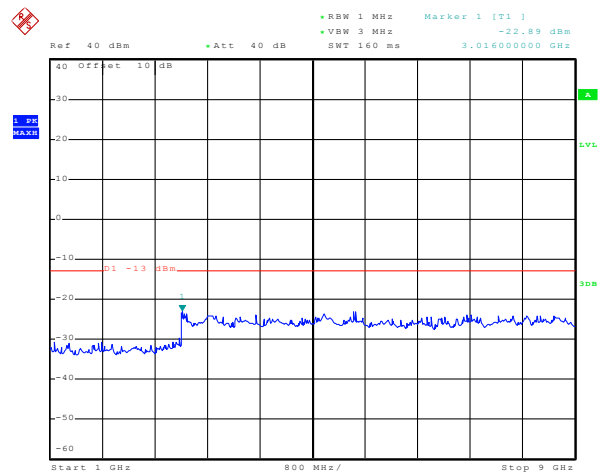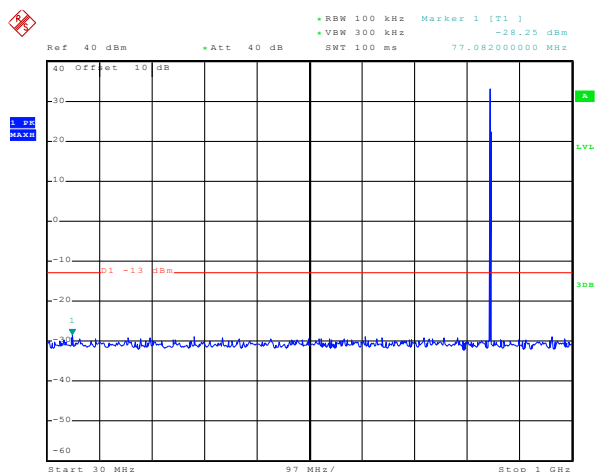
Highest Channel

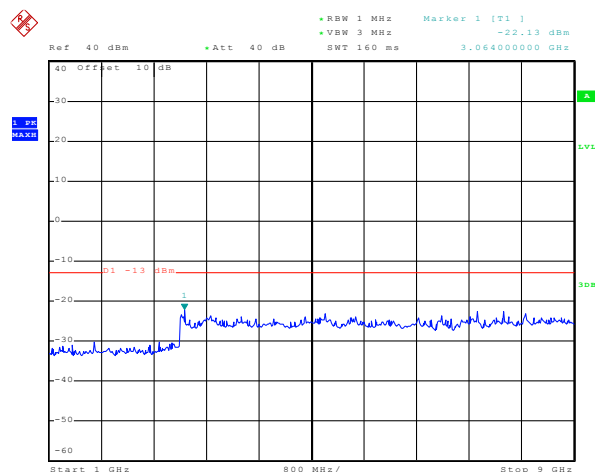
Date: 13.MAR.2016 10:47:43

30MHz~1GHz

Date: 13.MAR.2016 10:47:59
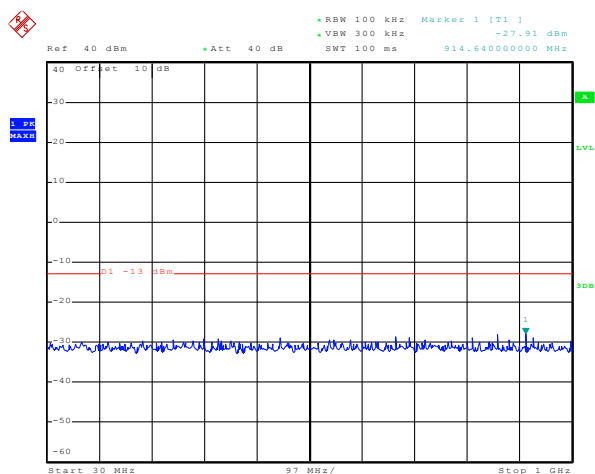
1GHz~9GHz

PCS 1900

Lowest Channel

Date: 13.MAR.2016 11:10:27

30MHz~1GHz
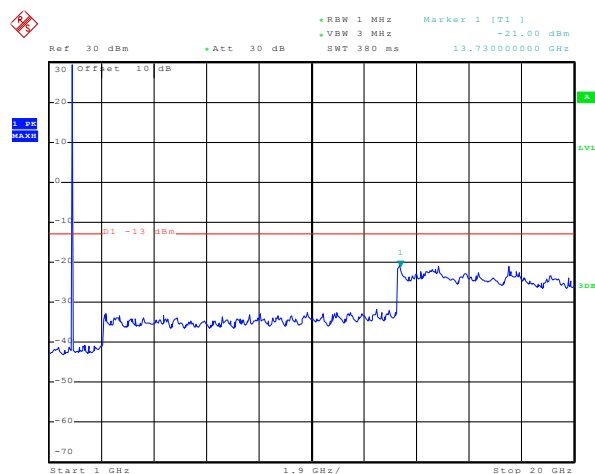
Date: 13.MAR.2016 10:49:29

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,

Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 32 of 62

Middle Channel

30MHz~1GHz

1GHz~20GHz

Highest Channel

30MHz~1GHz

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 33 of 62
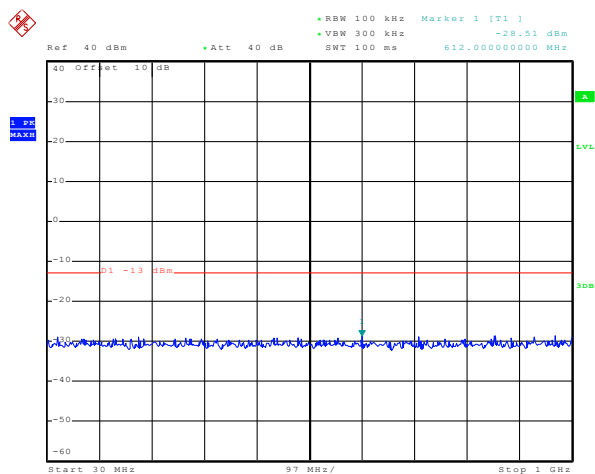
WCDMA Band II 12.2k RMC

Lowest Channel
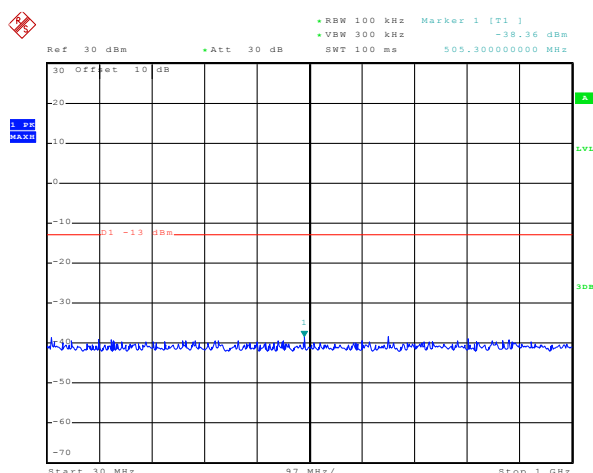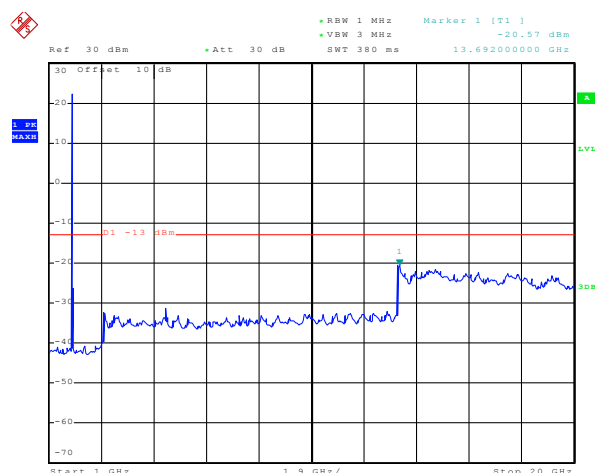
30MHz~1GHz

1GHz~20GHz

Middle Channel

30MHz~1GHz

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 34 of 62

Highest Channel

Date: 13.MAR.2016 10:33:57

30MHz~1GHz
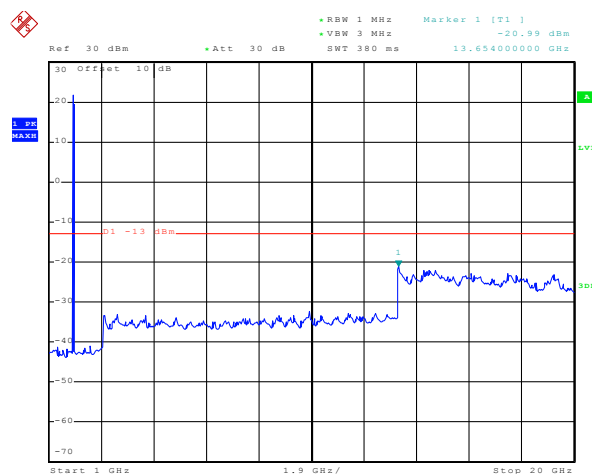
Date: 13.MAR.2016 10:33:41

1GHz~20GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 35 of 62

Band edge emission

GSM850
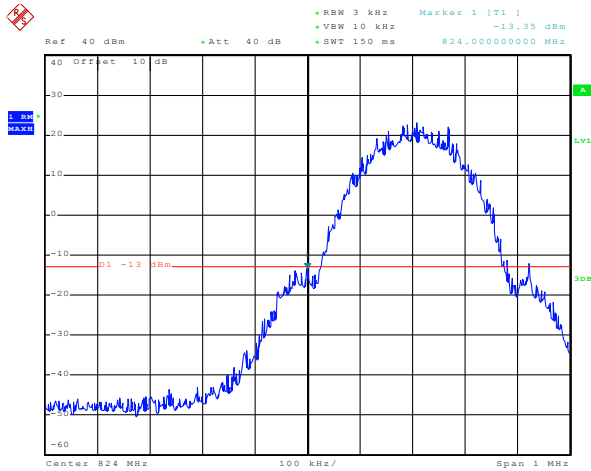
Date: 13.MAR.2016 10:46:21

Lowest channel
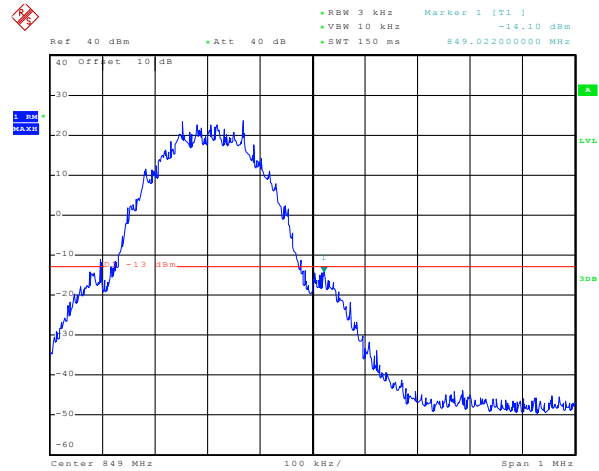
Date: 13.MAR.2016 10:45:53

Highest channel

PCS1900
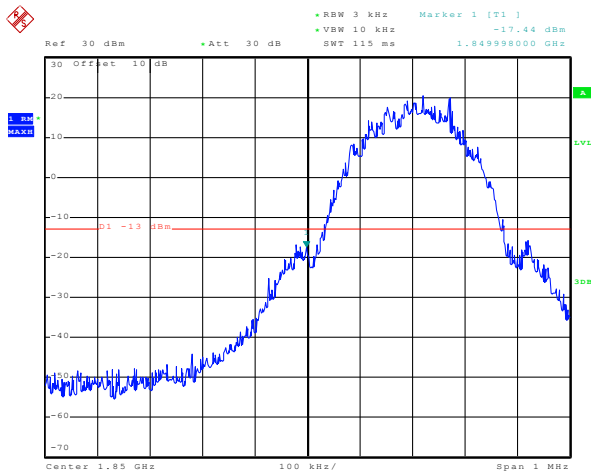
Date: 13.MAR.2016 10:51:58

Lowest channel
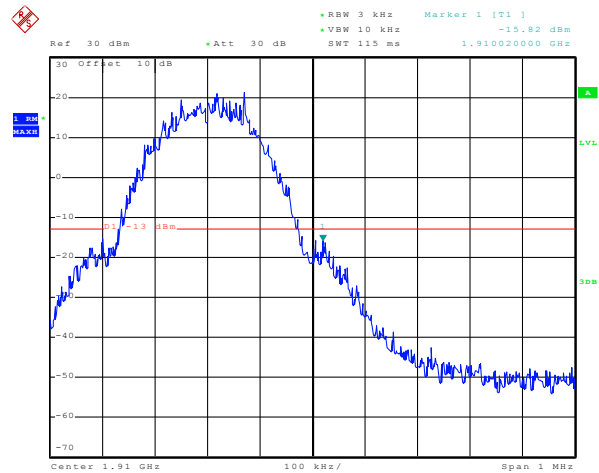
Date: 13.MAR.2016 10:51:34

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 36 of 62

EGPRS850
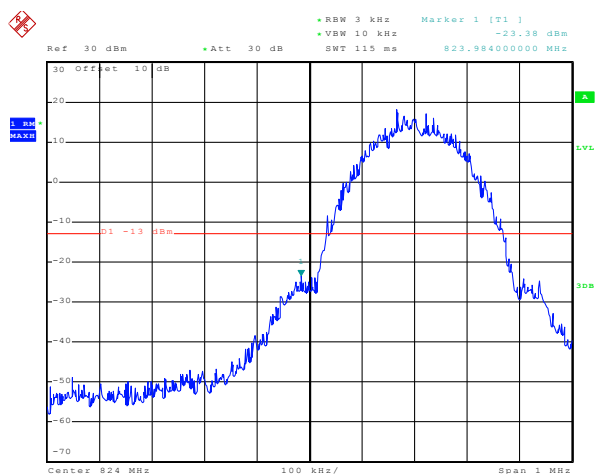
Date: 13.MAR.2016 10:38:18

Lowest channel
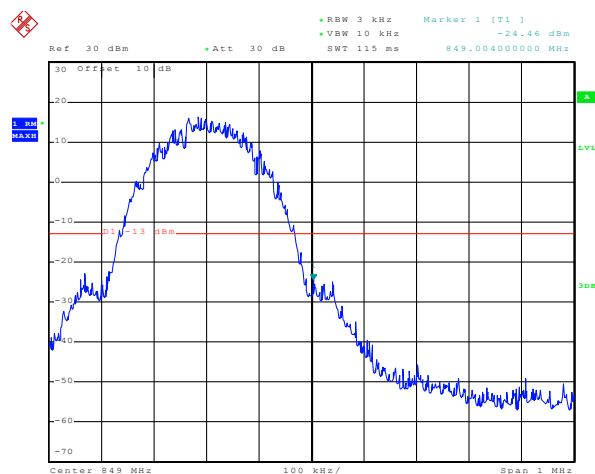
Date: 13.MAR.2016 10:38:55

Highest channel

EGPRS1900
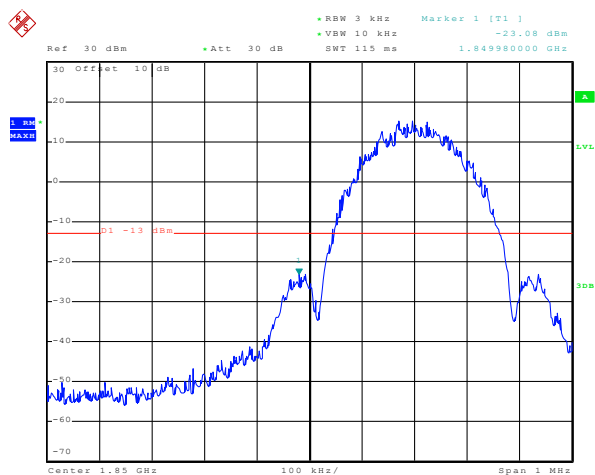
Date: 13.MAR.2016 11:09:09

Lowest channel
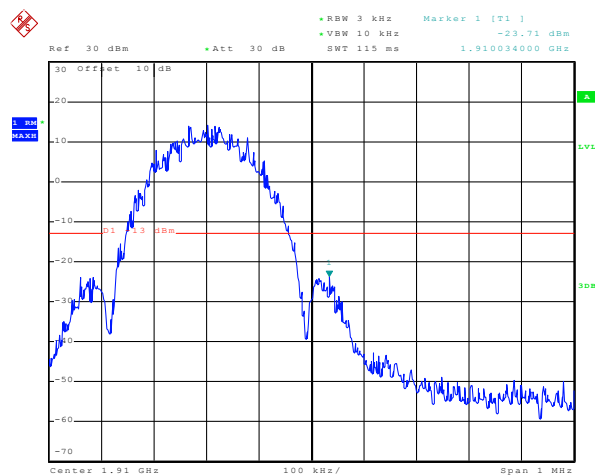
Date: 13.MAR.2016 11:09:33

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 37 of 62

WCDMA Band II RMC 12.2kbps
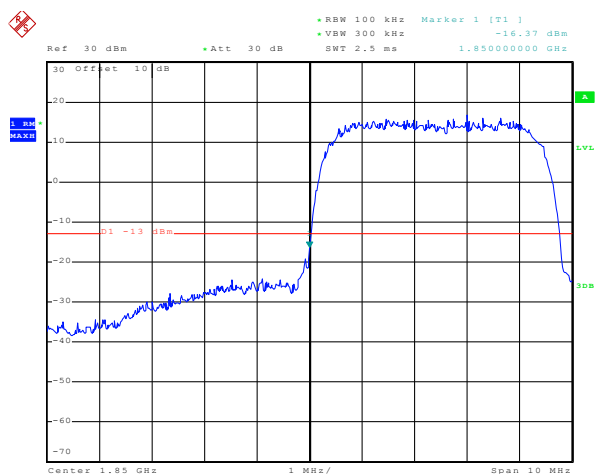
Date: 13.MAR.2016 10:34:59
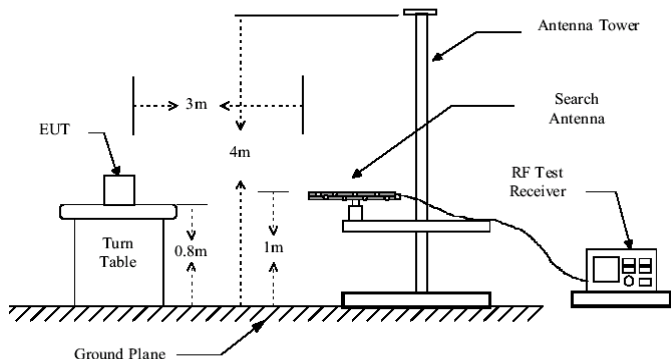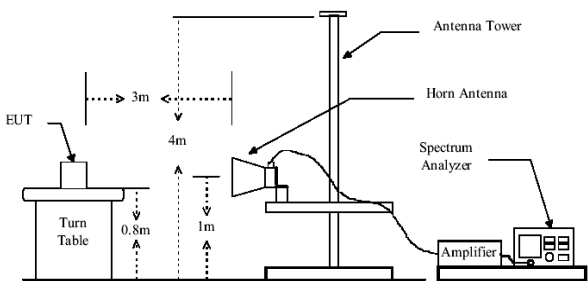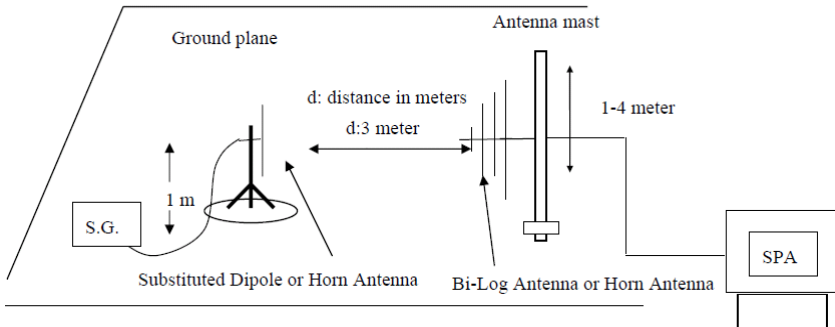
Lowest channel
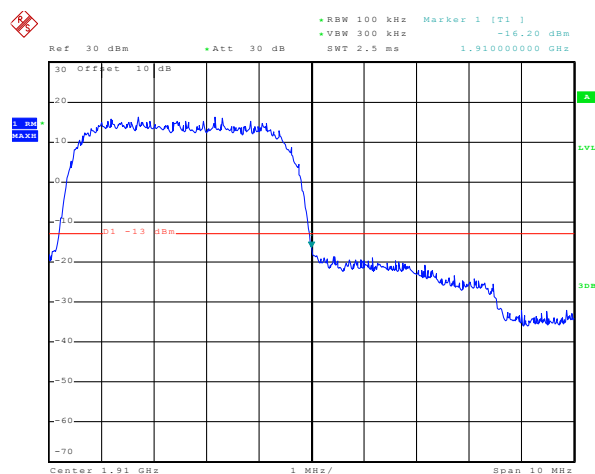
Date: 13.MAR.2016 10:35:19

Highest channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 38 of 62

6.10 ERP, EIRP Measurement

Test Requirement:	FCC part 22.913(a), FCC part 24.232(b)
Test Method:	FCC part 2.1046
Limit:	GSM850 7W: ERP PCS1900 2W: EIRP WCDMA Band II: 2W EIRP
Test setup:	Below 1GHz Above 1GHz Substituted method:
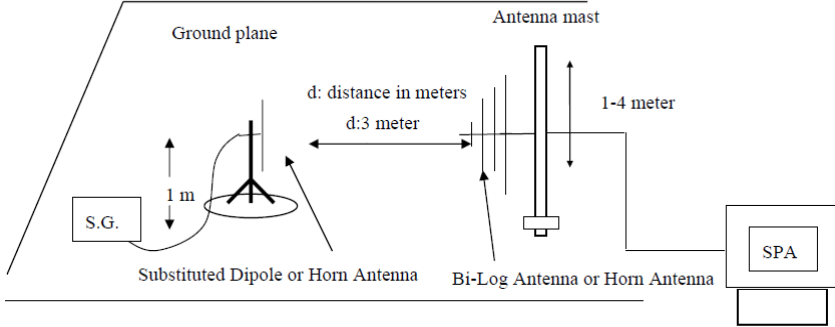
Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 39 of 62

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.
	2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.
	3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:
	ERP = S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)
	4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:
	EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)
	5. The worse case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed (All three channels were tested, and just the worst case data were shown in the report.)

Measurement Data (worst case)

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850	190	H	V	29.08	38.45	Pass
			H	27.26		
EGPRS 850	128	H	V	25.19		
			H	23.71		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
PCS1900	810	H	V	25.42	33	Pass
			H	19.91		
EGPRS 1900	512	H	V	24.39		
			H	22.77		
UMTS 1900 12.2k RMC	9400	H	V	20.40		
			H	17.25		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 41 of 62

6.11 Field strength of spurious radiation measurement

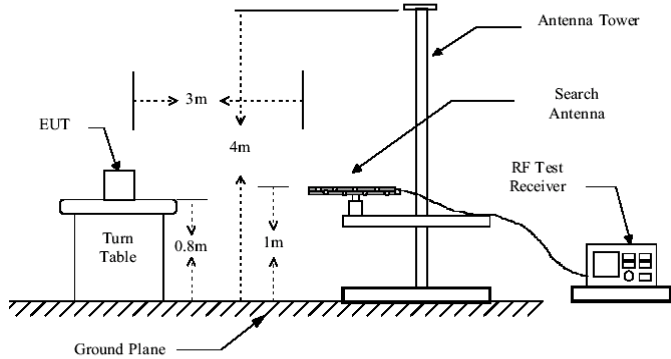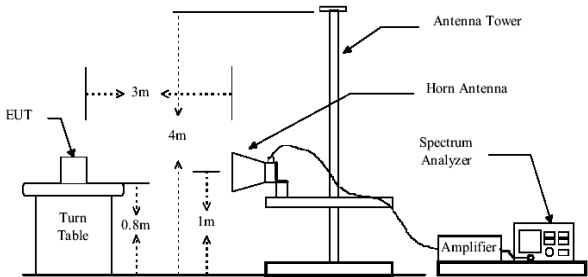| Test Requirement:	FCC part 22.917(a), FCC part 24.238(a)
Test Method:	FCC part 2.1053
Limit:	-13dBm
Test setup:	Below 1GHz Above 1GHz Substituted method:
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 42 of 62

	4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. ERP / EIRP = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB)	
Test Uncertainty:	$\pm$ 4.88 dB	
Test Instruments:	Refer to section 5.8 for details	
Test mode:	Refer to section 5.3 for details.	
Test results:	Passed	

Shenzhen Zhongjian Nanfang Testing Co., Ltd.   Project No.: CCISE1603028
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366   Page 43 of 62

Measurement Data (worst case)

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-44.90	-13.00	Pass
2472.60	V	-44.15		
3296.80	V	-50.19		
1648.40	Horizontal	-48.09	-13.00	Pass
2472.60	H	-43.48		
3296.80	H	-49.17		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-48.31	-13.00	Pass
2509.80	V	-48.23		
3346.40	V	-51.65		
1673.20	Horizontal	-53.84	-13.00	Pass
2509.80	H	-49.70		
3346.40	H	-51.54		
Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-49.26	-13.00	Pass
2546.40	V	-47.31		
3395.20	V	-47.74		
1697.60	Horizontal	-53.02	-13.00	Pass
2546.40	H	-51.31		
3395.20	H	-48.03		

Remark:
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 44 of 62

Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-51.86	-13.00	Pass
5550.60	V	-42.10		
3700.40	Horizontal	-50.83	-13.00	Pass
5550.60	H	-43.14		
Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-50.36	-13.00	Pass
5640.00	V	-42.39		
3760.00	Horizontal	-50.65	-13.00	Pass
5640.00	H	-43.28		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-51.96	-13.00	Pass
5729.40	V	-42.24		
3819.60	Horizontal	-52.05	-13.00	Pass
5729.40	H	-43.51		

Remark:
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.
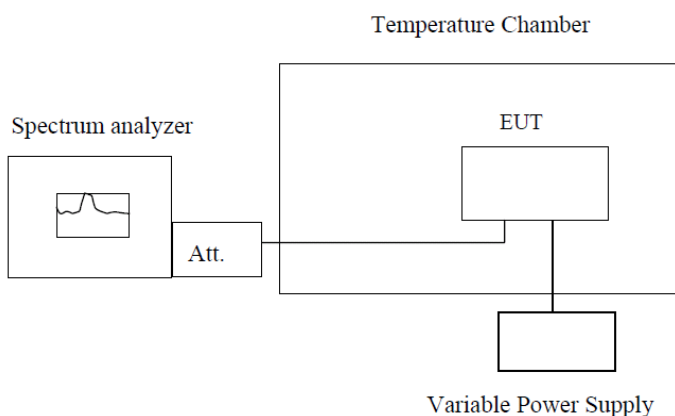
Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 45 of 62

Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-51.39	-13.00	Pass
5557.20	V	-44.78		
3704.80	Horizontal	-51.05		
5557.20	H	-44.32		
Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-51.89	-13.00	Pass
5640.00	V	-43.83		
3760.00	Horizontal	-51.73		
5640.00	H	-44.14		
Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-51.13	-13.00	Pass
5722.80	V	-44.55		
3815.20	Horizontal	-51.47		
5722.80	H	-44.89		

Remark:
1. *The emission levels of below 1 GHz are very lower than the limit and not show in test report.*

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 46 of 62

6.12 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part 2.1055(a)(1)(b)
Test Method:	FCC Part 2.1055(a)(1)(b)
Limit:	±2.5 ppm
Test setup:

Note : Measurement setup for testing on Antenna connector |
| Test procedure: | 1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to −30℃. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10℃ increased per stage until the highest temperature of +50℃ reached |
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 47 of 62

Measurement Data:
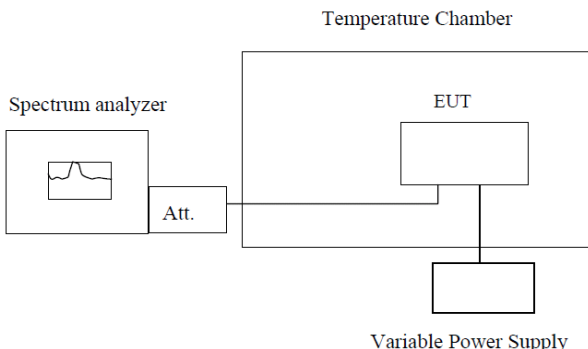
Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	177	0.211571	±2.5	Pass
	-20	166	0.198422		
	-10	135	0.161367		
	0	163	0.194836		
	10	152	0.181688		
	20	142	0.169735		
	30	150	0.179297		
	40	162	0.193641		
	50	105	0.125508		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	180	0.095745	±2.5	Pass
	-20	145	0.077128		
	-10	177	0.094149		
	0	146	0.077660		
	10	163	0.086702		
	20	155	0.082447		
	30	158	0.084043		
	40	169	0.089894		
	50	124	0.065957		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 48 of 62

Reference Frequency: EGPRS850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	164	0.196032	±2.5	Pass
	-20	154	0.184078		
	-10	126	0.150610		
	0	134	0.160172		
	10	129	0.154196		
	20	106	0.126703		
	30	127	0.151805		
	40	158	0.188860		
	50	146	0.174516		

Reference Frequency: EGPRS 1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	142	0.075532	±2.5	Pass
	-20	150	0.079787		
	-10	133	0.070745		
	0	126	0.067021		
	10	140	0.074468		
	20	127	0.067553		
	30	138	0.073404		
	40	105	0.055851		
	50	107	0.056915		

Reference Frequency: WCDMA BAND II 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	151	0.080319	±2.5	Pass
	-20	102	0.054255		
	-10	123	0.065426		
	0	134	0.071277		
	10	126	0.067021		
	20	103	0.054787		
	30	105	0.055851		
	40	147	0.078191		
	50	139	0.073936		

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 49 of 62

6.13 Frequency stability V.S. Voltage measurement

Test Requirement:	FCC Part 2.1055(d)(1)(2)
Test Method:	FCC Part 2.1055(d)(1)(2)
Limit:	±2.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25℃. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Passed

Measurement Data (the worst channel):

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366

Project No.: CCISE1603028

Page 50 of 62

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	85	0.101602	±2.5	Pass
	3.70	88	0.105188		
	3.14	74	0.088453		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	69	0.036702	±2.5	Pass
	3.70	80	0.042553		
	3.14	79	0.042021		

Reference Frequency: EGPRS 850 Middle channel= 190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	63	0.075305	±2.5	Pass
	3.70	59	0.070524		
	3.14	88	0.105188		

Reference Frequency: EGPRS 1900 Middle channel= 661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	74	0.039362	±2.5	Pass
	3.70	79	0.042021		
	3.14	49	0.026064		

Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	58	0.030851	±2.5	Pass
	3.70	56	0.029787		
	3.14	70	0.037234		