

FCC

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.




FOR

Kanex GoPower Battery Pack 4000mAh

ISSUED TO
Kanex

1405 Pioneer Street Brea, California 92821

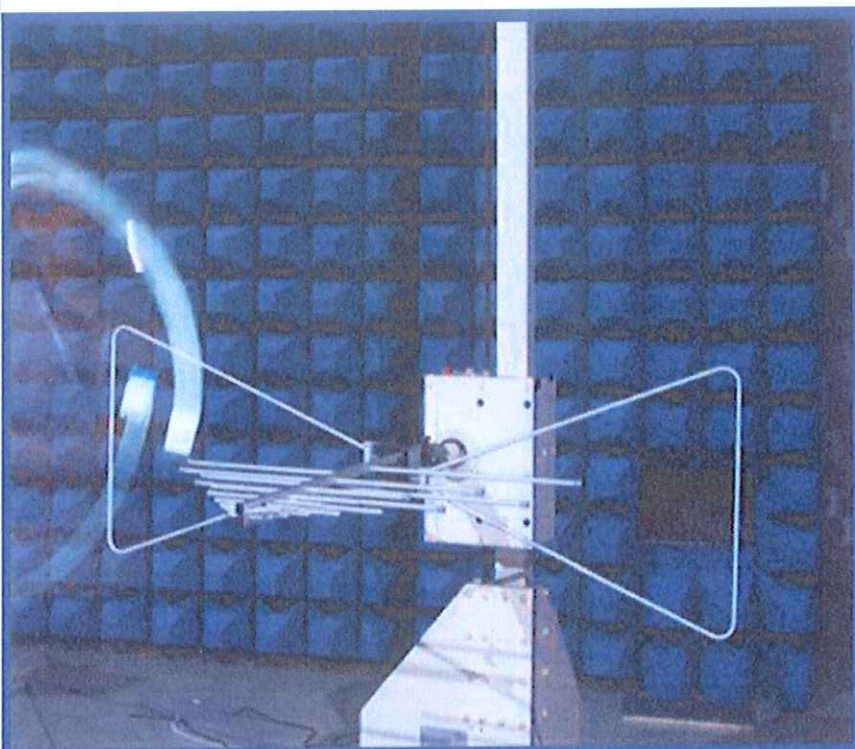

Tested by:

Cao Shaoqiong
(Engineer)

Date May 17, 2016

Approved by:

Wei Yangtian
(Chief Engineer)

Date May 17, 2016

Report No.: BL-SZ1640161-601

EUT Type: Kanex GoPower Battery Pack 4000mAh

Model Name: K168-1066

Brand Name: Kanex

Test Standard: FCC Part 15 C

FCC ID: 2AG6ZK168-1066

Test conclusion: Pass

Test Date: Apr. 26, 2016 ~ May 4, 2016

Date of Issue: May 17, 2016

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>May 13, 2016</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>May 17, 2016</u>	<u>Modify the operating frequency range</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment	6
2.6	Technical Information	7
3	SUMMARY OF TEST RESULTS.....	8
3.1	Test Standards.....	8
3.2	Verdict	8
3.3	Test Uncertainty	8
4	GENERAL TEST CONFIGURATIONS.....	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Enclosure list.....	10
4.4	Test Setups	11
5	TEST ITEMS.....	13
5.1	Emission Tests.....	13
ANNEX A	TEST RESULTS.....	15

A.1	Radiated Emission	15
A.2	Conducted Emission	18
ANNEX B	TEST SETUP PHOTOS	20
ANNEX C	EUT EXTERNAL PHOTOS	20
ANNEX D	EUT INTERNAL PHOTOS	20

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C~25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v1.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.

- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Kanex
Address	1405 Pioneer Street Brea, California 92821

2.2 Manufacturer Information

Manufacturer	Ablelink Electronics Ltd
Address	Unit 15, 9/F, Block A, Po Lung Centre, 11 Wang Chiu Road, Kowloon Bay, Kowloon, HongKong

2.3 Factory Information

Factory	Ablelink Electronics Ltd
Address	182 Qingzhang Road, Chang Shan Tou, QingXiTown, Dongguan, China

2.4 General Description for Equipment under Test (EUT)

EUT Type	Kanex GoPower Battery Pack 4000mAh
Model Name Under Test	K168-1066
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.0
Software Version	N/A
Network and Wireless connectivity	Qi
About the Product	Only the Qi was tested in this report.

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	Joysun
	Model No.	JS104669-Q1
	Serial No.	N/A
	Capacitance	4000 mAh
	Rated Voltage	3.7 V
	Limit Charge Voltage	4.2 V

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Operating Frequency	150~205 kHz
Antenna Type	Coil Antenna
Antenna Gain	0 dBi
About Product	The EUT support the QI technology, and it have the same operating frequency.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.209,15.215(b)	Pass	Annex A.1
2	Conducted Emission, AC Ports	15.207	Pass	Annex A.2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	2.79 dB
Radiated emissions (30 MHz-1 GHz)	3.45 dB
Radiated emissions (1 GHz-18 GHz)	3.67 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	DC 3.7 V

4.2 Test Equipment List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2015.07.14	2016.07.13
Test Antenna- Loop(9 kHz- 30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21
Test Antenna- Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21
Test Antenna- Horn(1- 18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21
Test Antenna- Horn(15- 26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2015.07.22	2017.07.21
Anechoic Chamber	RAINFORD	9 m*6 m*6 m	N/A	2015.02.28	2017.02.27
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2015.07.14	2016.07.13
LISN	SCHWARZBECK	NSLK 8127	8127-687	2015.07.14	2016.07.13
AMN	SCHWARZBECK	NNBM8124	8124-509	2015.07.14	2016.07.13
AMN	SCHWARZBECK	NNBM8124	8124-510	2015.07.14	2016.07.13
ISN	TESEQ	ISN T800	34449	2015.07.14	2016.07.13
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A

4.3 Test Enclosure list

Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	N/A	N/A	N/A	N/A	Special Handled	<input type="checkbox"/>
Printer	HP	DESKJET 1000	N/A	N/A	N/A	<input type="checkbox"/>
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	<input type="checkbox"/>
Mouse	Logitech	M100	N/A	N/A	N/A	<input type="checkbox"/>
USB disk	Kingston	N/A	N/A	N/A	N/A	<input type="checkbox"/>
TF Card	Kingston	N/A	N/A	N/A	N/A	<input type="checkbox"/>
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
QI Load	N/A	N/A	N/A	N/A	5W	<input type="checkbox"/>
PMA Load	N/A	N/A	N/A	N/A	N/A	<input type="checkbox"/>
Phone	N/A	M.T.T	N/A	N/A	N/A	<input type="checkbox"/>


4.4 Test Setups

Test Setup 1

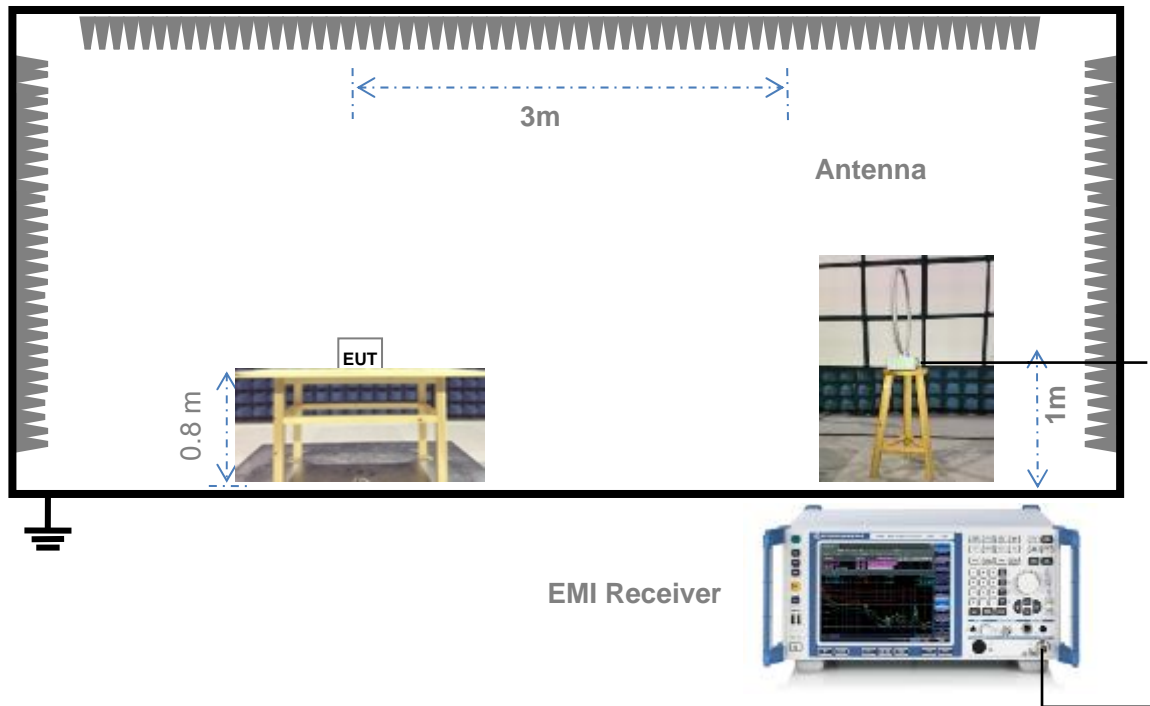


For Radiated Emission Test (Below 30 MHz))

Test Setup 2

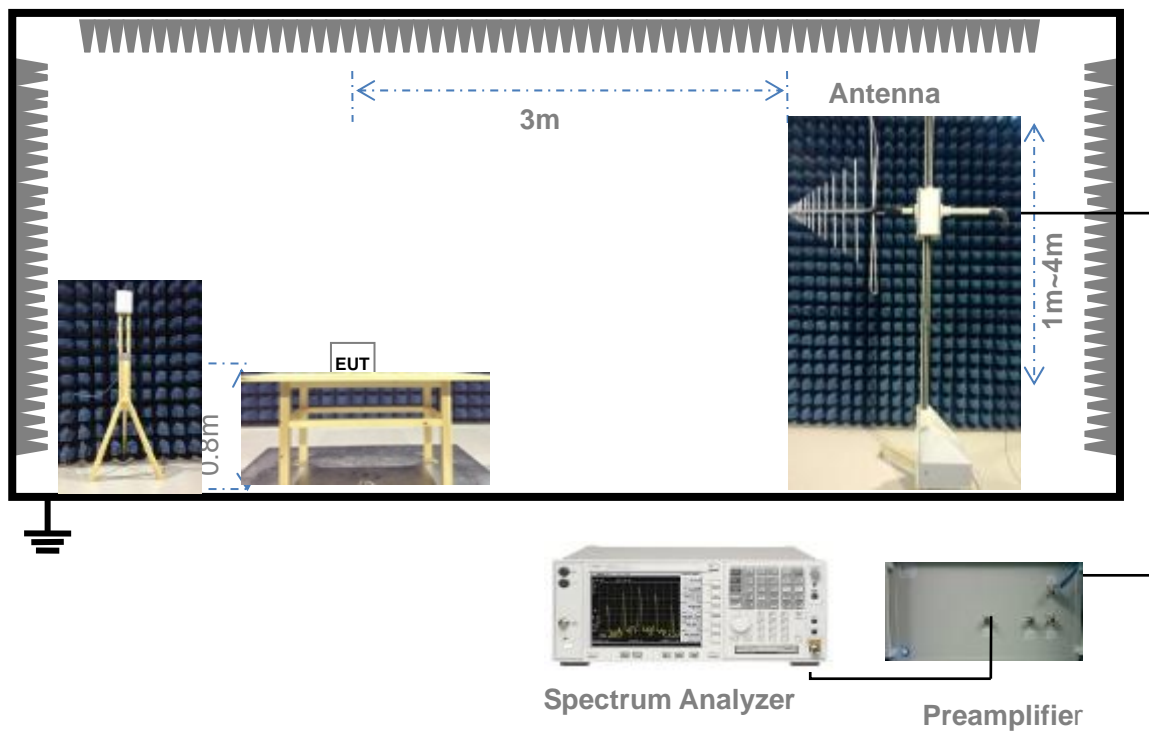


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 3

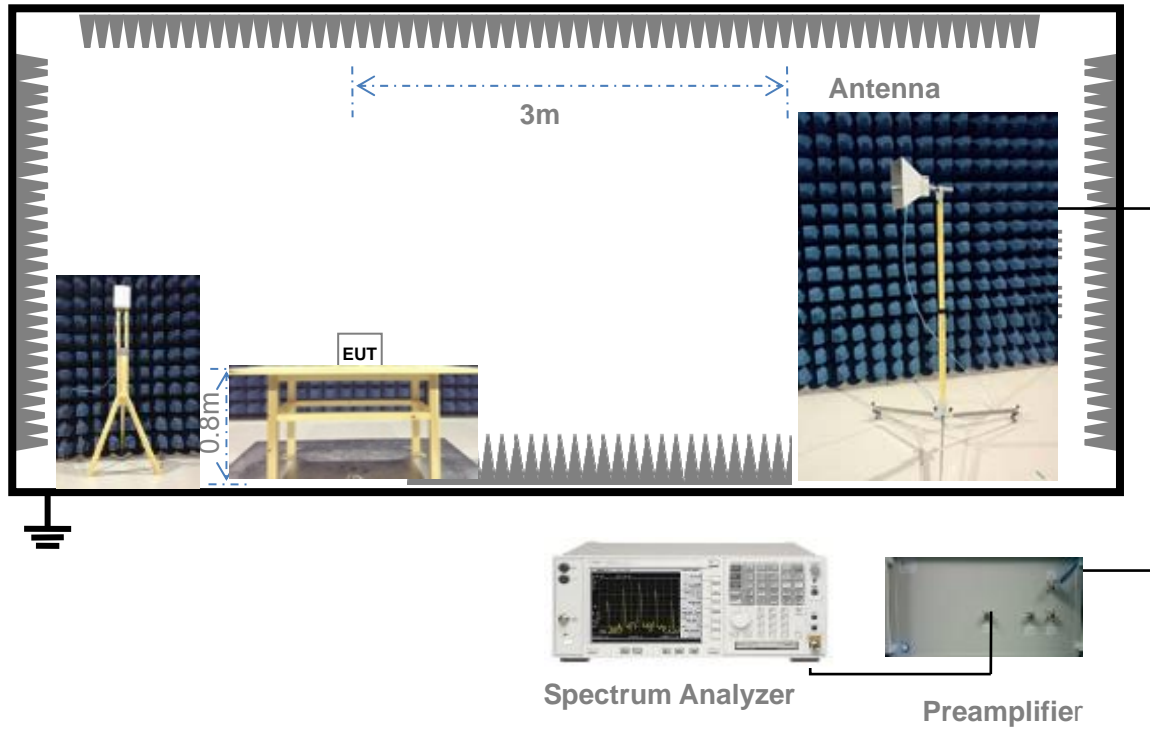

(For Radiated Emission Test (above 1 GHz))

Test Setup 4

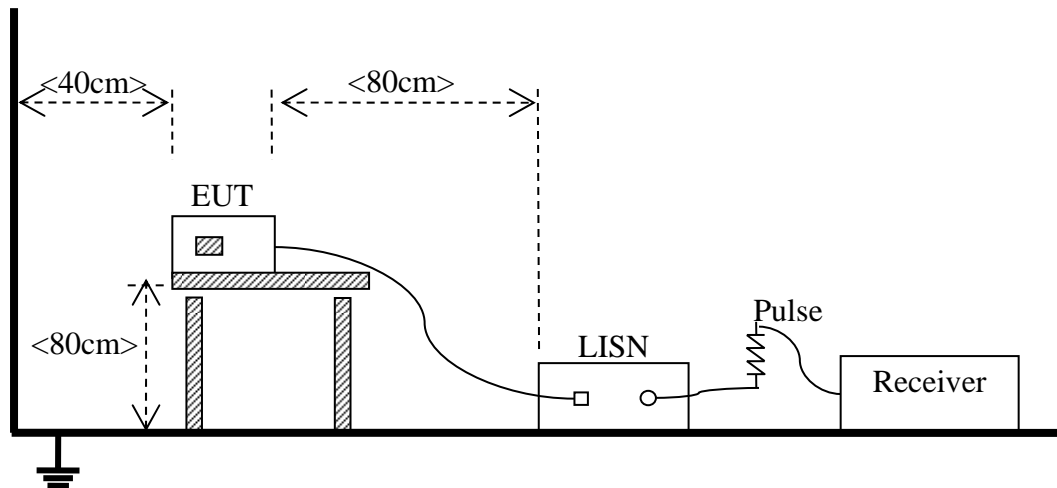

(For Conducted Emission, AC Ports Test)

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000 MHz, limit field strength of harmonics: 54 $\text{dBuV/m}@3\text{ m}$ (AV) and 74 $\text{dBuV/m}@3\text{ m}$ (PK)

5.1.1.2 Test Setup

Refer to 4.5 section (test setups1 to test setups3) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 4) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.13-2010, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data and Plots

A.1.1 9 kHz –30 MHz


RE Test case_FCC 15C 9KHz-30MHz

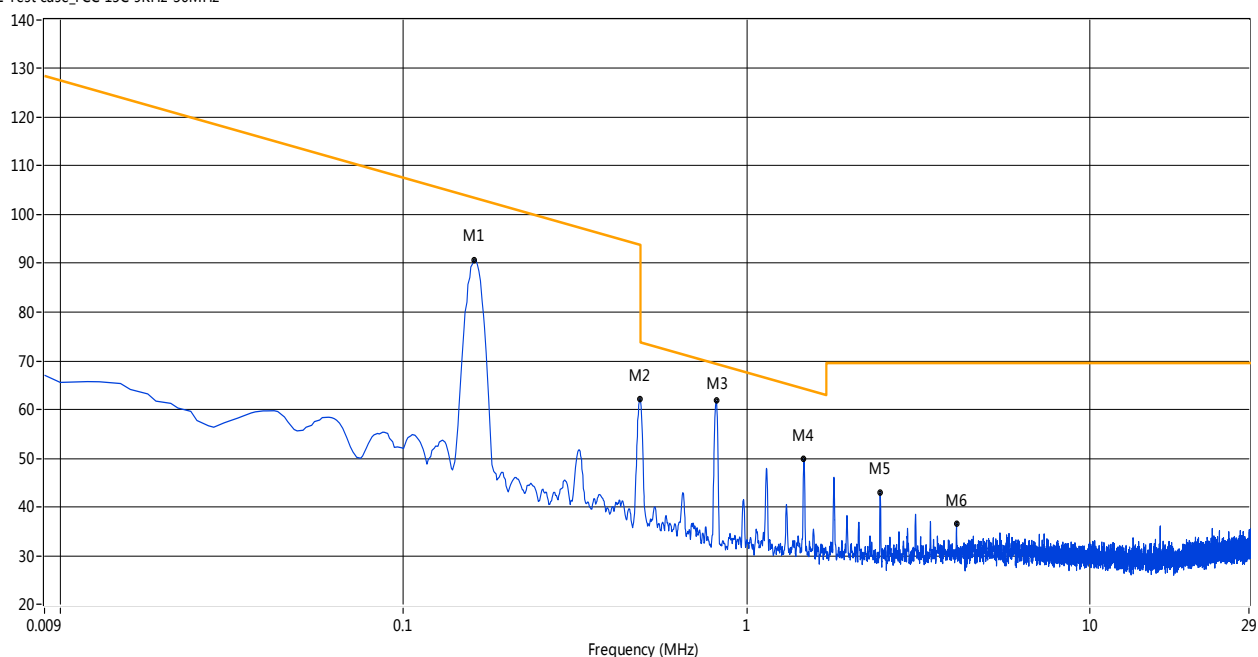

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	0.16	90.71	19.81	117.6	26.89	Peak	359.70	100	Vertical	Pass
2	0.49	62.19	19.95	94.0	31.81	Peak	357.00	100	Vertical	Pass
3	0.81	61.78	20.21	70.9	9.12	Peak	359.30	100	Vertical	Pass
4	1.47	49.80	20.28	65.1	15.30	Peak	355.30	100	Vertical	Pass
5	2.45	42.91	20.20	69.5	26.59	Peak	352.90	100	Vertical	Pass
6	4.08	36.61	20.57	69.5	32.89	Peak	357.00	100	Vertical	Pass

A.1.2 Test Antenna Vertical, 30 MHz – 1 GHz


RE Test case_FCC_Part 15C_FCC 15C 30MHz-1GHz

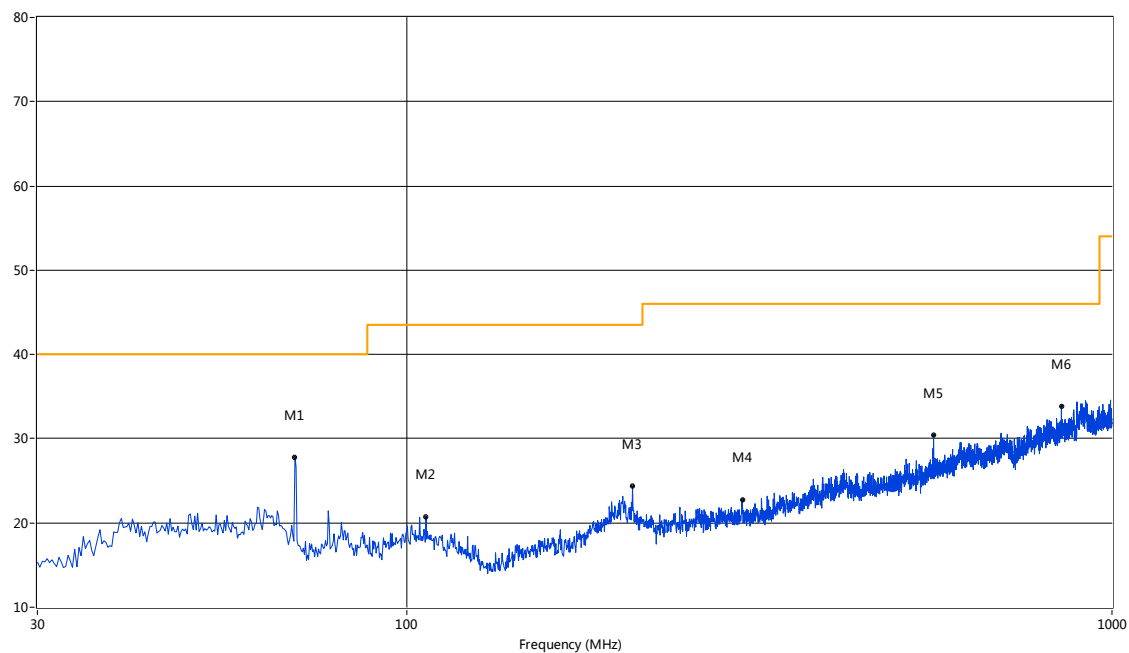

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	69.52	27.82	-22.40	40.0	12.18	Peak	4.00	100	Vertical	Pass
2	106.61	20.72	-20.12	43.5	22.78	Peak	156.00	100	Vertical	Pass
3	209.16	24.33	-19.99	43.5	19.17	Peak	346.00	100	Vertical	Pass
4	299.35	22.77	-17.53	46.0	23.23	Peak	123.00	100	Vertical	Pass
5	558.52	30.47	-11.53	46.0	15.53	Peak	136.00	100	Vertical	Pass
6	847.75	33.87	-5.94	46.0	12.13	Peak	251.00	100	Vertical	Pass

A.1.3 Test Antenna Horizontal, 30 MHz – 1 GHz

RE Test case_FCC_Part 15C_FCC 15C 30MHz-1GHz

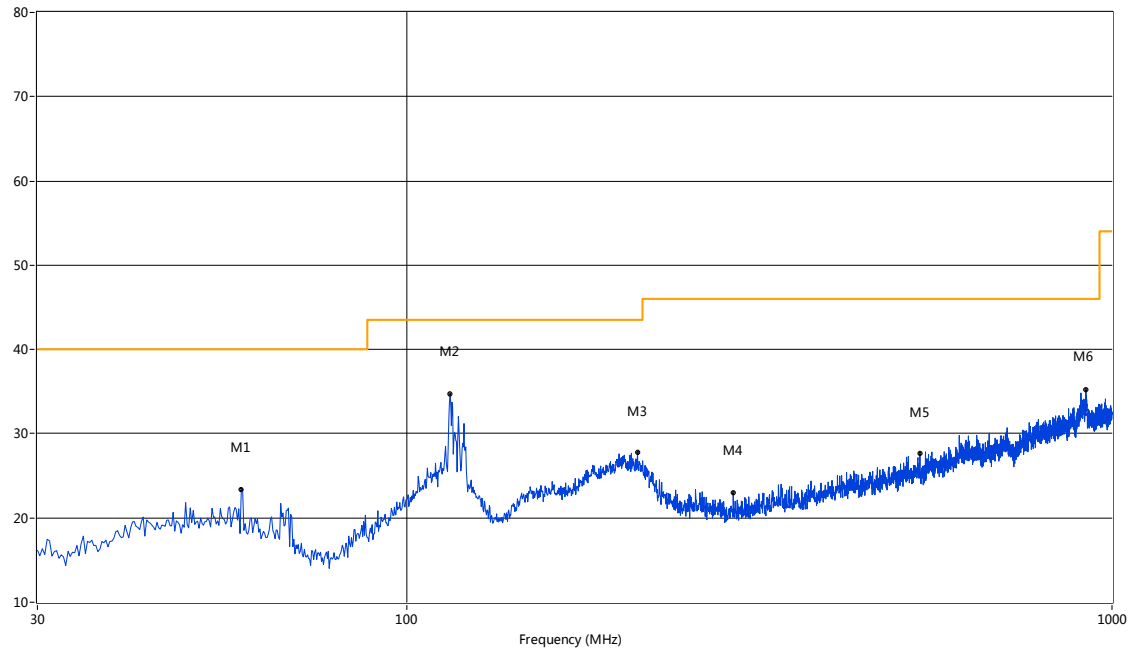


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	58.37	23.37	-19.85	40.0	16.63	Peak	205.30	100	Horizontal	Pass
2	115.34	34.75	-20.96	43.5	8.75	Peak	225.50	100	Horizontal	Pass
3	212.56	27.84	-19.97	43.5	15.66	Peak	335.70	100	Horizontal	Pass
4	290.62	22.99	-17.78	46.0	23.01	Peak	17.50	100	Horizontal	Pass
5	534.27	27.65	-12.17	46.0	18.35	Peak	104.80	100	Horizontal	Pass
6	918.05	35.20	-3.48	46.0	10.80	Peak	2.80	100	Horizontal	Pass

A.2 Conducted Emission

Test Data and Plots

A.2.1 L Phase


CE Test case_CE_EN 55022_Class B

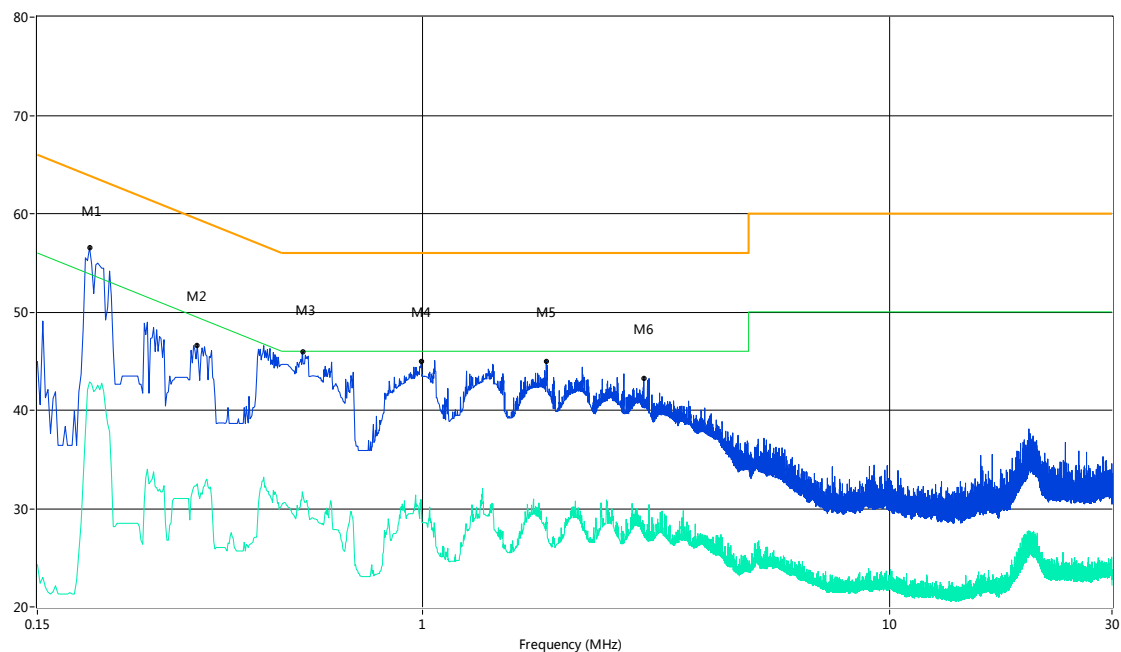

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.19	56.5	13.00	64.7	8.20	Peak	L Line	Pass
1**	0.19	42.9	13.00	54.7	11.80	AV	L Line	Pass
2	0.33	46.6	13.00	60.9	14.30	Peak	L Line	Pass
2**	0.33	32.5	13.00	50.9	18.40	AV	L Line	Pass
3	0.55	45.9	13.00	56.0	10.10	Peak	L Line	Pass
3**	0.55	31.7	13.00	46.0	14.30	AV	L Line	Pass
4	1.00	44.9	13.00	56.0	11.10	Peak	L Line	Pass
4**	1.00	29.8	13.00	46.0	16.20	AV	L Line	Pass
5	1.84	45.0	13.00	56.0	11.00	Peak	L Line	Pass
5**	1.84	29.0	13.00	46.0	17.00	AV	L Line	Pass
6	2.98	43.3	13.00	56.0	12.70	Peak	L Line	Pass
6**	2.98	27.8	13.00	46.0	18.20	AV	L Line	Pass

A.2.2 N Phase

CE Test case_CE_CE_EN 55022_Class B

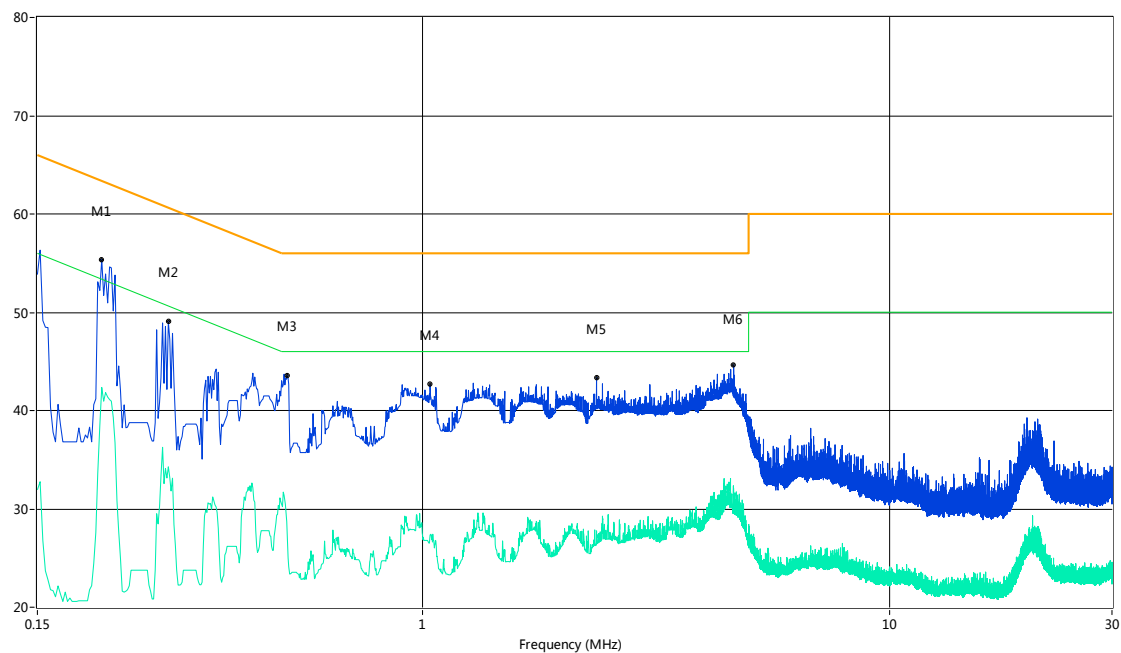

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.21	55.4	13.00	64.4	9.00	Peak	N Line	Pass
1**	0.21	42.3	13.00	54.4	12.10	AV	N Line	Pass
2	0.29	49.0	13.00	62.1	13.10	Peak	N Line	Pass
2**	0.29	34.3	13.00	52.1	17.80	AV	N Line	Pass
3	0.51	43.6	13.00	56.0	12.40	Peak	N Line	Pass
3**	0.51	27.3	13.00	46.0	18.70	AV	N Line	Pass
4	1.04	42.6	13.00	56.0	13.40	Peak	N Line	Pass
4**	1.04	27.3	13.00	46.0	18.70	AV	N Line	Pass
5	2.36	43.4	13.00	56.0	12.60	Peak	N Line	Pass
5**	2.36	27.8	13.00	46.0	18.20	AV	N Line	Pass
6	4.64	44.7	13.00	56.0	11.30	Peak	N Line	Pass
6**	4.64	32.1	13.00	46.0	13.90	AV	N Line	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ1640161-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL- SZ1640161-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL- SZ1640161-AI.PDF”.

--END OF REPORT--