



FCC PART 15.247 TEST REPORT

For

Hangzhou Meari Technology Co., Ltd.

No.91, Chutian Road, Xixing Block, Binjiang, Hangzhou, 310051 China

FCC ID: 2AG7C-BULLET4S

Report Type: Original Report		Product Type: IP Camera	
Test Engineer:	Winnie Yang		Winnie Yang
Report Number:	RSHA19121000	01-00B	
Report Date:	2020-02-25		
	Oscar Ye		
Reviewed By:	EMC Manager		Oscar. Ye
Prepared By:		88934268	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Report No.: RSHA191210001-00B

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	
EUT Exercise Software	6
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	14
FCC §15.203 - ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS	
APPLICABLE STANDARD	
EUT SETUP EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
FACTOR & OVER LIMIT CALCULATION.	17
TEST RESULTS SUMMARY	
Test Data	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	20
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE TEST DATA	
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE	
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	
APPLICABLE STANDARD	
ATTLICABLE STANDARD	33

Bay Area Compliance Laboratories Corp. (Kunshan)	Report No.: RSHA191210001-00B
TEST PROCEDURE	55
TEST DATA	55
FCC §15.247(e) - POWER SPECTRAL DENSITY	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
Test Data	60

FCC Part 15.247 Page 3 of 67

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Hangzhou Meari Technology Co., Ltd.		
Test Model:	Bullet 4S		
Product Type:	IP Camera		
Power Supply:	DC 12V from adapter		
RF Function:	2.4G Wi-Fi		
Operating Band/Frequency:	2412-2462 MHz		
Channel Number:	11		
Channel Separation:	5 MHz		
Antenna Type:	Omni Antenna		
Maximum Antenna Gain:	3dBi		

Report No.: RSHA191210001-00B

Adapter Information:

Model: KA1201A-1201000US Input: AC 100-240 V, 50/60Hz, 0.4A

Output: DC 12V, 1000mA

Objective

This report is prepared on behalf of *Hangzhou Meari Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

FCC Part 15.247 Page 4 of 67

^{*}All measurement and test data in this report was gathered from production sample serial number: 191210001. (Assigned by the BACL). The EUT supplied by the applicant was received on 2019-12-10.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

Report No.: RSHA191210001-00B

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Line	es Conducted Emissions	3.19dB
RF conducto	ed test with spectrum	0.9dB
RF Output Po	wer with Power meter	0.5dB
	30MHz~1GHz	6.11dB
De liste Lendonie	1GHz~6GHz	4.45dB
Radiated emission	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
]	Humidity	6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

FCC Part 15.247 Page 5 of 67

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz) Channel		Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Report No.: RSHA191210001-00B

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool: REALTEK 11n 8188FU USB WLAN MP Diagnastic Prngram.

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Setting
802.11b	1 Mbps	55
802.11g	6 Mbps	30
802.11n-HT20	MCS0	30
802.11n-HT40	MCS0	30

FCC Part 15.247 Page 6 of 67


Duty Cycle:

802.11b Mode Middle Channel

Report No.: RSHA191210001-00B

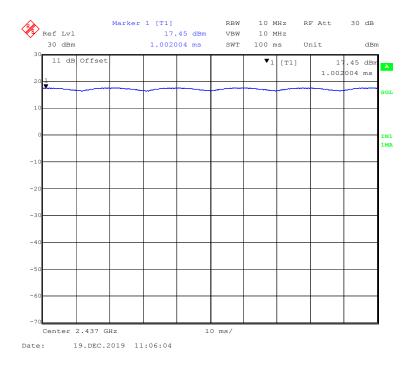


802.11g Mode Middle Channel

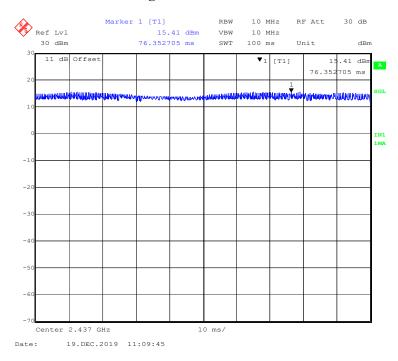


FCC Part 15.247 Page 7 of 67

802.11n-HT20 Mode Middle Channel

Report No.: RSHA191210001-00B

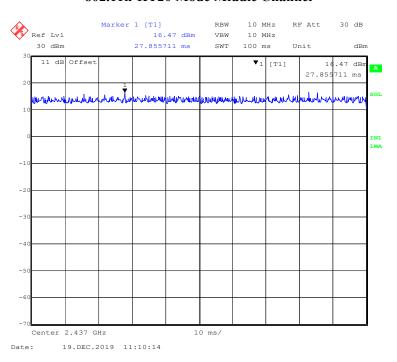

802.11n-HT40 Mode Middle Channel

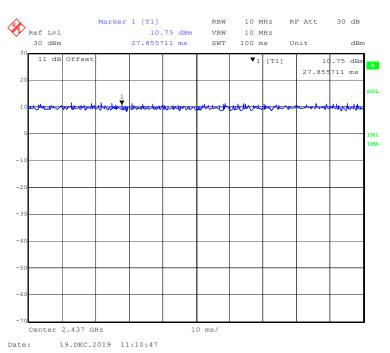

FCC Part 15.247 Page 8 of 67

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0

Note: "x" means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	То	
USB cable	USB cable 1.0		Adapter	


Block Diagram of Test Setup

For Conducted Emissions:

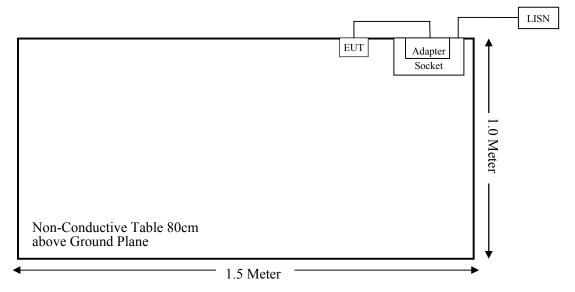


FCC Part 15.247 Page 9 of 67

For Radiated Emissions(Below 1GHz):

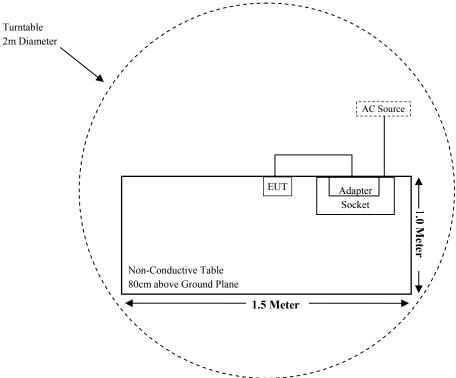

For Radiated Emissions(Above 1GHz):

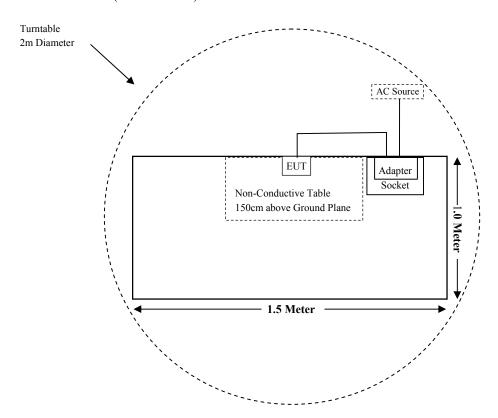

FCC Part 15.247 Page 10 of 67

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maxinum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Report No.: RSHA191210001-00B

FCC Part 15.247 Page 11 of 67

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date		
Radiated Emission Test (Chamber 1#)							
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-11-30	2020-11-29		
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25		
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2019-12-26	2022-12-25		
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13		
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A		
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14		
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14		
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14		
	Radiated Er	nission Test (Ch	amber 2#)				
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-08-27	2020-08-26		
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14		
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11		
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19		
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21		
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04		
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14		
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A		
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14		
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14		
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14		
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14		
	R	AF Conducted Tes	t				
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-11-30	2020-11-29		
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2019-11-30	2020-11-29		
Agilent	Power Meter	N1912A	MY5000492	2019-11-18	2020-11-17		
Agilent	Power Sensor	N1921A	MY54210024	2019-11-18	2020-11-17		
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14		
Meari	RF Cable	MeariC01	C01	Each Time	N/A		
Conducted Emission Test							
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03- 101746-zn	2019-07-11	2020-07-10		
Rohde & Schwarz	LISN	ENV216	3560655016	2019-11-30	2020-11-29		
Audix	Test Software	e3	V9	N/A	N/A		
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2019-08-10	2020-08-09		
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14		

Report No.: RSHA191210001-00B

FCC Part 15.247 Page 12 of 67

Report No.: RSHA191210001-00B

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 13 of 67

FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Report No.: RSHA191210001-00B

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

	(B) Limits for General Population/Uncontrolled Exposure										
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)							
0.3-1.34	614	1.63	*(100)	30							
1.34-30	824/f	2.19/f	*(180/f²)	30							
30-300	27.5	0.073	0.2	30							
300-1500	/	/	f/1500	30							
1500-100,000	/	/	1.0	30							

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

 $S = PG/4\pi R^2 = power density (in appropriate units, e.g. mW/cm^2);$

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range	Antenna Gain		Tune-up Output Power		Evaluation Distance	Power Density	MPE Limit	
	(MHz)	(dBi)	(numeric)	(dBm)	(mW)	(cm)	(mW/cm^2)	(mW/cm ²)	
802.11b		3.00	2.00	17.00	50.12	20	0.0199	1.0	
802.11g	2412~2462	3.00	2.00	15.00	31.62	20	0.0126	1.0	
802.11 n-HT20		3.00	2.00	15.00	31.62	20	0.0126	1.0	
802.11 n-HT40	2422~2452	3.00	2.00	14.50	28.18	20	0.0112	1.0	

Note: The tune-up output power was declared by the manufacturer.

Conclusion: The device meets MPE at distance 20cm.

FCC Part 15.247 Page 14 of 67

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RSHA191210001-00B

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an Omni antenna for Wi-Fi and the antenna gain is 3dBi, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.


FCC Part 15.247 Page 15 of 67

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

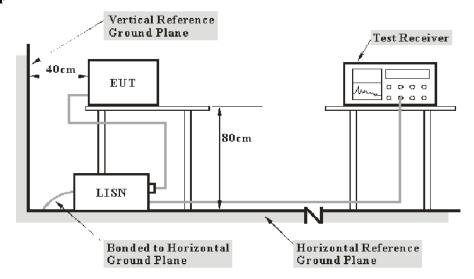

Report No.: RSHA191210001-00B

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 16 of 67

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Attenuator. The basic equation is as follows:

Report No.: RSHA191210001-00B

The "Over Limit" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of 7 dB means the emission is 7 dB above the limit. The equation for over limit calculation is as follows:

Over Limit (dB) = Read level (dB
$$\mu$$
V) + Factor (dB) - Limit (dB μ V)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	24.2 ℃
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Winnie Yang on 2019-12-16.

EUT operation mode: Transmitting in 802.11b mode low channel (worst case)

FCC Part 15.247 Page 17 of 67

AC 120V/60 Hz, Line

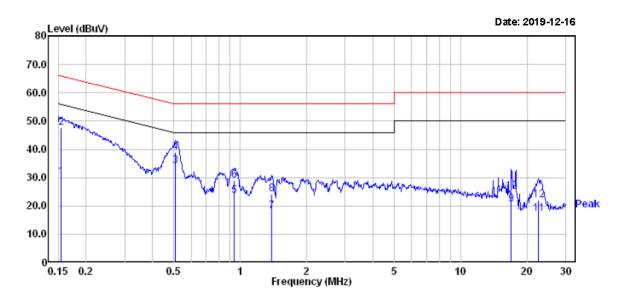


Report No.: RSHA191210001-00B

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBu∀	dB	——— dBuV	——— dBu∀	———— dВ	
1	0.154	10.30	19.82	30.12	55.78	-25.66	Average
2	0.154	27.90	19.82	47.72	65.78	-18.06	QP _
3	0.507	14.30	19.76	34.06	46.00	-11.94	Average
4	0.507	19.30	19.76	39.06	56.00	-16.94	QP
5	0.943	3.90	19.77	23.67	46.00	-22.33	Average
6	0.943	9.10	19.77	28.87	56.00	-27.13	QP
7	1.396	-1.70	19.83	18.13	46.00	-27.87	Average
8	1.396	4.40	19.83	24.23	56.00	-31.77	QP
9	17.018	0.80	19.77	20.57	50.00	-29.43	Average
10	17.018	5.40	19.77	25.17	60.00	-34.83	QP
11	22.535	-2.60	19.81	17.21	50.00	-32.79	Average
12	22.535	2.10	19.81	21.91	60.00	-38.09	QP

FCC Part 15.247 Page 18 of 67

AC 120V/60 Hz, Neutral

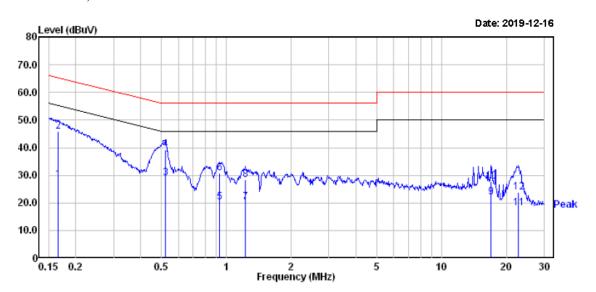

Report No.: RSHA191210001-00B

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
					————		
	MHz	dBu∀	dB	dBu∀	dBu∀	dB	
1	0.166	8.50	19.83	28.33	55.16	-26.83	Average
2	0.166	26.10	19.83	45.93	65.16	-19.23	QP
- 3	0.520	9.10	19.76	28.86	46.00	-17.14	Avenage
4	0.520	19.40	19.76	39.16	56.00	-16.84	QP
5	0.933	0.60	19.76	20.36	46.00	-25.64	Average
6	0.933	10.90	19.76	30.66	56.00	-25.34	QP
7	1.229	0.31	19.81	20.12	46.00	-25.88	Average
8	1.229	8.61	19.81	28.42	56.00	-27.58	QP
9	17.018	2.30	19.77	22.07	50.00	-27.93	Average
10	17.018	8.10	19.77	27.87	60.00	-32.13	QP
11	22.775	-1.80	19.80	18.00	50.00	-32.00	Average
12	22.775	4.10	19.80	23.90	60.00	-36.10	QP

FCC Part 15.247 Page 19 of 67

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS


Report No.: RSHA191210001-00B

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

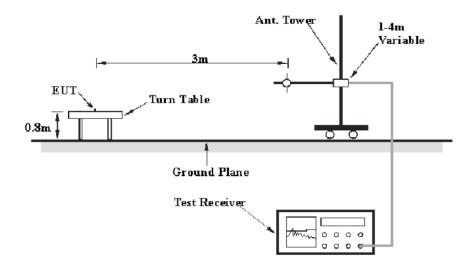

Above 1GHz:

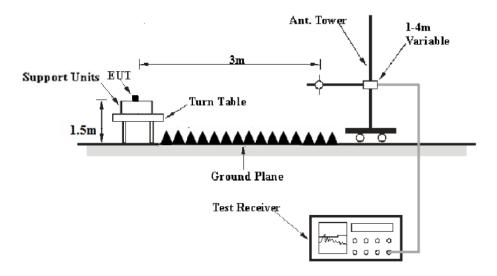

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

FCC Part 15.247 Page 20 of 67

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Report No.: RSHA191210001-00B

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
Above IGHZ	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude ($dB\mu V/m$) = Meter Reading ($dB\mu V$) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) - Corrected Amplitude (dB μ V/m)

FCC Part 15.247 Page 21 of 67

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Report No.: RSHA191210001-00B

Test Data

Environmental Conditions

Temperature:	21.2-23.5 ℃
Relative Humidity:	49-51 %
ATM Pressure:	101.3-102.1 kPa

The testing was performed by Winnie Yang from 2019-12-19 to 2020-02-19.

EUT operation mode: Transmitting


FCC Part 15.247 Page 22 of 67

Spurious Emission Test:

30MHz-1GHz

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case middle channel of 802.11b mode in Z-axis of orientation was recorded.

Report No.: RSHA191210001-00B

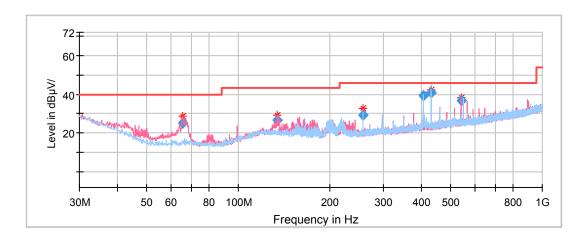

Frequency	Corrected Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
65.562500	25.35	101.0	V	237.0	-17.6	40.00	14.65
134.085600	26.73	101.0	V	23.0	-11.7	43.50	16.77
257.142650	29.35	199.0	V	278.0	-11.9	46.00	16.65
405.011550	39.12	101.0	Н	2.0	-8.1	46.00	6.88
432.018150	40.95	101.0	Н	0.0	-7.7	46.00	5.05
540.033000	36.90	101.0	V	7.0	-5.7	46.00	9.10

FCC Part 15.247 Page 23 of 67

1GHz-18GHz

802.11b Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)


Note:

- 1. This test was performed with the 2.4-2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V) Margin (dB) = Limit (dB μ V/m) Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz

Report No.: RSHA191210001-00B



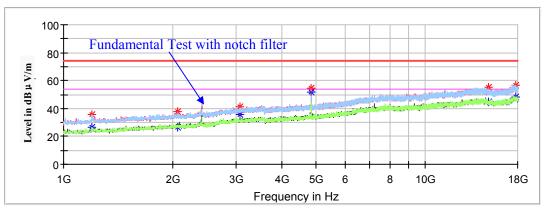


Frequency	Corrected A	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1197.200000	35.46		200.0	Н	146.0	-11.6	74.00	38.54
1197.200000		26.59	200.0	Н	146.0	-11.6	54.00	27.41
2071.000000	37.91		150.0	V	2.0	-8.1	74.00	36.09
2071.000000		26.23	150.0	V	2.0	-8.1	54.00	27.77
3070.600000	41.53		200.0	V	92.0	-4.3	74.00	32.47
3070.600000		35.47	200.0	V	92.0	-4.3	54.00	18.53
4824.000000	54.66		150.0	V	288.0	-0.5	74.00	19.34
4824.000000		51.61	150.0	V	288.0	-0.5	54.00	2.39
14906.000000		44.48	150.0	V	2.0	11.8	54.00	9.52
14906.000000	55.03		150.0	V	2.0	11.8	74.00	18.97
17746.700000		48.40	150.0	V	74.0	13.9	54.00	5.60
17746.700000	56.61		150.0	V	74.0	13.9	74.00	17.39

FCC Part 15.247 Page 24 of 67

Middle Channel: 2437MHz

Report No.: RSHA191210001-00B

Full Spectrum

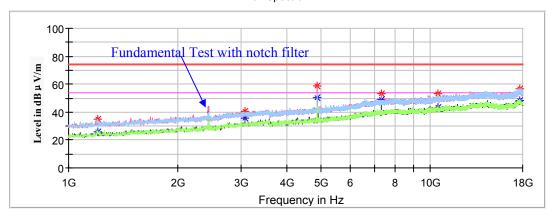


Frequency	Corrected .	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1202.300000		26.11	200.0	Н	294.0	-11.5	54.00	27.89
1202.300000	34.97		200.0	Н	294.0	-11.5	74.00	39.03
3070.600000		35.50	200.0	V	73.0	-4.3	54.00	18.50
3070.600000	40.85		200.0	V	73.0	-4.3	74.00	33.15
4874.000000		50.15	150.0	V	295.0	-0.5	54.00	3.85
4874.000000	58.94		150.0	V	295.0	-0.5	74.00	15.06
7311.000000		49.18	200.0	V	26.0	5.8	54.00	4.82
7311.000000	53.33		200.0	V	26.0	5.8	74.00	20.67
10487.700000		43.56	200.0	Н	77.0	9.0	54.00	10.44
10487.700000	53.31		200.0	Н	77.0	9.0	74.00	20.69
17629.400000		47.97	200.0	V	216.0	14.1	54.00	6.03
17629.400000	56.46		200.0	V	216.0	14.1	74.00	17.54

FCC Part 15.247 Page 25 of 67

High Channel: 2462MHz

Report No.: RSHA191210001-00B

Full Spectrum

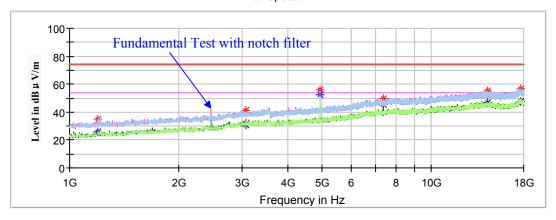

Frequency	Corrected A	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1200.600000		25.64	200.0	Н	158.0	-11.6	54.00	28.36
1200.600000	34.99		200.0	Н	158.0	-11.6	74.00	39.01
3072.300000		30.49	200.0	V	258.0	-4.3	54.00	23.51
3072.300000	41.31		200.0	V	258.0	-4.3	74.00	32.69
4924.000000	55.93		150.0	V	293.0	-0.4	74.00	18.07
4924.000000		52.27	150.0	V	293.0	-0.4	54.00	1.73
7386.000000	49.89		200.0	V	21.0	5.9	74.00	24.11
7386.000000		45.11	200.0	V	21.0	5.9	54.00	8.89
14328.000000		46.59	200.0	V	305.0	12.6	54.00	7.41
14328.000000	55.40		200.0	V	305.0	12.6	74.00	18.60
17704.200000		47.67	200.0	V	305.0	14.0	54.00	6.33
17704.200000	56.65		200.0	V	305.0	14.0	74.00	17.35

FCC Part 15.247 Page 26 of 67

802.11g Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

- 1. This test was performed with the 2.4-2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V) Margin (dB) = Limit (dB μ V/m) Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz

Report No.: RSHA191210001-00B

Full Spectrum 100 Fundamental Test with notch filter 80 Level in dB µ V/m 60 40 20 2G 3G 5G 6 8 10G 18G 1G 4G Frequency in Hz


Frequency	Corrected Amplitude		Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1197.200000	35.00		200.0	Н	164.0	-11.6	74.00	39.00
1197.200000		24.15	200.0	Н	164.0	-11.6	54.00	29.85
3070.600000	43.91		200.0	V	86.0	-4.3	74.00	30.09
3070.600000		36.23	200.0	V	86.0	-4.3	54.00	17.77
4824.000000		51.52	150.0	V	277.0	-0.5	54.00	2.48
4824.000000	57.66		150.0	V	277.0	-0.5	74.00	16.34
7236.000000		45.88	200.0	V	20.0	5.7	54.00	8.12
7236.000000	55.02		200.0	V	20.0	5.7	74.00	18.98
10339.800000		41.31	200.0	Н	341.0	8.7	54.00	12.69
10339.800000	52.29		200.0	Н	341.0	8.7	74.00	21.71
17719.500000		47.19	150.0	V	349.0	13.9	54.00	6.81
17719.500000	56.35		150.0	V	349.0	13.9	74.00	17.65

FCC Part 15.247 Page 27 of 67

Middle Channel: 2437MHz

Report No.: RSHA191210001-00B

Full Spectrum

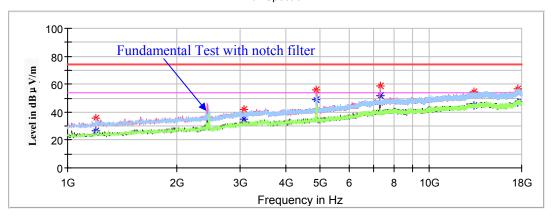


Frequency	Corrected A	Amplitude	Rx A	ntenna	Turntable	Turntable Corrected Lin		Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1200.600000		26.25	200.0	Н	295.0	-11.6	54.00	27.75
1200.600000	35.99		200.0	Н	295.0	-11.6	74.00	38.01
3070.600000		35.01	200.0	V	80.0	-4.3	54.00	18.99
3070.600000	41.61		200.0	V	80.0	-4.3	74.00	32.39
4874.000000		48.72	150.0	V	293.0	-0.5	54.00	5.28
4874.000000	55.74		150.0	V	293.0	-0.5	74.00	18.26
7311.000000		51.56	200.0	V	32.0	5.8	54.00	2.44
7311.000000	58.81		200.0	V	32.0	5.8	74.00	15.19
13306.300000		44.90	150.0	V	2.0	12.0	54.00	9.10
13306.300000	54.64		150.0	V	2.0	12.0	74.00	19.36
17597.100000		47.11	200.0	Н	78.0	14.1	54.00	6.89
17597.100000	56.44		200.0	Н	78.0	14.1	74.00	17.56

FCC Part 15.247 Page 28 of 67

High Channel: 2462MHz

Report No.: RSHA191210001-00B

Full Spectrum

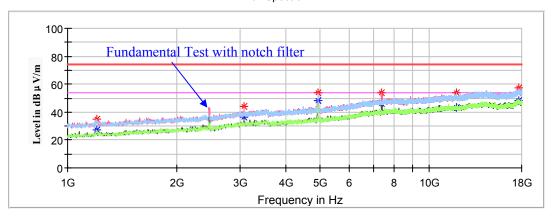

Frequency	Corrected A	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1202.300000		27.05	200.0	Н	160.0	-11.5	54.00	26.95
1202.300000	34.65		200.0	Н	160.0	-11.5	74.00	39.35
3070.600000		36.34	200.0	V	83.0	-4.3	54.00	17.66
3070.600000	43.71		200.0	V	83.0	-4.3	74.00	30.29
4924.000000		48.51	150.0	V	300.0	-0.4	54.00	5.49
4924.000000	54.19		150.0	V	300.0	-0.4	74.00	19.81
7386.000000		46.21	200.0	V	66.0	5.9	54.00	7.79
7386.000000	53.99		200.0	V	66.0	5.9	74.00	20.01
11888.500000		43.30	150.0	Н	116.0	10.0	54.00	10.70
11888.500000	53.60		150.0	Н	116.0	10.0	74.00	20.40
17716.100000		48.07	150.0	V	23.0	13.9	54.00	5.93
17716.100000	57.42		150.0	V	23.0	13.9	74.00	16.58

FCC Part 15.247 Page 29 of 67

802.11n-HT20 Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)


Note:

- 1. This test was performed with the 2.4-2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV) Margin (dB) = Limit (dBμV/m) Corrected Amplitude (dBμV/m)

Low Channel: 2412MHz

Report No.: RSHA191210001-00B



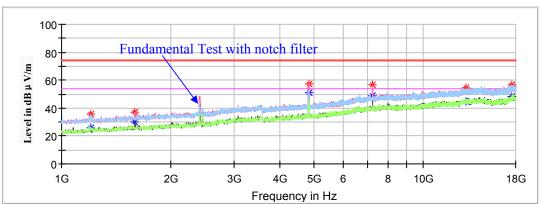


Frequency	Corrected .	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1202.300000		26.09	200.0	Н	293.0	-11.5	54.00	27.91
1202.300000	35.47		200.0	Н	293.0	-11.5	74.00	38.53
1593.300000		30.37	150.0	V	262.0	-9.6	54.00	23.63
1593.300000	36.98		150.0	V	262.0	-9.6	74.00	37.02
4824.000000	57.53		150.0	V	293.0	-0.5	74.00	16.47
4824.000000		50.93	150.0	V	293.0	-0.5	54.00	3.07
7236.000000		49.14	200.0	V	20.0	5.7	54.00	4.86
7236.000000	56.81		200.0	V	20.0	5.7	74.00	17.19
13149.900000		45.08	200.0	Н	309.0	12.0	54.00	8.92
13149.900000	54.42		200.0	Н	309.0	12.0	74.00	19.58
17529.100000		48.05	150.0	Н	0.0	14.2	54.00	5.95
17529.100000	56.36		150.0	Н	0.0	14.2	74.00	17.64

FCC Part 15.247 Page 30 of 67

Middle Channel: 2437MHz

Report No.: RSHA191210001-00B

Full Spectrum

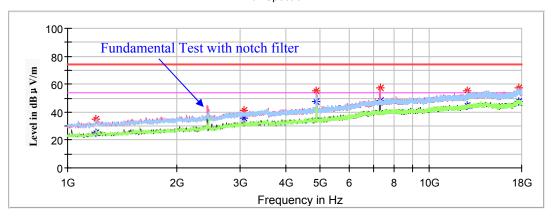


Frequency	Corrected .	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1197.200000		25.20	200.0	V	201.0	-11.6	54.00	28.80
1197.200000	35.29		200.0	V	201.0	-11.6	74.00	38.71
3070.600000		35.77	200.0	V	77.0	-4.3	54.00	18.23
3070.600000	41.42		200.0	V	77.0	-4.3	74.00	32.58
4874.000000		47.27	200.0	V	41.0	-0.5	54.00	6.73
4874.000000	55.13		200.0	V	41.0	-0.5	74.00	18.87
7311.000000		48.30	200.0	V	41.0	5.8	54.00	5.70
7311.000000	57.43		200.0	V	41.0	5.8	74.00	16.57
12726.600000		44.91	150.0	Н	231.0	11.1	54.00	9.09
12726.600000	55.54		150.0	Н	231.0	11.1	74.00	18.46
17629.400000		47.63	150.0	Н	337.0	14.1	54.00	6.37
17629.400000	57.13		150.0	Н	337.0	14.1	74.00	16.87

FCC Part 15.247 Page 31 of 67

High Channel: 2462MHz

Report No.: RSHA191210001-00B

Full Spectrum

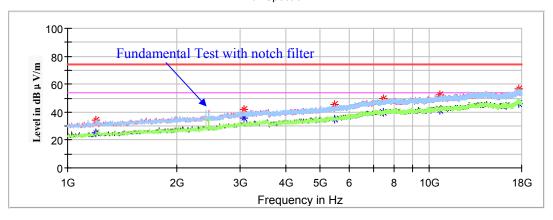

Frequency	Corrected .	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1198.900000		25.37	200.0	V	192.0	-11.6	54.00	28.63
1198.900000	34.55		200.0	V	192.0	-11.6	74.00	39.45
3070.600000		35.98	200.0	V	84.0	-4.3	54.00	18.02
3070.600000	42.16		200.0	V	84.0	-4.3	74.00	31.84
5455.700000		35.10	150.0	Н	64.0	1.3	54.00	18.90
5455.700000	45.74		150.0	Н	64.0	1.3	74.00	28.26
7470.200000		39.59	150.0	Н	359.0	6.1	54.00	14.41
7470.200000	49.41		150.0	Н	359.0	6.1	74.00	24.59
10710.400000		41.58	200.0	V	107.0	9.3	54.00	12.42
10710.400000	52.78		200.0	V	107.0	9.3	74.00	21.22
17619.200000		46.37	200.0	V	322.0	14.1	54.00	7.63
17619.200000	56.66		200.0	V	322.0	14.1	74.00	17.34

FCC Part 15.247 Page 32 of 67

802.11n-HT40 Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)


Note:

- 1. This test was performed with the 2.4-2.5GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V) Margin (dB) = Limit (dB μ V/m) Corrected Amplitude (dB μ V /m)

Low Channel: 2422MHz

Report No.: RSHA191210001-00B



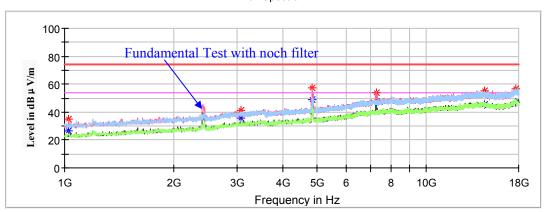


Frequency	Corrected .	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1027.200000	34.79		150.0	V	36.0	-12.5	74.00	39.21
1027.200000		26.59	150.0	V	36.0	-12.5	54.00	27.41
3070.600000	40.97		200.0	V	81.0	-4.3	74.00	33.03
3070.600000		36.01	200.0	V	81.0	-4.3	54.00	17.99
4844.000000		48.71	150.0	V	296.0	-0.5	54.00	5.29
4844.000000	57.09		150.0	V	296.0	-0.5	74.00	16.91
7266.000000	54.07		150.0	V	36.0	5.8	74.00	19.93
7266.000000		47.67	150.0	V	36.0	5.8	54.00	6.33
14499.700000		45.47	200.0	V	231.0	12.7	54.00	8.53
14499.700000	55.45		200.0	V	231.0	12.7	74.00	18.55
17641.300000		47.11	200.0	V	0.0	14.1	54.00	6.89
17641.300000	56.62		200.0	V	0.0	14.1	74.00	17.38

FCC Part 15.247 Page 33 of 67

Middle Channel: 2437MHz

Report No.: RSHA191210001-00B

Full Spectrum

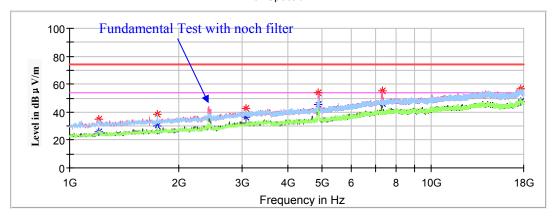


Frequency	Corrected .	Amplitude	Rx A	ntenna Turntable		Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1202.300000		26.07	200.0	V	186.0	-11.5	54.00	27.93
1202.300000	34.93		200.0	V	186.0	-11.5	74.00	39.07
1744.600000		30.24	150.0	Н	351.0	-9.1	54.00	23.76
1744.600000	38.34		150.0	Н	351.0	-9.1	74.00	35.66
3070.600000		36.02	200.0	V	80.0	-4.3	54.00	17.98
3070.600000	42.82		200.0	V	80.0	-4.3	74.00	31.18
4874.000000		45.69	150.0	V	295.0	-0.5	54.00	8.31
4874.000000	54.09		150.0	V	295.0	-0.5	74.00	19.91
7311.000000		46.26	200.0	V	64.0	5.8	54.00	7.74
7311.000000	55.13		200.0	V	64.0	5.8	74.00	18.87
17670.200000		47.44	150.0	V	5.0	14.0	54.00	6.56
17670.200000	56.93		150.0	V	5.0	14.0	74.00	17.07

FCC Part 15.247 Page 34 of 67

High Channel : 2452MHz

Report No.: RSHA191210001-00B

Full Spectrum

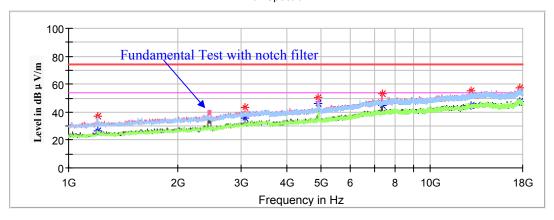

Frequency	Corrected A	Amplitude	Rx A	Rx Antenna		Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Turntable Degree	Factor (dB/m)	(dBµV/m)	(dB)
1202.300000		26.78	150.0	V	80.0	-9.0	54.00	27.22
1202.300000	37.16		150.0	V	80.0	-9.0	74.00	36.84
3070.600000		35.66	200.0	Н	37.0	-3.7	54.00	18.34
3070.600000	43.46		200.0	Н	37.0	-3.7	74.00	30.54
4904.000000		46.28	150.0	V	3.0	2.3	54.00	7.72
4904.000000	50.25		150.0	V	3.0	2.3	74.00	23.75
7356.000000		44.99	150.0	V	38.0	6.0	54.00	9.01
7356.000000	52.84		150.0	V	38.0	6.0	74.00	21.16
12920.400000		44.81	200.0	Н	116.0	12.0	54.00	9.19
12920.400000	55.14		200.0	Н	116.0	12.0	74.00	18.86
17699.100000		47.28	200.0	V	81.0	14.1	54.00	6.72
17699.100000	57.35		200.0	V	81.0	14.1	74.00	16.65


FCC Part 15.247 Page 35 of 67

18GHz-25GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case middle channel of 802.11b mode in Z-axis of orientation was recorded


Vertical

Report No.: RSHA191210001-00B

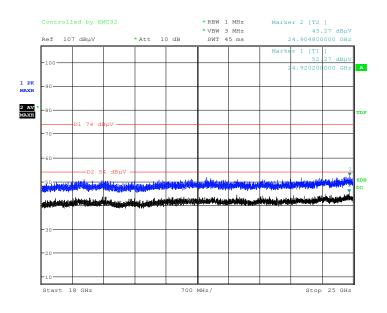

Date: 19.FEB.2020 14:42:07

Horizontal

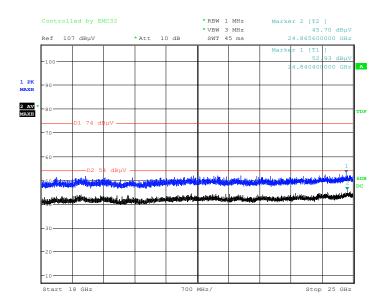

Date: 19.FEB.2020 14:55:58

FCC Part 15.247 Page 36 of 67

Restricted Bands Emissions Test

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB) Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V) Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

802.11b Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Report No.: RSHA191210001-00B

Frequency	Corrected	Amplitude	litude Rx Antenna Turntable		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
	Low Channel: 2412MHz							
2390.00		39.60	150.0	V	352.0	2.8	54.00	14.40
2390.00	46.56		150.0	V	352.0	2.8	74.00	27.44
	High Channel: 2462MHz							
2483.50		39.46	150.0	V	235.0	3.0	54.00	14.54
2483.50	46.88		150.0	V	332.0	3.0	74.00	27.12

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency	Corrected	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
Low Channel: 2412MHz								
2390.00	52.90		200.0	V	339.0	2.8	74.00	21.10
2390.00		42.53	200.0	V	339.0	2.8	54.00	11.47
			High Char	nnel: 2462M	Hz			
2483.50	58.84		200.0	V	270.0	3.0	74.00	15.16
2483.50		48.07	200.0	V	270.0	3.0	54.00	5.93

FCC Part 15.247 Page 37 of 67

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Report No.: RSHA191210001-00B

Frequency	Corrected	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
Low Channel: 2412MHz								
2390.00	54.94		150.0	V	278.0	2.8	74.00	19.06
2390.00		42.90	150.0	V	278.0	2.8	54.00	11.10
			High Char	nel: 2462M	Hz			
2483.50		51.19	200.0	V	123.0	3.0	54.00	2.81
2483.50	62.12		200.0	V	123.0	3.0	74.00	11.88

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Frequency	Corrected	Amplitude	Rx A	ntenna	Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
Low Channel: 2422MHz								
2390.00	63.01		200.0	V	13.0	2.8	74.00	10.99
2390.00		52.26	200.0	V	13.0	2.8	54.00	1.74
			High Char	nnel: 2452M	Hz			
2483.50	56.04		150.0	V	4.0	3.0	74.00	17.96
2483.50		47.96	150.0	V	4.0	3.0	54.00	6.04

FCC Part 15.247 Page 38 of 67


Conducted Spurious Emissions at Antenna Port

802.11b Mode Low Channel

Report No.: RSHA191210001-00B

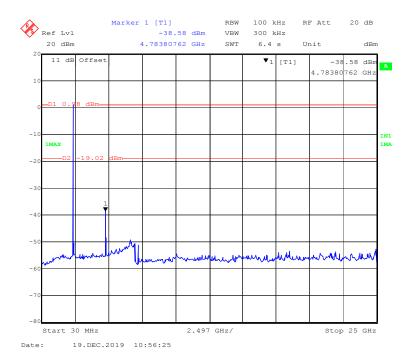


802.11b Mode Middle Channel

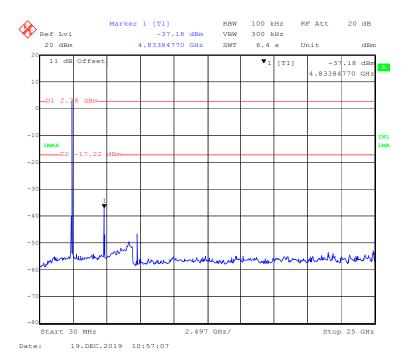


FCC Part 15.247 Page 39 of 67

802.11b Mode High Channel

Report No.: RSHA191210001-00B

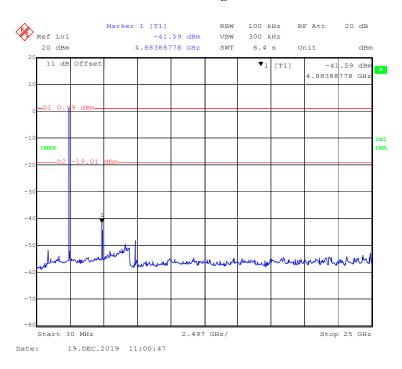


802.11g Mode Low Channel

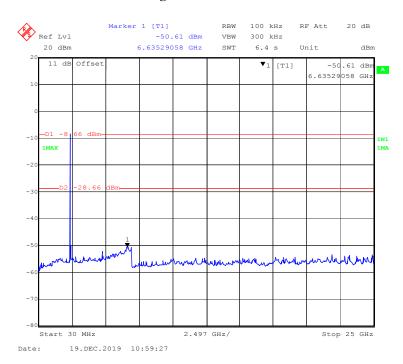


FCC Part 15.247 Page 40 of 67

802.11g Mode Middle Channel

Report No.: RSHA191210001-00B

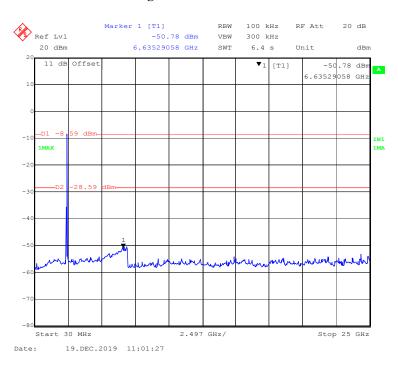


802.11g Mode High Channel

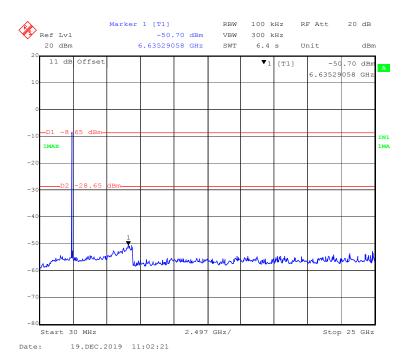


FCC Part 15.247 Page 41 of 67

802.11n-HT20 Mode Low Channel

Report No.: RSHA191210001-00B

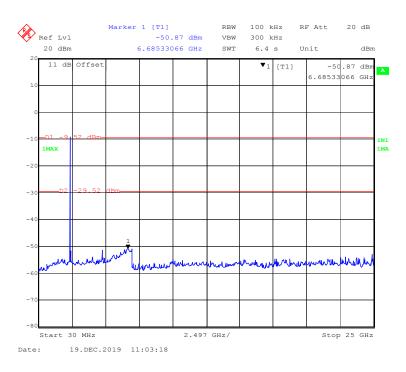


802.11n-HT20 Mode Middle Channel

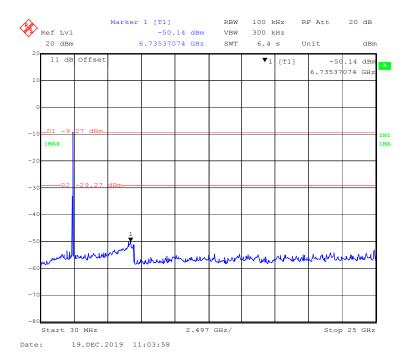


FCC Part 15.247 Page 42 of 67

802.11n-HT20 Mode High Channel

Report No.: RSHA191210001-00B

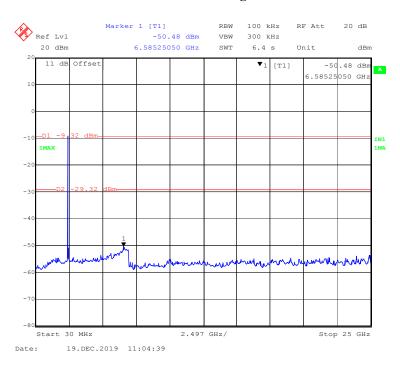


802.11n-HT40 Mode Low Channel

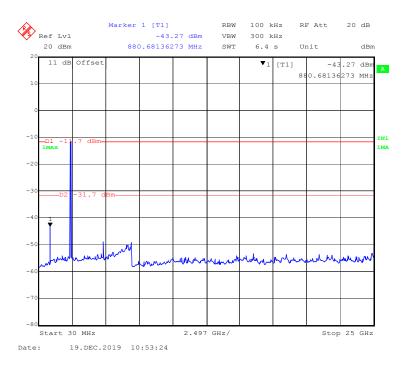


FCC Part 15.247 Page 43 of 67

802.11n-HT40 Mode Middle Channel

Report No.: RSHA191210001-00B

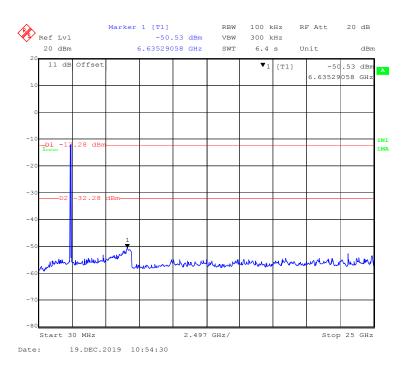

802.11n-HT40 Mode High Channel

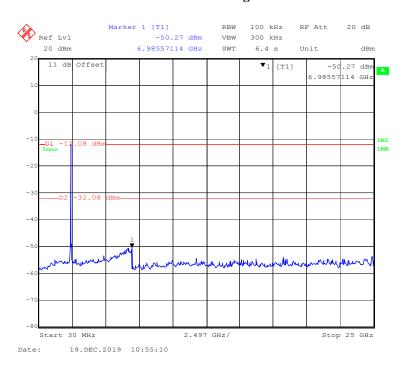

FCC Part 15.247 Page 44 of 67

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: RSHA191210001-00B

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

- 1. Set RBW = 100 kHz.
- 2. Set the video bandwidth (VBW) \geq 3 * RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.2 ℃		
Relative Humidity:	50 %		
ATM Pressure:	101.6 kPa		

The testing was performed by Winnie Yang on 2019-12-19.

EUT operation mode: Transmitting

Test Result: Pass

FCC Part 15.247 Page 45 of 67


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)				
	802.11	b Mode					
Low	2412	9.138	≥0.5				
Middle	2437	9.138	≥0.5				
High	2462	9.138	≥0.5				
	802.11g Mode						
Low	2412	16.653	≥0.5				
Middle	2437	16.653	≥0.5				
High	2462	16.653	≥0.5				
	802.11n-H	TZ0 Mode					
Low	2412	17.916	≥0.5				
Middle	2437	17.916	≥0.5				
High	2462	17.916	≥0.5				
	802.11n-HT40 Mode						
Low	2422	37.673	≥0.5				
Middle	2437	36.673	≥0.5				
High	2452	36.673	≥0.5				

Report No.: RSHA191210001-00B


FCC Part 15.247 Page 46 of 67

802.11b Mode Low Channel

Report No.: RSHA191210001-00B

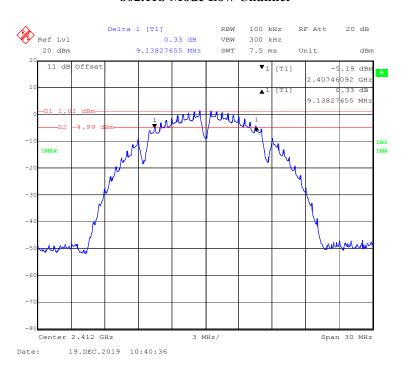


802.11b Mode Middle Channel

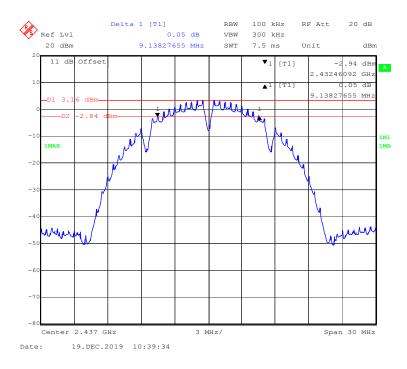


FCC Part 15.247 Page 47 of 67

802.11b Mode High Channel

Report No.: RSHA191210001-00B

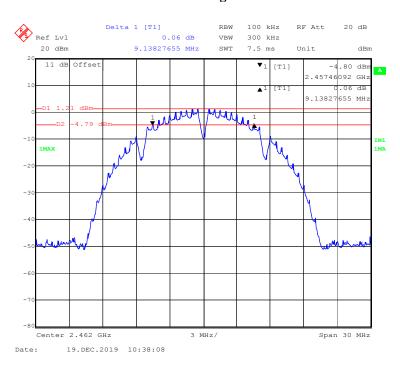


802.11g Mode Low Channel

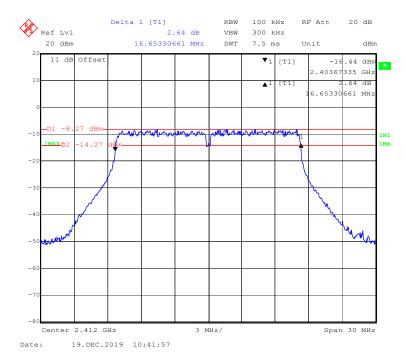


FCC Part 15.247 Page 48 of 67

802.11g Mode Middle Channel

Report No.: RSHA191210001-00B

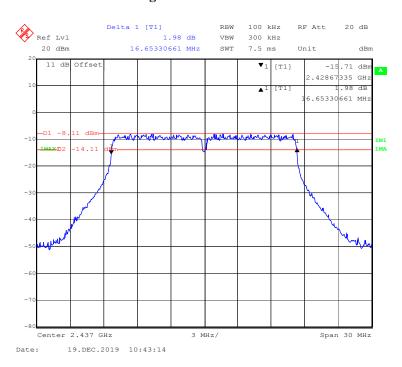


802.11g Mode High Channel

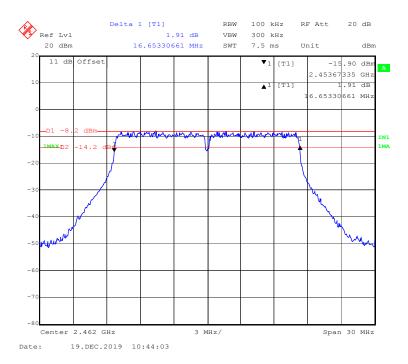


FCC Part 15.247 Page 49 of 67

802.11n-HT20 Mode Low Channel

Report No.: RSHA191210001-00B

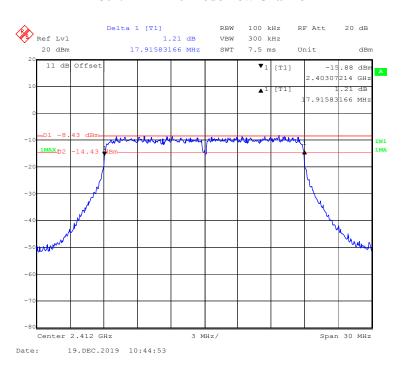


802.11n-HT20 Mode Middle Channel

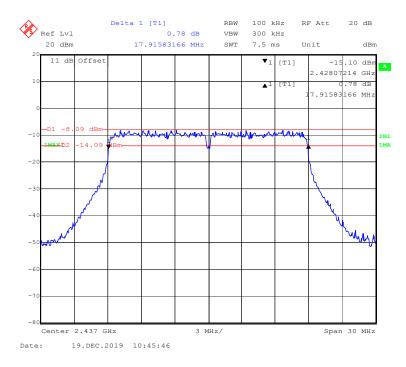


FCC Part 15.247 Page 50 of 67

802.11n-HT20 Mode High Channel

Report No.: RSHA191210001-00B

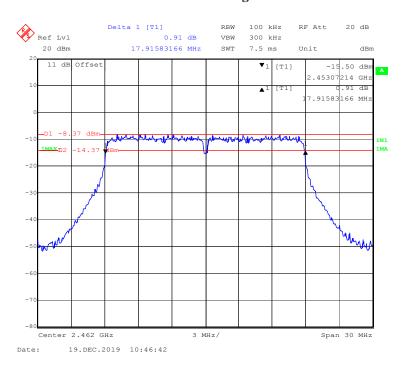


802.11n-HT40 Mode Low Channel

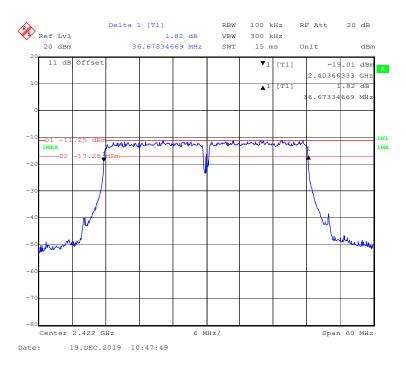


FCC Part 15.247 Page 51 of 67

802.11n-HT40 Mode Middle Channel

Report No.: RSHA191210001-00B

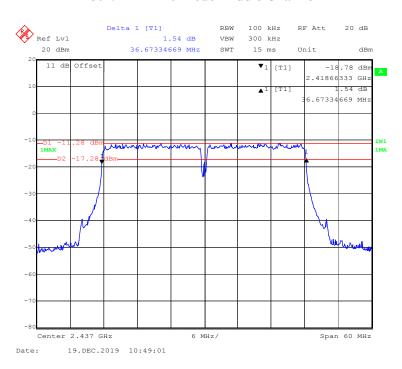

802.11n-HT40 Mode High Channel

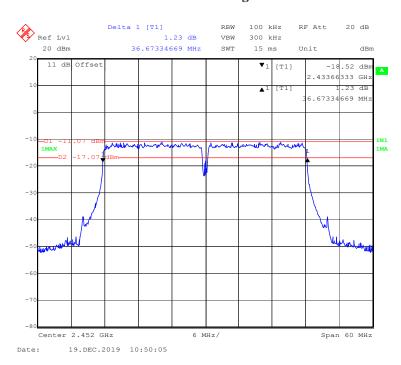

FCC Part 15.247 Page 52 of 67

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


Report No.: RSHA191210001-00B

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.8 ℃	
Relative Humidity:	54 %	
ATM Pressure:	101.2 kPa	

The testing was performed by Winnie Yang on 2019-12-19.

FCC Part 15.247 Page 53 of 67

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result		
		802.11b Mode				
Low	2412	14.90	30	Pass		
Middle	2437	16.92	30	Pass		
High	2462	15.01	30	Pass		
	802.11g Mode					
Low	2412	14.64	30	Pass		
Middle	2437	14.92	30	Pass		
High	2462	14.40	30	Pass		
		802.11n-HT20 Mode				
Low	2412	14.30	30	Pass		
Middle	2437	14.51	30	Pass		
High	2462	14.39	30	Pass		
	802.11n-HT40 Mode					
Low	2422	14.30	30	Pass		
Middle	2437	14.32	30	Pass		
High	2452	14.31	30	Pass		

Report No.: RSHA191210001-00B

FCC Part 15.247 Page 54 of 67

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Report No.: RSHA191210001-00B

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	24.3 ℃
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2020-01-19.


EUT operation mode: Transmitting

Test Result: Compliant


FCC Part 15.247 Page 55 of 67

802.11b Mode Left Side

Report No.: RSHA191210001-00B

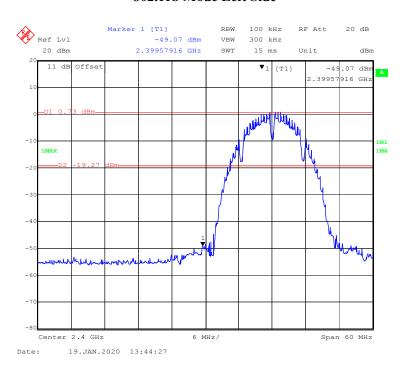


802.11b Mode Right Side

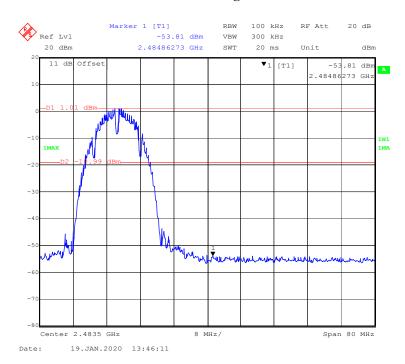


FCC Part 15.247 Page 56 of 67

802.11g Mode Left Side

Report No.: RSHA191210001-00B

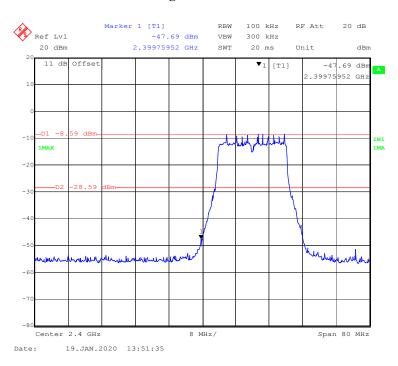


802.11g Mode Right Side

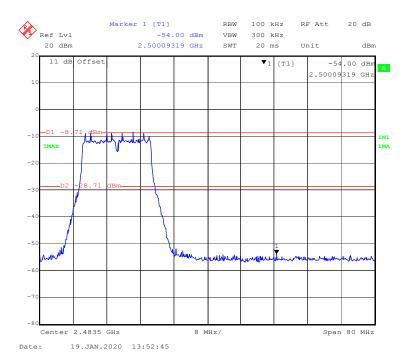


FCC Part 15.247 Page 57 of 67

802.11n-HT20 Mode Left Side

Report No.: RSHA191210001-00B

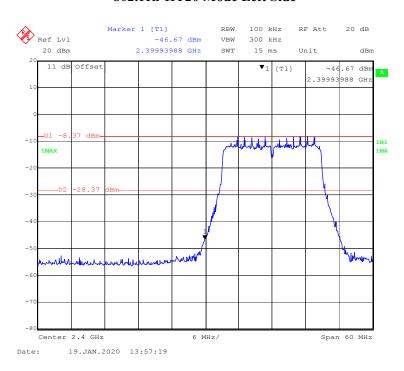


802.11n-HT20 Mode Right Side

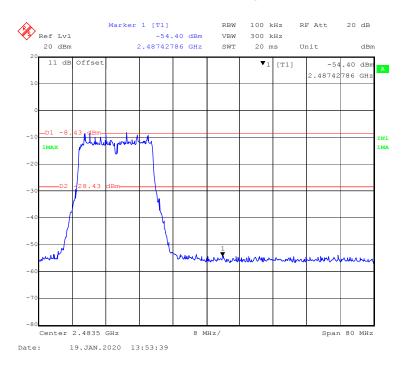


FCC Part 15.247 Page 58 of 67

802.11n-HT40 Mode Left Side

Report No.: RSHA191210001-00B

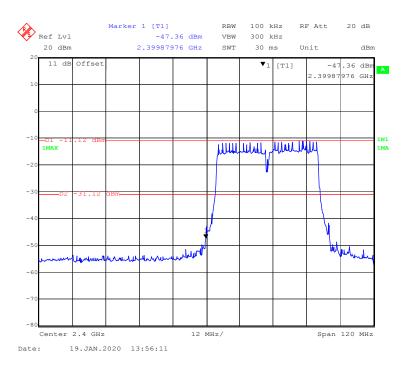

802.11n-HT40 Mode Right Side

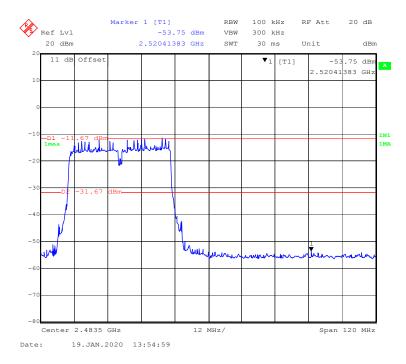

FCC Part 15.247 Page 59 of 67

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: RSHA191210001-00B

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

- 1. Set the RBW to: 3kHz≤ RBW≤100 kHz.
- 2. Set the VBW $\geq 3xRBW$.
- 3. Set the span to 1.5 times the DTS bandwidth.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.3 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.5 kPa	

The testing was performed by Winnie Yang on 2019-12-19.

EUT operation mode: Transmitting

Test Result: Pass

FCC Part 15.247 Page 60 of 67

Middle

High

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)				
	802.11b	Mode					
Low	2412	-18.04	≤ 8				
Middle	2437	-15.97	≤ 8				
High	2462	-17.99	≤ 8				
	802.11g Mode						
Low	2412	-18.89	≤ 8				
Middle	2437	-20.02	≤ 8				
High	2462	-21.49	≤ 8				
	802.11n-H7	T20 mode					
Low	2412	-18.00	≤ 8				
Middle	2437	-19.93	≤ 8				
High	2462	-21.39	≤ 8				
	802.11n-HT40 Mode						
Low	2422	-19.30	≤ 8				

-19.15

-20.06

2437

2452

Report No.: RSHA191210001-00B


≤ 8

≤ 8


FCC Part 15.247 Page 61 of 67

802.11b Mode Low Channel

Report No.: RSHA191210001-00B

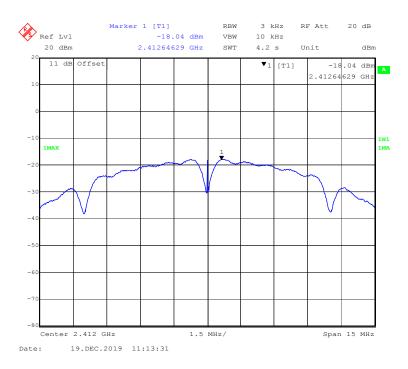


802.11b Mode Middle Channel

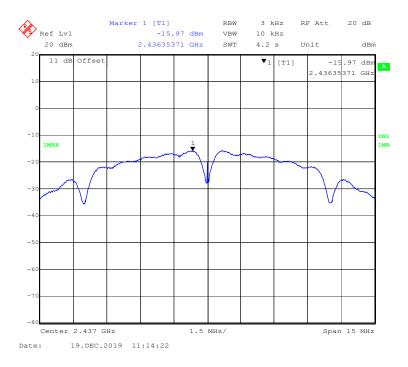


FCC Part 15.247 Page 62 of 67

802.11b Mode High Channel

Report No.: RSHA191210001-00B

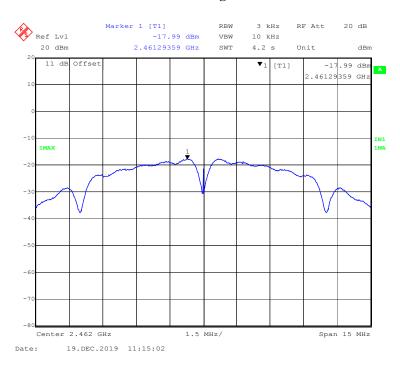


802.11g Mode Low Channel

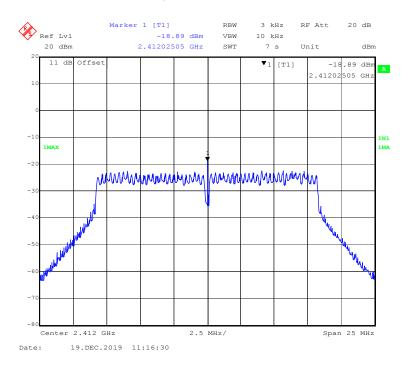


FCC Part 15.247 Page 63 of 67

802.11g Mode Middle Channel

Report No.: RSHA191210001-00B

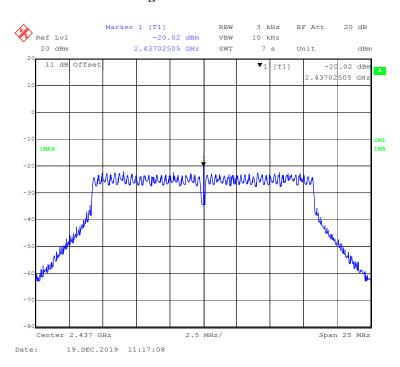


802.11g Mode High Channel

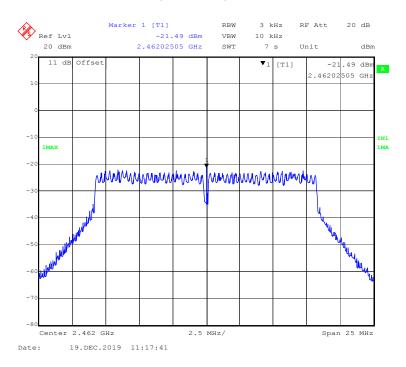


FCC Part 15.247 Page 64 of 67

802.11n-HT20 Mode Low Channel

Report No.: RSHA191210001-00B

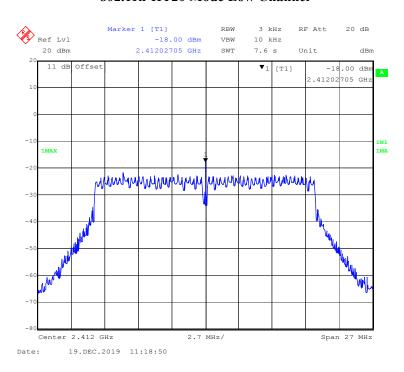


802.11n-HT20 Mode Middle Channel

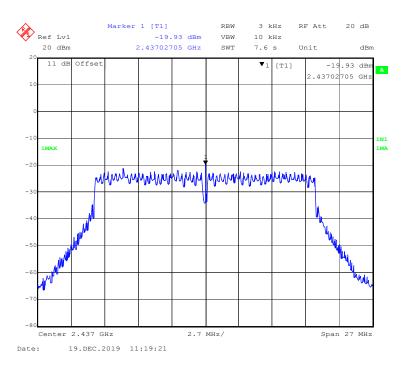


FCC Part 15.247 Page 65 of 67

802.11n-HT20 Mode High Channel

Report No.: RSHA191210001-00B

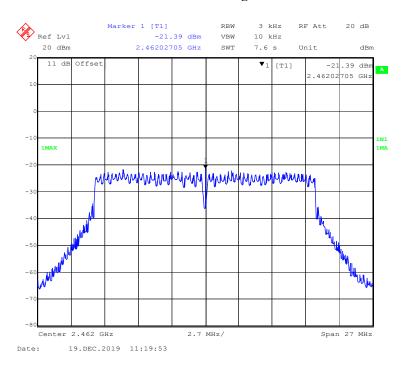


802.11n-HT40 Mode Low Channel

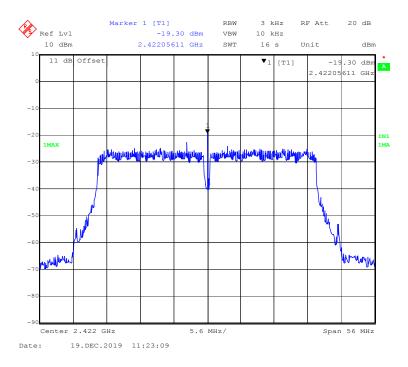


FCC Part 15.247 Page 66 of 67

802.11n-HT40 Mode Middle Channel

Report No.: RSHA191210001-00B

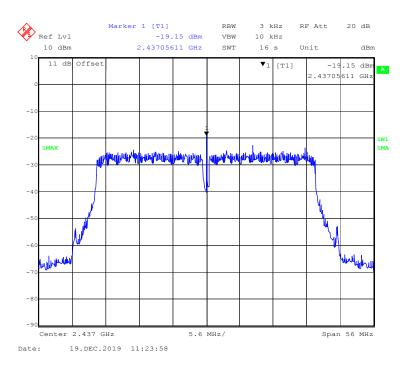

802.11n-HT40 Mode High Channel

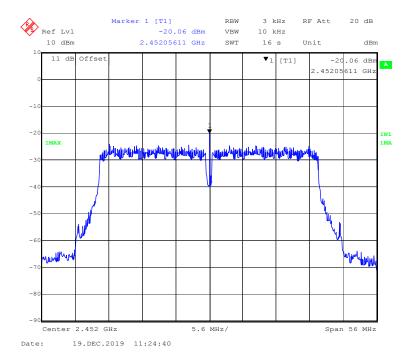

***** END OF REPORT *****

FCC Part 15.247 Page 67 of 67