

S

T

S

L

A

B



RADIO TEST REPORT

Report No: STS1604131F01

Issued for

XTR S.A.C.

Av. Camino Real 1225 Of 201-A San Isidro
Lima Peru

| | |
|-----------------------|----------------------|
| Product Name: | feature phone |
| Brand Name: | EKS |
| Model Name: | FX1.8 |
| Series Model: | N/A |
| FCC ID: | 2AGAK-FX18 |
| Test Standard: | FCC Part 22H and 24E |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong,China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION****Applicant's name** : XTR S.A.C.

Address..... : Av. Camino Real 1225 Of 201-A San Isidro Lima Peru

Manufacture's Name : Shenzhen Richpad Communication Technology Co.,LTD

Address..... : Room 315, HKUST SZ IER Building, No. 9 Yuexing 1st RD, South Area, Hi-tech Park, Nanshan, Shenzhen, P.R.C

Product name..... : feature phone

Brand name : EKS

Model and/or type reference.. : FX1.8

Standards : FCC Part 22H and 24E

Test procedure ANSI/TIA 603-D (2010)

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date of performance of tests..... 22 Apr. 2016 ~03 May. 2016

Date of Issue 04 May. 2016

Test Result **Pass**

Testing Engineer : _____

(Jin Ming)

Technical Manager : _____

(Vita Li)

Authorized Signatory : _____

(Bovey Yang)





| TABLE OF CONTENTS | Page |
|--|-----------|
| SUMMARY OF TEST RESULTS | 5 |
| 1 INTRODUCTION | 6 |
| 1.1 TEST FACTORY | 6 |
| 1.2 MEASUREMENT UNCERTAINTY | 6 |
| 2 PRODUCT INFORMATION | 7 |
| 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST | 8 |
| 4 MEASUREMENT INSTRUMENTS | 9 |
| 5 TEST ITEMS | 10 |
| 5.1 CONDUCTED OUTPUT POWER | 10 |
| 5.2 PEAK TO AVERAGE RATIO | 11 |
| 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP) | 12 |
| 5.4 OCCUPIED BANDWIDTH | 13 |
| 5.5 FREQUENCY STABILITY | 14 |
| 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 15 |
| 5.7 BAND EDGE | 16 |
| 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT | 17 |
| APPENDIX A TEST RESULT | 19 |
| A1 CONDUCTED OUTPUT POWER | 19 |
| A2 PEAK-TO-AVERAGE RADIO | 19 |
| A3 TRANSMITTER RADIATED POWER (EIRP/ERP) | 20 |
| A4 OCCUPIED BANDWIDTH(99% OCCUPIED BANDWIDTH/26DB BANDWIDTH) | 22 |
| A5 FREQUENCY STABILITY | 27 |
| A6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 29 |
| A7 BAND EDGE | 35 |
| A8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT | 39 |
| APPENDIX B PHOTOS OF TEST SETUP | 43 |

**Revision History**

| Rev. | Issue Date | Report NO. | Effect Page | Contents |
|------|--------------|---------------|-------------|---------------|
| 00 | 04 May. 2016 | STS1604131F01 | ALL | Initial Issue |
| | | | | |





SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D: 2010, KDB 971168 D01 v02r02 and KDB 648474 D03 v01r04

| FCC Rules | Test Description | Test Limit | Test Result | Reference |
|----------------------------|--|---|-------------|-----------|
| 2.1049 | Conducted OutputPower | Reporting Only | PASS | |
| 2.0146 24.232 | Peak-to-AverageRatio | < 13 dB | PASS | |
| 2.1046 22.913 24.232 | Effective Radiated Power/Equivalent Isotropic Radiated Power | < 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24) | PASS | |
| 2.1049 22.917 24.238 | Occupied Bandwidth | Reporting Only | PASS | |
| 2.1055 22.355 24.235 | Frequency Stability | < 2.5 ppm (Part 22) Emission must remain in band (Part 24) | PASS | |
| 2.1051 22.917 24.238 | Spurious Emission at Antenna Terminals | < 43+10log10(P[Watts]) | PASS | |
| 2.1053 22.917 24.238 | Field Strength of Spurious Radiation | < 43+10log10(P[Watts]) | PASS | |
| 2.1051 22.917 24.238 | Band Edge | < 43+10log10(P[Watts]) | PASS | |



1 INTRODUCTION

1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong,China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| No. | Item | Uncertainty |
|-----|--|---------------------------|
| 1 | RF power,conducted | $\pm 0.70\text{dB}$ |
| 2 | Spurious emissions,conducted | $\pm 1.19\text{dB}$ |
| 5 | All emissions,radiated(<1G) 30MHz-200MHz | $\pm 2.83\text{dB}$ |
| 6 | All emissions,radiated(<1G) 200MHz-1000MHz | $\pm 2.94\text{dB}$ |
| 7 | All emissions,radiated(>1G) | $\pm 3.03\text{dB}$ |
| 8 | Temperature | $\pm 0.5^{\circ}\text{C}$ |
| 9 | Humidity | $\pm 2\%$ |



2 PRODUCT INFORMATION

| | |
|--|--|
| Product Designation: | feature phone |
| Hardware version: | F205-MB-V1.2 |
| Software version: | N/A |
| FCC ID: | 2AGAK-FX18 |
| Tx Frequency: | GSM: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz |
| Rx Frequency: | GSM/GPRS: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz |
| Max RF Output Power: | GSM850:31.95dBm,PCS1900:28.68dBm GPRS50:31.86dBm,GPRS1900:28.51dBm |
| Type of Emission: | GSM(850):322KGXW: GSM(1900):315KGXW GPRS(850):323KGXW: GPRS(1900):323KGXW |
| SIM Card: | Support single card |
| Antenna: | PIFA Antenna |
| Antenna gain: | GSM 850:1.6dBi ,PCS 1900:3.9dBi |
| Power Supply: | DC 3.7V by battery |
| Battery parameter: | Capacitance: 600/800mAh, Rated Voltage: 3.7V |
| GPRS Class: | Multi-Class12 |
| Extreme Vol. Limits: | DC3.5 V to 4.2 V (Nominal DC3.7V) |
| Extreme Temp. Tolerance: | -20℃ to +45℃ |
| ** Note: The High Voltage 4.2 V and Low Voltage 3.5V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. | |



3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850
2. 30 MHz to 10th harmonic for GSM1900 All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| | TEST MODES | |
|----------|-------------------------------|-------------------------------|
| | RADIATED TCS | CONDUCTED TCS |
| BAND | | |
| GSM 850 | GSM LINK GPRS CLASS 8 LINK | GSM LINK GPRS CLASS 8 LINK |
| GSM 1900 | GSM LINK GPRS CLASS 8 LINK | GSM LINK GPRS CLASS 8 LINK |



4 MEASUREMENT INSTRUMENTS

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|---------------------------|-----------------------|------------|----------------|------------------|------------------|
| Spectrum Analyzer | Agilent | E4407B | MY50140340 | 2015.10.25 | 2016.10.24 |
| Signal Analyzer | Agilent | N9020A | MY49100060 | 2015.11.18 | 2016.11.17 |
| Test Receiver | R&S | ESCI | 101427 | 2015.10.25 | 2016.10.24 |
| Communication Tester | Agilent | 8960 | MY48360751 | 2015.11.20 | 2016.11.19 |
| Communication Tester | R&S | CMU200 | 112012 | 2015.10.25 | 2016.10.24 |
| Test Receiver | R&S | ESCI | 102086 | 2015.10.25 | 2016.10.24 |
| Bilog Antenna | TESEQ | CBL6111D | 34678 | 2015.11.25 | 2016.11.24 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-1343 | 2016.03.06 | 2017.03.05 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-0741 | 2016.03.06 | 2017.03.05 |
| MXA SIGNAL Analyzer | Agilent | N9020A | MY49100060 | 2015.10.25 | 2016.10.24 |
| Bilog Antenna | Sunol Sciences | JB3 | A110714 | 2015.09.03 | 2016.09.02 |
| Horn-Antenna | Schwarzbeck | BBHA9120D | 9120D-1266 | 2016.03.06 | 2017.03.05 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-0741 | 2016.03.06 | 2017.03.05 |
| Double Ridge Horn Antenna | COM-POWER CORPORATION | AH-840 | AHA-840 | 2016.03.06 | 2017.03.05 |
| Low frequency cable | N/A | R01 | N/A | N/A | N/A |
| High frequency cable | SCHWARZBECK | AK9515H | SN-96286/96287 | N/A | N/A |
| Vector signal generator | Agilent | E8257D-521 | MY45141029 | 2015.10.16 | 2016.10.14 |
| Power amplifier | DESAY | ZHL-42W | 9638 | 2015.10.24 | 2016.10.23 |

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.



5 TEST ITEMS

5.1 CONDUCTED OUTPUT POWER


Test overview

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Test procedures

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

Test setup

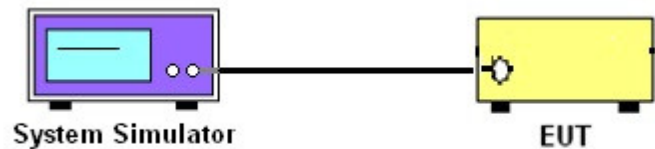



5.2 PEAK TO AVERAGE RATIO


TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

TEST PROCEDURES

1. The testing follows fcckdb 971168 v02r02 section
2. The eut was connected to the and peak and av system simulator& spectrum analysis reads
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis

TEST SETUP

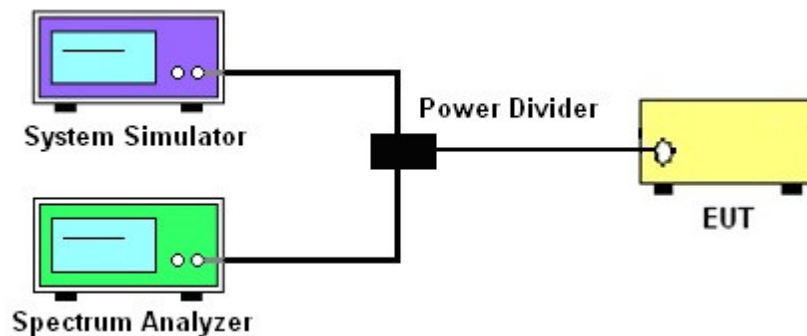



5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

TEST PROCEDURE

1. The testing follows FCC KDB 971168 D01, Section 5.2.2 (for GSM/GPRS) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,
$$\text{ERP/EIRP} = \text{P.SG} + \text{GT} - \text{LC}$$

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Me} as, typically dBW or dBm);
P.SG = measured transmitter output power or PSD, in dBm or dBW;
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.



5.4 OCCUPIED BANDWIDTH

TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5\%$ of the expected OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

TEST SETUP

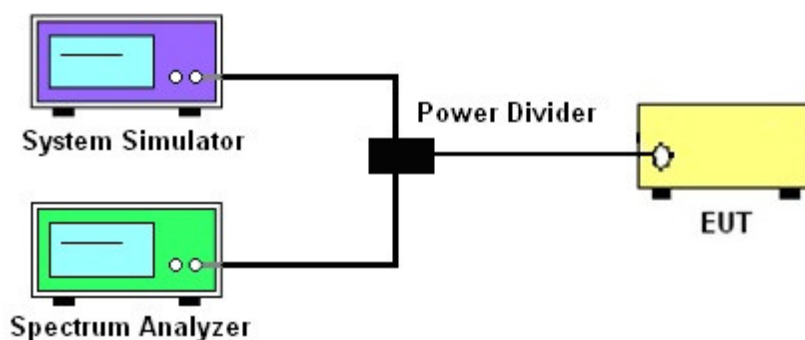

5.5 FREQUENCY STABILITY

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure


Temperature Variation

1. The testing follows fccdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^\circ \text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

TEST SETUP

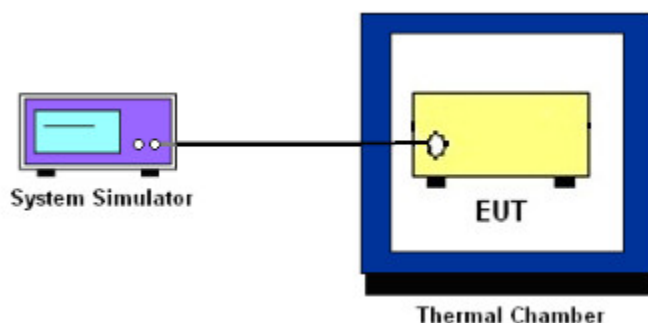

5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Overview


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Test procedure

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

Test Setup

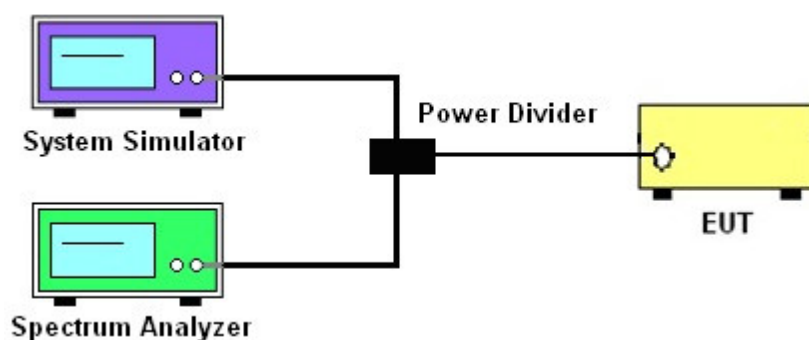



5.7 BAND EDGE

OVERVIEW


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

TEST PROCEDURE

1. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

TEST SETUP

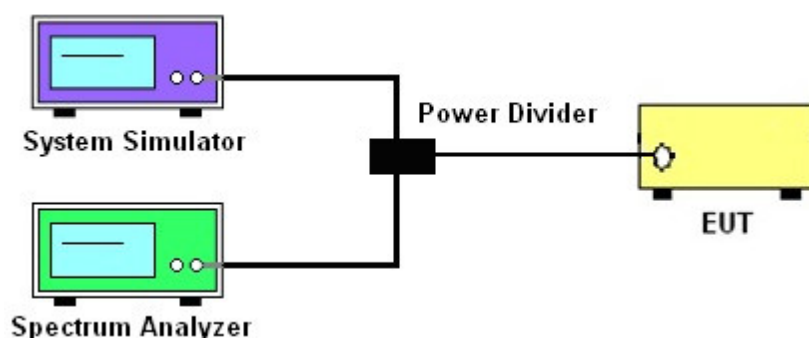



5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

Test overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


Test procedure

1. The testing follows FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010 – Section 2.2.12
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize




TEST SETUP

For radiated test from 30MHz to 1GHz

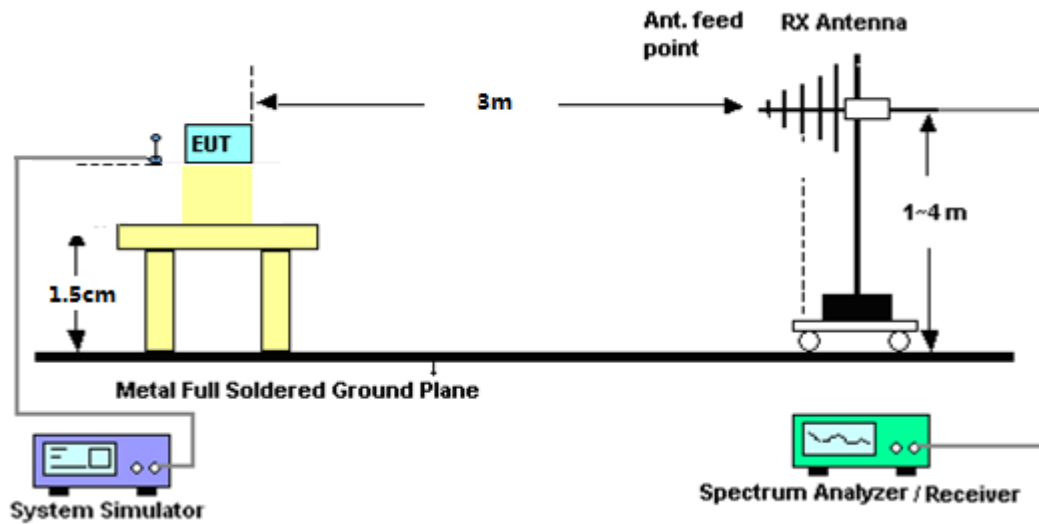

For radiated test from above 1GHz

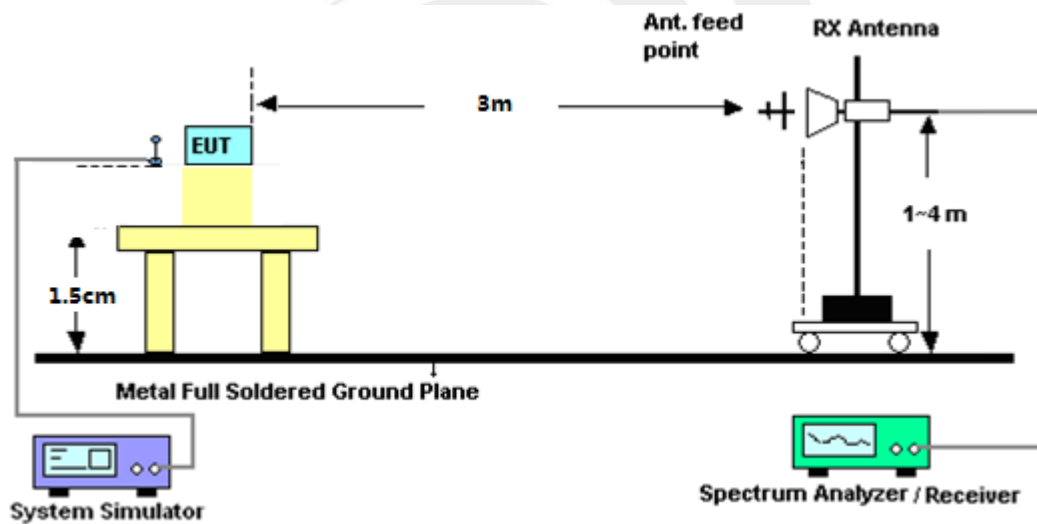



APPENDIX A TestResult
A1 CONDUCTED OUTPUT POWER

GSM 850:

| Mode | Frequency (MHz) | AVG Power |
|---------------------|-----------------|--------------|
| GSM850 | 824.2 | 31.95 |
| | 836.6 | 31.88 |
| | 848.8 | 31.84 |
| GPRS850 (1-Slot) | 824.2 | 31.71 |
| | 836.6 | 31.61 |
| | 848.8 | 31.60 |

PCS 1900:

| Mode | Frequency (MHz) | AVG Power |
|----------------------|-----------------|--------------|
| GSM1900 | 1850.2 | 28.47 |
| | 1880.0 | 28.54 |
| | 1909.8 | 28.68 |
| GPRS1900 (1-Slot) | 1850.2 | 28.25 |
| | 1880 | 28.33 |
| | 1909.8 | 28.46 |

A2 PEAK-TO-AVERAGE RADIO

PCS 1900:

| Mode | Frequency (MHz) | PEAK Power | AVG Power | PAR |
|----------|-----------------|--------------|--------------|-------------|
| PCS1900 | 1850.2 | 29.24 | 28.47 | 0.77 |
| | 1880.0 | 29.37 | 28.54 | 0.83 |
| | 1909.8 | 29.57 | 28.68 | 0.89 |
| GPRS1900 | 1850.2 | 29.01 | 28.24 | 0.77 |
| | 1880 | 29.24 | 28.35 | 0.89 |
| | 1909.8 | 29.41 | 28.51 | 0.90 |



A3 TRANSMITTER RADIATED POWER (EIRP/ERP)

| Radiated Power (ERP) for GSM 850 MHZ | | | | | | | |
|--|-----------|-------------------------|------------|------------|-------------------|--------------------------|------------|
| Mode | Frequency | Result | | | | | Conclusion |
| | | Substituted level (dBm) | Cable loss | Gain (dBd) | Max.Pk E.R.P(dBm) | Polarization Of Max. ERP | |
| GSM850 | 824.2 | 29.30 | 0.44 | 0 | 31.01 | Horizontal | Pass |
| | 824.2 | 30.24 | 0.44 | 0 | 31.95 | Vertical | Pass |
| | 836.6 | 28.19 | 0.45 | 0 | 29.89 | Horizontal | Pass |
| | 836.6 | 30.18 | 0.45 | 0 | 31.88 | Vertical | Pass |
| | 848.8 | 28.23 | 0.46 | 0 | 29.92 | Horizontal | Pass |
| | 848.8 | 30.15 | 0.46 | 0 | 31.84 | Vertical | Pass |
| GPRS850 | 824.2 | 28.40 | 0.44 | 0 | 30.11 | Horizontal | Pass |
| | 824.2 | 30.15 | 0.44 | 0 | 31.86 | Vertical | Pass |
| | 836.6 | 28.17 | 0.45 | 0 | 29.87 | Horizontal | Pass |
| | 836.6 | 30.10 | 0.45 | 0 | 31.80 | Vertical | Pass |
| | 848.8 | 28.12 | 0.46 | 0 | 29.81 | Horizontal | Pass |
| | 848.8 | 30.06 | 0.46 | 0 | 31.75 | Vertical | Pass |
| (1) Dipole Antenna Gain:0dBd=2.15dBi | | | | | | | |
| (2) Substituted level =S G.Level+ Amplifier gain | | | | | | | |



| Radiated Power (EIRP) for PCS 1900 MHZ | | | | | | | |
|--|-----------|-------------------------|------------|------------|-----------------------|---------------------------|------------|
| Mode | Frequency | Result | | | | | Conclusion |
| | | Substituted level (dBm) | Cable loss | Gain (dBi) | Max. Pk E.I.R.P.(dBm) | Polarization Of Max.EIRP. | |
| PCS1900 | 1850.2 | 18.48 | 2.41 | 10.06 | 26.13 | Horizontal | Pass |
| | 1850.2 | 20.82 | 2.41 | 10.06 | 28.47 | Vertical | Pass |
| | 1880.0 | 18.88 | 2.42 | 10.06 | 26.52 | Horizontal | Pass |
| | 1880.0 | 20.9 | 2.42 | 10.06 | 28.54 | Vertical | Pass |
| | 1909.8 | 18.61 | 2.43 | 10.06 | 26.24 | Horizontal | Pass |
| | 1909.8 | 21.05 | 2.43 | 10.06 | 28.68 | Vertical | Pass |
| GPRS1900 | 1850.2 | 18.36 | 2.41 | 10.06 | 26.01 | Horizontal | Pass |
| | 1850.2 | 20.59 | 2.41 | 10.06 | 28.24 | Vertical | Pass |
| | 1880.0 | 18.83 | 2.42 | 10.06 | 26.47 | Horizontal | Pass |
| | 1880.0 | 20.71 | 2.42 | 10.06 | 28.35 | Vertical | Pass |
| | 1909.8 | 18.51 | 2.43 | 10.06 | 26.14 | Horizontal | Pass |
| | 1909.8 | 20.88 | 2.43 | 10.06 | 28.51 | Vertical | Pass |




A4 OCCUPIED BANDWIDTH(99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)

| Bandwidth for GSM 850 band | | | |
|-----------------------------|----------------|-----------------------------------|--------------------------------------|
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 824.2 | 248.46 | 319.7 |
| Middle Channel | 836.6 | 248.05 | 321.5 |
| High Channel | 848.8 | 246.18 | 318.9 |
| Bandwidth for GPRS 850 band | | | |
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 824.2 | 247.11 | 323.3 |
| Middle Channel | 836.6 | 246.04 | 320.0 |
| High Channel | 848.8 | 247.95 | 317.5 |


| Occupied Bandwidth for GSM1900 band | | | |
|--------------------------------------|----------------|-----------------------------------|--------------------------------------|
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 1850.2 | 245.17 | 313.3 |
| Middle Channel | 1880.0 | 244.71 | 313.1 |
| High Channel | 1909.8 | 244.53 | 315.1 |
| Occupied Bandwidth for GPRS1900 band | | | |
| Mode | Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | Emission Bandwidth (-26dBc)(kHz) |
| Low Channel | 1850.2 | 247.38 | 322.8 |
| Middle Channel | 1880.0 | 245.37 | 313.5 |
| High Channel | 1909.8 | 245.00 | 319.2 |




GSM 850 CH 128

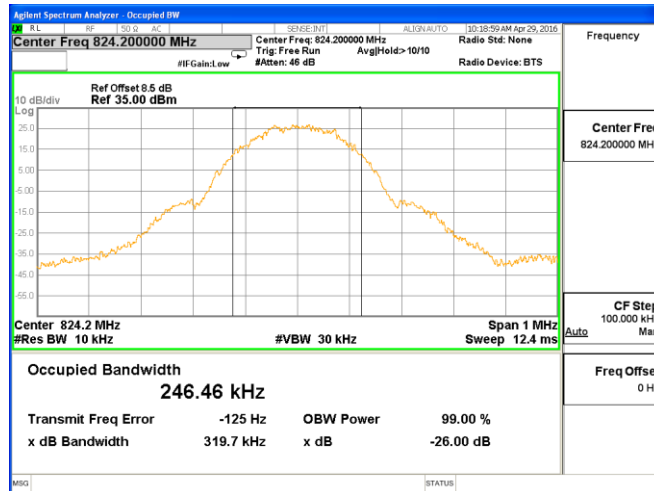

GSM 850 CH 190

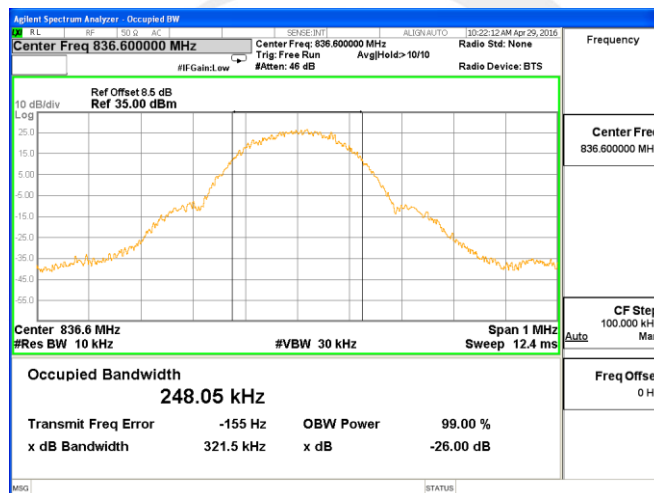


GSM 850 CH 251

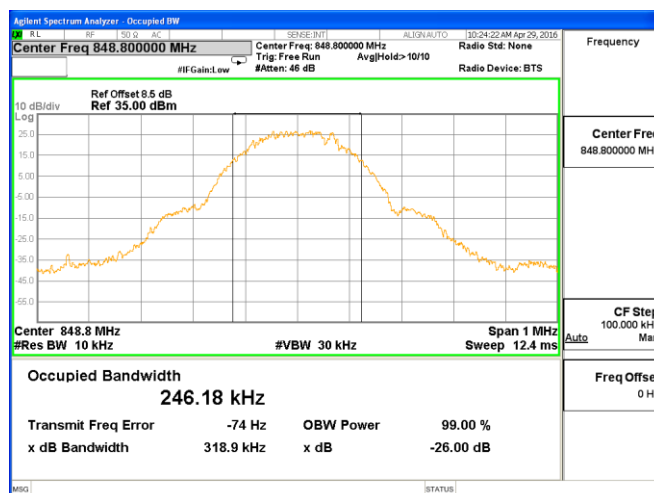





GPRS 850 CH 128

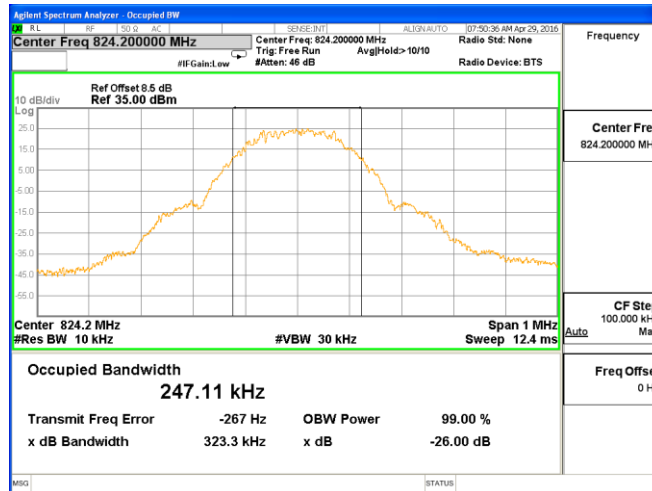

GPRS 850 CH 190

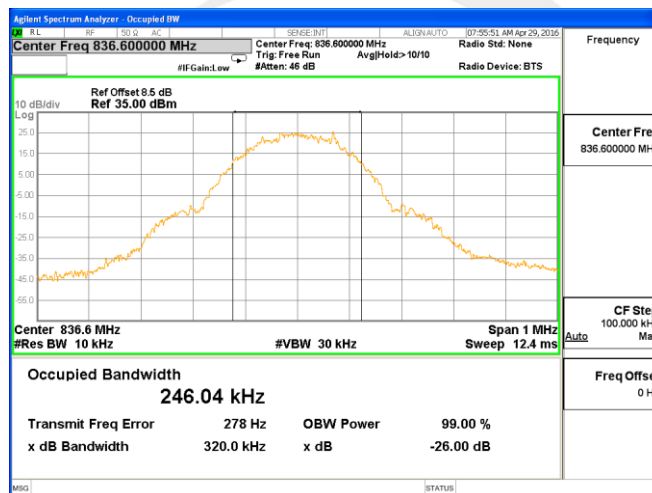


GPRS 850 CH 251

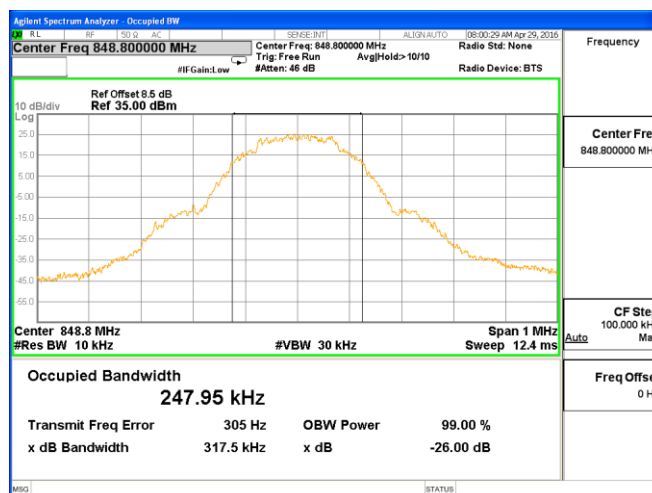





PCS 1900 CH 512

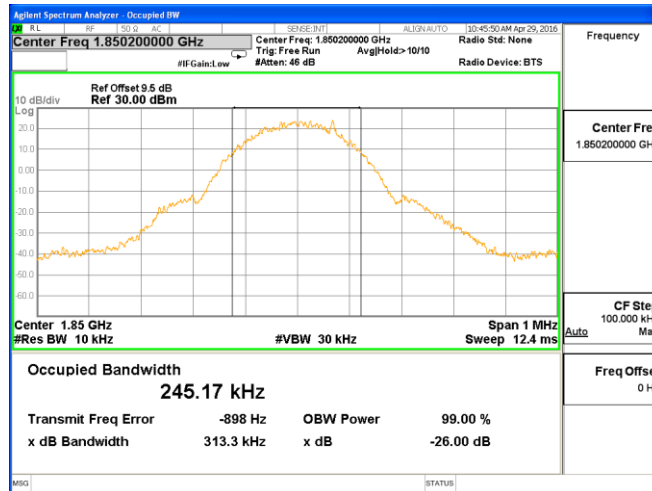

PCS 1900 CH 661

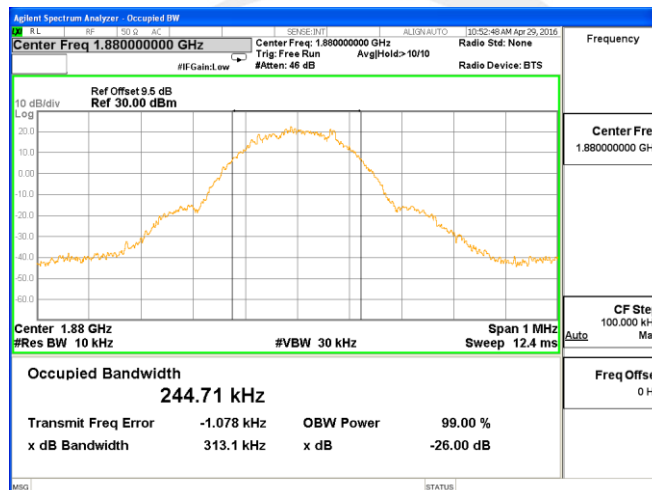


PCS 1900 CH 810

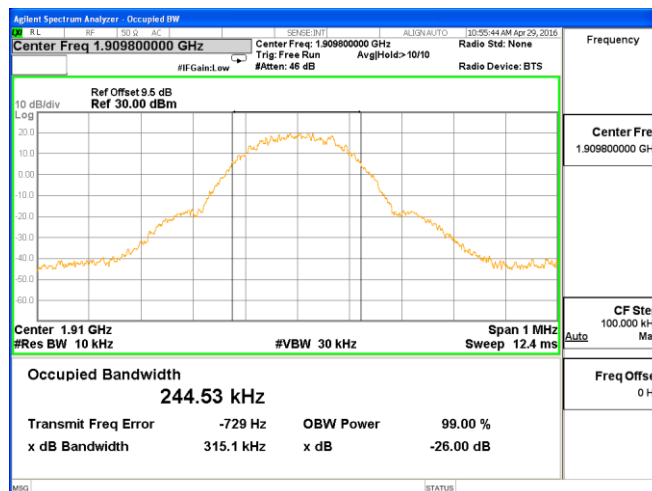





GPRS 1900 CH 512

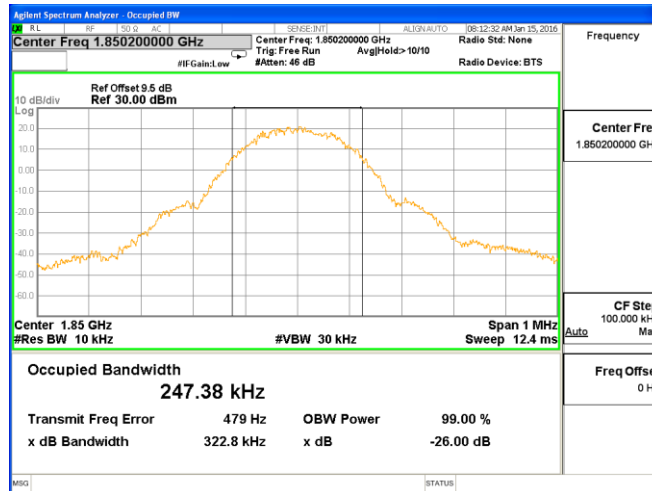

GPRS 1900 CH 661

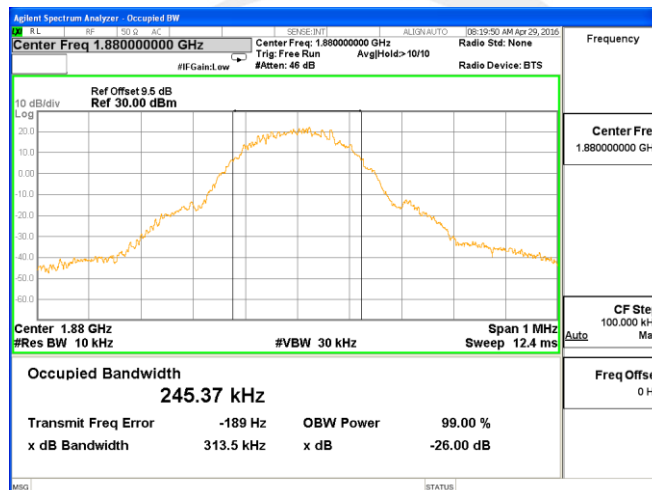

GPRS 1900 CH 810

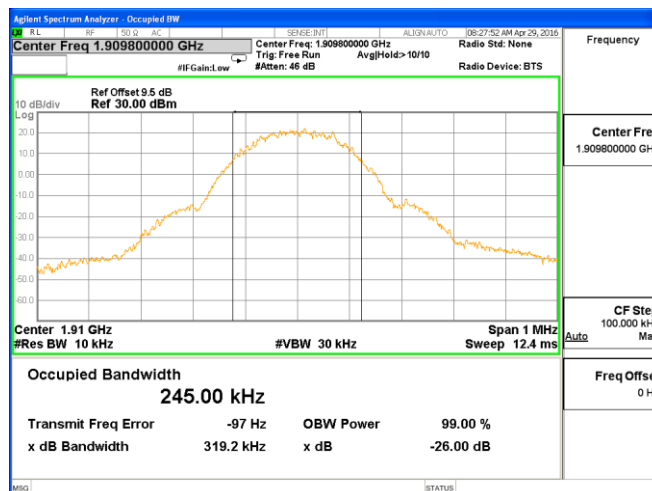



A5 FREQUENCY STABILITY

Normal Voltage = 3.7V. ;Battery End Point (BEP) = 3.5 V.;Maximum Voltage =4.2 V

| GSM 850Middle Channel | | | | | |
|-----------------------|-----------------|-----------------|------------------|--------|--------|
| Temperature (°C) | Voltage (Volt) | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit | Result |
| 50 | Normal Voltage | 13.566 | 0.016 | 2.5ppm | PASS |
| 40 | | 26.499 | 0.032 | | |
| 30 | | 23.674 | 0.028 | | |
| 20 | | 27.906 | 0.033 | | |
| 10 | | 18.240 | 0.022 | | |
| 0 | | 13.485 | 0.016 | | |
| -10 | | 17.418 | 0.021 | | |
| -20 | | 15.906 | 0.019 | | |
| -30 | | 16.253 | 0.019 | | |
| 25 | Maximum Voltage | 19.875 | 0.024 | | |
| 25 | BEP | 11.591 | 0.014 | | |

| GPRS 850Middle Channel | | | | | |
|------------------------|-----------------|-----------------|------------------|--------|--------|
| Temperature (°C) | Voltage (Volt) | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit | Result |
| 50 | Normal Voltage | 13.519 | 0.016 | 2.5ppm | PASS |
| 40 | | 26.505 | 0.032 | | |
| 30 | | 23.649 | 0.028 | | |
| 20 | | 27.856 | 0.033 | | |
| 10 | | 18.203 | 0.022 | | |
| 0 | | 13.531 | 0.016 | | |
| -10 | | 17.339 | 0.021 | | |
| -20 | | 15.913 | 0.019 | | |
| -30 | | 16.254 | 0.019 | | |
| 25 | Maximum Voltage | 19.858 | 0.024 | | |
| 25 | BEP | 11.579 | 0.014 | | |



| GSM 1900Middle Channel | | | | | |
|------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C) | Voltage (Volt) | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit | Result |
| 50 | Normal Voltage | 19.126 | 0.010 | Within Authorized Band | PASS |
| 40 | | 11.184 | 0.006 | | |
| 30 | | 10.272 | 0.005 | | |
| 20 | | 22.240 | 0.012 | | |
| 10 | | 14.121 | 0.008 | | |
| 0 | | 10.006 | 0.005 | | |
| -10 | | 15.476 | 0.008 | | |
| -20 | | 20.715 | 0.011 | | |
| -30 | | 24.162 | 0.013 | | |
| 25 | Maximum Voltage | 12.509 | 0.007 | | |
| 25 | BEP | 12.438 | 0.007 | | |


| GPRS1900Middle Channel | | | | | |
|------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C) | Voltage (Volt) | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit | Result |
| 50 | Normal Voltage | 19.048 | 0.010 | Within Authorized Band | PASS |
| 40 | | 11.201 | 0.006 | | |
| 30 | | 10.298 | 0.005 | | |
| 20 | | 22.276 | 0.012 | | |
| 10 | | 14.114 | 0.008 | | |
| 0 | | 10.071 | 0.005 | | |
| -10 | | 15.462 | 0.008 | | |
| -20 | | 20.677 | 0.011 | | |
| -30 | | 24.092 | 0.013 | | |
| 25 | Maximum Voltage | 12.510 | 0.007 | | |
| 25 | BEP | 12.505 | 0.007 | | |




A6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

GSM 850 BAND


Lowest Channel

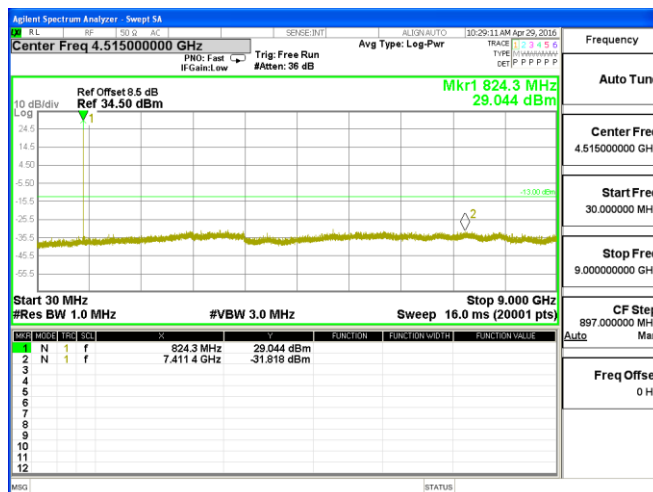

Middle Channel

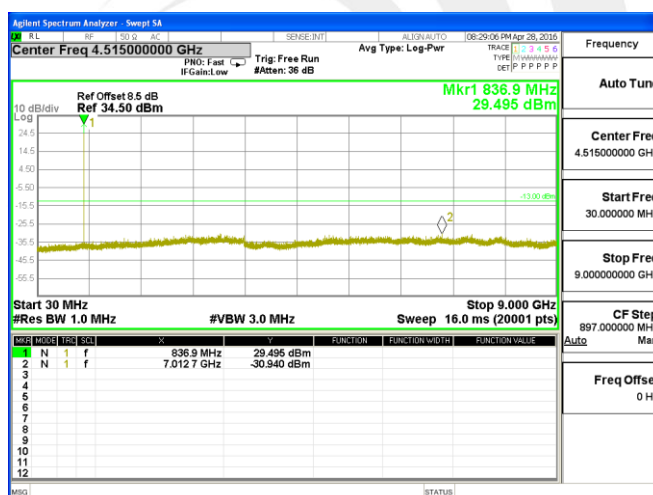


Highest Channel

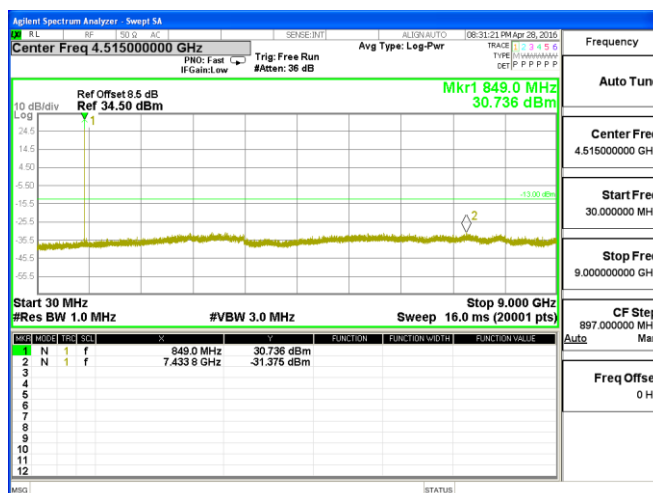




GPRS 850 BAND


Lowest Channel

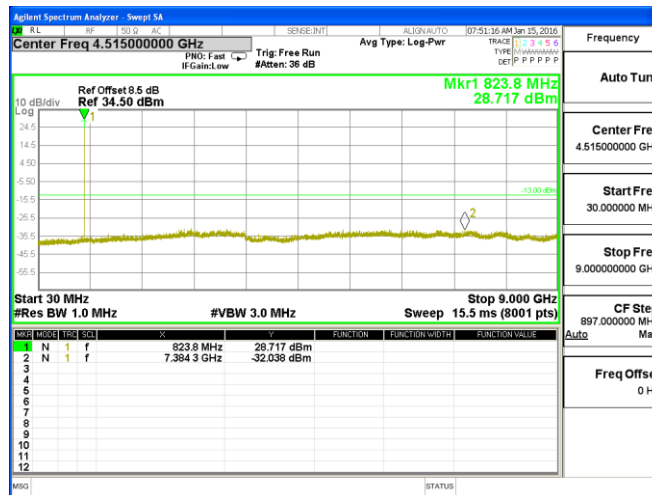

Middle Channel

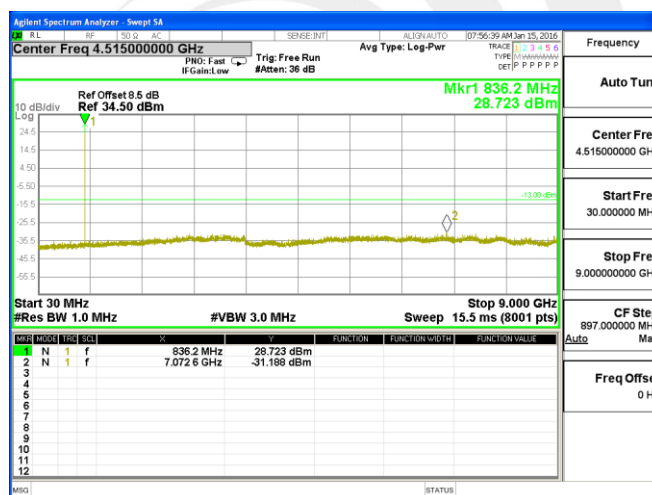


Highest Channel

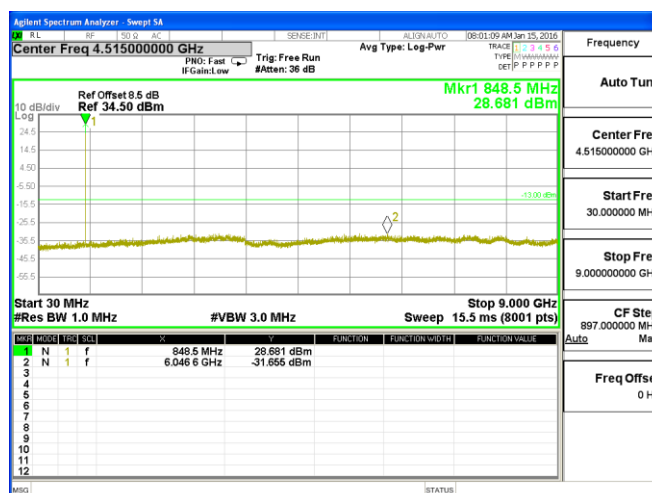




GSM1900 BAND(30M-12G)


Lowest Channel

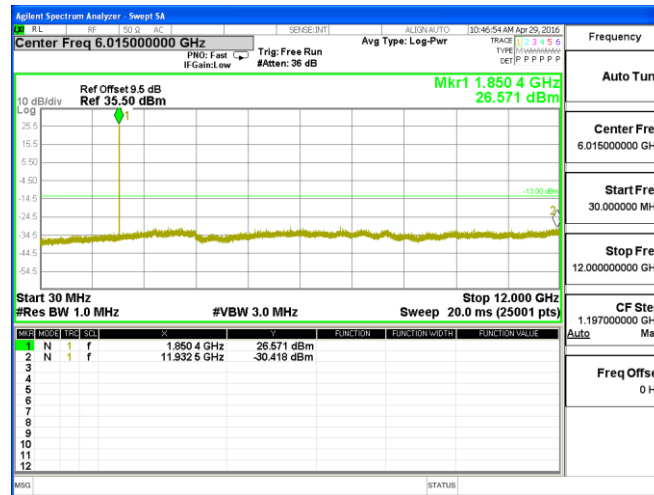

Middle Channel

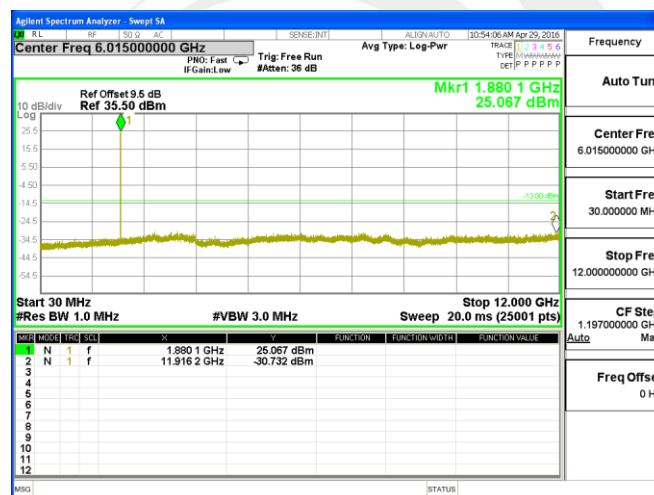


Highest Channel

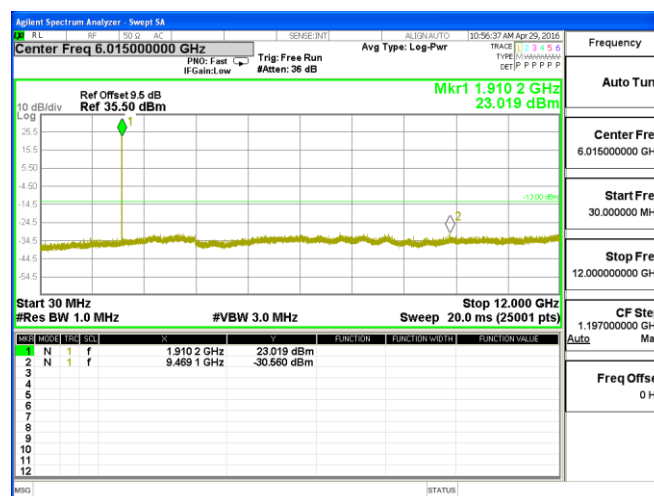




GSM1900 BAND(12G-20G)


Lowest Channel

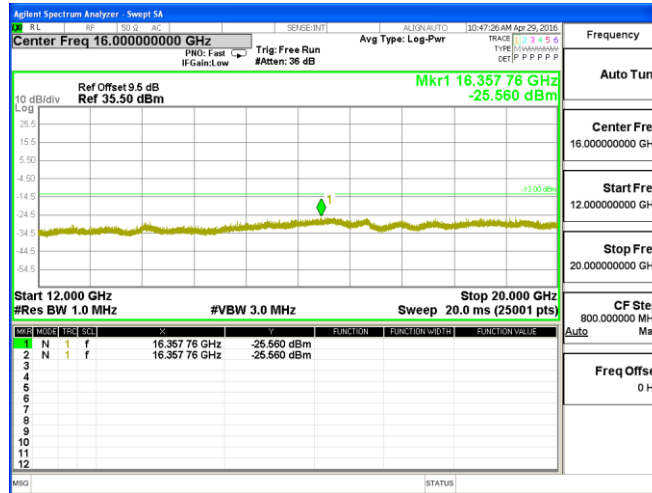

Middle Channel

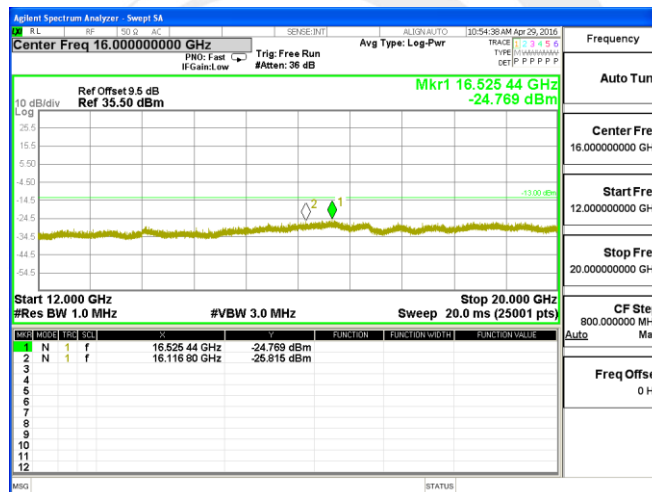


Highest Channel

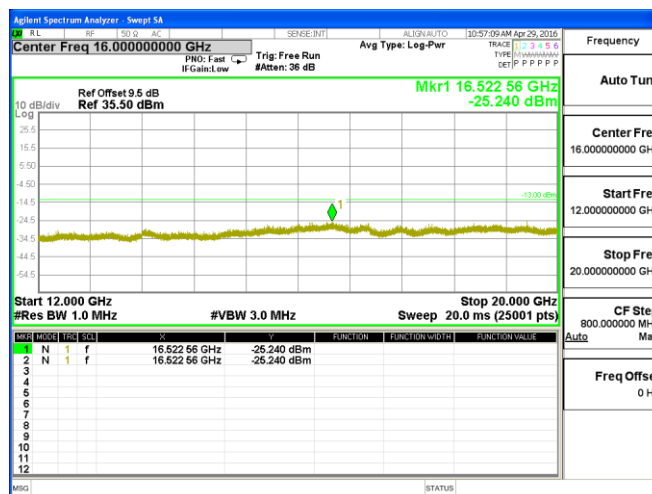




GPRS1900 BAND(30M-12G)


Lowest Channel

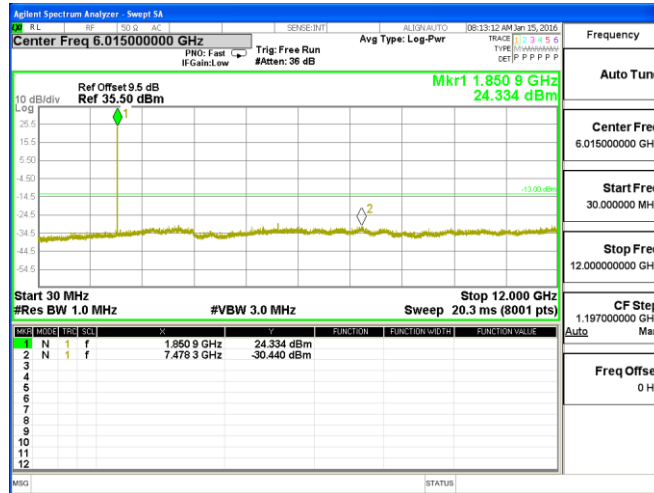

Middle Channel

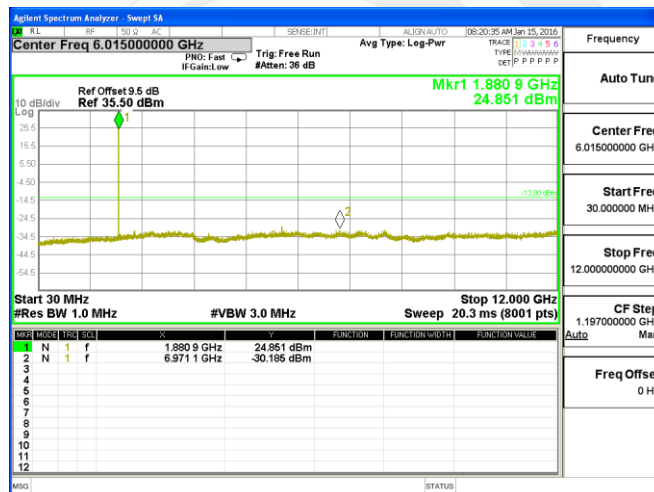


Highest Channel

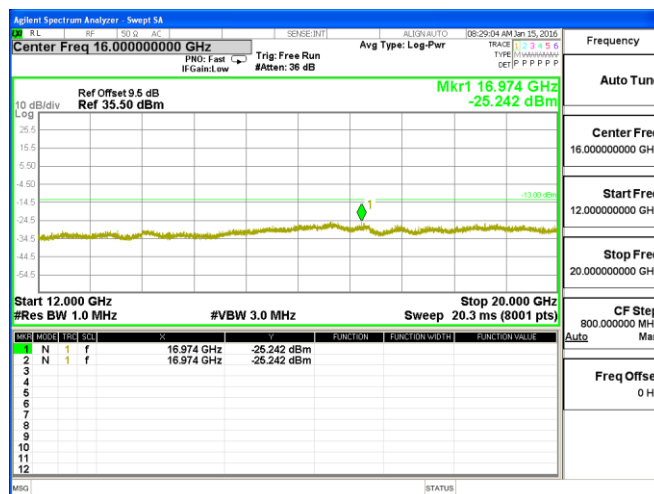




GPRS1900 BAND(12G-20G)


Lowest Channel

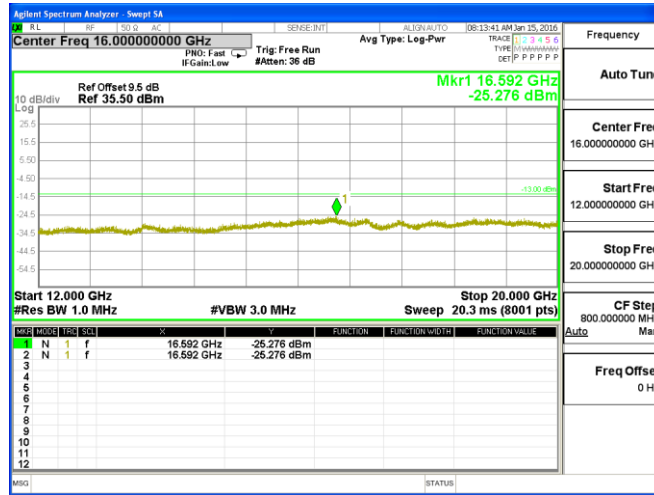

Middle Channel

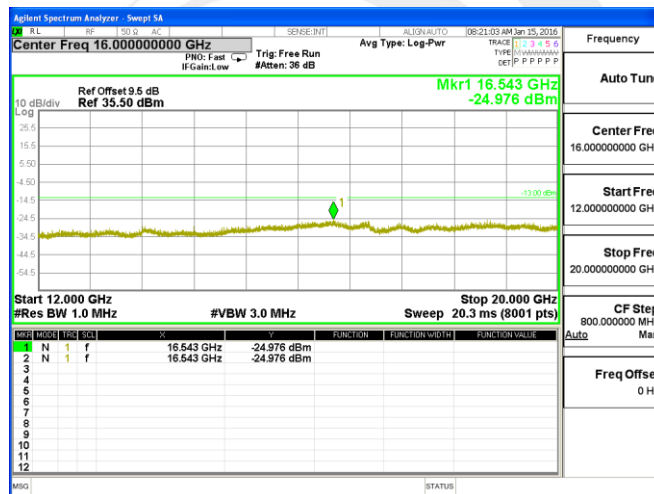

Highest Channel

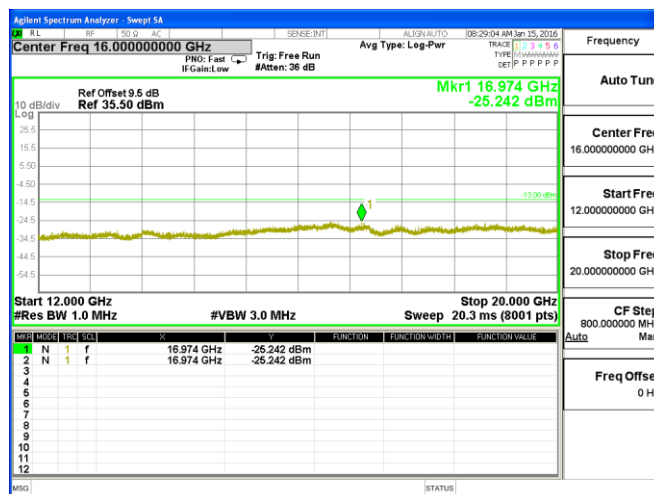




A7 BAND EDGE

35 of 43

Report No.: STS1604131F01


GSM 850

Lowest Band Edge

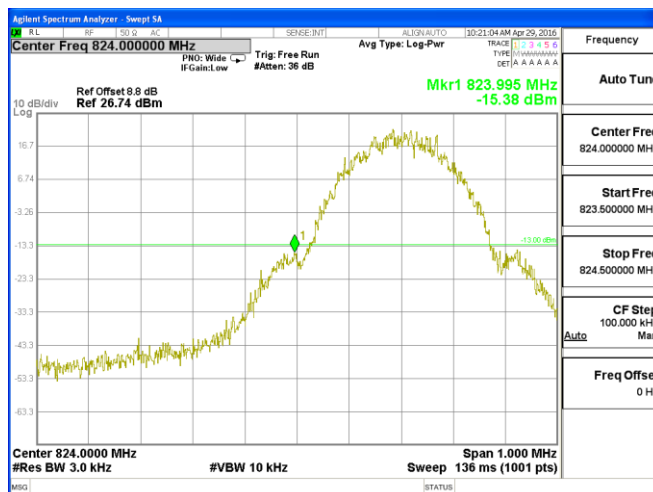

Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB

Highest Band Edge

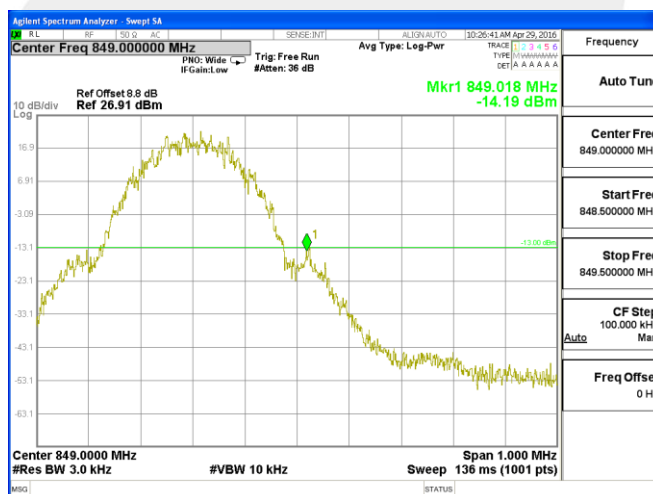


Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB




GPRS 850

Lowest Band Edge

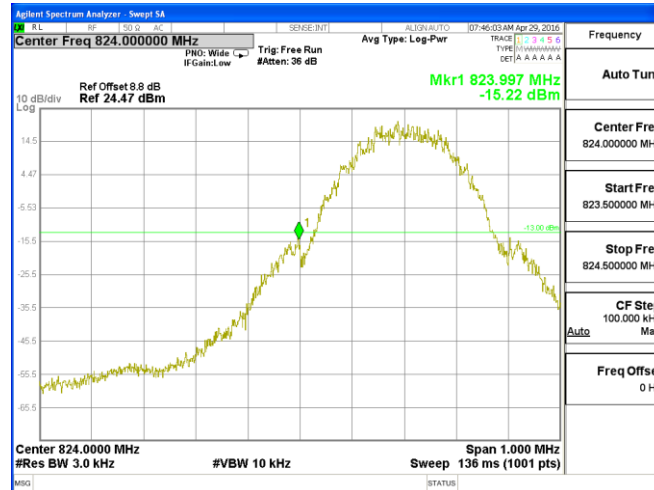

Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB

Highest Band Edge

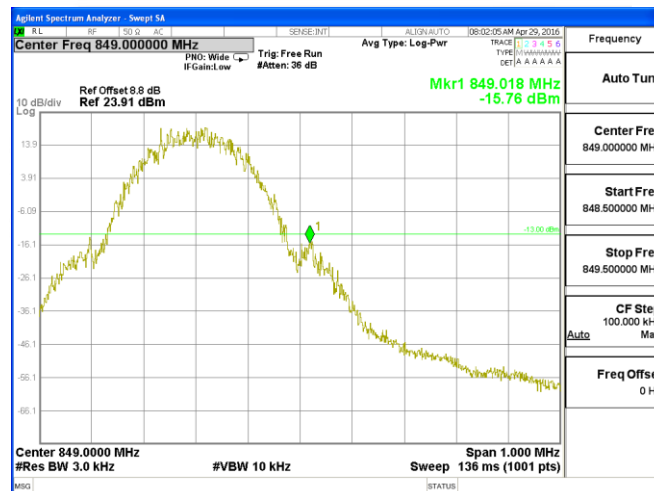


Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB




GSM 1900

Lowest Band Edge

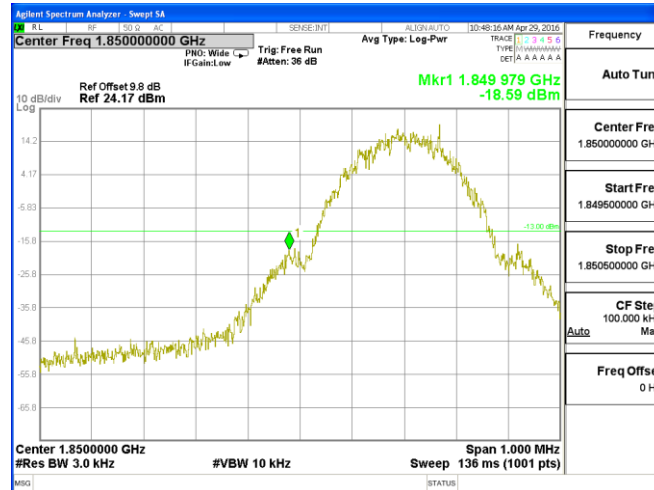

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

Highest Band Edge

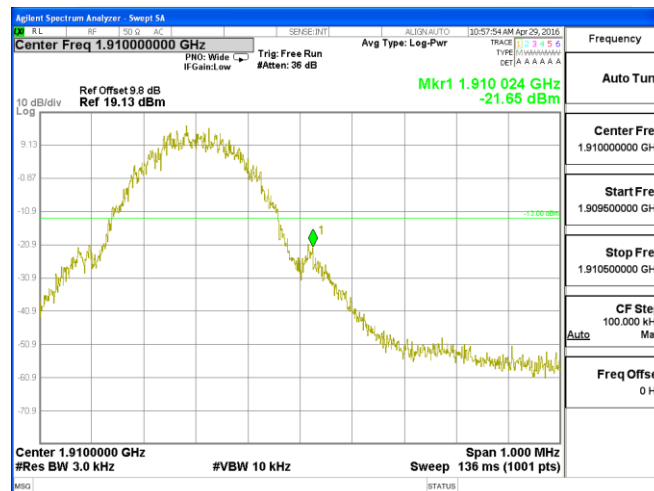


Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




GPRS 1900

Lowest Band Edge

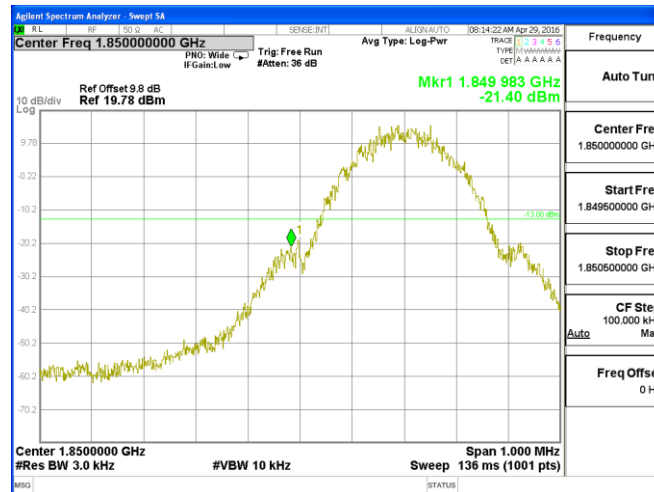

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

Highest Band Edge

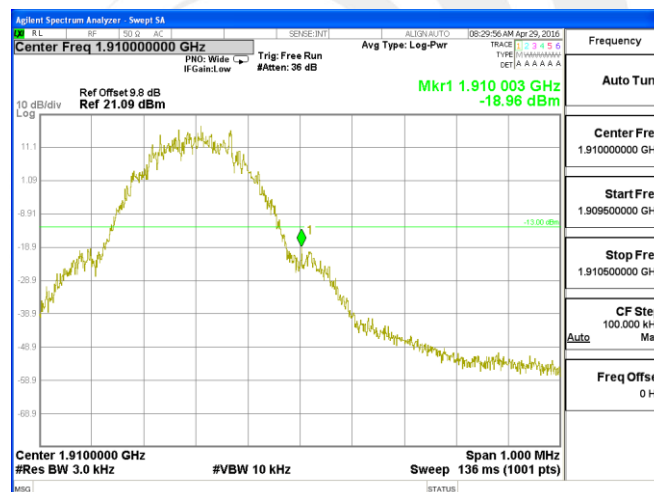

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB



A8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

GSM 850: (30-9000)MHz

| The Worst Test Results Channel 128/824.2 MHz | | | | | | |
|--|------------|------------------|------------------------|-------------|-------------|------------|
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 1648.541 | -35.44 | -4.65 | -40.09 | -13 | -27.09 | Horizontal |
| 2472.782 | -36.97 | -2.21 | -39.18 | -13 | -26.18 | Horizontal |
| 3296.873 | -31.14 | 0.21 | -30.93 | -13 | -17.93 | Horizontal |
| 1648.548 | -38.49 | -4.65 | -43.14 | -13 | -30.14 | Vertical |
| 2472.842 | -41.78 | -2.21 | -43.99 | -13 | -30.99 | Vertical |
| 3296.952 | -42.72 | 0.21 | -42.51 | -13 | -29.51 | Vertical |
| The Worst Test Results Channel 190/836.6 MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 1673.354 | -36.53 | -4.65 | -41.18 | -13 | -28.18 | Horizontal |
| 2509.887 | -42.94 | -2.21 | -45.15 | -13 | -32.15 | Horizontal |
| 3346.467 | -38.1 | 0.21 | -37.89 | -13 | -24.89 | Horizontal |
| 1673.446 | -37.51 | -4.65 | -42.16 | -13 | -29.16 | Vertical |
| 2509.969 | -31.82 | -2.21 | -34.03 | -13 | -21.03 | Vertical |
| 3346.499 | -36.72 | 0.21 | -36.51 | -13 | -23.51 | Vertical |
| The Worst Test Results Channel 251/848.8 MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 1697.741 | -35.48 | -4.65 | -40.13 | -13 | -27.13 | Horizontal |
| 2546.531 | -43.97 | -2.21 | -46.18 | -13 | -33.18 | Horizontal |
| 3395.372 | -42.15 | 0.21 | -41.94 | -13 | -28.94 | Horizontal |
| 1697.745 | -35.45 | -4.65 | -40.1 | -13 | -27.1 | Vertical |
| 2546.533 | -41.83 | -2.21 | -44.04 | -13 | -31.04 | Vertical |
| 3395.43 | -37.72 | 0.21 | -37.51 | -13 | -24.51 | Vertical |

Note: (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



GPRS 850: (30-9000)MHz

| The Worst Test Results Channel 128/824.2 MHz | | | | | | |
|--|------------|-------|------------------------|-------------|-------------|------------|
| Frequency(MHz) | Power(dBm) | ARpl | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 1649.464 | -35.34 | -4.65 | -39.99 | -13 | -26.99 | Horizontal |
| 2473.682 | -36.77 | -2.21 | -38.98 | -13 | -25.98 | Horizontal |
| 3297.833 | -31.62 | 0.21 | -31.41 | -13 | -18.41 | Horizontal |
| 1646.452 | -38.31 | -4.65 | -42.96 | -13 | -29.96 | Vertical |
| 2474.655 | -41.55 | -2.21 | -43.76 | -13 | -30.76 | Vertical |
| 3297.864 | -42.69 | 0.21 | -42.9 | -13 | -29.9 | Vertical |
| The Worst Test Results Channel 190/836.6 MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | ARpl | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 1674.265 | -36.55 | -4.65 | -41.2 | -13 | -28.2 | Horizontal |
| 2508.843 | -42.23 | -2.21 | -44.44 | -13 | -31.44 | Horizontal |
| 3347.421 | -38.87 | 0.21 | -38.66 | -13 | -25.66 | Horizontal |
| 1674.254 | -37.36 | -4.65 | -42.01 | -13 | -29.01 | Vertical |
| 2510.853 | -31.34 | -2.21 | -33.55 | -13 | -20.55 | Vertical |
| 3349.452 | -36.25 | 0.21 | -36.04 | -13 | -23.04 | Vertical |
| The Worst Test Results Channel 251/848.8 MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | ARpl | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 1698.645 | -35.35 | -4.65 | -40 | -13 | -27 | Horizontal |
| 2544.462 | -43.71 | -2.21 | -45.92 | -13 | -32.92 | Horizontal |
| 33953272 | -42.45 | 0.21 | -42.24 | -13 | -29.24 | Horizontal |
| 1692.632 | -35.87 | -4.65 | -40.52 | -13 | -27.52 | Vertical |
| 2545.452 | -41.95 | -2.21 | -44.16 | -13 | -31.16 | Vertical |
| 3397.217 | -37.63 | 0.21 | -37.42 | -13 | -24.42 | Vertical |

Note: (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



PCS 1900: (30-20000)MHz

| The Worst Test Results for Channel 512/1850.2MHz | | | | | | |
|--|------------|------------------|------------------------|-------------|-------------|------------|
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 3700.497 | -33.46 | 0.33 | -33.13 | -13 | -20.13 | Horizontal |
| 5550.733 | -35.95 | 4.01 | -31.94 | -13 | -18.94 | Horizontal |
| 7400.945 | -42.14 | 10.7 | -31.44 | -13 | -18.44 | Horizontal |
| 3700.583 | -34.48 | 0.33 | -34.15 | -13 | -21.15 | Vertical |
| 5550.765 | -35.78 | 4.01 | -31.77 | -13 | -18.77 | Vertical |
| 7401.043 | -41.69 | 10.7 | -30.99 | -13 | -17.99 | Vertical |
| The Worst Test Results for Channel 661/1880.0MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 3760.217 | -36.52 | 0.33 | -36.19 | -13 | -23.19 | Horizontal |
| 5640.295 | -37.02 | 4.01 | -33.01 | -13 | -20.01 | Horizontal |
| 7520.256 | -32.11 | 10.7 | -21.41 | -13 | -8.41 | Horizontal |
| 3760.272 | -38.56 | 0.33 | -38.23 | -13 | -25.23 | Vertical |
| 5640.301 | -41.77 | 4.01 | -37.76 | -13 | -24.76 | Vertical |
| 7520.354 | -42.74 | 10.7 | -32.04 | -13 | -19.04 | Vertical |
| The Worst Test Results for Channel 810/1909.8MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 3819.685 | -36.44 | 0.33 | -36.11 | -13 | -23.11 | Horizontal |
| 5729.494 | -37.04 | 4.01 | -33.03 | -13 | -20.03 | Horizontal |
| 7639.354 | -32.1 | 10.7 | -21.4 | -13 | -8.4 | Horizontal |
| 3819.726 | -38.45 | 0.33 | -38.12 | -13 | -25.12 | Vertical |
| 5729.575 | -41.78 | 4.01 | -37.77 | -13 | -24.77 | Vertical |
| 7639.404 | -42.68 | 10.7 | -31.98 | -13 | -18.98 | Vertical |

Note: (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



GPRS 1900: (30-20000)MHz

| The Worst Test Results for Channel 512/1850.2MHz | | | | | | |
|--|------------|------------------|------------------------|-------------|-------------|------------|
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 3702.424 | -33.34 | 0.33 | -33.01 | -13 | -20.01 | Horizontal |
| 5551.672 | -35.52 | 4.01 | -31.51 | -13 | -18.51 | Horizontal |
| 7402.897 | -42.37 | 10.7 | -31.67 | -13 | -18.67 | Horizontal |
| 3701.432 | -34.32 | 0.33 | -33.99 | -13 | -20.99 | Vertical |
| 5552.653 | -35.49 | 4.01 | -31.48 | -13 | -18.48 | Vertical |
| 7402.842 | -41.37 | 10.7 | -30.67 | -13 | -17.67 | Vertical |
| The Worst Test Results for Channel 661/1880.0MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 3762.167 | -36.35 | 0.33 | -36.02 | -13 | -23.02 | Horizontal |
| 5641.245 | -32.27 | 4.01 | -28.26 | -13 | -15.26 | Horizontal |
| 7521.223 | -42.31 | 10.7 | -31.61 | -13 | -18.61 | Horizontal |
| 3762.175 | -31.39 | 0.33 | -31.06 | -13 | -18.06 | Vertical |
| 5641.242 | -36.54 | 4.01 | -32.53 | -13 | -19.53 | Vertical |
| 7522.243 | -37.55 | 10.7 | -26.85 | -13 | -13.85 | Vertical |
| The Worst Test Results for Channel 810/1909.8MHz | | | | | | |
| Frequency(MHz) | Power(dBm) | A _{Rpl} | P _{Mea} (dBm) | Limit (dBm) | Margin(dBm) | Polarity |
| 3820.632 | -32.57 | 0.33 | -32.24 | -13 | -19.24 | Horizontal |
| 5730.443 | -35.64 | 4.01 | -31.63 | -13 | -18.63 | Horizontal |
| 7638.275 | -37.76 | 10.7 | -27.06 | -13 | -14.06 | Horizontal |
| 3820.641 | -32.67 | 0.33 | -32.34 | -13 | -19.34 | Vertical |
| 5731.484 | -41.71 | 4.01 | -37.7 | -13 | -24.7 | Vertical |
| 7641.232 | -38.65 | 10.7 | -27.95 | -13 | -14.95 | Vertical |



Note: (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



APPENDIX B PHOTOS OF TEST SETUP

RADIATED SPURIOUS EMISSION

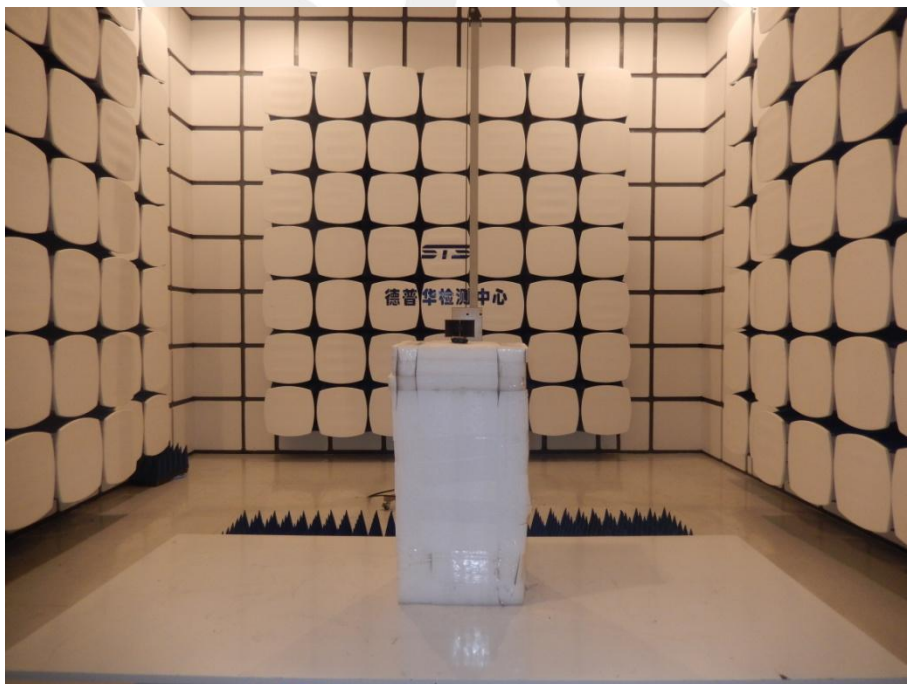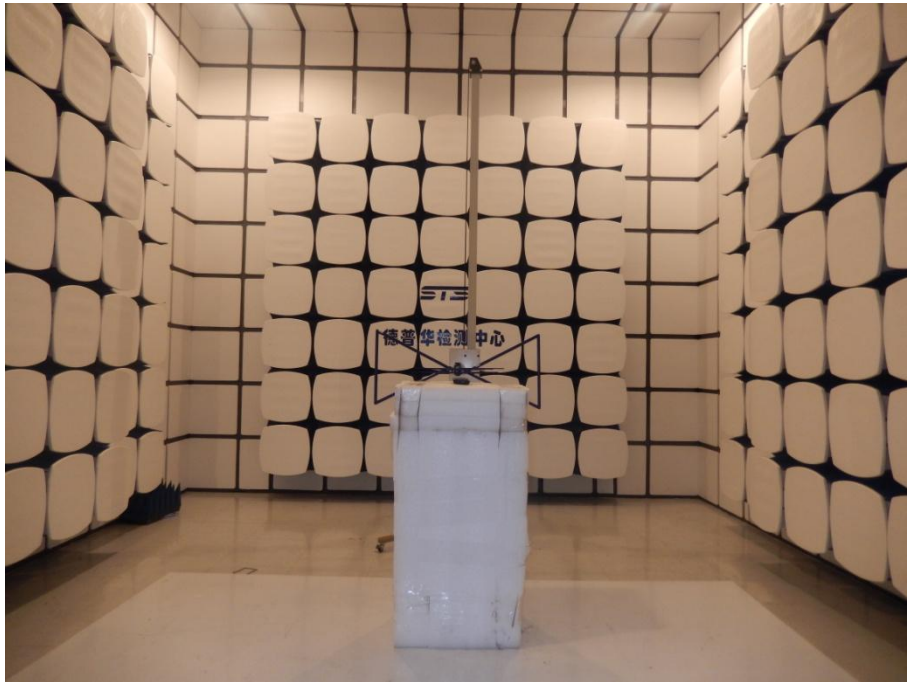

※※※※※END OF THE REPORT※※※※※