



Test report No:  
1992203R-RF-US-P06V02

## FCC TEST REPORT & IC TEST REPORT

Product Name	Hue Outdoor light strip 2m
Trademark	PHILIPS
FCC ID	2AGBW9290022890AX
IC	20812-2890AX
Model and /or type reference	9290022890A
Applicant's name / address	Signify (China) Investment Co., Ltd Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai, 200233, China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented By	Kitty Li/Project Assistant 
Tested by (name / position & signature)	Frank He/ Technical Supervisor 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2019-12-02
Report template No	1992203R-RF-US-P06V02

## INDEX

	page
General conditions .....	4
Environmental conditions .....	4
Possible test case verdicts .....	5
Abbreviations .....	5
Document History .....	6
Remarks and Comments.....	6
Used Equipment .....	7
Uncertainty .....	9
1 General Information.....	10
1.1 General Description of the Item(s) .....	10
1.2 Antenna Information .....	11
1.3 Channel List .....	12
2 Description of Test Setup .....	13
2.1 Operating mode(s) used for tests.....	13
2.2 Auxiliary equipment / Test software for the EUT.....	13
2.3 Test Configuration / Block diagram used for tests .....	14
2.4 Testing process .....	15
3 Verdict summary section .....	16
3.1 Standards.....	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results .....	17
3.4 Test Facility .....	18
4 Test Results .....	19
4.1 AC Power Line Conducted Emission .....	19
4.1.1 Limit .....	19
4.1.2 Test Setup.....	19
4.1.3 Test Procedure.....	19
4.1.4 Test Data .....	20
4.2 Emissions in restricted frequency bands .....	22
4.2.1 Limit .....	22
4.2.2 Test Setup.....	24
4.2.3 Test Procedure.....	25
4.2.4 Test Data .....	26

4.3	Emissions in non-restricted frequency band.....	40
4.3.1	Limit .....	40
4.3.2	Test Setup.....	40
4.3.3	Test Procedure.....	40
4.3.4	Test Data .....	41
4.4	Duty cycle .....	42
4.4.1	Limit .....	42
4.4.2	Test Setup.....	42
4.4.3	Test Procedure.....	42
4.4.4	Test Data .....	43
4.5	Radiated Emission Band Edge .....	44
4.5.1	Limit .....	44
4.5.2	Test Setup.....	44
4.5.3	Test Procedure.....	44
4.5.4	Test Data .....	45
4.6	DTS Bandwidth .....	61
4.6.1	Limit .....	61
4.6.2	Test Setup.....	61
4.6.3	Test Procedure.....	61
4.6.4	Test Data .....	62
4.7	Fundamental emission output power .....	63
4.7.1	Limit .....	63
4.7.2	Test Setup.....	63
4.7.3	Test Procedure.....	64
4.7.4	Test Data .....	65
4.8	Power Density .....	66
4.8.1	Limit: .....	66
4.8.2	Test Setup.....	66
4.8.3	Test Procedure.....	66
4.8.4	Test Data .....	67
4.9	Antenna Requirement.....	69
4.9.1	Limit: .....	69
4.9.2	Antenna Connector Construction: .....	69
4.10	Test setup photo and EUT Photo.....	70

## COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

## GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Sep. 30, 2019
Date (start test)	Oct. 08, 2019
Date (finish test)	Nov. 26, 2019

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

## ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

## POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

## ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
$U_N$	: Nominal voltage
$T_x$	: Transmitter
$R_x$	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

## DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
1992203R-RF-US-P06V02	V1.0	Initial issue of report.	2019-12-02

## REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements.
4. The test results presented in this report relate only to the object tested.
5. The test results relate only to the samples tested.
6. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
7. This report will not be used for social proof function in China market.

## USED EQUIPMENT

### AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2019.04.20	2020.04.19
Two-Line V-Network	R&S	ENV216	101190	2019.05.25	2020.05.24
Two-Line V-Network	R&S	ENV216	101044	2019.05.25	2020.05.24
Current Probe	R&S	EZ-17	100678	2019.03.12	2020.04.11
50ohm Termination	SHX	TF2	07081402	2019.09.02	2020.09.01
50ohm Termination	SHX	TF2	07081403	2019.09.02	2020.09.01
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2019.08.21	2020.08.20
Coaxial Cable	Suhner	RG 223	TR1-C1	2019.08.25	2020.08.24
Coaxial Cable	Suhner	RG 223	TR1-C2	2019.08.25	2020.08.24
Dekra test software	Dekra	-	-	-	-

### Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.17	2020.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2019.07.14	2020.07.13
Power Sensor	Anritsu	MA2411B	0846014	2019.08.12	2020.08.11
Coaxial Cable	Woken	SFL402	F02-150410-044	2019.01.01	2019.12.31
Dekra test software	Dekra	-	-	-	-

### Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2019.03.03	2020.03.02
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2019.05.25	2020.05.24
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2019.04.13	2020.04.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission (1GHz-40GHz)/ AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2019.05.08	2020.05.07
Preamplifier	Miteq	NSP1800-25	1364185	2019.05.06	2020.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2019.05.06	2020.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2019.01.22	2020.01.21
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2019.04.13	2020.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2019.04.13	2020.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2019.04.13	2020.04.12
Dekra test software	Dekra	-	-	-	-



## UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%. The Uncertainties is comply with standard required as below.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	$\pm 1.27$ dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	$\pm 1.27$ dB
Radiated Emission Band Edge	$\pm 3.9$ dB
DTS Bandwidth	$\pm 150$ Hz
Occupied Bandwidth	$\pm 1$ kHz
Power Density	$\pm 1.27$ dB

## 1 GENERAL INFORMATION

### 1.1 General Description of the Item(s)

Product Name .....	Hue Outdoor light strip 2m
Model No. ....	9290022890A
Trademark .....	PHILIPS
Manufacturer.....	Signify (China) Investment Co., Ltd.
Manufacturer Address.....	Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai, 200233, China

Wireless specification.....	Zigbee
Operating frequency range(s)	2400~2483.5MHz
Type of Modulation.....	DSSS-OQPSK
Number of channel.....	16
Operating Temperature Range.....	-20°C ~ 45 °C

Rated power supply .....	Voltage and Frequency	
	<input checked="" type="checkbox"/>	AC: 100 – 240 V, 50/60 Hz
Mounting position.....	<input type="checkbox"/>	DC: 15~24Vdc
	<input type="checkbox"/>	Battery: 3.7V
	<input type="checkbox"/>	Table top equipment
	<input type="checkbox"/>	Wall/Ceiling mounted equipment
	<input type="checkbox"/>	Floor standing equipment
	<input type="checkbox"/>	Hand-held equipment
	<input checked="" type="checkbox"/>	Other: Outdoor equipment

Note1: We have evaluated both modes of LE 1M, LE 2M and LE coded, the power of LE 1M mode is higher than other mode, the test data of both modes is showed in the report with test items power and bandwidth; the test data of worse mode is showed with other test items.

Note 2: Hue light strip supports two kinds of Crystal oscillator (Murata/ KDS), there is not any change in RF design, circuitry or construction for this device, including RF parameters (antenna, software, firmware and hardware versions, power, frequency ranges, etc.), so only power, spurious emission and band-edge were tested for different crystal oscillator, the test data of worse mode is showed with other test items.

## 1.2 Antenna Information

Antenna model / type number .....	N/A		
Antenna serial number .....	N/A		
Antenna Delivery .....	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology .....	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> CDD <input type="checkbox"/> Beam-forming
Antenna Type .....	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole <input type="checkbox"/> Sectorized
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/> PIFA <input checked="" type="checkbox"/> PCB <input type="checkbox"/> Ceramic Chip <input type="checkbox"/> Others.....
Antenna Gain.....	2.99 dBi		

### 1.3 Channel List

Working Frequency of Each Channel: (For Zigbee)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz	14	2420 MHz
15	2425 MHz	16	2430 MHz	17	2435 MHz	18	2440 MHz
19	2445 MHz	20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz	26	2480 MHz

## 2 DESCRIPTION OF TEST SETUP

### 2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.


Test Mode	Mode 1: Transmit by Zigbee
-----------	----------------------------

### 2.2 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	E470	Lenovo	N/A
software	Type / Version	Manufacturer	Supplied by
HueApprobationTool	1.1.00	Philips	N/A

## 2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

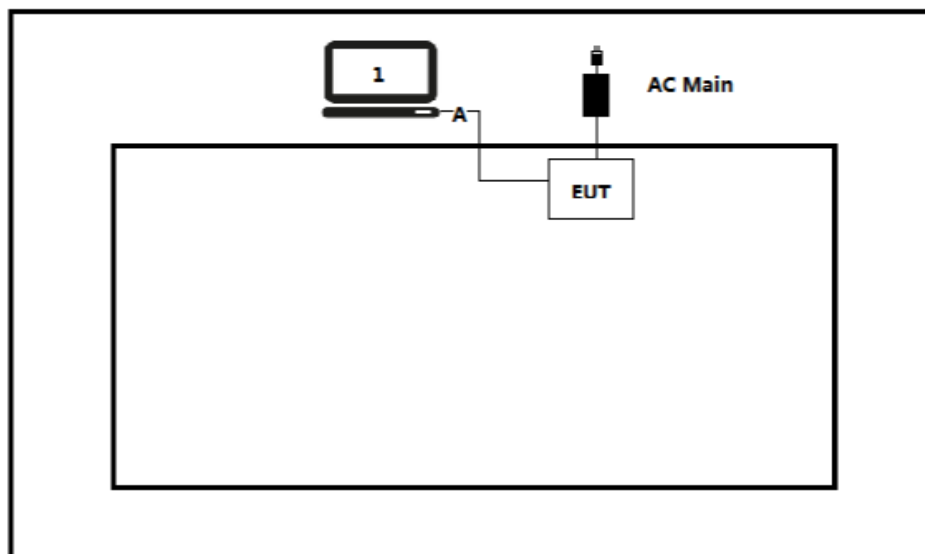

Test setup Diagram- Radiated test

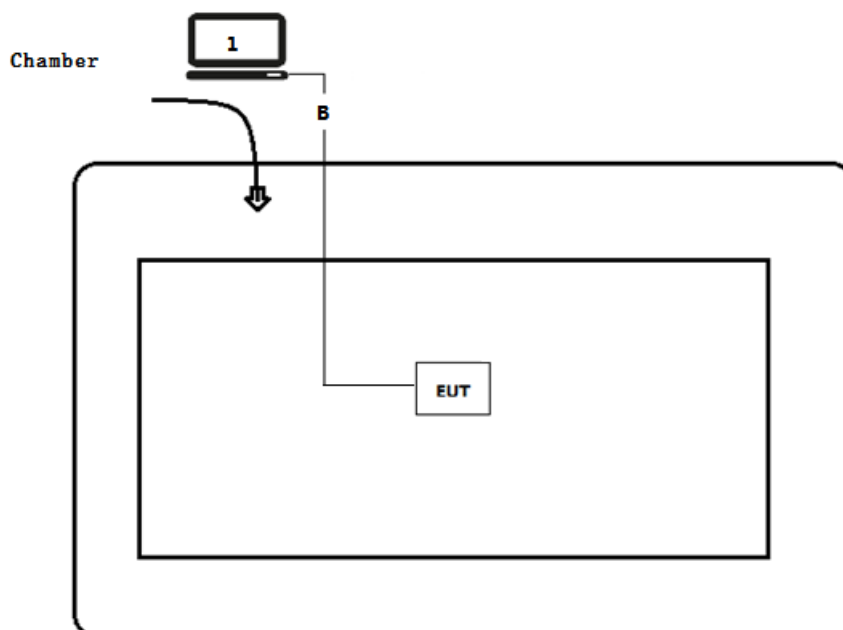

---

## 2.4 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Execute the HueApprobation Tool on the EUT
3	Configure the test mode, the test channel, and the data rate.
4	Press “Start Test” to start the continuous Transmitter.
5	Verify that the EUT works properly.

### 3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

#### 3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2019	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05	2017	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

#### 3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

*(Please define the deviations from the standard(s) if applicable)*



### 3.3 Overview of results

#### For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	N/A	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Radiated Emission Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

#### For ISSED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	N/A	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

---

### **3.4 Test Facility**

<b>USA</b>	<b>:</b>	<b>FCC Designation Number: CN1199</b>
<b>CA</b>	<b>:</b>	<b>ISED CAB identifier: CN0040</b>

## 4 TEST RESULTS

### 4.1 AC Power Line Conducted Emission

**VERDICT: PASS**

#### 4.1.1 Limit

**Standard**

FCC Part 15 Subpart C Paragraph 15.207

Frequency range [MHz]	Limit: QP [dB(μV) <sup>1)</sup> ]	Limit: AV [dB(μV) <sup>1)</sup> ]
0,15 - 0,50	66 - 56 <sup>2)</sup>	56 - 46 <sup>2)</sup>
0,50 - 5,0	56	46
5,0 - 30	60	50


<sup>1)</sup> At the transition frequency, the lower limit applies.

<sup>2)</sup> The limit decreases linearly with the logarithm of the frequency.

**NOTE 1:** The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

**NOTE 2:** Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

#### 4.1.2 Test Setup

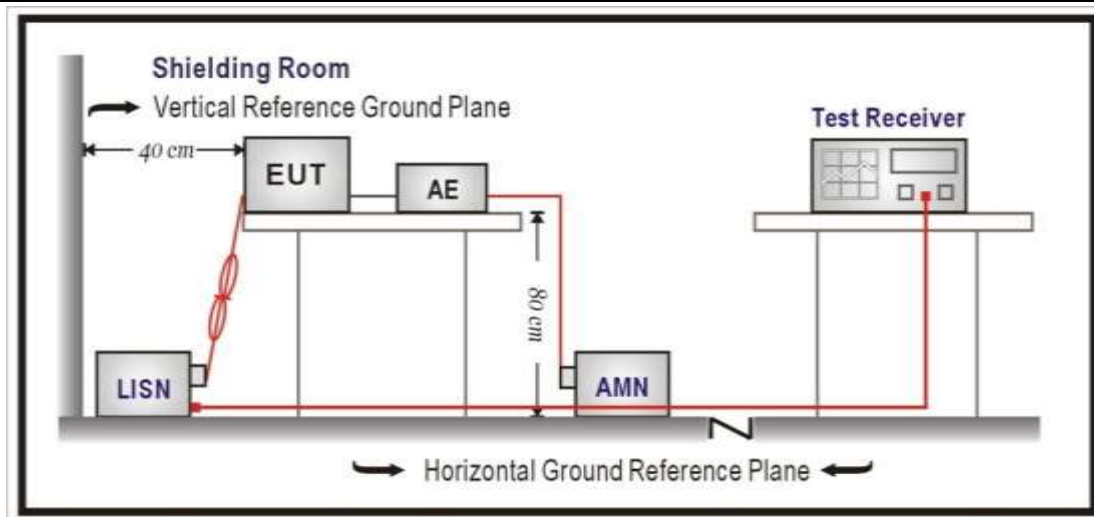


#### 4.1.3 Test Procedure

	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


#### 4.1.4 Test Data

Profile: 1992203R	Page No.: 5
Engineer: Cyan	
Site: TR1	Time: 2019/10/16 - 22:09
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1 Transmit by Zigbee	

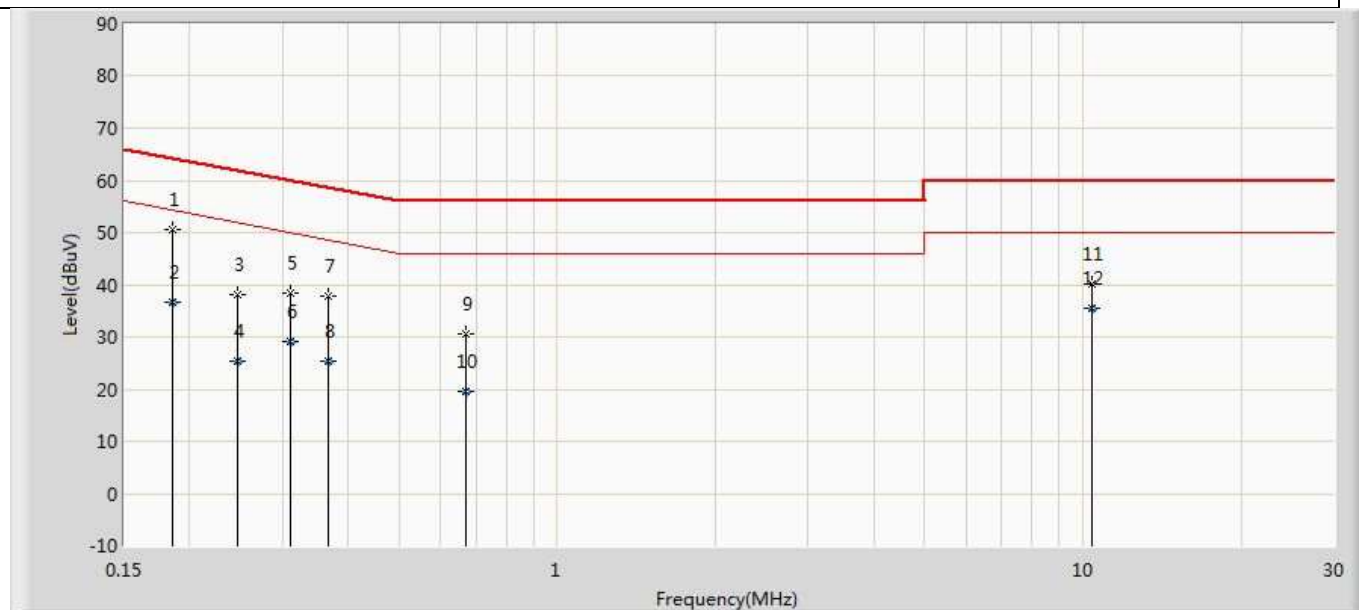

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1	*	0.186	50.627	41.014	-13.586	64.213	9.585	0.028	0.000	QP
2		0.186	36.616	27.003	-17.597	54.213	9.585	0.028	0.000	AV
3		0.246	38.136	28.513	-23.755	61.891	9.593	0.031	0.000	QP
4		0.246	25.289	15.665	-26.602	51.891	9.593	0.031	0.000	AV
5		0.310	38.378	28.747	-21.593	59.970	9.597	0.034	0.000	QP
6		0.310	29.158	19.526	-20.813	49.970	9.597	0.034	0.000	AV
7		0.366	37.703	28.066	-20.888	58.591	9.601	0.036	0.000	QP
8		0.366	25.219	15.582	-23.372	48.591	9.601	0.036	0.000	AV
9		0.670	30.594	20.927	-25.406	56.000	9.618	0.049	0.000	QP
10		0.670	19.469	9.802	-26.531	46.000	9.618	0.049	0.000	AV
11		10.380	40.185	30.144	-19.815	60.000	9.836	0.205	0.000	QP
12		10.380	35.374	25.333	-14.626	50.000	9.836	0.205	0.000	AV

Profile: 1992203R	Page No.: 6
Engineer: Cyan	
Site: TR1	Time: 2019/10/16 - 22:09
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1 Transmit by Zigbee	

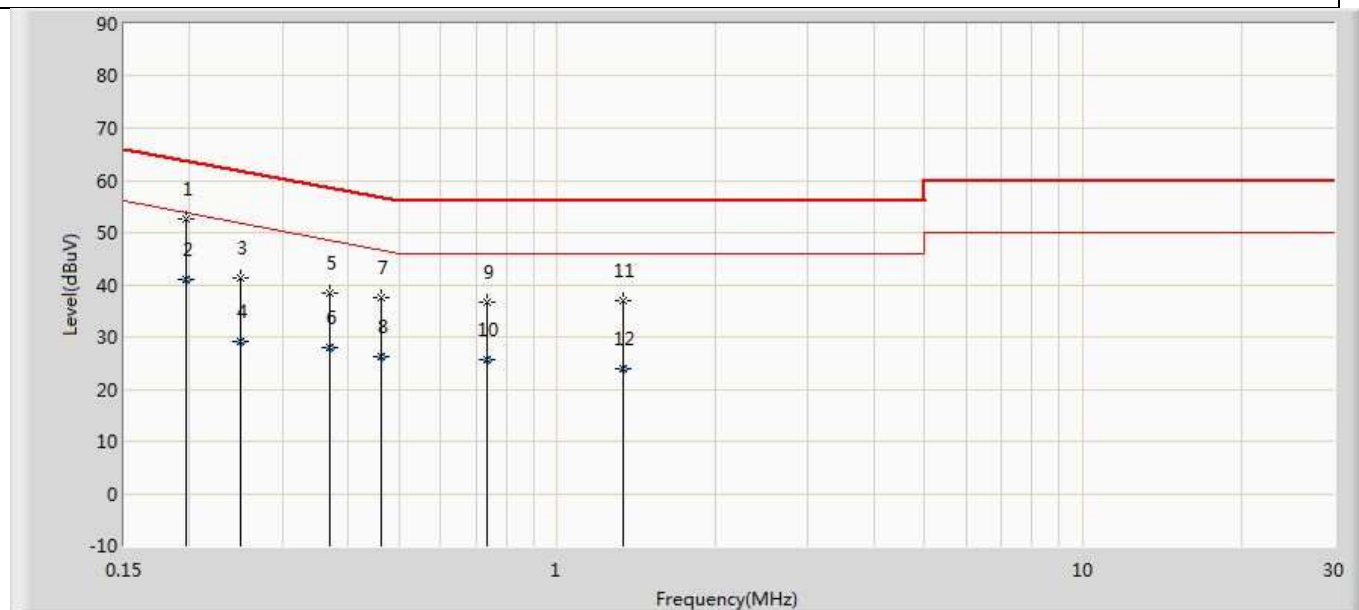

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1	*	0.197	52.701	43.085	-11.026	63.727	9.587	0.029	0.000	QP
2		0.197	40.923	31.307	-12.804	53.727	9.587	0.029	0.000	AV
3		0.250	41.419	31.795	-20.338	61.757	9.593	0.031	0.000	QP
4		0.250	29.026	19.402	-22.731	51.757	9.593	0.031	0.000	AV
5		0.370	38.298	28.660	-20.203	58.501	9.601	0.037	0.000	QP
6		0.370	27.883	18.245	-20.618	48.501	9.601	0.037	0.000	AV
7		0.462	37.524	27.876	-19.132	56.657	9.607	0.041	0.000	QP
8		0.462	26.204	16.556	-20.453	46.657	9.607	0.041	0.000	AV
9		0.734	36.724	27.052	-19.276	56.000	9.621	0.051	0.000	QP
10		0.734	25.774	16.102	-20.226	46.000	9.621	0.051	0.000	AV
11		1.334	36.999	27.300	-19.001	56.000	9.630	0.069	0.000	QP
12		1.334	23.988	14.288	-22.012	46.000	9.630	0.069	0.000	AV

## Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.

2. " \* ", means this data is the worst emission level.

3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

**4.2 Emissions in restricted frequency bands****VERDICT: PASS****4.2.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.207	
Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

## Restricted Band Emissions Limit

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 <sub>(Note 1)</sub>
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 <sub>(Note 1)</sub>
1.705 - 30	30	29.5	30 <sub>(Note 1)</sub>
30 - 88	100	40	3 <sub>(Note 2)</sub>
88 - 216	150	43.5	3 <sub>(Note 2)</sub>
216 - 960	200	46	3 <sub>(Note 2)</sub>
Above 960	500	54	3 <sub>(Note 2)</sub>


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

## 4.2.2 Test Setup


Below 30MHz Test Setup:

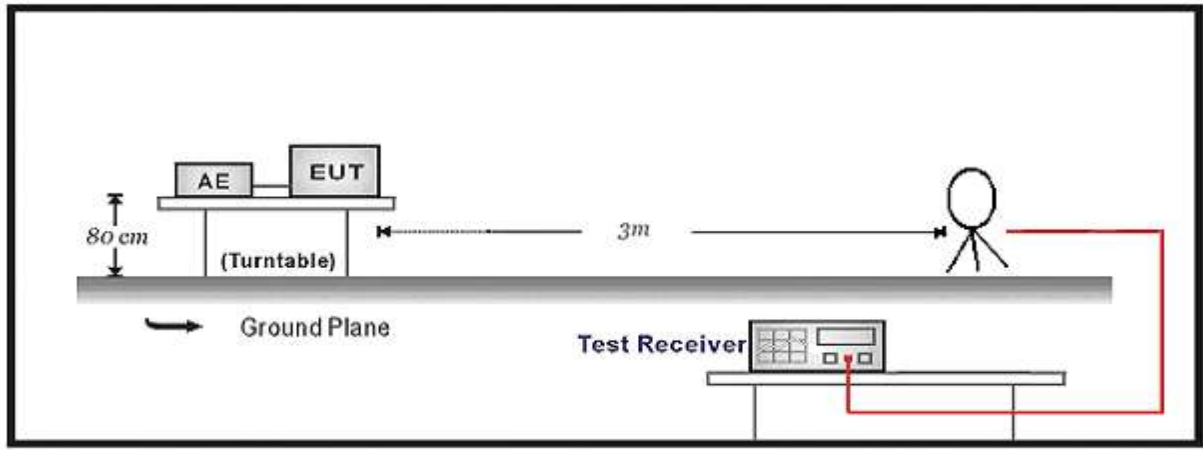

30MHz-1GHz Test Setup:

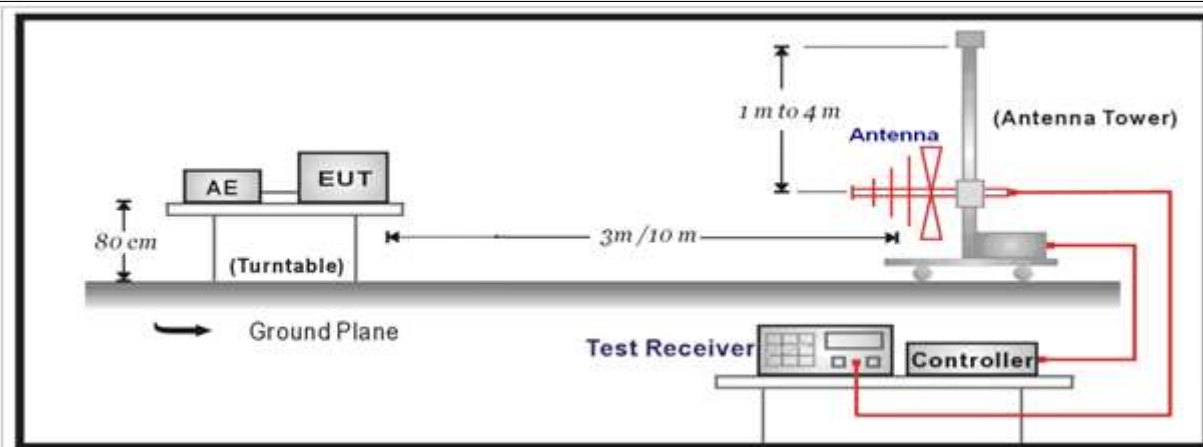

Above 1GHz Test Setup:

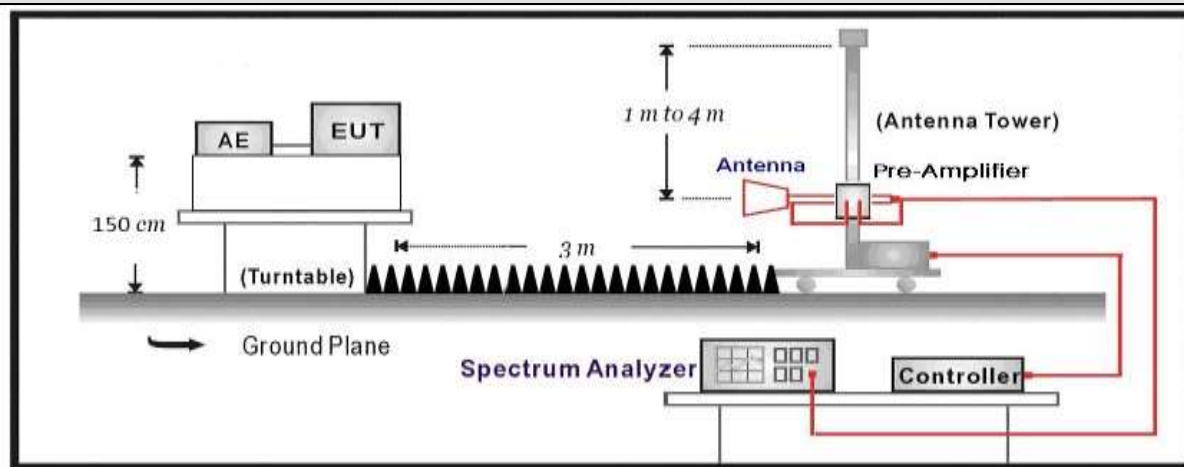




#### 4.2.3 Test Procedure

	References Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/>	ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	<input checked="" type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	<input checked="" type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

#### 4.2.4 Test Data


##### Murata:

Profile: 1992203R	Page No.: 71
Engineer: Pawn	
Site: AC5	Time: 2019/10/16 - 13:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

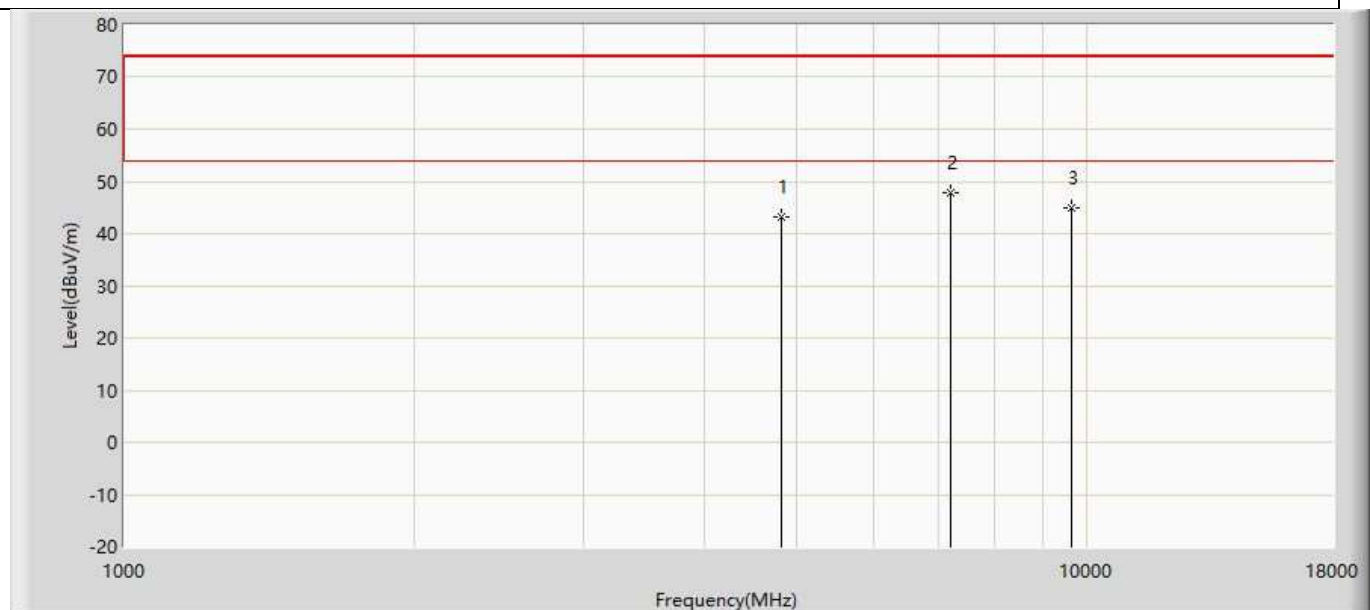


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	43.103	38.494	-30.897	74.000	4.609	PK
2	*	7215.000	47.968	39.939	-26.032	74.000	8.028	PK
3		9620.000	44.885	35.518	-29.115	74.000	9.367	PK

Profile: 1992203R	Page No.: 72
Engineer: Pawn	
Site: AC5	Time: 2019/10/16 - 13:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

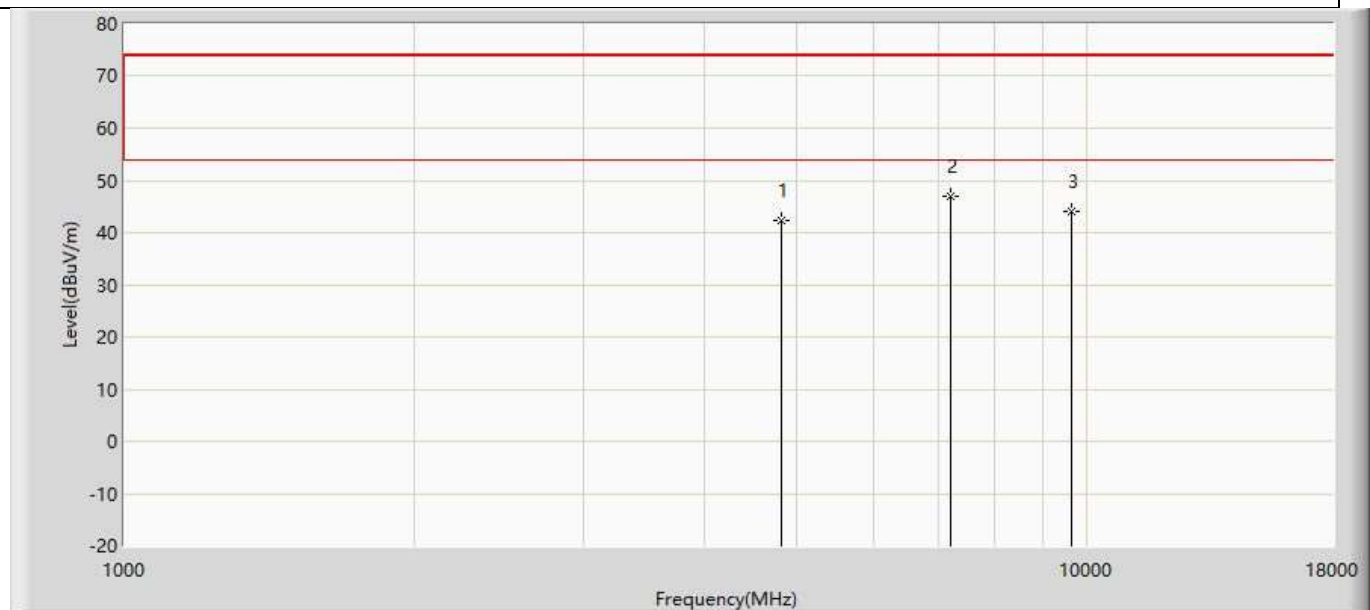


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	42.306	37.697	-31.694	74.000	4.609	PK
2	*	7215.000	46.998	38.969	-27.002	74.000	8.028	PK
3		9620.000	44.024	34.657	-29.976	74.000	9.367	PK

Profile: 1992203R	Page No.: 73
Engineer: Pawn	
Site: AC5	Time: 2019/10/16 - 13:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by Zigbee	

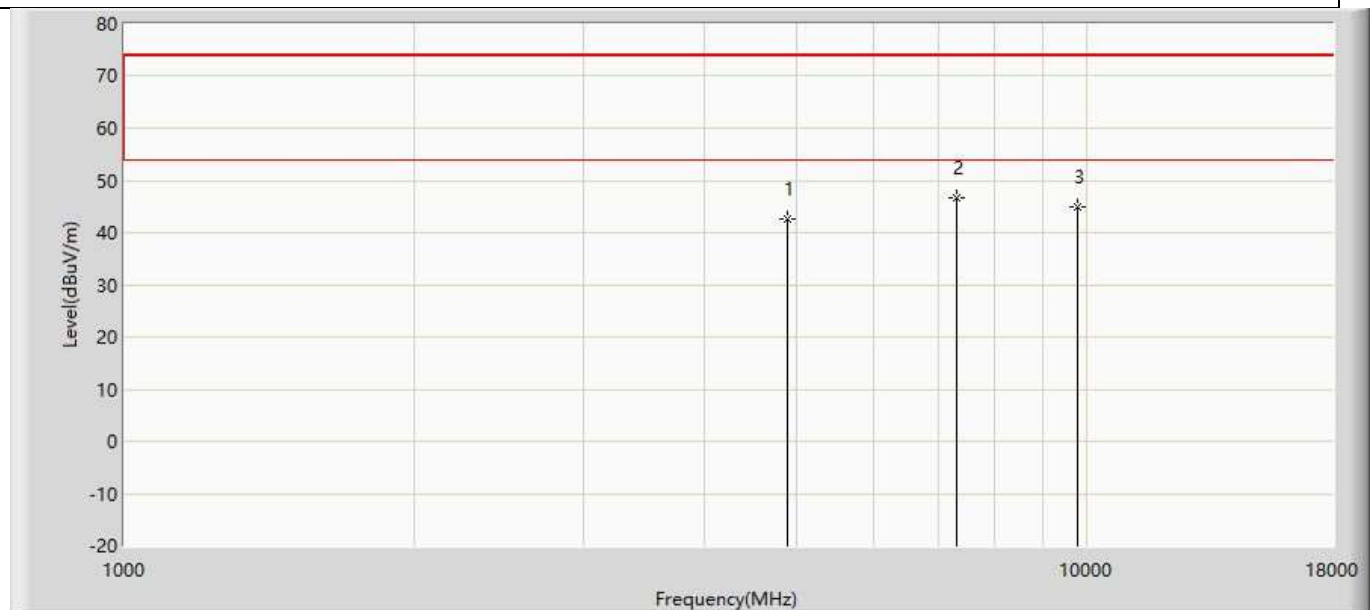


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	42.519	37.740	-31.481	74.000	4.778	PK
2	*	7320.000	46.691	38.621	-27.309	74.000	8.071	PK
3		9760.000	44.890	34.986	-29.110	74.000	9.904	PK

Profile: 1992203R	Page No.: 74
Engineer: Pawn	
Site: AC5	Time: 2019/10/16 - 13:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by Zigbee	

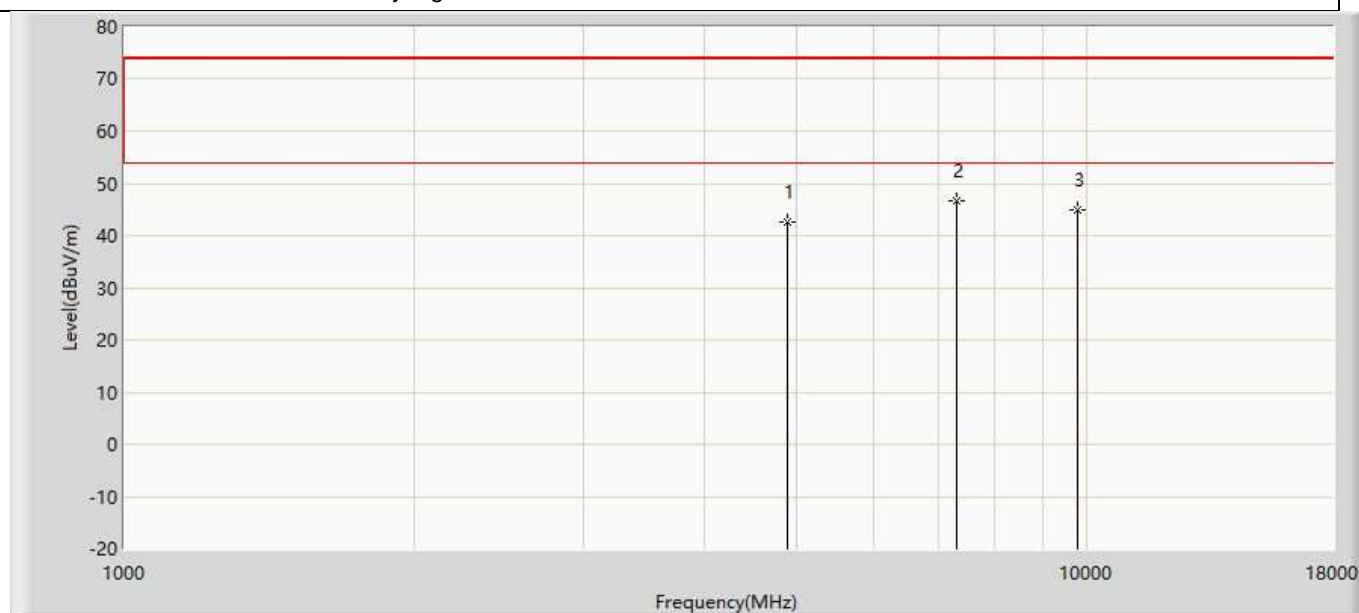


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	42.643	37.864	-31.357	74.000	4.778	PK
2	*	7320.000	46.572	38.502	-27.428	74.000	8.071	PK
3		9760.000	44.936	35.032	-29.064	74.000	9.904	PK

Profile: 1992203R	Page No.: 75
Engineer: Pawn	
Site: AC5	Time: 2019/10/16 - 13:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

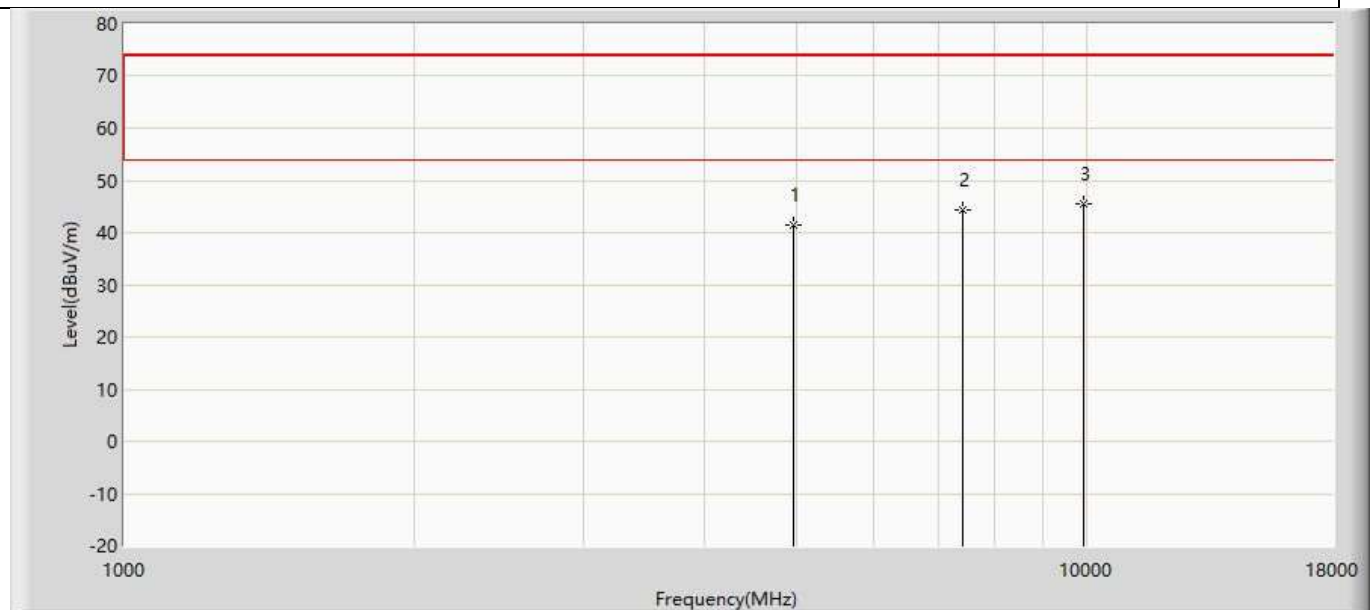

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.485	36.700	-32.515	74.000	4.784	PK
2		7440.000	44.261	36.210	-29.739	74.000	8.051	PK
3	*	9920.000	45.640	35.745	-28.360	74.000	9.894	PK


Profile: 1992203R	Page No.: 76
Engineer: Pawn	
Site: AC5	Time: 2019/10/16 - 13:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

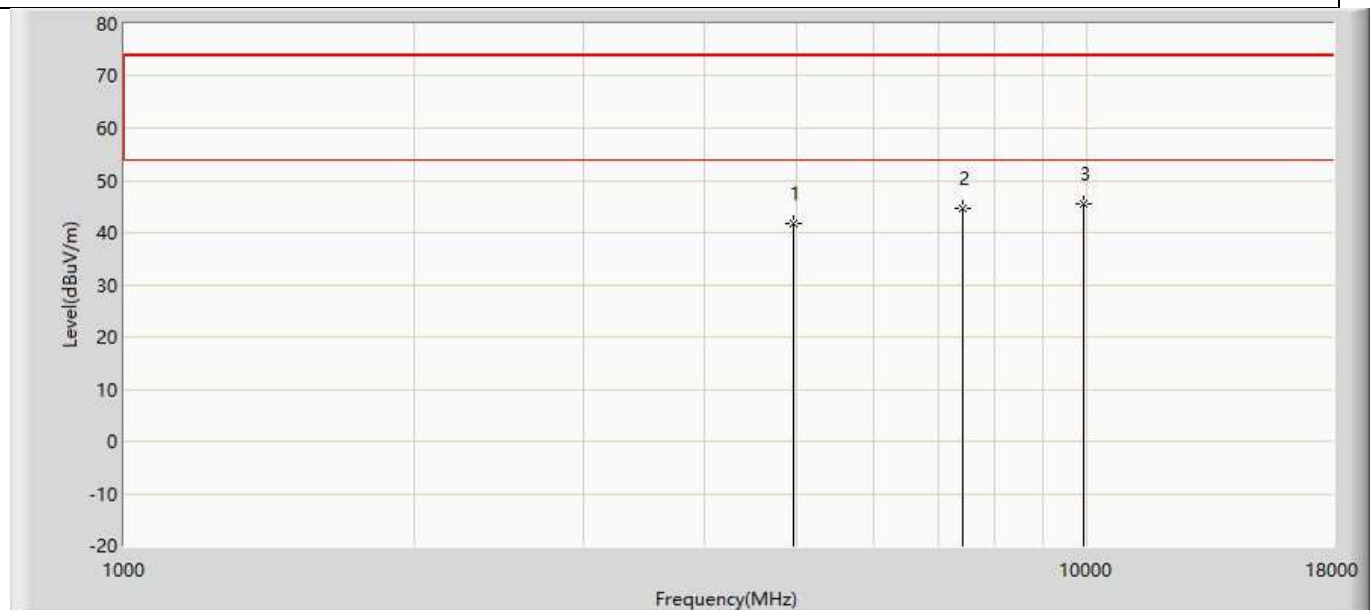

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.813	37.028	-32.187	74.000	4.784	PK
2		7440.000	44.660	36.609	-29.340	74.000	8.051	PK
3	*	9920.000	45.488	35.593	-28.512	74.000	9.894	PK

**KDS:**


Profile: 1992203R	Page No.: 41
Engineer: Pawn	
Site:	Time: 2019/10/16 - 15:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

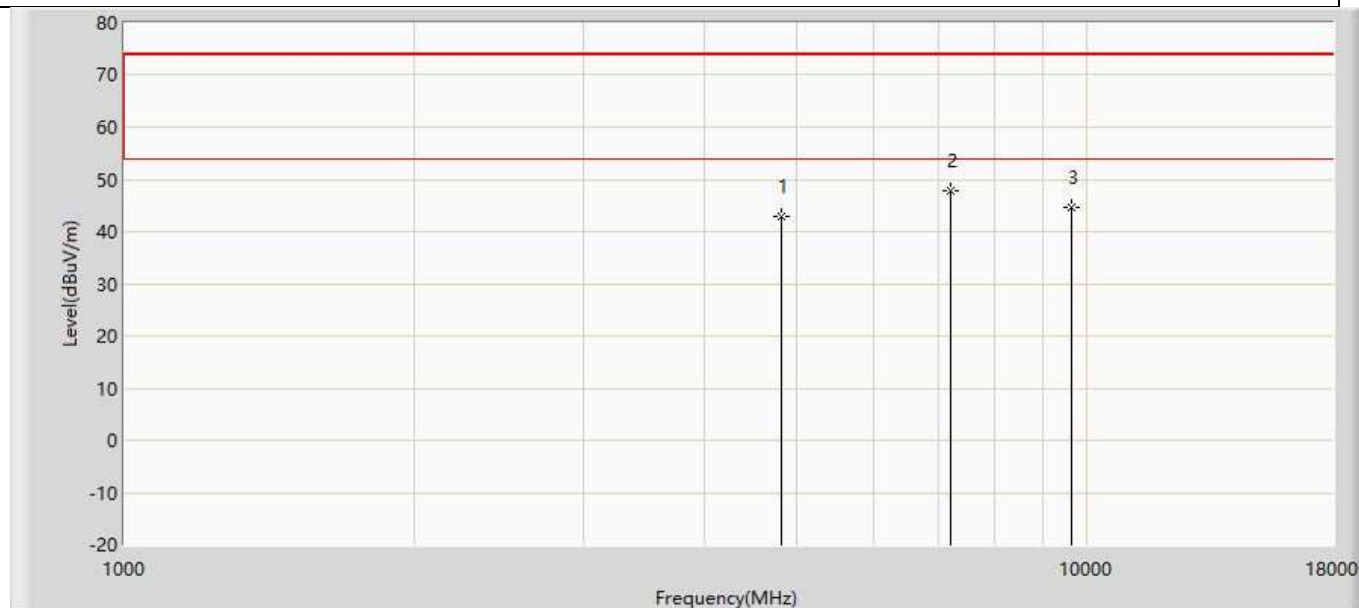

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	42.933	38.324	-31.067	74.000	4.609	PK
2	*	7215.000	47.821	39.792	-26.179	74.000	8.028	PK
3		9620.000	44.703	35.336	-29.297	74.000	9.367	PK




Profile: 1992203R	Page No.: 42
Engineer: Pawn	
Site:	Time: 2019/10/16 - 15:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

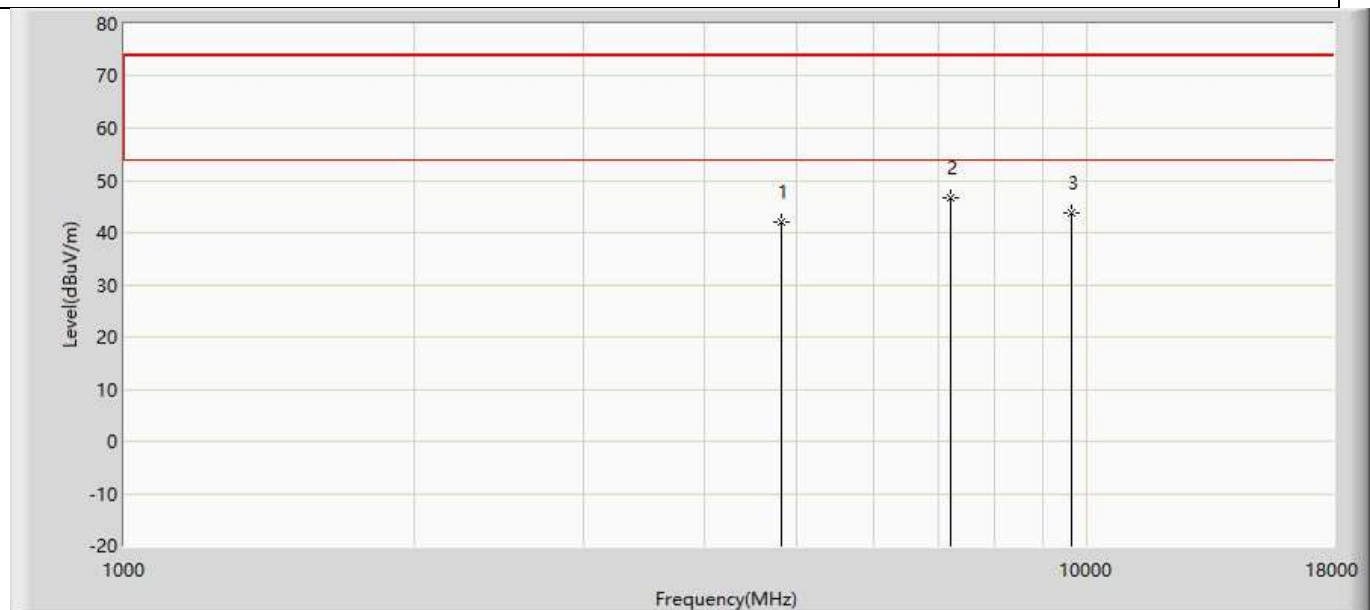


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	42.058	37.449	-31.942	74.000	4.609	PK
2	*	7215.000	46.793	38.764	-27.207	74.000	8.028	PK
3		9620.000	43.809	34.442	-30.191	74.000	9.367	PK

Profile: 1992203R	Page No.: 43
Engineer: Pawn	
Site:	Time: 2019/10/16 - 15:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2440MHz by Zigbee	

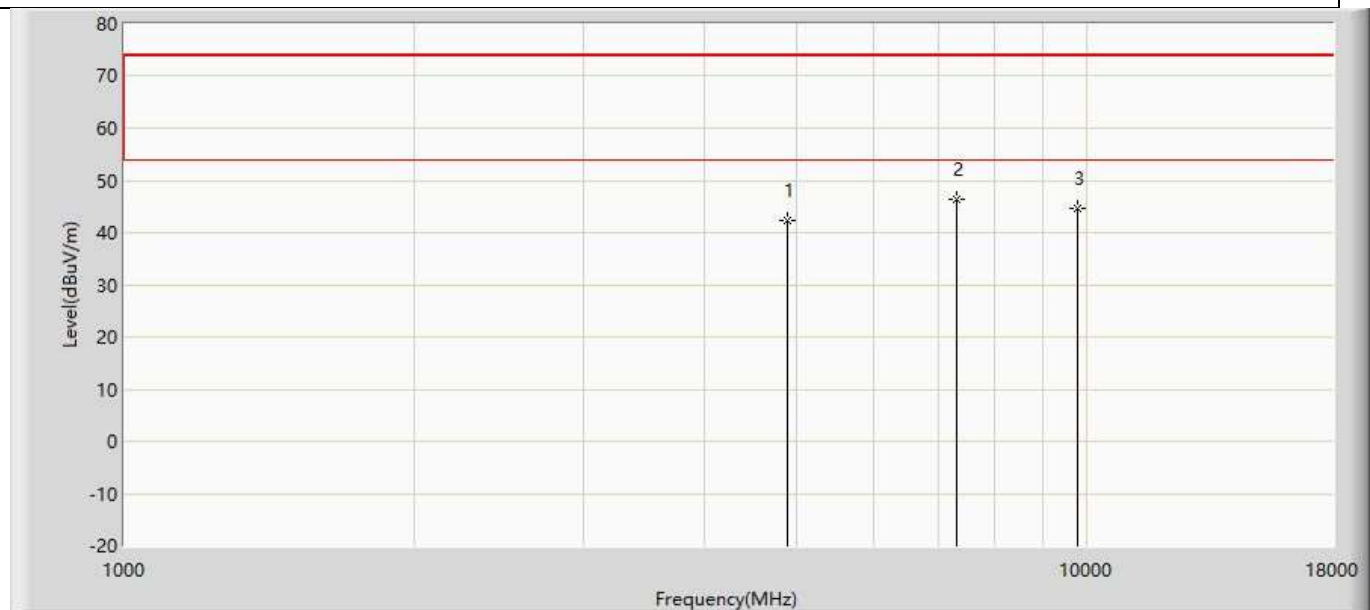


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	42.371	37.592	-31.629	74.000	4.778	PK
2	*	7320.000	46.502	38.432	-27.498	74.000	8.071	PK
3		9760.000	44.583	34.679	-29.417	74.000	9.904	PK

Profile: 1992203R	Page No.: 44
Engineer: Pawn	
Site:	Time: 2019/10/16 - 15:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2440MHz by Zigbee	

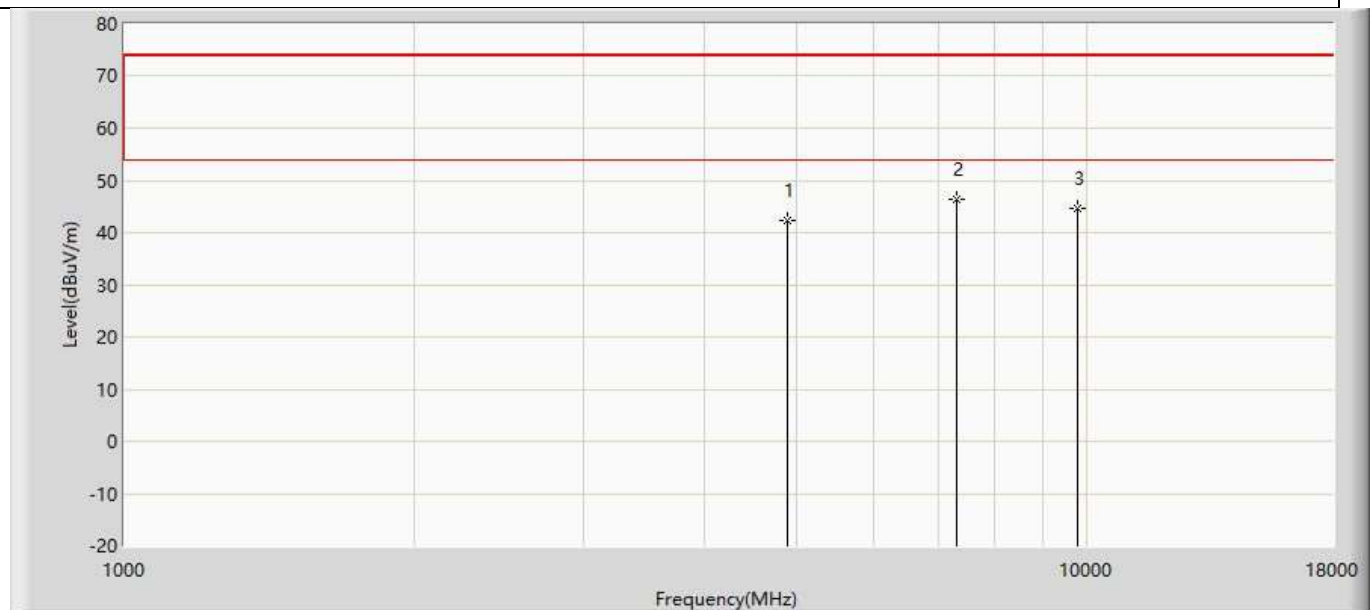


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	42.365	37.586	-31.635	74.000	4.778	PK
2	*	7320.000	46.468	38.398	-27.532	74.000	8.071	PK
3		9760.000	44.686	34.782	-29.314	74.000	9.904	PK

Profile: 1992203R	Page No.: 45
Engineer: Pawn	
Site:	Time: 2019/10/16 - 15:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

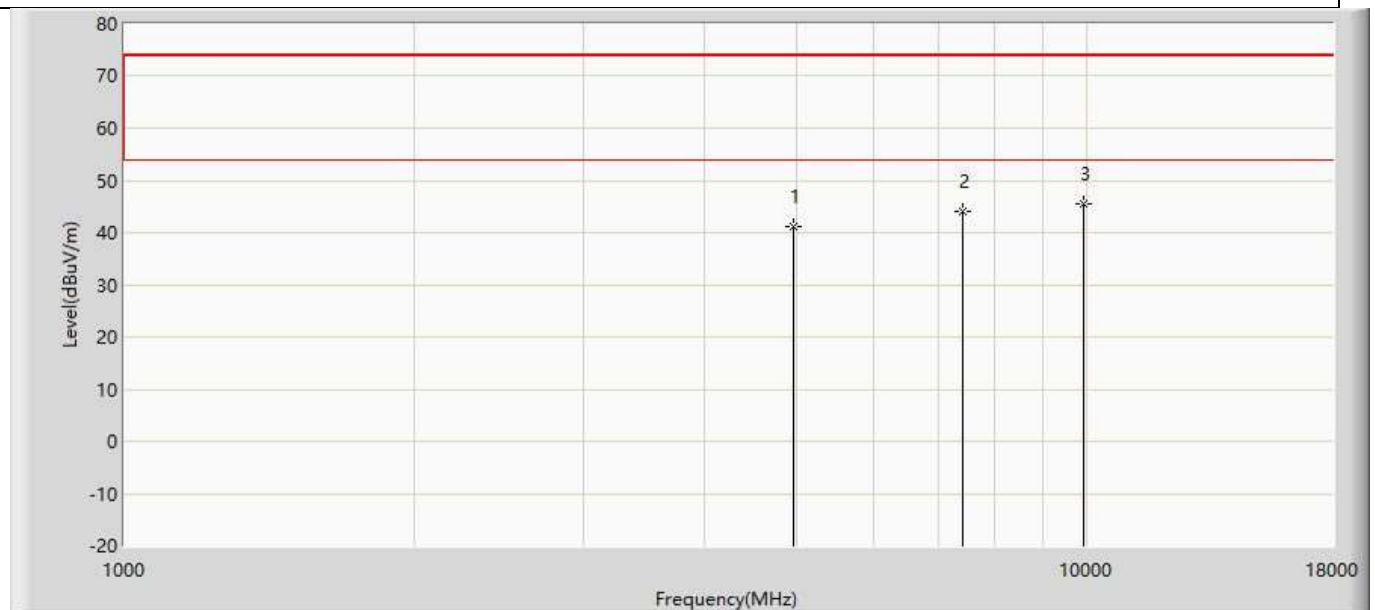

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.133	36.348	-32.867	74.000	4.784	PK
2		7440.000	43.944	35.893	-30.056	74.000	8.051	PK
3	*	9920.000	45.544	35.649	-28.456	74.000	9.894	PK


Profile: 1992203R	Page No.: 46
Engineer: Pawn	
Site:	Time: 2019/10/16 - 15:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

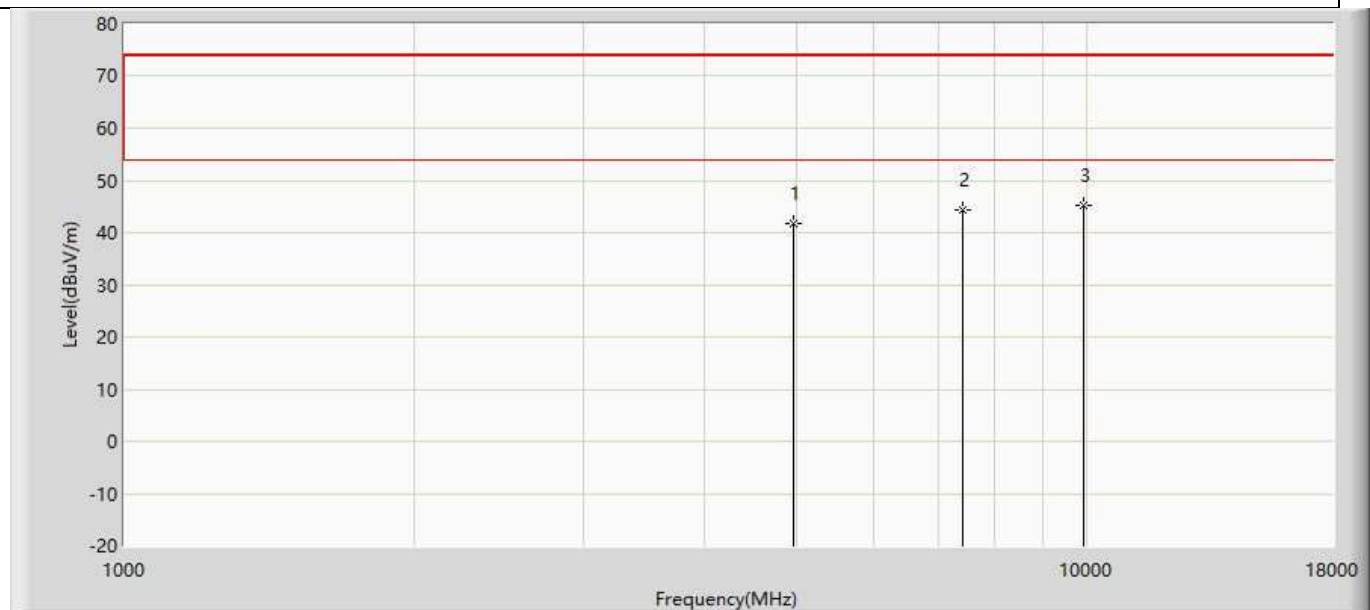

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.723	36.938	-32.277	74.000	4.784	PK
2		7440.000	44.435	36.384	-29.565	74.000	8.051	PK
3	*	9920.000	45.236	35.341	-28.764	74.000	9.894	PK


### The worst case of Radiated Emission below 1GHz:

Profile: 1992203R	Page No.: 1
Engineer: Cyan	
Site: AC3	Time: 2019/05/09 - 21:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1 Transmit by Zigbee	

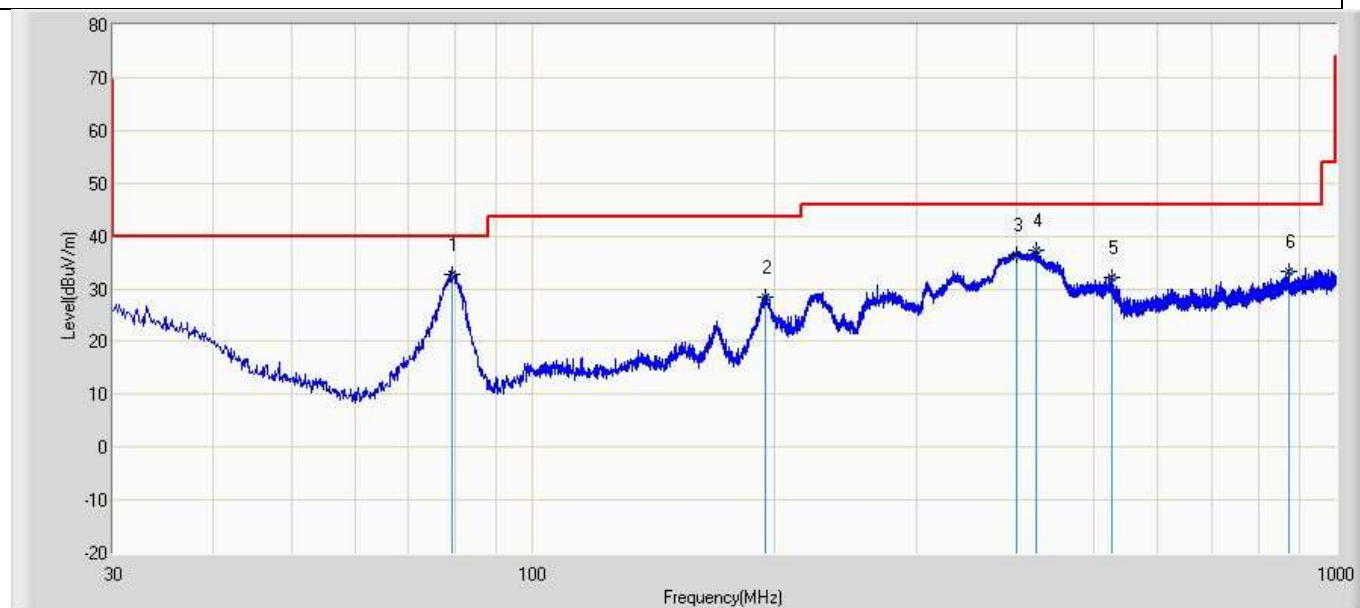

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	79.470	32.779	19.854	-7.221	40.000	12.925	QP
2		194.415	28.489	11.002	-15.011	43.500	17.488	QP
3		400.661	36.579	11.241	-9.421	46.000	25.338	QP
4		422.799	37.282	9.988	-8.718	46.000	27.295	QP
5		525.549	32.196	4.847	-13.804	46.000	27.349	QP
6		874.870	33.323	2.113	-12.677	46.000	31.210	QP

Profile: 1992203R	Page No.: 2
Engineer: Cyan	
Site: AC3	Time: 2019/10/17 - 00:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 2	

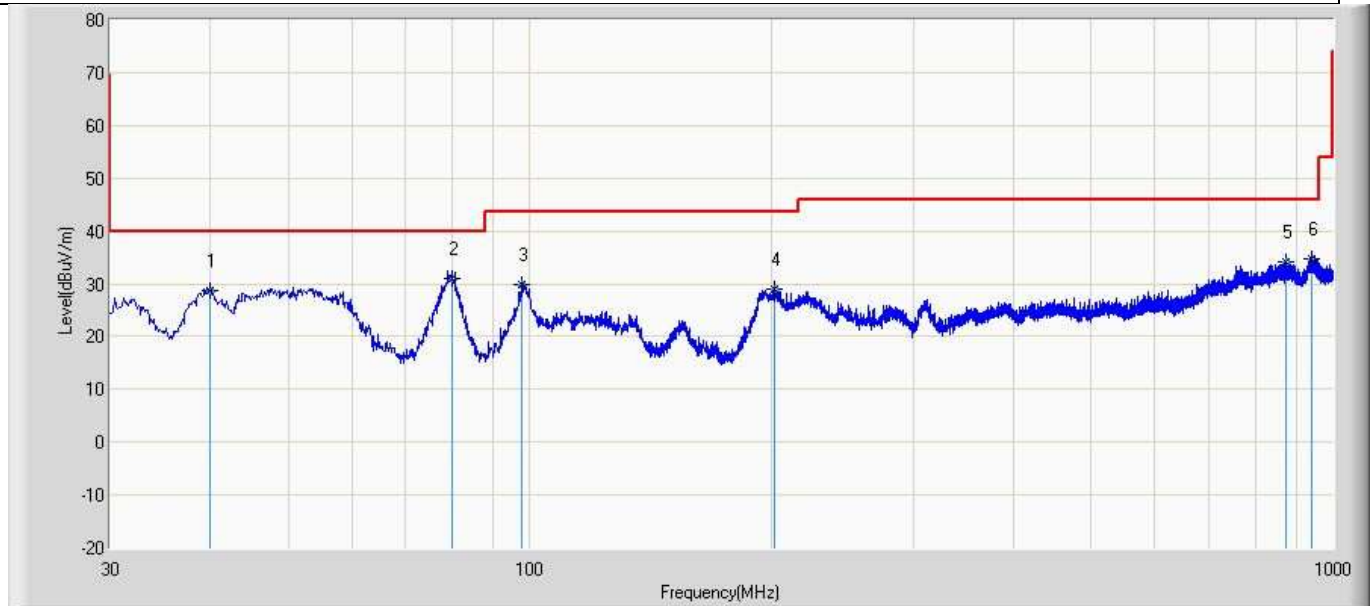

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		39.943	28.767	9.887	-11.233	40.000	18.880	QP
2	*	79.955	30.974	15.654	-9.026	40.000	15.320	QP
3		97.779	29.769	8.540	-13.731	43.500	21.229	QP
4		201.690	29.079	6.411	-14.421	43.500	22.668	QP
5		874.143	34.019	1.111	-11.981	46.000	32.908	QP
6		942.406	34.845	0.544	-11.155	46.000	34.301	QP

## Note:


1. " \* ", means this data is the worst emission level.
2. Measured Level = Reading Level + Factor.
3. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
5. As the radiated emission was performed, so conducted emission was not tested.

**4.3 Emissions in non-restricted frequency band****VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

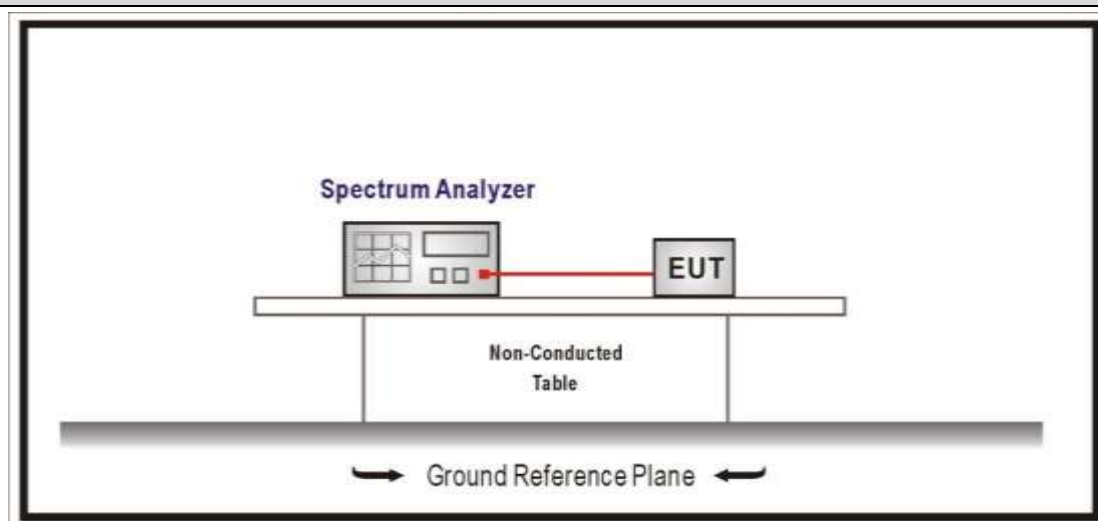**4.3.2 Test Setup****4.3.3 Test Procedure**


References Rule	Chapter	Description
<input checked="" type="checkbox"/> ANSI C63.10	11.11	Emissions in non-restricted frequency bands
<input checked="" type="checkbox"/> ANSI C63.10	11.11.1	General
<input checked="" type="checkbox"/> ANSI C63.10	11.11.2	Reference level measurement
<input checked="" type="checkbox"/> ANSI C63.10	11.11.3	Emission level measurement




#### 4.3.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
Mode 1	11	2405	0.525	2400	-50.346	50.87	>20	Pass
	26	2480	-0.207	2500	-61.043	60.84	>20	Pass

Mode 1 CH11(2405MHz)

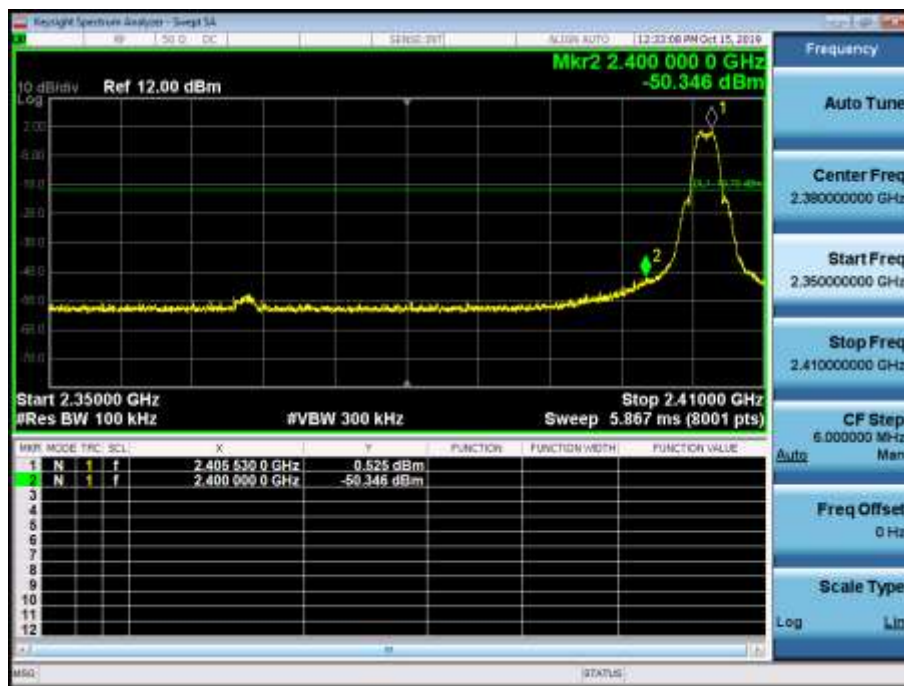

Mode 1 CH26(2480MHz)

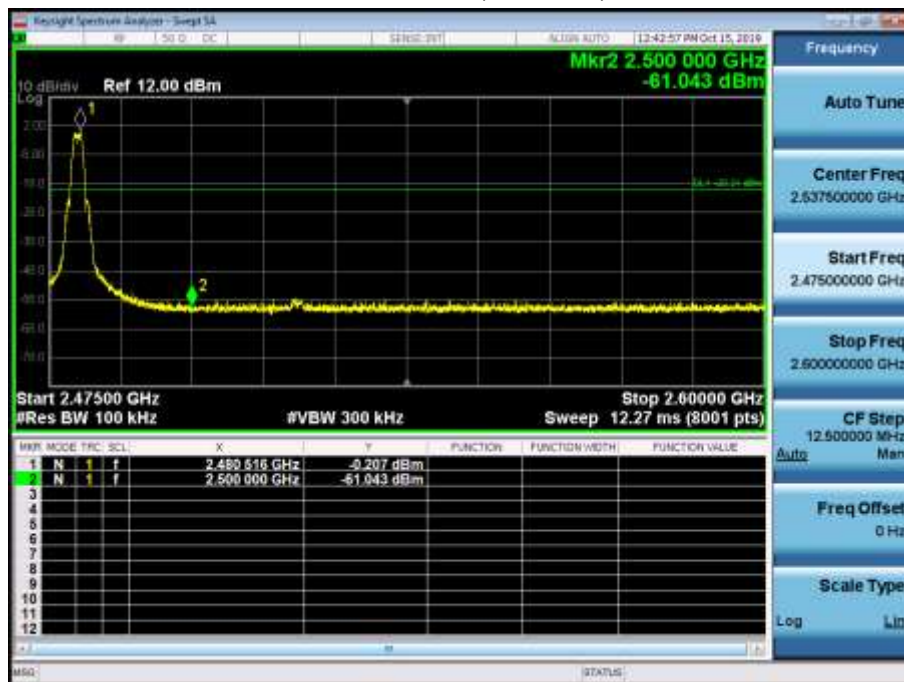


#### 4.4 Duty cycle

VERDICT: N/A

##### 4.4.1 Limit

N/A

##### 4.4.2 Test Setup

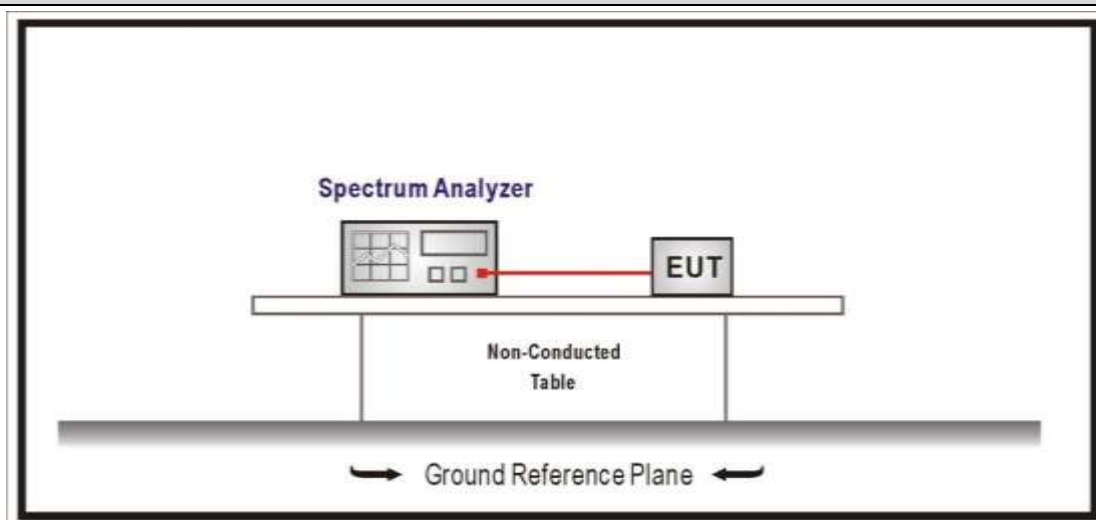

##### 4.4.3 Test Procedure

References Rule	Chapter	Description
<input checked="" type="checkbox"/> ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


#### 4.4.4 Test Data

Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle
Mode 1	N/A	N/A	10	N/A	100%

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set:  $VBW \geq 1/T$  will be used.

Mode 1

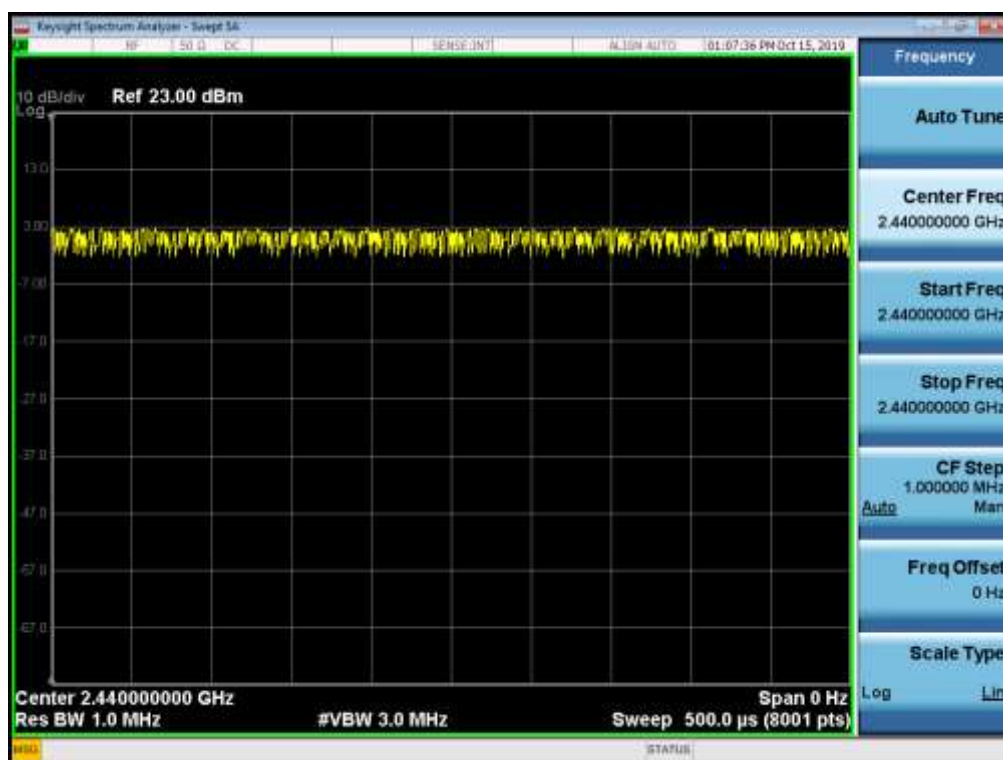


**4.5 Radiated Emission Band Edge****VERDICT: PASS****4.5.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dB $\mu$ V/m)	RBW (MHz)	Distance (m)
2310-2390 2483.5-2500	PK	74	1	3
	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

**4.5.2 Test Setup**

Above 1GHz Test Setup:

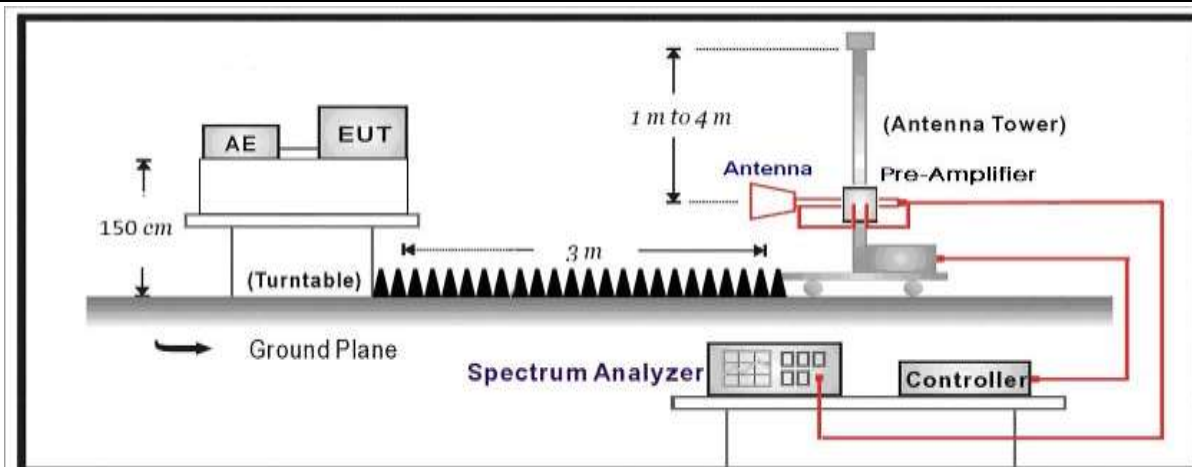
**4.5.3 Test Procedure**

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
<input checked="" type="checkbox"/>	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
<input type="checkbox"/>	ANSI C63.10	6.10.6	Marker-delta method
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
<input checked="" type="checkbox"/>	ANSI C63.10	11.12.1	Radiated emission measurements
<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.7	Radiated spurious emission test
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

#### 4.5.4 Test Data


##### Murata:

Profile: 1992203R	Page No.: 1
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

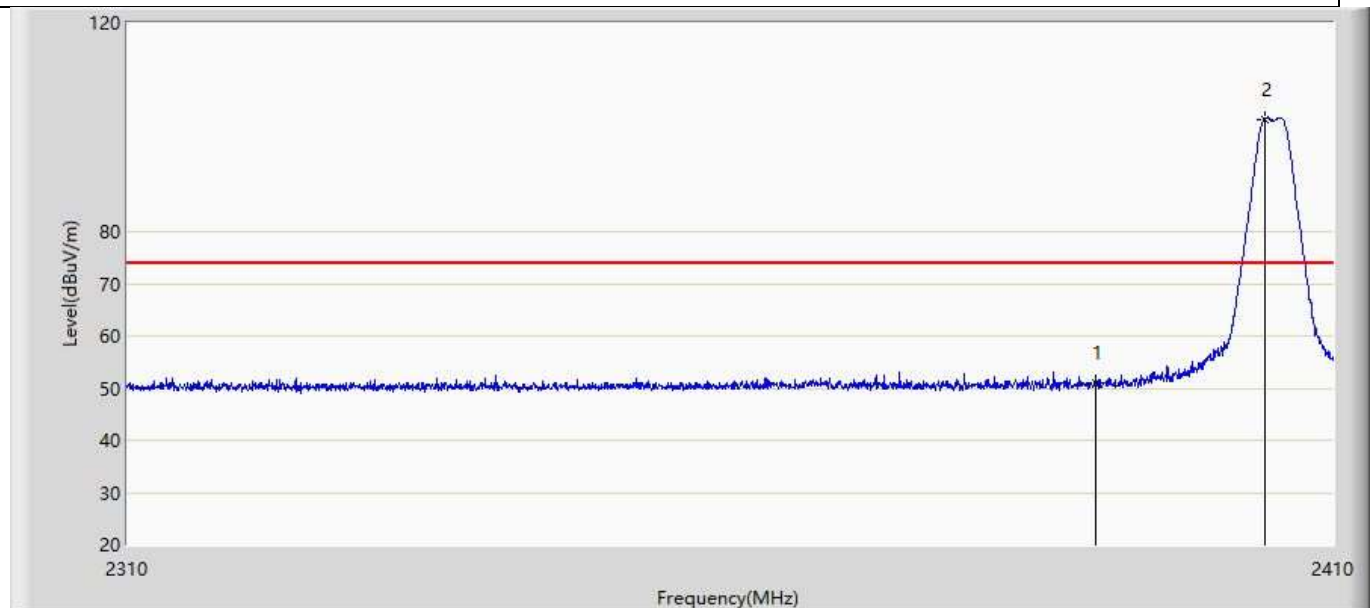


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.950	15.493	-23.050	74.000	35.458	PK
2	*	2404.200	101.591	66.119	N/A	N/A	35.472	PK

Profile: 1992203R	Page No.: 2
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

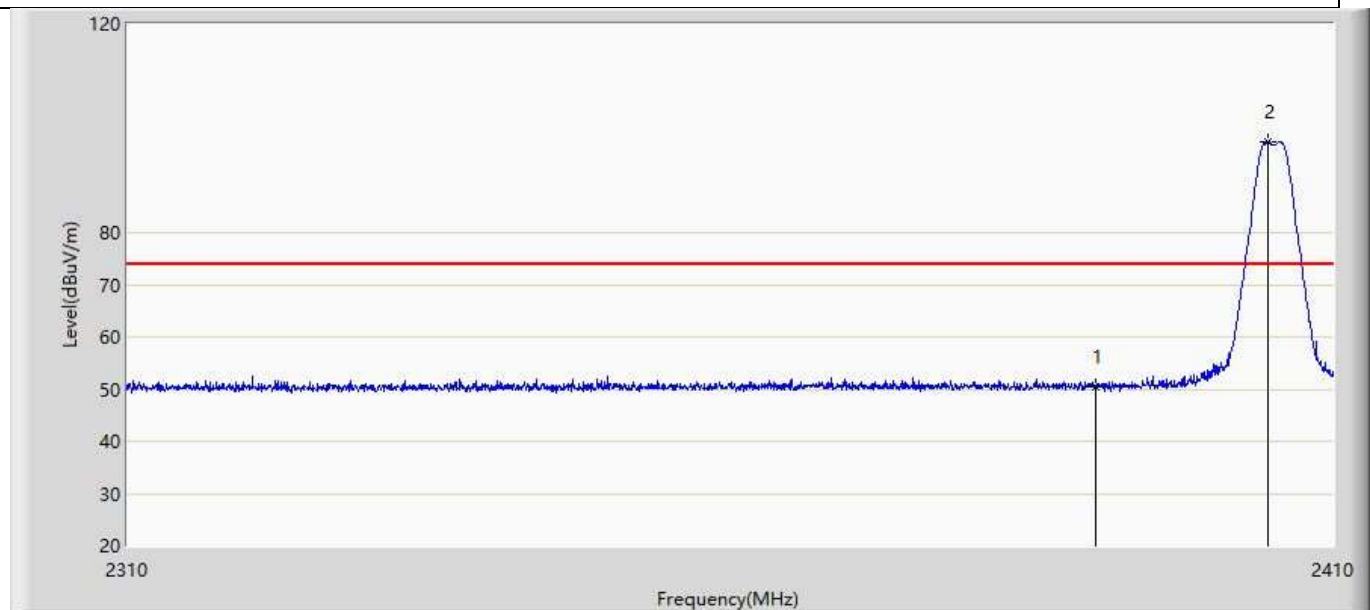


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.463	15.006	-23.537	74.000	35.458	PK
2	*	2404.500	97.433	61.961	N/A	N/A	35.472	PK

Profile: 1992203R	Page No.: 3
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

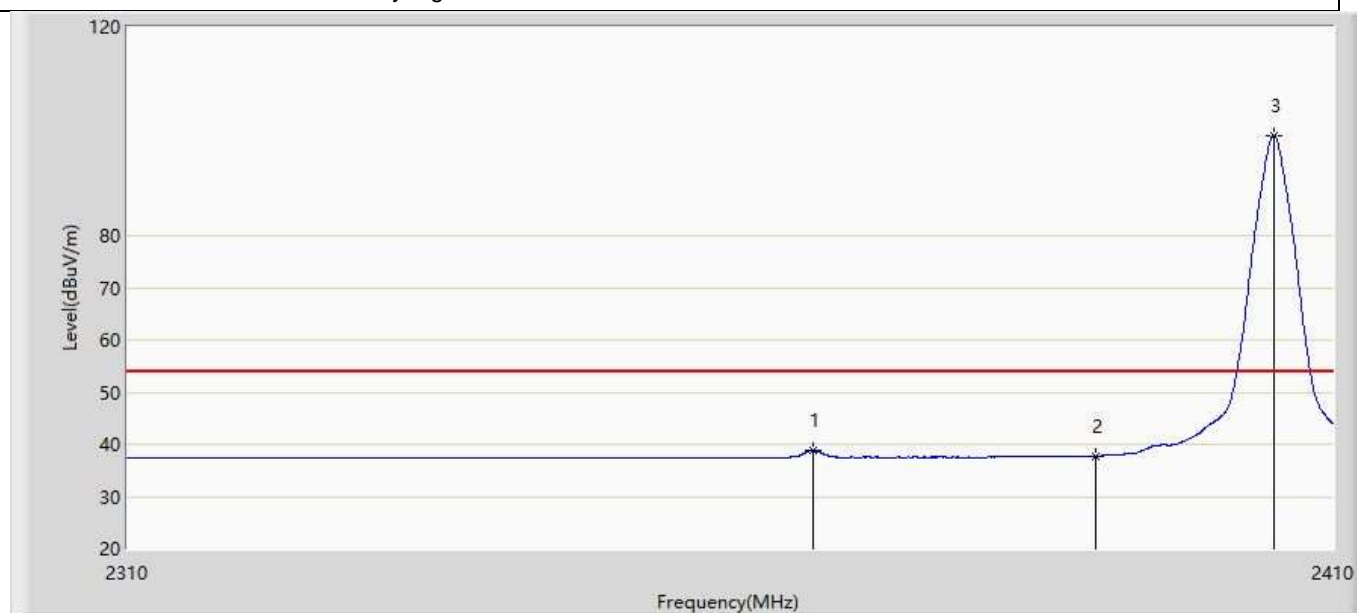

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2366.400	38.792	3.350	-15.208	54.000	35.442	AV
2		2390.000	37.787	2.330	-16.213	54.000	35.458	AV
3	*	2405.000	99.096	63.623	N/A	N/A	35.473	AV


Profile: 1992203R	Page No.: 4
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

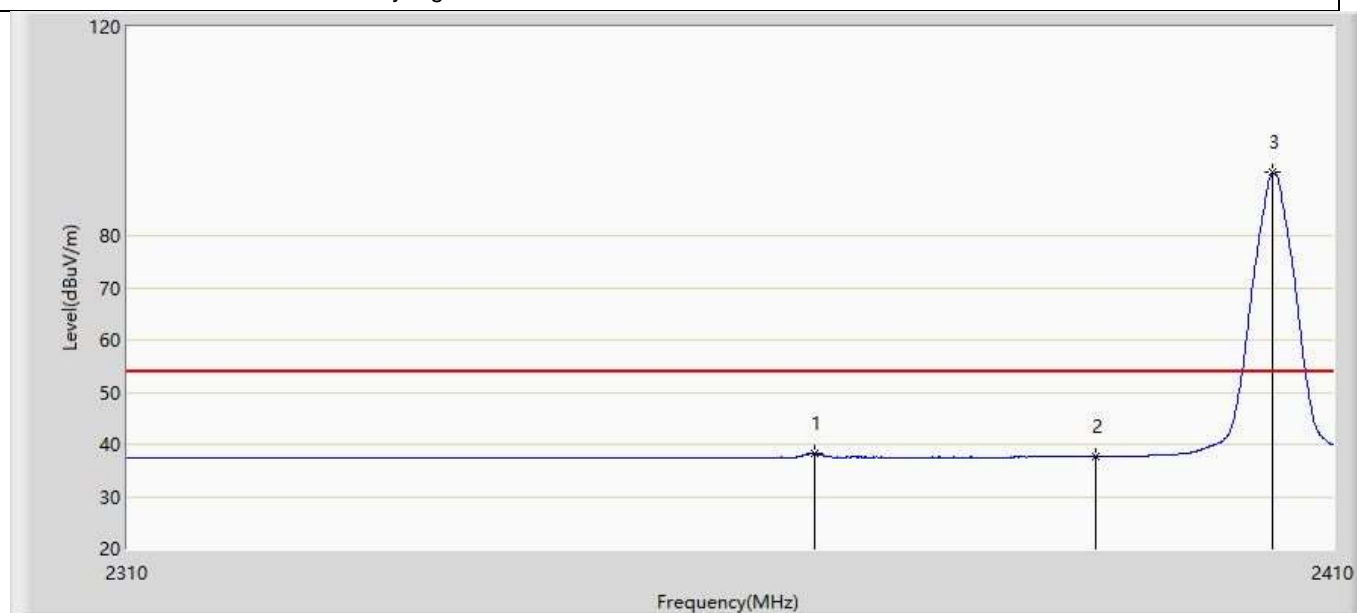

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2366.550	38.233	2.791	-15.767	54.000	35.442	AV
2		2390.000	37.594	2.137	-16.406	54.000	35.458	AV
3	*	2404.900	92.293	56.820	N/A	N/A	35.473	AV




Profile: 1992203R	Page No.: 5
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

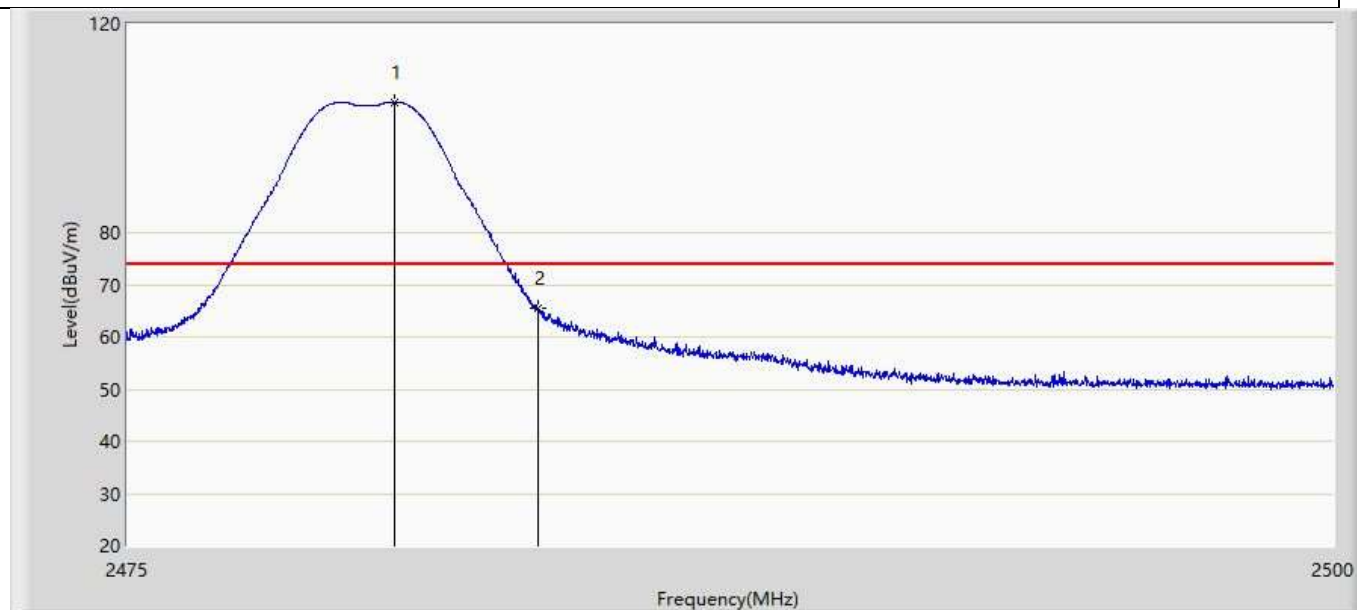


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.525	105.021	69.520	N/A	N/A	35.500	PK
2		2483.500	65.631	30.113	-8.369	74.000	35.517	PK

Profile: 1992203R	Page No.: 6
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

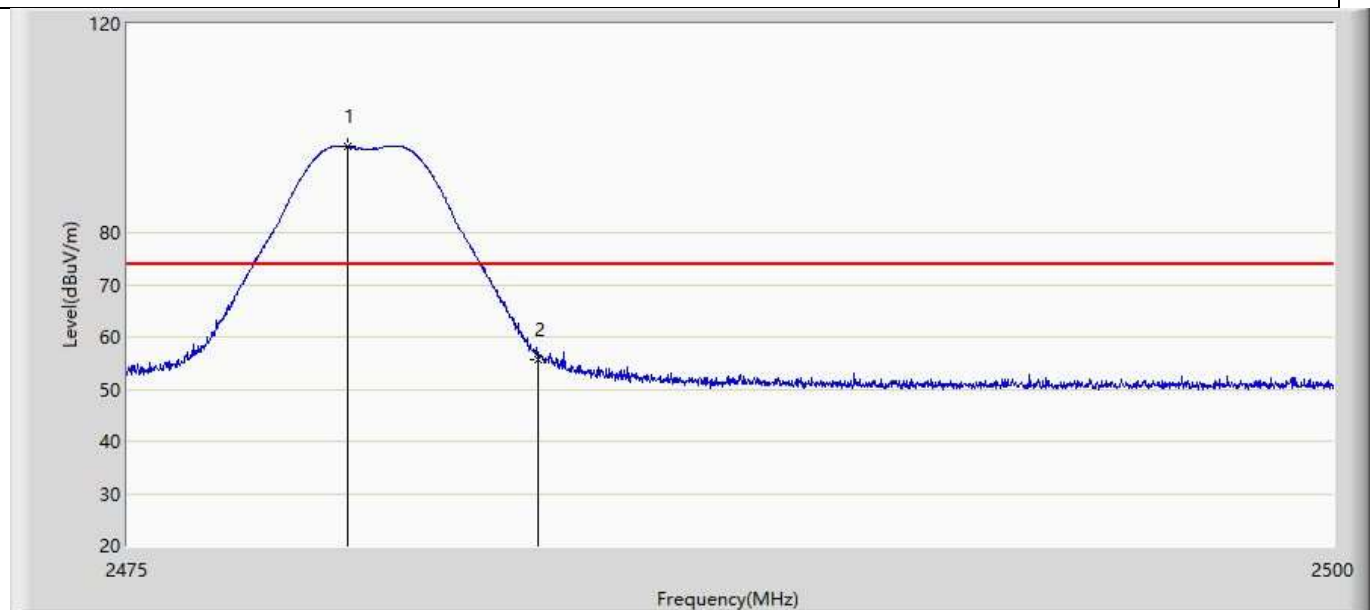


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.562	96.527	61.032	N/A	N/A	35.496	PK
2		2483.500	55.743	20.225	-18.257	74.000	35.517	PK

Profile: 1992203R	Page No.: 7
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

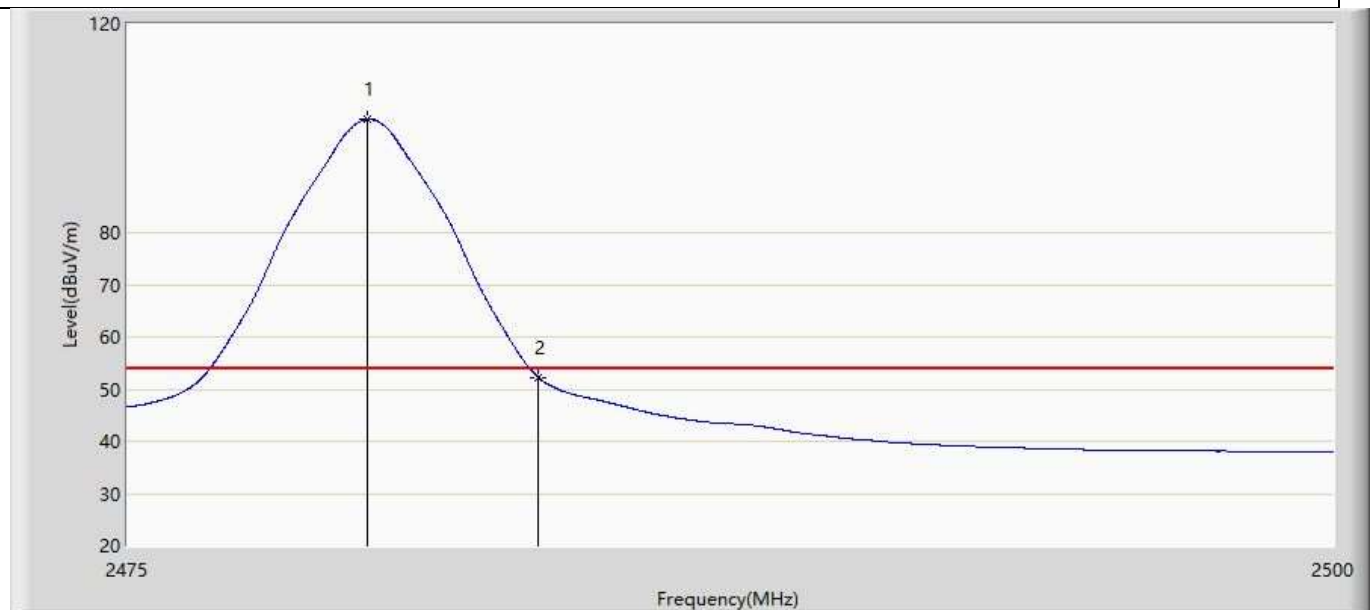

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.975	101.673	66.175	N/A	N/A	35.498	AV
2		2483.500	52.237	16.719	-1.763	54.000	35.517	AV


Profile: 1992203R	Page No.: 8
Engineer: Pawn	
Site: AC5	Time: 2019/10/12 - 10:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

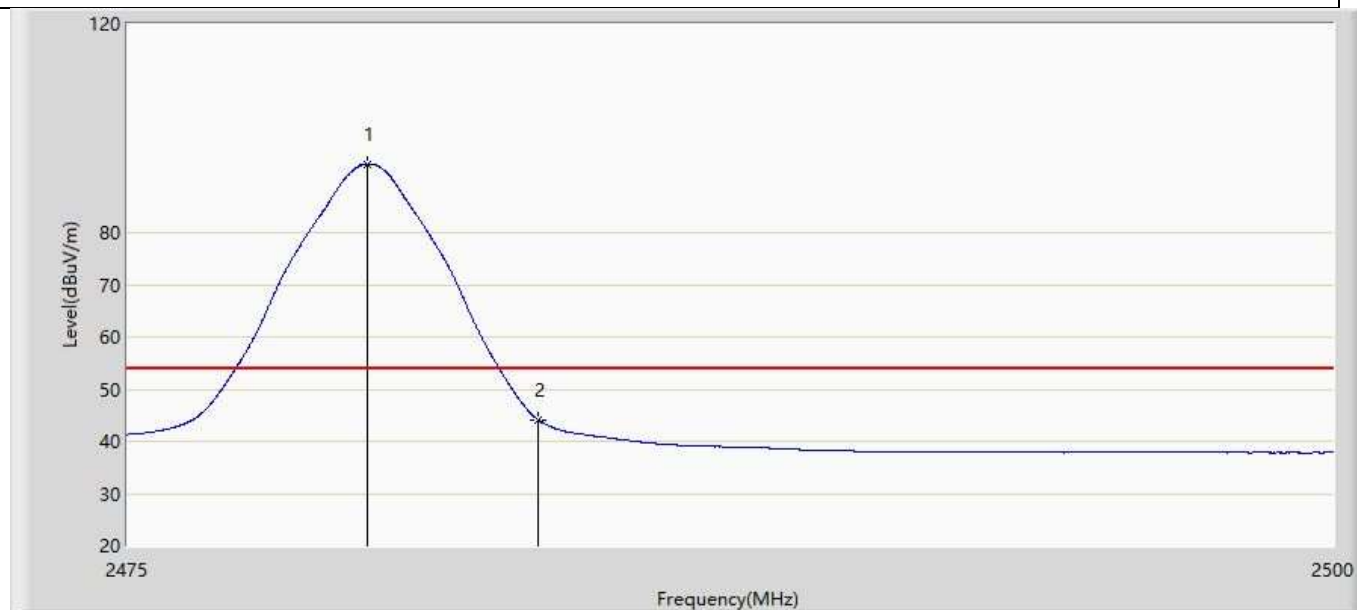

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.975	93.176	57.678	N/A	N/A	35.498	AV
2		2483.500	44.118	8.600	-9.882	54.000	35.517	AV


**KDS:**

Profile: 1992203R	Page No.: 1
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

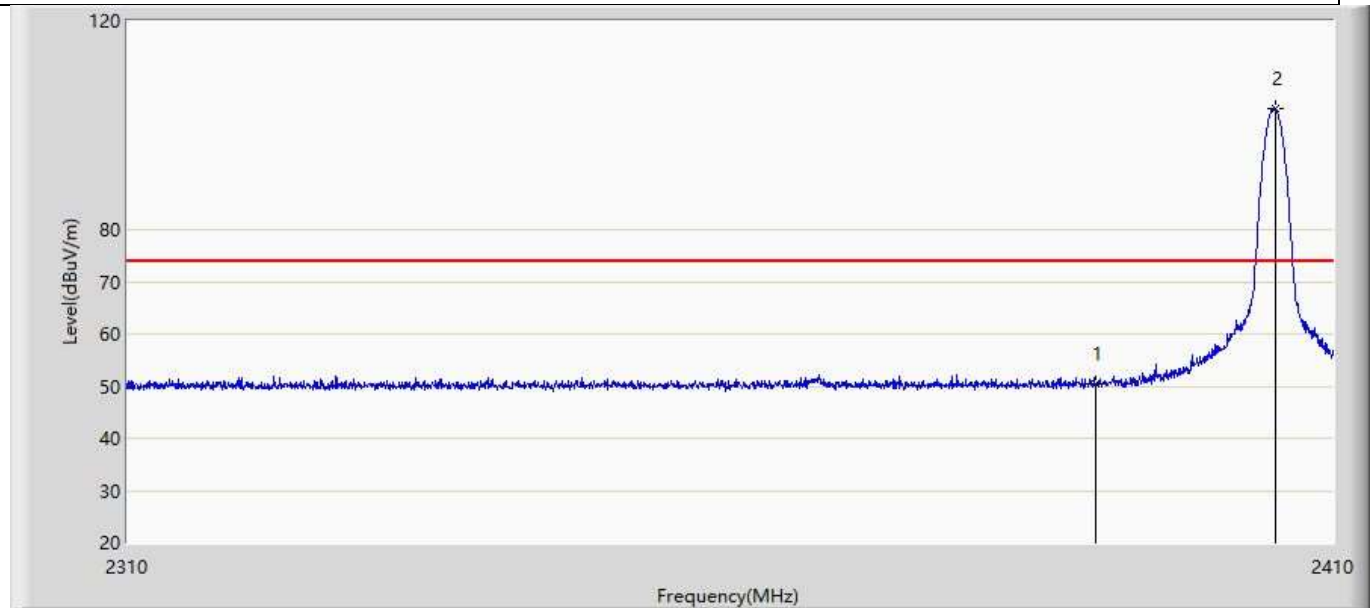


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.563	15.106	-23.437	74.000	35.458	PK
2	*	2405.150	103.106	67.633	N/A	N/A	35.473	PK

Profile: 1992203R	Page No.: 2
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

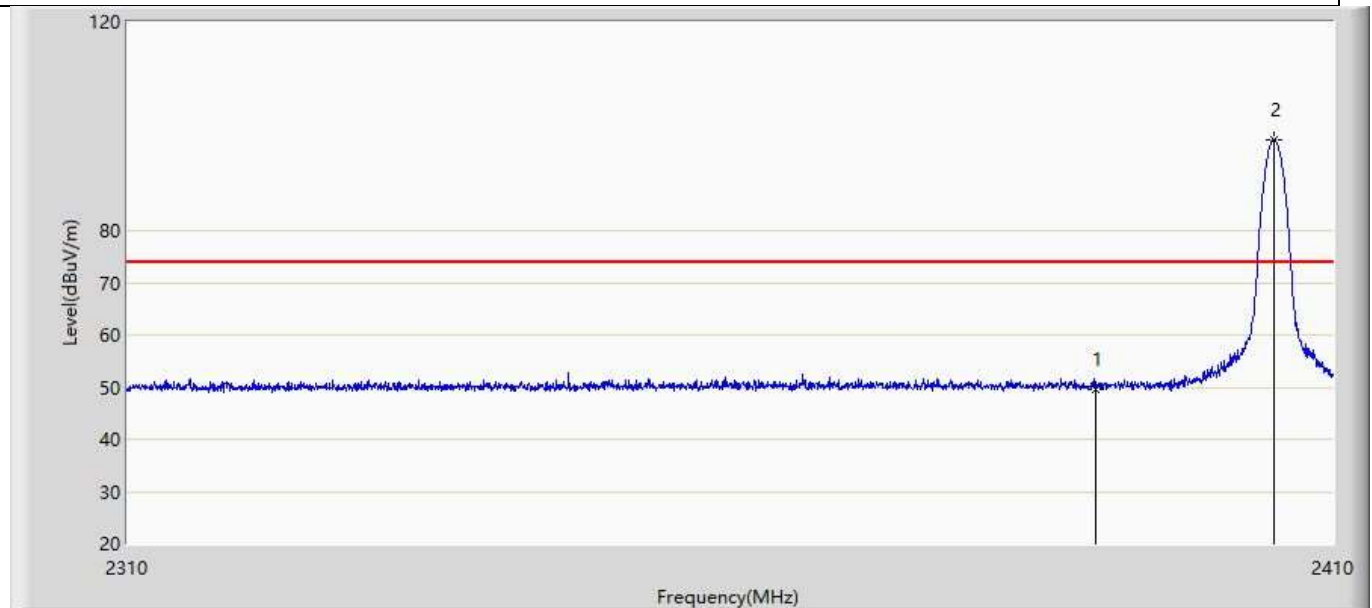


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.587	14.130	-24.413	74.000	35.458	PK
2	*	2405.000	97.470	61.997	N/A	N/A	35.473	PK

Profile: 1992203R	Page No.: 3
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

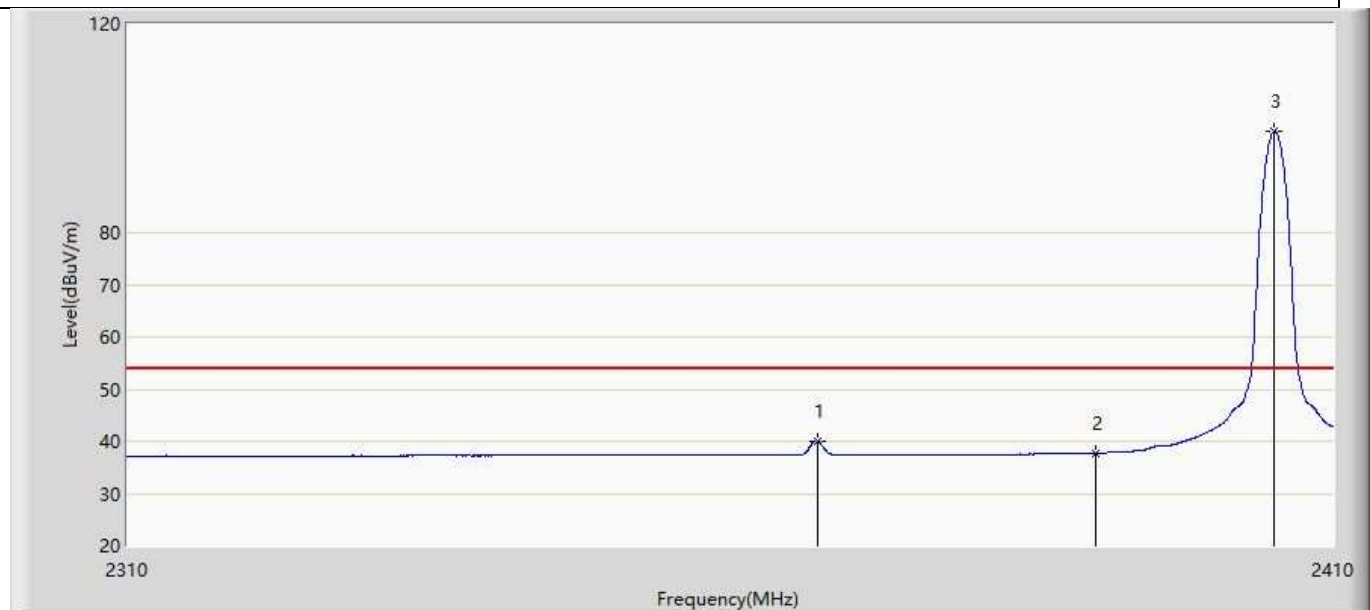

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2366.700	40.125	4.683	-13.875	54.000	35.442	AV
2		2390.000	37.684	2.227	-16.316	54.000	35.458	AV
3	*	2405.000	99.403	63.930	N/A	N/A	35.473	AV


Profile: 1992203R	Page No.: 4
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

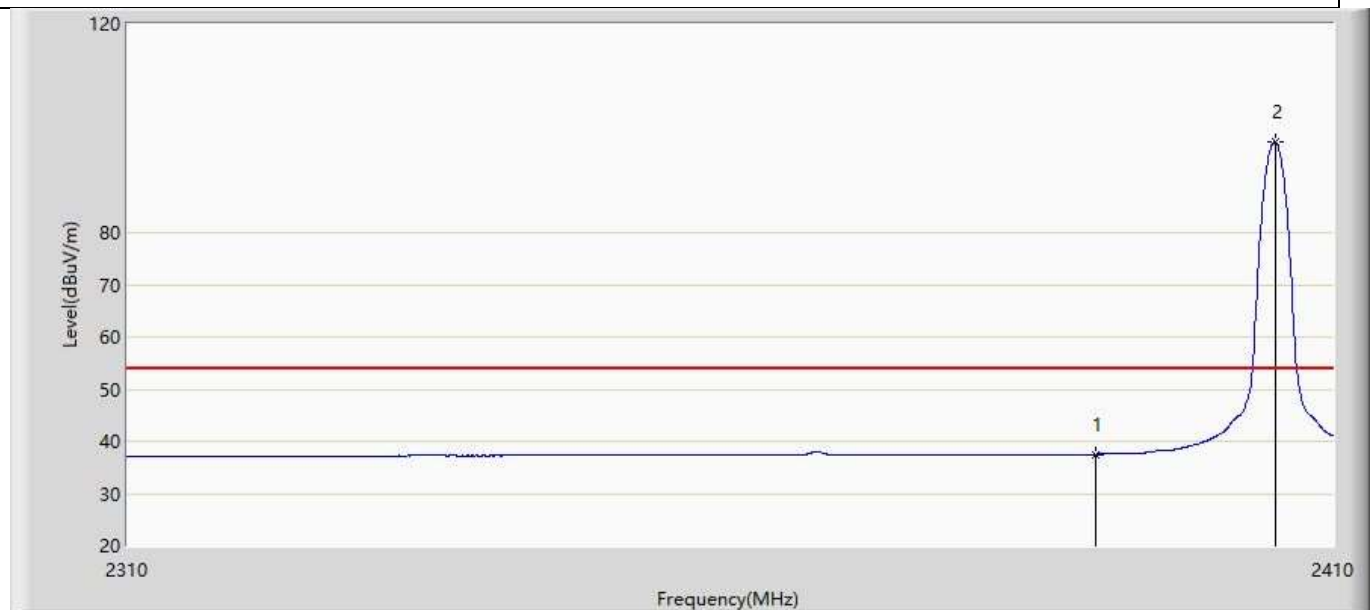

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	37.508	2.051	-16.492	54.000	35.458	AV
2	*	2405.150	97.292	61.819	N/A	N/A	35.473	AV




Profile: 1992203R	Page No.: 5
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

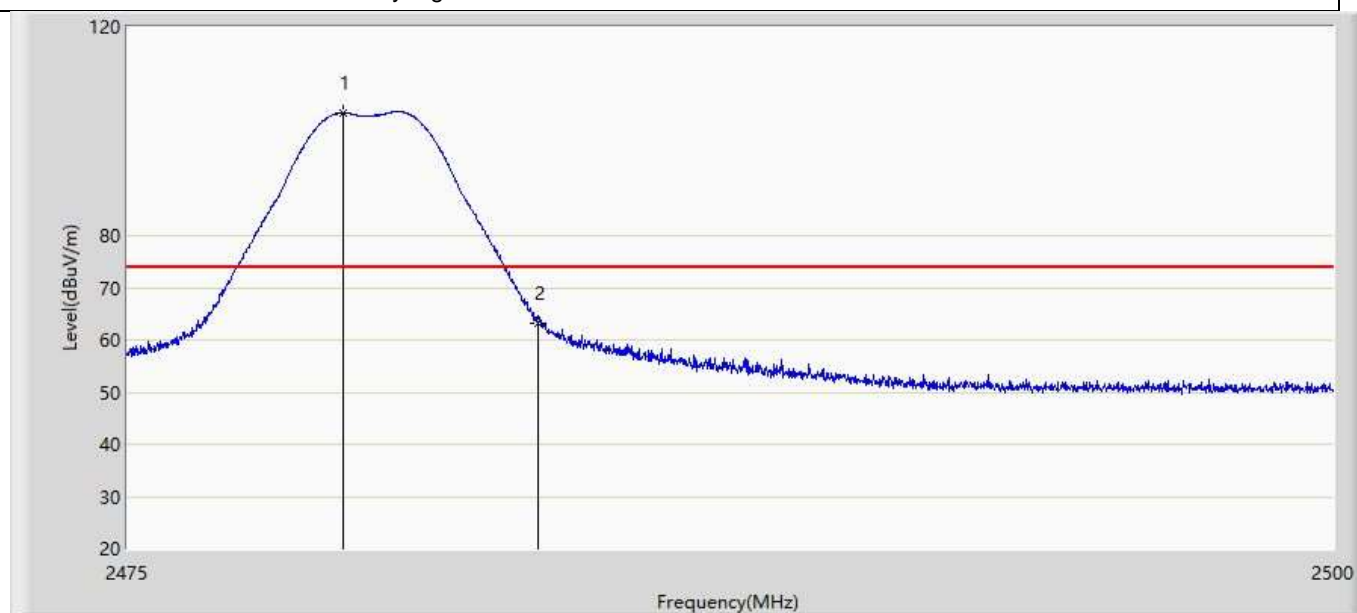


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.462	103.402	67.907	N/A	N/A	35.495	PK
2		2483.500	63.196	27.678	-10.804	74.000	35.517	PK

Profile: 1992203R	Page No.: 6
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

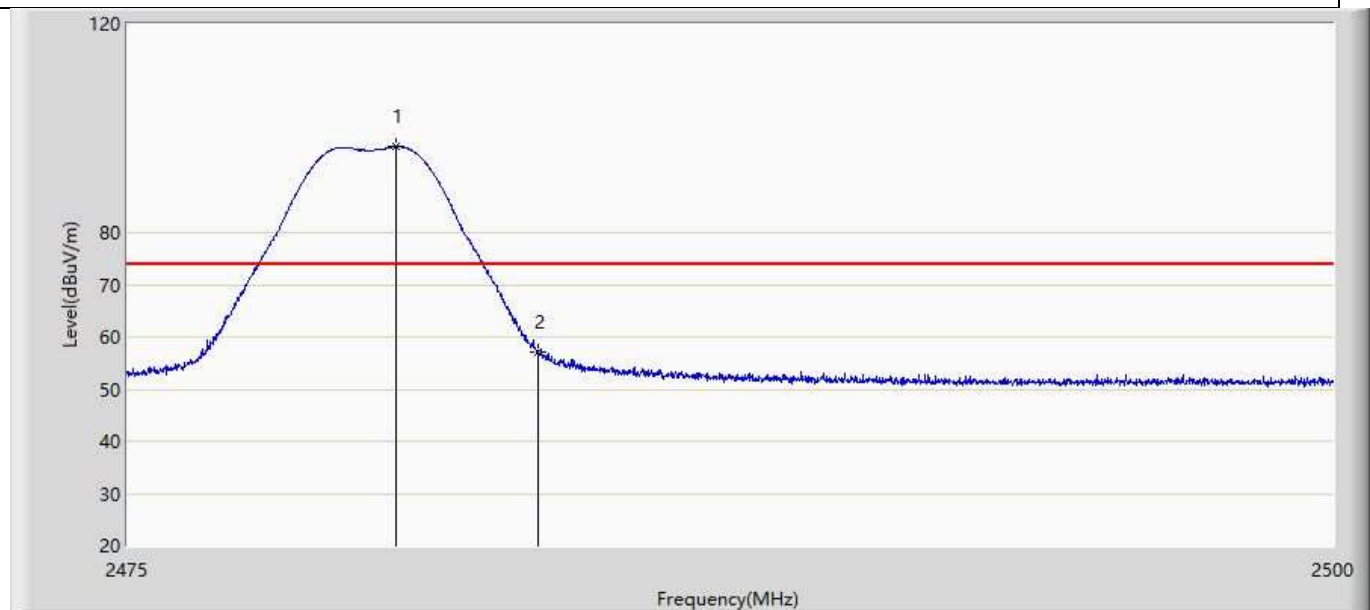


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.562	96.418	60.917	N/A	N/A	35.501	PK
2		2483.500	57.009	21.491	-16.991	74.000	35.517	PK

Profile: 1992203R	Page No.: 7
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

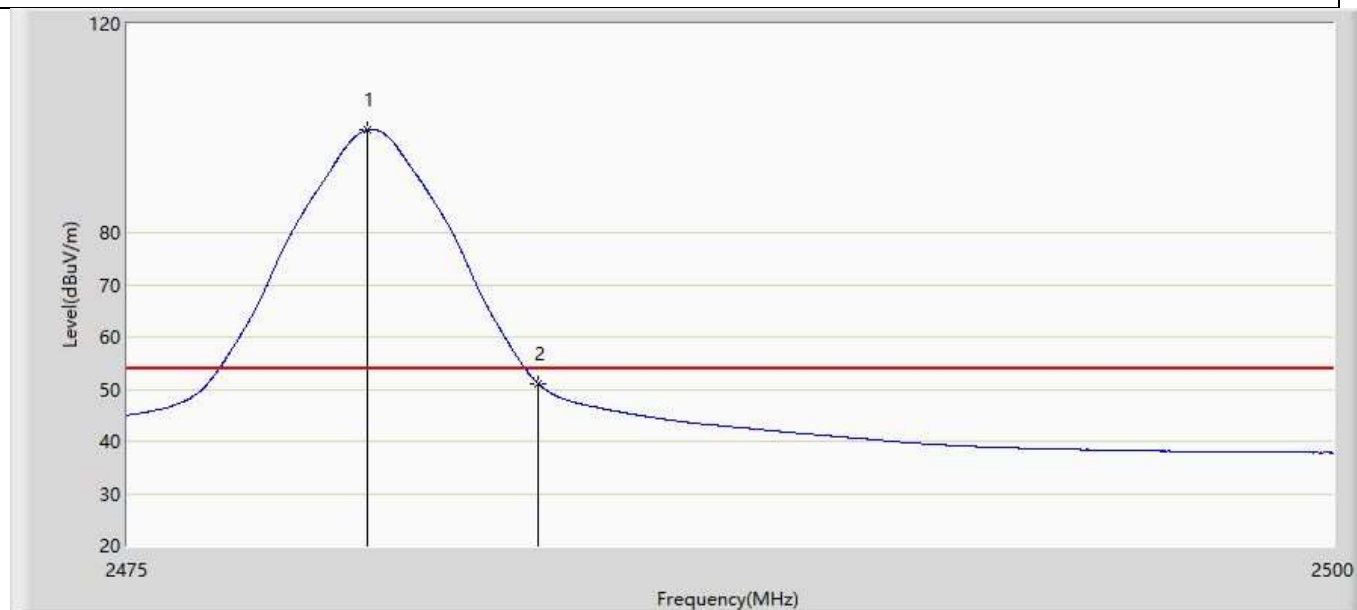

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.975	99.667	64.169	N/A	N/A	35.498	AV
2		2483.500	51.051	15.533	-2.949	54.000	35.517	AV

Profile: 1992203R	Page No.: 8
Engineer: Pawn	
Site: AC5	Time: 2019/10/15 - 18:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Hue Outdoor light strip 2m	Power: AC 110V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

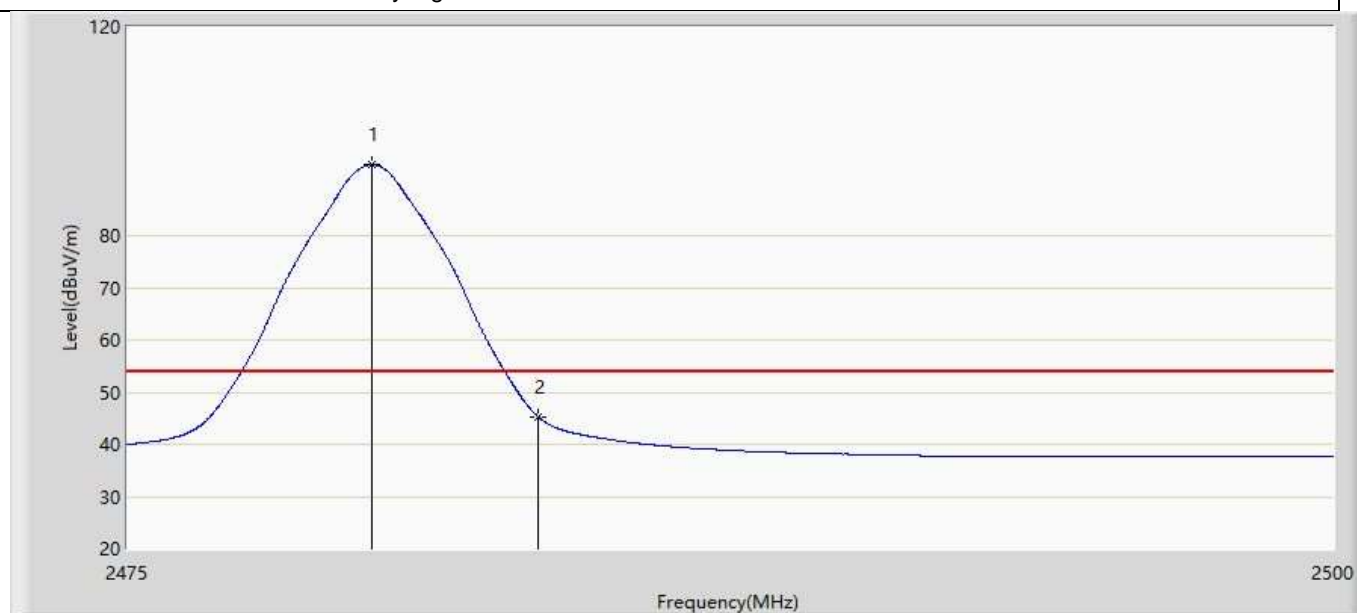

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.050	93.562	58.064	N/A	N/A	35.498	AV
2		2483.500	45.239	9.721	-8.761	54.000	35.517	AV


## Note:

1. Measured Level = Reading Level + Factor.
2. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
3. As the radiated emission was performed, so conducted emission was not tested.

**4.6 DTS Bandwidth****VERDICT: PASS****4.6.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

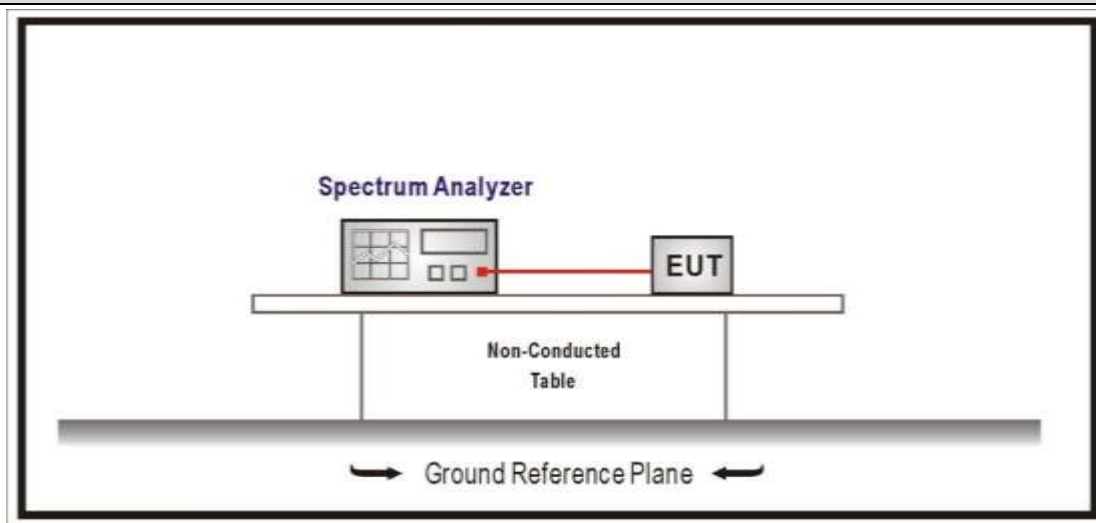**4.6.2 Test Setup****4.6.3 Test Procedure**


	Reference Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.8	DTS bandwidth
<input type="checkbox"/>	ANSI C63.10	11.8.1	Option 1
<input checked="" type="checkbox"/>	ANSI C63.10	11.8.2	Option 2

#### 4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
Mode 1	11	2405	2.9115	1.653	>500	Pass
	18	2440	2.9390	1.680	>500	Pass
	26	2480	2.9114	1.834	>500	Pass

Note : We evaluated all test modes, shown in the report is the worst data.

##### Mode 1 CH11 (2405MHz)

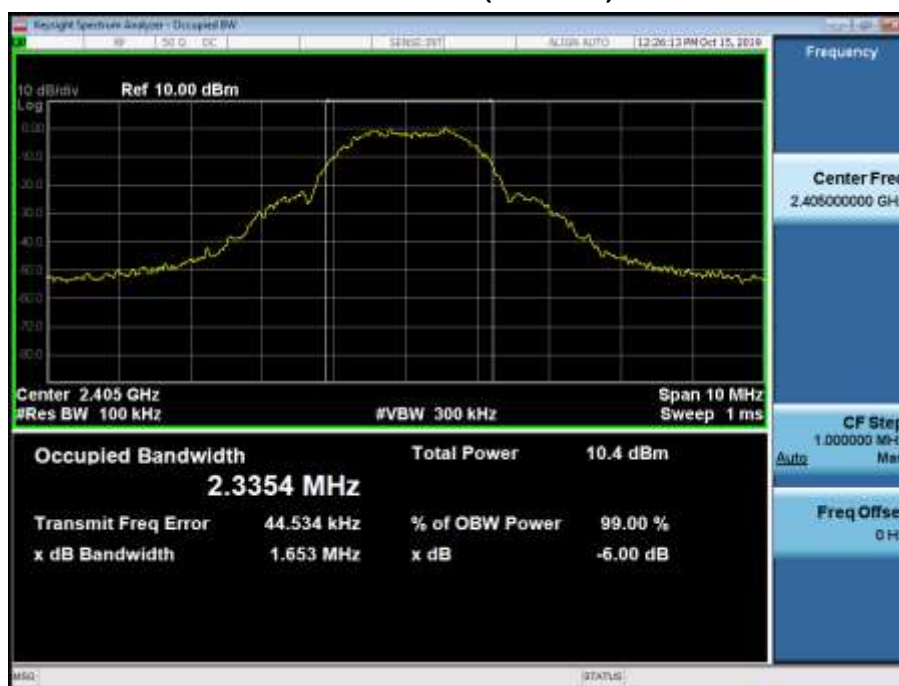


**4.7 Fundamental emission output power****VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
<input checked="" type="checkbox"/>	GTX < 6dBi	$P_{out} \leq 30 \text{ dBm}$
<input type="checkbox"/>	GTX > 6dBi	
<input type="checkbox"/>	Non-Fix point-point	$P_{out} \leq 30 - (GTX - 6)$
<input type="checkbox"/>	Fix point-point	$P_{out} \leq 30 - [(GTX - 6)]/3$
<input type="checkbox"/>	Point-to-multipoint	$P_{out} \leq 30 - (GTX - 6)$
<input type="checkbox"/>	Overlap Beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
<input type="checkbox"/>	single directional beam	$P_{out} \leq 30 - [(GTX - 6)]/3 + 8 \text{ dB}$

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

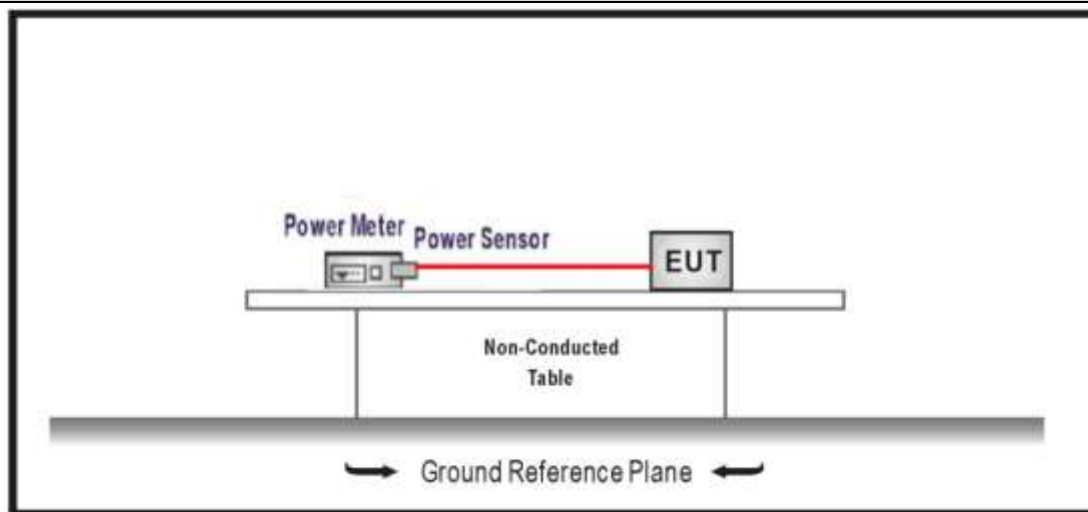**4.7.2 Test Setup**

#### 4.7.3 Test Procedure

	References Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.9	Fundamental emission output power
	<input checked="" type="checkbox"/>	ANSI C63.10		11.9.1 Maximum peak conducted output power
	<input type="checkbox"/>	<input type="checkbox"/>	ANSI C63.10	11.9.1.1 RBW $\geq$ DTS bandwidth
		<input type="checkbox"/>	ANSI C63.10	11.9.1.2 Integrated band power method
		<input type="checkbox"/>	ANSI C63.10	11.9.1.3 PKPM1 Peak power meter method
	<input type="checkbox"/>	ANSI C63.10		11.9.2 Maximum conducted (average) output power
	<input type="checkbox"/>	<input type="checkbox"/>	ANSI C63.10	11.9.2.2 Measurement using a spectrum analyzer (SA)
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2 Method AVGSA-1(Duty cycle $\geq 98\%$ )
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3 Method AVGSA-1A(Duty cycle $\geq 98\%$ )
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4 Method AVGSA-2(Duty cycle $\leq 98\%$ )
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5 Method AVGSA-2A(Duty cycle $\leq 98\%$ )
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4 Method AVGSA-3
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5 Method AVGSA-3A
		<input checked="" type="checkbox"/>	ANSI C63.10	11.9.2.3 Measurement using a power meter (PM)
	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.2.3.1 Method AVGPM
		<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2 Method AVGPM-G



**4.7.4 Test Data**

Murata:


Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	11	2405	9.72	$\leq 30$	Pass
	18	2440	9.61	$\leq 30$	Pass
	26	2480	9.31	$\leq 30$	Pass

KDS:

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	11	2405	9.62	$\leq 30$	Pass
	18	2440	9.49	$\leq 30$	Pass
	26	2480	9.18	$\leq 30$	Pass

**4.8 Power Density****VERDICT: PASS****4.8.1 Limit:**

<b>Standard</b>	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
-----------------	---

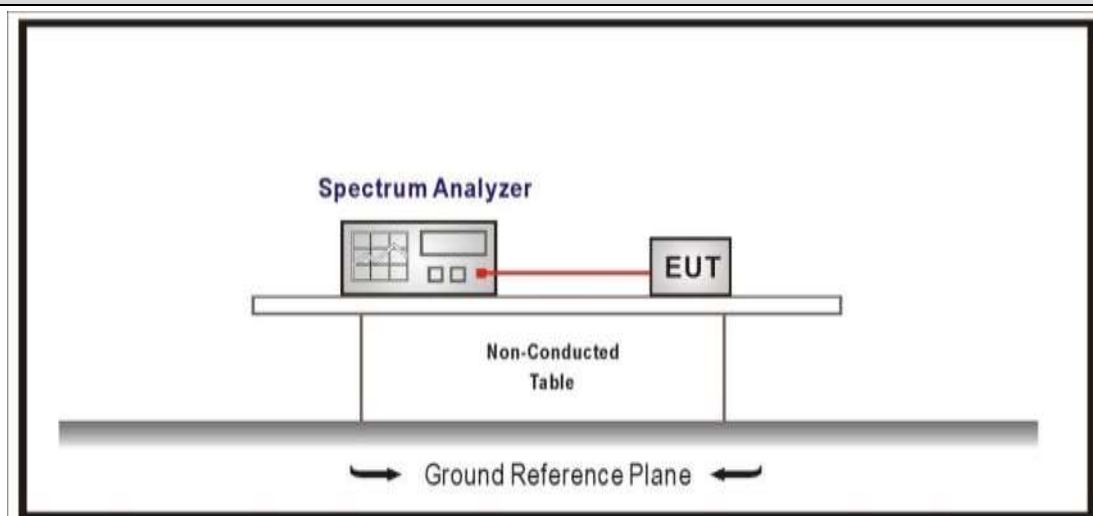
Power Spectral Density  $\leq 8\text{dBm}/3\text{kHz}$ **4.8.2 Test Setup****4.8.3 Test Procedure**

	References Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	<input checked="" type="checkbox"/>	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	<input type="checkbox"/>	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$ )
	<input type="checkbox"/>	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$ )
	<input type="checkbox"/>	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$ )
	<input type="checkbox"/>	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$ )
	<input type="checkbox"/>	ANSI C63.10	11.10.7	Method AVGPSD-3
	<input type="checkbox"/>	ANSI C63.10	11.10.8	Method AVGPSD-3A


#### 4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Total Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	11	2405	-12.296	-12.296	$\leq 8$	Pass
	18	2440	-12.211	-12.211	$\leq 8$	Pass
	26	2480	-11.912	-11.912	$\leq 8$	Pass


Mode 1 CH11(2405MHz)

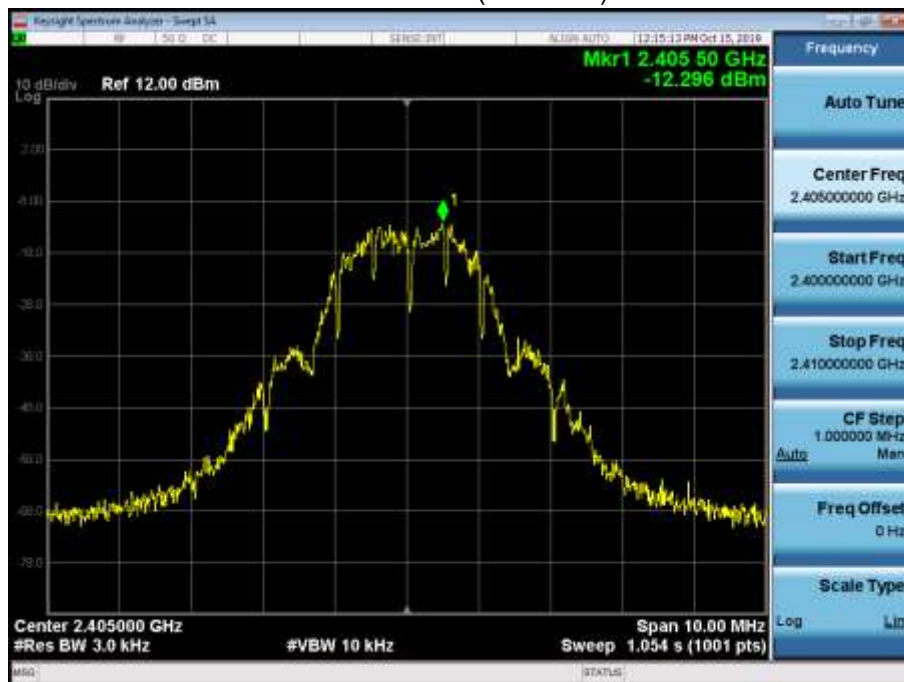

Mode 1 CH18(2440MHz)

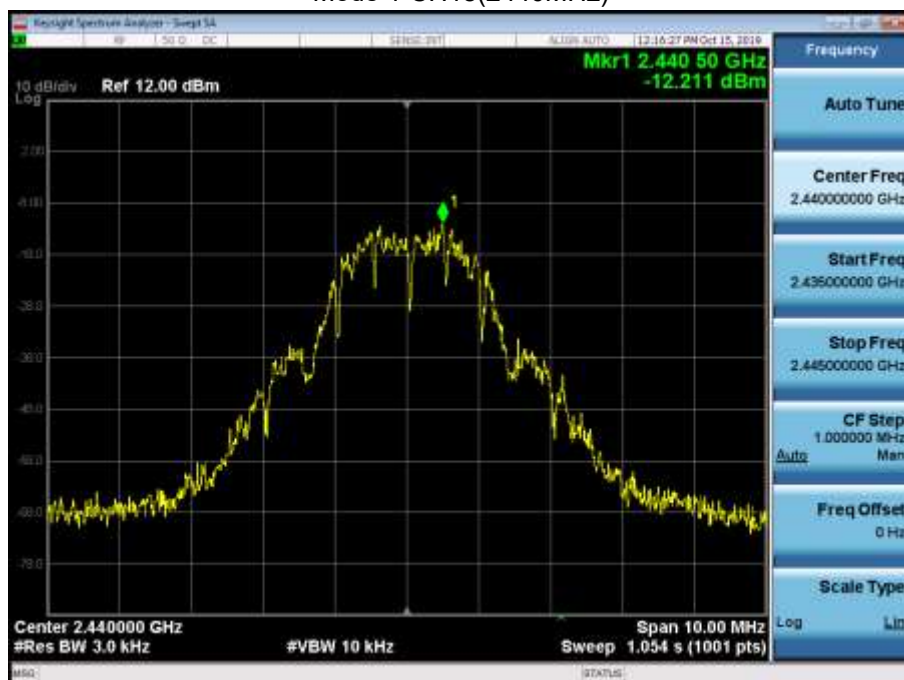

Mode 1 CH26(2480MHz)

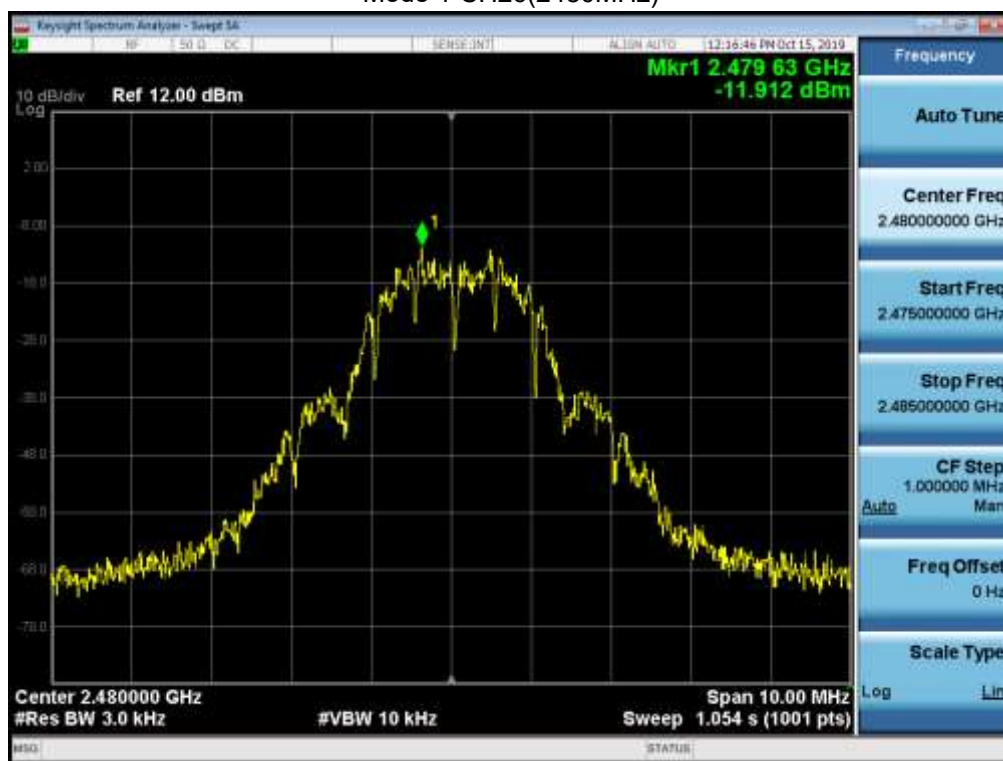

**4.9 Antenna Requirement****VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**4.9.2 Antenna Connector Construction:**

- |                                     |  |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | The use of a permanently attached antenna                        |
| <input type="checkbox"/>            | The antenna use of a unique coupling to the intentional radiator |
| <input type="checkbox"/>            | The use of a nonstandard antenna jack or electrical connector    |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

<b>4.10 Test setup photo and EUT Photo</b>	<b>VERDICT: PASS</b>
--	----------------------

Remark: The test setup photo and EUT Photo please see appendix.

\_\_\_\_\_ The End \_\_\_\_\_