



# Test Report

## FCC Part15 Subpart C & RSS-247 Issue 2 (Class II permissive change)

Product Name : LED Lamp  
Model No. : 9290012575A  
FCC ID : 2AGBW9290012575AX  
IC : 20812-2575AX

Applicant : Philips Lighting (China) Investment Co., Ltd.  
Address : Building 9, Lane 888, Tianlin Road, Minhang district,  
Shanghai, China

Date of Receipt : Sep. 13th, 2017  
Test Date : Sep. 04th, 2017 ~ Sep. 14th, 2017  
Issued Date : Sep. 22th, 2017  
Report No. : 1792056R-RF- US-P06V03  
Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, A2LA or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.

# Test Report Certification

Issued Date : Sep. 22th, 2017

Report No. : 1792056R-RF-US-P06V03



Product Name : LED Lamp  
Applicant : Philips Lighting (China) Investment Co., Ltd.  
Address : Building 9, Lane 888, Tianlin Road, Minhang district, Shanghai, China  
Manufacturer : Philips Lighting (China) Investment Co., Ltd.  
Address : Building 9, Lane 888, Tianlin Road, Minhang district, Shanghai, China  
Model No. : 9290012575A  
FCC ID : 2AGBW9290012575AX  
IC : 20812-2575AX  
EUT Voltage : AC 110-130V,50-60Hz  
Test Voltage : AC 120V/60Hz  
Brand Name : Philips  
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C  
ANSI C63.4:2014; ANSI C63.10:2013;  
KDB 558074 D01v04  
Industry Canada RSS-Gen Issue 4/RSS-247 Issue 2  
Test Result : Complied  
Performed Location : DEKRA Testing and Certification (Suzhou) Co., Ltd.  
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,  
Jiangsu, China  
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
FCC Designation Number: CN1199; IC Lab Code: 4075B

Documented By :



(Project Assistant Supervisor: Kery Zha)

Reviewed By :



(Senior Project Manager: Frank He )

Approved By :



(Engineering Manager: Harry Zhao )

## TABLE OF CONTENTS

Description	Page
1. General Information .....	5
1.1. EUT Description .....	5
1.2. Channel List: .....	5
1.3. Antenna information .....	6
1.4. Mode of Operation .....	7
1.5. Tested System Details .....	7
1.6. Configuration of Tested System .....	8
2. Technical Test .....	9
2.1. Summary of Test Result .....	9
2.2. Power setting parameter .....	9
2.3. Test Environment .....	10
2.4. Measurement Uncertainty .....	10
3. AC Power Line Conducted Emission .....	11
3.1. Test Equipment .....	11
3.2. Test Setup .....	11
3.3. Limit .....	12
3.4. Test Procedure .....	12
3.5. Test Result .....	13
4. Emissions in restricted frequency bands .....	15
4.1. Test Equipment .....	15
4.2. Test Setup .....	16
4.3. Limit .....	17
4.4. Test Procedure .....	20
4.5. EUT test Axis definition .....	21
4.6. Test Result .....	22
5. Radiated Emission Band Edge .....	30
5.1. Test Equipment .....	30
5.2. Test Setup .....	31
5.3. Limit .....	31
5.4. Test Procedure .....	32
5.5. EUT test definition .....	33
5.6. Test Result .....	34
6. Fundamental emission output power .....	46
6.1. Test Equipment .....	46
6.2. Test Setup .....	46
6.3. Limit .....	47
6.4. Test Procedure .....	48
6.5. EUT test definition .....	49
6.6. Test Result .....	50

## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1792056R-RF-US-P06V03	V1.0	Initial Issued Report	Sep. 22th, 2017

## 1. General Information

### 1.1. EUT Description

Product Name	LED Lamp
Brand Name	Philips
Model No.	9290012575A
EUT Voltage	AC 110-130V,50-60Hz
Frequency Range	2405 ~ 2480MHz
Channel Number	16
Type of Modulation	O-QPSK
Data Rate	250kbps
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Note 1: This report is based on report ACWE-F1703008A.

2: Filter capacitor has been changed from 4.7uF to 2.2uF (two on the drive board and one on the RF board)

### 1.2. Channel List:

Zigbee Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz	14	2420 MHz
15	2425 MHz	16	2430 MHz	17	2435 MHz	18	2440 MHz
19	2445 MHz	20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz	26	2480 MHz

### 1.3. Antenna information

Antenna manufacturer	N/A					
Antenna Delivery	<input checked="" type="checkbox"/>	1*TX+1*RX	<input type="checkbox"/>	2*TX+2*RX	<input type="checkbox"/>	3*TX+3*RX
Antenna technology	<input checked="" type="checkbox"/>	SISO				
	<input type="checkbox"/>	MIMO	<input type="checkbox"/>	Basic		
			<input type="checkbox"/>	Sectorized antenna systems		
			<input type="checkbox"/>	Cross-polarized antennas		
			<input type="checkbox"/>	Unequal antenna gains, with equal transmit powers		
			<input type="checkbox"/>	Spatial Multiplexing		
			<input type="checkbox"/>	CDD		
			<input type="checkbox"/>	Beam-forming		
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/>	Dipole		
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/>	PIFA		
			<input checked="" type="checkbox"/>	PCB		
			<input type="checkbox"/>	Ceramic Chip Antenna		
			<input type="checkbox"/>	Metal plate type F antenna		
			<input type="checkbox"/>	Cross-polarize Antenna		
Antenna Gain	3.1dBi					

#### 1.4. Mode of Operation

Test Modes List
Mode 1: Transmit by Zigbee


#### 1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	N/A	N/A	N/A	N/A	N/A

## 1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

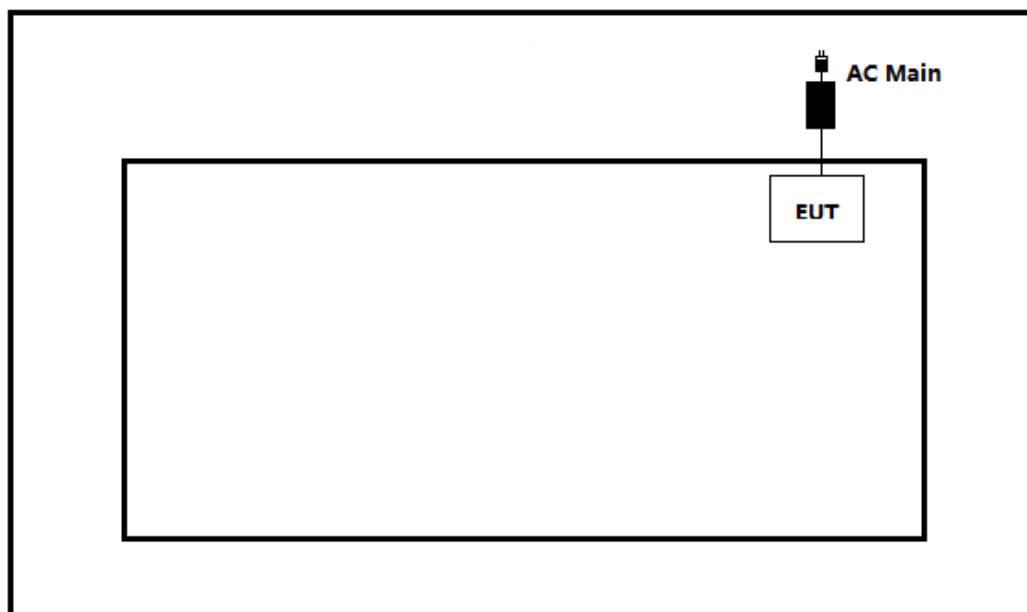

Test setup Diagram- Radiated Emission

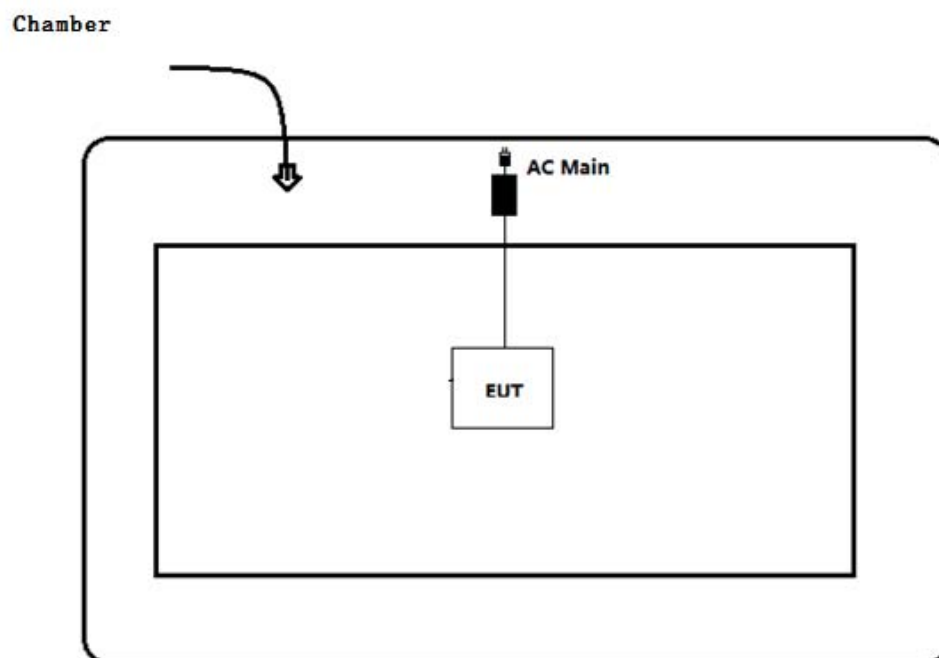



## 2. Technical Test

### 2.1. Summary of Test Result

#### For FCC:

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	FCC 15.209	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	FCC 15.209	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	$\leq 30\text{dBm}$	PASS

#### For IC:

Performed Test Item	Normative References	Limit	Result
Conducted Emission	RSS-Gen Issue 4 Section 8.8	RSS-Gen Issue 4	PASS
Radiated Emission	RSS-Gen Issue 4 Section 8.9	RSS-Gen Issue 4	PASS
Radiated Emission Band Edge	RSS-Gen Issue 4 Section 8.10	RSS-Gen Issue 4	PASS
Peak Output Power	RSS-247 Issue 2 Section 5.4	$\leq 30\text{dBm}$	PASS

### 2.2. Power setting parameter

Modulation Mode	Test Frequency	Setting value
Zigbee	2405	Auto
	2450	Auto
	2475	Auto
	2480	Auto

## 2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

## 2.4. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


### 3. AC Power Line Conducted Emission

#### 3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2017.03.05	2018.03.04
Two-Line V-Network	R&S	ENV 216	101189	2017.07.16	2018.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.16	2018.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.03	2017.09.02
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2017.01.04	2018.01.03

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

#### 3.2. Test Setup

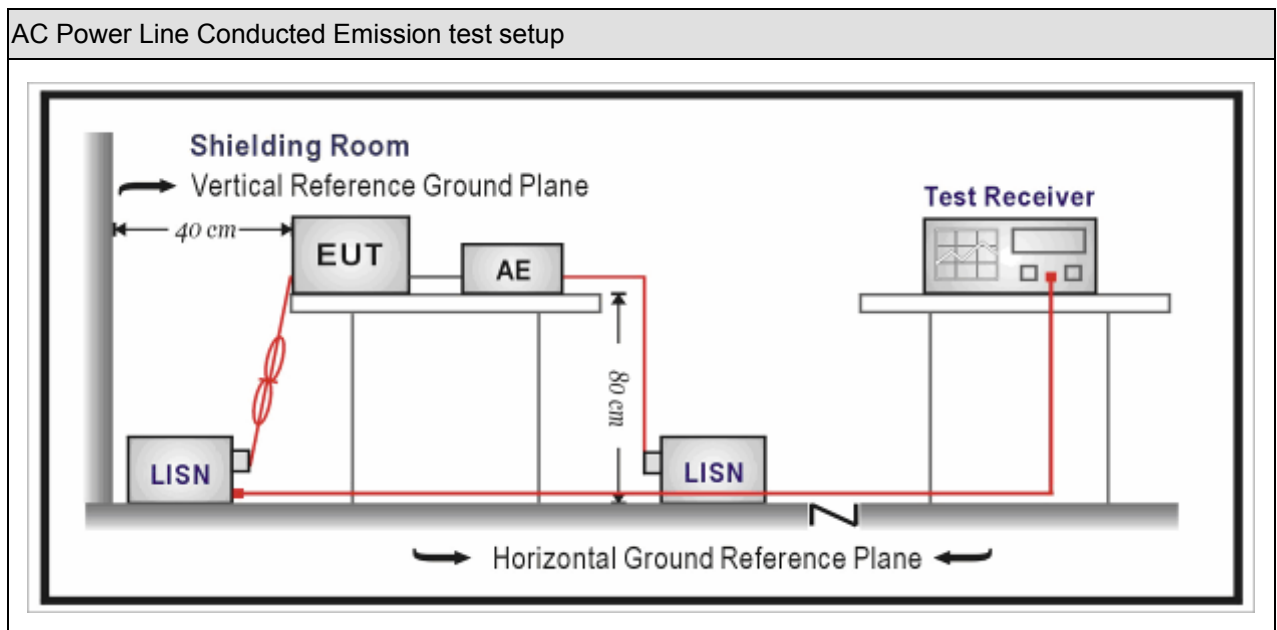

### 3.3. Limit


Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

### 3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
<input checked="" type="checkbox"/>	ANSI C63.4-2014	7	AC power-line conducted emission measurements

### 3.5. Test Result

Engineer: Bob Yu	
Site: TR1	Time: 2017/09/14
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

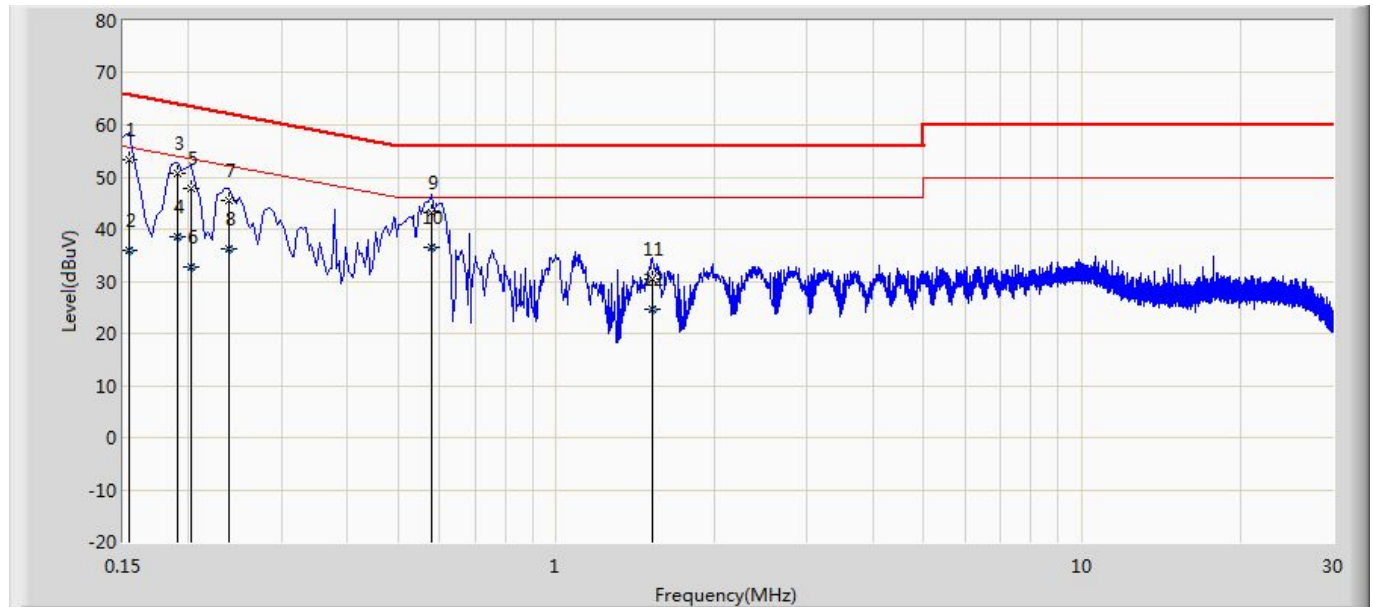

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.154	53.307	43.672	-12.475	65.781	9.609	0.025	0.000	QP
2		0.154	36.012	26.378	-19.769	55.781	9.609	0.025	0.000	AV
3		0.190	50.637	41.007	-13.399	64.037	9.602	0.028	0.000	QP
4		0.190	38.456	28.826	-15.581	54.037	9.602	0.028	0.000	AV
5		0.202	47.736	38.106	-15.792	63.528	9.601	0.029	0.000	QP
6		0.202	32.820	23.190	-20.708	53.528	9.601	0.029	0.000	AV
7		0.238	45.452	35.822	-16.713	62.166	9.600	0.030	0.000	QP
8		0.238	36.349	26.719	-15.817	52.166	9.600	0.030	0.000	AV
9		0.578	43.155	33.510	-12.845	56.000	9.600	0.045	0.000	QP
10	*	0.578	36.584	26.939	-9.416	46.000	9.600	0.045	0.000	AV
11		1.526	30.530	20.845	-25.470	56.000	9.610	0.075	0.000	QP
12		1.526	24.680	14.995	-21.320	46.000	9.610	0.075	0.000	AV

Note:

1. " \* ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Bob Yu

Site: TR1

Time: 2017/09/14

Limit: FCC\_Part15.207\_CE\_AC Power

Margin: 0


Probe: ENV216\_101190(0.009-30MHz)

Polarity: Neutral

EUT: LED Lamp

Power: AC 120V/60Hz

Note: Mode 1: Transmit at 2405MHz by Zigbee

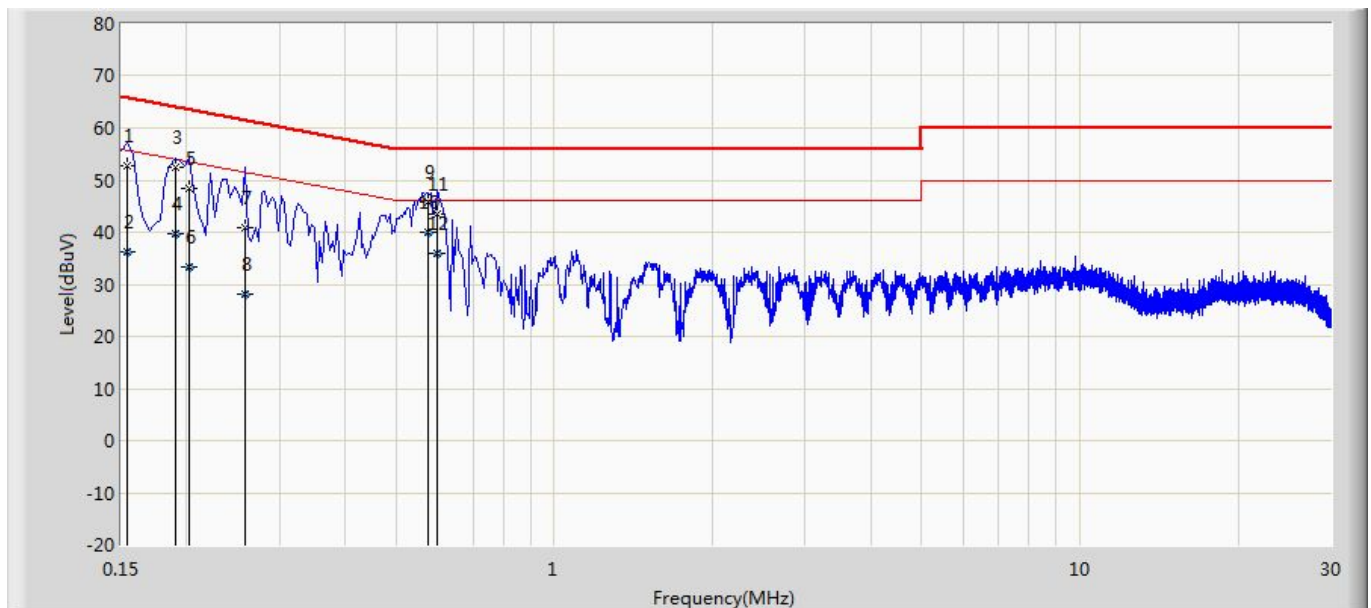

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.154	52.716	43.097	-13.066	65.781	9.593	0.025	0.000	QP
2		0.154	36.117	26.499	-19.664	55.781	9.593	0.025	0.000	AV
3		0.190	52.469	42.842	-11.568	64.037	9.598	0.028	0.000	QP
4		0.190	39.600	29.974	-14.437	54.037	9.598	0.028	0.000	AV
5		0.202	48.429	38.802	-15.099	63.528	9.598	0.029	0.000	QP
6		0.202	33.201	23.574	-20.327	53.528	9.598	0.029	0.000	AV
7		0.258	40.869	31.239	-20.627	61.496	9.598	0.032	0.000	QP
8		0.258	28.213	18.583	-23.283	51.496	9.598	0.032	0.000	AV
9		0.574	45.811	36.175	-10.189	56.000	9.590	0.045	0.000	QP
10	*	0.574	40.001	30.365	-5.999	46.000	9.590	0.045	0.000	AV
11		0.598	43.501	33.865	-12.499	56.000	9.590	0.046	0.000	QP
12		0.598	36.038	26.402	-9.962	46.000	9.590	0.046	0.000	AV

Note:

1. " \* ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

## 4. Emissions in restricted frequency bands


### 4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2017.03.29	2018.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2016.11.16	2017.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2016.10.16	2017.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2017.03.02	2018.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2017.01.04	2018.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.03	2018.01.02
Preamplifier	Miteq	NSP1800-25	1364185	2017.05.06	2018.05.05
Preamplifier	QTK	AP-040G	CHM-0906001	2017.05.06	2018.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2017.01.22	2018.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.11.25	2017.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2017.03.02	2018.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2017.06.10	2018.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.04	2018.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

## 4.2. Test Setup


Below 30MHz Test Setup:

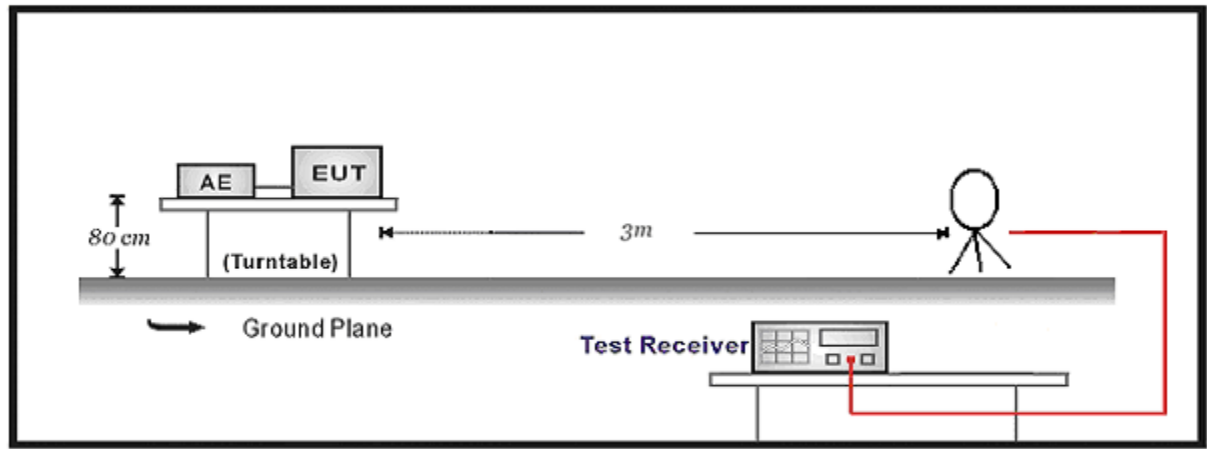

30MHz-1GHz Test Setup:

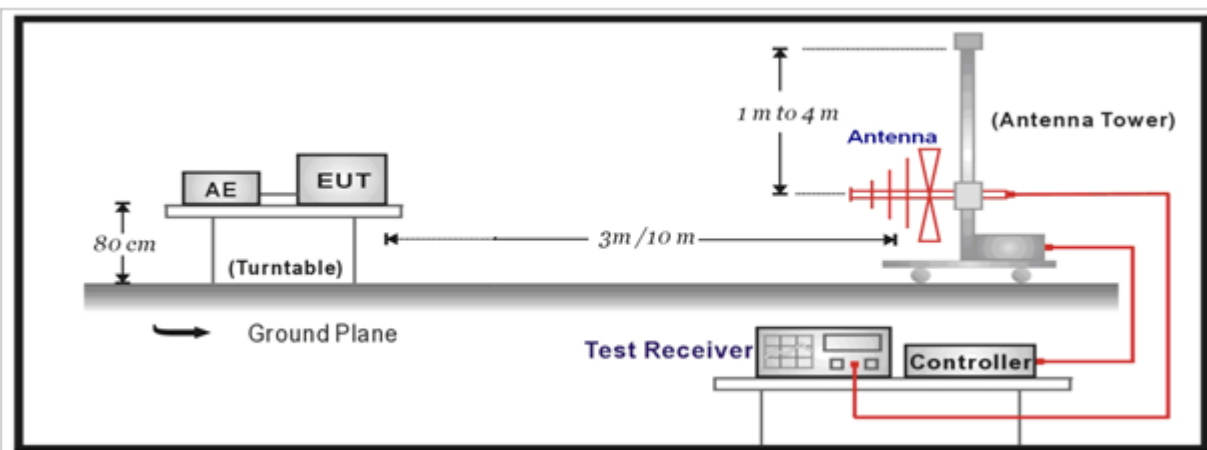

Above 1GHz Test Setup:

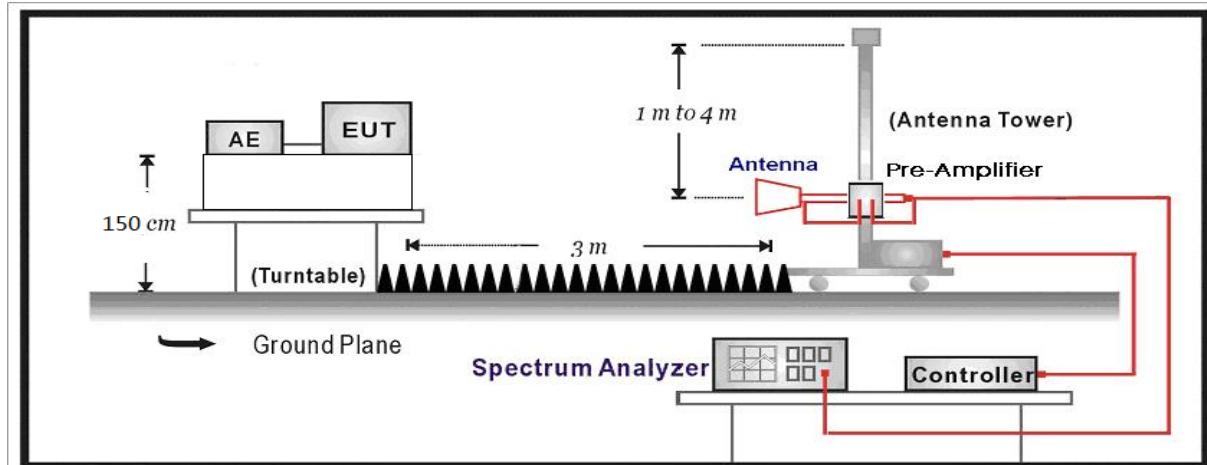



#### 4.3. Limit

For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

**For IC:**

## Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	13.36-13.41	1645.5-1646.5	9.0-9.2
2.1735-2.1905	16.42-16.423	1660-1710	9.3-9.5
3.020-3.026	16.69475-16.69525	1718.8-1722.2	10.6-12.7
4.125-4.128	16.80425-16.80475	2200-2300	13.25-13.4
4.17725-4.17775	25.5-25.67	2310-2390	14.47-14.5
4.20725-4.20775	37.5-38.25	2655-2900	15.35-16.2
5.677-5.683	73-74.6	3260-3267	17.7-21.4
6.215-6.218	74.8-75.2	3332-3339	22.01-23.12
6.26775-6.26825	108-138	3345.8-3358	23.6-24.0
6.31175-6.31225	156.52475-156.52525	3500-4400	31.2-31.8
8.291-8.294	156.7-156.9	4500-5150	36.43-36.5
8.362-8.366	240-285	5350-5460	Above 38.6
8.37625-8.38675	322-335.4	7250-7750	
8.41425-8.41475	399.9-410	8025-8500	
12.29-12.293	608-614		
12.51975-12.52025	960-1427		
12.57675-12.57725	1435-1626.5		

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength ( $\mu$ V/m)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 <sub>(Note 1)</sub>
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 <sub>(Note 1)</sub>
1.705 - 30	30	29.5	30 <sub>(Note 1)</sub>
30 - 88	100	40	3 <sub>(Note 2)</sub>
88 - 216	150	43.5	3 <sub>(Note 2)</sub>
216 - 960	200	46	3 <sub>(Note 2)</sub>
Above 960	500	54	3 <sub>(Note 2)</sub>







Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

#### 4.4. Test Procedure


Test Method				
	References Rule		Chapter	Description
<input type="checkbox"/>	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	<input type="checkbox"/>	ANSI C63.10	11.11.2	Reference level measurement
	<input type="checkbox"/>	ANSI C63.10	11.11.3	Emission level measurement
<input checked="" type="checkbox"/>	ANSI C63.10		11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/>	ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	<input checked="" type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	<input type="checkbox"/>	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		ANSI C63.10	11.12.2.4	Peak power measurement procedure
		ANSI C63.10	11.12.2.5	Average power measurement procedures
	<input type="checkbox"/>	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

#### 4.5. EUT test Axis definition

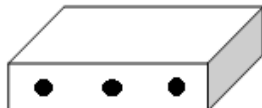Item	Emissions in restricted frequency bands			
Device Category	<input checked="" type="checkbox"/>	Fixed position use		
	<input type="checkbox"/>	Mobile position use		
Test mode	Mode 1			
Test method	<input checked="" type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input checked="" type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input type="checkbox"/>	Conducted		
	<input type="checkbox"/>	Chain 1		
				
	<input type="checkbox"/>	Chain 1	Chain 2	
				
	<input type="checkbox"/>	Chain 1	Chain 2	Chain 3
				


#### 4.6. Test Result

Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

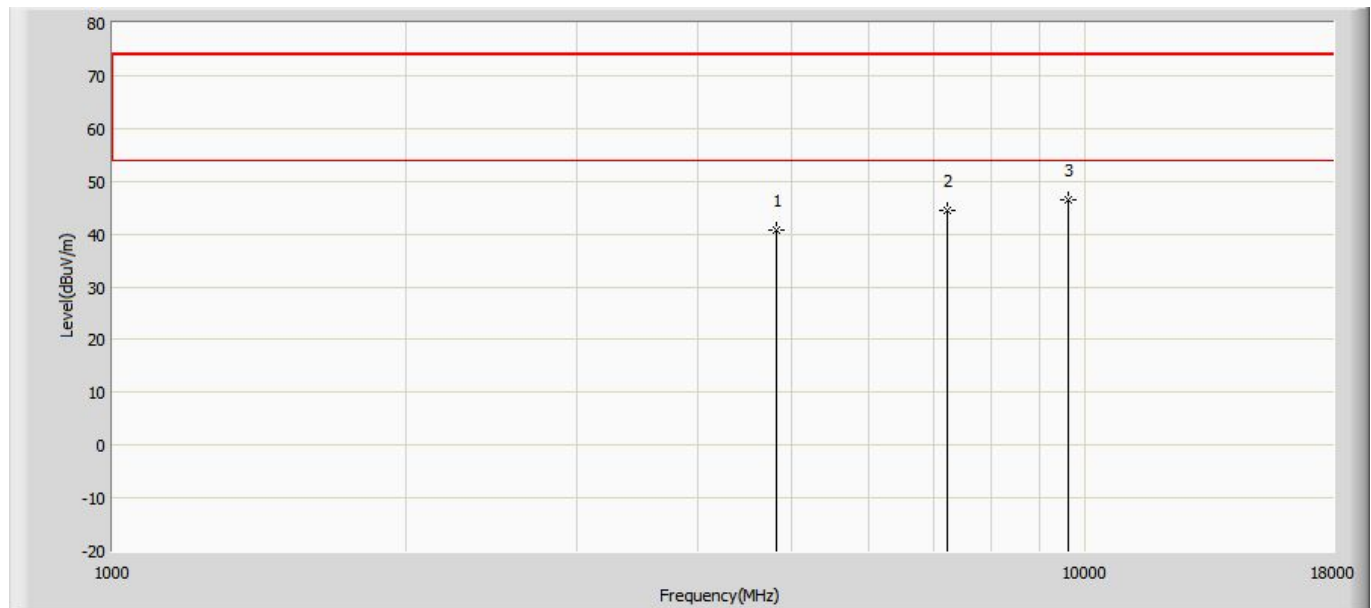


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	40.714	53.724	-33.286	74.000	-13.010	PK
2		7215.000	44.509	52.219	-29.491	74.000	-7.710	PK
3	*	9620.000	46.503	48.093	-27.497	74.000	-1.590	PK

Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

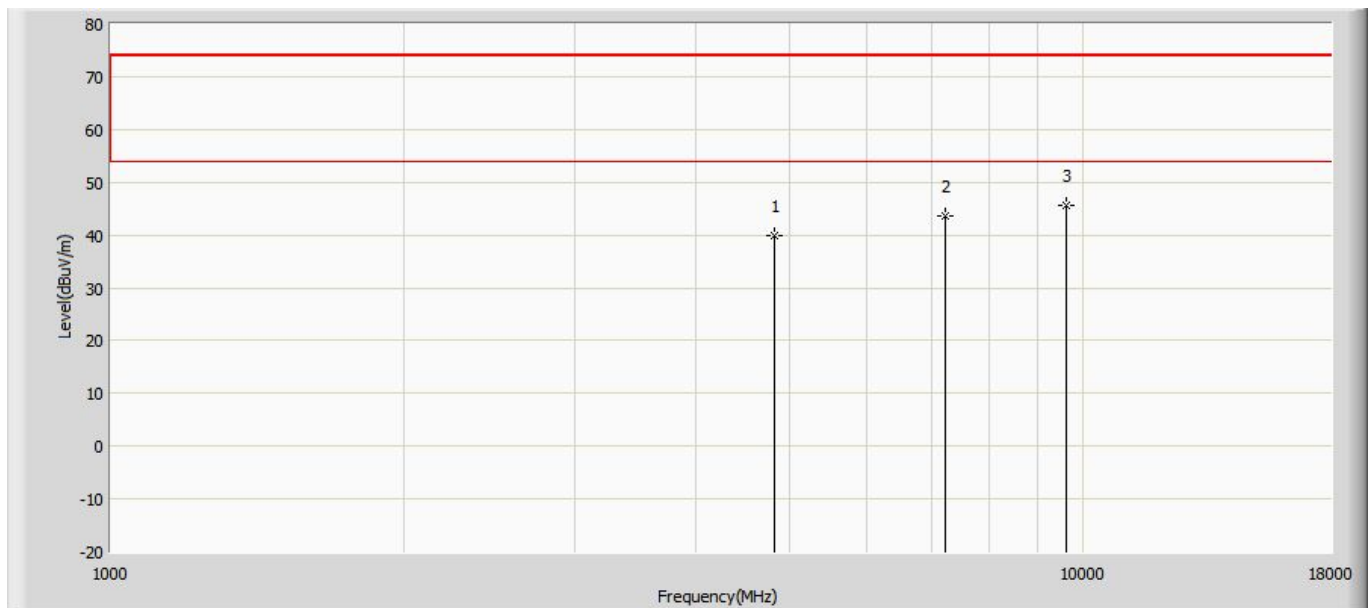

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	39.832	52.842	-34.168	74.000	-13.010	PK
2		7215.000	43.594	51.304	-30.406	74.000	-7.710	PK
3	*	9620.000	45.662	47.252	-28.338	74.000	-1.590	PK


Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by Zigbee	

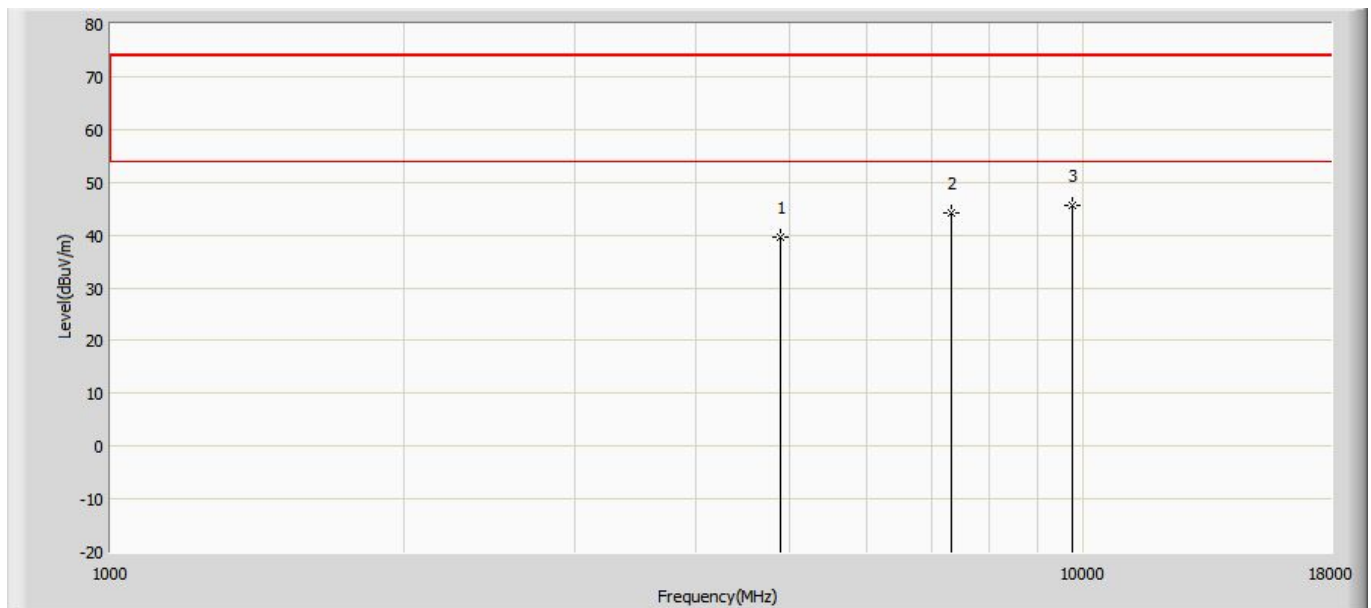

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	39.489	52.499	-34.511	74.000	-13.010	PK
2		7320.000	44.100	51.810	-29.900	74.000	-7.710	PK
3	*	9760.000	45.479	47.069	-28.521	74.000	-1.590	PK




Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by Zigbee	

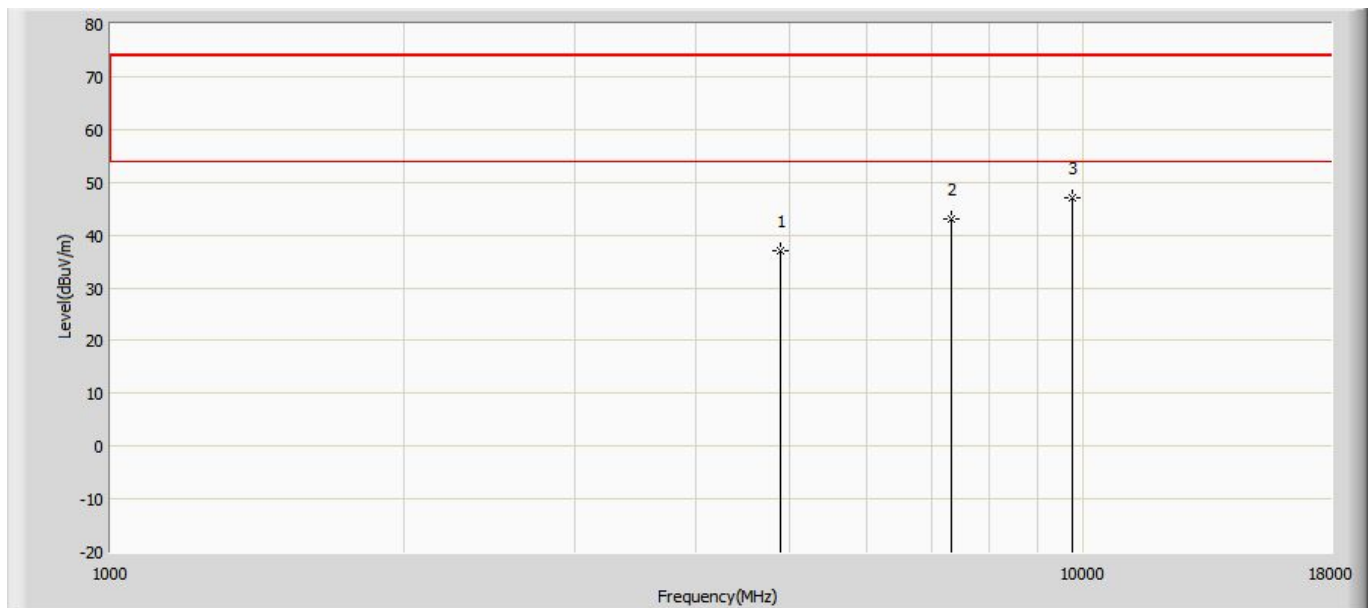


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	37.140	50.150	-36.860	74.000	-13.010	PK
2		7320.000	42.910	50.620	-31.090	74.000	-7.710	PK
3	*	9760.000	46.934	48.524	-27.066	74.000	-1.590	PK

Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2475MHz by Zigbee	

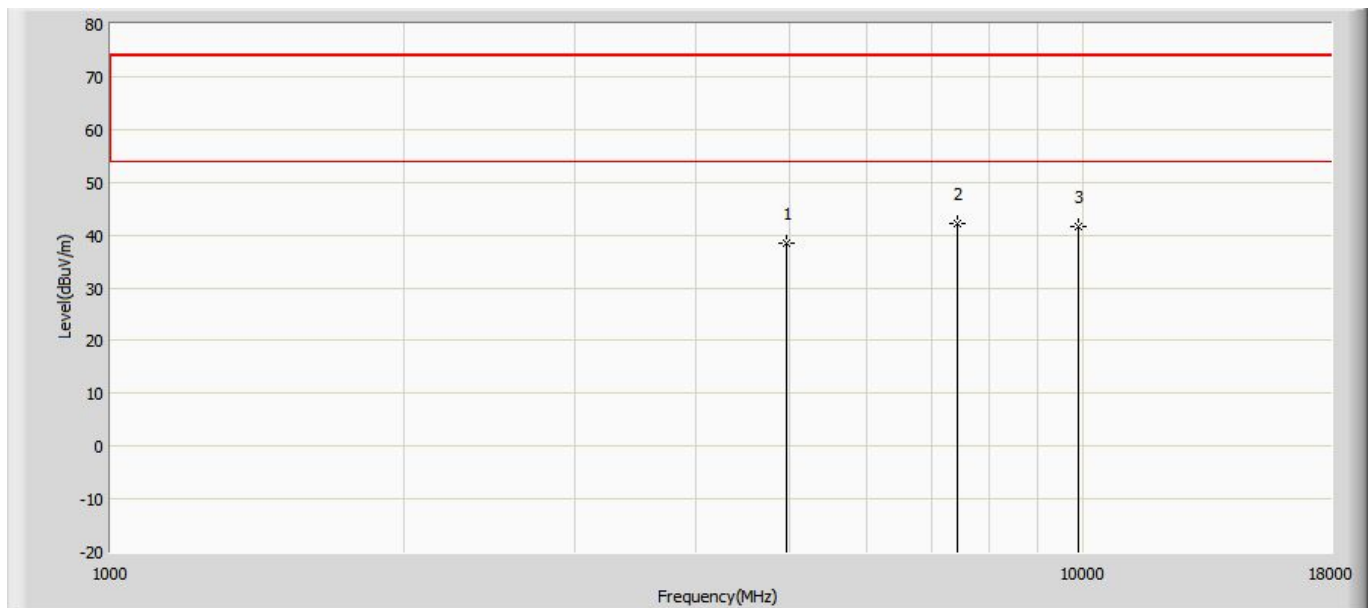


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4950.000	38.487	50.717	-35.513	74.000	-12.230	PK
2	*	7425.000	42.039	48.699	-31.961	74.000	-6.660	PK
3		9900.000	41.484	43.444	-32.516	74.000	-1.960	PK

Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2475MHz by Zigbee	

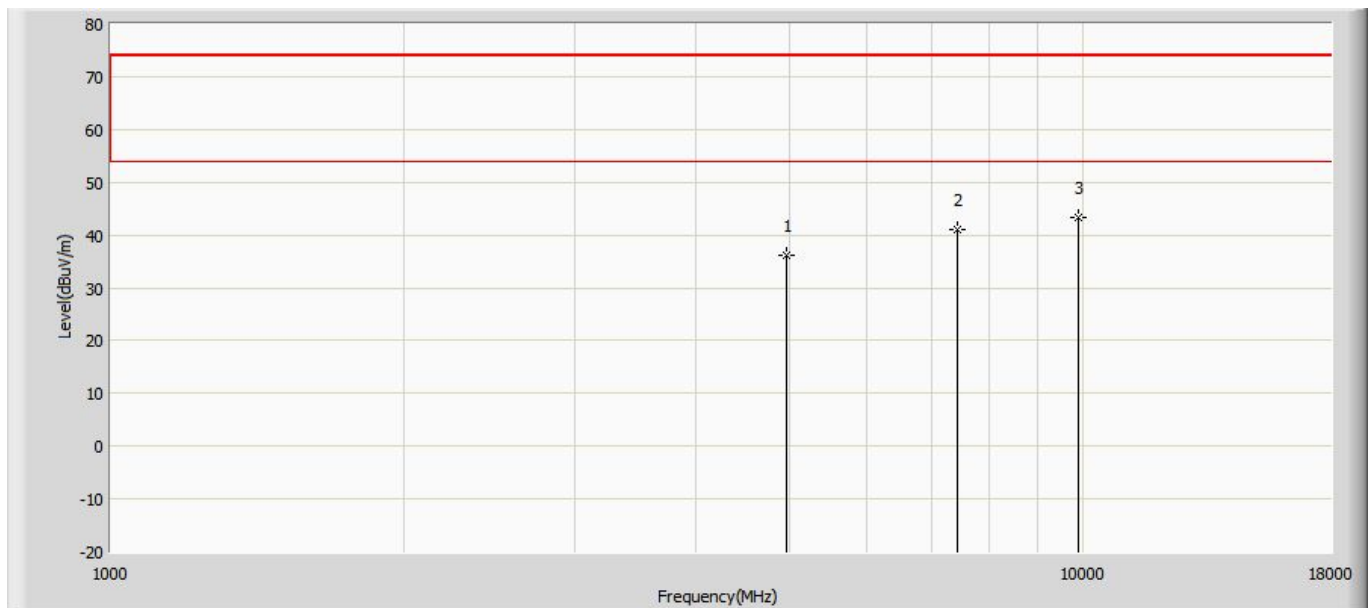


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4950.000	36.063	48.293	-37.937	74.000	-12.230	PK
2		7425.000	40.916	47.576	-33.084	74.000	-6.660	PK
3	*	9900.000	43.323	45.283	-30.677	74.000	-1.960	PK

Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

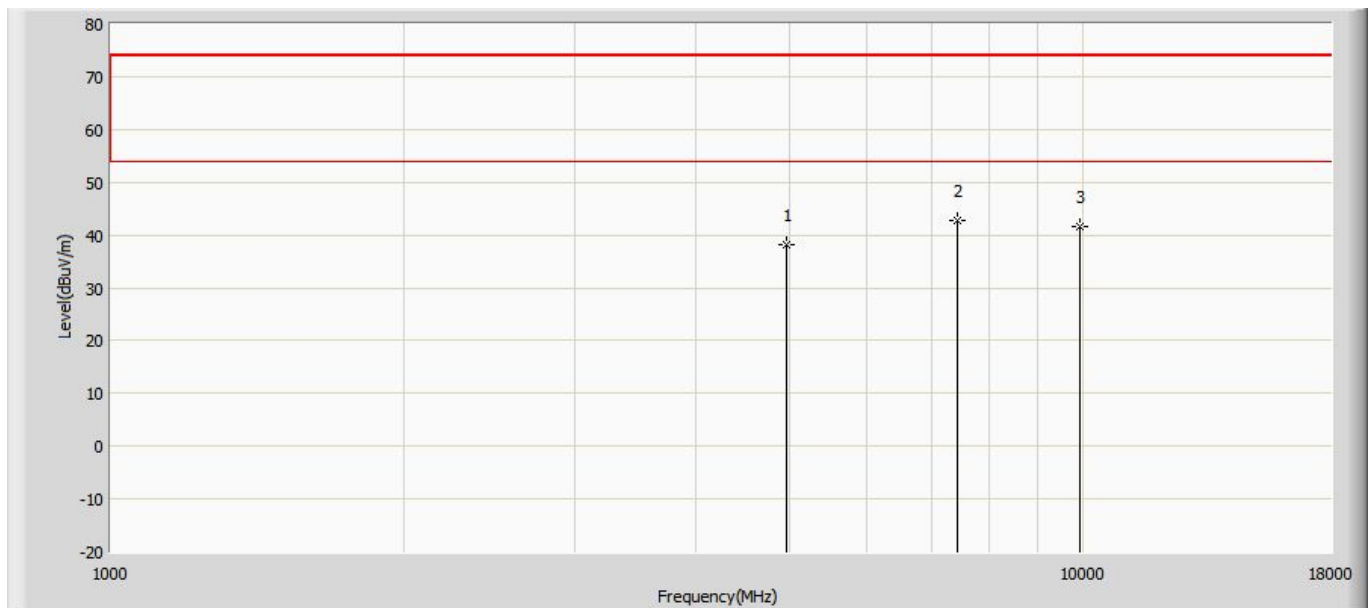

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	38.132	50.362	-35.868	74.000	-12.230	PK
2	*	7440.000	42.707	49.367	-31.293	74.000	-6.660	PK
3		9920.000	41.705	43.665	-32.295	74.000	-1.960	PK

Engineer: Slark	
Site: AC5	Time: 2017/09/04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

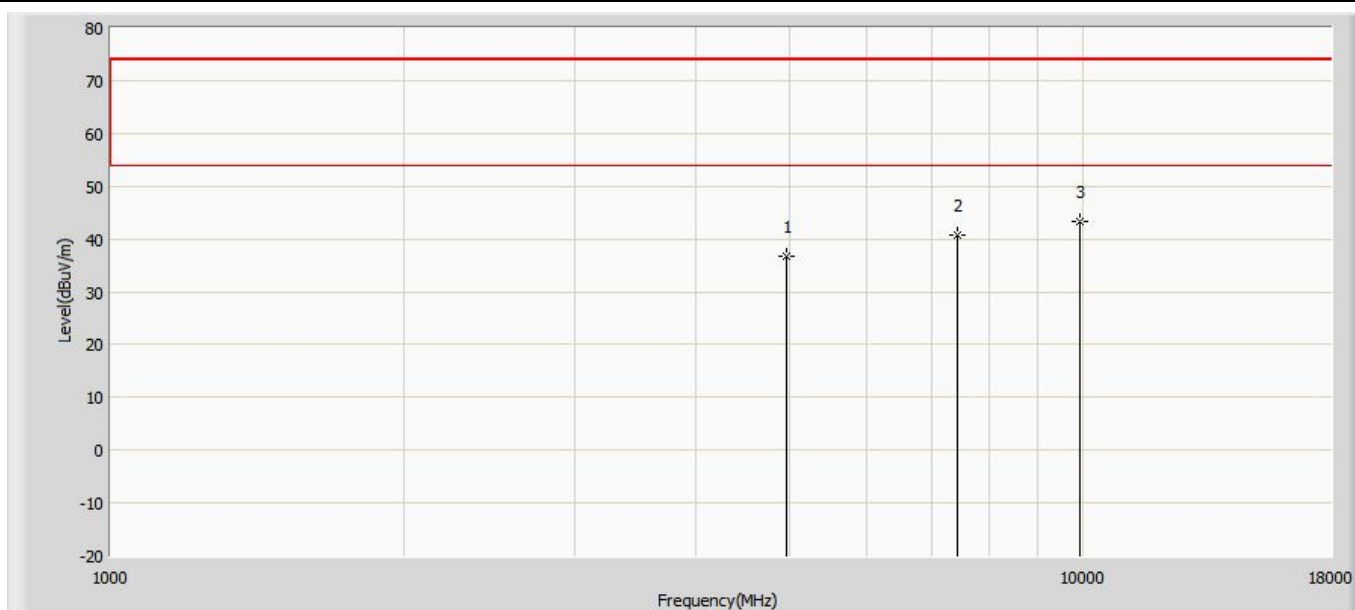

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	36.792	49.022	-37.208	74.000	-12.230	PK
2		7440.000	40.743	47.403	-33.257	74.000	-6.660	PK
3	*	9920.000	43.297	45.257	-30.703	74.000	-1.960	PK

Note: All spurious emission were within 3dB of the original report.


## 5. Radiated Emission Band Edge

### 5.1. Test Equipment

Radiated Emission Band Edge/ AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2017.07.16	2018.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2017.05.03	2018.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2017.07.12	2018.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.02.23	2019.02.22
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.02.28	2018.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.02.28	2018.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.05	2018.01.04
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

## 5.2. Test Setup

Above 1GHz Test Setup:

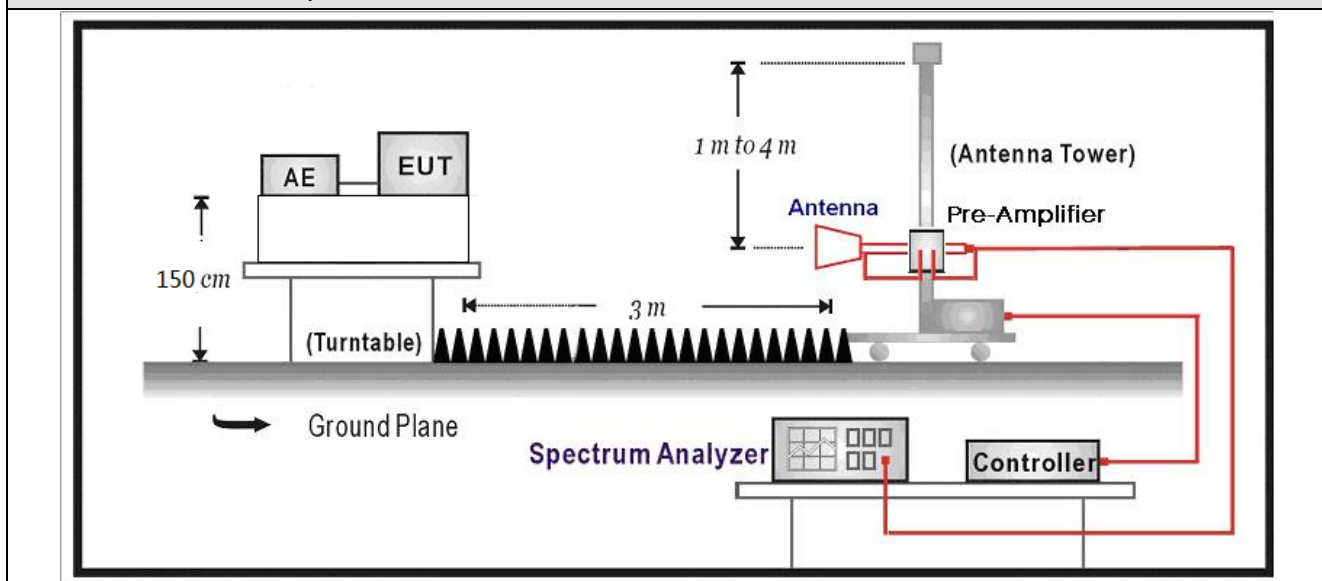

## 5.3. Limit

Band edge Limit

Frequency bands (MHz)	Detector	Limit (dB $\mu$ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3







Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

#### 5.4. Test Procedure

Test Method						
	References Rule			Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10			6.10	Band-edge testing	
	<input checked="" type="checkbox"/>	ANSI C63.10		6.10.5	Restricted-band band-edge measurements	
	<input type="checkbox"/>	ANSI C63.10		6.10.6	Marker-delta method	
<input checked="" type="checkbox"/>	ANSI C63.10			11.12	Emissions in restricted frequency bands	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.12.1	Radiated emission measurements	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.12.2.7	Radiated spurious emission test	
<input type="checkbox"/>	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
<input type="checkbox"/>	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
<input checked="" type="checkbox"/>	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		<input type="checkbox"/>	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			<input type="checkbox"/>	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			<input type="checkbox"/>	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold




## 5.5. EUT test definition

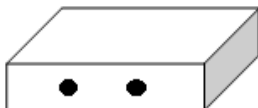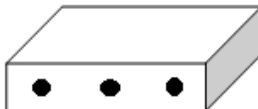Item	Radiated Emission Band Edge			
Device Category	<input checked="" type="checkbox"/>	Fixed position use		
	<input type="checkbox"/>	Mobile position use		
Test mode	Mode 1			
Test method	<input checked="" type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input checked="" type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input type="checkbox"/>	Conducted		
	<input type="checkbox"/>	Chain 1		
				
	<input type="checkbox"/>	Chain 1	Chain 2	
				
	<input type="checkbox"/>	Chain 1	Chain 2	Chain 3
				


## 5.6. Test Result

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

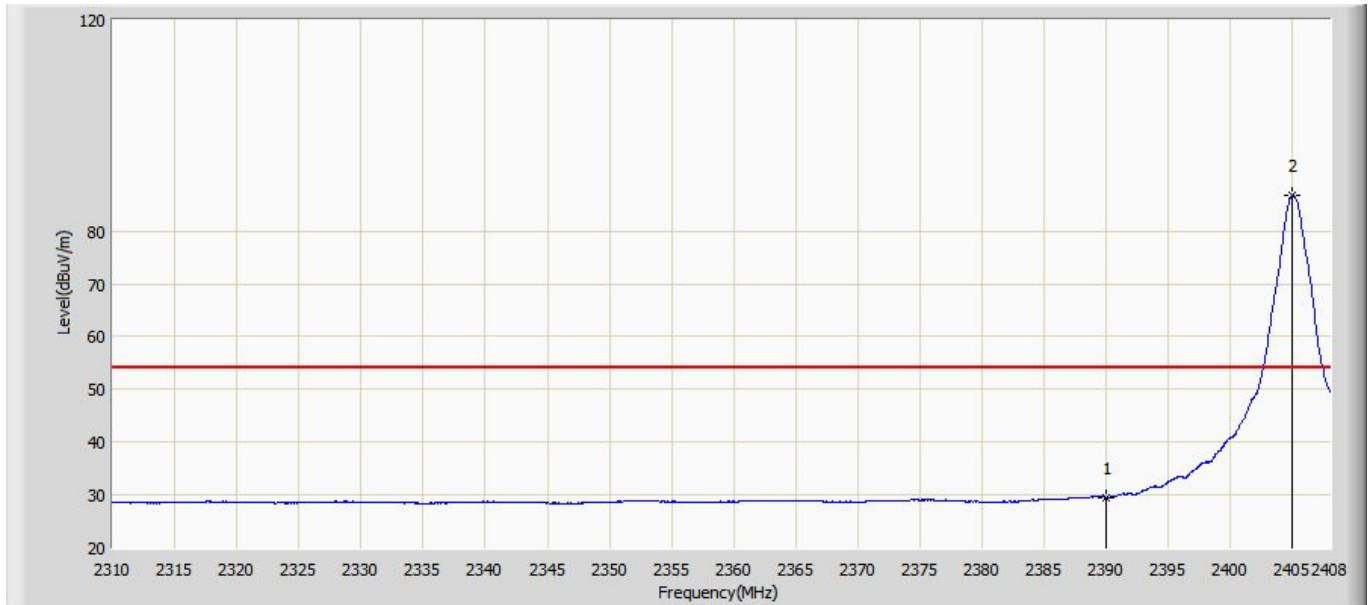


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	29.580	0.532	-24.420	54.000	29.048	AV
2	*	2405.011	86.656	57.728	N/A	N/A	28.928	AV

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

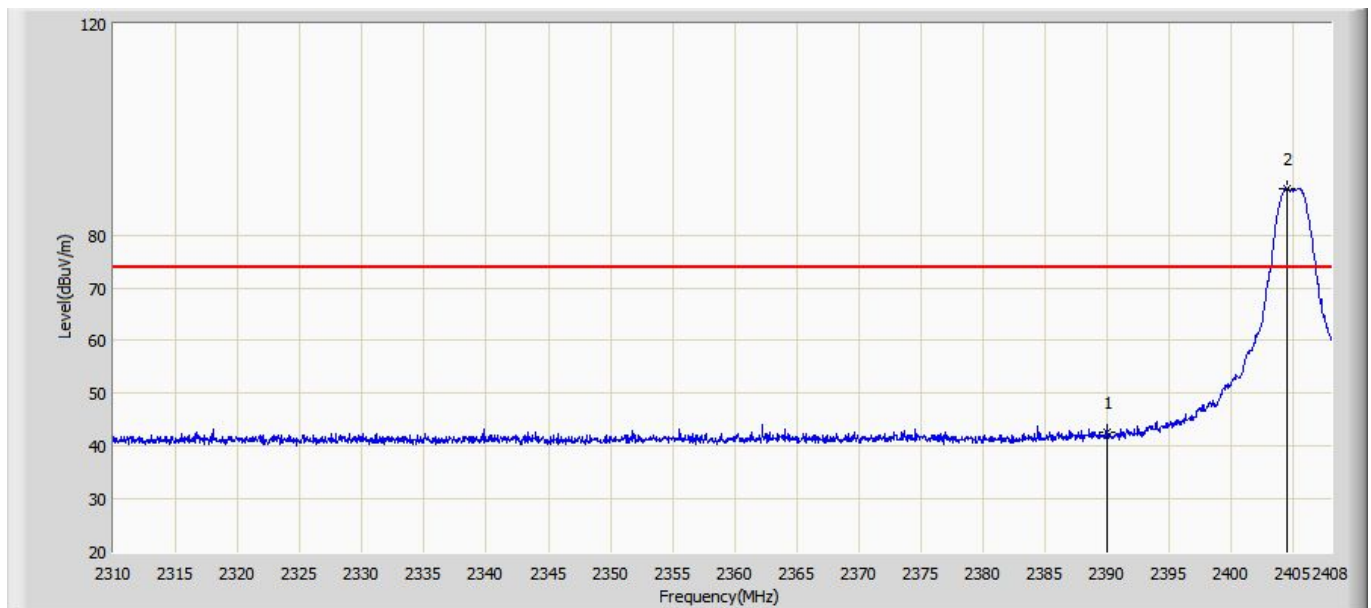


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	42.517	13.469	-31.483	74.000	29.048	PK
2	*	2404.521	88.800	59.867	N/A	N/A	28.933	PK

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

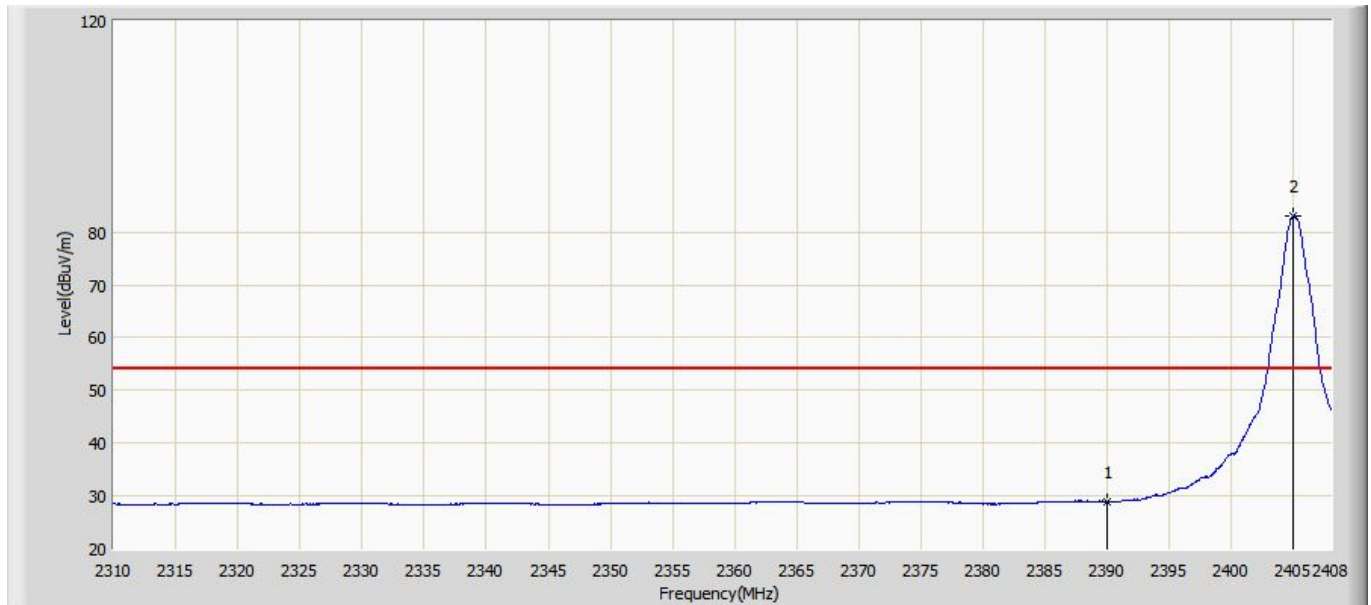


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	28.914	-0.134	-25.086	54.000	29.048	AV
2	*	2404.962	83.016	54.088	N/A	N/A	28.928	AV

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2405MHz by Zigbee	

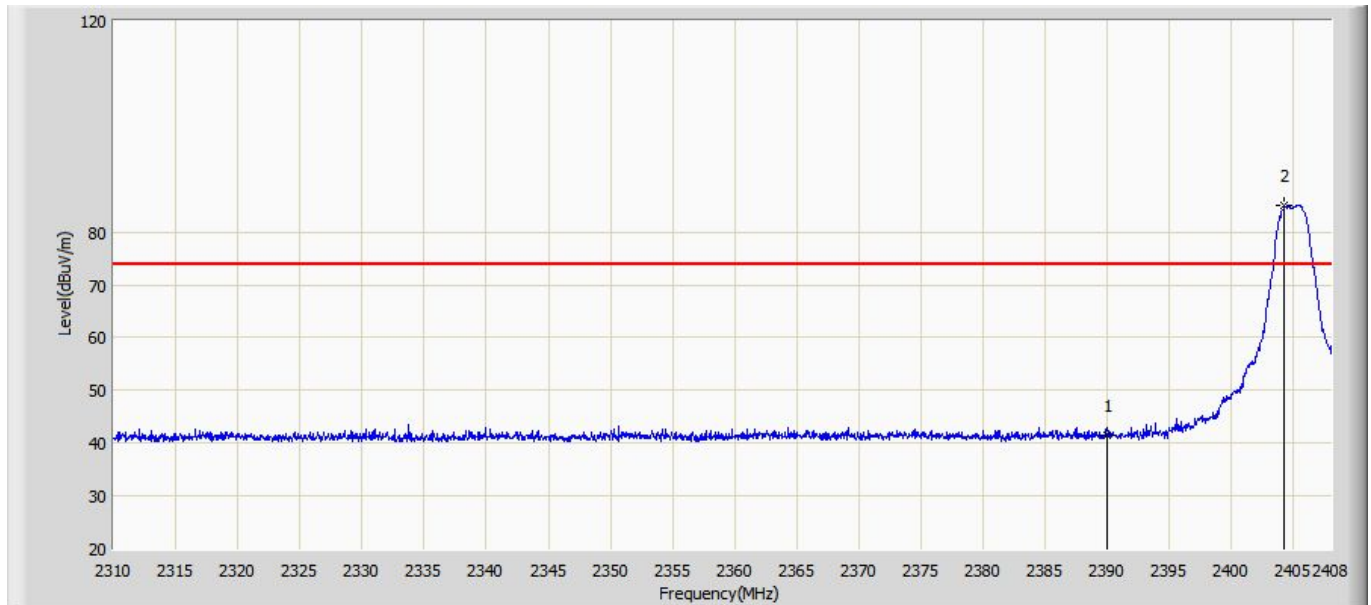


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	41.438	12.390	-32.562	74.000	29.048	PK
2	*	2404.276	84.931	55.995	N/A	N/A	28.936	PK

Engineer: Slark	
Site: AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2475MHz by Zigbee	

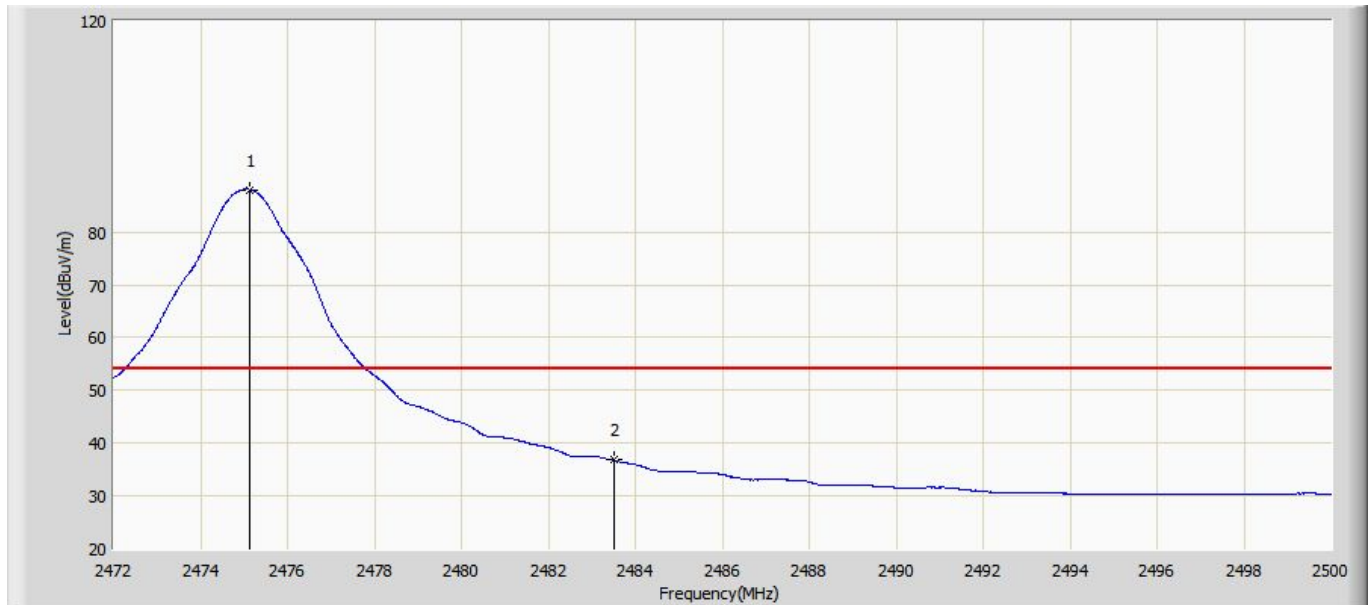


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2475.122	88.048	57.861	N/A	N/A	30.187	AV
2		2483.500	36.814	6.330	-17.186	54.000	30.484	AV

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2475MHz by Zigbee	

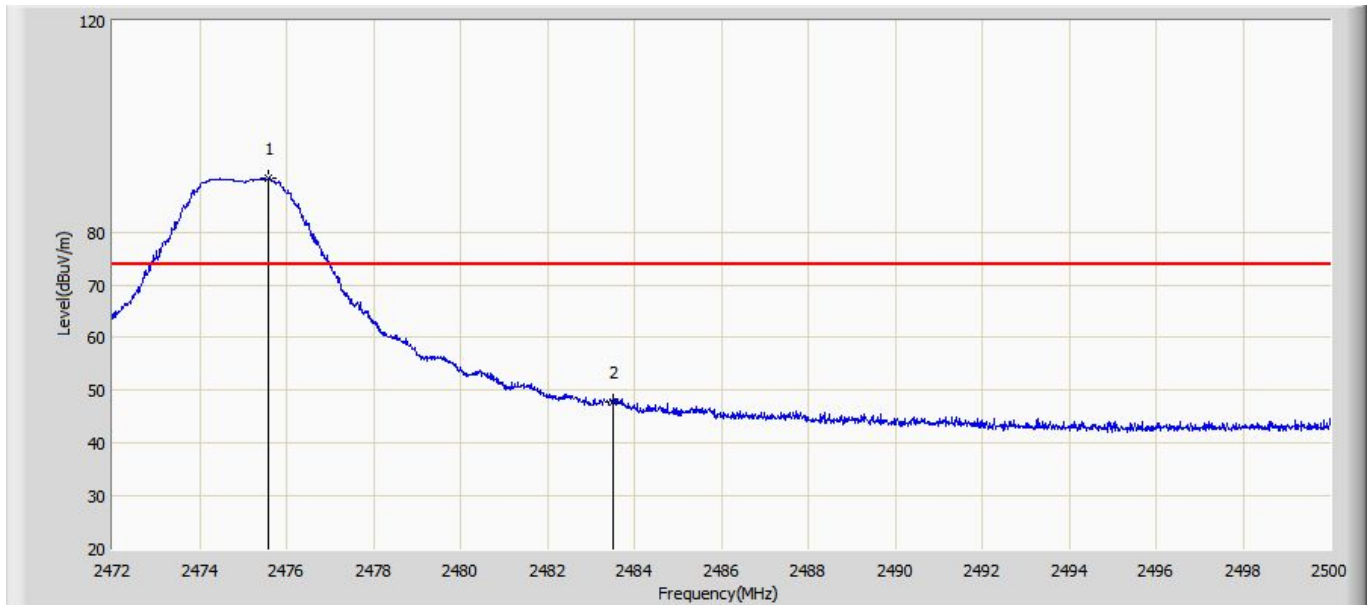

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2475.598	90.079	59.850	N/A	N/A	30.229	PK
2		2483.500	47.697	17.213	-26.303	74.000	30.484	PK


Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2475MHz by Zigbee	

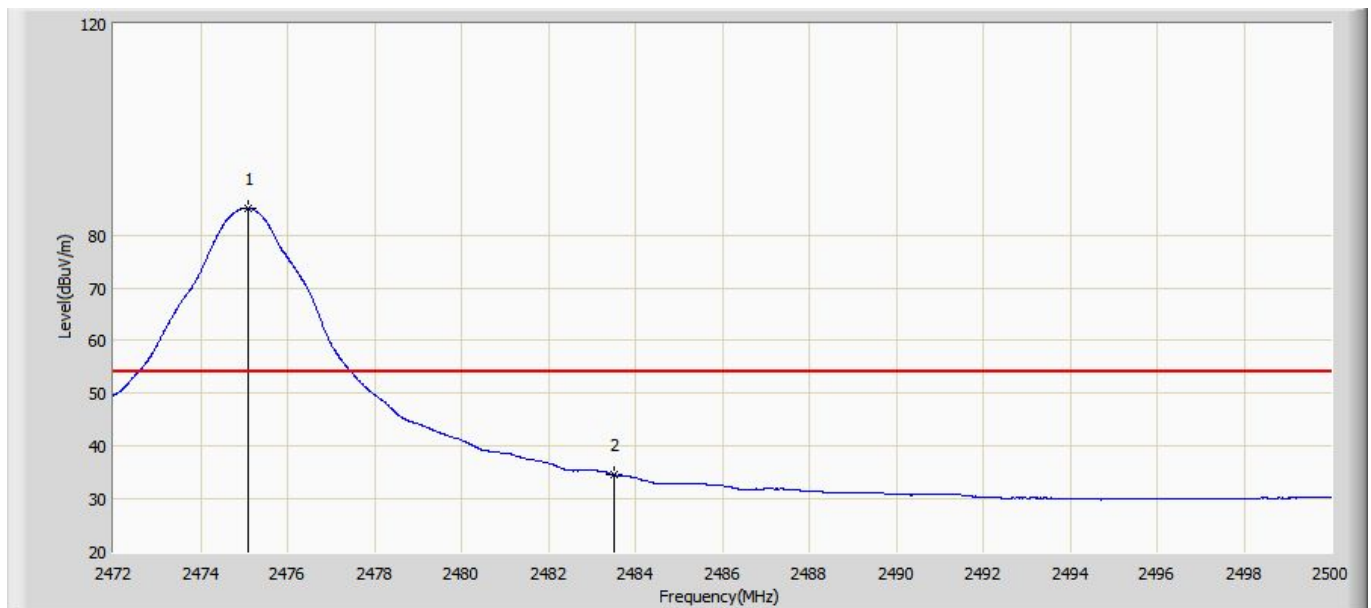

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2475.094	85.041	54.856	N/A	N/A	30.185	AV
2		2483.500	34.608	4.124	-19.392	54.000	30.484	AV




Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2475MHz by Zigbee	

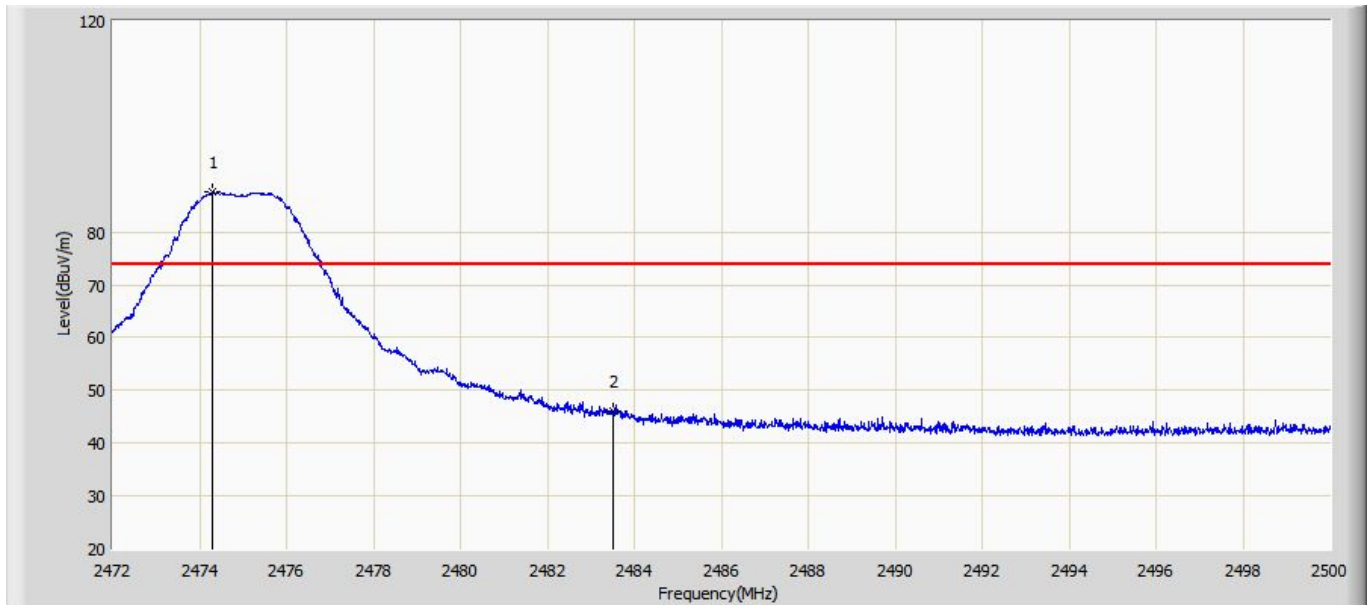


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2474.296	87.581	57.466	N/A	N/A	30.115	PK
2		2483.500	45.944	15.459	-28.056	74.000	30.484	PK

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

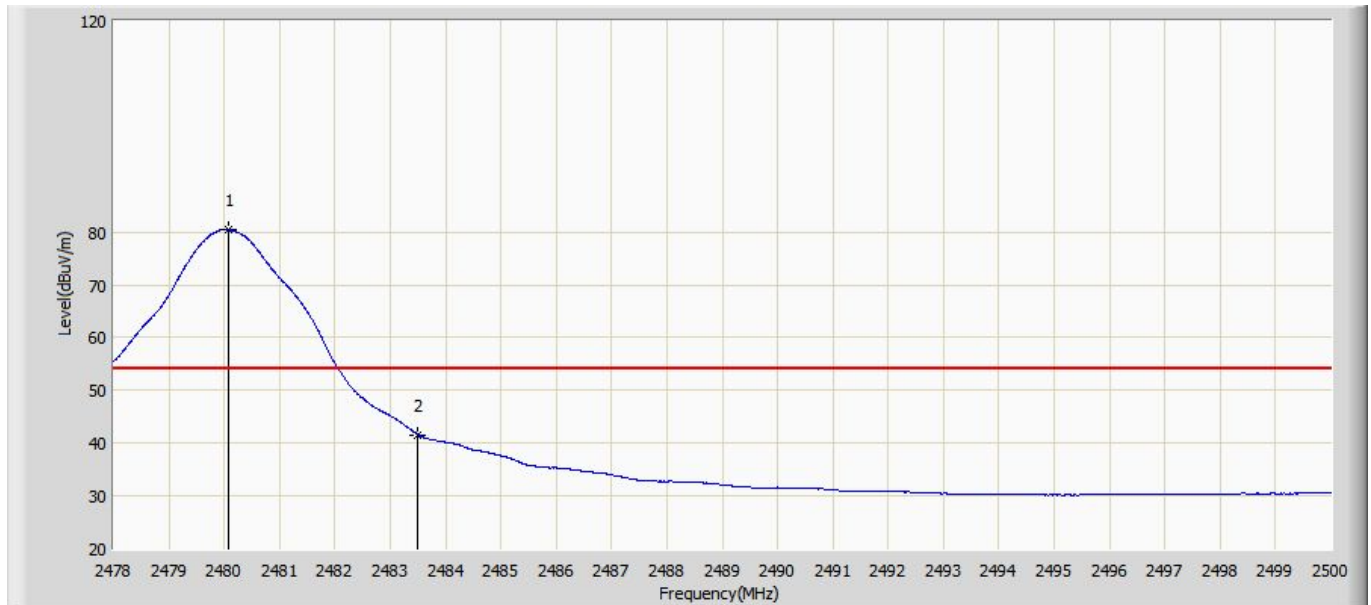


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.090	80.411	49.896	N/A	N/A	30.515	AV
2		2483.500	41.617	11.133	-12.383	54.000	30.484	AV

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

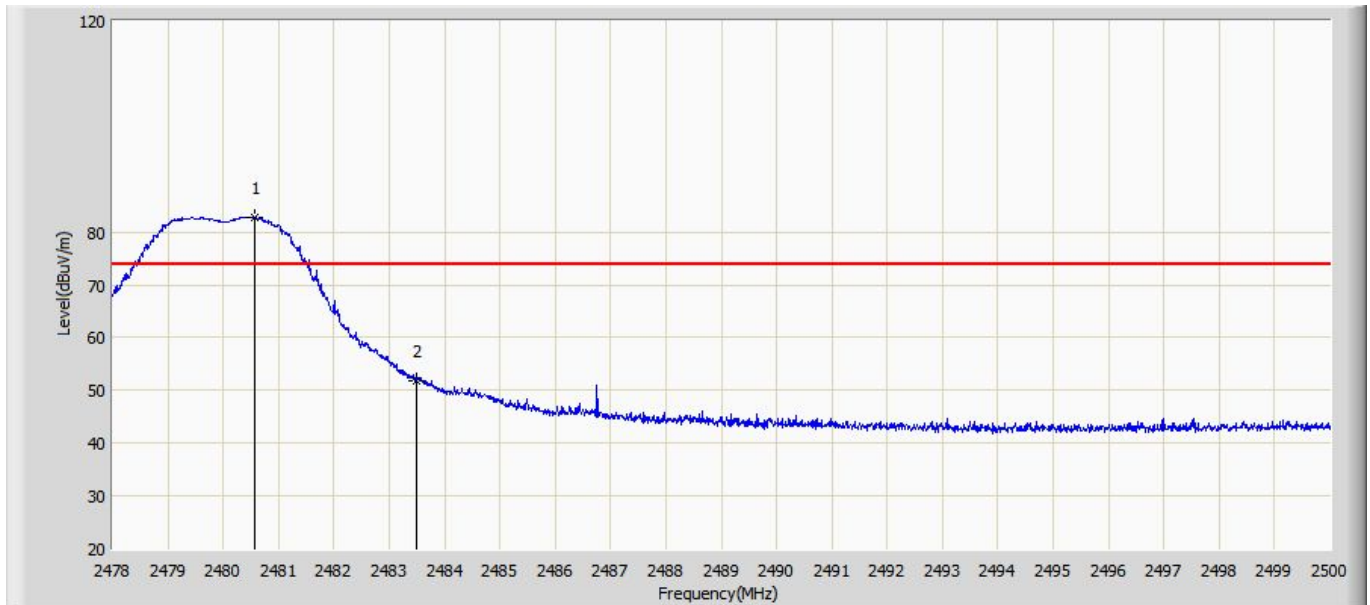


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.574	82.639	52.128	N/A	N/A	30.511	PK
2		2483.500	51.689	21.205	-22.311	74.000	30.484	PK

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

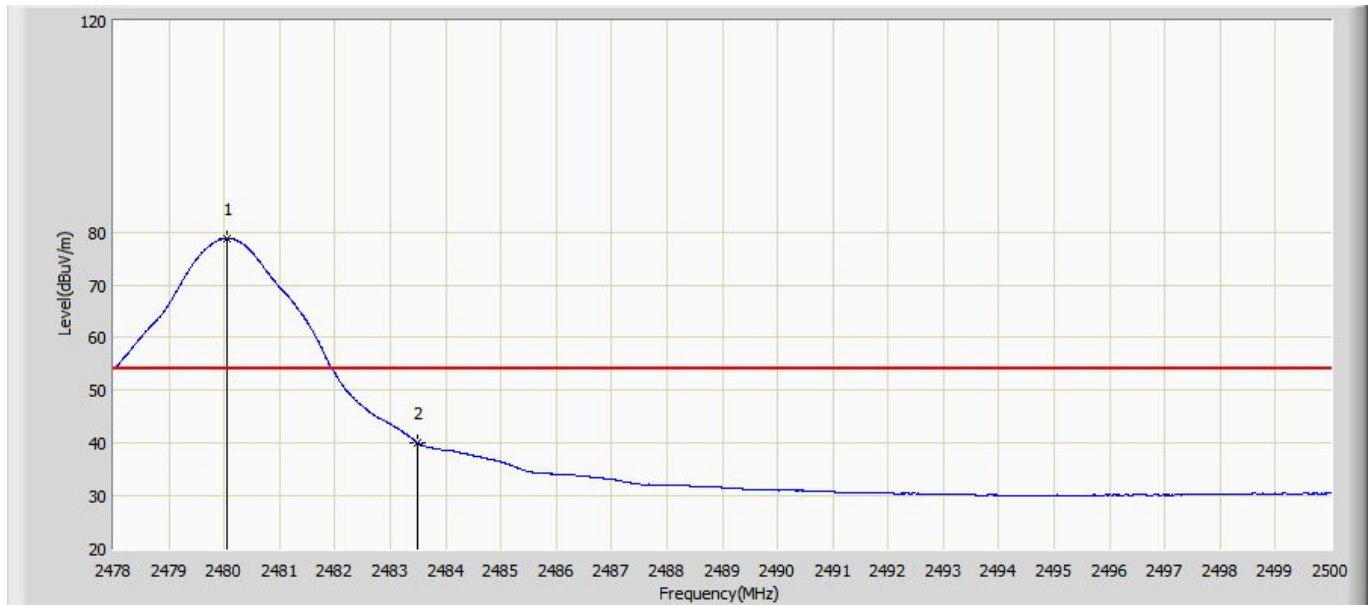

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.057	78.736	48.221	N/A	N/A	30.515	AV
2		2483.500	40.024	9.540	-13.976	54.000	30.484	AV

Engineer: Slark	
Site:AC5	Time: 2017/09/14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by Zigbee	

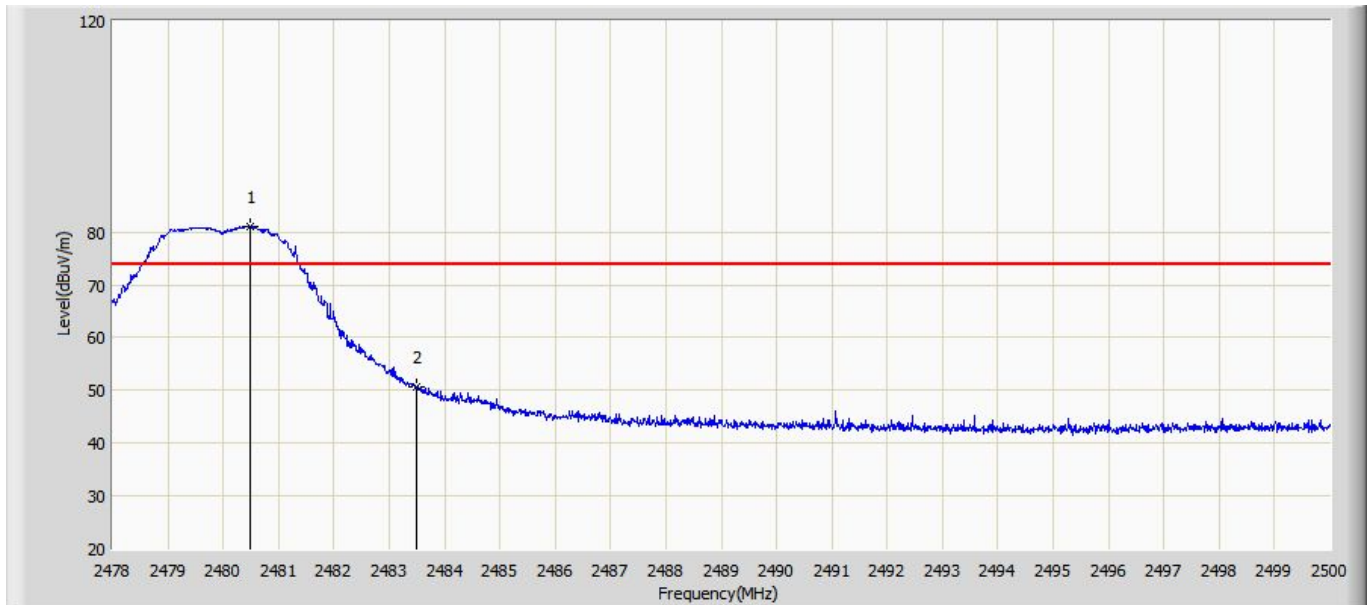

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.475	81.029	50.517	N/A	N/A	30.512	PK
2		2483.500	50.734	20.250	-23.266	74.000	30.484	PK


## 6. Fundamental emission output power

### 6.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.03	2018.01.02
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2016.10.14	2017.10.13
Power Sensor	Anritsu	MA2411B	0846014	2016.10.14	2017.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2017.04.10	2018.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 6.2. Test Setup

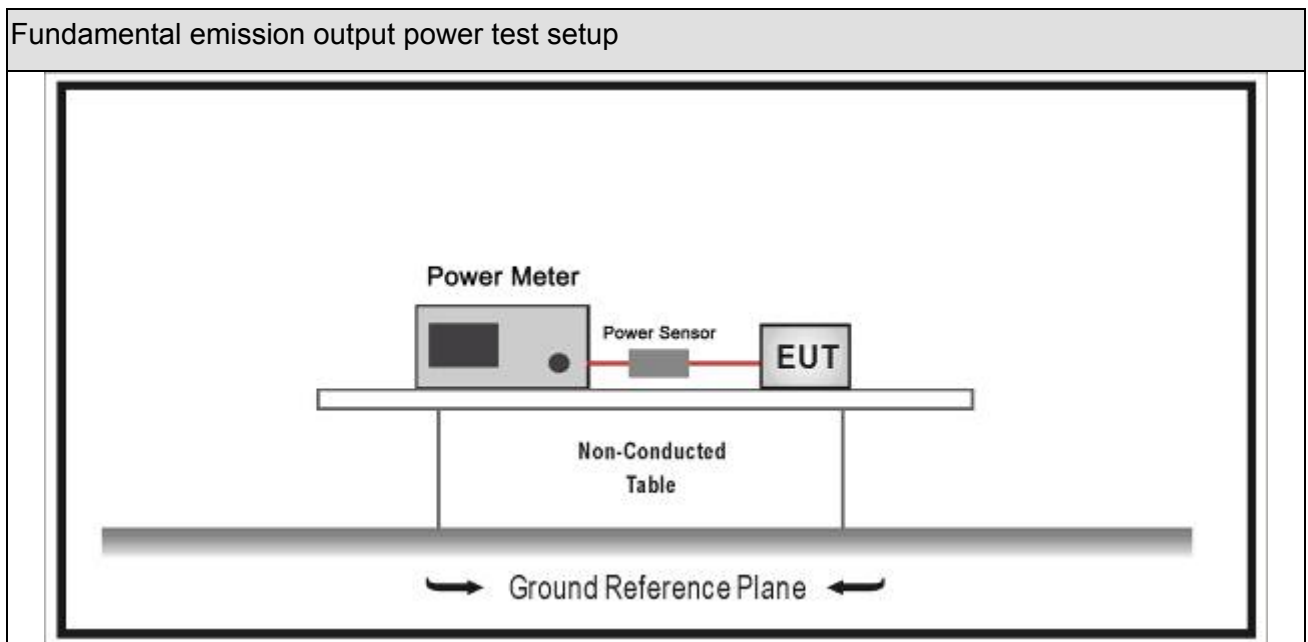

### 6.3. Limit







Fundamental emission output power Limit		
<input checked="" type="checkbox"/>	$G_{TX} < 6\text{dBi}$	$P_{out} \leq 30\text{dBm}$
<input type="checkbox"/>	$G_{TX} > 6\text{dBi}$	
<input type="checkbox"/>	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
<input type="checkbox"/>	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
<input type="checkbox"/>	emits multiple directional beams but does not do emit multiple directional beams simultaneously	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
<input type="checkbox"/>	operates simultaneously on multiple directional beams using the same or different frequency channels	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
<input type="checkbox"/>	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
Note 1 : $G_{TX}$ directional gain of transmitting antennas.		
Note 2 : $P_{out}$ is maximum peak conducted output power .		

## 6.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10			11.9	Fundamental emission output power	
	<input type="checkbox"/>	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method	
		<input type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		<input type="checkbox"/>	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		<input checked="" type="checkbox"/>	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			<input checked="" type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM
			<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G



## 6.5. EUT test definition

Item	Fundamental emission output power			
Device Category	<input checked="" type="checkbox"/>	Fixed position use		
	<input type="checkbox"/>	Mobile position use		
Test mode	Mode 1			
Test method	<input type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input checked="" type="checkbox"/>	Conducted		
	<input checked="" type="checkbox"/>	Chain 1		
				
	<input type="checkbox"/>	Chain 1	Chain 2	
				
	<input type="checkbox"/>	Chain 1	Chain 2	Chain 3
				

## 6.6. Test Result

Product Name	:	LED Lamp	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR8
Mode No.	:	9290012575A	Test Date	:	2017.09.14

Mode	Channel	Test Frequency (MHz)	Average Power Output (dBm)	Limit (dBm)	Result
1	11	2405	4.06	30	Pass
1	20	2450	4.16	30	Pass
1	25	2475	3.95	30	Pass
1	26	2480	-3.64	30	Pass

\_\_\_\_\_ The End \_\_\_\_\_