

3.6. Minimum Emission Bandwidth (6dBm Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration




Test Results

ANT1					
Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	17.81	≥500KHz	Pass
		157	17.80		
		165	17.79		
802.11n(HT20)	U-NII 3	149	17.81		
		157	17.80		
		165	17.81		
802.11n(HT40)	U-NII 3	151	36.52		
		159	36.50		
802.11ac(HT20)	U-NII 3	149	17.82		
		157	17.80		
		165	17.80		
802.11ac(HT40)	U-NII 3	151	36.52		
		159	36.52		
802.11ac(HT80)	U-NII 3	155	76.40		


ANT2

Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	17.81	≥500KHz	Pass
		157	17.81		
		165	17.81		
802.11n(HT20)	U-NII 3	149	17.81		
		157	17.81		
		165	17.81		
802.11n(HT40)	U-NII 3	151	36.53		
		159	36.52		
802.11ac(HT20)	U-NII 3	149	17.82		
		157	17.81		
		165	17.81		
802.11ac(HT40)	U-NII 3	151	36.52		
		159	36.53		
802.11ac(HT80)	U-NII 3	155	76.10		


Test plot as follows:

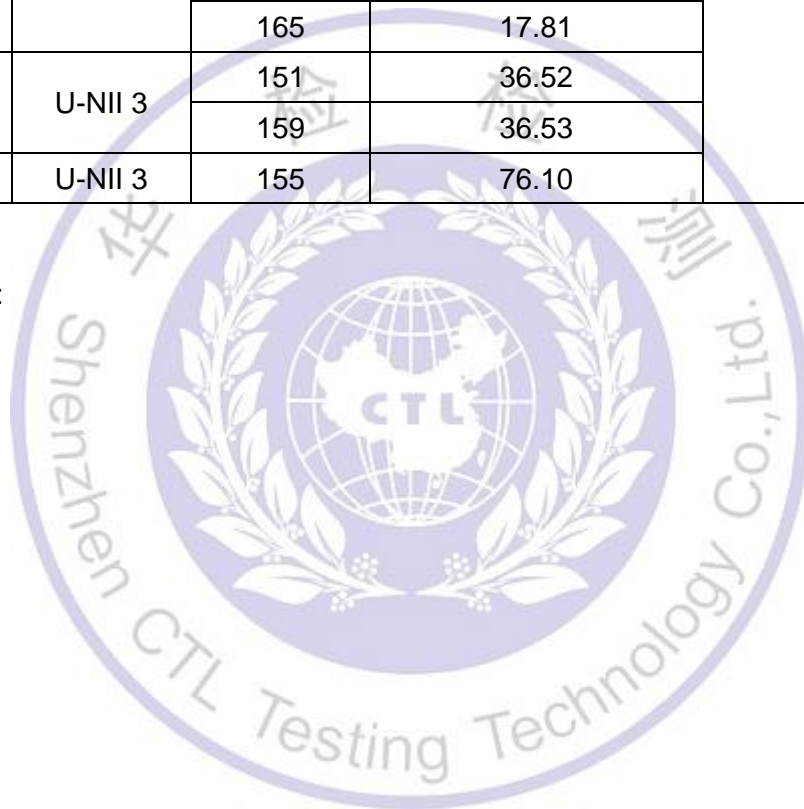


ANT1

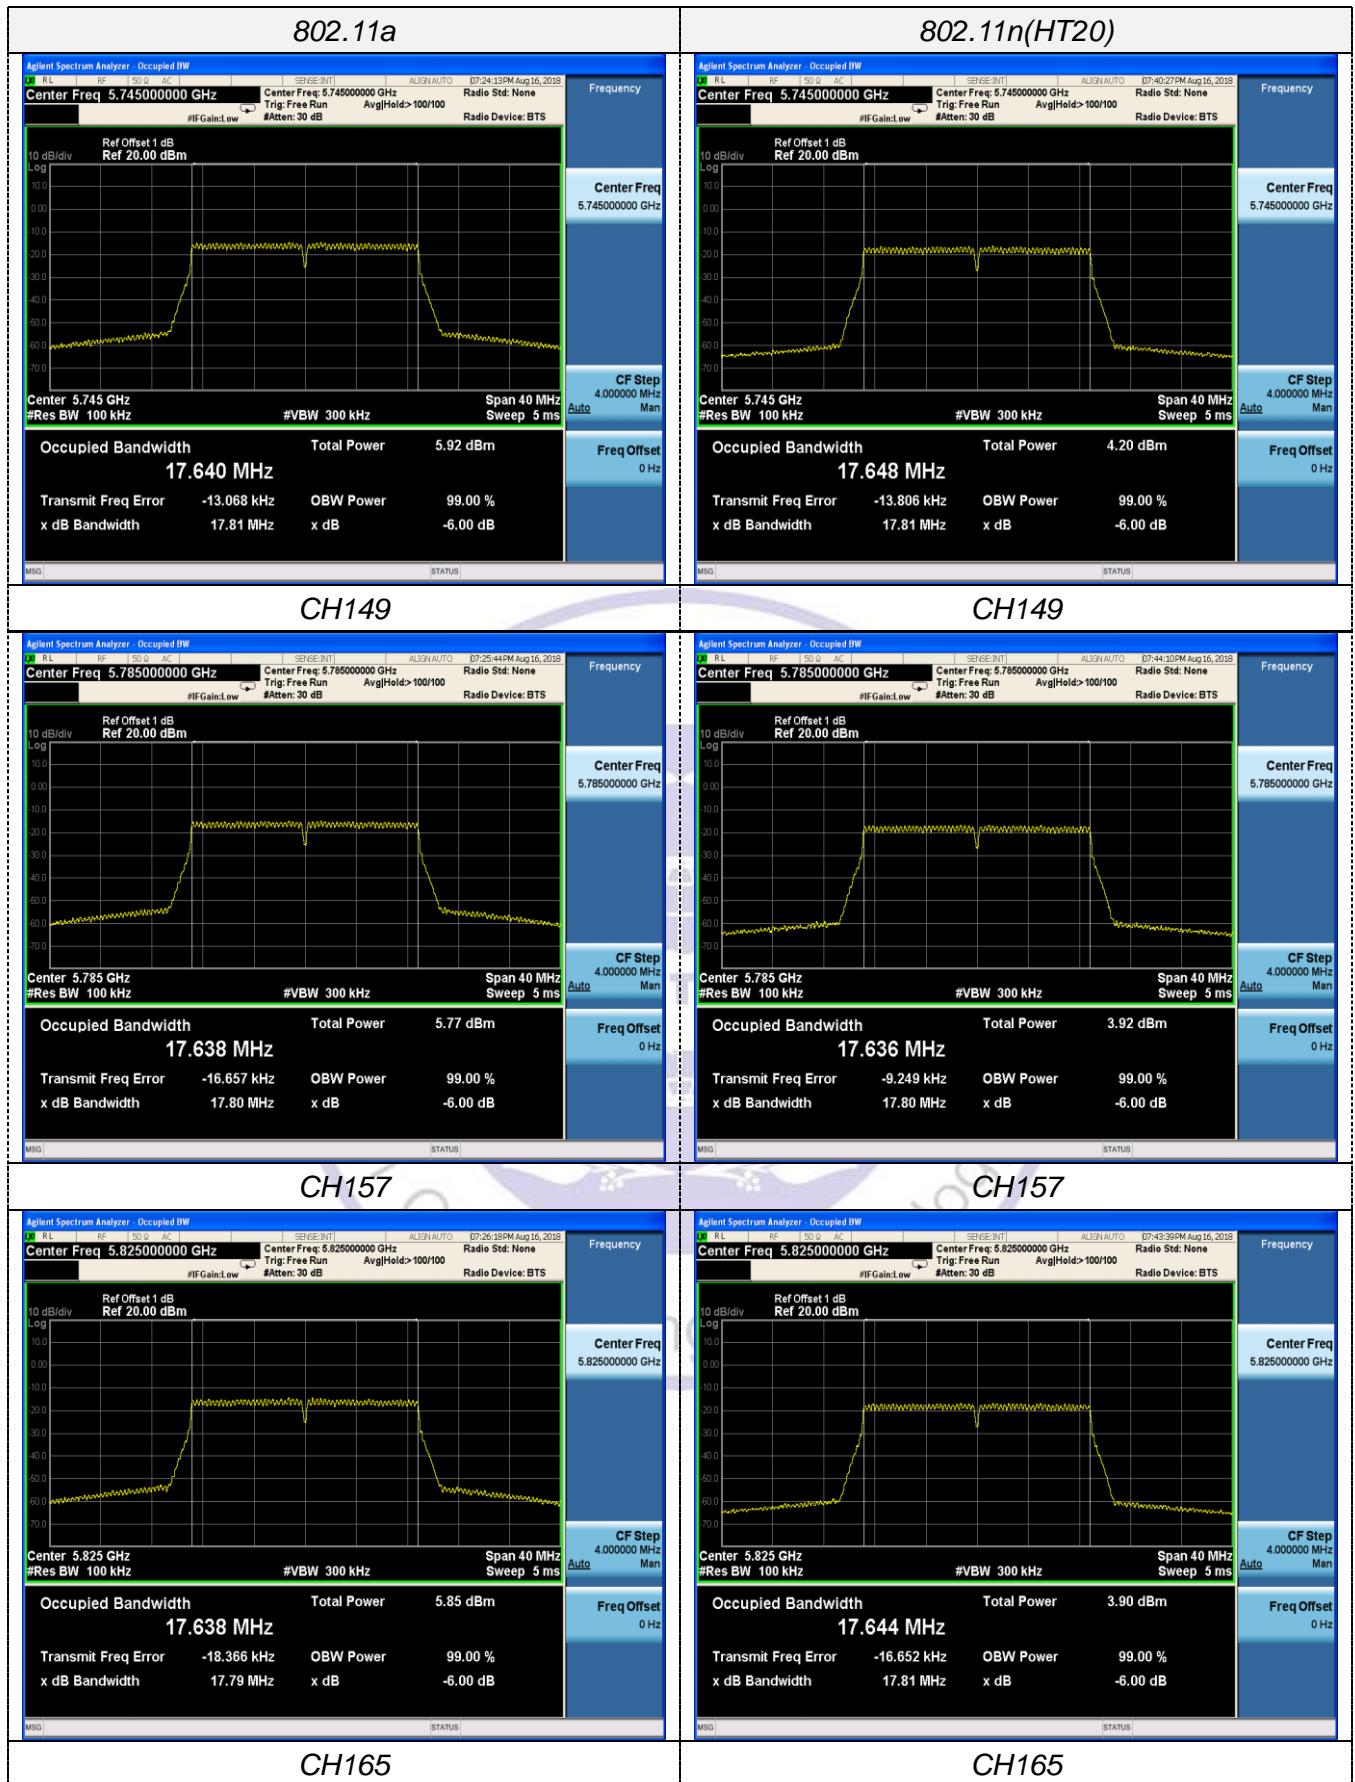


802.11n(HT40)

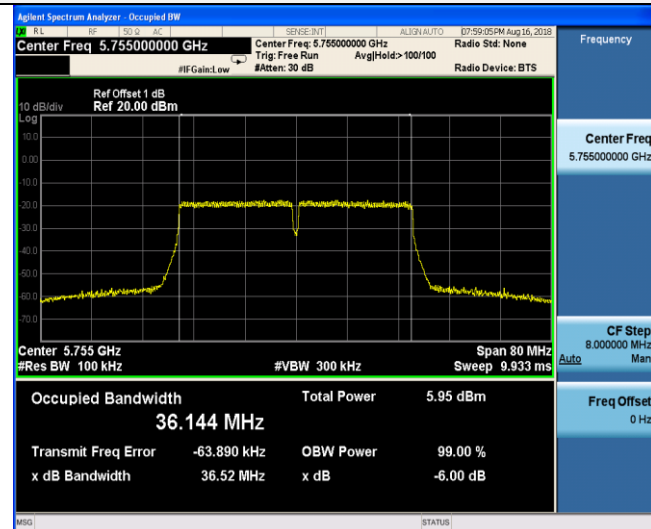


802.11ac(HT20)

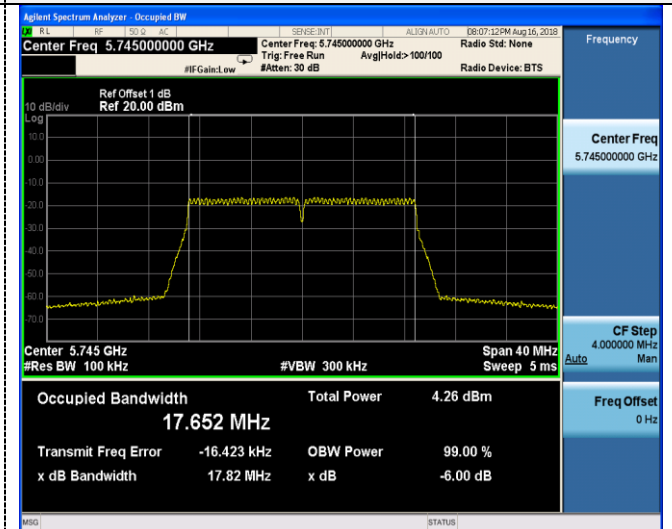


CH151

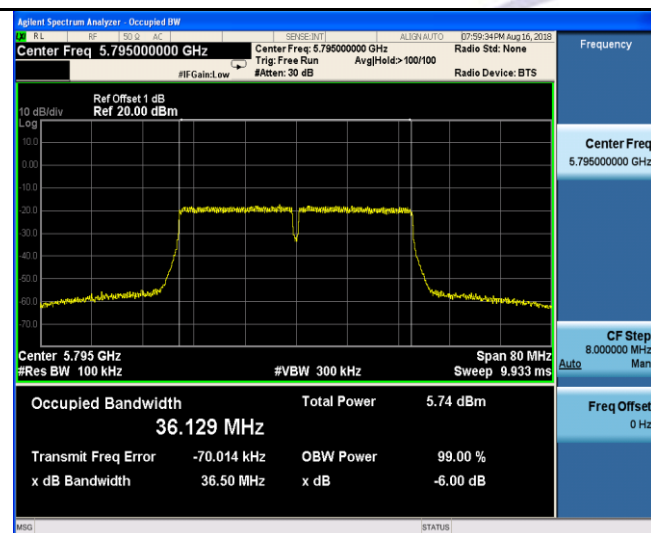


CH149

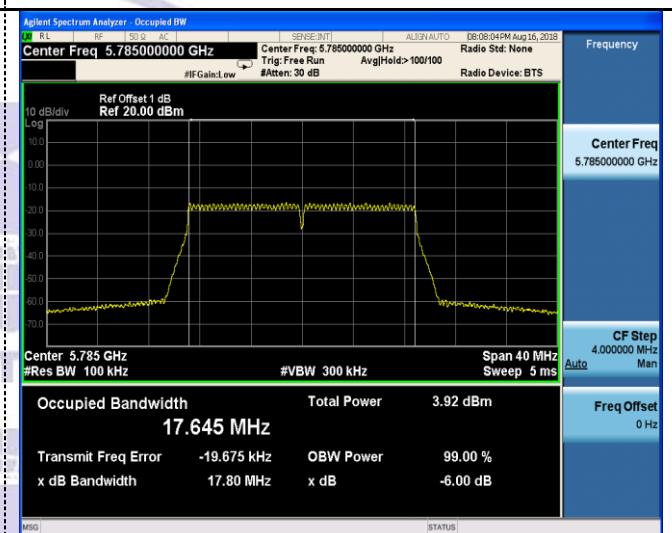


CH159

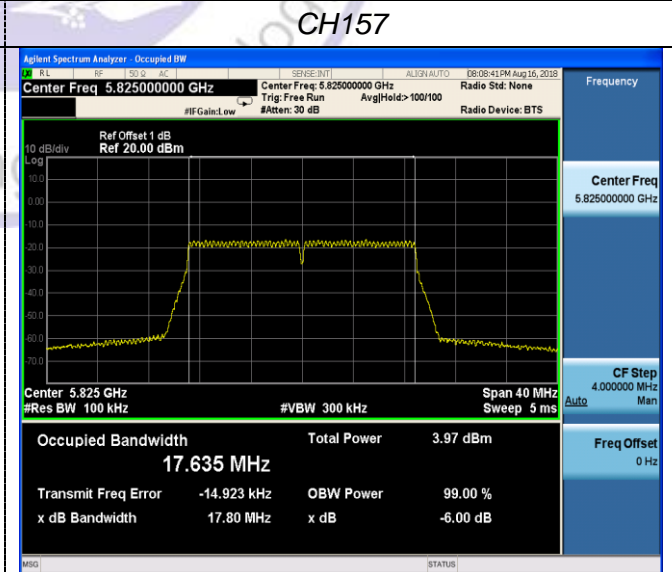


CH165

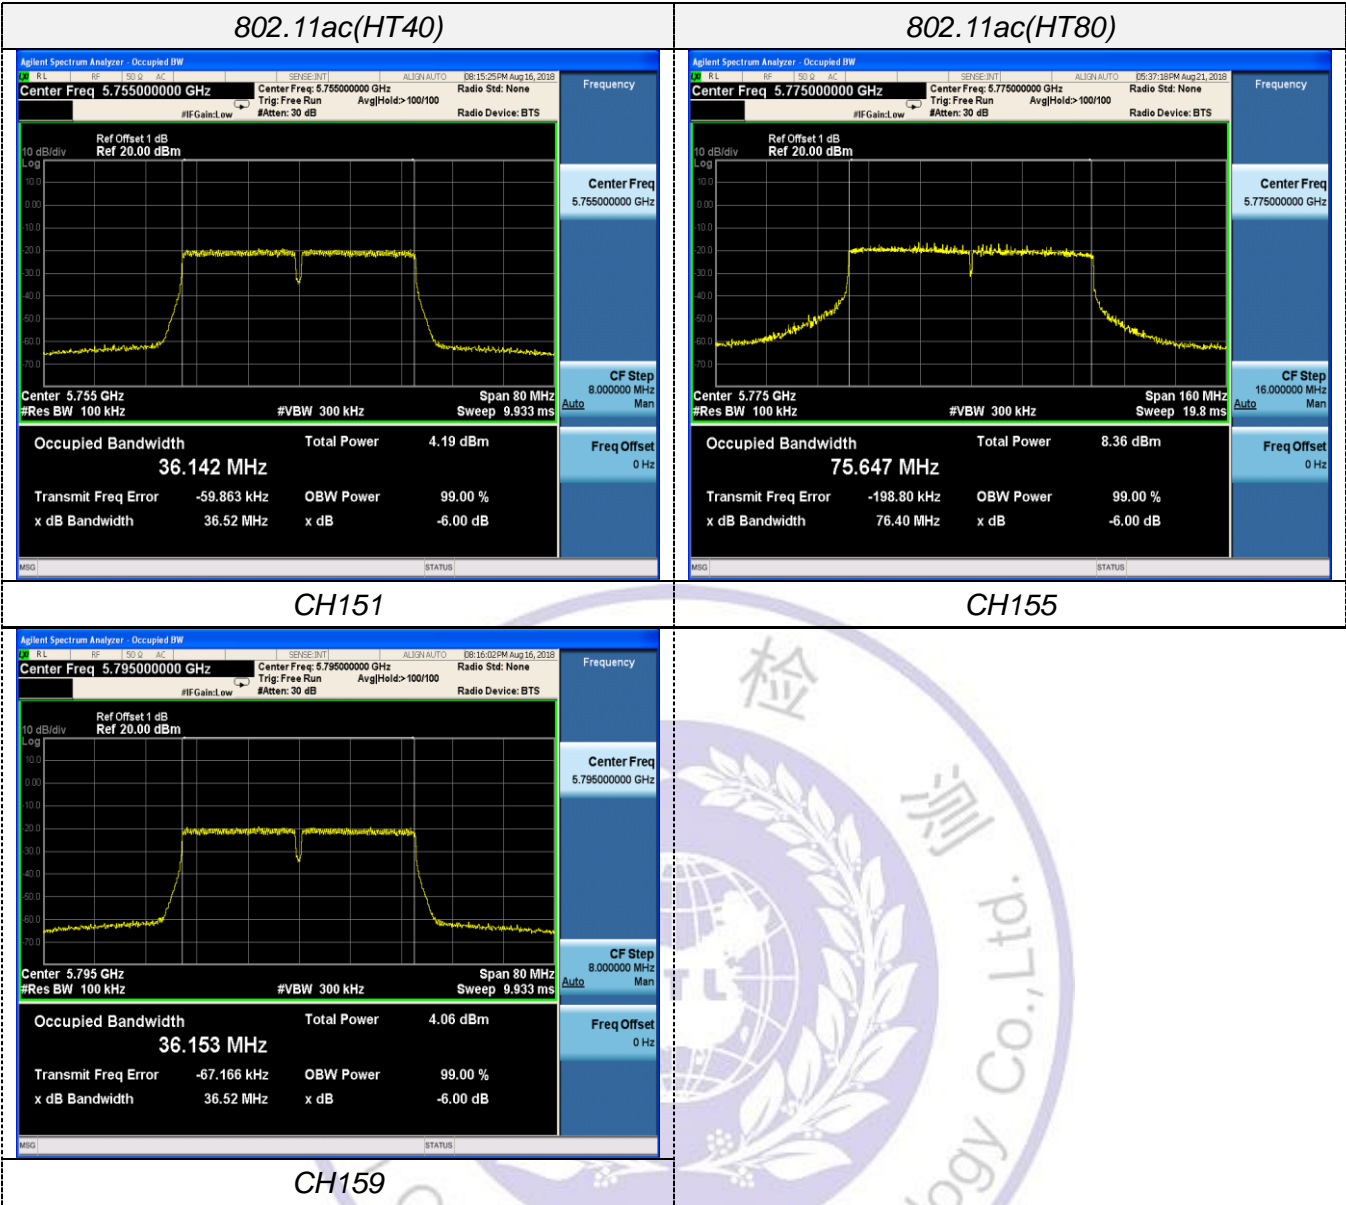


ANT2

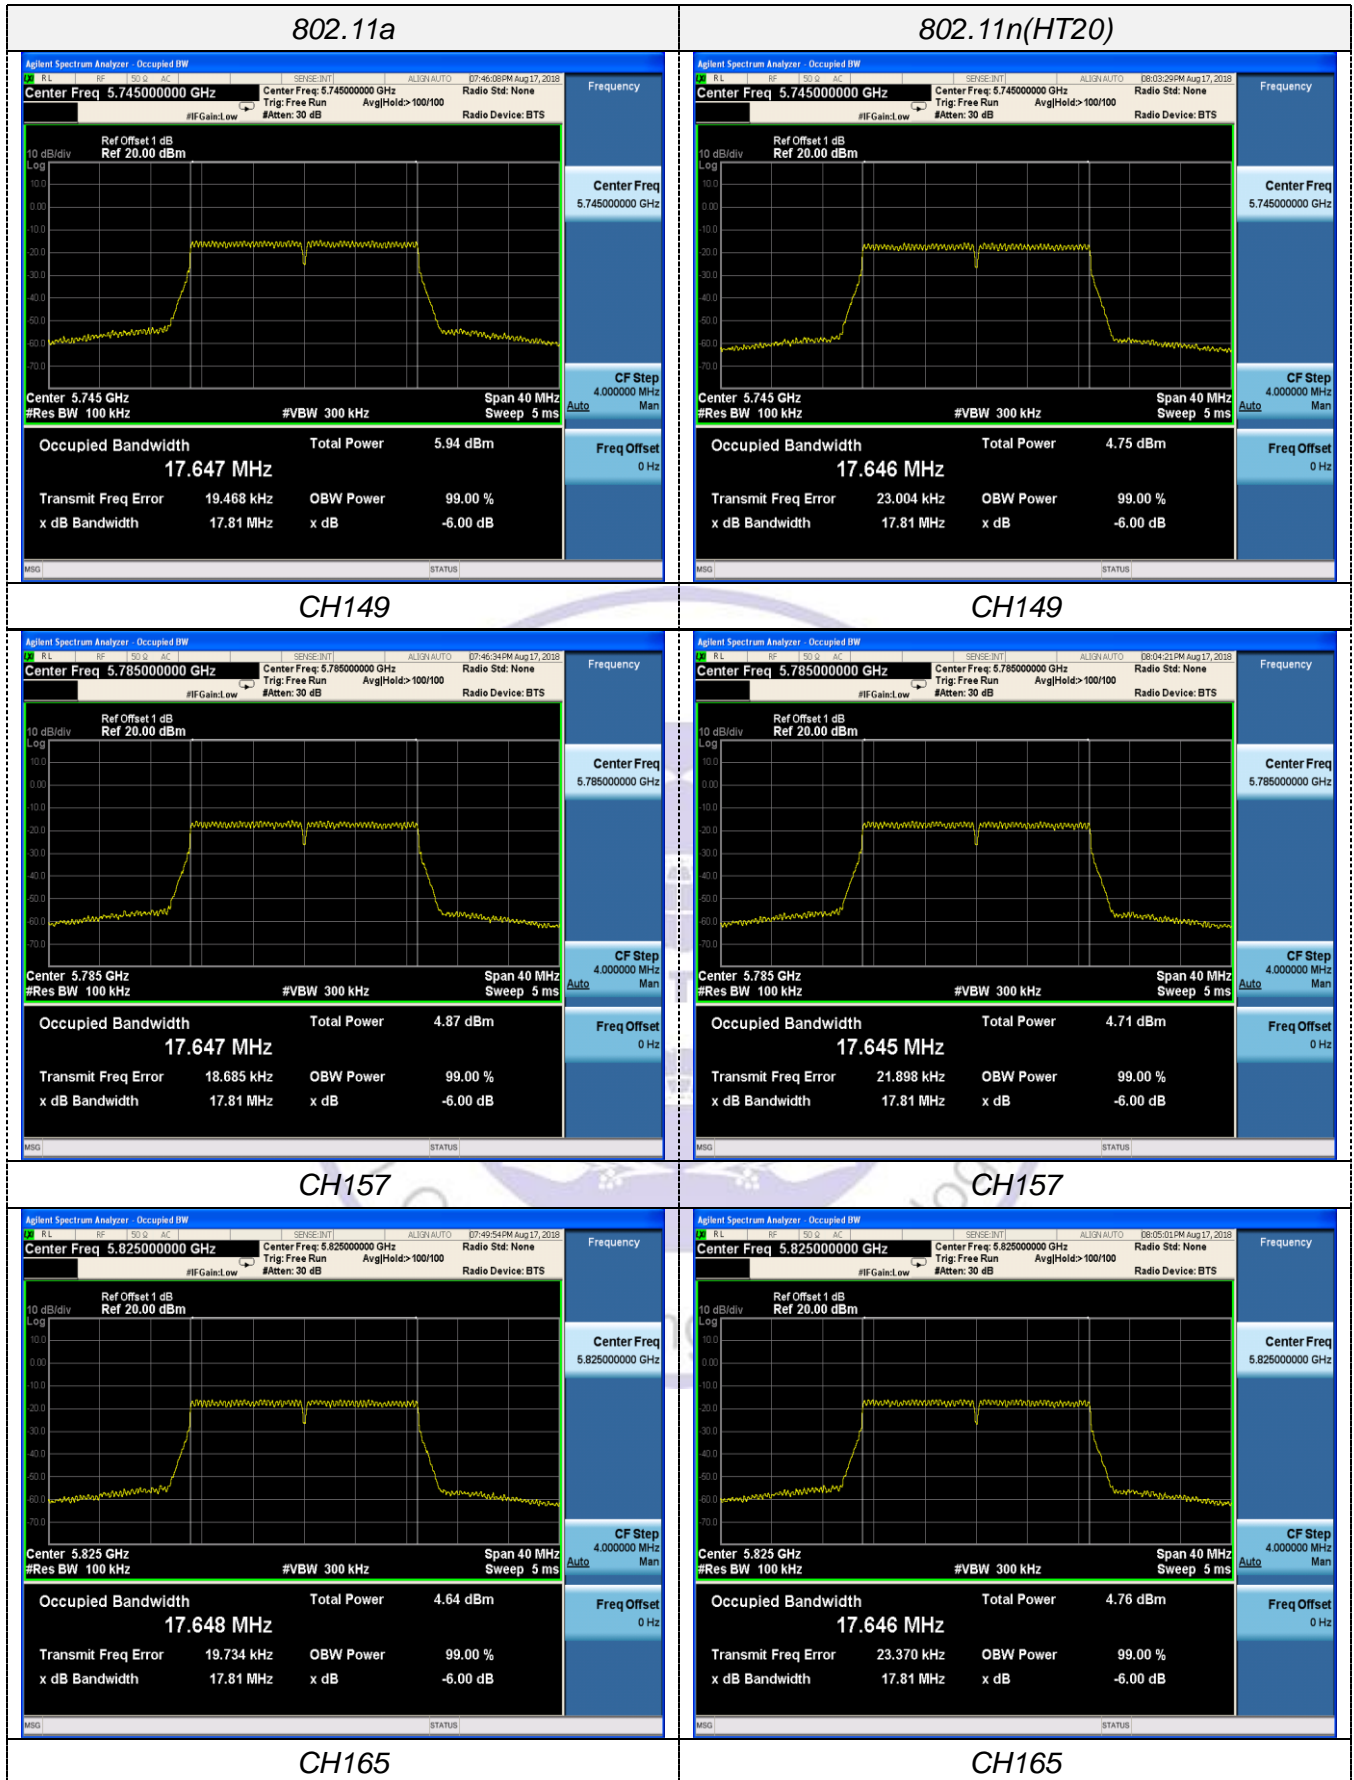


802.11n(HT40)

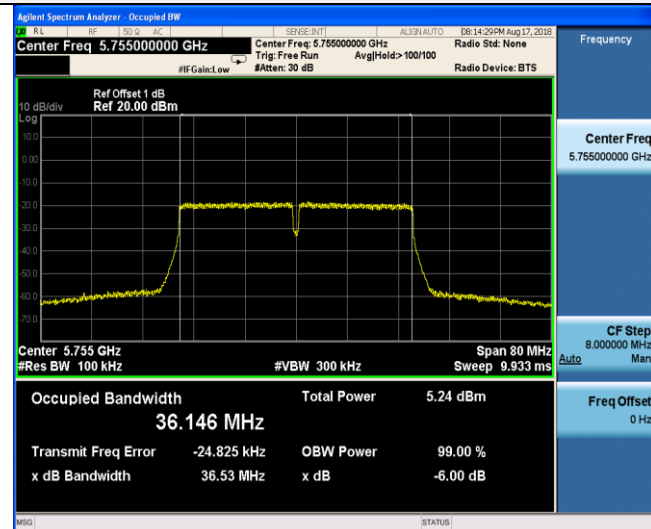


802.11ac(HT20)

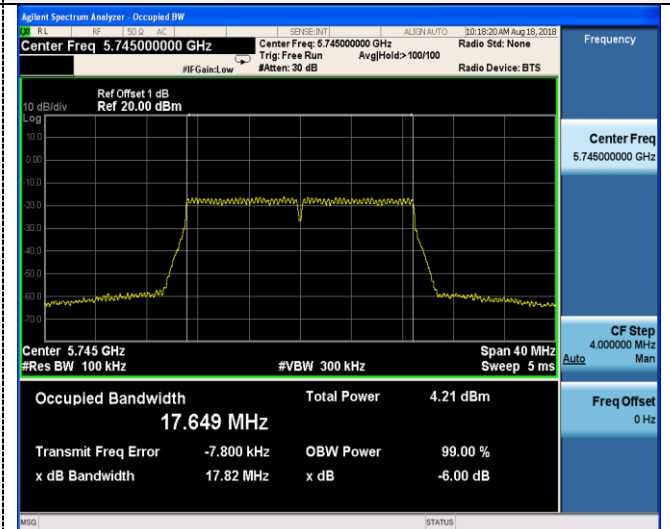


CH151

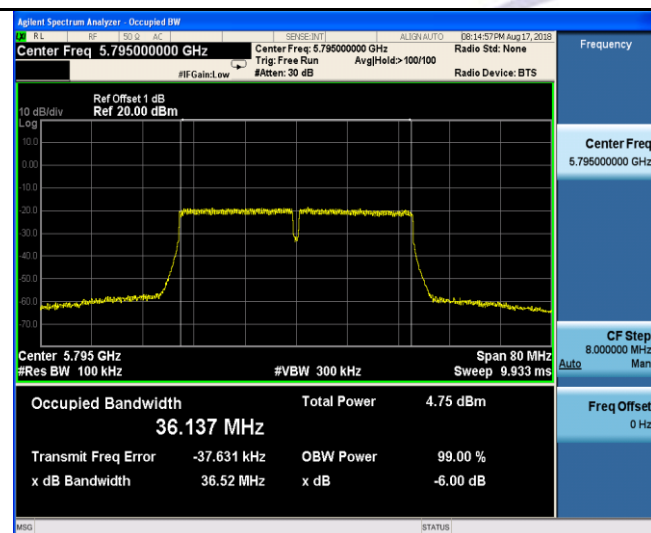



CH149

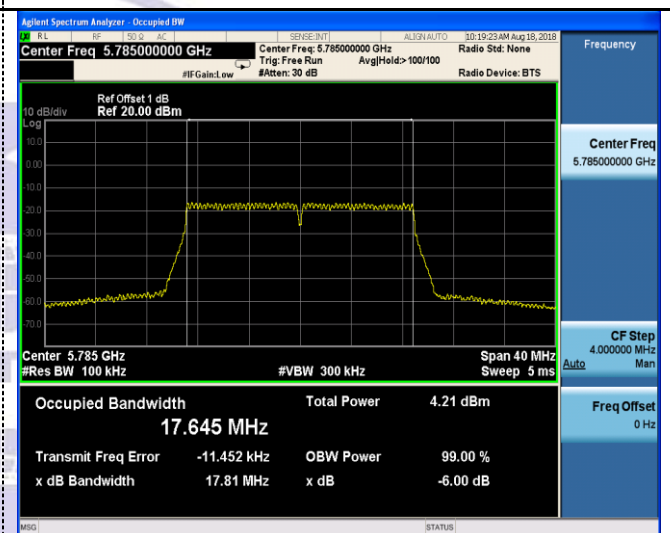

CH159

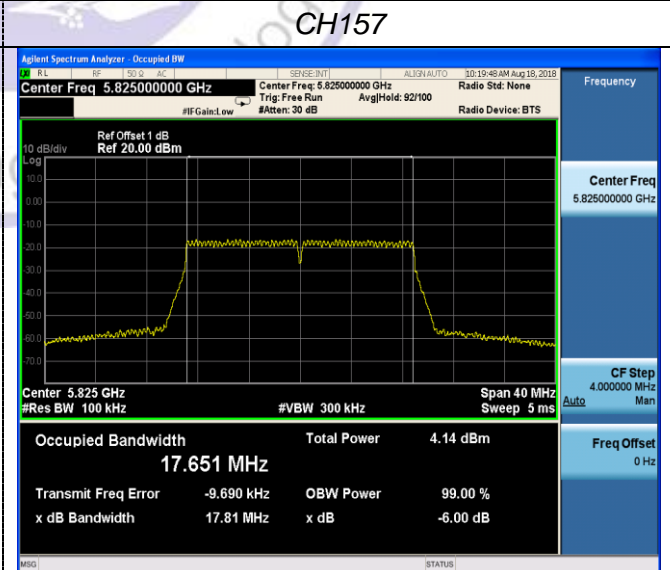

CH165

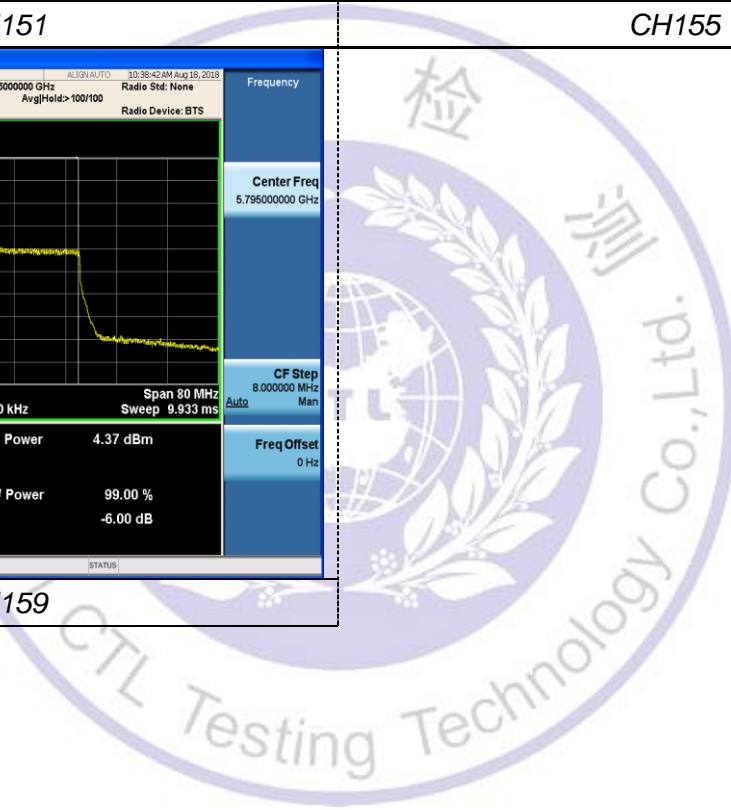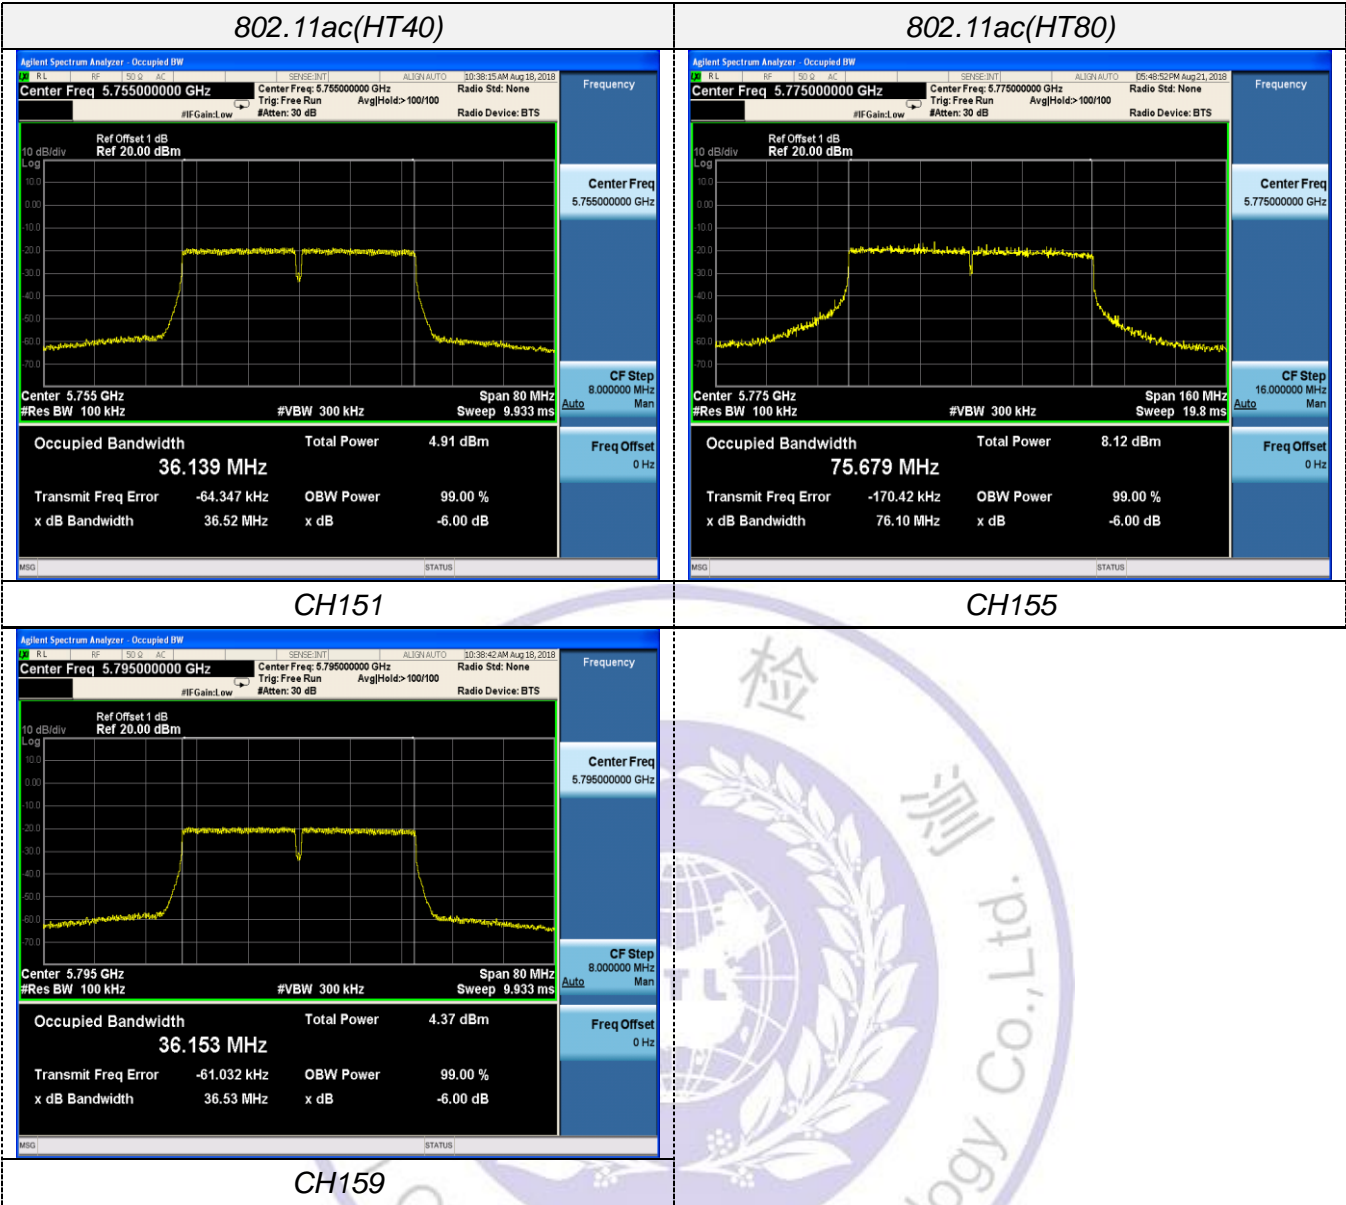


3.7. Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

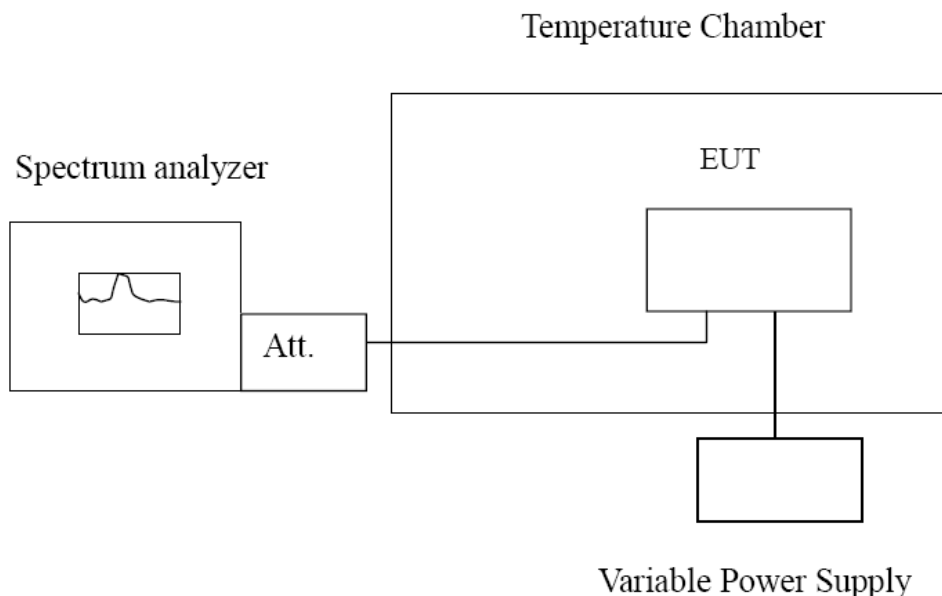

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.



TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	925	0.179	Within the band of operation	Pass
	-20	886	0.171		
	-10	823	0.159		
	0	920	0.178		
	10	924	0.178		
	20	754	0.146		
	30	826	0.159		
	40	778	0.150		
	50	860	0.166		
4.26	25	698	0.135	Within the band of operation	Pass
3.15	25	763	0.147		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	685	0.119	Within the band of operation	Pass
	-20	745	0.130		
	-10	695	0.121		
	0	551	0.096		
	10	889	0.155		
	20	968	0.168		
	30	745	0.130		
	40	686	0.119		
	50	598	0.104		
4.26	25	725	0.126	Within the band of operation	Pass
3.15	25	896	0.156		

4. Test Setup Photos of the EUT

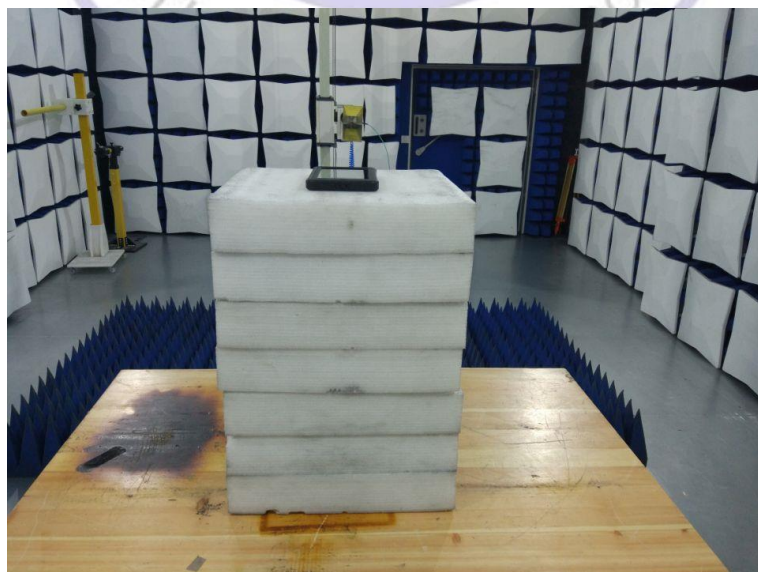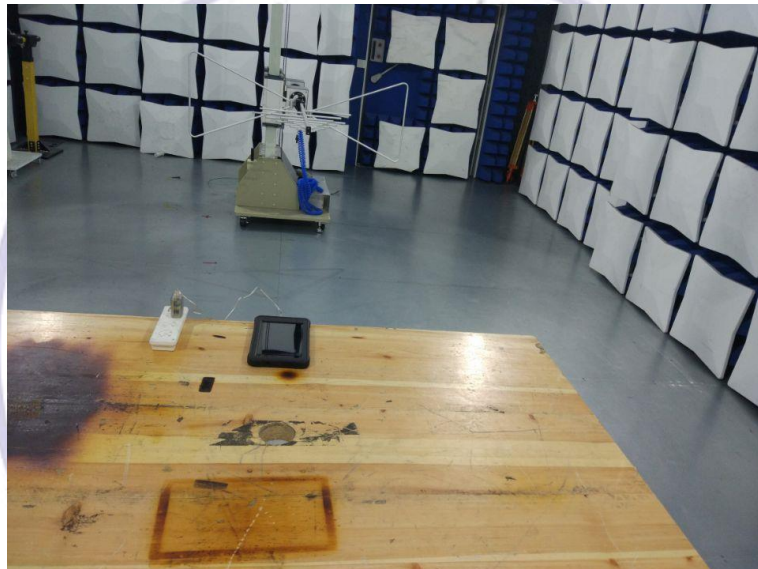

5. Photos of the EUT

Reference to the test report No. CTL1806156012-WF01

***** End of Report *****

