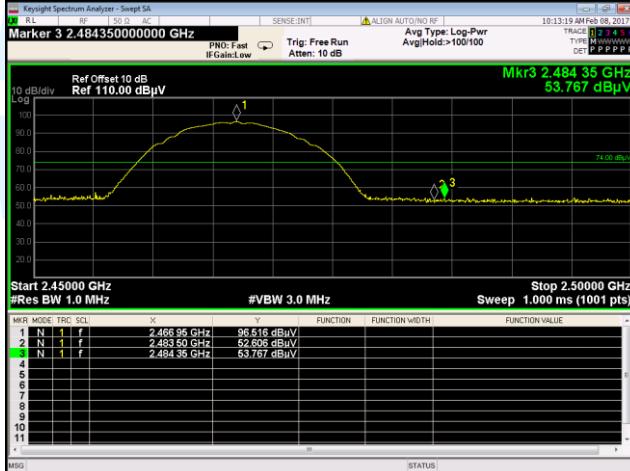
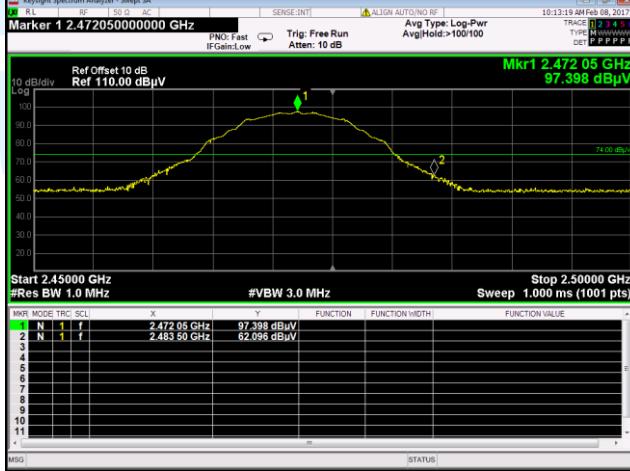
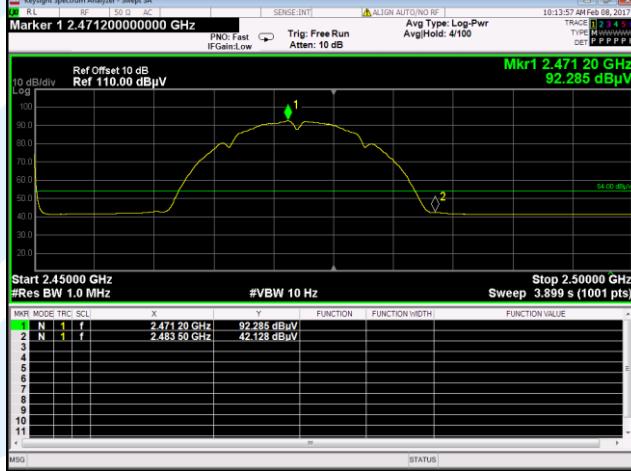


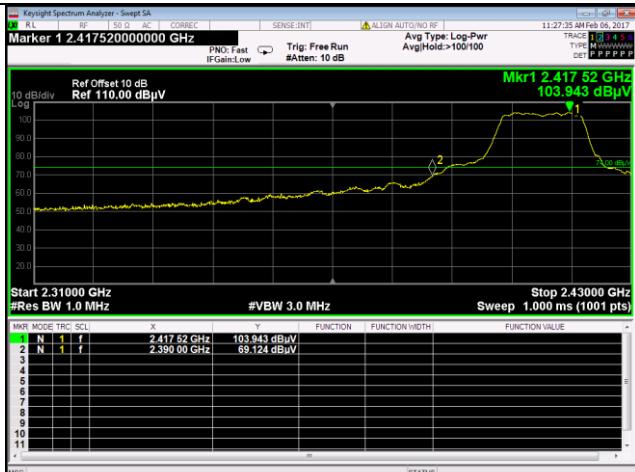
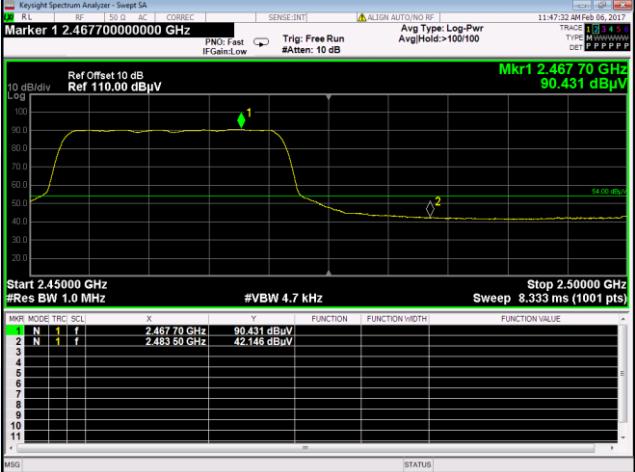
Frequency (MHz)	2462	Ant. Polar.	Vertical	
Detector: Peak		Detector: AV		
	Mkr1 2.462 00 GHz 102.264 dBµV		Mkr1 2.46115 GHz 100.912 dBµV	
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)	
2483.50	52.905	74	40.498	
2483.50	52.905	74	54	Pass
Frequency (MHz)	2467	Ant. Polar.	Horizontal	
Detector: Peak		Detector: AV		
	Mkr3 2.48435 GHz 53.767 dBµV		Mkr1 2.46620 GHz 92.600 dBµV	
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)	
2483.50	52.606	74	40.418	
2484.35	53.767	74	-	Pass

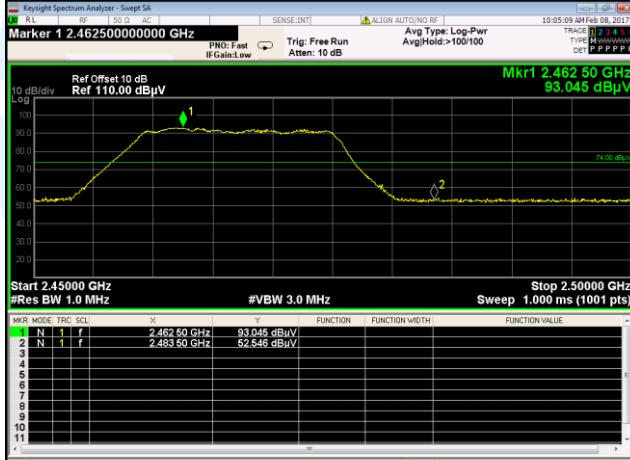
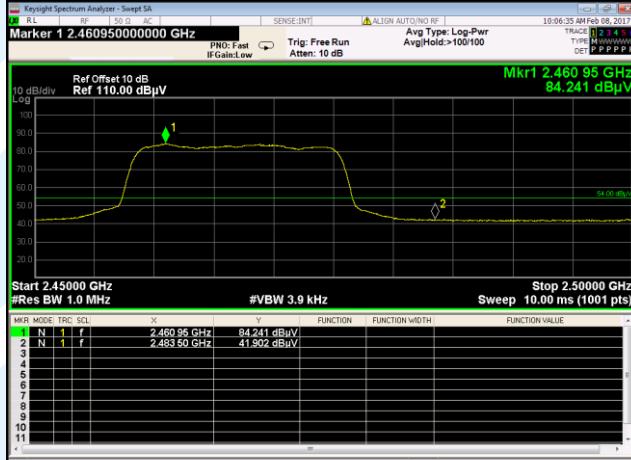
Frequency (MHz)	2467	Ant. Polar.	Vertical		
Detector: Peak		Detector: AV			
	Mkr3 2.48375 GHz 54.658 dBµV		Mkr1 2.46775 GHz 95.354 dBµV		
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion		
2483.50	53.186	74	41.240	54	Pass
2483.75	54.658	74	-	-	Pass
Frequency (MHz)	2472	Ant. Polar.	Horizontal		
Detector: Peak		Detector: AV			
	Mkr1 2.47205 GHz 97.398 dBµV		Mkr1 2.47120 GHz 92.285 dBµV		
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion		
2483.50	62.096	74	42.128	54	Pass

Frequency (MHz)	2472	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Mkr1 2.472 05 GHz 99.250 dB <sub>PtV</sub>	Mkr1 2.471 10 GHz 94.629 dB <sub>PtV</sub>		
Frequency (MHz)	Peak level (dB <sub>PtV</sub> /m)	AV level (dB <sub>PtV</sub> /m)	Conclusion
2483.50	66.798	43.592	Pass
74	54		

### 802.11g

Frequency (MHz)	2412	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
Mkr1 2.406 72 GHz 104.216 dB <sub>PtV</sub>	Mkr1 2.406 00 GHz 93.467 dB <sub>PtV</sub>		
Frequency (MHz)	Peak level (dB <sub>PtV</sub> /m)	AV level (dB <sub>PtV</sub> /m)	Conclusion
2390.00	68.235	49.447	Pass
74	54		

Frequency (MHz)	2412	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
 Start 2.31000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)		 Start 2.31000 GHz #Res BW 1.0 MHz #VBW 3.9 kHz Sweep 24.00 ms (1001 pts)	
Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)
2390.00	69.124	74	50.090
Frequency (MHz)	2462	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
 Start 2.45000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)		 Start 2.45000 GHz #Res BW 1.0 MHz #VBW 4.7 kHz Sweep 8.333 ms (1001 pts)	
Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)
2483.50	53.637	74	42.146

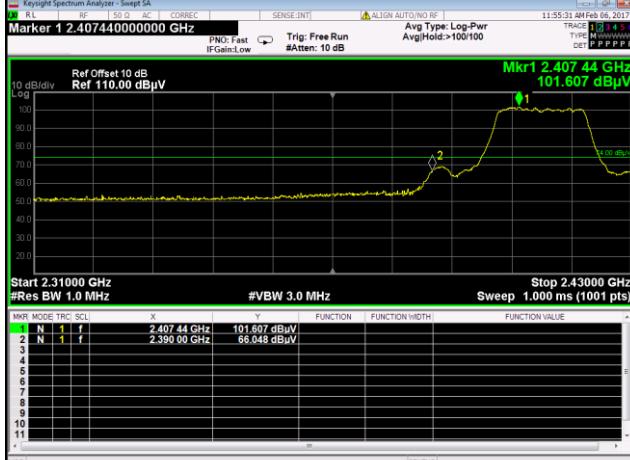
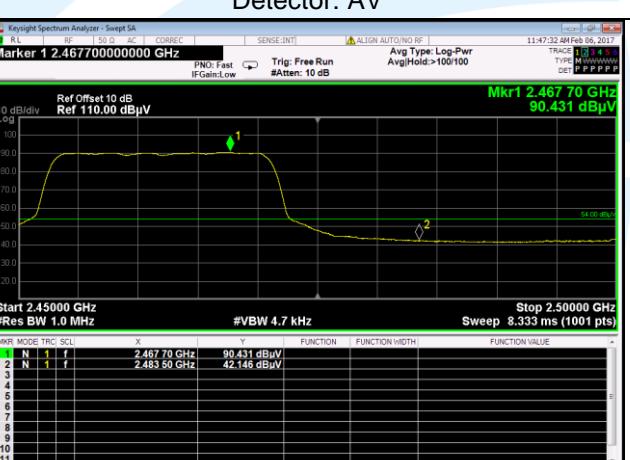
Frequency (MHz)	2462	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	53.656	74	41.914
Frequency (MHz)	2467	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	52.546	74	41.902

Frequency (MHz)	2467	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion
2483.50	53.104	41.603	Pass
Frequency (MHz)	2472	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion
2483.50	61.607	45.456	Pass

Frequency (MHz)	2472	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Mkr1 2.467000000000 GHz	Mkr1 2.466000000000 GHz		
Start 2.4500 GHz	Start 2.4500 GHz	Stop 2.5000 GHz	Stop 2.5000 GHz
#Res BW 1.0 MHz	#Res BW 1.0 MHz	#VBW 3.0 MHz	#VBW 3.9 kHz
Sweep 1.000 ms (1001 pts)	Sweep 10.00 ms (1001 pts)		Sweep 10.00 ms (1001 pts)
MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE		
1 N 1 f 2.46700 GHz 94.862 dBµV	1 N 1 f 2.46600 GHz 84.841 dBµV		
2 N 1 f 2.48350 GHz 66.237 dBµV	2 N 1 f 2.48350 GHz 46.744 dBµV		
3	3		
4	4		
5	5		
6	6		
7	7		
8	8		
9	9		
10	10		
11	11		
MSG	MSG		
STATUS	STATUS		
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	66.237	74	46.744
Peak Limit (dBuv/m)	AV Limit (dBuv/m)	Conclusion	
74	54	Pass	

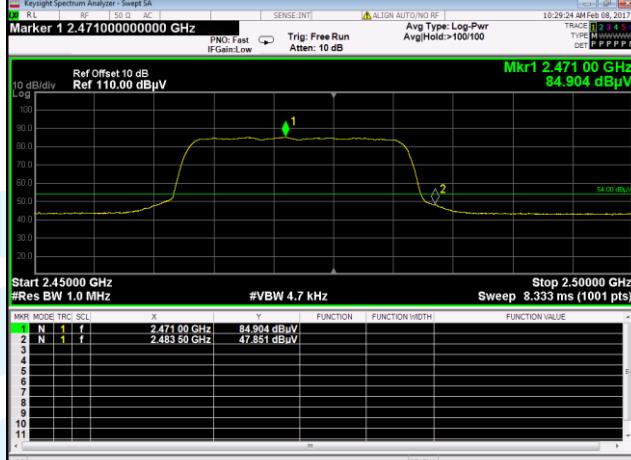
### 802.11n(HT20)

Frequency (MHz)	2412	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
Mkr1 2.410680000000 GHz	Mkr1 2.411040000000 GHz		
Start 2.3100 GHz	Start 2.3100 GHz	Stop 2.4300 GHz	Stop 2.4300 GHz
#Res BW 1.0 MHz	#Res BW 1.0 MHz	#VBW 3.0 MHz	#VBW 4.7 kHz
Sweep 1.000 ms (1001 pts)	Sweep 19.93 ms (1001 pts)		Sweep 19.93 ms (1001 pts)
MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE		
1 N 1 f 2.41068 GHz 101.179 dBµV	1 N 1 f 2.41104 GHz 91.322 dBµV		
2 N 1 f 2.39000 GHz 65.392 dBµV	2 N 1 f 2.39000 GHz 46.904 dBµV		
3	3		
4	4		
5	5		
6	6		
7	7		
8	8		
9	9		
10	10		
11	11		
MSG	MSG		
STATUS	STATUS		
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2390.00	65.392	74	46.904
Peak Limit (dBuv/m)	AV Limit (dBuv/m)	Conclusion	
74	54	Pass	

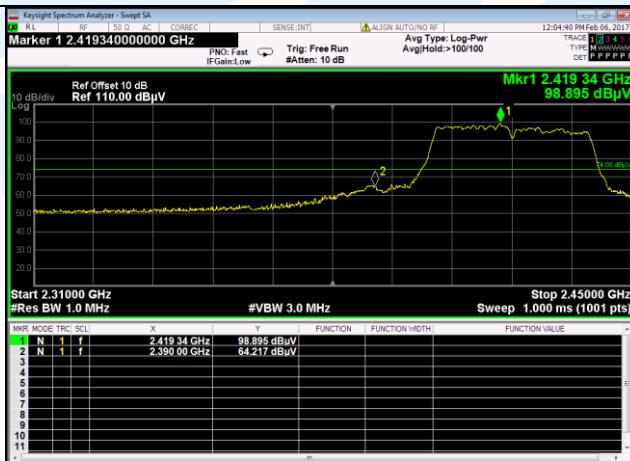
Frequency (MHz)	2412	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
			
MK1 2.40744 GHz 101.607 dBµV		Mk1 2.41104 GHz 91.311 dBµV	
Start 2.3100 GHz #Res BW 1.0 MHz	#VBW 3.0 MHz	Start 2.3100 GHz #Res BW 1.0 MHz	#VBW 4.7 kHz
Sweep 1.000 ms (1001 pts)		Sweep 19.93 ms (1001 pts)	
MRK MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE		MRK MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	
1 N 1 f 2.40744 GHz 101.607 dBµV		1 N 1 f 2.41104 GHz 91.311 dBµV	
2 N 1 f 2.3900 GHz 66.048 dBµV		2 N 1 f 2.3900 GHz 47.777 dBµV	
3		4	
5		6	
7		8	
8		9	
9		10	
10		11	
11			
MSO		MSO	
STATUS		STATUS	
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2390.00	66.048	74	47.777
Peak Limit (dBuv/m)	AV Limit (dBuv/m)	Conclusion	
74	54	Pass	
Frequency (MHz)	2462	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
			
Mk1 2.45735 GHz 101.289 dBµV		Mk1 2.46770 GHz 90.431 dBµV	
Start 2.45000 GHz #Res BW 1.0 MHz	#VBW 3.0 MHz	Start 2.45000 GHz #Res BW 1.0 MHz	#VBW 4.7 kHz
Sweep 1.000 ms (1001 pts)		Sweep 8.333 ms (1001 pts)	
MRK MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE		MRK MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	
1 N 1 f 2.45735 GHz 101.289 dBµV		1 N 1 f 2.46770 GHz 90.431 dBµV	
2 N 1 f 2.48350 GHz 53.637 dBµV		2 N 1 f 2.48350 GHz 42.146 dBµV	
3		4	
5		6	
6		7	
7		8	
8		9	
9		10	
10		11	
11			
MSO		MSO	
STATUS		STATUS	
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	53.637	74	42.146
Peak Limit (dBuv/m)	AV Limit (dBuv/m)	Conclusion	
74	54	Pass	

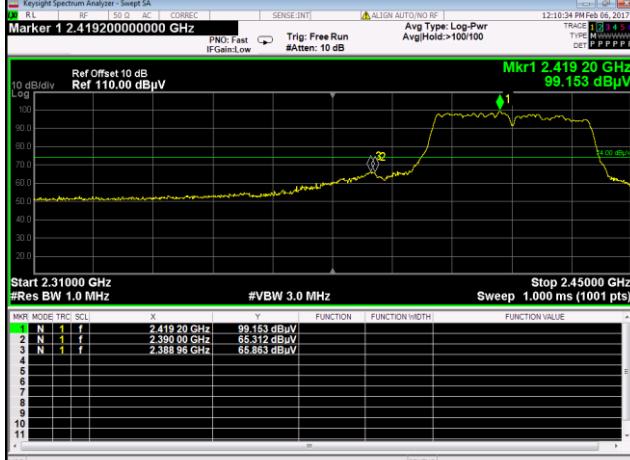
Frequency (MHz)	2462	Ant. Polar.	Vertical	
Detector: Peak		Detector: AV		
				
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)	
2483.50	53.656	74	41.914	
2483.50	53.656	74	54	Pass
Frequency (MHz)	2467	Ant. Polar.	Horizontal	
Detector: Peak		Detector: AV		
				
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)	
2483.50	53.269	74	42.303	
2485.75	54.958	74	-	Pass

Frequency (MHz)	2467	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
	Mkr1 2.46230 30 GHz 94.127 dBuV		Mkr1 2.46985 85 GHz 84.438 dBuV
Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)
2483.50	53.342	74	42.438
AV Limit (dBuV/m)	Conclusion	54	Pass
Frequency (MHz)	2472	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
	Mkr1 2.47500 GHz 90.265 dBuV		Mkr1 2.47500 GHz 81.527 dBuV
Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)
2483.50	62.196	74	45.888
AV Limit (dBuV/m)	Conclusion	54	Pass

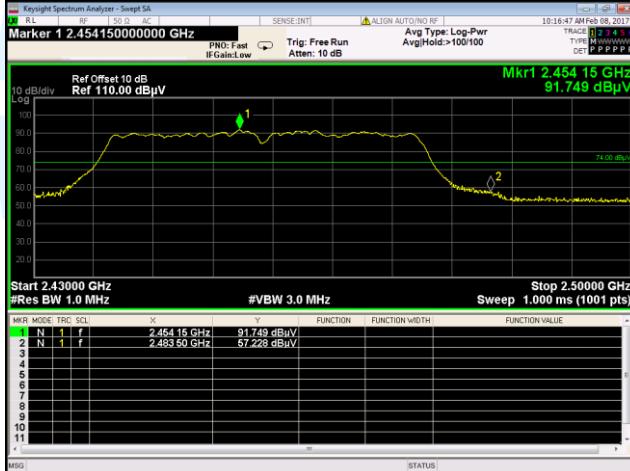
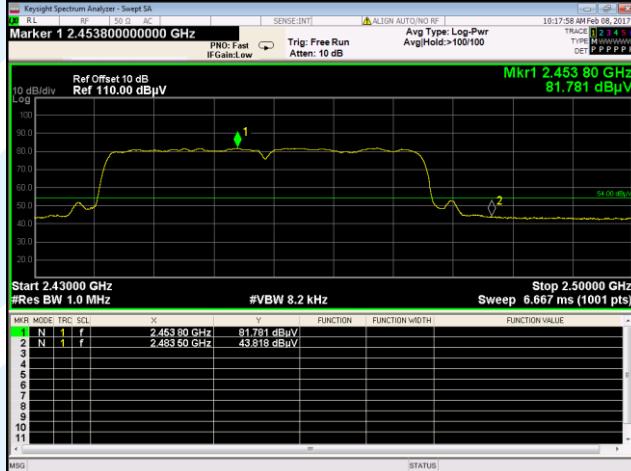
Frequency (MHz)	2472	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBm)	AV level (dBm)	Conclusion
2483.50	66.645	47.851	Pass

### 802.11n(HT40)

Frequency (MHz)	2422	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBm)	AV level (dBm)	Conclusion
2390.00	64.217	50.315	Pass
2385.74	-	51.141	Pass

Frequency (MHz)	2422	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
	Mkr1 2.419200000000 GHz 99.153 dBµV		Mkr1 2.414440000000 GHz 89.430 dBµV
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion
2390.00	65.312	50.389	Pass
2388.96	65.863	-	Pass
2385.46	-	51.810	Pass

Frequency (MHz)	2452	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
	Mkr1 2.449250000000 GHz 100.146 dBµV		Mkr1 2.444420000000 GHz 90.200 dBµV
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion
2483.50	54.520	44.142	Pass

Frequency (MHz)	2452	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	54.926	74	44.678
Frequency (MHz)	2457	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	57.228	74	43.818

Frequency (MHz)	2457	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion
2483.50	56.706	43.720	Pass
Frequency (MHz)	2462	Ant. Polar.	Horizontal
Detector: Peak		Detector: AV	
Frequency (MHz)	Peak level (dBuv/m)	AV level (dBuv/m)	Conclusion
2483.50	61.138	48.759	Pass
2483.85	-	49.332	Pass

Frequency (MHz)	2462	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Mkr1 2.459190000000 GHz	Mkr1 2.459 19 GHz 92.843 dB $\mu$ V	Mkr1 2.454500000000 GHz	Mkr1 2.454 50 GHz 82.268 dB $\mu$ V
Start 2.4300 GHz	#Res BW 1.0 MHz	Start 2.4300 GHz	#Res BW 1.0 MHz
Stop 2.5000 GHz	#VBW 3.0 MHz	Stop 2.5000 GHz	#VBW 8.2 kHz
Sweep 1.000 ms (1001 pts)		Sweep 6.667 ms (1001 pts)	
Marker Mode TRC SCL	X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	Marker Mode TRC SCL	X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE
1 N 1 f	2.459 19 GHz 92.843 dB $\mu$ V	1 N 1 f	2.454 50 GHz 82.268 dB $\mu$ V
2 N 1 f	2.483 50 GHz 64.115 dB $\mu$ V	2 N 1 f	2.483 50 GHz 51.682 dB $\mu$ V
3		3	2.483 83 GHz 52.527 dB $\mu$ V
4		4	
5		5	
6		6	
7		7	
8		8	
9		9	
10		10	
11		11	
MSO	STATUS	MSO	STATUS
Frequency (MHz)	Peak level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	AV level (dB $\mu$ V/m)
2483.50	64.115	74	51.682
2483.83	-	-	52.527
Peak Limit (dB $\mu$ V/m)	AV Limit (dB $\mu$ V/m)	Conclusion	
74	54	Pass	
-	54	Pass	

## Worse Case for Model: MK-QTWIFI-04(B)

### 802.11b

Frequency (MHz)	2472	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	67.332	74	42.752
Conclusion	AV Limit (dBuv/m)		Pass

### 802.11g

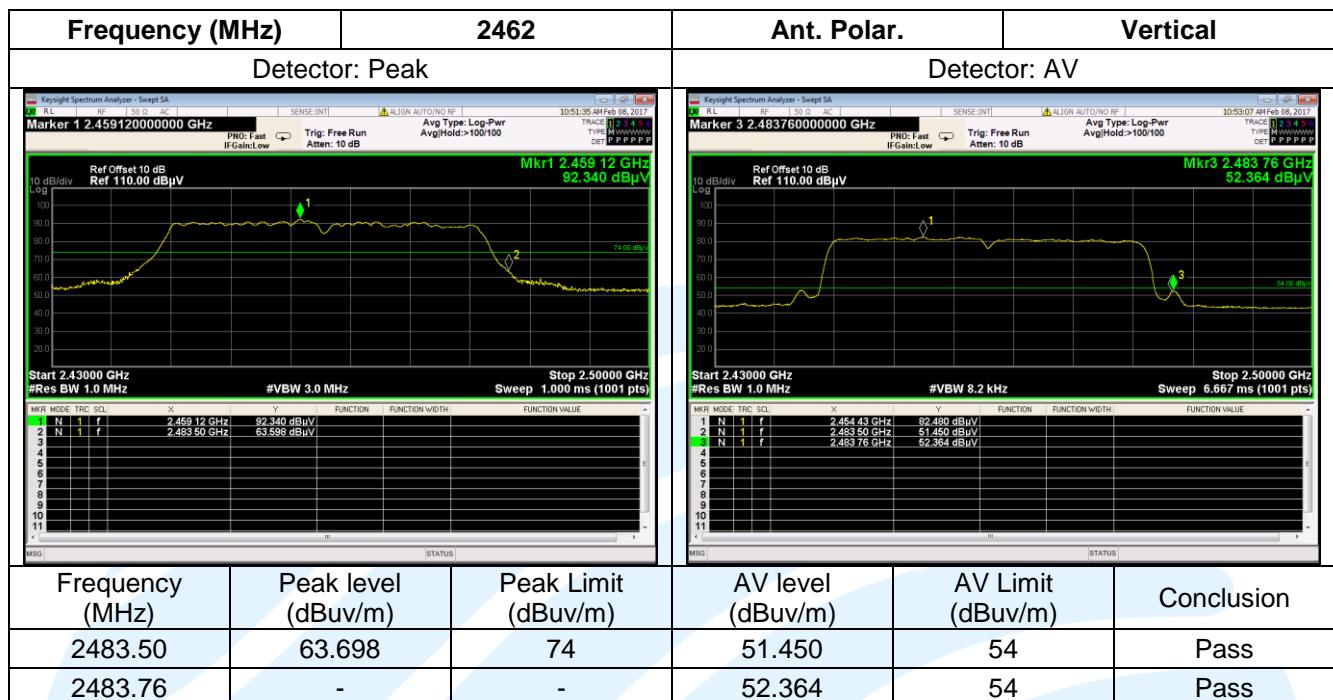
Frequency (MHz)	2412	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
			
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2390.00	69.370	74	49.844
Conclusion	AV Limit (dBuv/m)		Pass

**802.11n(HT20)**

Frequency (MHz)	2472	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2483.50	65.411	74	45.660
Conclusion	AV Limit (dBuv/m)	Conclusion	Pass

**802.11n(HT40)**

Frequency (MHz)	2422	Ant. Polar.	Vertical
Detector: Peak		Detector: AV	
Frequency (MHz)	Peak level (dBuv/m)	Peak Limit (dBuv/m)	AV level (dBuv/m)
2390.00	65.477	74	50.341
2388.54	66.382	74	-
2385.60	-	-	51.506
Conclusion	AV Limit (dBuv/m)	Conclusion	Pass



## 5.8 Conducted Emissions

**Test Requirement:** 47 CFR Part 15C Section 15.207

**Test Method:** ANSI C63.10

**Test Frequency Range:** 150KHz to 30MHz

**Limit:**

Frequency range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

NOTE : The lower limit is applicable at the transition frequency

**Test Procedure:**

Test frequency range :150KHz-30MHz

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

**Test Setup:**

Refer to section 4.1.3 for details.

**Instruments Used:**

Refer to section 3 for details

**Test Mode:**

Transmitter mode

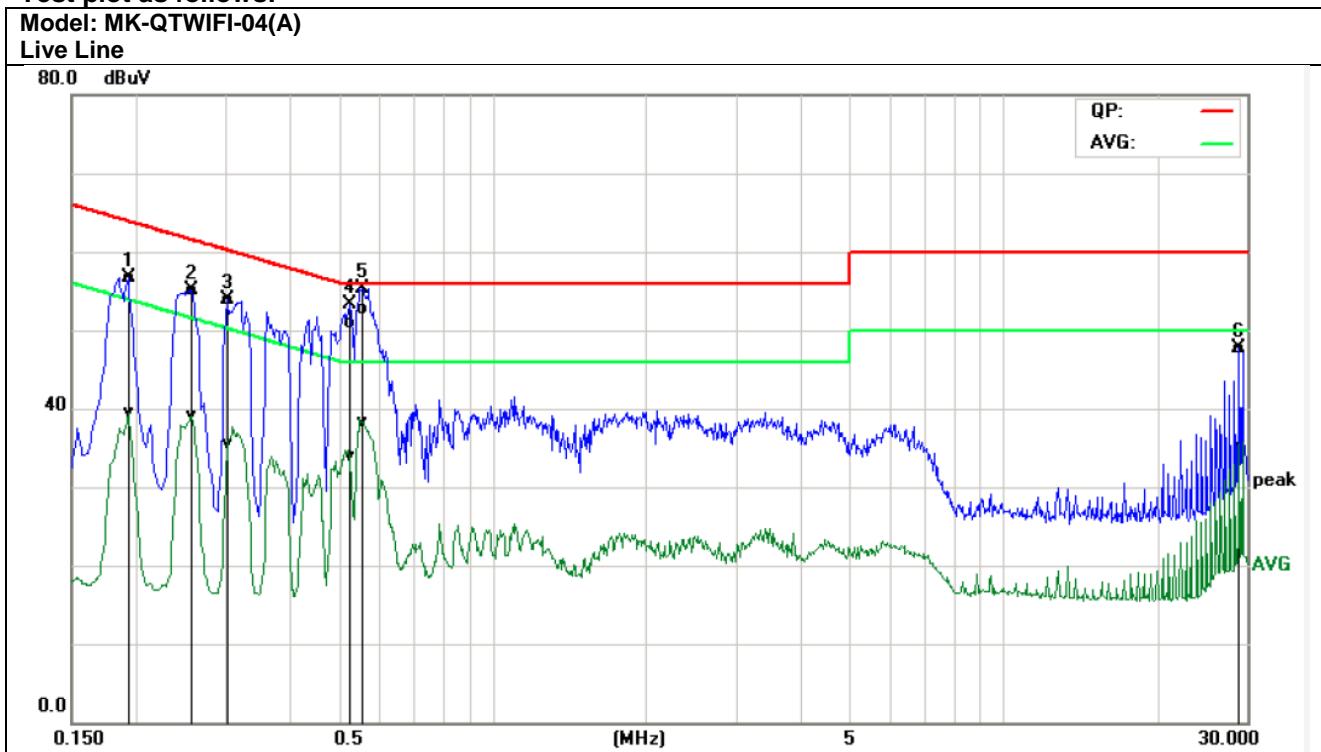
**Test Results:**

Pass

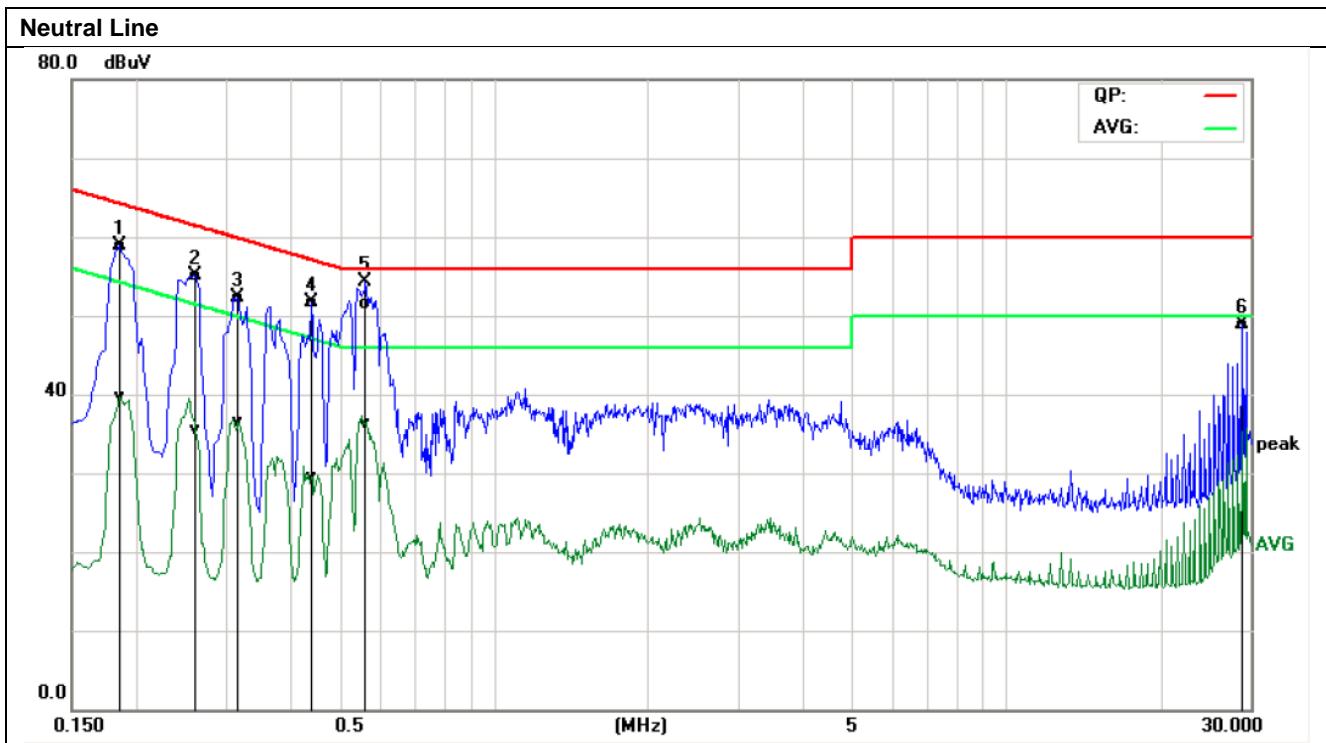
### Test Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

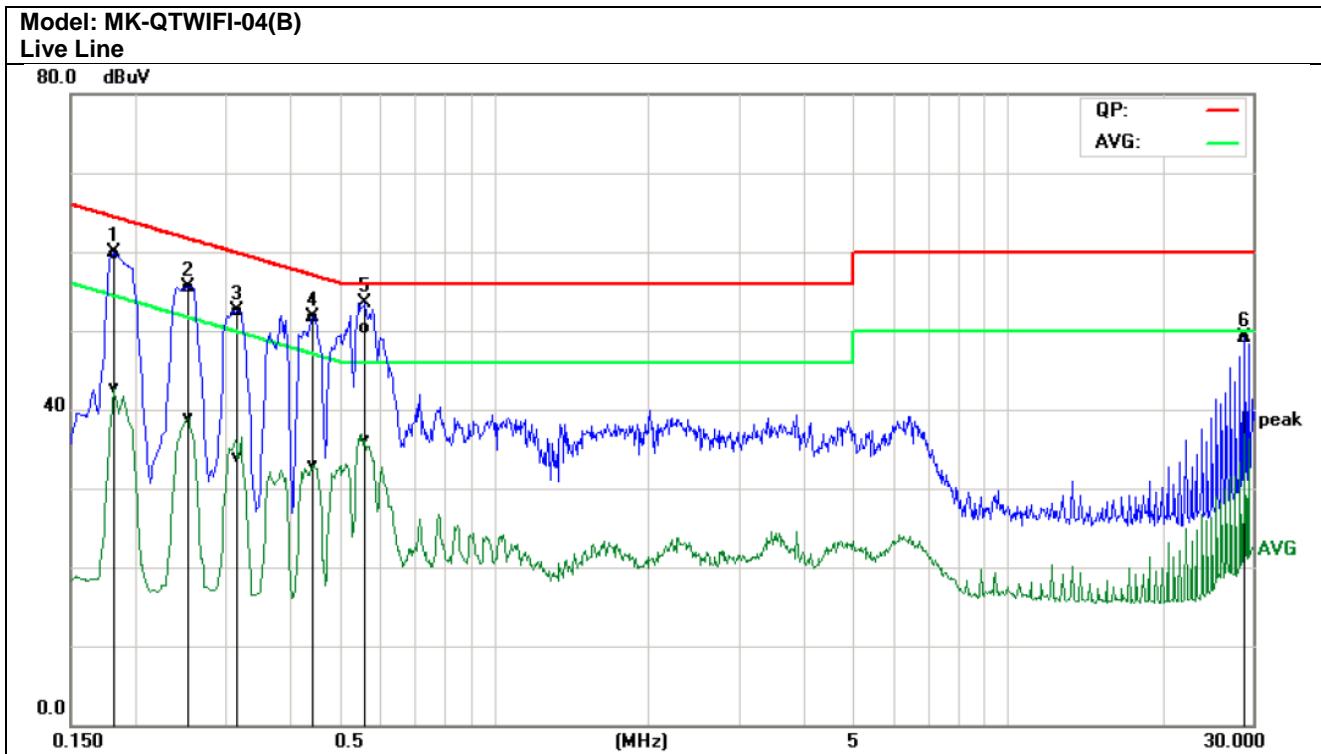
Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

**Test plot as follows:**


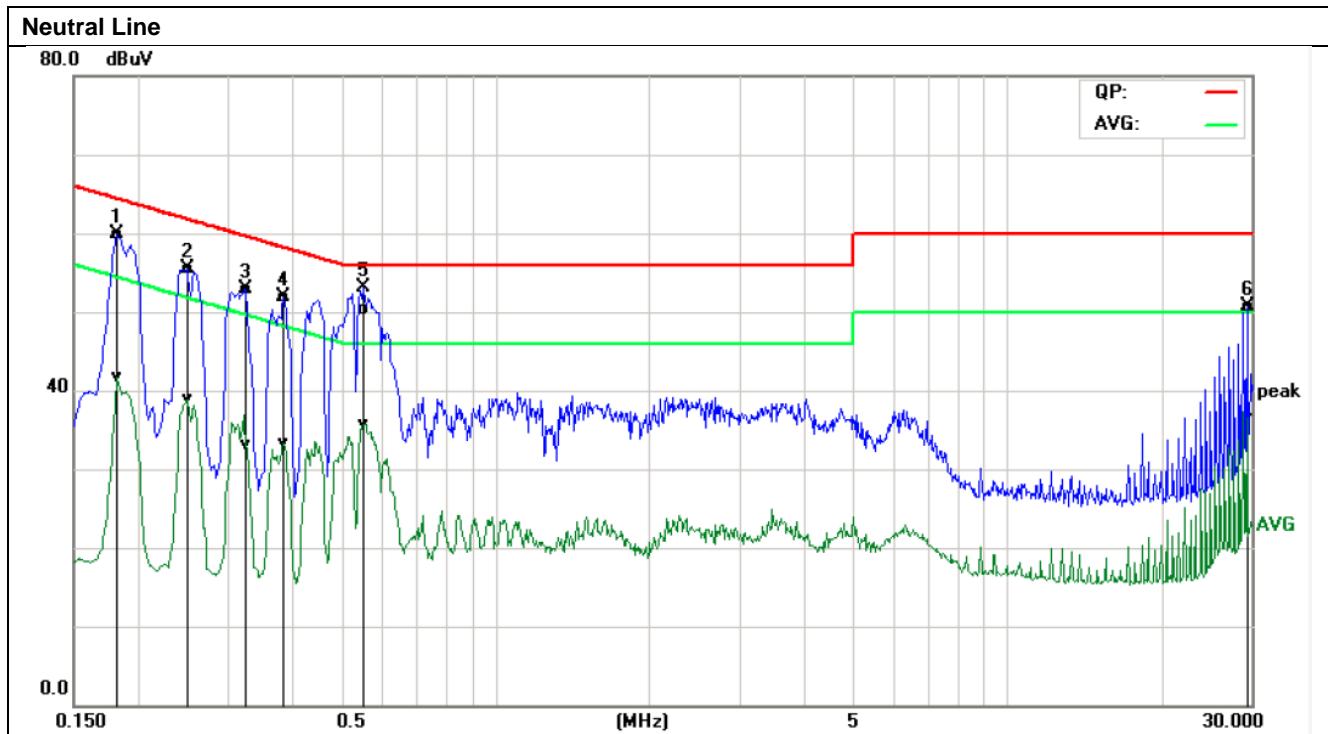
No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.1940	37.13	19.88	19.63	56.76	39.51	63.86	53.86	7.10	14.35	Pass
2P	0.2580	35.42	19.37	19.64	55.06	39.01	61.49	51.50	6.43	12.49	Pass
3P	0.3020	34.29	15.82	19.64	53.93	35.46	60.19	50.19	6.26	14.73	Pass
4P	0.5260	31.35	14.33	19.65	51.00	33.98	56.00	46.00	5.00	12.02	Pass
5*	0.5580	33.02	18.56	19.68	52.70	38.24	56.00	46.00	3.30	7.76	Pass
6P	28.9180	27.61	15.35	20.07	47.68	35.42	60.00	50.00	12.32	14.58	Pass



No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.1860	39.26	20.03	19.73	58.99	39.76	63.86	53.86	4.87	14.10	Pass
2P	0.2620	35.41	15.85	19.72	55.13	35.57	61.49	51.50	6.36	15.93	Pass
3P	0.3180	32.67	16.80	19.70	52.37	36.50	60.19	50.19	7.82	13.69	Pass
4P	0.4420	32.05	9.87	19.65	51.70	29.52	56.00	46.00	4.30	16.48	Pass
5*	0.5620	31.85	16.59	19.65	51.50	36.24	56.00	46.00	4.50	9.76	Pass
6P	28.9180	28.97	15.41	19.97	48.94	35.38	60.00	50.00	11.06	14.62	Pass



No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1819	40.21	23.21	19.59	59.80	42.80	64.39	54.00	4.59	11.20	Pass
2P	0.2540	35.94	19.33	19.64	55.58	38.97	61.62	51.63	6.04	12.66	Pass
3P	0.3180	32.91	14.17	19.64	52.55	33.81	59.76	49.76	7.21	15.95	Pass
4P	0.4460	32.14	13.34	19.63	51.77	32.97	56.95	46.95	5.18	13.98	Pass
5P	0.5620	30.72	16.52	19.68	50.40	36.20	56.00	46.00	5.60	9.80	Pass
6P	28.9140	28.94	16.92	20.07	49.01	36.99	60.00	50.00	10.99	13.01	Pass



No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1819	40.25	22.00	19.73	59.98	41.73	64.39	54.40	4.41	12.67	Pass
2P	0.2500	35.72	19.26	19.72	55.44	38.98	61.75	51.76	6.31	12.78	Pass
3P	0.3260	33.30	13.47	19.70	53.00	33.17	59.55	49.55	6.55	16.38	Pass
4P	0.3860	32.26	13.69	19.67	51.93	33.36	58.15	48.15	6.22	14.79	Pass
5P	0.5540	30.65	16.11	19.65	50.30	35.76	56.00	46.00	5.70	10.24	Pass
6P	29.4700	30.64	16.51	19.98	50.62	36.49	60.00	50.00	9.38	13.51	Pass

## APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

See test photographs attached in Appendix 1 for the actual connections between Product and support equipment.

## APPENDIX 2 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photographs.

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.