


Maximum location: X=6.00, Y=3.00

SAR 10g (W/Kg)	0.075112
SAR 1g (W/Kg)	0.164112

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1743	0.0831	0.0466	0.0281
	0.15- 0.14- 0.12- NW 0.10- 0.08- 0.06- 0.04- 0.02- 0.00 2.5	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

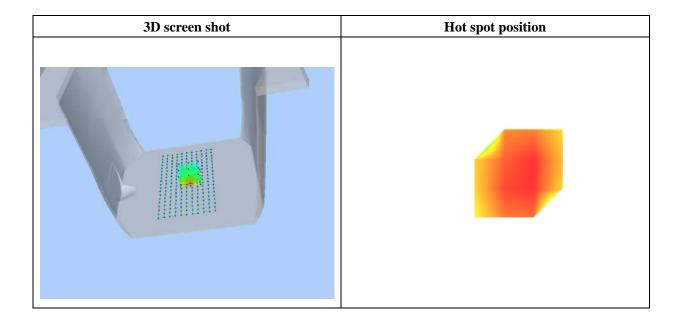

Report No.: STR15118220H Page 101 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Left side
Band	GPRS1900_4TX
Channels	High
Signal	Duty Cycle: 1:2

Frequency (MHz)	1909.800049
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.568323
Ambient Temperature	21.1
Liquid Temperature	21.3

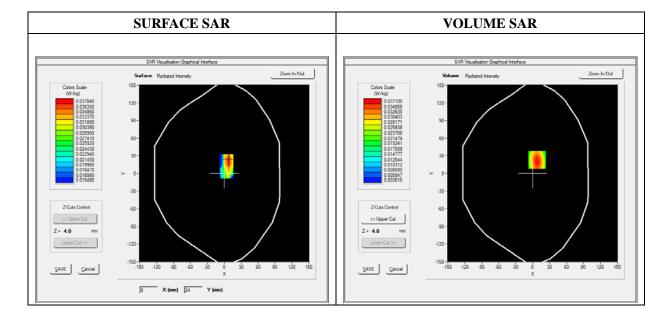




Maximum location: X=8.00, Y=23.00

SAR 10g (W/Kg)	0.025346
SAR 1g (W/Kg)	0.068279

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0371	0.0234	0.0150	0.0098
	0.037-				
	0.030- 9 0.025- W 0.020- W 0.015- 0.010- 0.006- 0.0 2.0	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

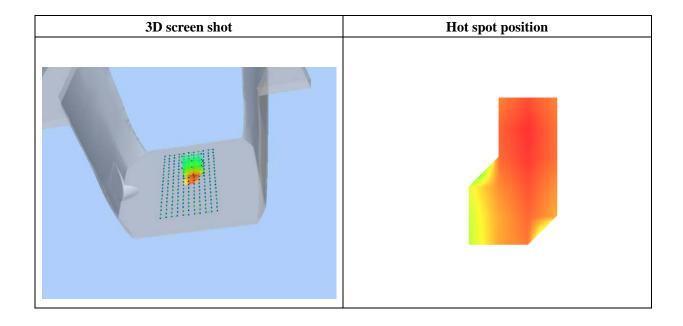

Report No.: STR15118220H Page 103 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.753989
Ambient Temperature	21.1
Liquid Temperature	21.3

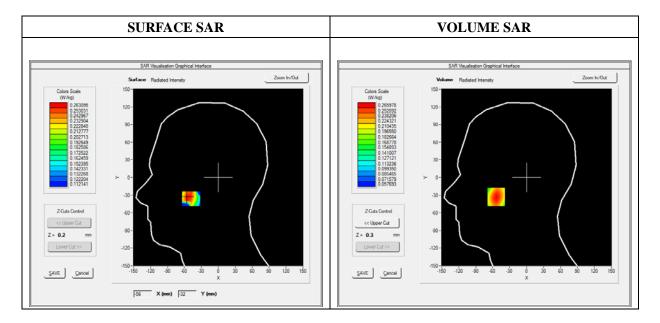




Maximum location: X=-54.00, Y=-33.00

SAR 10g (W/Kg)	0.193228
SAR 1g (W/Kg)	0.267628

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2660	0.2201	0.1798	0.1444
	0.27-				
	0.24-				
	0.22- \$ 0.20-				
	0.20- WW 0.20- 0.18- 0.16-				
	0.14-				
	0.11 – 0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

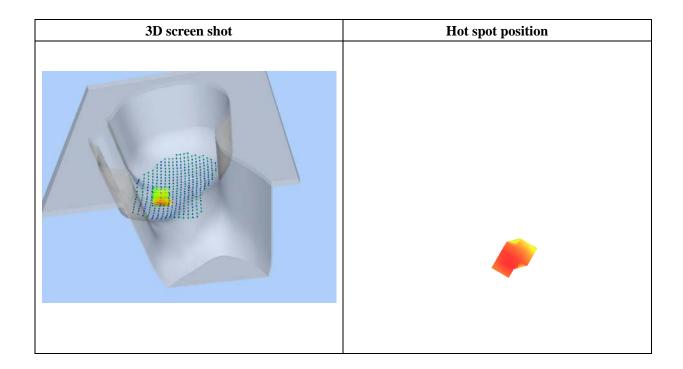



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA850_ RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.985030
Ambient Temperature	21.1
Liquid Temperature	21.3

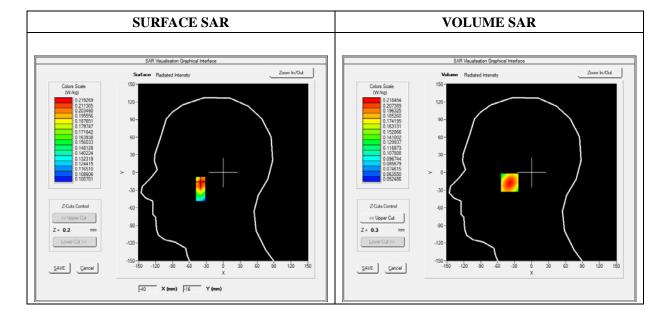




Maximum location: X=-39.00, Y=-17.00

SAR 10g (W/Kg)	0.158729
SAR 1g (W/Kg)	0.212566

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2185	0.1758	0.1450	0.1229
	0.22-				
	0.20	\sim			
	<u></u> ਹ.18-				
	₹ _{0.16} -				
	0.18- WW (WWK 0.16-				
	0.14				
	0.12-				
	0.11-				
	0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

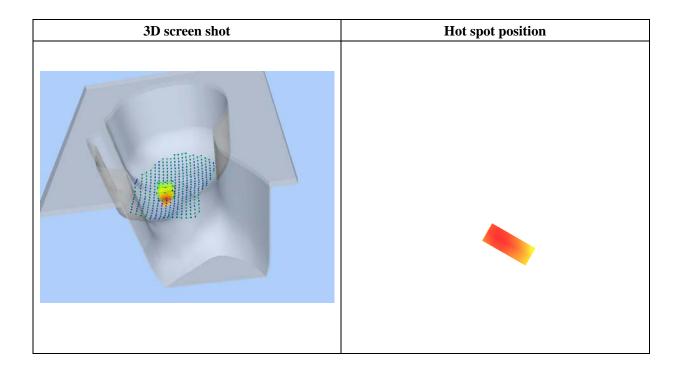

Report No.: STR15118220H Page 107 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.694380
Ambient Temperature	21.1
Liquid Temperature	21.3

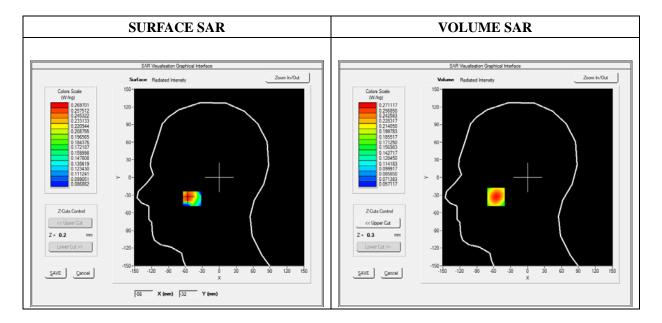




Maximum location: X=-56.00, Y=-33.00

SAR 10g (W/Kg)	0.195993
SAR 1g (W/Kg)	0.266891

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2711	0.2243	0.1859	0.1542
	0.27-				
	0.26-				
	0.24-				
	□ 0.22 ≥ 0.20				
	€ 0.20-		+		
	₩ 0.18-		+		
	0.16-		+		
	0.14		+++		
	0.13- 0.0 2.5	5 5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
	Z (mm)				

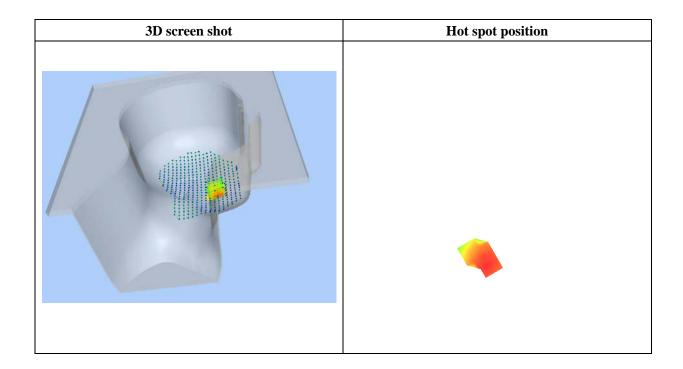

Report No.: STR15118220H Page 109 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.869586
Ambient Temperature	21.1
Liquid Temperature	21.3

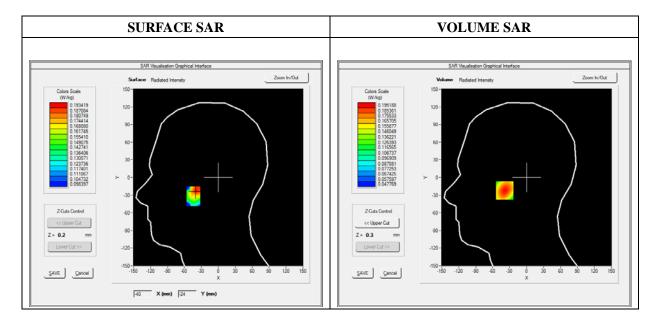




Maximum location: X=-39.00, Y=-22.00

SAR 10g (W/Kg)	0.142546
SAR 1g (W/Kg)	0.195781

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1952	0.1578	0.1302	0.1098
	0.20- 0.18- 0.16- WW 0.14- 0.12- 0.09- 0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

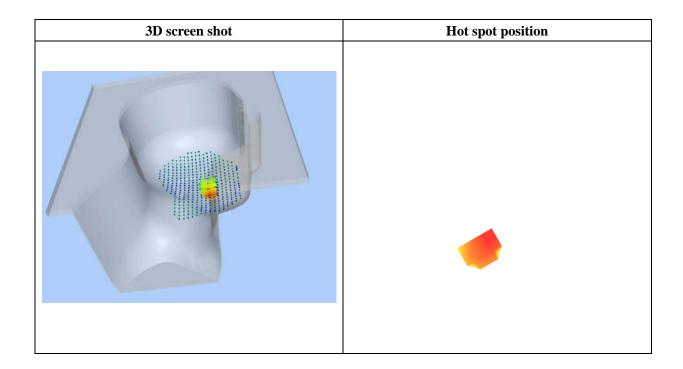

Report No.: STR15118220H Page 111 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.986458
Ambient Temperature	21.1
Liquid Temperature	21.3

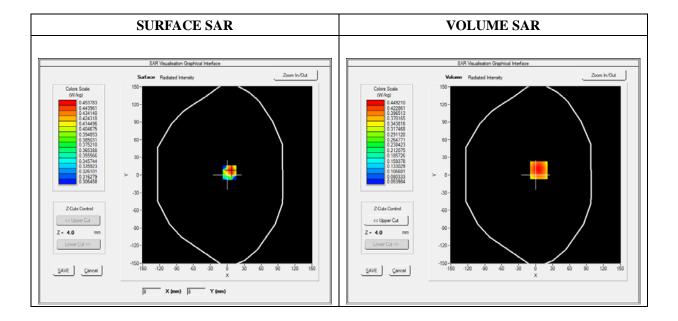




Maximum location: X=6.00, Y=8.00

SAR 10g (W/Kg)	0.313051
SAR 1g (W/Kg)	0.434357

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4492	0.3415	0.2580	0.1931
	0.45-				
	0.40				
	ॼ 0.35-				
	₹ 0.30-	- 	$\overline{}$		
	0.35- 0.30- 8 0.25-		\longrightarrow		
	0.20				
	0.20				
	0.14	50 75 400	105 150 175	22.2.2.2.2	
	0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0				
			Z (mm)		

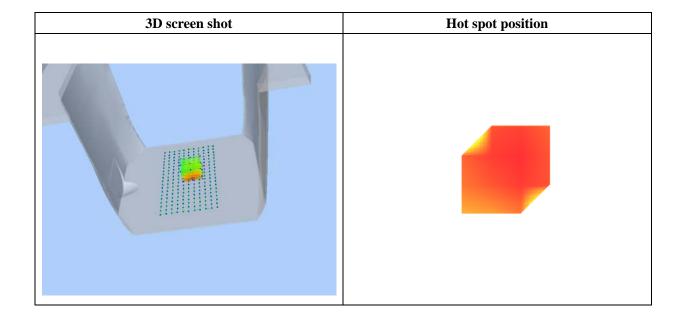

Report No.: STR15118220H Page 113 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.964537
Ambient Temperature	21.1
Liquid Temperature	21.3

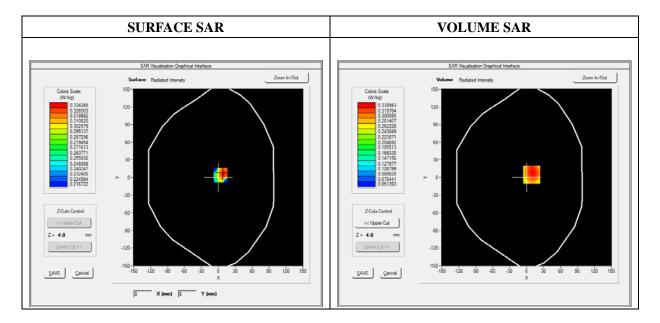




Maximum location: X=9.00, Y=5.00

SAR 10g (W/Kg)	0.241206
SAR 1g (W/Kg)	0.346527

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3370	0.2621	0.2031	0.1566
	0.34-				
	0.30				
	0.25	++			
	0.25- W (MK W 0.20-		$\mathbf{X} + \mathbf{I}$		
	\$ 0.20-				
	0.15-				
	0.12-				
	0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

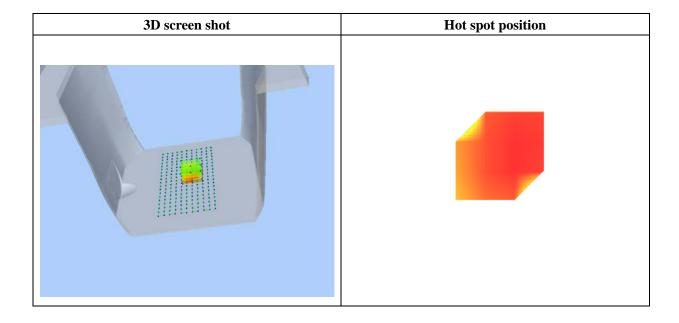

Report No.: STR15118220H Page 115 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.579359
Ambient Temperature	21.1
Liquid Temperature	21.3

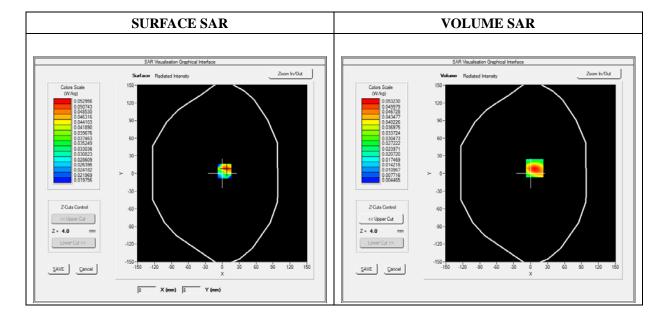




Maximum location: X=7.00, Y=9.00

SAR 10g (W/Kg)	0.031061
SAR 1g (W/Kg)	0.053452

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0532	0.0346	0.0232	0.0163
	0.053 - 0.050 - 0.045 - 0.045 - 0.035 - 0.035 - 0.025 - 0.025 - 0.015 - 0.012	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

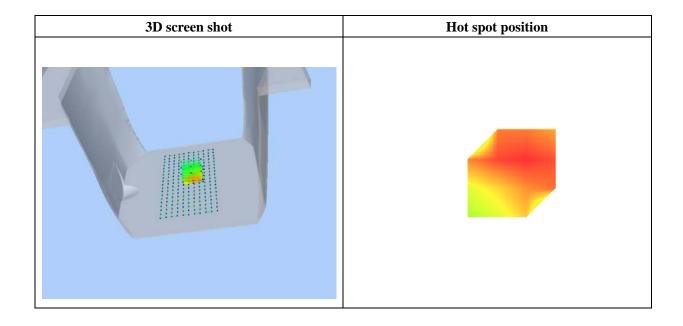

Report No.: STR15118220H Page 117 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.547234
Ambient Temperature	21.1
Liquid Temperature	21.3

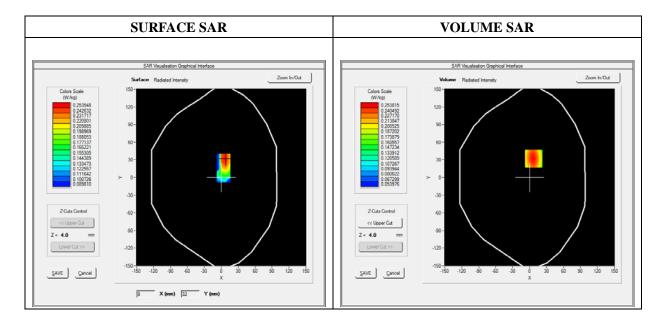




Maximum location: X=7.00, Y=32.00

SAR 10g (W/Kg)	0.168898
SAR 1g (W/Kg)	0.252671

0.00	4.00	9.00	14.00	19.00
0.0000	0.2538	0.1837	0.1351	0.1016
0.254-				
0.225-				
0.200-	\rightarrow	\perp		
§ 0.175-	\rightarrow	+		
뜻 0.150-		\longrightarrow		
0.125-		+		
0.100-		++		
0.076-	5 50 75 100	125 150 175	20.0 22.5 25.0	
U.U 2.	3 3.0 7.5 10.0	Z (mm)	20.0 22.0 20.0	
	0.0000 0.254- 0.225- 0.200- WY 0.175- 0.150- 0.125- 0.100- 0.076-	0.0000 0.2538 0.254- 0.225- 0.200- 0.175- 0.150- 0.125- 0.100- 0.076-	0.0000 0.2538 0.1837 0.254 0.200 0.175 0.150 0.125 0.100 0.076 0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5	0.0000 0.2538 0.1837 0.1351 0.254- 0.225- 0.200- 0.175- 0.125- 0.100- 0.076- 0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0

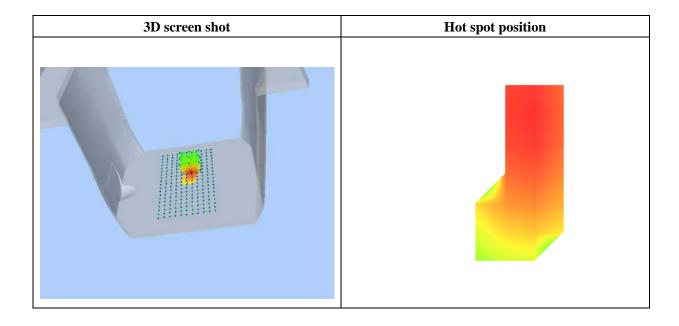

Report No.: STR15118220H Page 119 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.547234
Ambient Temperature	21.1
Liquid Temperature	21.3

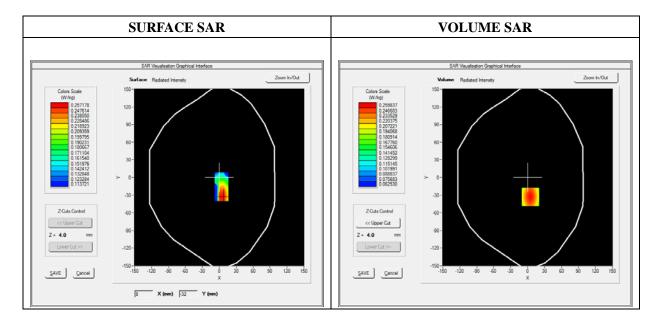




Maximum location: X=5.00, Y=-33.00

SAR 10g (W/Kg)	0.174505
SAR 1g (W/Kg)	0.236156

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2598	0.1901	0.1404	0.1051
	0.260-				
	0.225-				
	_ 0.200-	$+\lambda$			
	0.200- ≥ 0.175-	\rightarrow	+		
	K 0.150-	-	\longrightarrow		
	0.125-		+		
	0.100-		\rightarrow		
	0.078-	F 50 75 100	125 150 175	20.0 22.5 25.0	
	0.0 2.	5 5.0 7.5 10.0) 12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

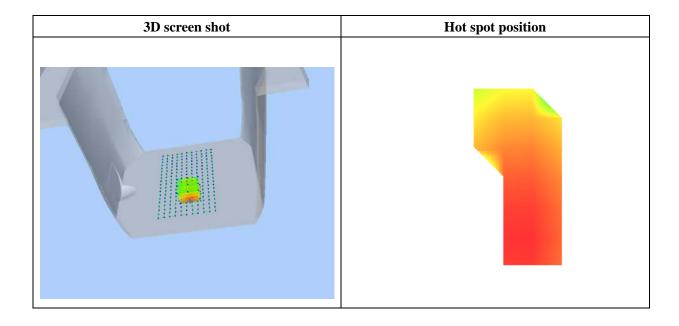

Report No.: STR15118220H Page 121 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.546537
Ambient Temperature	21.1
Liquid Temperature	21.3

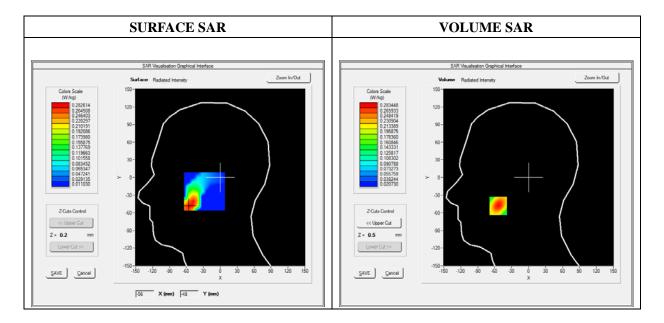




Maximum location: X=-54.00, Y=-48.00

SAR 10g (W/Kg)	0.164384
SAR 1g (W/Kg)	0.225468

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2834	0.1875	0.1239	0.0823
	0.28-				
	0.25-				
	0.25				
	= 0.20-				
	W/W/ W/W/ W/W/ W/W/ W/W/ W/W/ W/W/ W/W				
	£ 0.15-		$\downarrow \downarrow \downarrow \downarrow$		
	δ				
	0.10-		+		
	0.05- 0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
	0.0 2.5	0.0 7.0 10.0	Z (mm)	20.0 22.5 25.0	
			2 (min)		

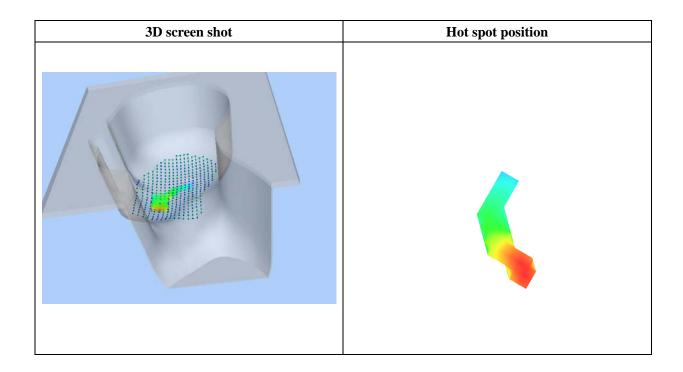

Report No.: STR15118220H Page 123 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.568358
Ambient Temperature	21.1
Liquid Temperature	21.3

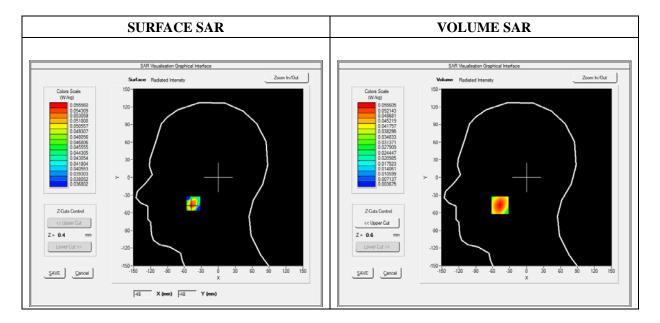




Maximum location: X=-47.00, Y=-47.00

SAR 10g (W/Kg)	0.032985
SAR 1g (W/Kg)	0.064535

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0556	0.0375	0.0253	0.0172
	0.06-				
	0.05-	\longrightarrow			
		$-1 \setminus 1$			
	SAB (W/K				
	£ 0.03-				
	8 0.03		\sim		
	0.02-		+		
	0.01-	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

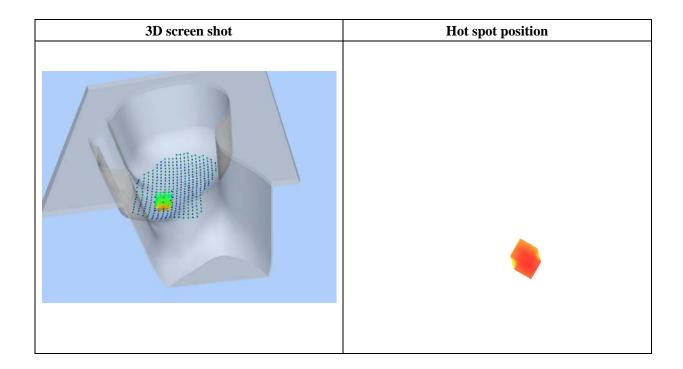

Report No.: STR15118220H Page 125 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.969586
Ambient Temperature	21.1
Liquid Temperature	21.3

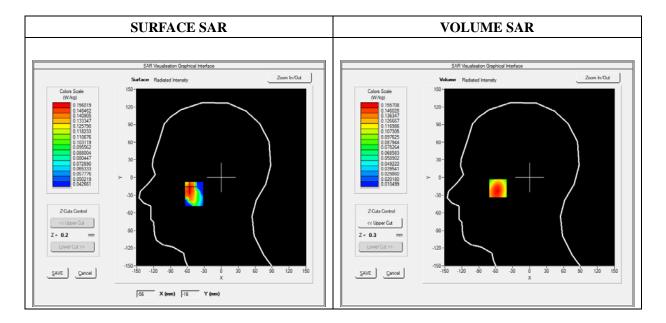




Maximum location: X=-56.00, Y=-18.00

SAR 10g (W/Kg)	0.095179	
SAR 1g (W/Kg)	0.156357	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1540	0.1002	0.0664	0.0455
	0.15-				
	0.14-	\rightarrow			
	_ 0.12-	+ $+$			
	≸ 0.10-	\rightarrow			
	AR (Wkg				
	0.06-		\mathcal{N}		
	0.06				
	0.03-				
	0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

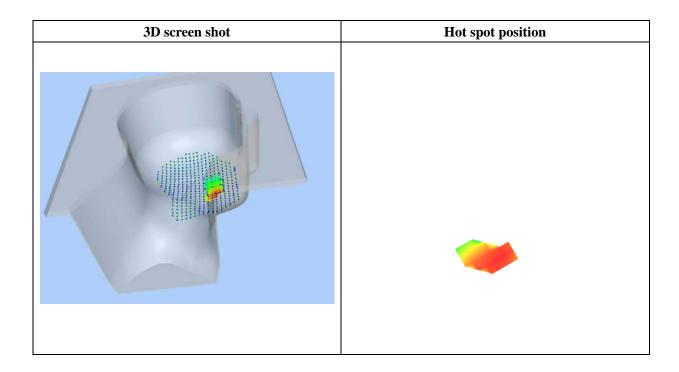

Report No.: STR15118220H Page 127 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.645274
Ambient Temperature	21.1
Liquid Temperature	21.3

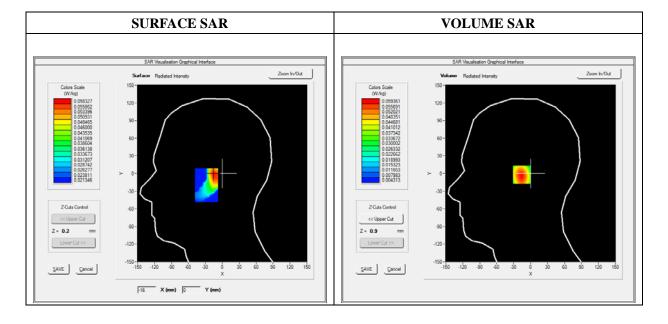




Maximum location: X=-14.00, Y=-2.00

SAR 10g (W/Kg)	0.034718
SAR 1g (W/Kg)	0.074435

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0594	0.0383	0.0248	0.0162
	0.06-				
	0.05	$\lambda + 1$			
	0.05-				
	W 0.04-	+			
	٤ ا				
	S 0.03-				
	0.02-		+		
	0.01-	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
			Z (mm)		

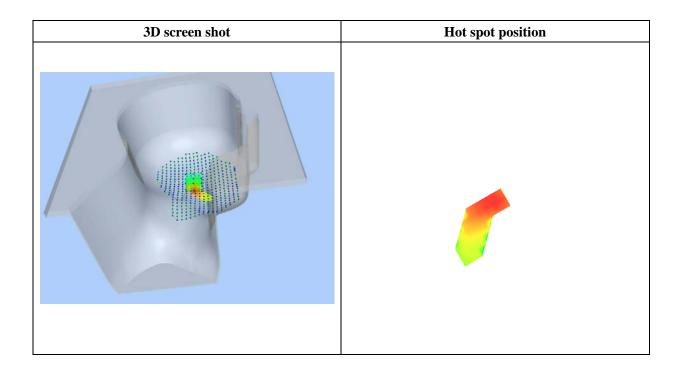

Report No.: STR15118220H Page 129 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.687492
Ambient Temperature	21.1
Liquid Temperature	21.3

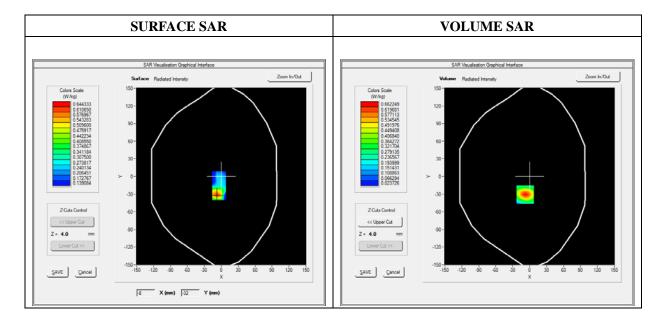




Maximum location: X=-8.00, Y=-31.00

SAR 10g (W/Kg)	0.308108
SAR 1g (W/Kg)	0.552731

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.6622	0.3634	0.2003	0.1155
	0.7-				
	0.6-	\rightarrow			
	0.5-				
	E A				
	BW 0.4-				
	K 0.3-				
	0.2-		\rightarrow		
	0.1 – 0.0 2.5	5.0 7.5 10.0	125 150 175	20.0 22.5 25.0	
0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0 Z (mm)					

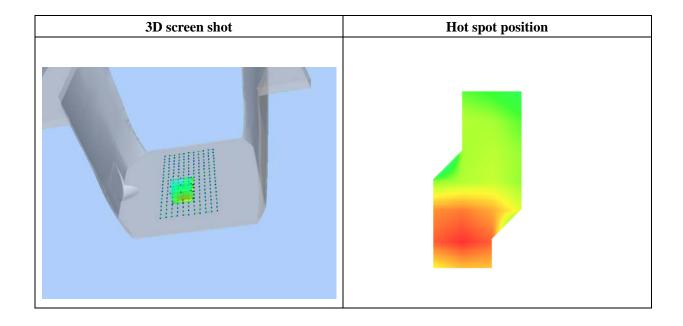

Report No.: STR15118220H Page 131 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.975670
Ambient Temperature	21.1
Liquid Temperature	21.3

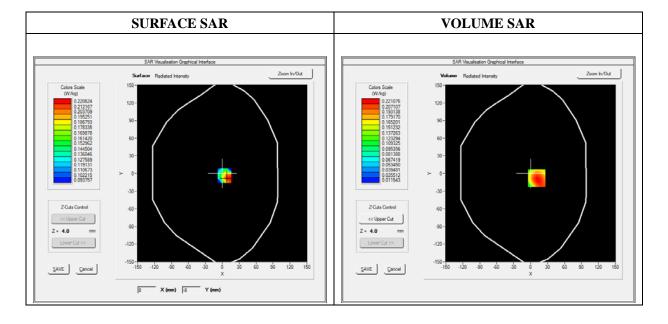




Maximum location: X=11.00, Y=-8.00

SAR 10g (W/Kg)	0.128301	
SAR 1g (W/Kg)	0.225451	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2211	0.1376	0.0857	0.0542
	0.221- 0.200- 0.175- 0.150- W 0.150- W 0.100- 0.075- 0.050- 0.033- 0.0 2) 12.5 15.0 17.5 Z (mm)		

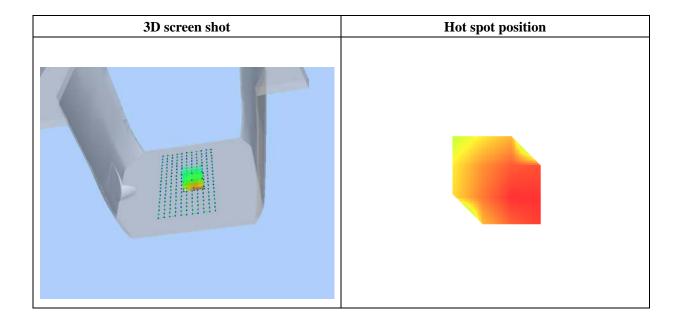

Report No.: STR15118220H Page 133 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.986500
Ambient Temperature	21.1
Liquid Temperature	21.3

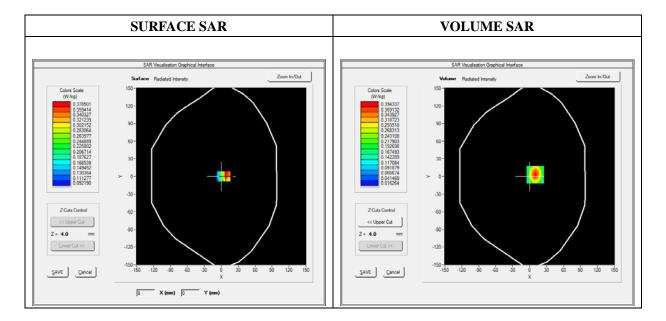




Maximum location: X=10.00, Y=3.00

SAR 10g (W/Kg)	0.191416
SAR 1g (W/Kg)	0.357689

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3943	0.2242	0.1285	0.0769
	0.39-				
	0.35-				
	_ 0.30-				
	0.25- W 0.20-				
	ழ் 0.20-	++			
	స్ _{0.15} -				
	0.10-				
	0.05				
	0.0 2.5	5.0 7.5 10.0	12.5 15.0 17.5	20.0 22.5 25.0	
	Z (mm)				

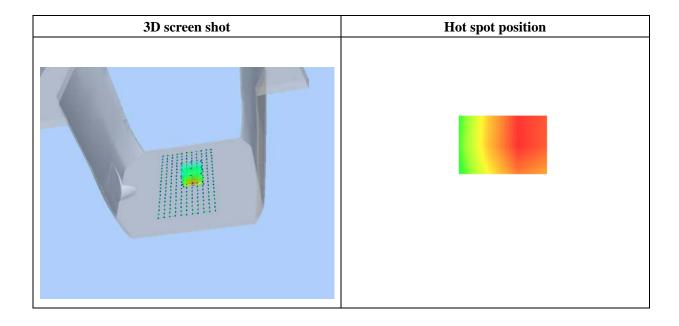

Report No.: STR15118220H Page 135 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.247476
Ambient Temperature	21.1
Liquid Temperature	21.3

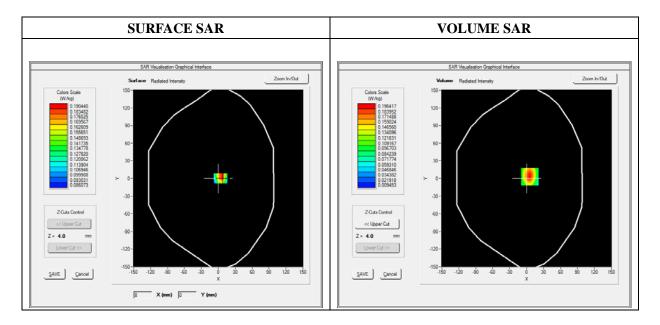




Maximum location: X=6.00, Y=3.00

SAR 10g (W/Kg)	0.099135
SAR 1g (W/Kg)	0.195341

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1964	0.1117	0.0638	0.0378
	0.196-				
	0.175-	\rightarrow			
	0.150-	\rightarrow			
	 ¥ 0.125				
	0.125- 9 0.100-				
	S 0.100				
	0.075				
	0.050 -				
	0.022	5 50 75 10	105 150 175	20.0 20.5 25.0	
	0.0 2.	5 5.0 7.5 10.0	0 12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

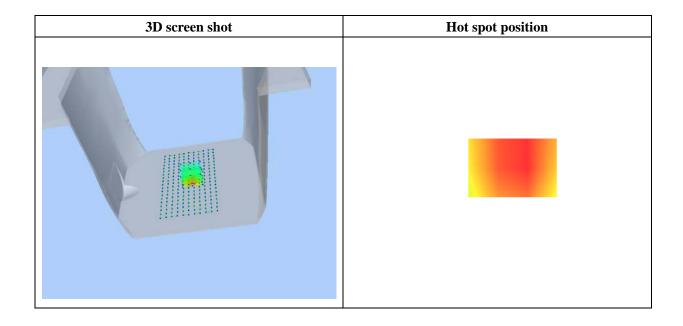



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.247476
Ambient Temperature	21.1
Liquid Temperature	21.3

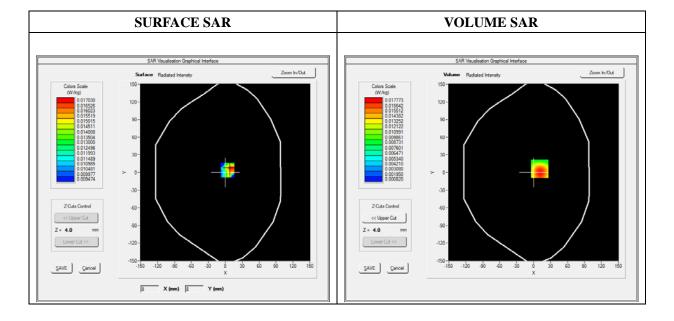




Maximum location: X=11.00, Y=6.00

SAR 10g (W/Kg)	0.009473
SAR 1g (W/Kg)	0.018533

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0170	0.0095	0.0052	0.0028
	0.017-				
	0.014- 0.012- 0.010- 0.008- 0.006- 0.004- 0.001- 0.0 2.	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

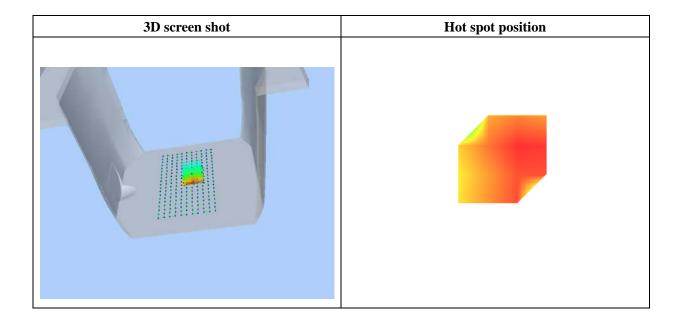

Report No.: STR15118220H Page 139 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.867589
Ambient Temperature	21.1
Liquid Temperature	21.2

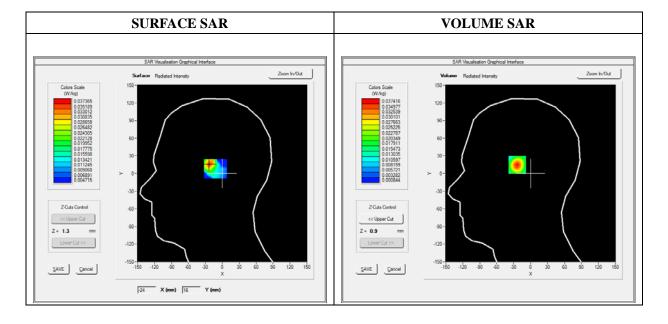




Maximum location: X=-23.00, Y=16.00

SAR 10g (W/Kg)	0.014806
SAR 1g (W/Kg)	0.035142

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0374	0.0107	0.0028	0.0013
	0.037-				
	0.030- B 0.025- W 0.020- W 0.015- 0.010- 0.005- 0.001- 0.00 2	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

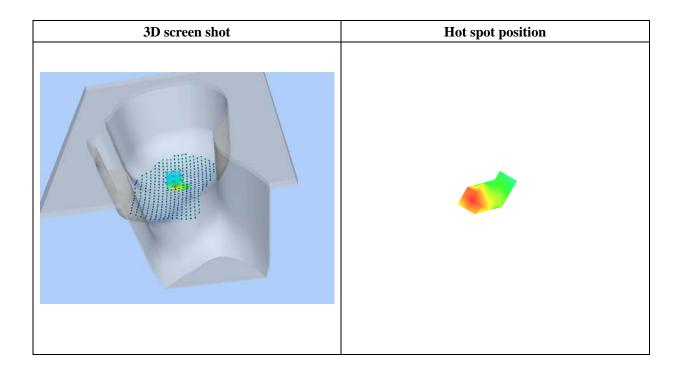

Report No.: STR15118220H Page 141 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.986596
Ambient Temperature	21.1
Liquid Temperature	21.2

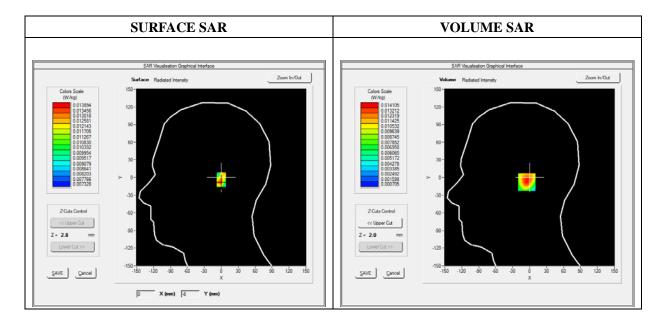




Maximum location: X=-2.00, Y=-8.00

SAR 10g (W/Kg)	0.006374
SAR 1g (W/Kg)	0.013546

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0141	0.0044	0.0015	0.0011
	0.014-				
	0.012-	\longrightarrow			
	0.010-	\longrightarrow			
	-0.010	\longrightarrow			
	S 0.006-	+++			
	0.004-				
	0.001	E EO 7E 100	12.5 15.0 17.5	20.0 22.5 25.0	
	0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0 Z (mm)				

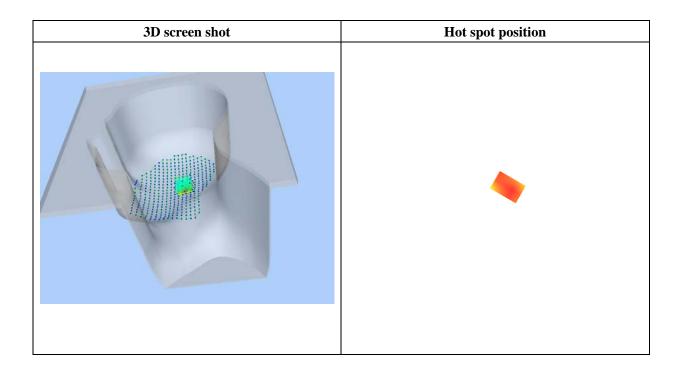

Report No.: STR15118220H Page 143 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.685604
Ambient Temperature	21.1
Liquid Temperature	21.2

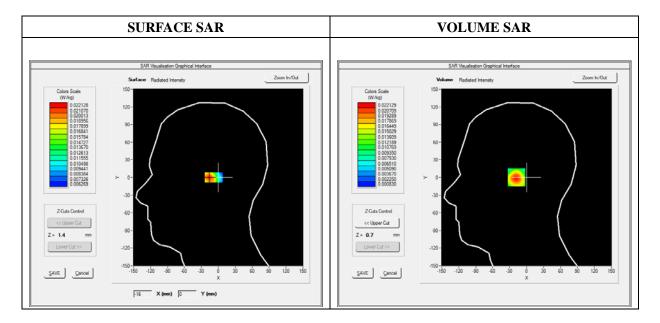




Maximum location: X=-16.00, Y=0.00

SAR 10g (W/Kg)	0.009788
SAR 1g (W/Kg)	0.023545

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0221	0.0072	0.0024	0.0014
(*** 8/	0.0221- 0.0200- 0.0175- 0.0150- WW 0.0125- 4W 0.0100- 0.0075- 0.0050-) 12.5 15.0 17.5 Z (mm)		

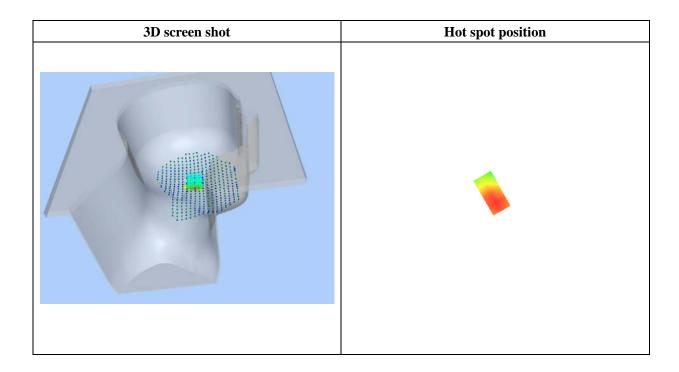

Report No.: STR15118220H Page 145 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.856703
Ambient Temperature	21.1
Liquid Temperature	21.2

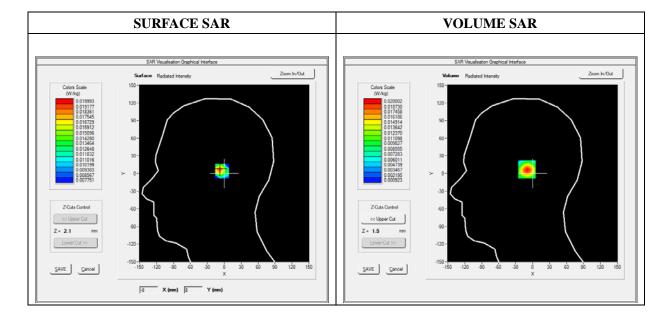




Maximum location: X=-8.00, Y=7.00

SAR 10g (W/Kg)	0.008430
SAR 1g (W/Kg)	0.018971

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0200	0.0065	0.0022	0.0013
	0.0200 - 0.0175 - 0.0150 - 0.0125 - 0.0100 - 0.0075 - 0.0050 - 0.0013 - 0.0 2.		12.5 15.0 17.5 Z (mm)		

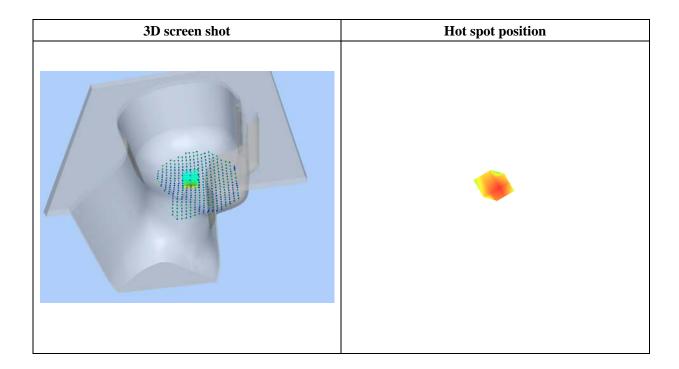

Report No.: STR15118220H Page 147 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.968546
Ambient Temperature	21.1
Liquid Temperature	21.2

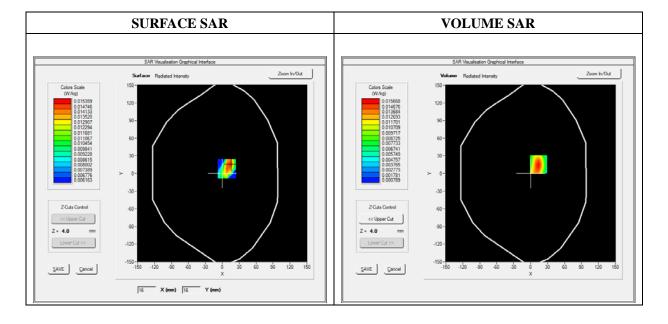




Maximum location: X=14.00, Y=16.00

SAR 10g (W/Kg)	0.006891
SAR 1g (W/Kg)	0.011153

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0157	0.0044	0.0013	0.0009
	0.016- 0.014- 0.012- 30.010- 30.008- 40.006- 0.004- 0.001- 0.00 2.		12.5 15.0 17.5 Z (mm)		

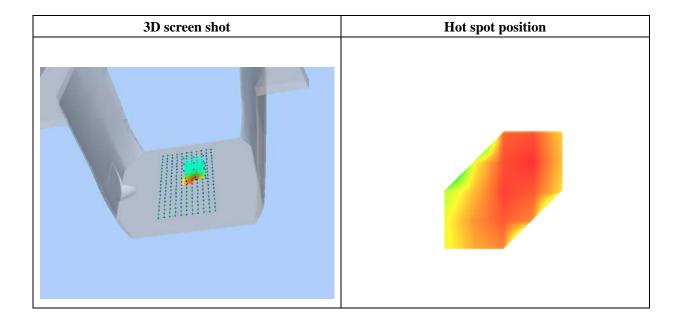

Report No.: STR15118220H Page 149 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.876509
Ambient Temperature	21.1
Liquid Temperature	21.2

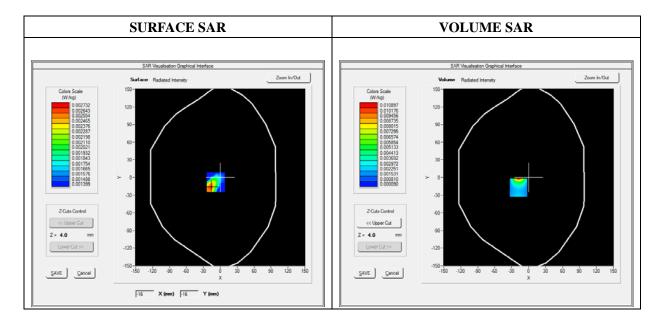




Maximum location: X=-18.00, Y=-17.00

SAR 10g (W/Kg)	0.002506
SAR 1g (W/Kg)	0.002798

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0025	0.0014	0.0010	0.0011
	0.0025- 0.0024- 0.0022- 0.0020- 0.0018- 0.0016- 0.0014- 0.0012- 0.0010- 0.00 2	.5 5.0 7.5 10.0) 12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

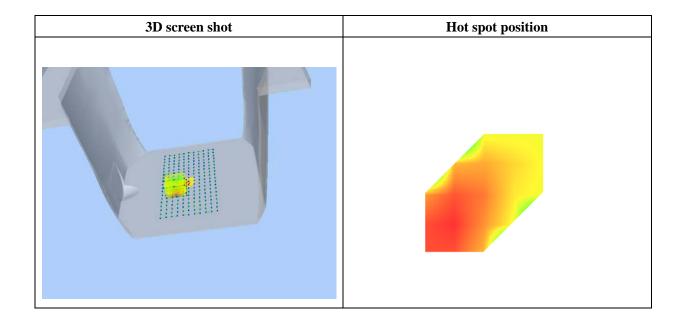

Report No.: STR15118220H Page 151 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.557835
Ambient Temperature	21.1
Liquid Temperature	21.2

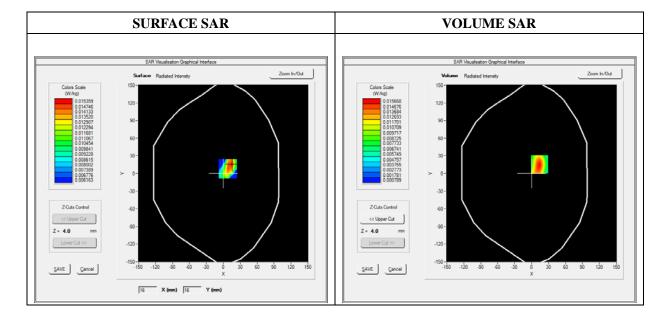




Maximum location: X=14.00, Y=16.00

SAR 10g (W/Kg)	0.004291
SAR 1g (W/Kg)	0.007561

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0157	0.0044	0.0013	0.0009
	0.016- 0.014- 0.012- 30.010- 30.008- 40.006- 0.004- 0.001- 0.00 2.		12.5 15.0 17.5 Z (mm)		

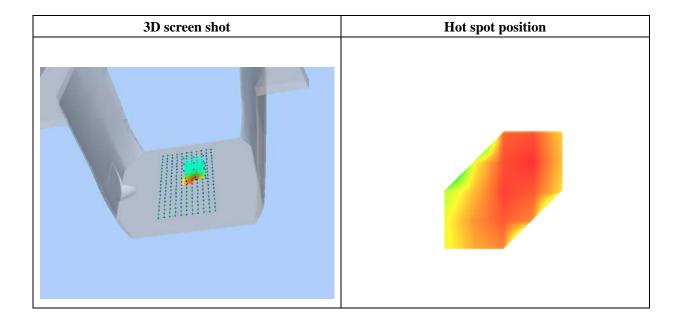

Report No.: STR15118220H Page 153 of 163 SAR Report



Type: Phone measurement (Complete)
Date of measurement: 11/23/2015


Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.749570
Ambient Temperature	21.1
Liquid Temperature	21.2

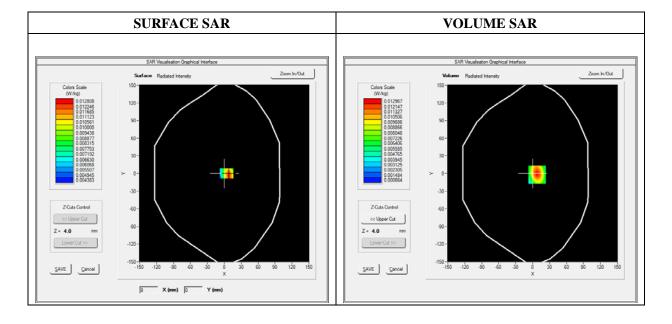




Maximum location: X=8.00, Y=-2.00

SAR 10g (W/Kg)	0.004896
SAR 1g (W/Kg)	0.009845

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0130	0.0034	0.0010	0.0008
	0.013 - 0.012 - 0.010 -				
	0.008				
	0.002 - 0.001 - 0.0 2	5 5.0 7.5 10.0	12.5 15.0 17.5 Z (mm)	20.0 22.5 25.0	

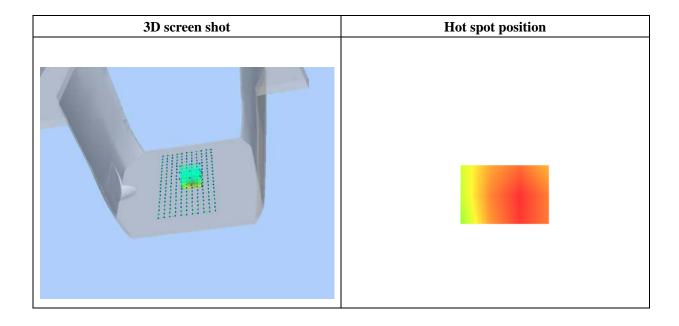


Report No.: STR15118220H Page 155 of 163 SAR Report



Annex C. EUT Photos

EUT View Front

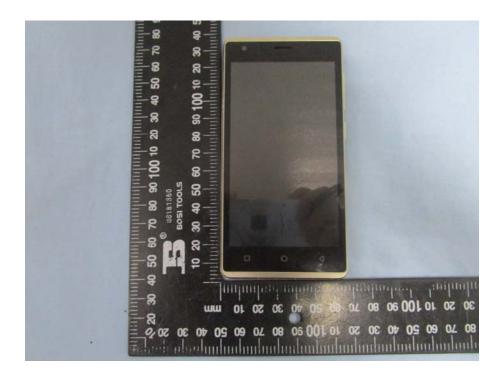


EUT View Back





Antenna View

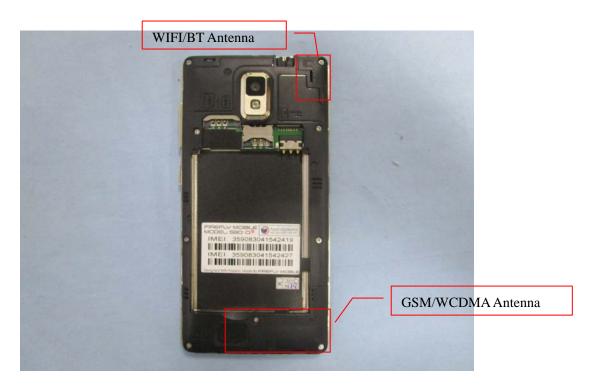




Annex D. Test Setup Photos

Head Exposure Conditions






Tilt

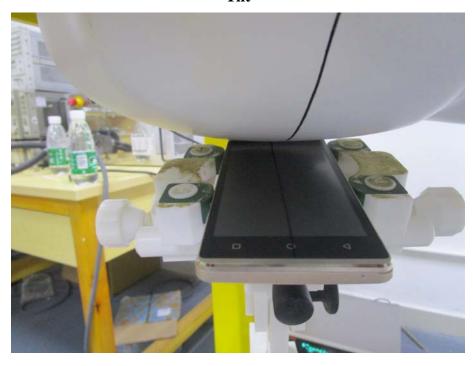



Cheek

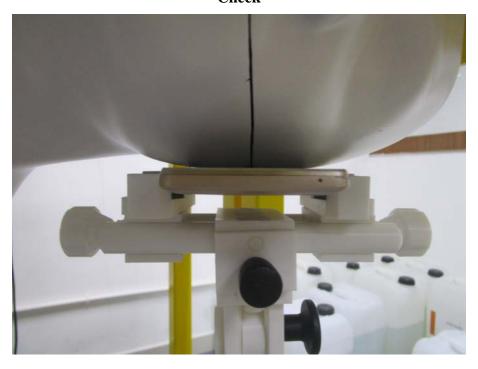


Tilt






Body-worn & Hotspot mode Exposure Conditions



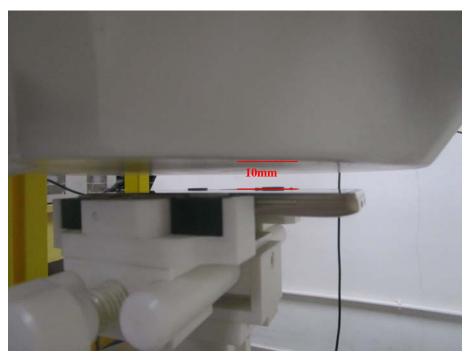

Back Side

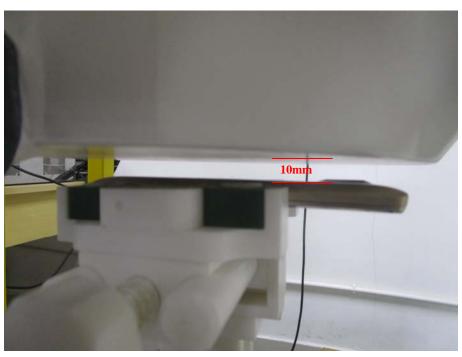




Hotspot Exposure Conditions





Left side

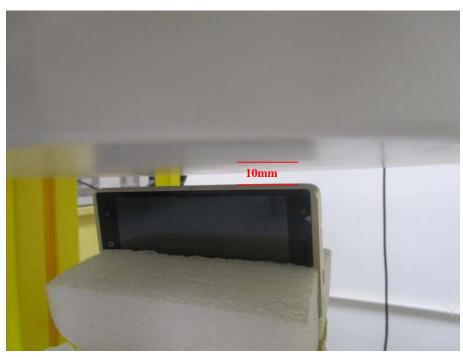



Top Side



Bottom Side





Annex E. Calibration Certificate

Please refer to the Exhibit for the Calibration Certificate

***** END OF REPORT *****