

# TEST REPORT

## FCC ID: 2AGJ5ZJ-W5

Applicant : Gonsin Conference Equipment Co., Ltd  
Address : No.401-406,Block C, Idea Industry Park, No.41 Fengxiang Road,  
Shunde, Foshan, Guangdong, China

### Equipment Under Test (EUT):

Name	:	Base Station Unit
Model	:	ZJ-W5, ZJ-W3


In Accordance with: FCC PART 15, SUBPART C : 2015 (Section 15.231)

Report No : T1851674 01  
Date of Test : November 13-18, 2015  
Date of Issue : November 18, 2015

Test Result: **PASS**

In the configuration tested, the EUT complied with the standards specified above

Authorized Signature



(Mark Zhu)

General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Alpha Product Testing Co., Ltd Or test done by Shenzhen Alpha Product Testing Co., Ltd Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Alpha Product Testing Co., Ltd Approvals in writing.

## Contents

<b>1. General Information.....</b>	<b>3</b>
1.1. Description of Device (EUT).....	3
1.2. Accessories of device (EUT) .....	4
1.3. Test Lab information .....	4
<b>2. Summary of test .....</b>	<b>5</b>
2.1. Summary of test result .....	5
<b>Occupied bandwidth.....</b>	<b>5</b>
2.2. Assistant equipment used for test.....	5
2.3. Block Diagram .....	6
2.4. Test mode .....	7
2.5. Test Conditions.....	8
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	8
2.7. Test Equipment.....	9
<b>3. Radiation Emission .....</b>	<b>10</b>
3.1. Radiation Emission Limits(15.209&231) .....	10
3.2. Test Setup .....	10
3.3. Test Procedure .....	12
3.4. Test Equipment Setting For emission test. ....	13
3.5. Test Condition .....	13
3.6. Test Result .....	13
<b>4. POWER LINE CONDUCTED EMISSION .....</b>	<b>23</b>
4.1. Conducted Emission Limits(15.209) .....	23
4.2. Test Setup .....	23
4.3. Test Procedure .....	24
4.4. Test Results .....	24
<b>5. Occupied bandwidth.....</b>	<b>27</b>
5.1. Test limit.....	27
5.2. Method of measurement.....	27
5.3. Test Setup .....	27
5.4. Test Results .....	27
<b>6. Transmission time.....</b>	<b>30</b>
6.1. Test limit.....	30
6.2. Method of measurement.....	30
6.3. Test Setup .....	30
6.4. Test Results .....	31
<b>7. Antenna Requirement .....</b>	<b>32</b>
7.1. Standard Requirement .....	32
7.2. Antenna Connected Construction .....	32
7.3. Result.....	32
<b>8. Test setup photo .....</b>	<b>33</b>
<b>9. Photos of EUT .....</b>	<b>35</b>

## 1. General Information

### 1.1. Description of Device (EUT)

EUT	: Base Station Unit
Model No.	: ZJ-W5, ZJ-W3
DIFF.	: All model's the function, software and electric circuit are the same, only different in Model Name.
Trade mark	: GONSIN
Power supply	: AC 120V/60Hz
Operation frequency	: 428-439.5MHz
Modulation	: FSK
Antenna Type	: External antenna, max gain 5.5dBi.
Applicant	: Gonsin Conference Equipment Co., Ltd
Address	: No.401-406, Block C, Idea Industry Park, No.41 Fengxiang Road, Shunde, Foshan, Guangdong, China
Manufacturer	: Gonsin Conference Equipment Co., Ltd
Address	: No.401-406, Block C, Idea Industry Park, No.41 Fengxiang Road, Shunde, Foshan, Guangdong, China

## 1.2. Accessories of device (EUT)

Accessories	: AC/DC Adapter
Model	: GM36-120300-D
Input	: AC 100-240V, 50/60Hz, 1.0A
Output	: DC 12V/3.0A
Accessories2	: N/A
Model	: N/A

## 1.3. Test Lab information

Shenzhen Alpha Product Testing Co., Ltd  
Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road,  
Bao'an, Shenzhen, China

August 11, 2014 File on Federal Communication Commission  
Registration Number: 203110

July 18, 2014 Certificated by IC  
Registration Number: 12135A

## 2. Summary of test

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Spurious Emission	Section 15.231&15.209	PASS
Conduction Emission	Section 15.207	PASS
Occupied bandwidth	Section 15.231	PASS
Transmission time	Section 15.231	PASS
Band Edge	Section 15.231	N/A
Antenna Requirement	Section 15.203	PASS
Note : Test according to ANSI C63.4-2014 and ANSI C63.10-2013		


### 2.2. Assistant equipment used for test

Description	:	N/A
Manufacturer	:	N/A
Model No.	:	N/A
Remark: N/A		

### 2.3. Block Diagram


1. For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was set into test mode before test. New battery is used during all test

AC main



2. For Power Line Conducted Emissions Test

AC main



## 2.4. Test mode

EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
FHSS(FSK)	Low :CH0	428
	Middle: CH12	434
	High: CH23	439.5

### Channel List

Chanel No.	Frequency (MHz)	Chanel No.	Frequency (MHz)	Chanel No.	Frequency (MHz)	Chanel No.	Frequency (MHz)
0	428 MHz	6	431MHz	12	434MHz	18	437MHz
1	428.5MHz	7	431.5MHz	13	434.5MHz	19	437.5MHz
2	429MHz	8	432MHz	14	435MHz	20	438MHz
3	429.5MHz	9	432.5MHz	15	435.5MHz	21	438.5MHz
4	430MHz	10	433MHz	16	436MHz	22	439MHz
5	430.5MHz	11	433.5MHz	17	436.5MHz	23	439.5MHz

## 2.5. Test Conditions

Temperature range	21-25℃
Humidity range	40-75%
Pressure range	86-106kPa

## 2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	$1 \times 10^{-9}$	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2℃	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	



## 2.7. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last Cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2015.01.19	1 Year
Spectrum analyzer	Agilent	E4407B	MY49510055	2015.01.19	1 Year
Receiver	R&S	ESCI	101165	2015.01.19	1 Year
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2014.01.21	2 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2014.01.21	2 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170 D(1432)	2014.01.21	2 Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2015.01.19	1 Year
Cable	Resenberger	SUCOFLEX 104	MY6562/4	2015.01.19	1 Year
Cable	Resenberger	SUCOFLEX 104	309972/4	2015.01.19	1 Year
Cable	Resenberger	SUCOFLEX 104	329112/4	2015.01.19	1 Year
Power Meter	Anritsu	ML2487A	6K00001491	2015.01.19	1 Year
Power sensor	Anritsu	ML2491A	32516	2015.01.19	1 Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	2015.01.19	1 Year
Pre-amplifier	Quietek	AP-180C	CHM-0602012	2015.01.19	1 Year

### 3. Radiation Emission

#### 3.1. Radiation Emission Limits(15.209&231)


Frequency (MHz)	Field Strength Limits at 3 metres (watts, e.i.r.p.)		
	uV/m	dB uV/m	Measurement distance(m)
0.009-0.490	2400/F(kHz)	XX	300
0.490-1.705	24000/F(kHz)	XX	30
1.705-30	30	29.5	30
30~88	100(3nW)	40	3
88~216	150(6.8nW)	43.5	3
216~960	200(12nW)	46	3
Above960	500(75nW)	54	3
Carrier frequency		80.8(AV)	3
Carrier frequency		100.8(PK)	3

**NOTE:**


- The tighter limit applies at the band edges.
- Emission Level(dB uV/m)=20log Emission Level(Uv/m)

#### 3.2. Test Setup


See the next page.

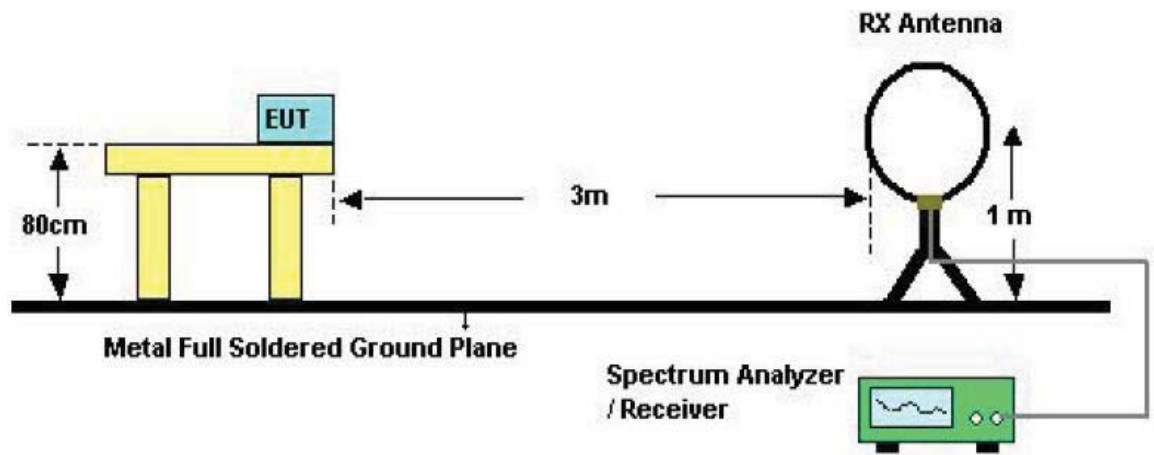

Below 30MHz Test Setup

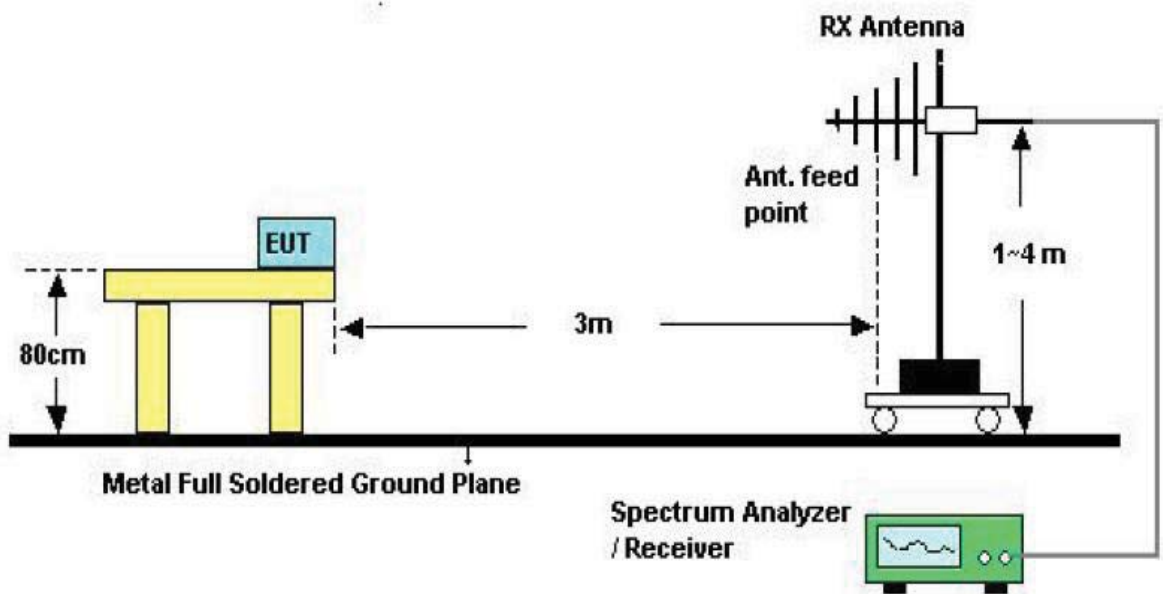

Above 30MHz Test Setup

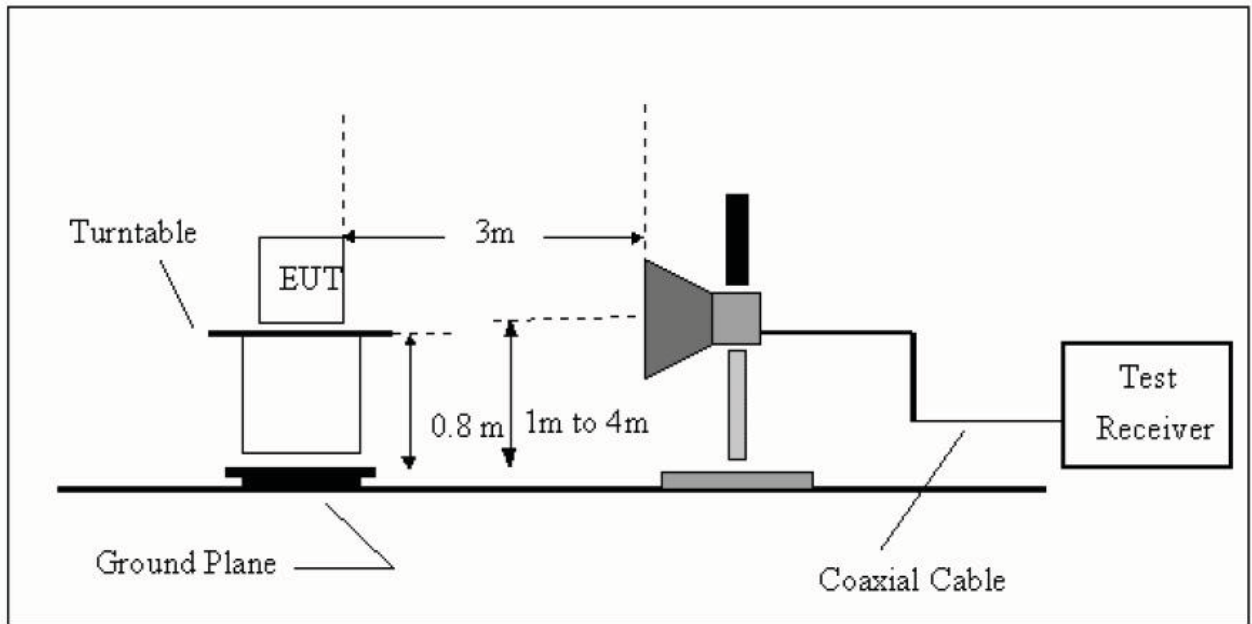

Above 1GHz Test Setup

### 3.3. Test Procedure

- a) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.

### 3.4. Test Equipment Setting For emission test.

9KHz~150KHz	RBW 200Hz	VBW1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

### 3.5. Test Condition

Continual Transmitting in maximum power(The new battery be used during Test)

### 3.6. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT.  
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: **PASS**

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Notes:** 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit


2 –Spectrum setting:

a. Peak setting 30MHz-1GHz, RBW=100KHz, VBW=300KHz.

3- PK measure result values is less than the AVG limit values, so AV measure result values test not applicable.



Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

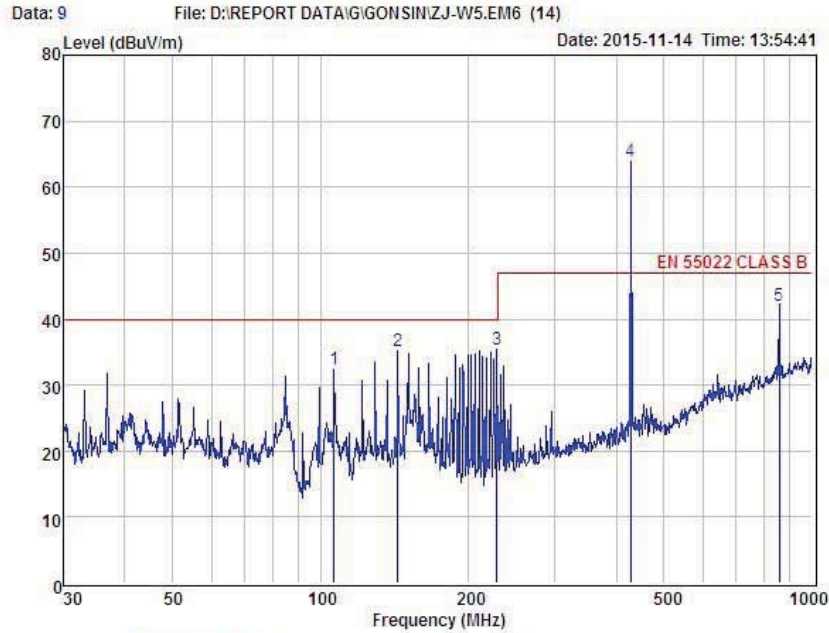


Condition : EN 55022 CLASS B 3m POL: VERTICAL  
 EUT :  
 Model No : ZJ-W5  
 Test Mode :  
 Power :  
 Test Engineer :  
 Remark :  
 Temp : 24.2℃  
 Hum : 54%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	106.76	51.02	10.93	30.00	0.42	32.37	40.00	-7.63	Peak
2	143.83	50.47	13.77	29.39	0.38	35.23	40.00	-4.77	Peak
3	228.49	51.83	11.10	28.14	0.55	35.34	40.00	-4.66	Peak
4	428.00	74.87	15.43	27.10	0.68	63.88	47.00	-4.90	Peak
5	856.00	44.64	21.10	24.80	1.16	42.10	47.00	-4.90	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

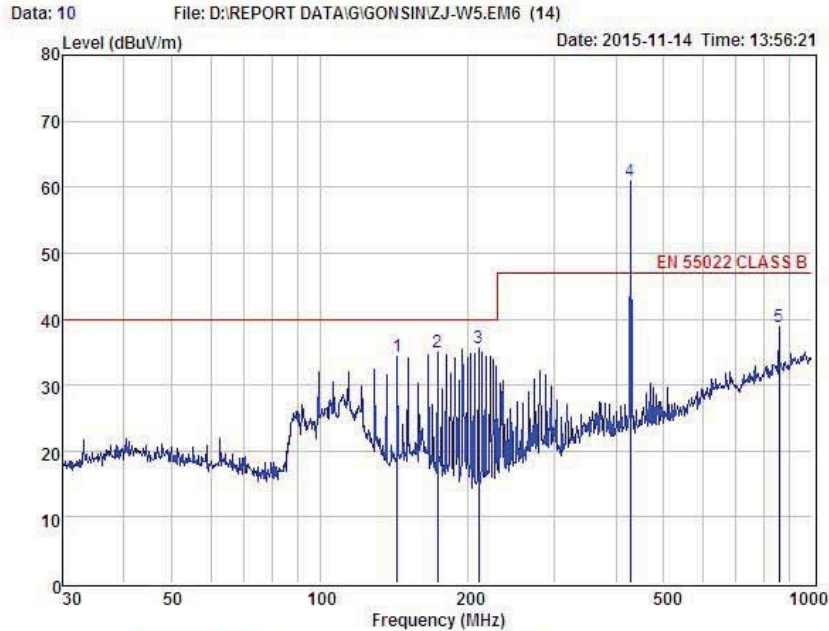


Condition : EN 55022 CLASS B 3m POL: HORIZONTAL  
 EUT :  
 Model No : ZJ-W5  
 Test Mode :  
 Power :  
 Test Engineer :  
 Remark :  
 Temp : 24.2°C  
 Hum : 54%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	143.83	49.55	13.77	29.39	0.38	34.31	40.00	-5.69	Peak
2	173.21	50.54	12.88	29.08	0.52	34.86	40.00	-5.14	Peak
3	210.05	53.37	10.07	28.51	0.62	35.55	40.00	-4.45	Peak
4	428.00	71.94	15.43	27.10	0.68	60.95	47.00	-8.22	Peak
5	856.00	41.32	21.10	24.80	1.16	38.78	47.00	-8.22	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

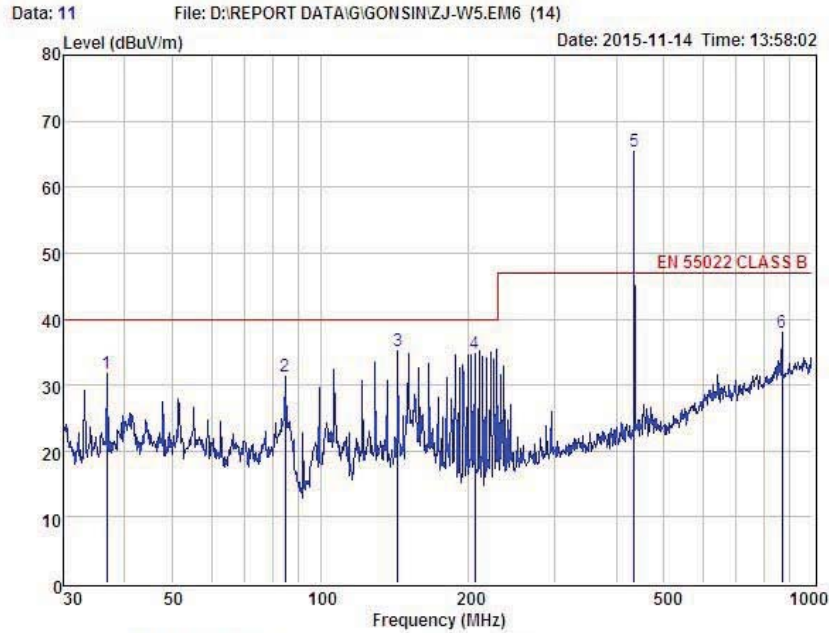

Condition : EN 55022 CLASS B 3m POL: VERTICAL  
 EUT :  
 Model No : ZJ-W5  
 Test Mode :  
 Power :  
 Test Engineer :  
 Remark :  
 Temp : 24.2°C  
 Hum : 54%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	36.77	49.02	13.39	30.83	0.10	31.68	40.00	-8.32	Peak
2	84.70	51.79	9.38	30.09	0.26	31.34	40.00	-8.66	Peak
3	143.83	50.47	13.77	29.39	0.38	35.23	40.00	-4.77	Peak
4	206.40	53.02	10.00	28.67	0.41	34.76	40.00	-5.24	Peak
5	434.00	76.29	15.58	27.22	0.67	65.32	47.00	-18.32	Peak
6	869.00	40.01	21.26	24.89	1.49	37.87	47.00	-9.13	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss






Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

Data: 12

File: D:\REPORT DATA\G\GONSIN\ZJ-W5.EM6 (14)

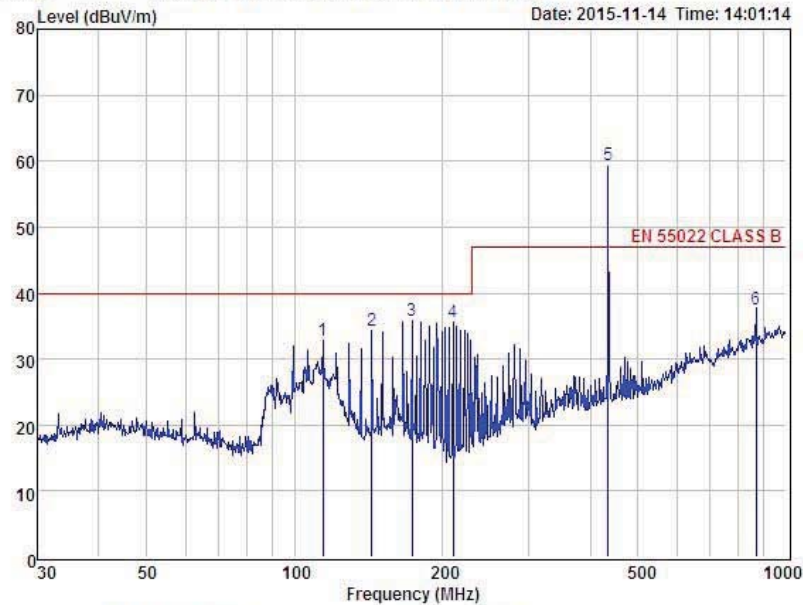


Condition : EN 55022 CLASS B 3m POL: HORIZONTAL  
 EUT :  
 Model No : ZJ-W5  
 Test Mode :  
 Power :  
 Test Engineer :  
 Remark :  
 Temp : 24.2℃  
 Hum : 54%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	114.11	50.63	11.68	29.85	0.41	32.87	40.00	-7.13	Peak
2	143.83	49.55	13.77	29.39	0.38	34.31	40.00	-5.69	Peak
3	173.21	51.54	12.88	29.08	0.52	35.86	40.00	-4.14	Peak
4	210.05	53.37	10.07	28.51	0.62	35.55	40.00	-4.45	Peak
5	434.00	70.33	15.58	27.22	0.67	59.36	47.00	-12.36	Peak
6	868.00	39.79	21.23	24.89	1.47	37.60	47.00	-9.40	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

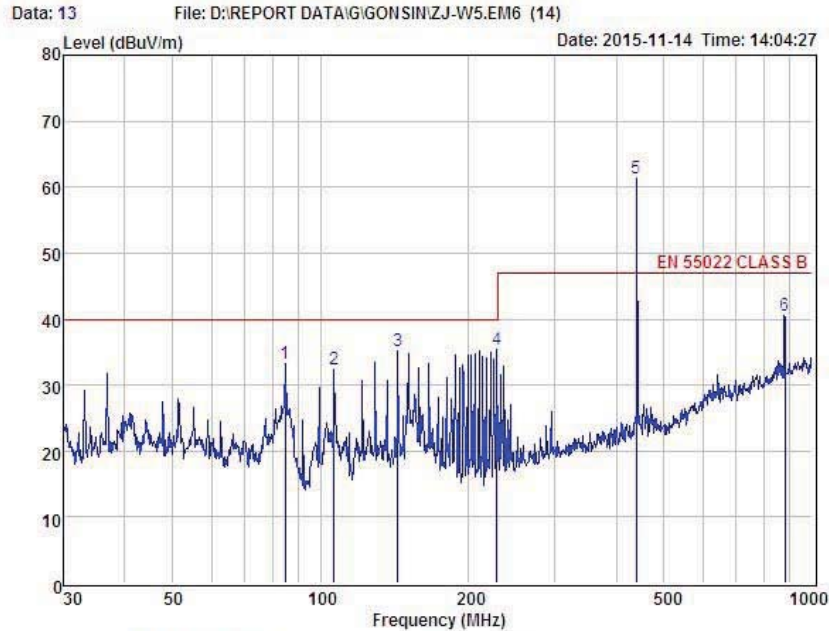


Condition : EN 55022 CLASS B 3m POL: VERTICAL  
 EUT :  
 Model No : ZJ-W5  
 Test Mode :  
 Power :  
 Test Engineer :  
 Remark :  
 Temp : 24.2℃  
 Hum : 54%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	84.70	53.79	9.38	30.09	0.26	33.34	40.00	-6.66	Peak
2	106.76	51.02	10.93	30.00	0.42	32.37	40.00	-7.63	Peak
3	143.83	50.47	13.77	29.39	0.38	35.23	40.00	-4.77	Peak
4	228.49	51.83	11.10	28.14	0.55	35.34	40.00	-4.66	Peak
5	439.50	72.13	15.72	27.36	0.83	61.32	47.00	-6.49	Peak
6	879.00	42.53	21.37	24.98	1.59	40.51	47.00	-6.49	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

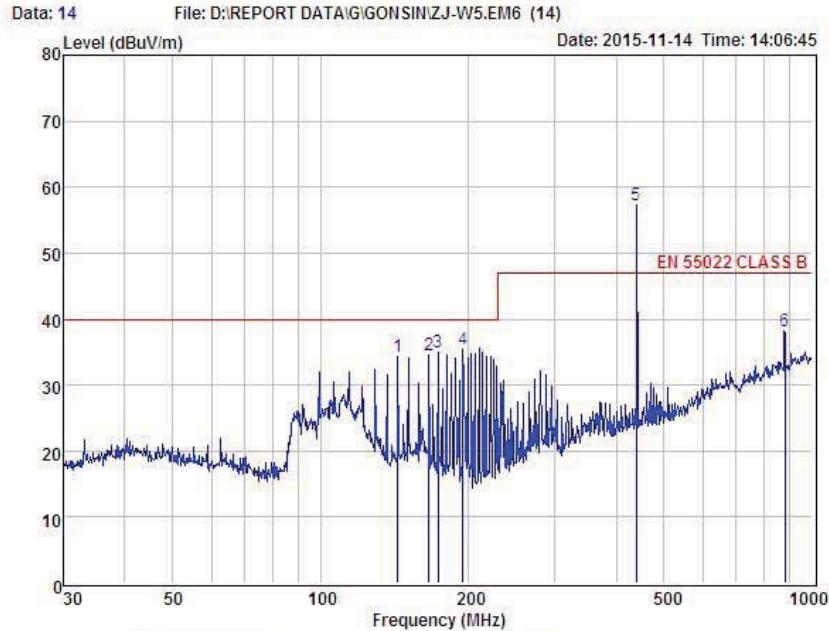

Condition : EN 55022 CLASS B 3m POL: HORIZONTAL  
 EUT :  
 Model No : ZJ-W5  
 Test Mode :  
 Power :  
 Test Engineer :  
 Remark :  
 Temp : 24.2°C  
 Hum : 54%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	143.83	49.55	13.77	29.39	0.38	34.31	40.00	-5.69	Peak
2	166.07	49.76	13.56	29.14	0.39	34.57	40.00	-5.43	Peak
3	173.21	50.54	12.88	29.08	0.52	34.86	40.00	-5.14	Peak
4	195.14	53.61	10.24	28.89	0.46	35.42	40.00	-4.58	Peak
5	439.50	68.07	15.72	27.36	0.83	57.26			
6	879.00	40.19	21.37	24.98	1.59	38.17	47.00	-8.83	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

## Radiated Emissions Result of Inside band

EUT		Base Station Unit			Model Name		ZJ-W5		
Temperature		25°C			Relative Humidity		56%		
Pressure		960hPa			Test voltage		AC 120V/60Hz		
Test Mode		TX CH0			Test by		Eric		
Channel (428MHz Below 1GHz)									
Fre.	Plority	Reading	Antenna	Cable	Amplifier	Correct	Measure	Limit	Margin
MHz	H/V	dBuV	Factor	Loss	Gain	Factor	Result	dBuV/m	dB
428	H	71.94（PK）	15.43	0.68	27.10	-10.99	60.59	80.63（PK）	-20.04
--	H	--	--	--	--	--	--	--	--
428	V	74.87（PK）	15.43	0.68	27.1	-10.99	63.88	80.63（PK）	-16.75
--	V	--	--	--	--	--	--	--	--

EUT		Base Station Unit			Model Name		ZJ-W5		
Temperature		25°C			Relative Humidity		56%		
Pressure		960hPa			Test voltage		AC 120V/60Hz		
Test Mode		TX CH12			Test by		Eric		
Channel (434MHz Below 1GHz)									
Fre.	Plority	Reading	Antenna	Cable	Amplifier	Correct	Measure	Limit	Margin
MHz	H/V	dBuV	Factor	Loss	Gain	Factor	Result	dBuV/m	dB
434	H	70.33（PK）	15.58	0.67	27.22	-10.97	59.36	80.83（PK）	-21.47
--	H	--	--	--	--	--	--	--	--
434	V	76.29（PK）	15.58	0.67	27.22	-10.97	65.32	80.83（PK）	-15.51
--	V	--	--	--	--	--	--	--	--

EUT		Base Station Unit			Model Name		ZJ-W5		
Temperature		25℃			Relative Humidity		56%		
Pressure		960hPa			Test voltage		AC 120V/60Hz		
Test Mode		TX CH23			Test by		Eric		
Channel (439.5MHz Below 1GHz)									
Fre.	Plority	Reading	Antenna	Cable	Amplifier	Correct	Measure	Limit	Margin
MHz	H/V	dBuV	Factor	Loss	Gain	Factor	Result	dBuV/m	dB
439.5	H	68.07（PK）	15.72	0.83	27.36	-10.81	57.26	81.01（PK）	-23.75
--	H	--	--	--	--	--	--	--	--
439.5	V	72.13（PK）	15.72	0.83	27.36	-10.81	61.32	81.01（PK）	-19.69
--	V	--	--	--	--	--	--	--	--

EUT		Base Station Unit			Model Name		ZJ-W5		
Temperature		25°C			Relative Humidity		56%		
Pressure		960hPa			Test voltage		AC 120V/60Hz		
Test Mode		TX CH0			Test by		Eric		
Channel (428MHz Above 1GHz)									
Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs	Peak Limit (dBuV/m)	Margin (dB)	Remark	
					Peak (dBuV/m)				
1284	V	52.32	---	-10.84	43.22	74.00	-30.78	Peak	
--	V	--	---	--	--	--	--	--	
1284	H	51.74	---	-10.84	42.61	74.00	-31.39	Peak	
--	H	--	---	--	--	--	--	--	

EUT		Base Station Unit			Model Name		ZJ-W5	
Temperature		25°C			Relative Humidity		56%	
Pressure		960hPa			Test voltage		AC 120V/60Hz	
Test Mode		TX CH12			Test by		Eric	
Channel (434MHz Above 1GHz)								
Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs	Peak Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)			
1302	V	53.04	---	-10.64	42.21	74.00	-31.79	Peak
--	V	--	---	--	--	--	--	--
1302	H	51.74	---	-10.64	42.11	74.00	-31.56	Peak
--	H	--	---	--	--	--	--	--

EUT		Base Station Unit			Model Name		ZJ-W5		
Temperature		25°C			Relative Humidity		56%		
Pressure		960hPa			Test voltage		AC 120V/60Hz		
Test Mode		TX CH23			Test by		Eric		
Channel (439.5MHz Above 1GHz)									
Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs	Peak Limit (dBuV/m)	Margin (dB)	Remark	
					Peak (dBuV/m)				
1318.5	V	54.16	---	-10.71	43.68	74.00	-30.32	Peak	
--	V	--	---	--	--	--	--	--	
1318.5	H	52.83	---	-10.71	40.91	74.00	-33.09	Peak	
--	H	--	---	--	--	--	--	--	

## 4. POWER LINE CONDUCTED EMISSION

### 4.1. Conducted Emission Limits(15.209)


Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

### 4.2. Test Setup

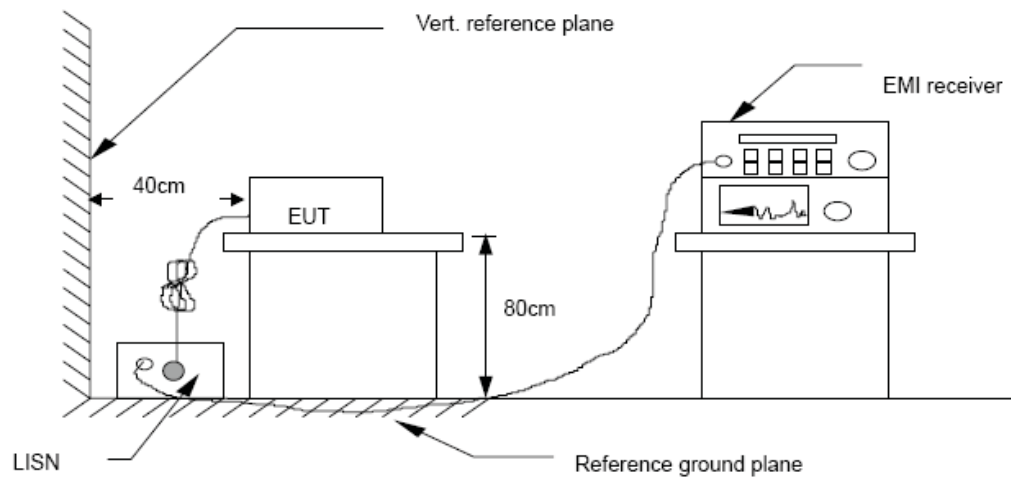

### 4.3. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.


### 4.4. Test Results

Conclusion: PASS





Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

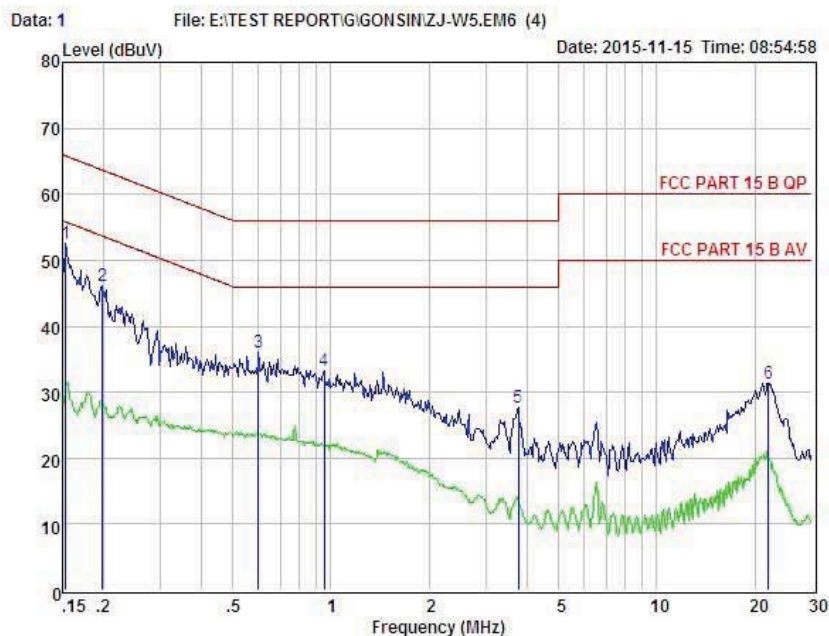


Condition : FCC PART 15 B QP POL: NEUTRAL Temp:24 °C Hum:56 %  
 EUT :  
 Model No : ZJ-W5  
 Test Mode : TX model  
 Power : AC 120V/60Hz  
 Test Engineer: Eric  
 Remark :

Item	Freq	Read	LISN	Attenuator	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
			dB	dB	dB				
1	0.153	42.79	0.03	-9.52	0.10	52.44	65.82	-13.38	Peak
2	0.199	36.43	0.03	-9.52	0.10	46.08	63.67	-17.59	Peak
3	0.598	26.33	0.03	-9.59	0.10	36.05	56.00	-19.95	Peak
4	0.953	23.40	0.04	-9.63	0.10	33.17	56.00	-22.83	Peak
5	3.759	17.58	0.08	-9.87	0.12	27.65	56.00	-28.35	Peak
6	22.063	20.83	0.39	-9.81	0.39	31.42	60.00	-28.58	Peak

Remarks: Level = Read + LISN Factor - Attenuator Factor + Cable loss



Shenzhen Alpha Product Testing Co., Ltd.  
 Building B, East Area of Nanchang Second Industrial Zone,  
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
 Tel: +86-755-29766001 FAX: +86-755-86375565  
 Website: <http://www.a-lab.cn> Email: [service@a-lab.cn](mailto:service@a-lab.cn)

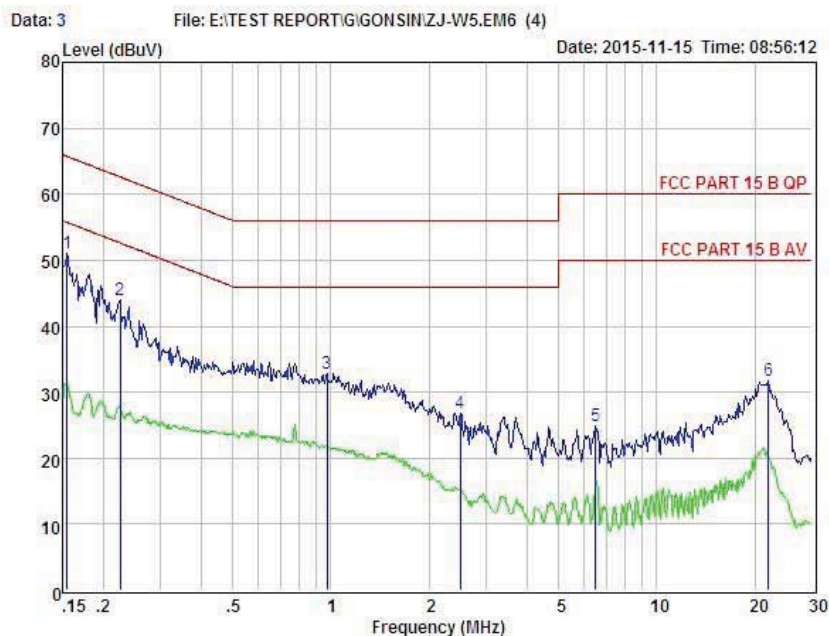

Condition : FCC PART 15 B QP POL: LINE Temp: 24 °C Hum: 56 %  
 EUT :  
 Model No : ZJ-W5  
 Test Mode : TX model  
 Power : AC 120V/60Hz  
 Test Engineer: Eric  
 Remark :

Item	Freq	Read	LISN	Attenuator	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
1	0.155	41.40	0.03	-9.52	0.10	51.05	65.74	-14.69	Peak
2	0.226	34.22	0.03	-9.52	0.10	43.87	62.61	-18.74	Peak
3	0.974	23.10	0.04	-9.63	0.10	32.87	56.00	-23.13	Peak
4	2.500	16.89	0.06	-9.75	0.11	26.81	56.00	-29.19	Peak
5	6.488	14.65	0.12	-9.97	0.14	24.88	60.00	-35.12	Peak
6	22.063	21.13	0.39	-9.81	0.39	31.72	60.00	-28.28	Peak

Remarks: Level = Read + LISN Factor - Attenuator Factor + Cable loss

## 5. Occupied bandwidth

### 5.1. Test limit

Please refer section 15.231

According to §15.231(C), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

### 5.2. Method of measurement

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.



b) The test receiver RBW set 30KHz, VBW set 30KHz, Sweep time set auto.

### 5.3. Test Setup



### 5.4. Test Results

EUT: Base Station Unit				
M/N: ZJ-W5				
Test Mode: Keeping TX mode				
Test date: 2015-11-16		Test site: RF site	Tested by: Eric	
Mode	Freq (MHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
FHSS(FSK)	428	156.2	/	PASS
	434	175.2	/	PASS
	439.5	179.4	/	PASS

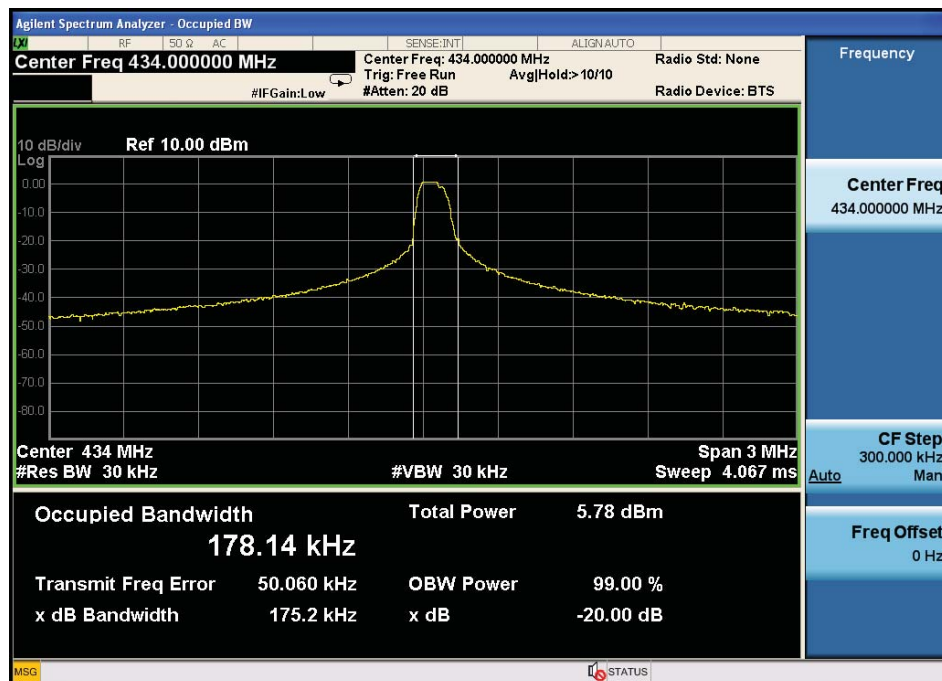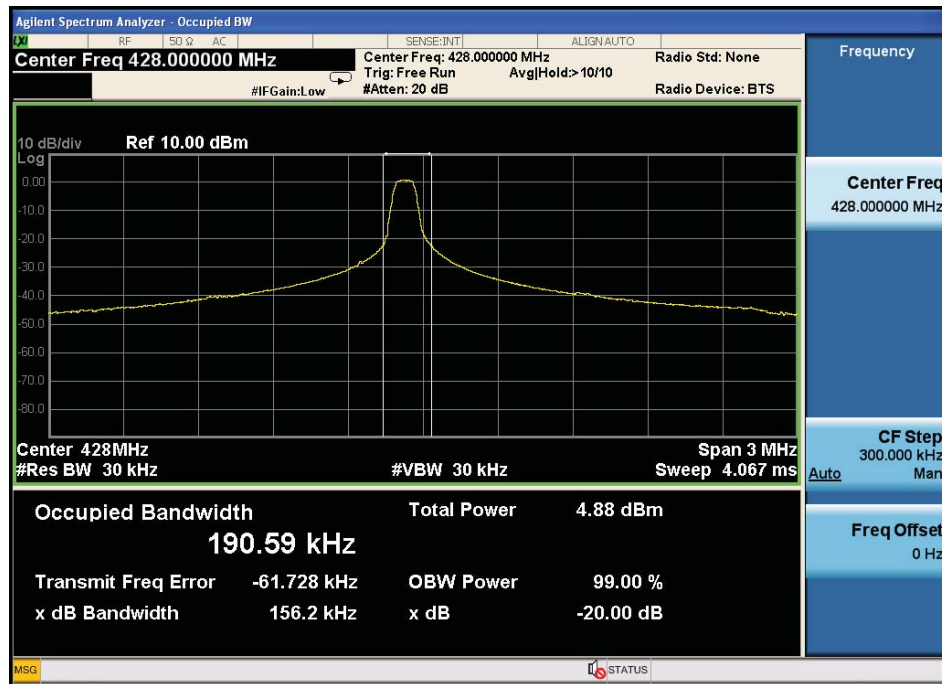



## 6. Transmission time

### 6.1. Test limit

Please refer section 15.231

According to §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

According to §15.231(a)(2), A transmitter activated automatically shall cease transmission within 5 seconds after activation.

### 6.2. Method of measurement

6.2.1. Place the EUT on the table and set it in transmitting mode.


6.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3. Set spectrum analyzer Center=434MHz, Span = 0MHz, Sweep = 200ms.

6.2.4. Set the spectrum analyzer as RBW, VBW=1MHz,


6.2.5. Max hold, view and count how many channel in the band.

### 6.3. Test Setup



## 6.4. Test Results

EUT: Base Station Unit				
M/N: ZJ-W5				
Test Mode: Keeping TX mode				
Test date: 2015-11-16		Test site: RF site	Tested by: Eric	
Mode	Freq (MHz)	Test Result(s)	Limit (s)	Conclusion
FSK	434	3.02	< 5s	PASS

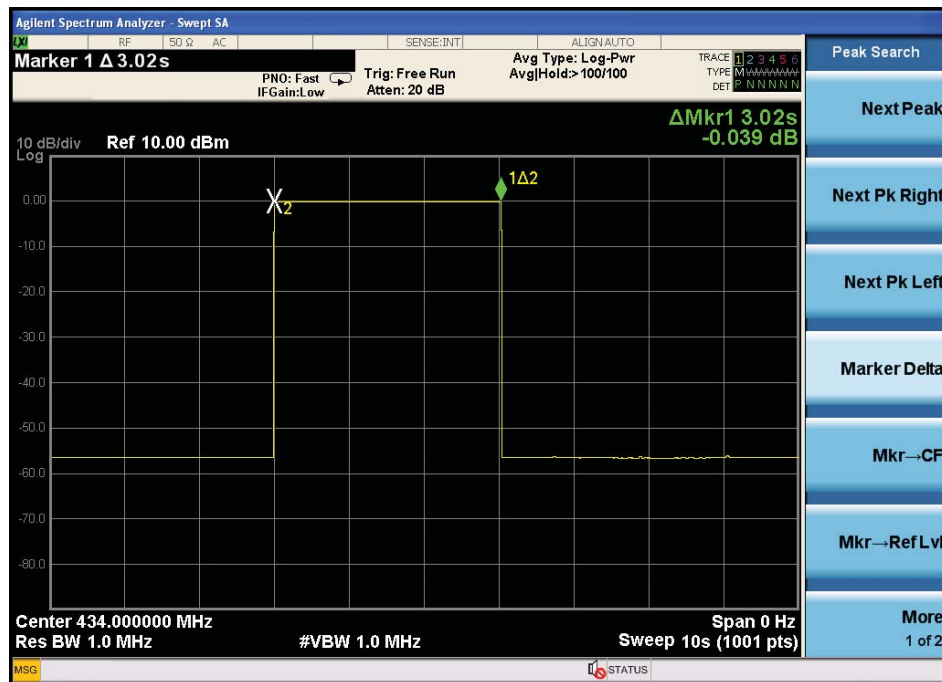

## **7. Antenna Requirement**

### **7.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **7.2. Antenna Connected Construction**

External antenna with reverse polarity non-standard antenna port ,antenna gain is 5.5 dBi


### **7.3. Result**

The EUT antenna is External antenna. It comply with the standard requirement.




## 8. Test setup photo

Photos of Radiated emission

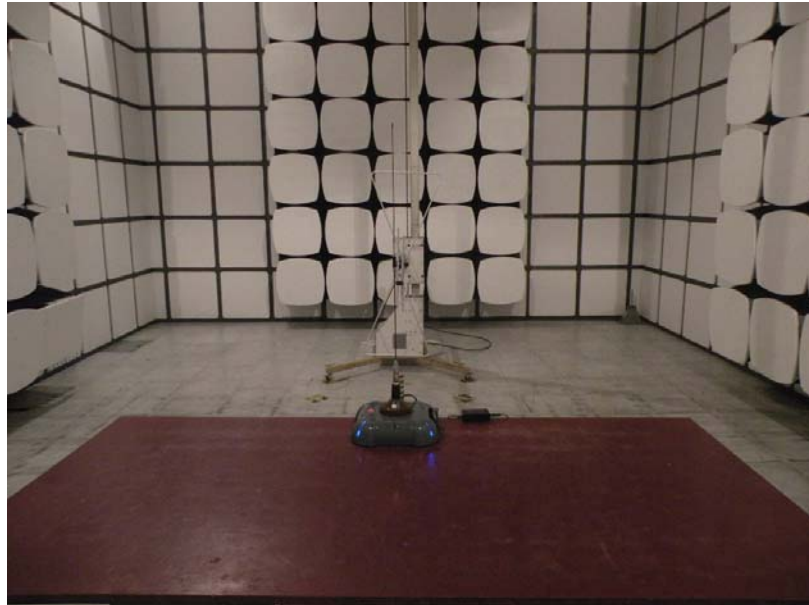


Photos of Conducted Emission test

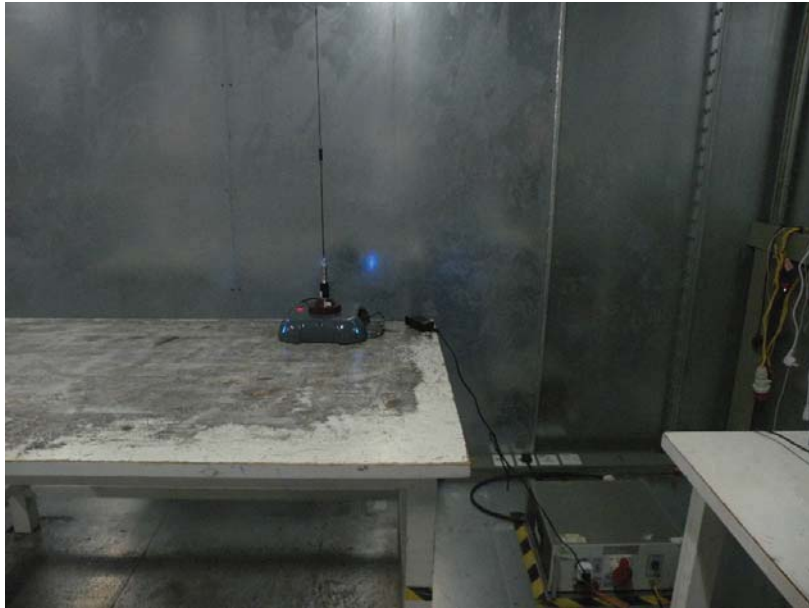


## 9. Photos of EUT



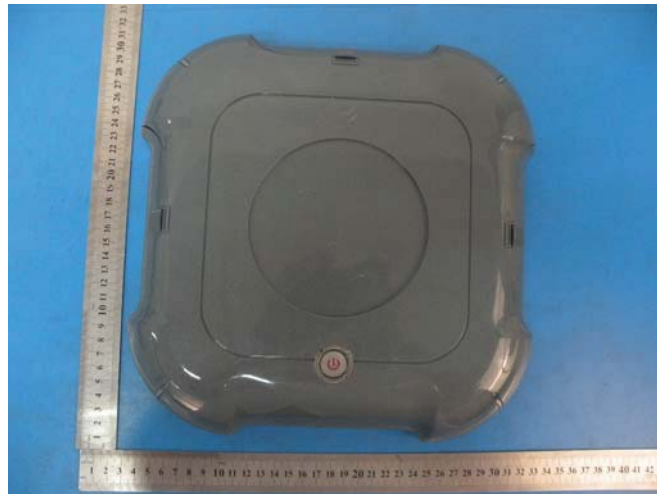





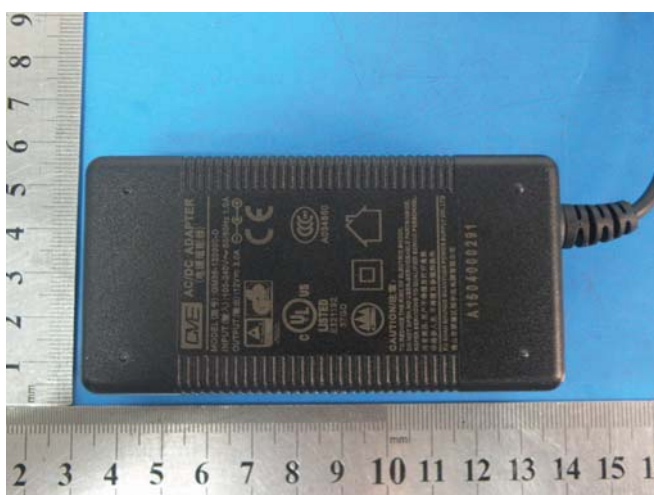

-----END OF THE REPORT-----