



FCC Part 15, Subpart C, Section 15.247

Test Report

On

Pulse Sensor

**Customer Name:** nke Watteco

**Customer P.O.:** C146509

**Date of Report Revision:** March 11, 2016

**Test Report No:** R-6046N-1, Rev. A

**Test Start Date:** January 15, 2016

**Test Finish Date:** January 19, 2016

**Test Technician:** M. Seamans

**Revision Approved By:** T. Hannemann

**Report Revision Prepared By:** J. Ramsey

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

### Technical Information

|  |  |
|--|--|
| <b>Report Number:</b>                    | R-6046N-1, Rev. A  |
| <b>Customer:</b>                         | nke Watteco  |
| <b>Address:</b>                          | 6 Rue Gutenberg<br>Z.I. Kerandre<br>Hennebont, France 56700  |
| <b>Test Sample:</b>                      | Pulse Sensor   |
| <b>Brand Name:</b>                       | nke Watteco  |
| <b>Part Number:</b>                      | 50-70-005-001  |
| <b>Model Number:</b>                     | S0   |
| <b>Serial Number:</b>                    | 2100547920001  |
| <b>Manufactured By:</b>                  | nke Watteco  |
| <b>Power Requirements:</b>               | 3.6 VDC via one disposable lithium battery                   |
| <b>FHSS Frequency Band of Operation:</b> | 902.3 MHz to 914.9 MHz                                       |
| <b>DTS Frequency Band of Operation:</b>  | 903.0 MHz to 914.2 MHz                                       |
| <b>Antenna Type:</b>                     | 84 mm long copper wire brazed on the PCB Gain - 2.15dBi      |
| <b>Antenna Connector Type:</b>           | N/A  |
| <b>Equipment Use:</b>                    | Measures Water, Electrical or Gas Consumption and Sends Data |
| <b>FCC ID:</b>                           | 2AGTV50-70-005   |

#### Test Specification:

FCC Rules and Regulations, Telecommunications, Part 15 Radio Frequency Devices, Subpart C, Intentional Radiators

#### Test Procedure:

ANSI C63.4:2009, Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

558074 D01, FCC Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247, v03 r04, January 7, 2016

DA 00-705, FCC Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems (FHSS) Operating Under 15.247, March 30, 2000



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**EUT Description:**

The Pulse Sensor is used in the energy industry. It is installed at the output of a water, electrical or gas meter and transmits consumption data to a receiver. The EUT has two transmission modes as described below:

**FHSS:**

In FHSS operation data is transmitted over a 125 KHz channel selected randomly from 64 possible channels in the frequency range of 902.3 to 914.9 MHz. The duration of the transmission is limited to a maximum of 400 milliseconds.

**DTS:**

In DTS operation data is transmitted over a 500 kHz channel selected randomly from 8 possible channels in the 903.0 to 914.2 MHz. The duration of the transmission is limited to a maximum of 400 milliseconds.

All equipment that was utilized to achieve the EUT operating state specified is listed below:

Table 1 - Support Equipment

| Description         | Manufacturer                  | Model Number | Serial Number           |
|---------------------|-------------------------------|--------------|-------------------------|
| Laptop PC           | ASUS                          | Eee PC       | 8BOAAQ486781            |
| MSP-GANG Programmer | Texas Instruments Elprotronic | MSP-GANG     | 1110-1497               |
| USB Dongle          | nKe Watteco                   | Test FCC     | 70:83:D5:E7:5F:00:00:65 |



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

### **Tests Performed**

The test methods performed on the EUT are shown below. Testing was performed in accordance with the applicable FCC requirements for each of the two transmission modes (DTS & FHSS).

Table 2 - Radiated Emission Limits

| <b>FCC Part 15, Subpart C</b>      | <b>Test Method</b>   |
|------------------------------------|--|
| <b>DTS Test Methods Performed</b>  |  |
| 15.247(a)(2)                       | 6 dB Bandwidth   |
| 15.247(b)(3)                       | Power Output   |
| 15.247(d)                          | Antenna Terminal Out of Band/<br>Band Edge Conducted Emissions (25 MHz – 10 GHz) |
| 15.247(d)                          | Out of Band/Band Edge Radiated Emissions (30 MHz to 10 GHz)                      |
| 15.247(e)                          | Power Density  |
| <b>FHSS Test Methods Performed</b> |  |
| 15.247(a)(1)                       | 20 dB Bandwidth  |
| 15.247(a)(1) (iii)                 | Number of Hopping Channels and Time of Occupancy                                 |
| 15.247(a)(1)                       | Channel Separation   |
| 15.247(b)(3)                       | Power Output   |
| 15.247(d)                          | Antenna Terminal Out of Band/<br>Band Edge Conducted Emissions (25 MHz – 10 GHz) |
| 15.247(d)                          | Out of Band/Band Edge Radiated Emissions (30 MHz to 10 GHz)                      |

### **General Test Requirements**

The measurement procedures of ANSI C63.4:2009 were utilized as specified in FCC Part 15, Subpart C, Section 15.31(a)(3), FCC Guidance for Performing Compliance Measurements on Digital Transmission Systems, v 03 r04, January 7, 2016, DA 00-705 and FCC Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems (FHSS) Operating Under 15.247, March 30, 2000.

1. All radiated emissions measurements were performed on an Open Area Test Site (OATS), listed with the FCC, in accordance with FCC Section 15.31(d).
2. All measurements were performed at the specified 3 meter test distance as required by FCC Section 15.31(f).
3. The EUT was rotated throughout 360 degrees for all radiated emissions measurements as specified in FCC Section 15.31(f)(5).
4. All readily accessible EUT controls were adjusted in such a manner as to maximize the level of emissions in accordance with FCC Section 15.31(g).
5. Appropriate accessories were attached to all EUT ports during the performance of radiated emissions measurements as required by FCC Section 15.31(i).
6. The EUT operated over the frequency range of 902.3 MHz to 914.9 MHz for FHSS operation and 903.0 to 914.2 MHz for DTS operation. Testing was performed with the device operating at 3 frequencies, 1 at the top, 1 in the middle and 1 at the bottom of the range of operation in accordance with FCC Section 15.31(m).
7. The frequency spectrum was investigated from the lowest frequency generated in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency in accordance with FCC Section 15.33(a)(1).
8. The EUT utilizes an internal copper wire antenna and does not have an external antenna connector/external antenna and is therefore in compliance with 15.203. For testing purposes a temporary antenna connector was installed. For the Radiated Spurious testing, the EUT was tested with the internal copper wire antenna.



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



---

Scott Wentworth  
Branch Manager  
NVLAP Approved Signatory



---

Todd Hannemann  
Laboratory Supervisor  
iNARTE Certified Technician ATL-0255-T

### Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

### Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document.

| Revision | Date           | Pages Affected   |
|----------|----------------|--|
| -        | March 7, 2016  | Original Release   |
| A        | March 11, 2016 | Global Changes: <ul style="list-style-type: none"><li>• Document changed from: R-6046N-1 to R-6046N-1, Rev. A</li></ul> 2 & 4: <ul style="list-style-type: none"><li>• Revised FCC Guidance for Performing Compliance Measurements on Digital Transmissions Systems (DTS) Operating Under 15.247</li></ul> 54 & 56: <ul style="list-style-type: none"><li>• Revised Out of Band/Band Edge Radiated Emissions photographs</li></ul> |



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## Requirements and Test Results

### **FCC Section 15.247 (a)(2) - DTS Bandwidth**

For systems using digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands the minimum 6 dB bandwidth shall be at least 500 kHz.

- **Results:** The minimum 6dB bandwidth measured was 721.44 kHz and the device was found to meet the requirement of 15.247 (a)(2).

### **FCC Section 15.247 (b)(3) - Power Output**

For frequency hopping systems operating in the 902-928 MHz; 1 Watt for systems employing at least 50 hopping frequencies.

- **Results:** The maximum measured peak conducted output power was 19.41 mW. The maximum antenna gain of the copper wire antenna is 2.15 dBi. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.

### **FCC Section 15.247 (b)(3) - Power Output**

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g.: alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

- **Results:** The maximum measured peak conducted output power was 17.74 mW. The maximum antenna gain of the copper wire antenna is 2.15 dBi. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## Requirements and Test Results (con't)

### FCC Section 15.247(d) – Unwanted Emissions

#### Antenna Terminal Out of Band/Band Edge Conducted Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of Section 15.247, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results:** All measured out of band/band edge conducted emissions were below the specified limits and the device was found to meet the requirements of 15.247 (d).

### FCC Section 15.247(d) – Unwanted Emissions

#### Radiated Spurious Emissions/Restricted Bands/Band Edge

Emissions which fall into restricted bands, as defined in 15.205(a) must comply with the radiated emissions limits specified in 15.209(a) and shown below in Table 3. Emissions emanating from the EUT cabinet and cables must also comply with the radiated emissions limits. Radiated emissions measurements were also performed at the band edges to ensure band edge compliance.

Table 3 - Radiated Emission Limits

| Frequency of Emission<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------------------|--------------------------------------|----------------------------------|
| 30 to 88                       | 100                                  | 3                                |
| 88 to 216                      | 150                                  | 3                                |
| 216 to 960                     | 200                                  | 3                                |
| Above 960                      | 500                                  | 3                                |

- **Results:**  
All spurious emissions were measured and found to be in compliance with the limits specified in 15.209(a). Band edge emissions were also found to be in compliance with the limits specified in 15.209(a).



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A



## Requirements and Test Results (con't)

### FCC Section 15.247(e) – Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

- **Results:** The measured power spectral density complied with the specified power density limit and the device was found to meet the requirements of 15.247(e).

### Requirement:

#### FCC Section 15.247 (a)(1)

##### Channel Separation and 20 dB Bandwidth

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- **Results:**  
The maximum 20 dB bandwidth of the hopping channel was 168.3 kHz. The carrier frequencies were separated by 191.35 kHz which exceeds the 20 dB bandwidth and complies with the requirements specified above.

#### FCC Section 15.247 (a)(1)

##### Number of Channels and Occupancy Time

Frequency hopping systems operating in the 902 – 928 MHz band: If the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

- **Results:**  
The frequency hopping system uses 64 Channels. The average time of occupancy did not exceed 0.4 seconds in an 20 second period which meets the above requirements.



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## Requirements and Test Results (con't)

### FCC Section 15.247(i) – RF Exposure

Transmitters operating under 15.247 must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. Based on the transmitter power and maximum antenna gain the separation distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of 1.1310 was calculated. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi D^2}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cm<sup>2</sup>

Per 1.1310 For Frequency of 900 MHz = 0.6mW/cm<sup>2</sup>

#### DTS Transmission Mode:

Power = Max Power Input to Antenna = 17.74 mW

Gain = Max Power Gain of Antenna = 2.15dBi = 1.64 numeric

$$0.6\text{mW/cm}^2 = \frac{17.74 \times 1.64}{4 (3.14) \times D^2} = \frac{29.09}{12.56 \times D^2}$$

$$D^2 = \frac{29.09}{12.56 \times 0.6} = 3.86$$

D = sq. root 3.86 = 1.96 cm

The unit has an internal antenna and the minimum separation distance will always be maintained.

#### FHSS Transmission Mode:

Power = Max Power Input to Antenna = 19.41 mW

Gain = Max Power Gain of Antenna = 2.15 dBi = 1.64 numeric

$$0.6\text{mW/cm}^2 = \frac{19.41 \times 1.64}{4 (3.14) \times D^2} = \frac{31.83}{12.56 \times D^2}$$



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## Requirements and Test Results (con't)

### FCC Section 15.247(i) – RF Exposure

$$D_{sq} = \frac{31.83}{12.56 \times 0.6} = 4.22$$

$$D = \text{sq. root } 4.22 = 2.05 \text{ cm}$$

The unit has an internal antenna and the minimum separation distance will always be maintained.



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## EQUIPMENT LISTS

### FCC Section 15.247(a)(2) – DTS 6 dB Bandwidth

| EN   | Manufacturer    | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|-----------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE & SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |

### FCC Section 15.247(b)(3) – Power Output

| EN   | Manufacturer    | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|-----------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE & SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |

### FCC Section 15.247(d) – Antenna Terminal Out of Band/ Band Edge Conducted Emissions, 30 MHz to 25 GHz

| EN   | Manufacturer    | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|-----------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE & SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |

### FCC Section 15.247(d) – Out of Band/Band Edge Radiated Emissions

| EN   | Manufacturer | Description                  | Range            | Model No. | Cal Date  | Due Date  |
|------|--------------|------------------------------|------------------|-----------|-----------|-----------|
| 1232 | AGILENT / HP | PRE-AMPLIFIER                | 1 - 26.5 GHz     | 8449B     | 6/17/2015 | 6/30/2016 |
| 3258 | ETS / EMCO   | ANTENNA, DOUBLE RIDGED GUIDE | 1 - 18 GHz       | 3115      | 3/24/2015 | 9/30/2016 |
| 4029 | RETLIF       | OPEN AREA TEST SITE, FILING  | 3 / 10 Meters    | RNH       | 5/15/2013 | 5/31/2016 |
| 5053 | ETS / EMCO   | ANTENNA, BICONILOG           | 26 MHz - 3 GHz   | 3142C     | 2/24/2015 | 8/31/2016 |
| R462 | AGILENT / HP | ANALYZER, SPECTRUM           | 9 kHz - 26.5 GHz | E7405A    | 1/8/2015  | 1/31/2016 |

### FCC Section 15.247(e) – Power Density

| EN   | Manufacturer    | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|-----------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE & SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

## EQUIPMENT LISTS (continued)

### FCC Section 15.247(a)(1) – 20 dB Bandwidth

| EN   | Manufacturer       | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|--------------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE    | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE &<br>SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |

### FCC Section 15.247(a)(1) -- Channel Separation

| EN   | Manufacturer       | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|--------------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE    | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE &<br>SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |

### FCC Section 15.247(a)(1)(iii) – Number of Hopping Channels and Time Occupancy

| EN   | Manufacturer       | Description         | Range              | Model No. | Cal Date   | Due Date   |
|------|--------------------|---------------------|--------------------|-----------|------------|------------|
| 4962 | NARDA MICROWAVE    | ATTENUATOR, COAXIAL | 20 dB, DC - 18 GHz | 757C-20DB | 11/24/2015 | 11/30/2016 |
| 5070 | ROHDE &<br>SCHWARZ | RECEIVER, EMI       | 20 Hz - 40 GHz     | ESIB40    | 10/29/2014 | 10/31/2016 |



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A


**Test Photograph(s)**  
**DTS Bandwidth**  
**6 dB Bandwidth**  
**FCC Section 15.247(a)(2)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**DTS Bandwidth**  
**6 dB Bandwidth**

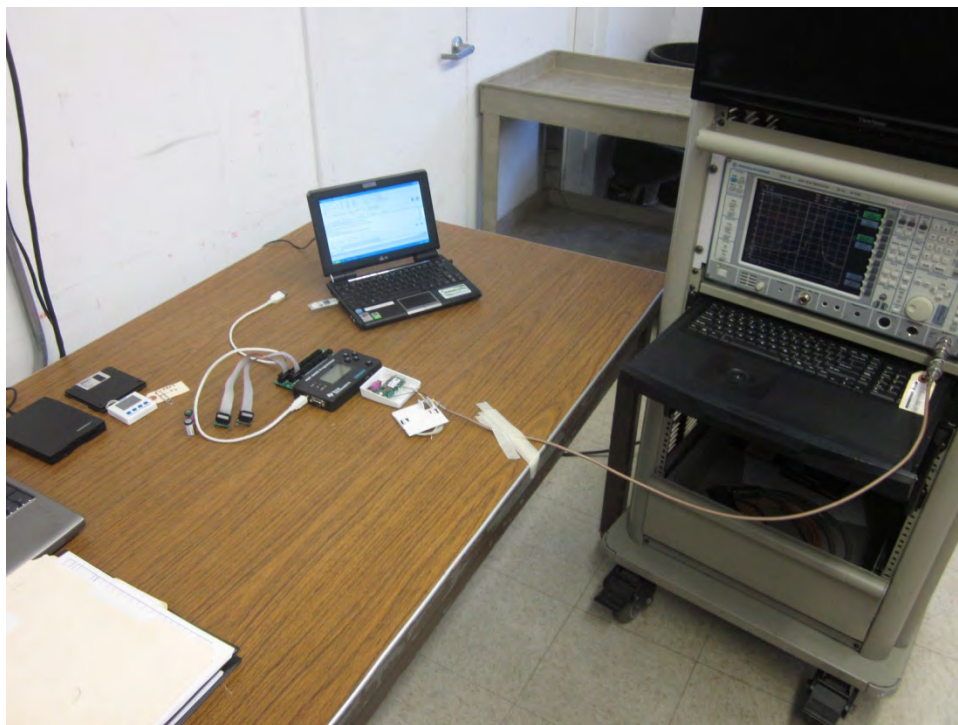

**Test Setup**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**DTS Bandwidth  
6 dB Bandwidth  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A



# RETLIF TESTING LABORATORIES


|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | 6dB Bandwidth                                   |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 903 MHz   |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(2) |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 15 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %         |            |                                 |
| Notes               | Occupied Bandwidth: 725.45 kHz                  |            |                                 |

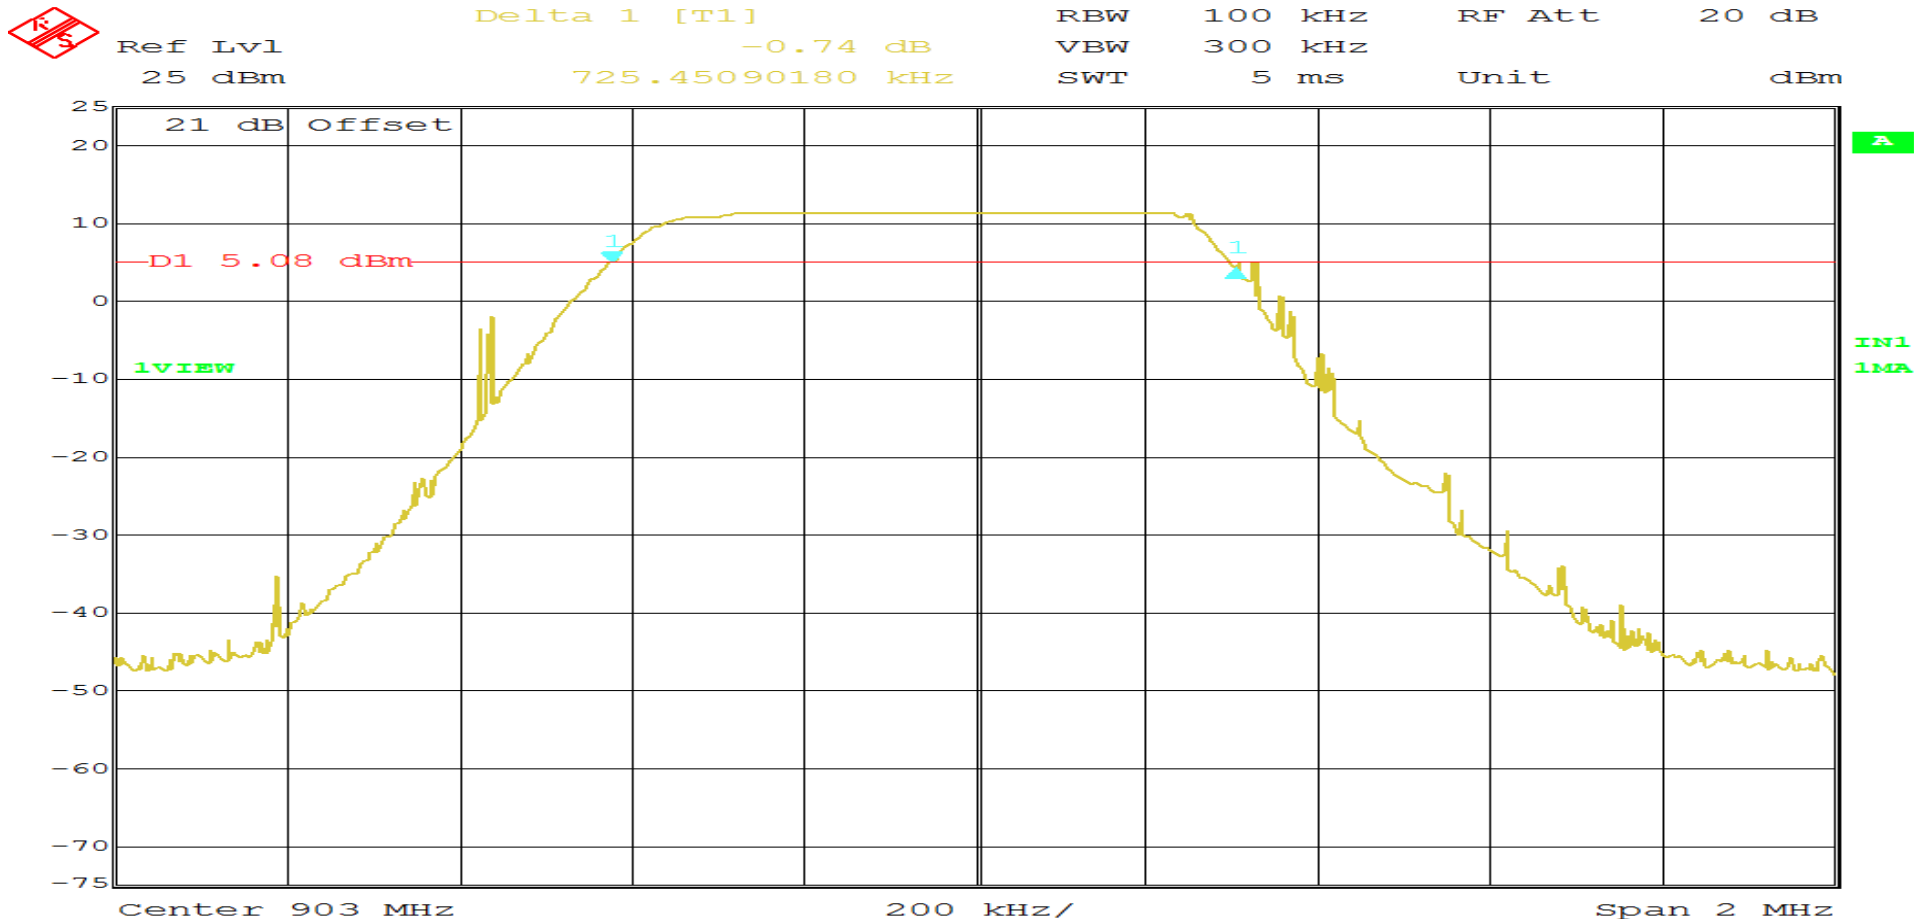

Date: 15.JAN.2016 15:36:49  
Page 1 of 3

# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | 6dB Bandwidth                                   |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 907.8 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(2) |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 15 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %         |            |                                 |
| Notes               | Occupied Bandwidth: 721.44 kHz                  |            |                                 |

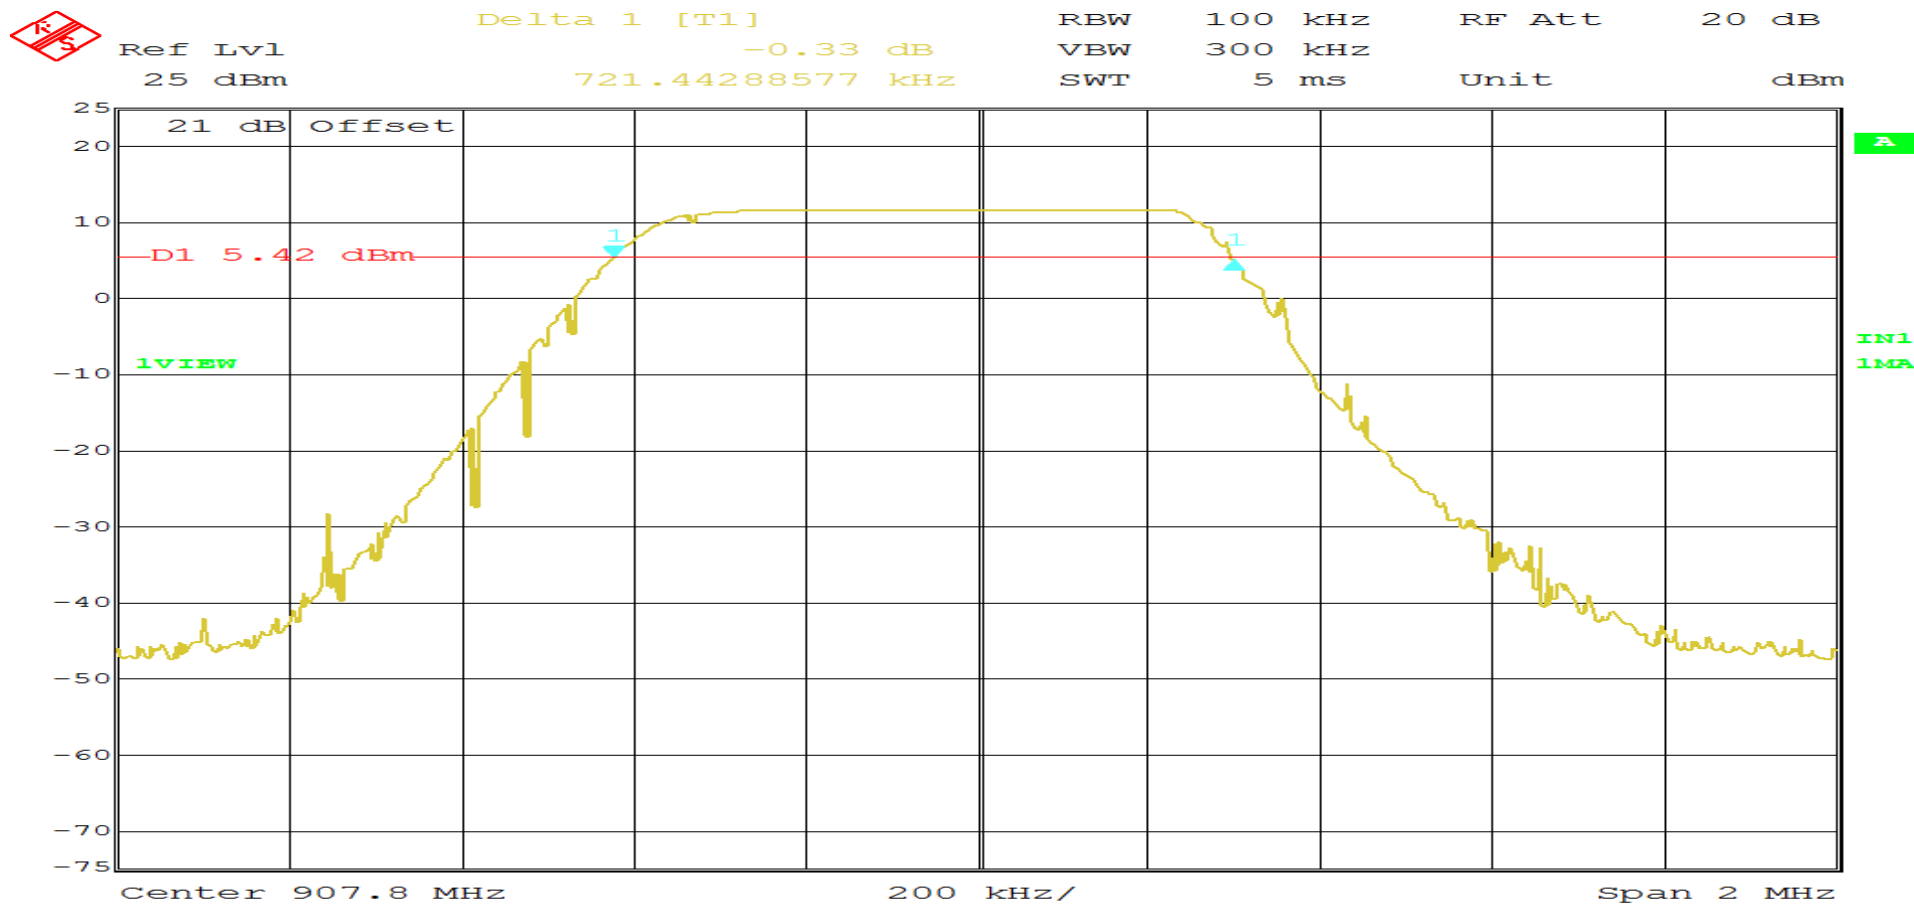


Date: 15.JAN.2016 15:39:59

Page 2 of 3

# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | 6dB Bandwidth                                   |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 914.2 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(2) |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 15 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %         |            |                                 |
| Notes               | Occupied Bandwidth: 725.45 kHz                  |            |                                 |

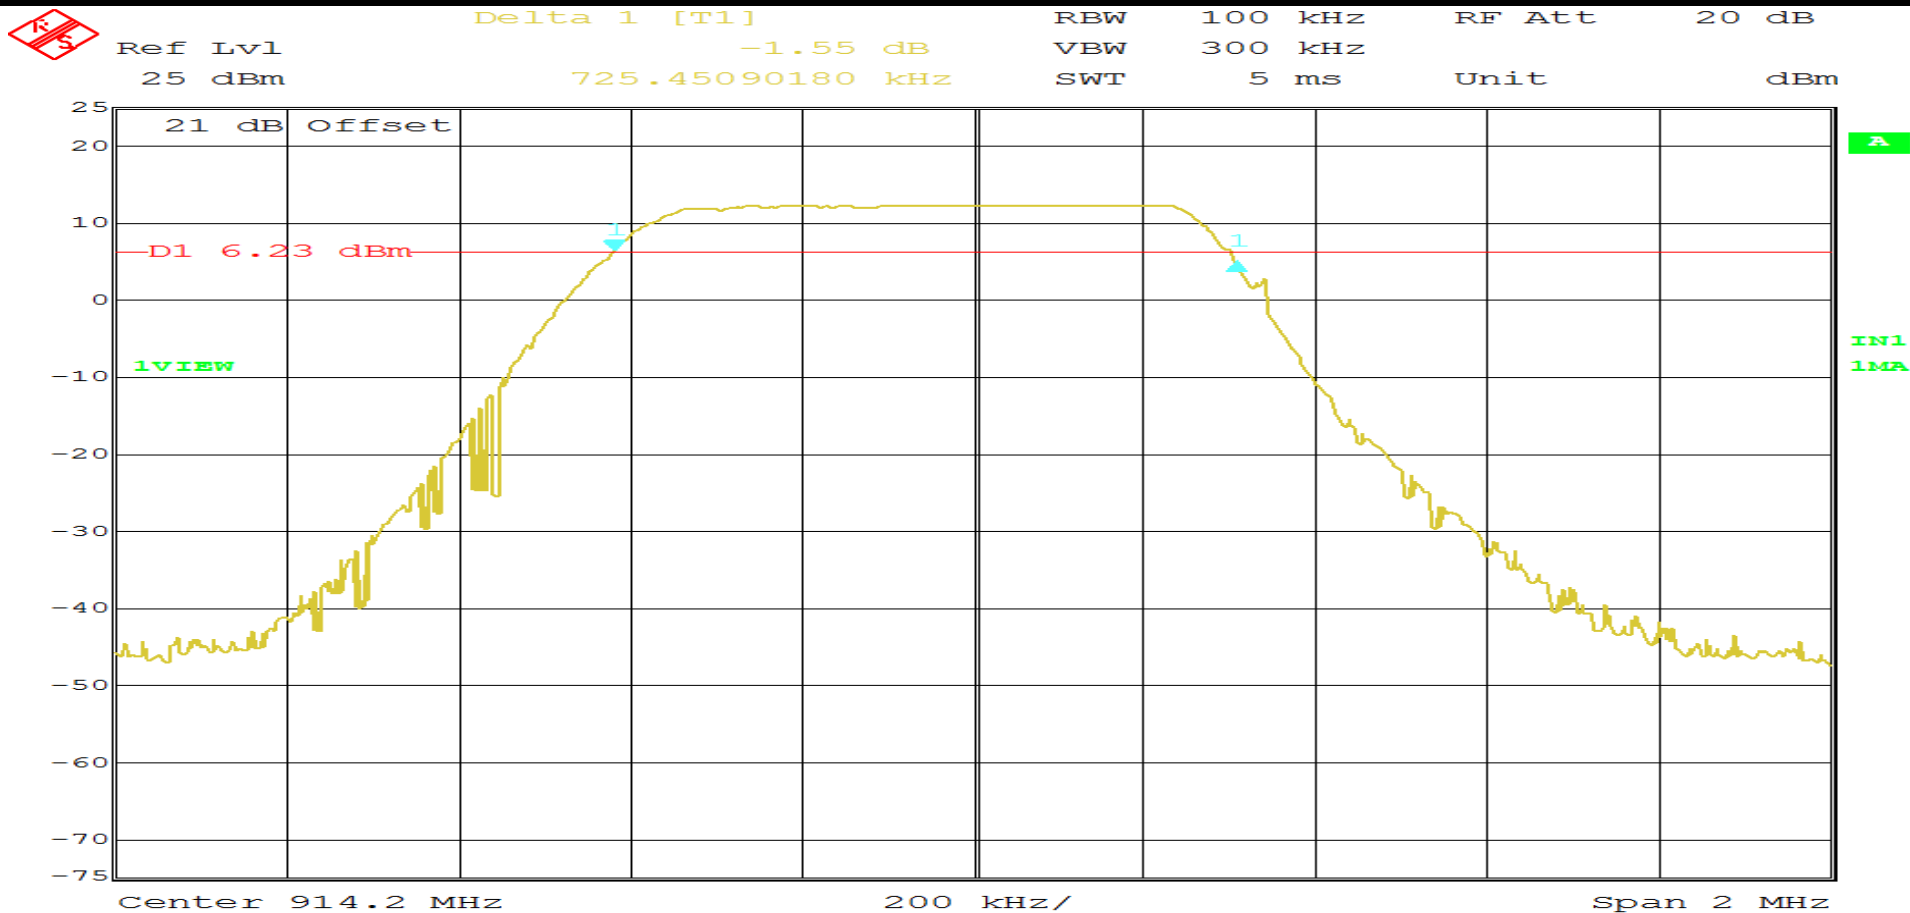

Date: 15.JAN.2016 15:42:50

Page 3 of 3


**Test Photograph(s)  
Power Output  
FCC Section 15.247(b)(3)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)  
Power Output**

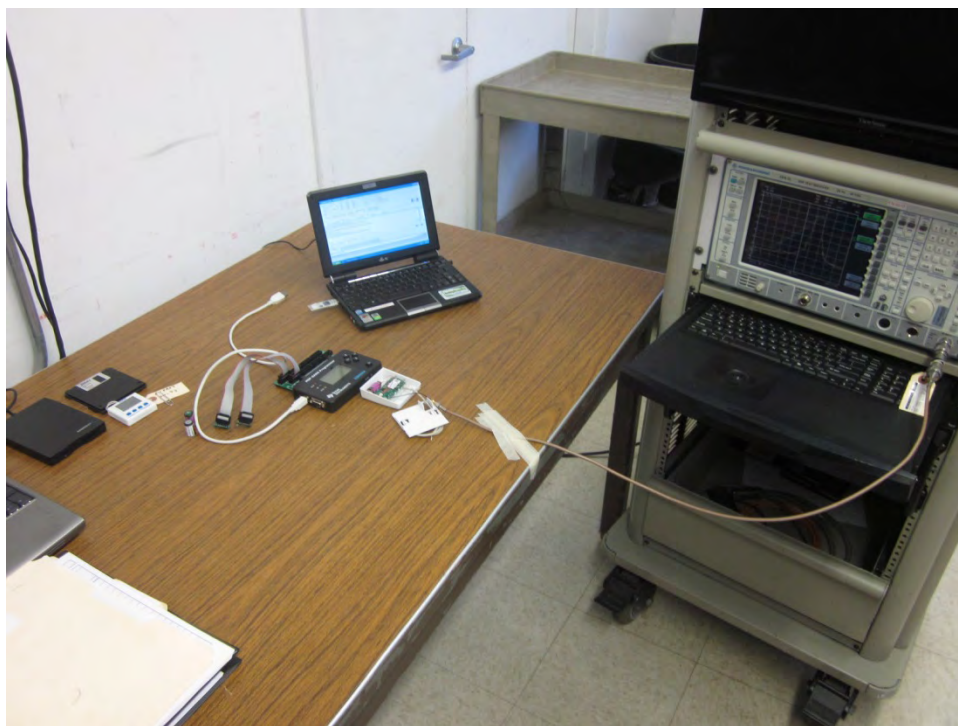

Test Setup, DTS



Test Setup, FHSS



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Power Output  
DTS Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES


|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Conducted Peak Power Output                     |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 903 MHz   |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (b)(3) |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.6 %         |            |                                 |
| Notes               | Peak Power Output: 11.36 dBm                    |            |                                 |

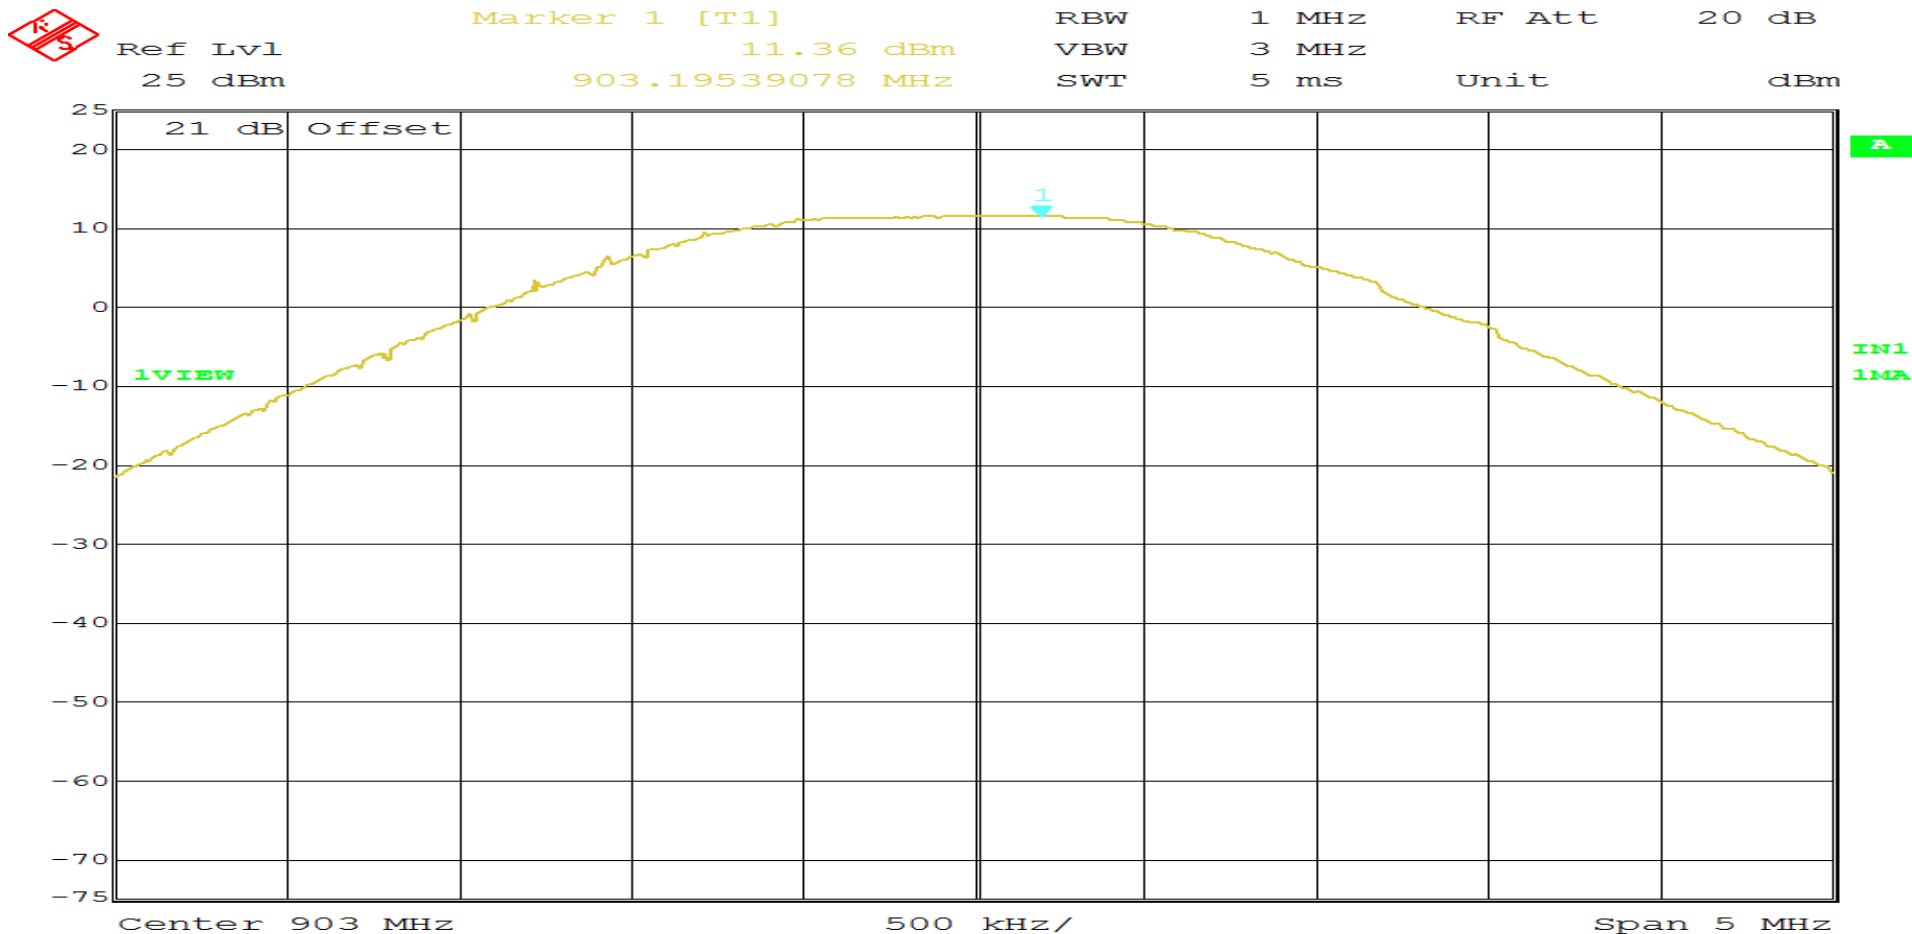

Date: 18.JAN.2016 09:17:50  
Page 1 of 3

# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Conducted Peak Power Output                     |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 907.8 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (b)(3) |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.6 %         |            |                                 |
| Notes               | Peak Power Output: 11.61 dBm                    |            |                                 |

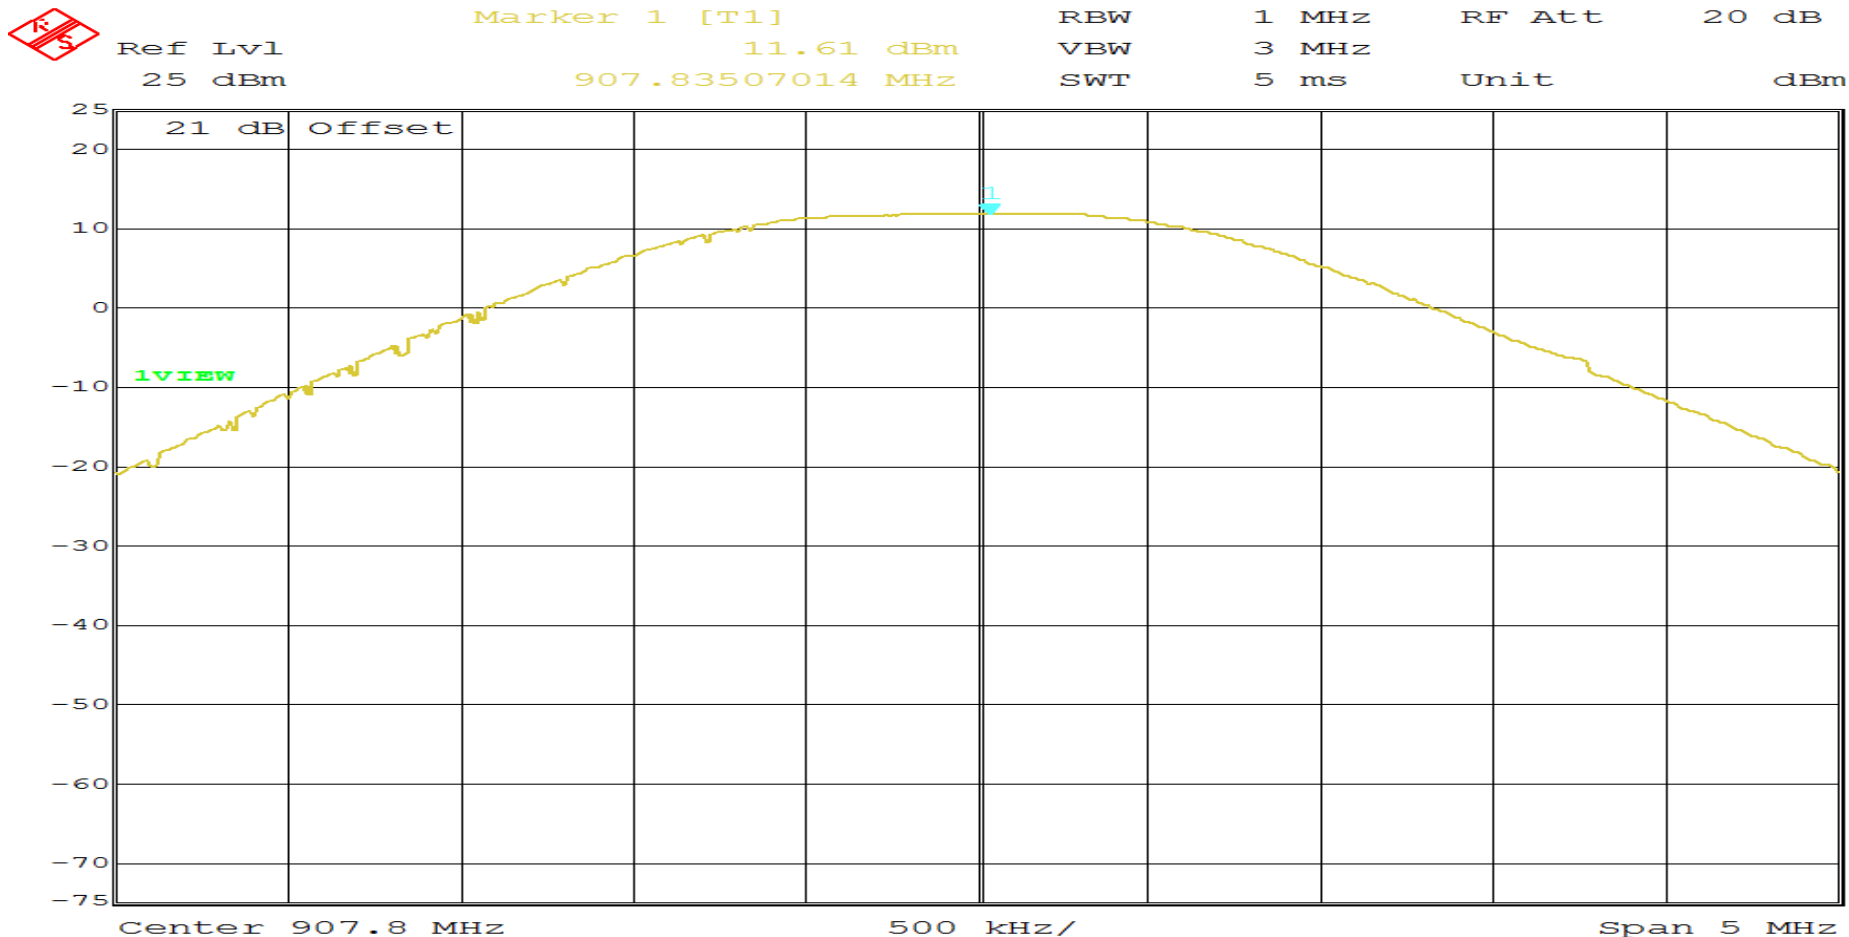


Date: 18.JAN.2016 09:20:00  
 Page 2 of 3



# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Conducted Peak Power Output                     |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 914.2 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (b)(3) |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.6 %         |            |                                 |
| Notes               | Peak Power Output: 12.49 dBm                    |            |                                 |

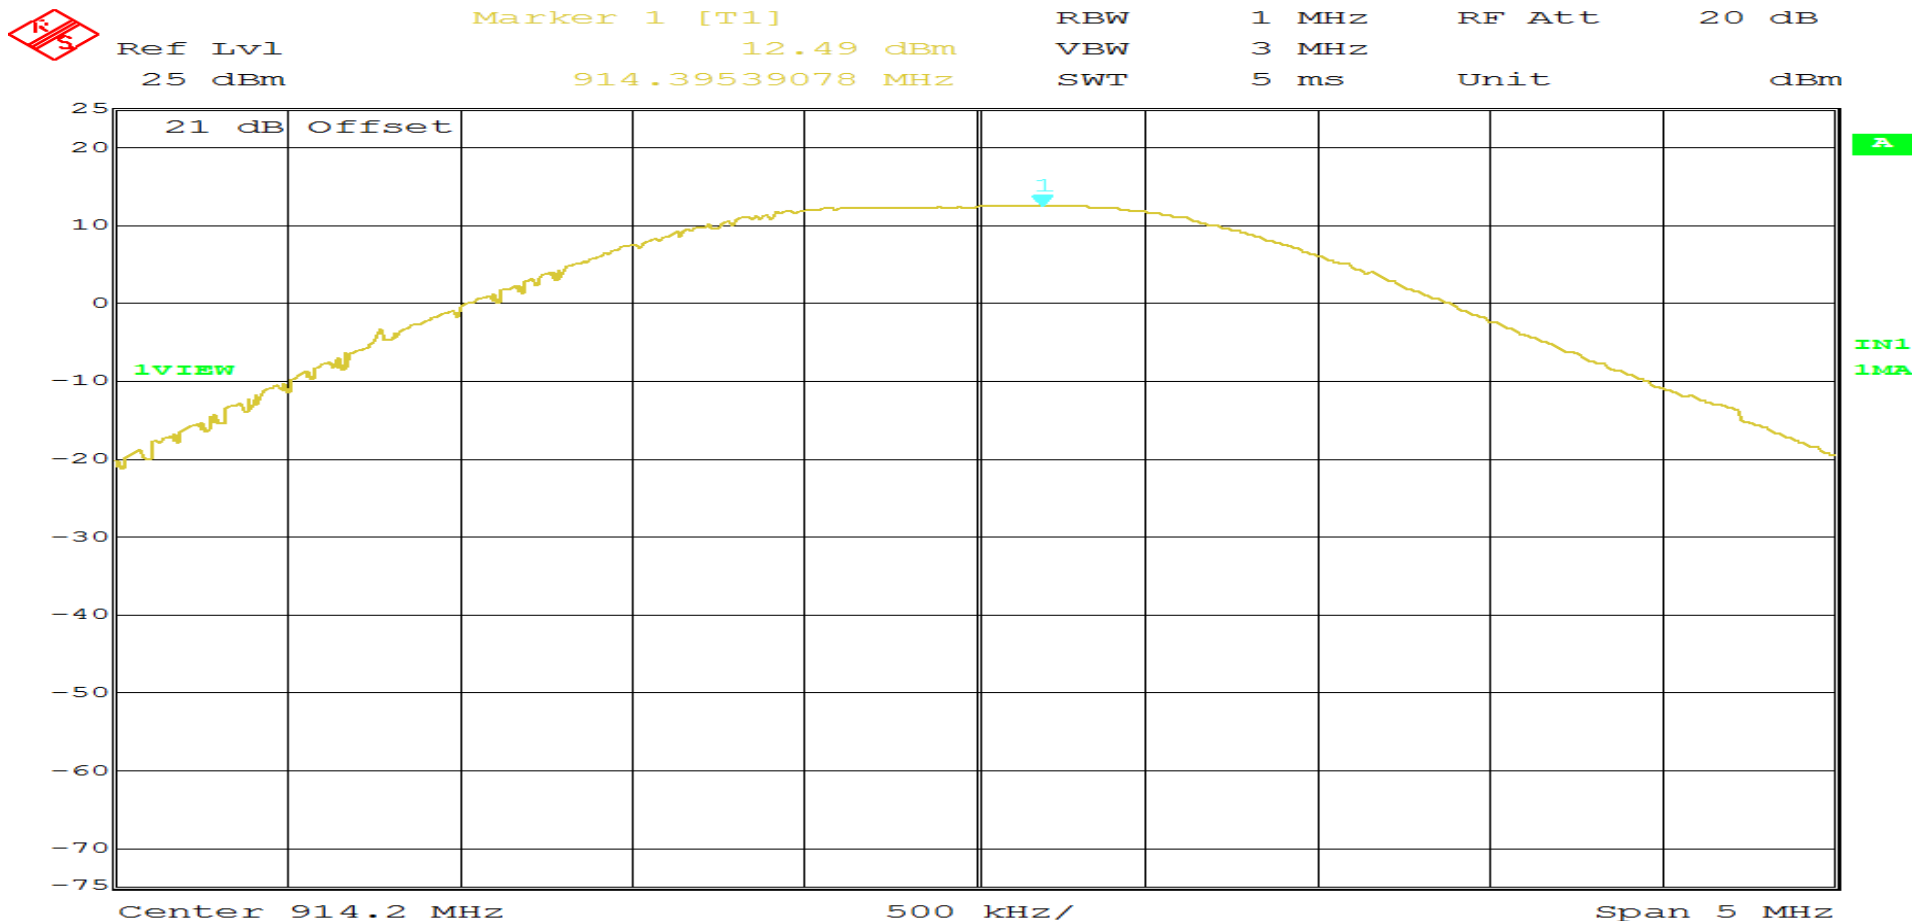

Date: 18.JAN.2016 09:21:58  
Page 3 of 3

**Power Output**  
**FHSS Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Conducted Peak Power Output                      |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 902.3 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (b)(2)  |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.0 °C Relative Humidity: 22.2 %          |            |                                 |
| Notes               | Peak Power Output: 11.35 dBm                     |            |                                 |

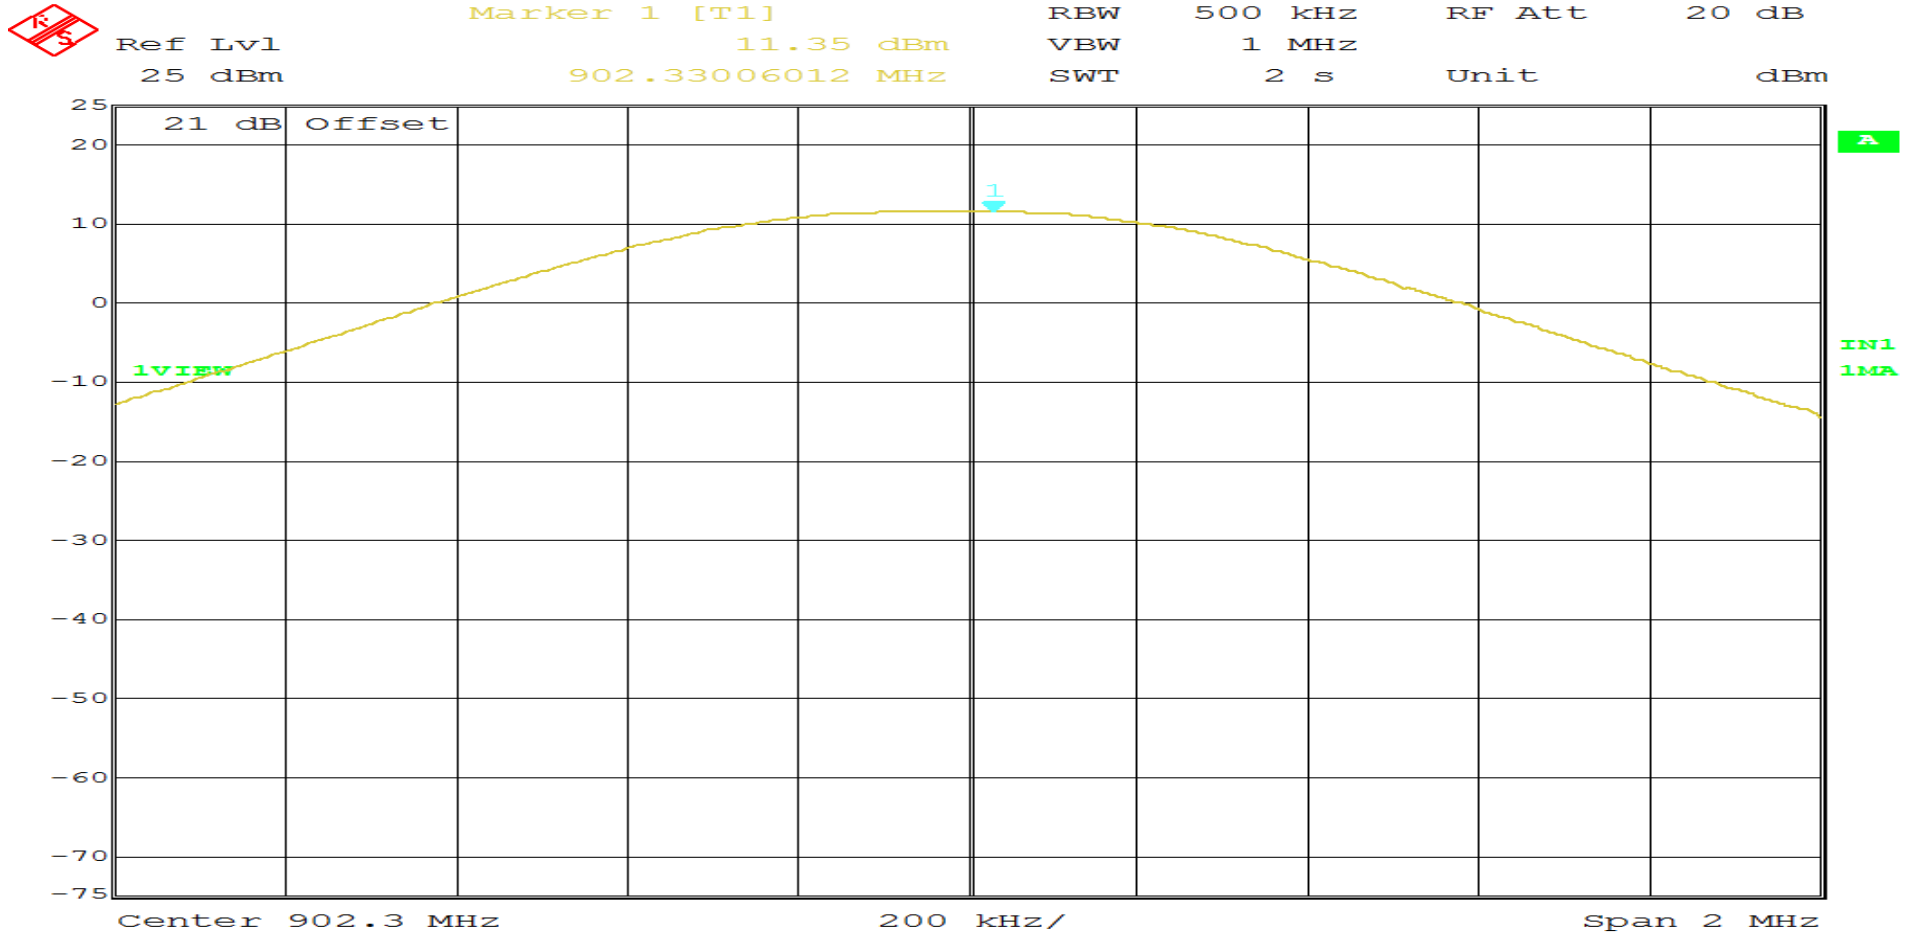

Date: 18.JAN.2016 14:26:58  
Page 1 of 3

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Conducted Peak Power Output                      |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 908.5 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (b)(2)  |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.0 °C Relative Humidity: 22.2 %          |            |                                 |
| Notes               | Peak Power Output: 12.00 dBm                     |            |                                 |

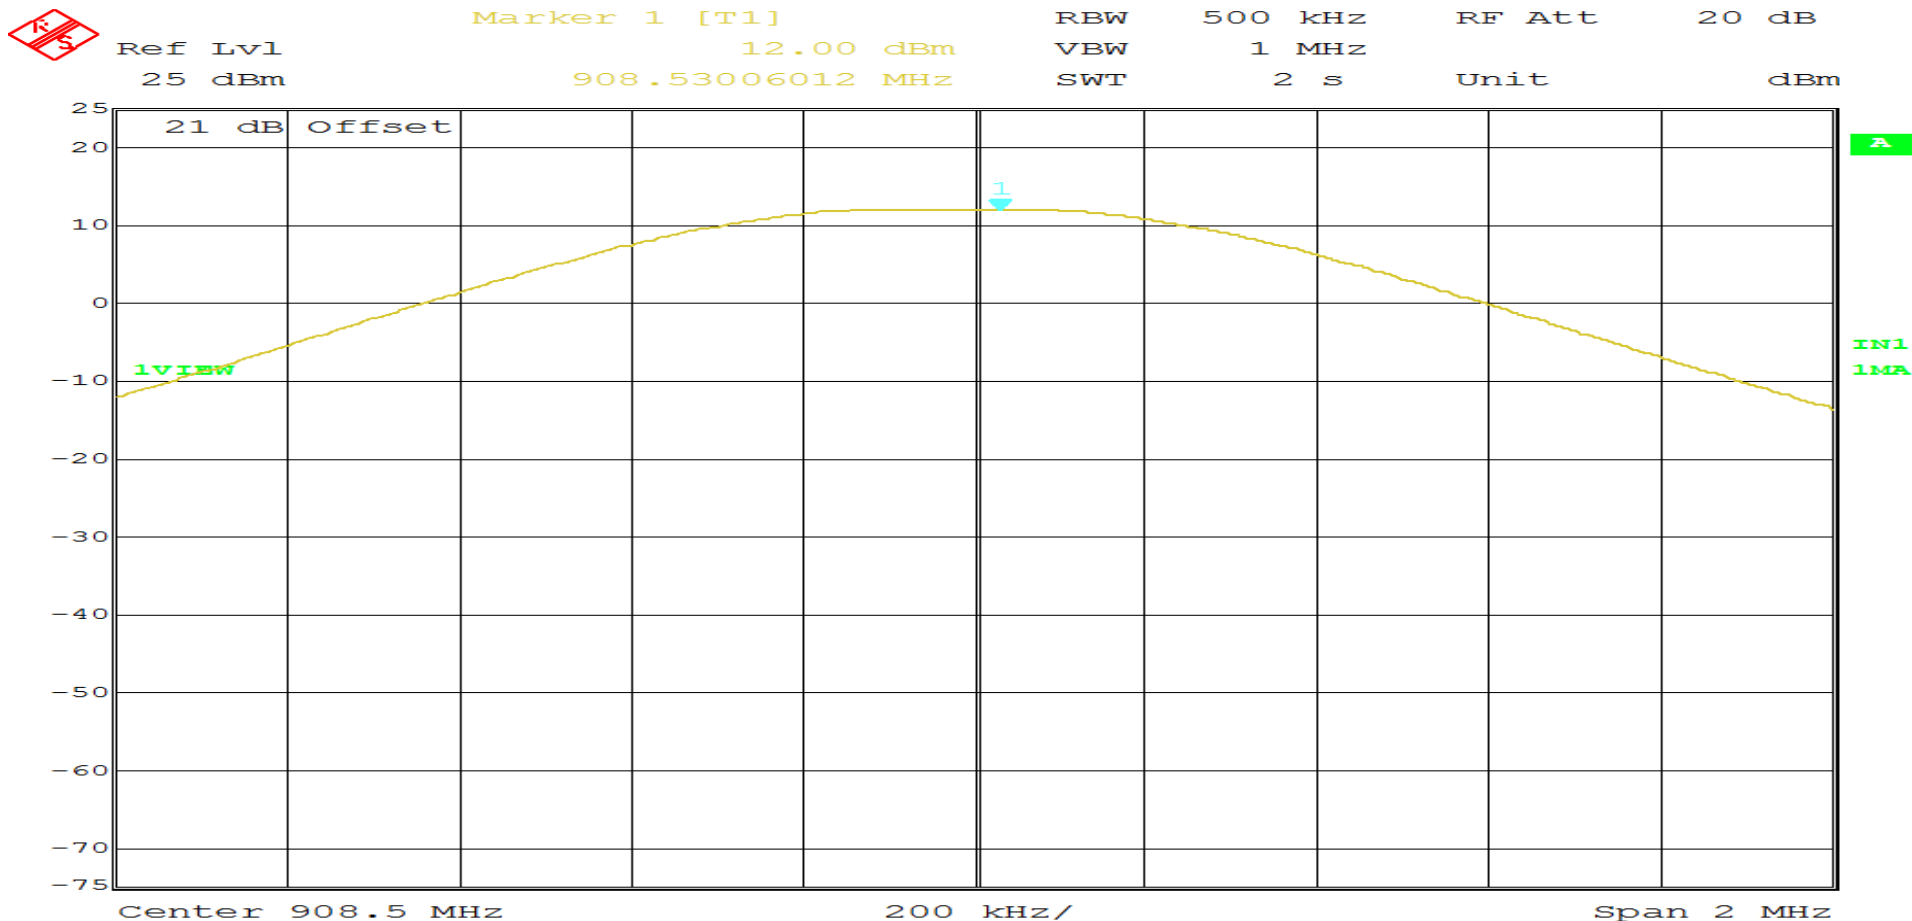

Date: 18.JAN.2016 14:29:00  
 Page 2 of 3

# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Conducted Peak Power Output                      |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 914.9 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (b)(2)  |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.0 °C Relative Humidity: 22.2 %          |            |                                 |
| Notes               | Peak Power Output: 12.88 dBm                     |            |                                 |

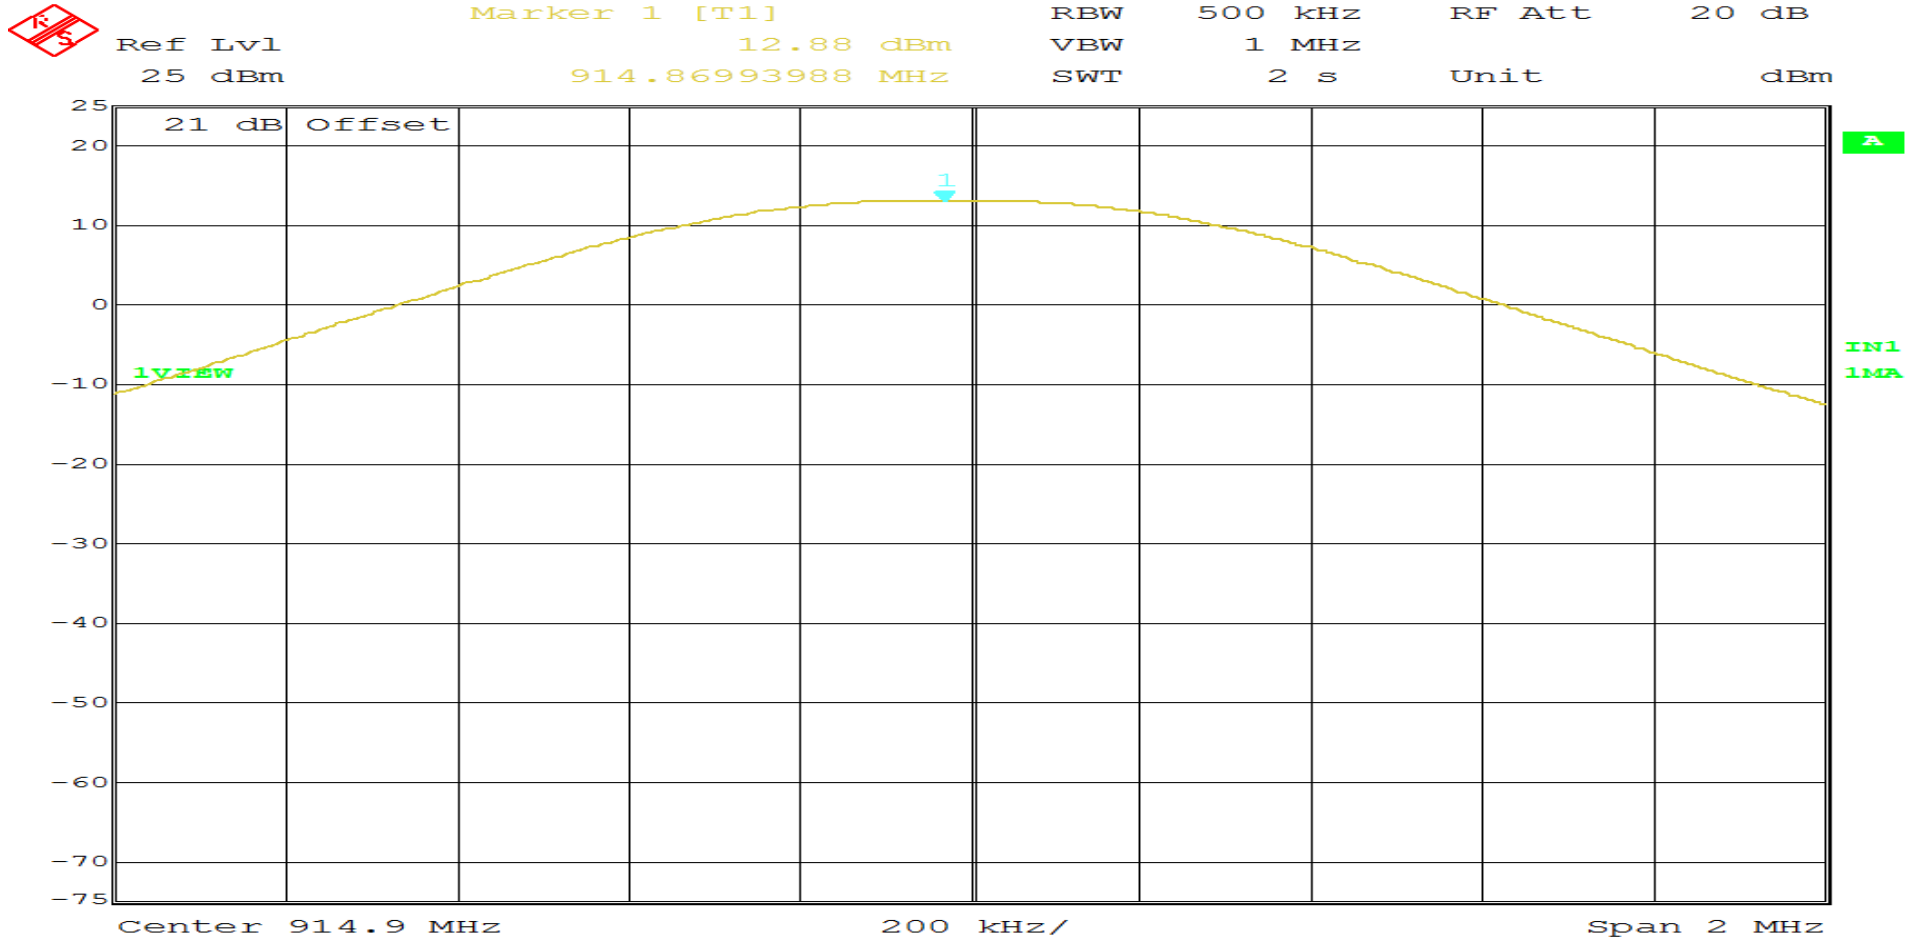

Date: 18.JAN.2016 14:30:47  
Page 3 of 3

**Test Photograph(s)**  
**Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz**  
**FCC Section 15.247(d)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A



# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 903 MHz    |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %          |            |                                 |
| Notes               | Limit: -7.51 dBm                                 |            |                                 |

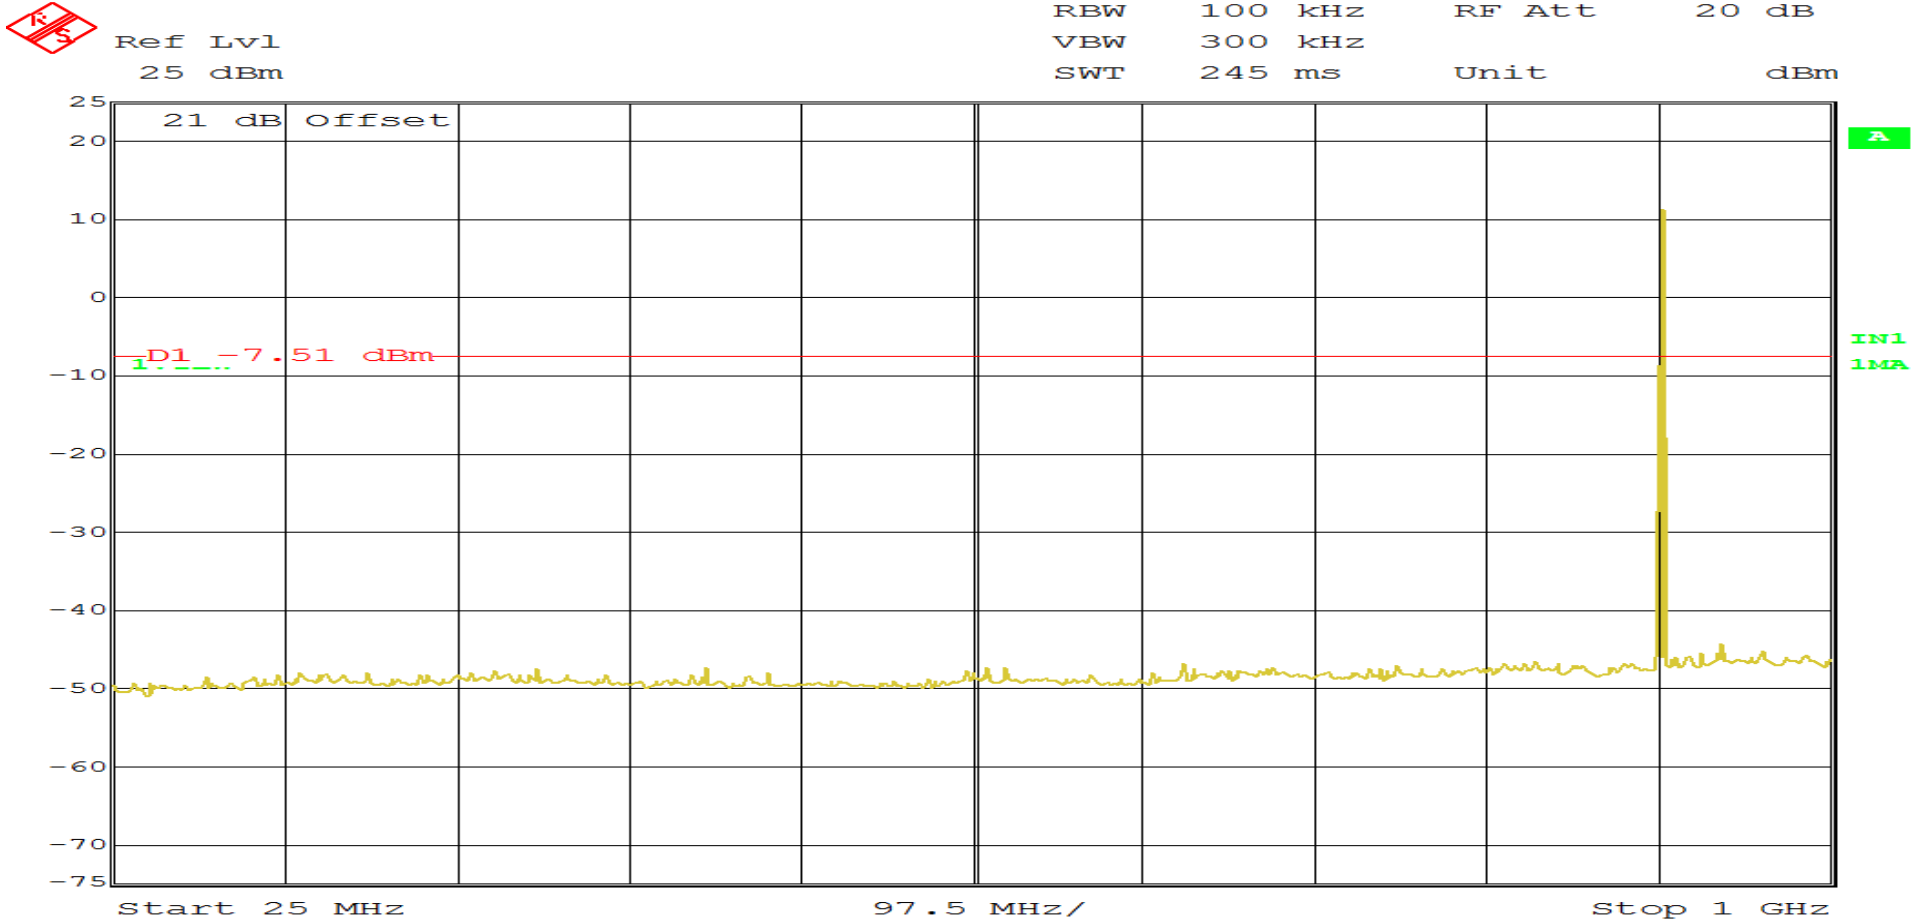

Date: 18.JAN.2016 09:27:57  
Page 1 of 6

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 903 MHz    |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %          |            |                                 |
| Notes               | Limit: -7.51 dBm                                 |            |                                 |

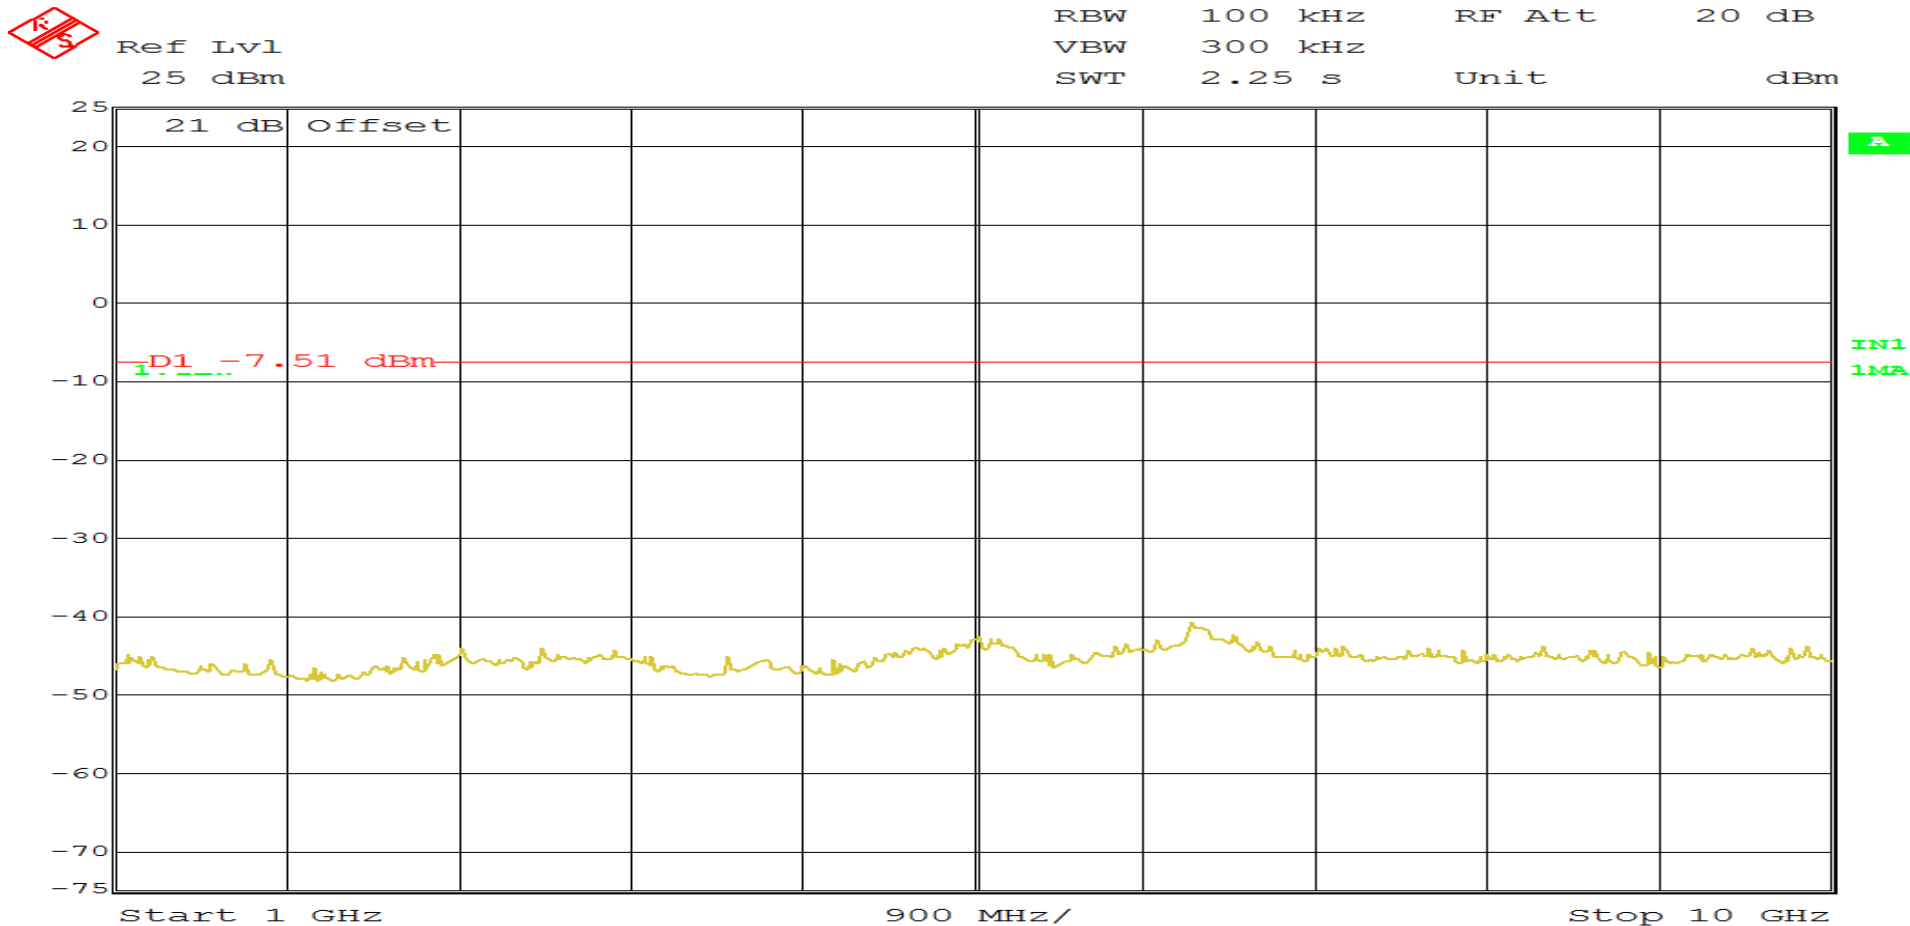

Date: 18.JAN.2016 09:31:17  
 Page 2 of 6

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 907.8 MHz  |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %          |            |                                 |
| Notes               | Limit: -7.51 dBm                                 |            |                                 |

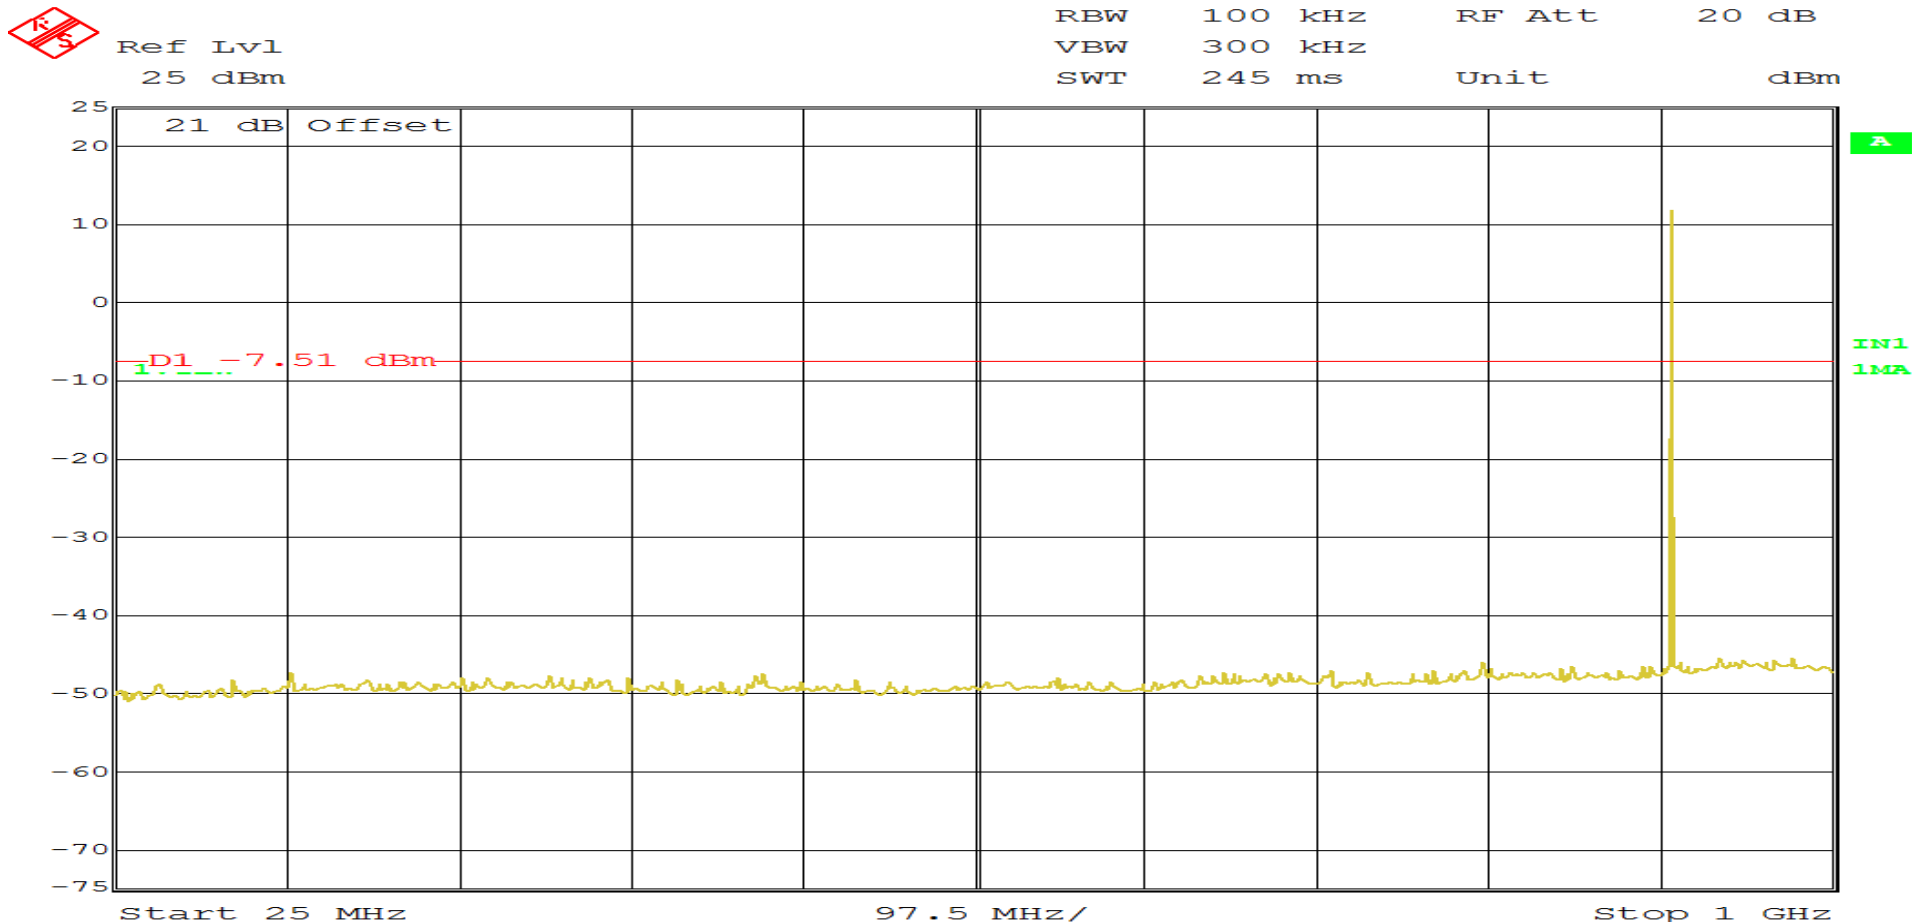

Date: 18.JAN.2016 09:36:52  
 Page 3 of 6

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 907.8 MHz  |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %          |            |                                 |
| Notes               | Limit: -7.51 dBm                                 |            |                                 |

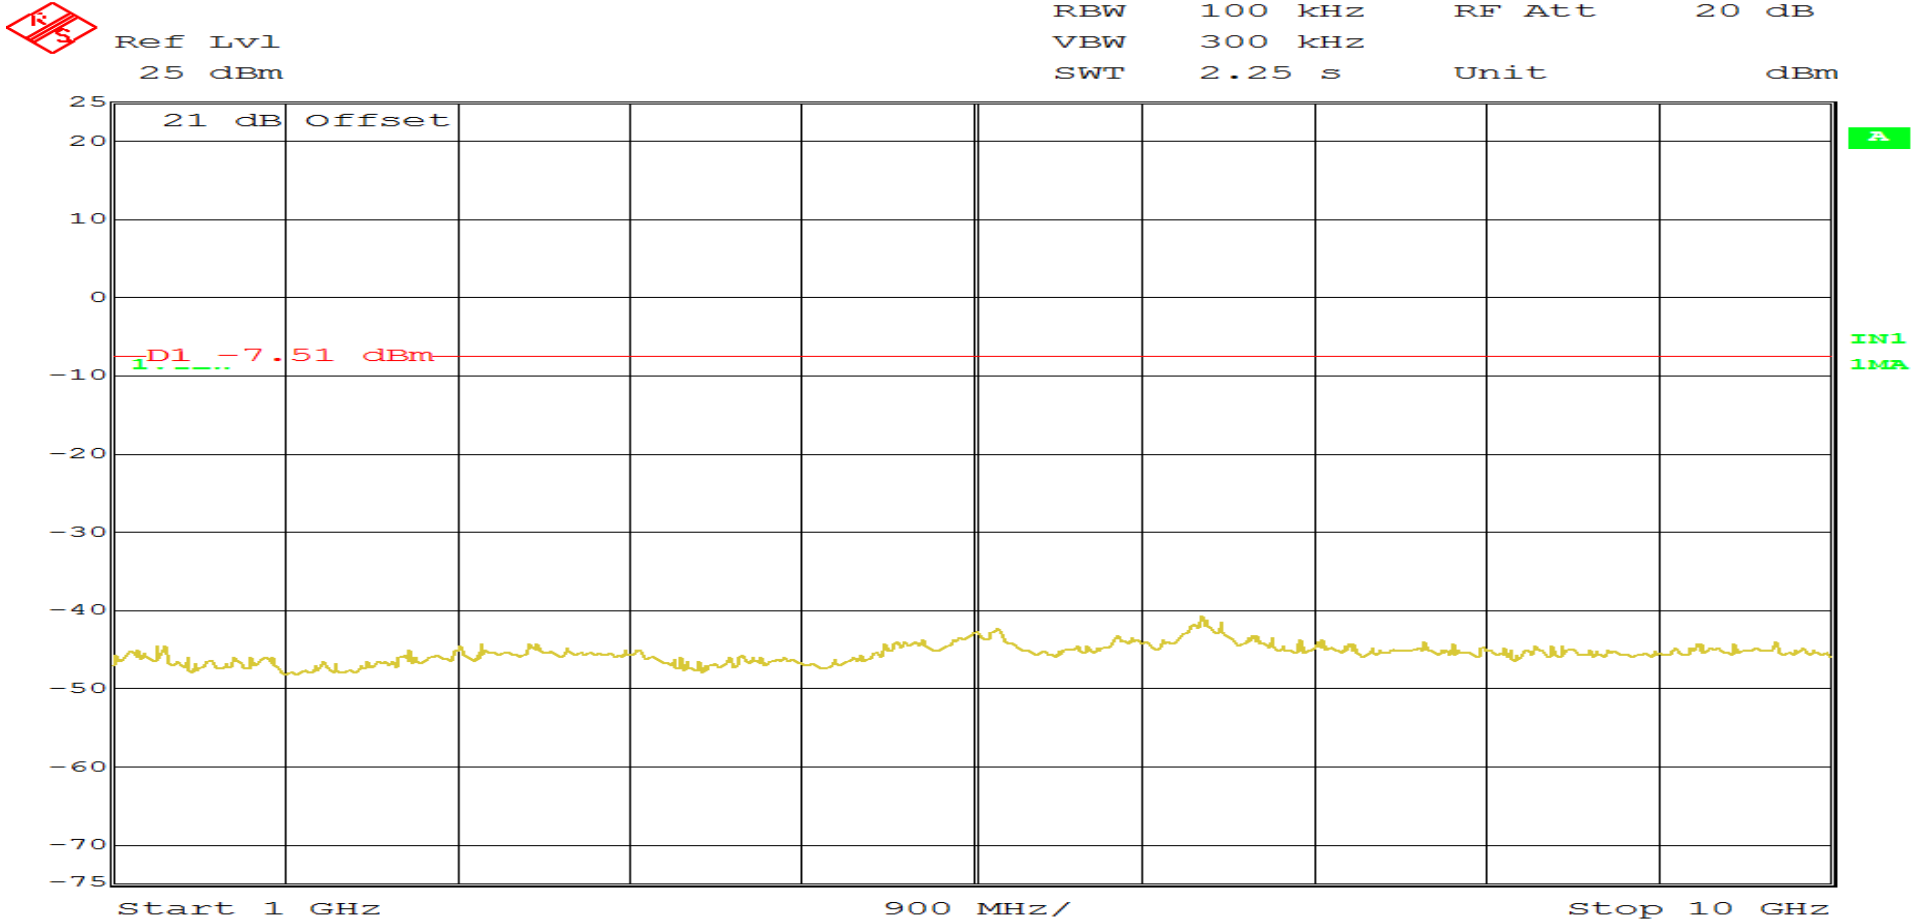

Date: 18.JAN.2016 09:34:50  
Page 4 of 6

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 914.2 MHz  |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %          |            |                                 |
| Notes               | Limit: -7.51 dBm                                 |            |                                 |

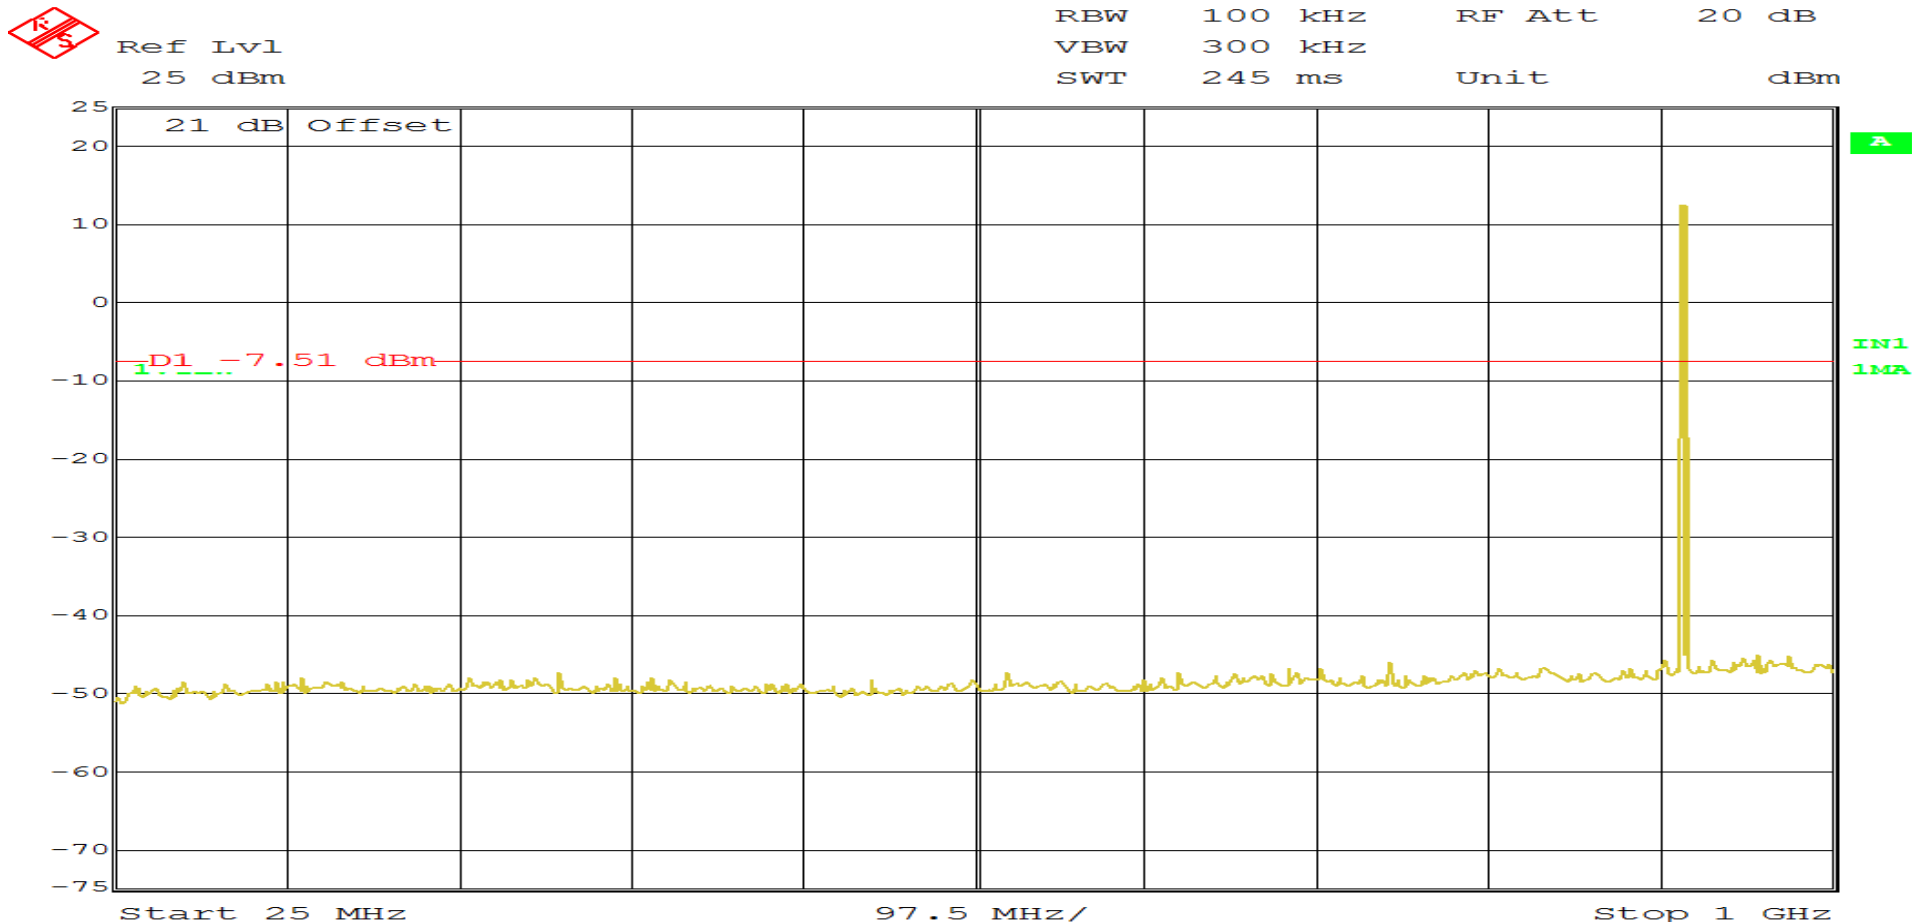

Date: 18.JAN.2016 09:39:23  
 Page 5 of 6

# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 914.2 MHz  |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %          |            |                                 |
| Notes               | Limit: -7.51 dBm                                 |            |                                 |

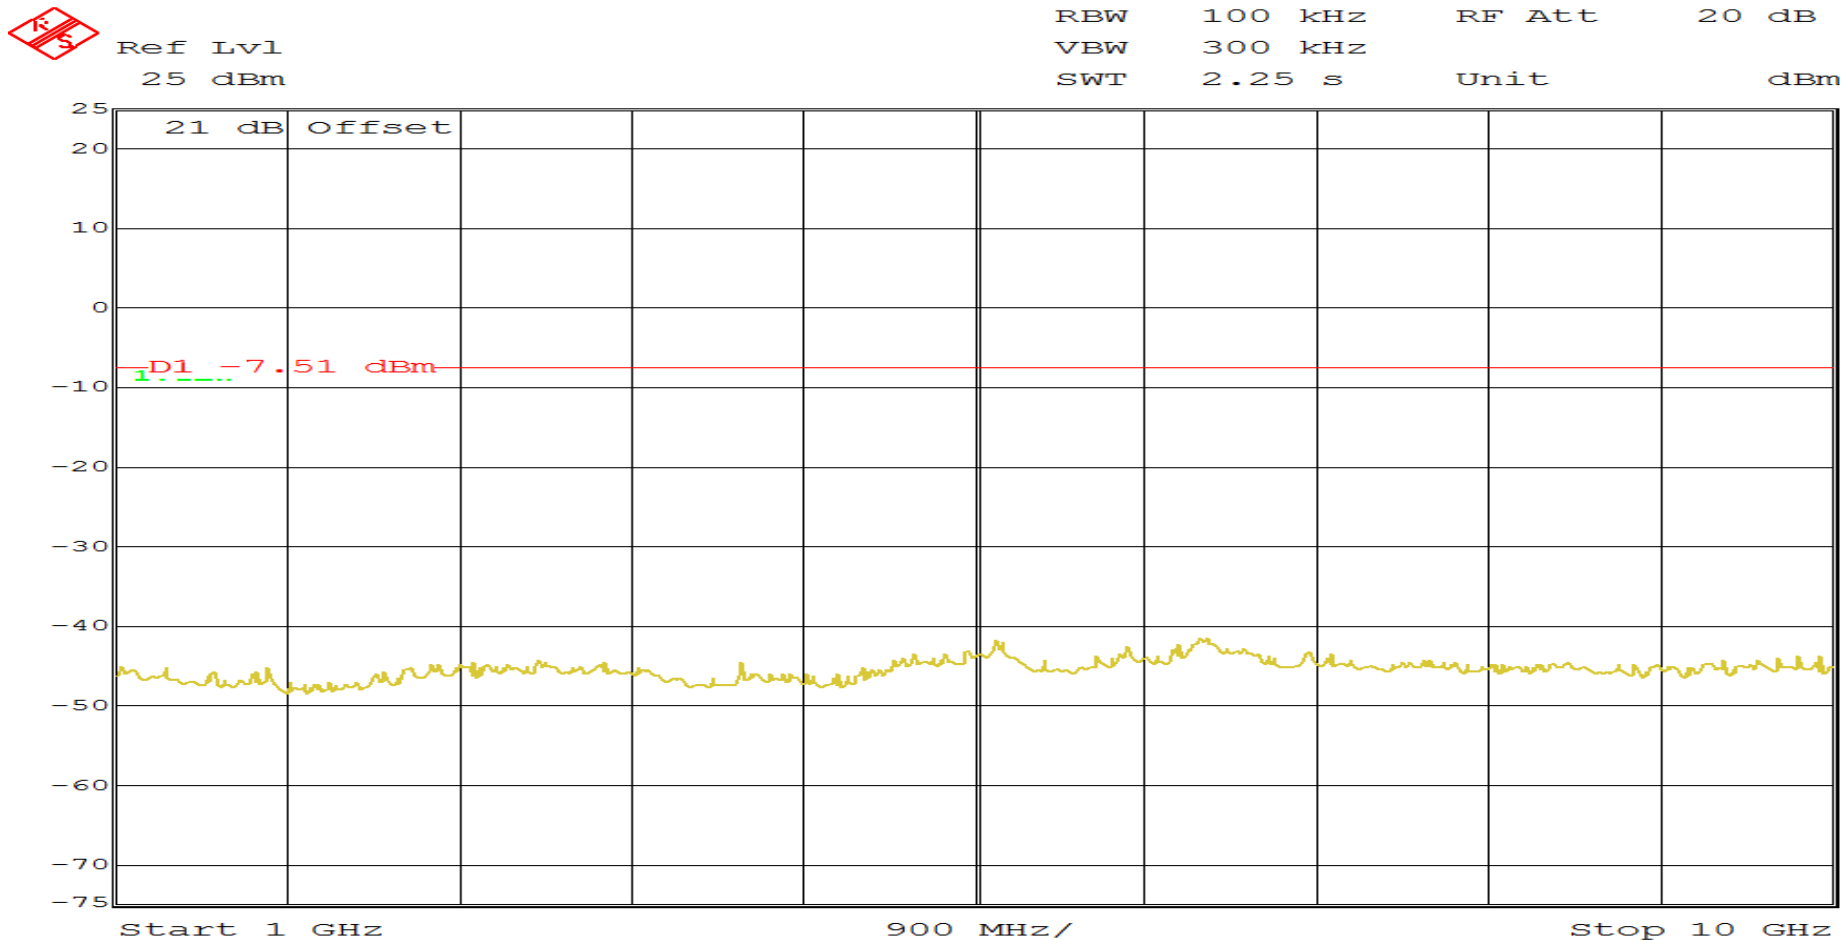

Date: 18.JAN.2016 09:42:09  
 Page 6 of 6

**Band Edge Conducted  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Band Edge Conducted                           |            |                                 |
| Customer            | Nke Watteco                                   | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                  |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 903 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)  |            |                                 |
| Technician          | M. Seamans                                    | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %       |            |                                 |
| Notes               | Limit: -7.51 dBm                              |            |                                 |

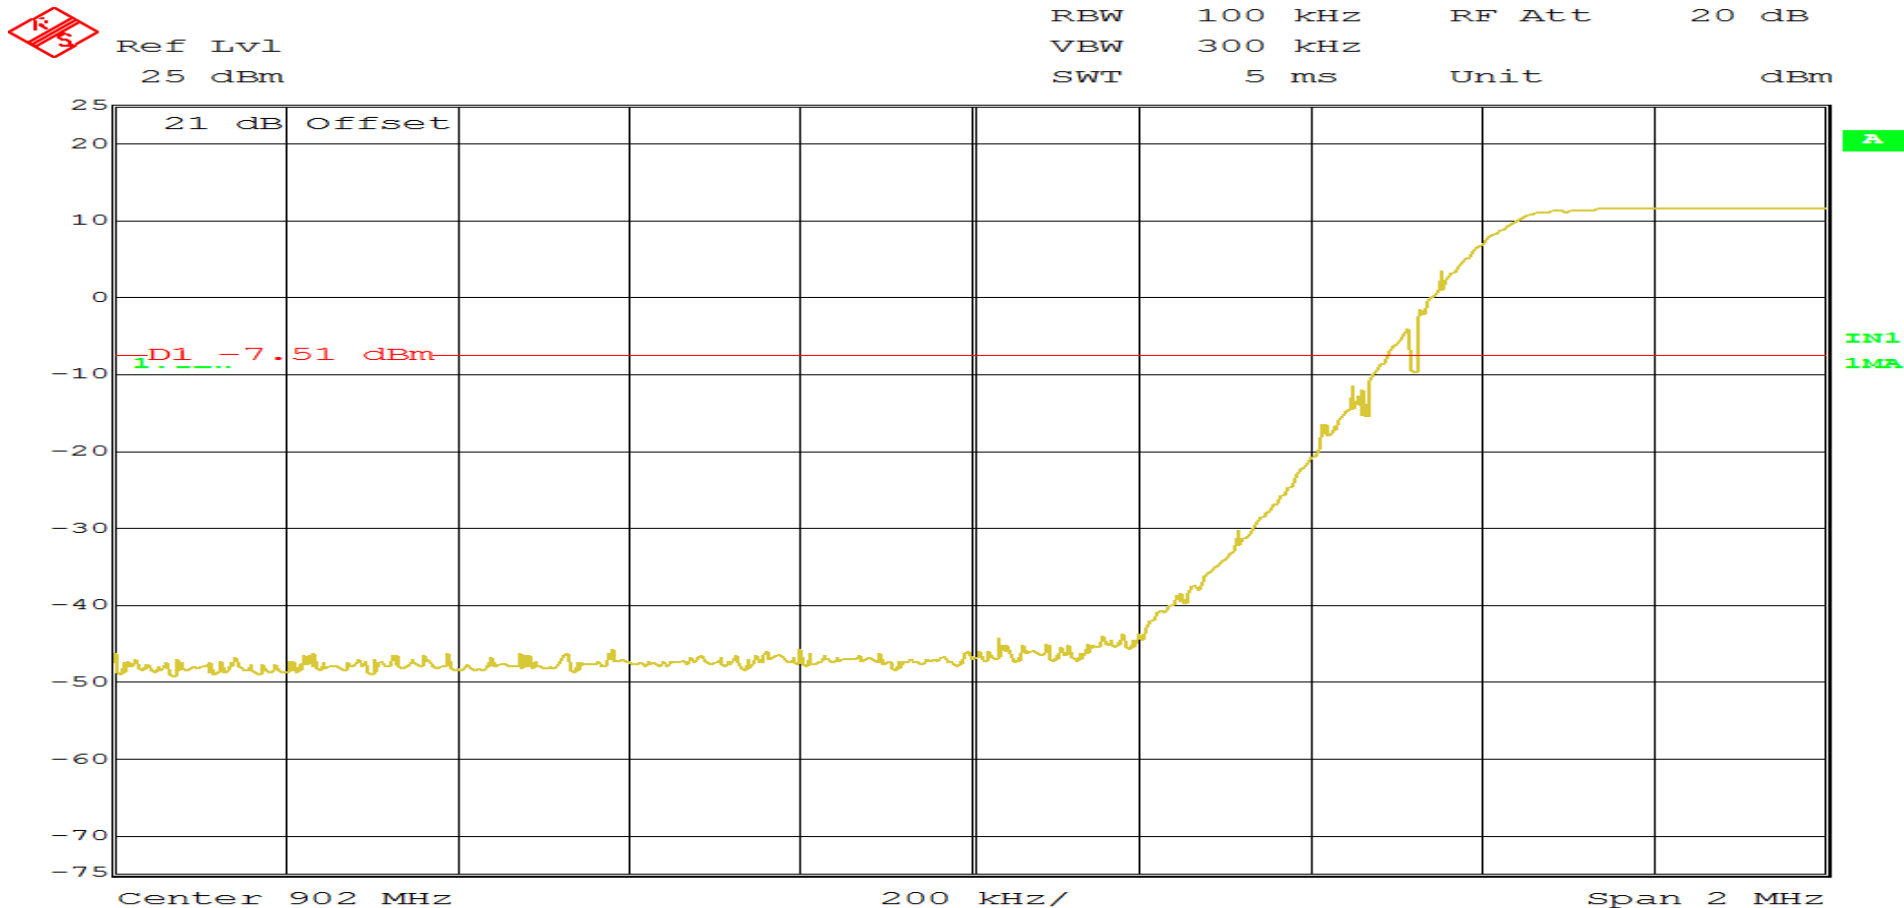


Date: 18.JAN.2016 09:47:18  
 Page 1 of 2



# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Band Edge Conducted                             |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 914.2 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)    |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 23.8 %         |            |                                 |
| Notes               | Limit: -7.51 dBm                                |            |                                 |

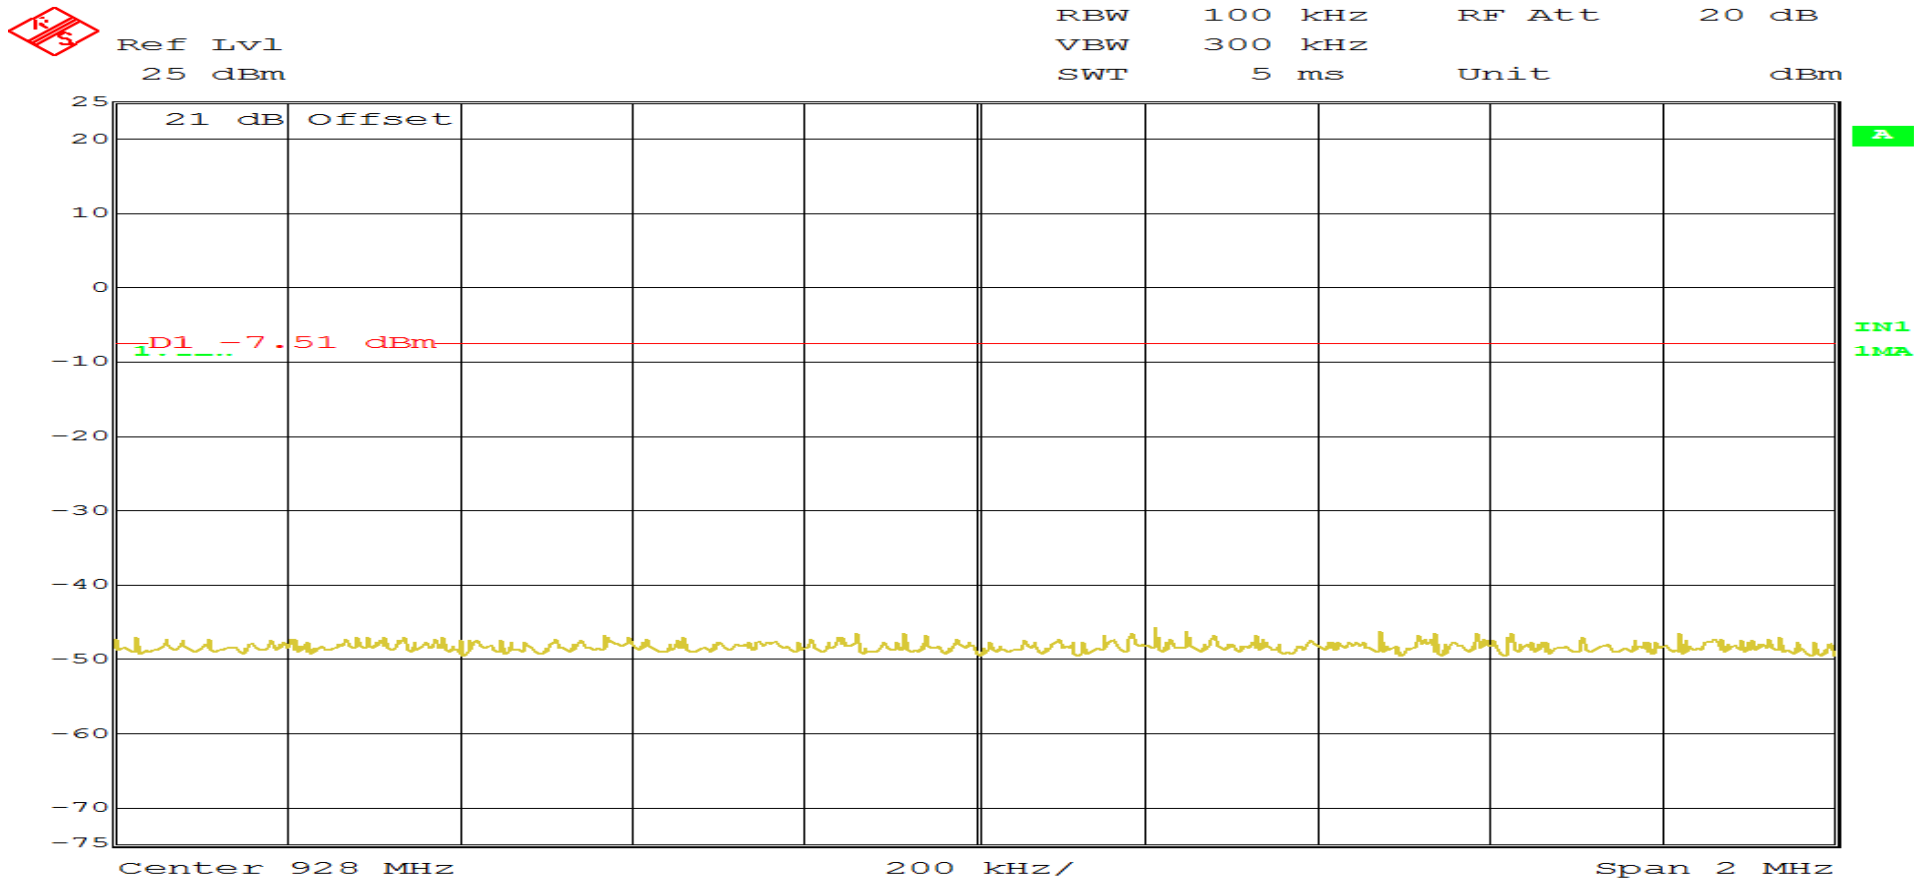

Date: 18.JAN.2016 09:44:00  
Page 2 of 2

**Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 902.3 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |

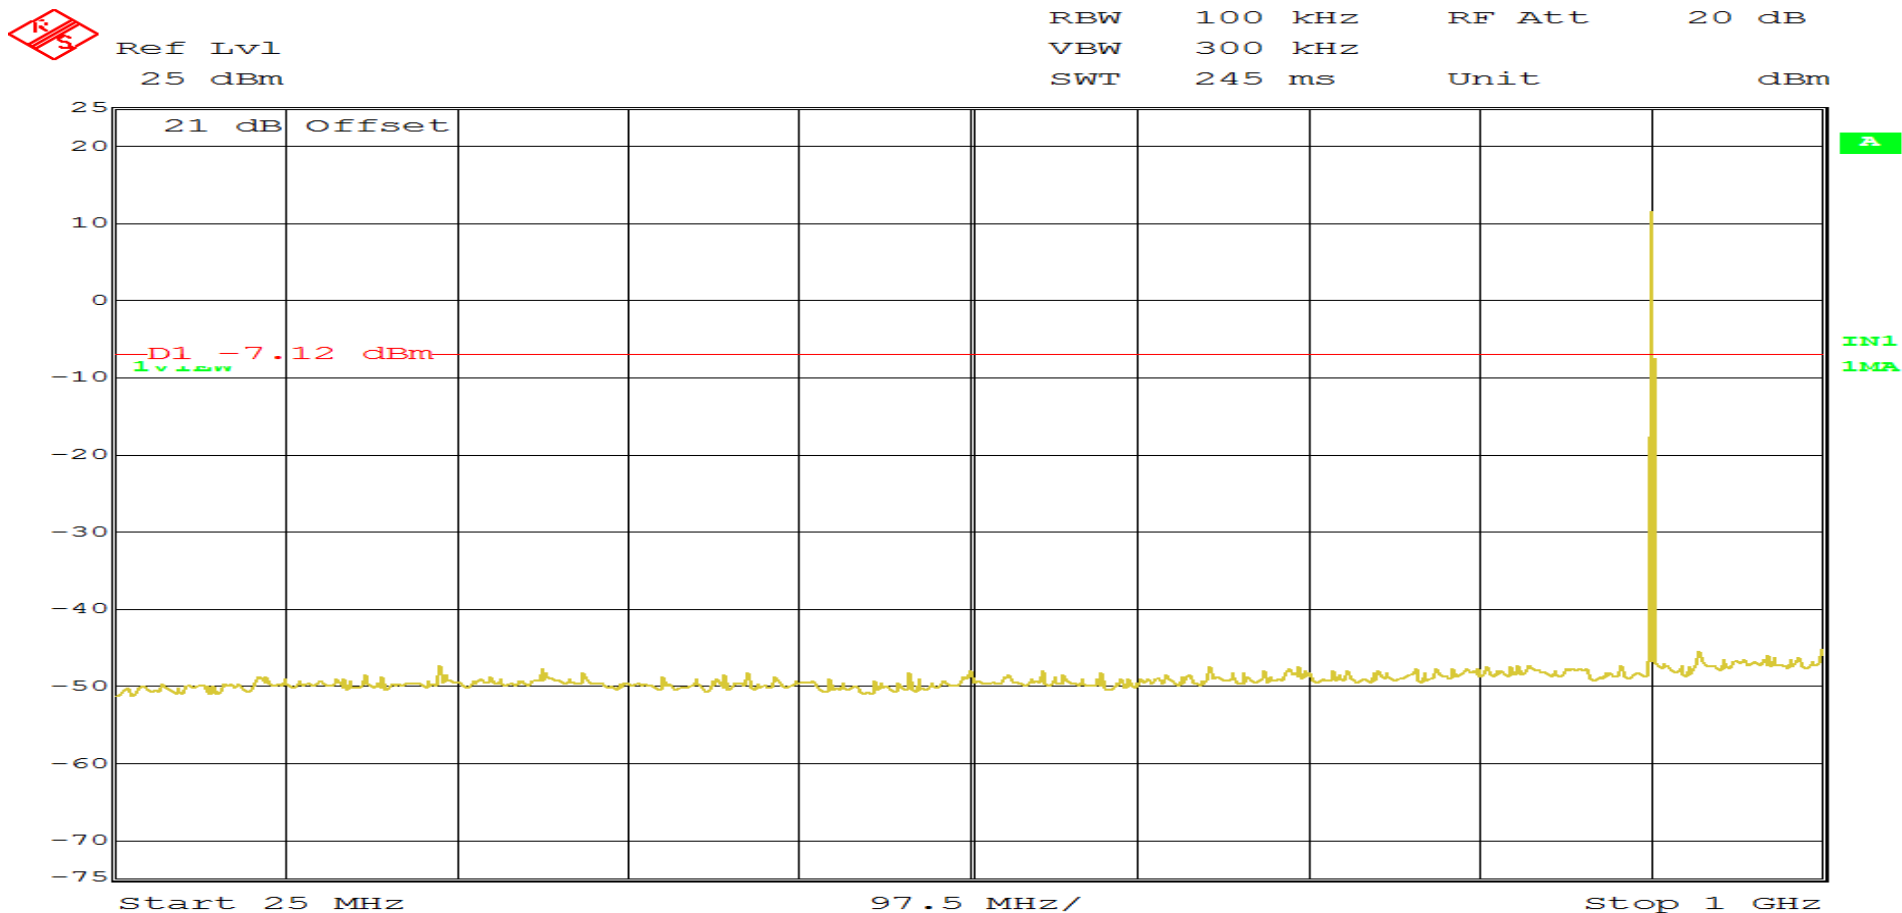

Date: 18.JAN.2016 14:40:20

Page 1 of 6


# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 902.3 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |



Ref Lvl  
25 dBm

RBW 100 kHz RF Att 20 dB  
VBW 300 kHz  
SWT 2.25 s Unit dBm

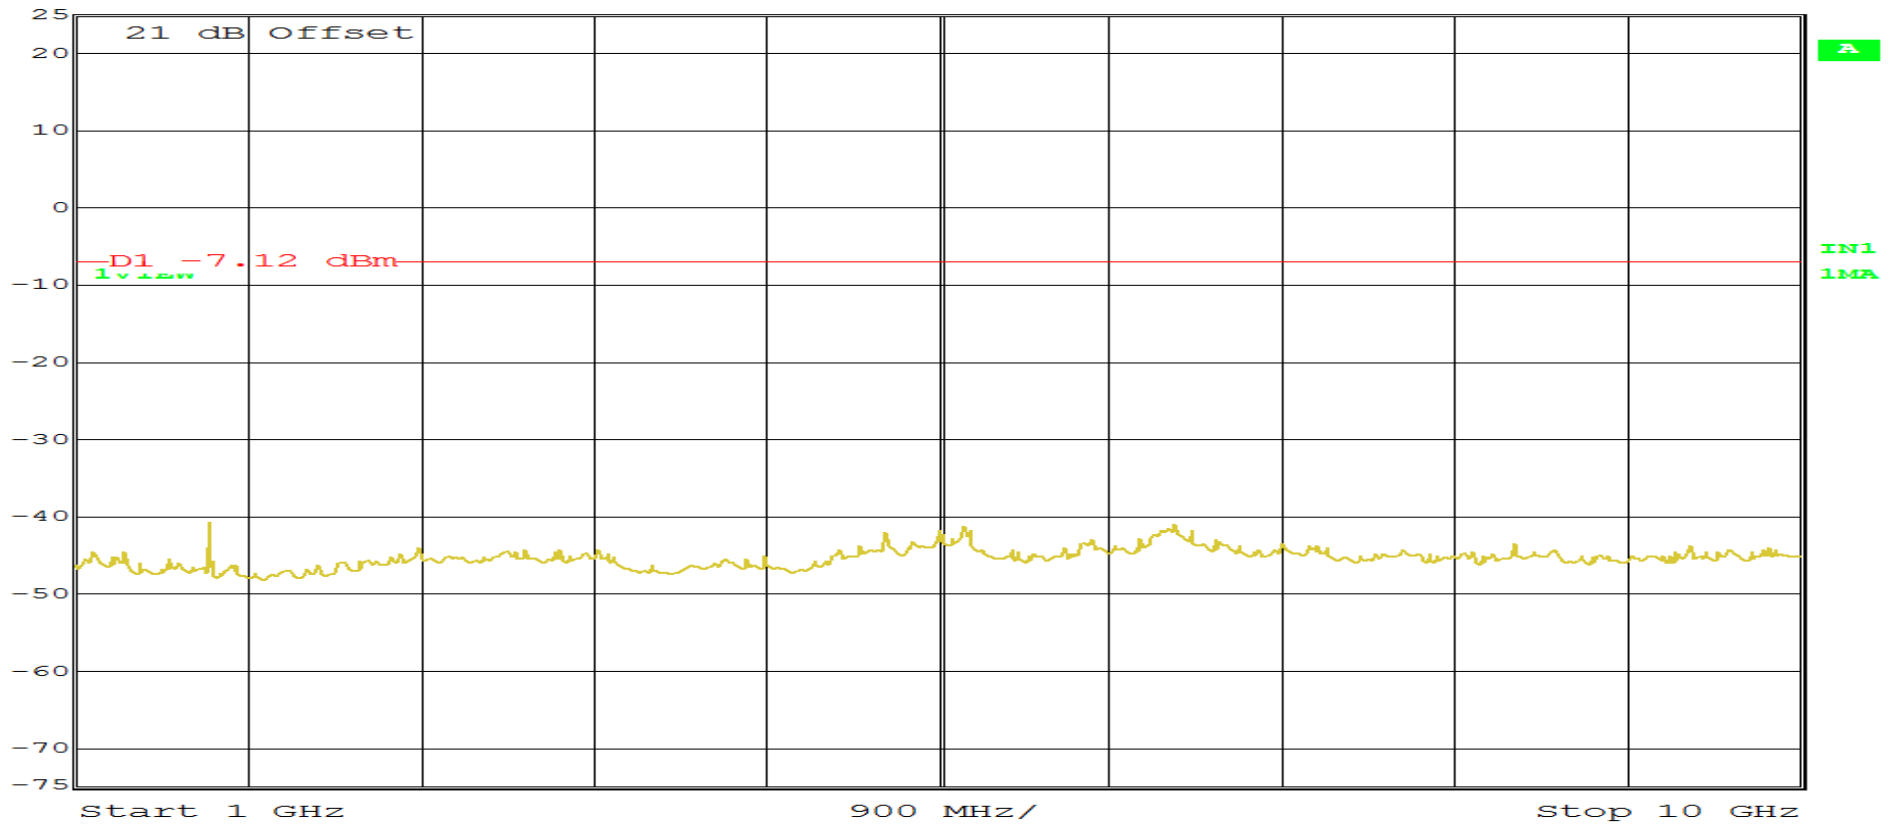

Date: 18.JAN.2016 14:42:59  
Page 2 of 6


# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 908.5 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |



Ref Lvl  
25 dBm

RBW 100 kHz RF Att 20 dB  
VBW 300 kHz  
SWT 245 ms Unit dBm

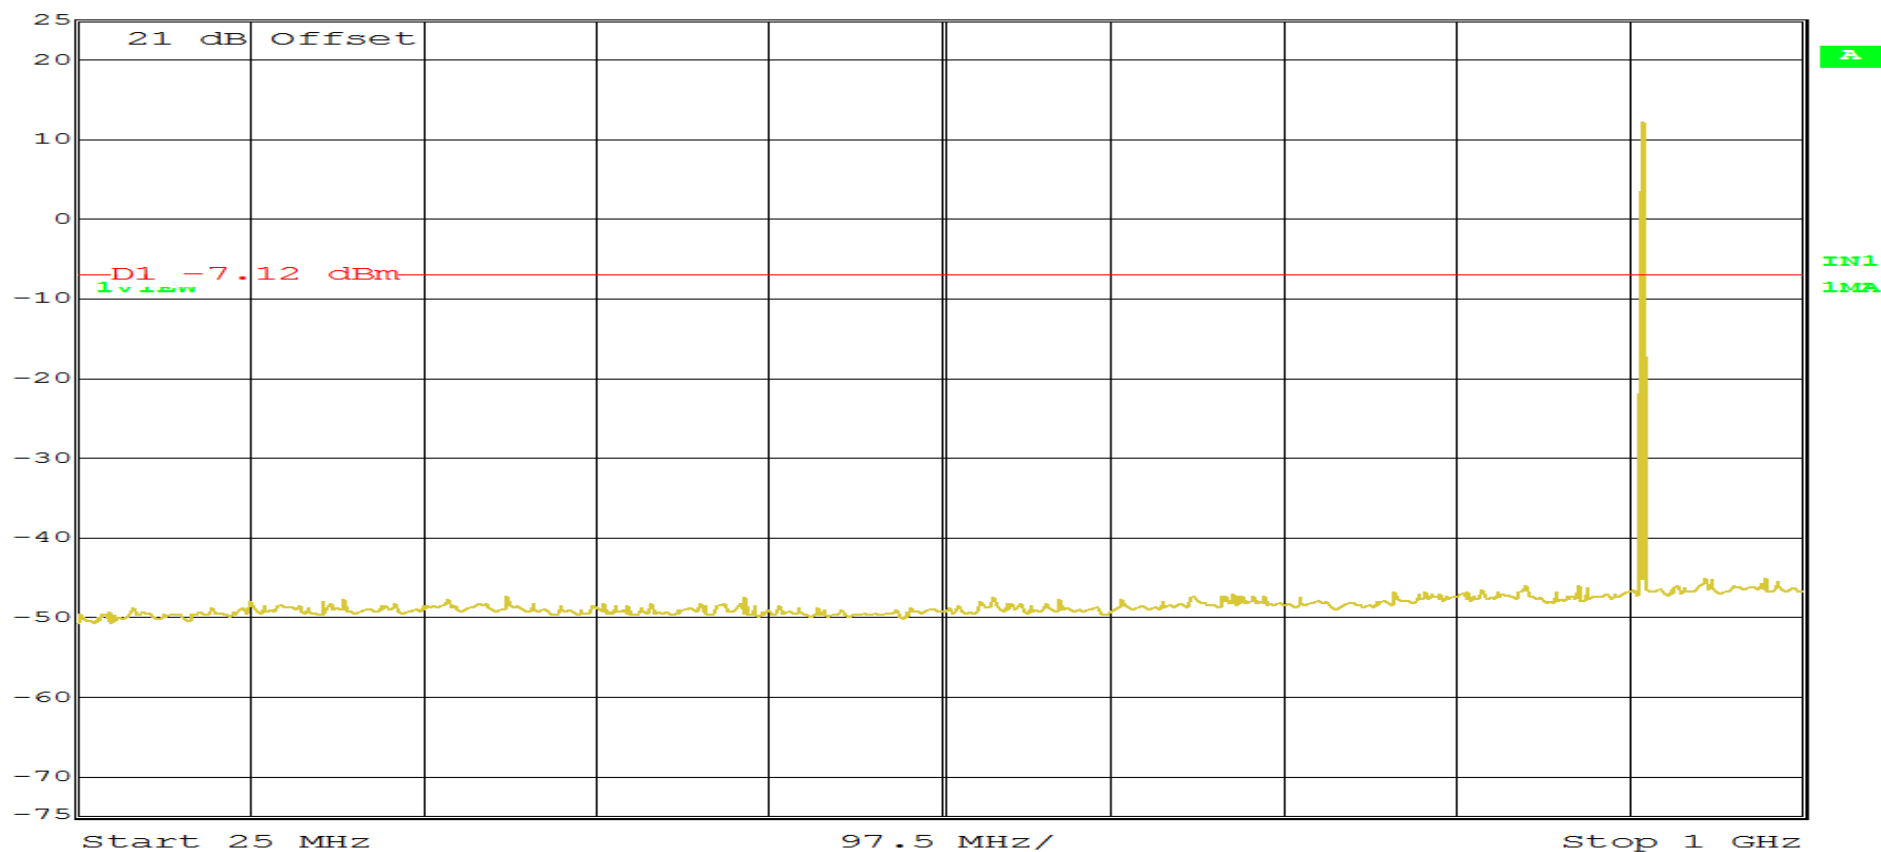

Date: 18.JAN.2016 14:54:03

Page 3 of 8


# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 908.5 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |



Ref Lvl  
25 dBm

RBW 100 kHz RF Att 20 dB  
VBW 300 kHz  
SWT 2.25 s Unit dBm

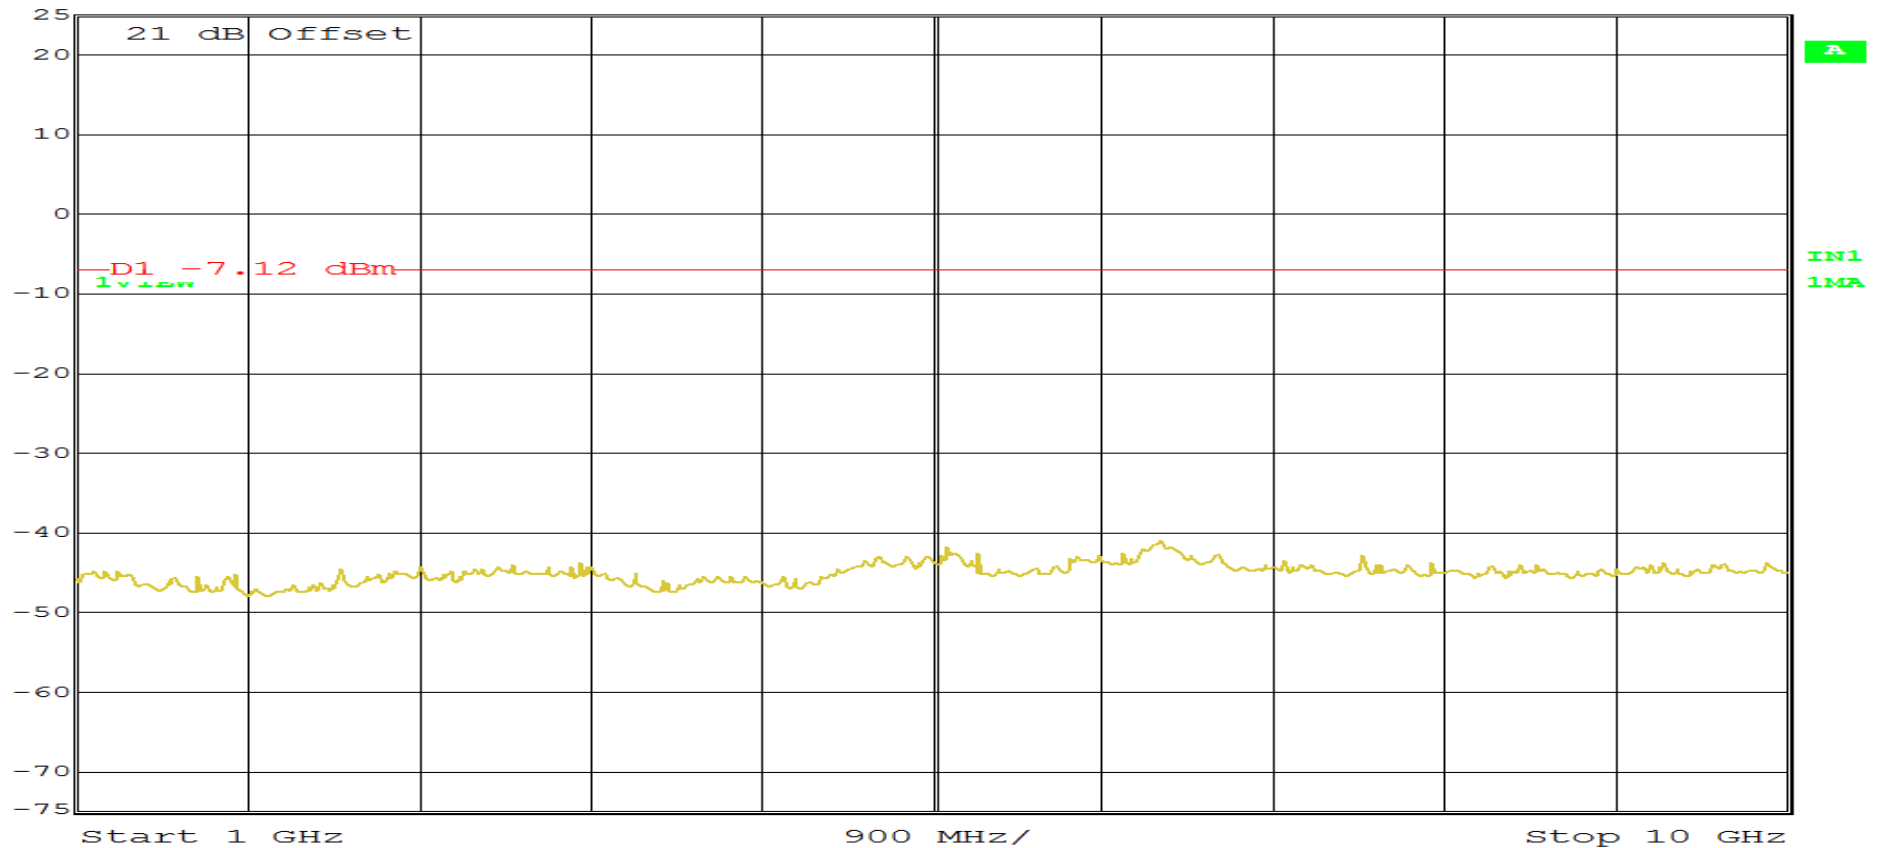

Date: 18.JAN.2016 14:49:07

Page 4 of 6


# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 914.9 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |



Ref Lvl  
25 dBm

RBW 100 kHz RF Att 20 dB  
VBW 300 kHz  
SWT 245 ms Unit dBm

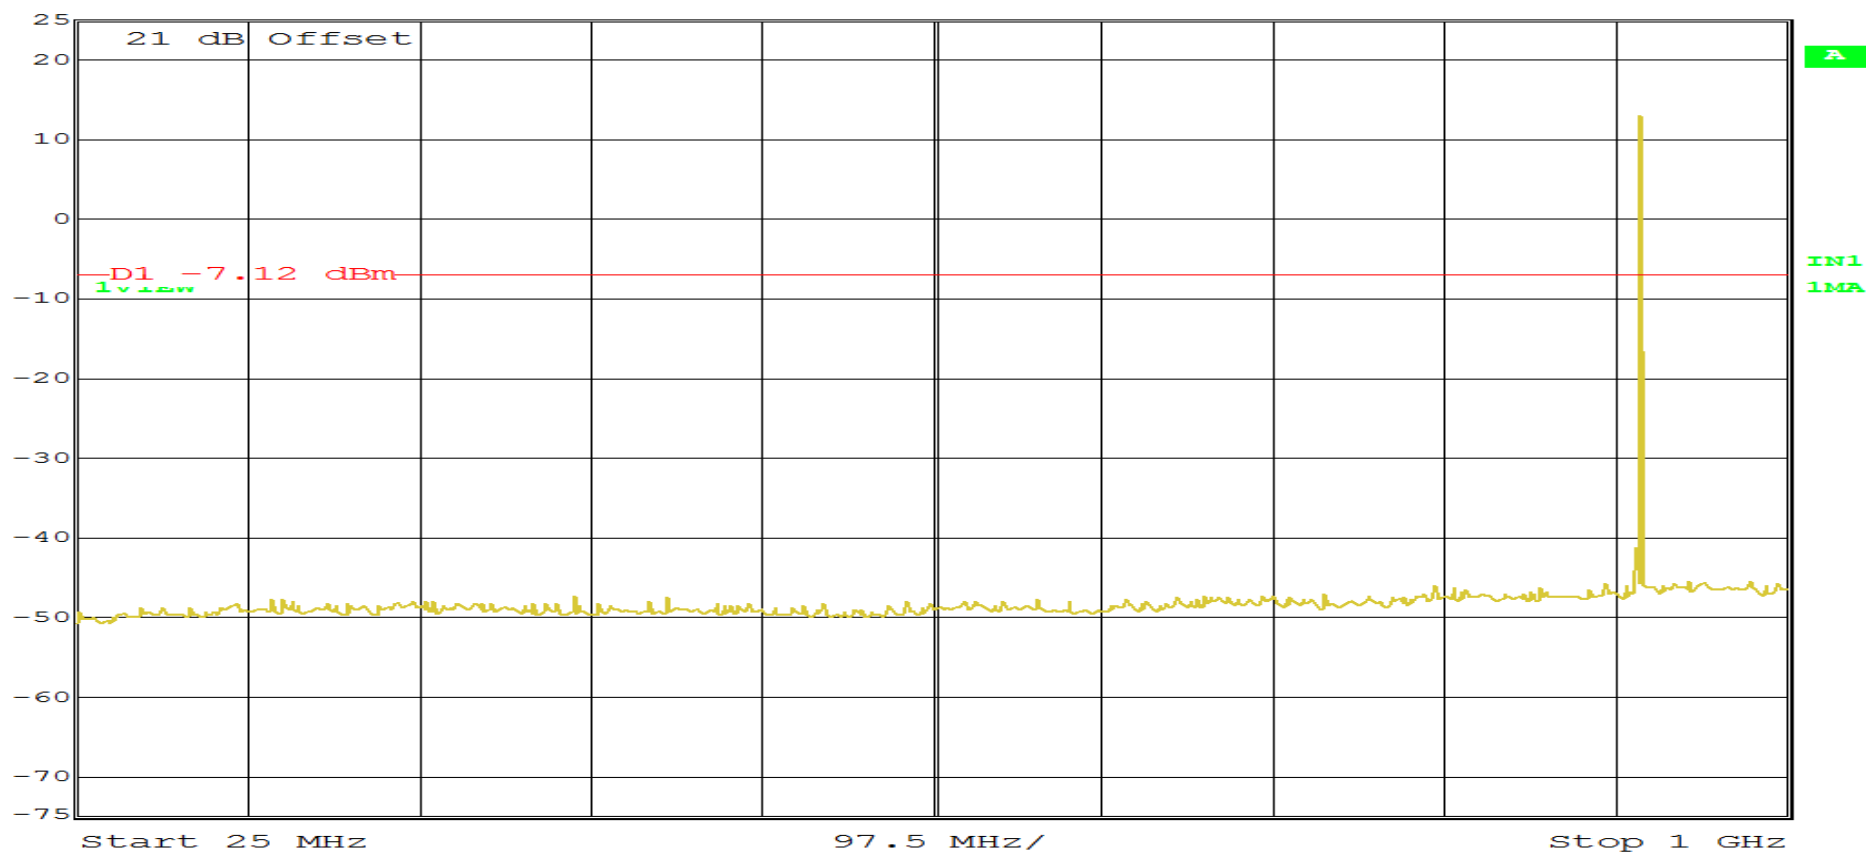

Date: 18.JAN.2016 14:56:48

Page 5 of 6


# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Out of Band Conducted Emissions 25 MHz to 10 GHz |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 914.9 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |



Ref Lvl  
25 dBm

RBW 100 kHz RF Att 20 dB  
VBW 300 kHz  
SWT 2.25 s Unit dBm

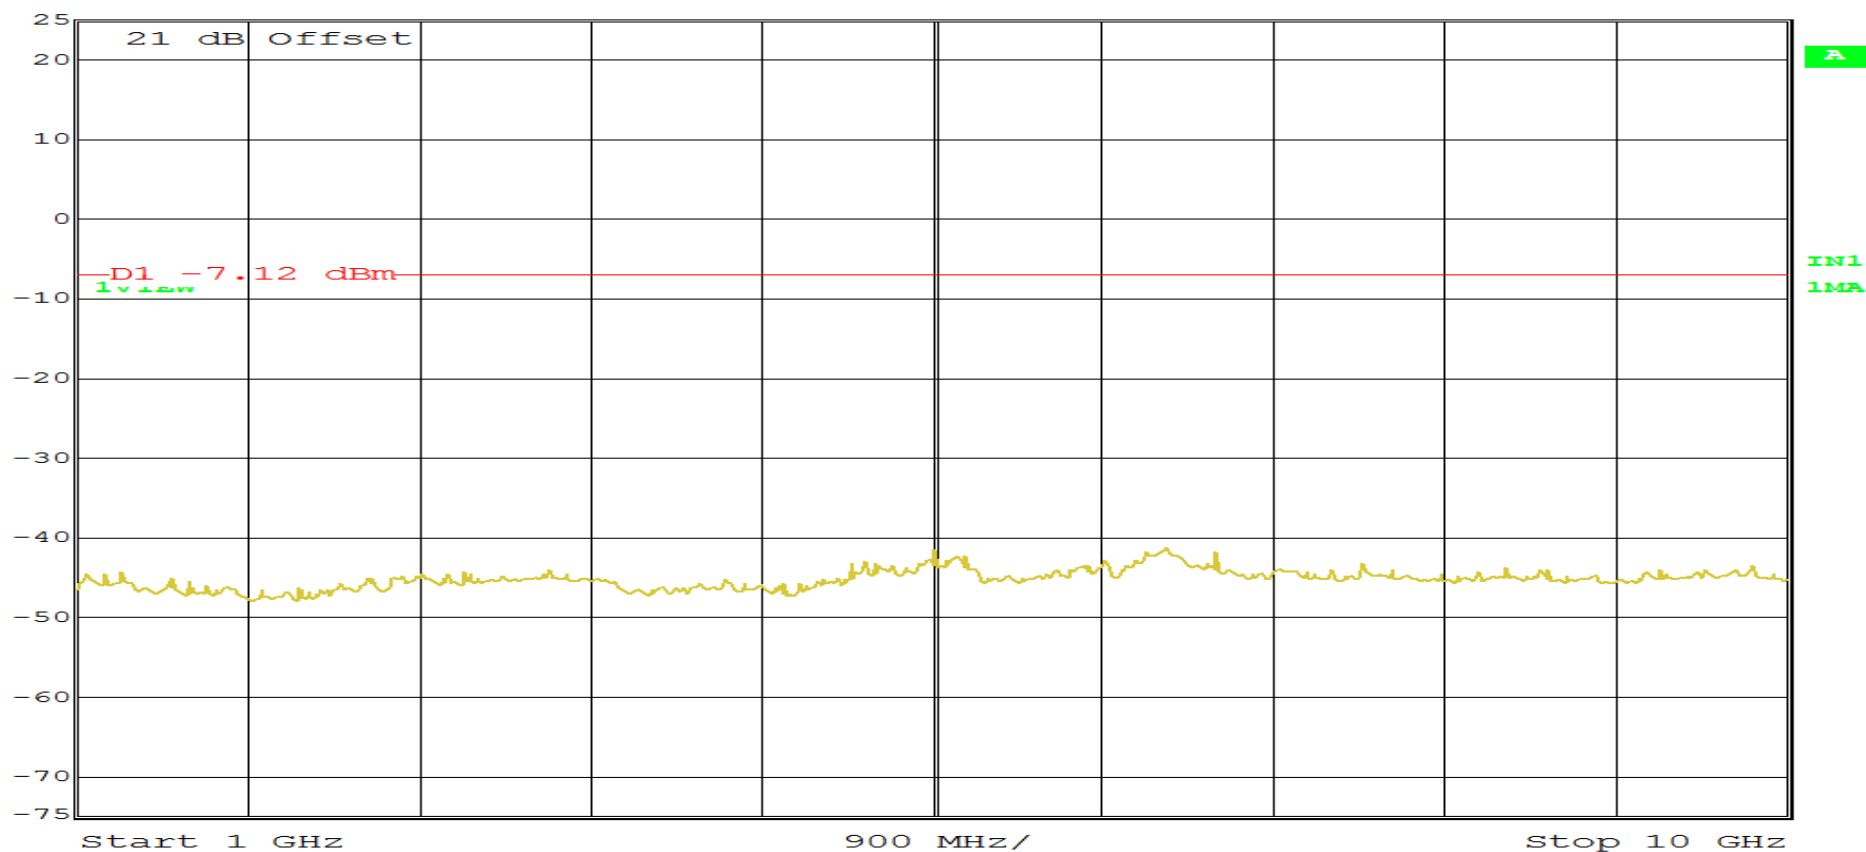

Date: 18.JAN.2016 15:00:35

Page 6 of 6



**Band Edge Conducted  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Band Edge Conducted                              |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 902.3 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |

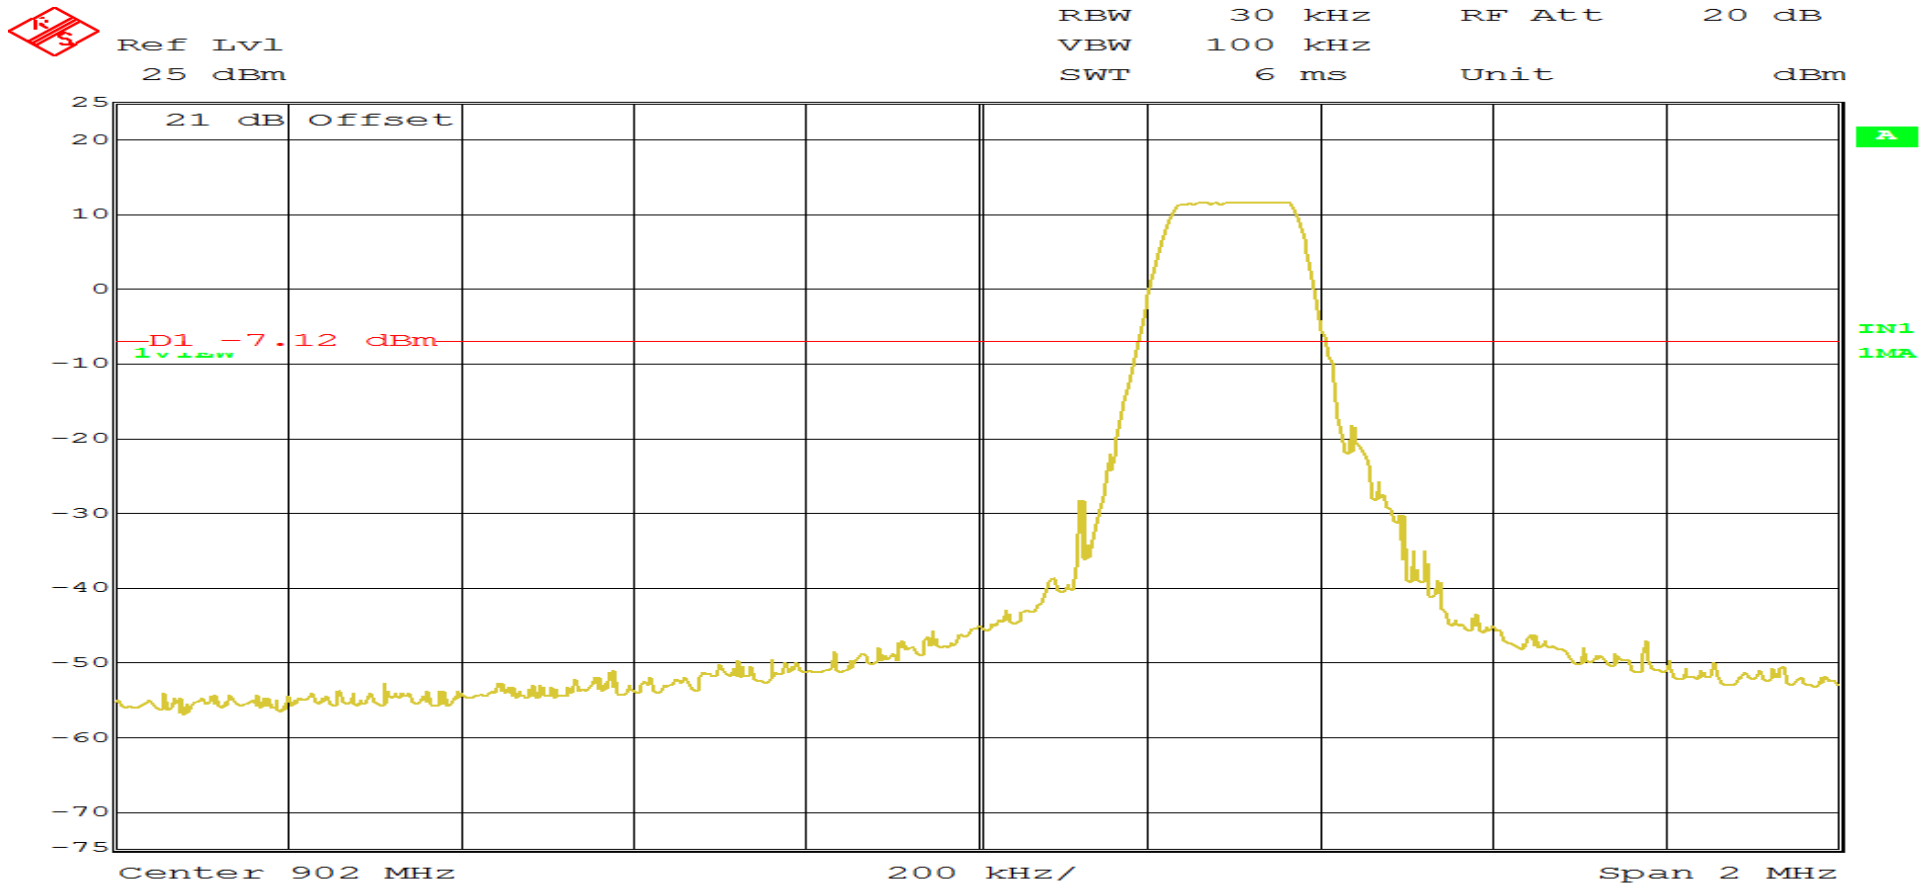

Date: 18.JAN.2016 15:12:18  
Page 1 of 2

# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Band Edge Conducted                              |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 914.9 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (d)     |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.8 °C Relative Humidity: 20.7 %          |            |                                 |
| Notes               | Limit: -7.12 dBm                                 |            |                                 |

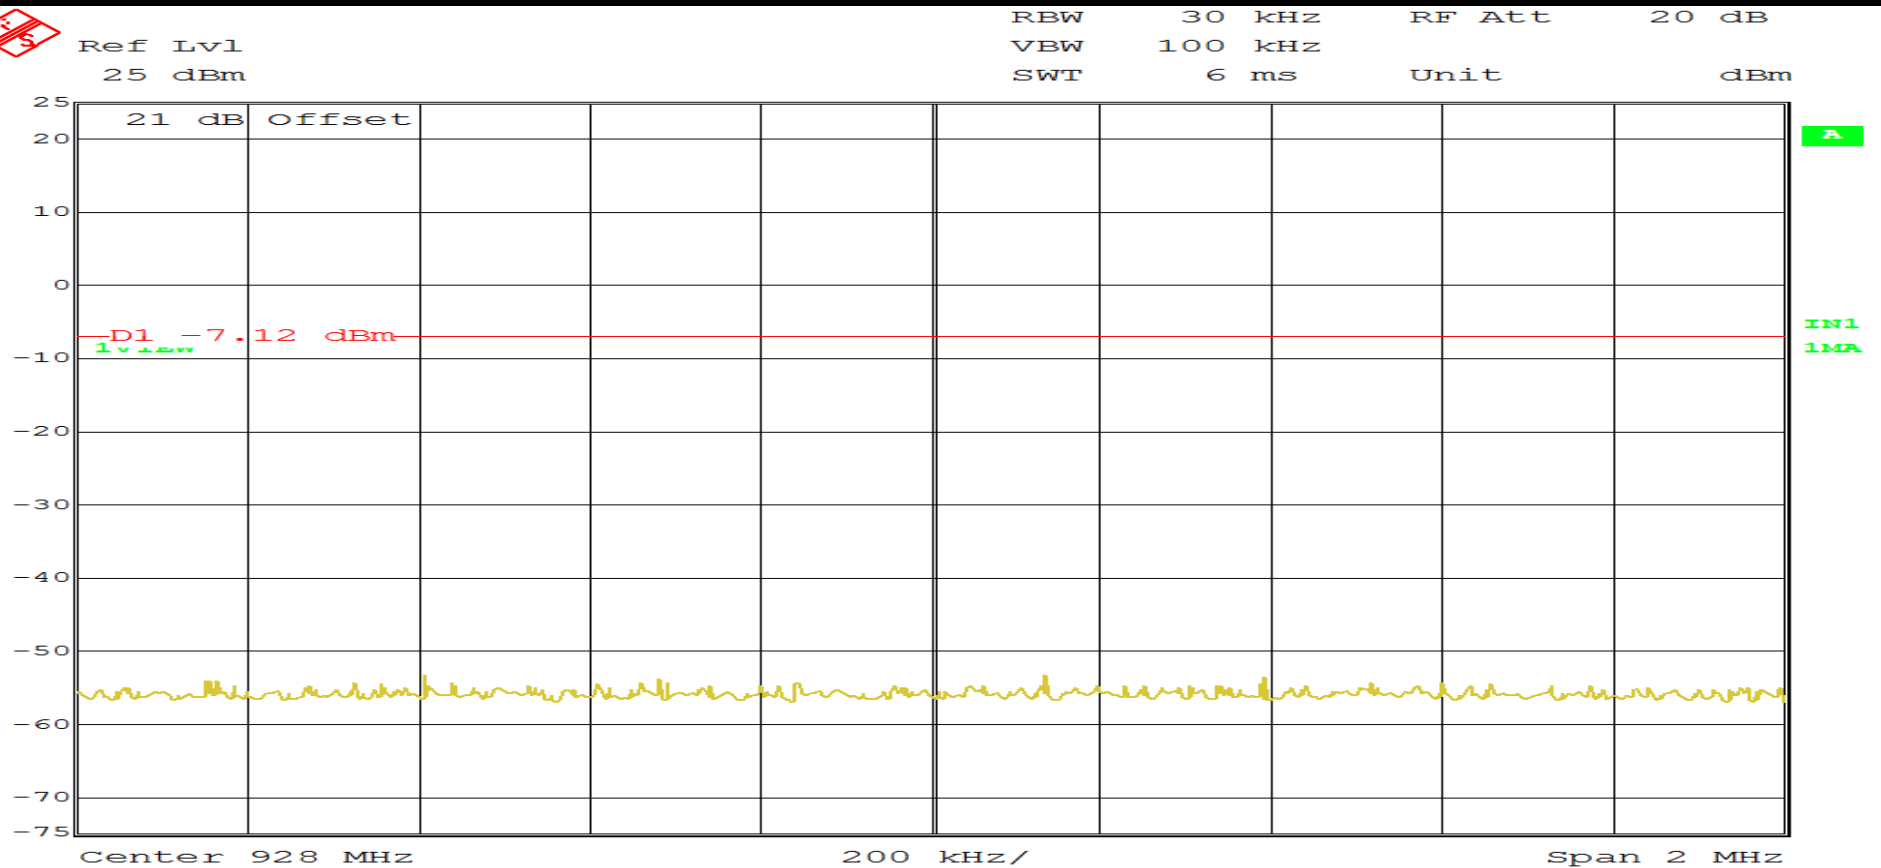

Date: 18.JAN.2016 15:05:46  
Page 2 of 2

**Band Edge Conducted  
Test Data**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**Out of Band/Band Edge Radiated Emissions, 30 MHz to 10 GHz**  
**FCC Section 15.247(d)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**Out of Band/Band Edge Radiated Emissions**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**Out of Band/Band Edge Radiated Emissions**



30 MHz – 1 GHz, Horizontal Polarization



30 MHz – 1 GHz, Vertical Polarization



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A



**Test Photograph(s)**  
**Out of Band/Band Edge Radiated Emissions**



1 GHz – 10 GHz, Horizontal Polarization



1 GHz – 10 GHz, Vertical Polarization



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A



**Unwanted Emissions into Restricted Frequency Bands  
30 MHz to 10 GHz  
DTS Test Data**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 37.50           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 | 38.00              | 11.71         | 14.20             | 25.91             | * |  | 19.75             | I           |
| 38.25           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 73.00           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 | 74.00              | 12.90         | 8.36              | 21.26             | * |  | 11.56             | I           |
| 74.60           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 74.80           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 | 75.00              | 13.60         | 8.36              | 21.96             | * |  | 12.53             |             |
| 75.20           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 108.00          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 115.00             | 3.81          | 10.02             | 13.83             | * |  | 4.91              |             |
|                 | -                  | -             | -                 | -                 |   |  | -                 |             |
| 121.94          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 123.00          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 132.00             | 2.84          | 9.44              | 12.28             | * |  | 4.11              |             |
|                 | -                  | -             | -                 | -                 |   |  | -                 |             |
| 138.00          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 149.90          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 150.00             | 10.46         | 11.17             | 21.63             | * |  | 12.06             |             |
| 150.05          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 156.52          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 156.52             | 2.32          | 12.08             | 14.40             | * |  | 5.25              |             |
| 156.52          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 156.70          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 156.80             | 2.31          | 12.12             | 14.43             | * |  | 5.27              |             |
| 156.90          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 162.01          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 165.00             | 2.46          | 12.68             | 15.14             | * |  | 5.71              |             |
| 167.17          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 167.72          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 170.00             | 6.03          | 12.80             | 18.83             | * |  | 8.74              |             |
| 173.20          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 240.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 260.00             | 0.02          | 16.85             | 16.87             | * |  | 6.97              |             |
| 285.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 322.80          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 330.00             | -0.28         | 18.91             | 18.63             | * |  | 8.54              |             |
| 335.40          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 399.90          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 405.00             | 1.53          | 21.49             | 23.02             | * |  | 14.16             |             |
| 410.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 608.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 611.00             | 0.76          | 27.34             | 28.10             | * |  | 25.41             |             |
| 614.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 960.00          | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 975.00             | 1.02          | 32.10             | 33.12             | * |  | 45.29             |             |
| 1240.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 1300.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1350.00            | 32.27         | -9.50             | 22.77             | * |  | 13.76             |             |
| 1427.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 1435.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1500.00            | 33.11         | -9.4              | 23.71             | * |  | 15.33             |             |
| 1646.50         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 1660.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1680.00            | 31.27         | -9.04             | 22.23             | * |  | 12.93             |             |
| 1710.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 1718.80         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1720.00            | 31.24         | -8.64             | 22.60             | * |  | 13.49             |             |
| 1722.20         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 2200.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2250.00            | 32.32         | -6.76             | 25.56             | * |  | 18.97             |             |
| 2300.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 2310.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2360.00            | 31.06         | -6.51             | 24.55             | * |  | 16.88             |             |
| 2390.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 2483.50         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2490.00            | 32.05         | -6.11             | 25.94             | * |  | 19.82             |             |
| 2500.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 2690.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2709.00            | 57.41         | -5.4              | 52.01             |   |  | 398.57            |             |
|                 | 2723.40            | 57.35         | -5.4              | 51.95             |   |  | 395.82            |             |
|                 | 2742.60            | 57.75         | -5.4              | 52.35             |   |  | 414.48            |             |
| 2900.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3260.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3263.00            | 30.55         | -3.4              | 27.15             | * |  | 22.78             |             |
| 3267.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3332.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3336.00            | 31.41         | -3.1              | 28.31             | * |  | 26.03             |             |
| 3339.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3345.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3350.00            | 30.94         | -3.1              | 27.84             | * |  | 24.66             |             |
| 3358.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3600.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3612.00            | 35.39         | -2.4              | 32.99             |   |  | 44.62             |             |
|                 | 3631.20            | 35.45         | -2.4              | 33.05             |   |  | 44.93             |             |
|                 | 3656.80            | 36.19         | -2.4              | 33.79             |   |  | 48.92             |             |

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10^{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band<br>MHz | Measured Frequency<br>MHz | Meter Reading<br>dBuV | Correction Factor<br>dB | Corrected Reading<br>dBuV/m |   |  | Converted Reading<br>uV/m | Limit at 3M<br>uV/m |
|------------------------|---------------------------|-----------------------|-------------------------|-----------------------------|---|--|---------------------------|---------------------|
|                        | -                         | -                     | -                       | -                           |   |  | -                         |                     |
| 4400.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 4500.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 4515.00                   | 41.95                 | -1.16                   | 40.79                       |   |  | 109.52                    |                     |
|                        | 4539.00                   | 42.05                 | -1.16                   | 40.89                       |   |  | 110.79                    |                     |
|                        | 4571.00                   | 42.35                 | -0.91                   | 41.44                       |   |  | 118.03                    |                     |
|                        | -                         | -                     | -                       | -                           |   |  | -                         |                     |
| 5150.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 5350.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 5400.00                   | 30.98                 | 0.89                    | 31.87                       | * |  | 39.22                     |                     |
| 5460.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 7250.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 7500.00                   | 32.75                 | 2.87                    | 35.62                       | * |  | 60.39                     |                     |
| 7750.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 8025.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 8127.00                   | 38.88                 | 3.20                    | 42.08                       |   |  | 127.06                    |                     |
|                        | 8170.20                   | 39.05                 | 3.30                    | 42.35                       |   |  | 131.07                    |                     |
|                        | 8227.80                   | 39.20                 | 3.50                    | 42.70                       |   |  | 136.46                    |                     |
|                        | -                         | -                     | -                       | -                           |   |  | -                         |                     |
| 8500.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**RETLIF TESTING LABORATORIES**

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting modulated(DTS) signal                 |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading (dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>( Corrected Reading / 20)

## TEST PARAMETERS

[illegible]

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 7 of 7



## Retlif Testing Laboratories

Report No. R-6046N-1, Rev. A



**Unwanted Emissions into Restricted Frequency Bands  
30 MHz to 10 GHz  
FHSS Test Data**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 37.50           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 | 38.00              | 11.71         | 14.20             | 25.91             | * |  | 19.75             | I           |
| 38.25           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 73.00           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 | 74.00              | 12.90         | 8.36              | 21.26             | * |  | 11.56             | I           |
| 74.60           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 74.80           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 | 75.00              | 13.60         | 8.36              | 21.96             | * |  | 12.53             |             |
| 75.20           | -                  | -             | -                 | -                 |   |  | -                 | 100.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 108.00          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 115.00             | 3.81          | 10.02             | 13.83             | * |  | 4.91              |             |
|                 | -                  | -             | -                 | -                 |   |  | -                 |             |
| 121.94          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 123.00          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 132.00             | 2.84          | 9.44              | 12.28             | * |  | 4.11              |             |
|                 | -                  | -             | -                 | -                 |   |  | -                 |             |
| 138.00          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 149.90          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 150.00             | 10.46         | 11.17             | 21.63             | * |  | 12.06             |             |
| 150.05          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 156.52          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 156.52             | 2.32          | 12.08             | 14.40             | * |  | 5.25              |             |
| 156.52          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 156.70          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 156.80             | 2.31          | 12.12             | 14.43             | * |  | 5.27              |             |
| 156.90          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 162.01          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 165.00             | 2.46          | 12.68             | 15.14             | * |  | 5.71              |             |
| 167.17          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 167.72          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 | 170.00             | 6.03          | 12.80             | 18.83             | * |  | 8.74              |             |
| 173.20          | -                  | -             | -                 | -                 |   |  | -                 | 150.00      |
|                 |                    |               |                   |                   |   |  |                   |             |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 240.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 260.00             | 0.02          | 16.85             | 16.87             | * |  | 6.97              |             |
| 285.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 322.80          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 330.00             | -0.28         | 18.91             | 18.63             | * |  | 8.54              |             |
| 335.40          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 399.90          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 405.00             | 1.53          | 21.49             | 23.02             | * |  | 14.16             |             |
| 410.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 608.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 | 611.00             | 0.76          | 27.34             | 28.10             | * |  | 25.41             |             |
| 614.00          | -                  | -             | -                 | -                 |   |  | -                 | 200.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 960.00          | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 975.00             | 1.02          | 32.10             | 33.12             | * |  | 45.29             |             |
| 1240.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 1300.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1350.00            | 32.27         | -9.50             | 22.77             | * |  | 13.76             |             |
| 1427.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 1435.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1500.00            | 33.11         | -9.4              | 23.71             | * |  | 15.33             |             |
| 1646.50         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 1660.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1680.00            | 31.27         | -9.04             | 22.23             | * |  | 12.93             |             |
| 1710.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 1718.80         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 1720.00            | 31.24         | -8.64             | 22.60             | * |  | 13.49             |             |
| 1722.20         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 2200.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2250.00            | 32.32         | -6.76             | 25.56             | * |  | 18.97             |             |
| 2300.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 2310.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2360.00            | 31.06         | -6.51             | 24.55             | * |  | 16.88             |             |
| 2390.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 2483.50         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2490.00            | 32.05         | -6.11             | 25.94             | * |  | 19.82             |             |
| 2500.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band | Measured Frequency | Meter Reading | Correction Factor | Corrected Reading |   |  | Converted Reading | Limit at 3M |
|-----------------|--------------------|---------------|-------------------|-------------------|---|--|-------------------|-------------|
| MHz             | MHz                | dBuV          | dB                | dBuV/m            |   |  | uV/m              | uV/m        |
| 2690.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 2706.90            | 32.14         | -5.4              | 26.74             | * |  | 21.73             |             |
|                 | 2725.50            | 32.17         | -5.4              | 26.77             | * |  | 21.80             |             |
|                 | 2744.70            | 32.19         | -5.4              | 26.79             | * |  | 21.85             |             |
| 2900.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3260.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3263.00            | 30.55         | -3.4              | 27.15             | * |  | 22.78             |             |
| 3267.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3332.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3336.00            | 31.41         | -3.1              | 28.31             | * |  | 26.03             |             |
| 3339.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3345.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3350.00            | 30.94         | -3.1              | 27.84             | * |  | 24.66             |             |
| 3358.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 |                    |               |                   |                   |   |  |                   |             |
| 3600.00         | -                  | -             | -                 | -                 |   |  | -                 | 500.00      |
|                 | 3609.20            | 30.96         | -2.4              | 28.56             | * |  | 26.79             |             |
|                 | 3659.60            | 30.99         | -2.4              | 28.59             | * |  | 26.88             |             |
|                 | 3634.00            | 31.05         | -2.4              | 28.65             | * |  | 27.07             |             |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>{ Corrected Reading /20}

## TEST PARAMETERS

| Restricted Band<br>MHz | Measured Frequency<br>MHz | Meter Reading<br>dBuV | Correction Factor<br>dB | Corrected Reading<br>dBuV/m |   |  | Converted Reading<br>uV/m | Limit at 3M<br>uV/m |
|------------------------|---------------------------|-----------------------|-------------------------|-----------------------------|---|--|---------------------------|---------------------|
|                        | -                         | -                     | -                       | -                           |   |  | -                         |                     |
| 4400.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 4500.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 4511.50                   | 32.01                 | -1.16                   | 30.85                       | * |  | 34.87                     |                     |
|                        | 4574.50                   | 31.05                 | -1.16                   | 29.89                       | * |  | 31.22                     |                     |
|                        | 4542.50                   | 30.16                 | -0.91                   | 29.25                       | * |  | 29.01                     |                     |
|                        | -                         | -                     | -                       | -                           |   |  | -                         |                     |
| 5150.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 5350.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 5400.00                   | 30.98                 | 0.89                    | 31.87                       | * |  | 39.22                     |                     |
| 5460.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 7250.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 7500.00                   | 32.75                 | 2.87                    | 35.62                       | * |  | 60.39                     |                     |
| 7750.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        |                           |                       |                         |                             |   |  |                           |                     |
| 8025.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |
|                        | 8120.70                   | 32.45                 | 3.20                    | 35.65                       | * |  | 60.60                     |                     |
|                        | 8176.50                   | 31.69                 | 3.30                    | 34.99                       | * |  | 56.17                     |                     |
|                        | 8234.10                   | 31.91                 | 3.50                    | 35.41                       | * |  | 58.95                     |                     |
|                        | -                         | -                     | -                       | -                           |   |  | -                         |                     |
| 8500.00                | -                         | -                     | -                       | -                           |   |  | -                         | 500.00              |

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 8



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

|                           |  |                      |
|---------------------------|--|----------------------|
| <b>Test Method</b>        | Unwanted Emissions into Restricted Frequency Bands |                      |
| <b>Customer</b>           | Nke Watteco  |                      |
| <b>Job Number</b>         | R-6046N-1  |                      |
| <b>Test Sample</b>        | Pulse Sensor                                       |                      |
| <b>Model Number</b>       | S0   |                      |
| <b>Serial Number</b>      | 2100547920001                                      |                      |
| <b>Test Specification</b> | FCC Part 15 Subpart C                              | Paragraph: 15.247(d) |
| <b>Operating Mode</b>     | Transmitting hopping frequency data                |                      |
| <b>Technician</b>         | M. Seamans   |                      |
| <b>Date</b>               | January 19 <sup>th</sup> , 2016                    |                      |

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz  
Corrected Reading (dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB)      Converted Reading (uV/M) = 10<sup>^</sup>( Corrected Reading / 20)

## TEST PARAMETERS

[illegible]

\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 7 of 7



## Retlif Testing Laboratories

Report No. R-6046N-1, Rev. A



**Test Photograph(s)  
Power Density  
FCC Section 15.247(e)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**Power Density**



## Test Configuration



## Retlif Testing Laboratories

Report No. R-6046N-1, Rev. A

**Power Spectral Density  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES


|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Power Spectral Density                        |            |                                 |
| Customer            | Nke Watteco                                   | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                  |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 903 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (e)  |            |                                 |
| Technician          | M. Seamans                                    | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 22.2 °C Relative Humidity: 22.9 %       |            |                                 |
| Notes               | Power Spectral Density: 3.33 dBm Limit: 8 dBm |            |                                 |

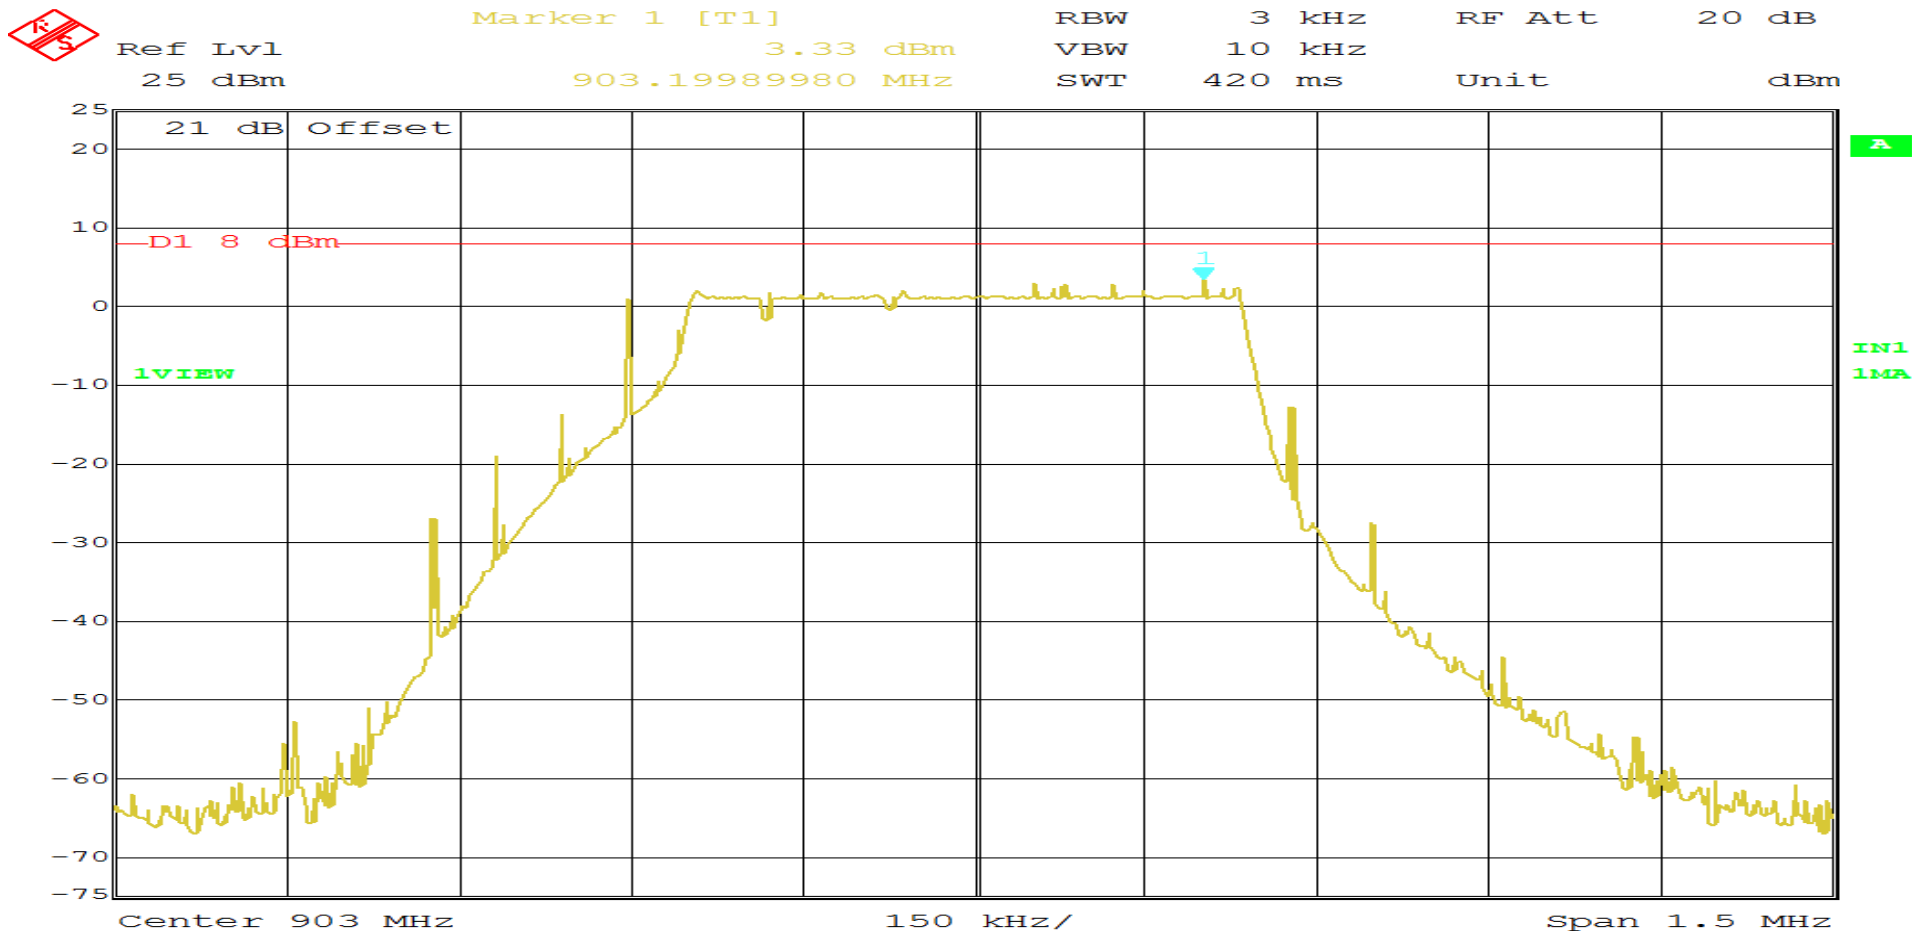

Date: 18.JAN.2016 09:50:42  
Page 1 of 3

# RETLIF TESTING LABORATORIES


|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Power Spectral Density                          |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 907.8 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (e)    |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 22.2 °C Relative Humidity: 22.9 %         |            |                                 |
| Notes               | Power Spectral Density: 2.86 dBm Limit: 8 dBm   |            |                                 |

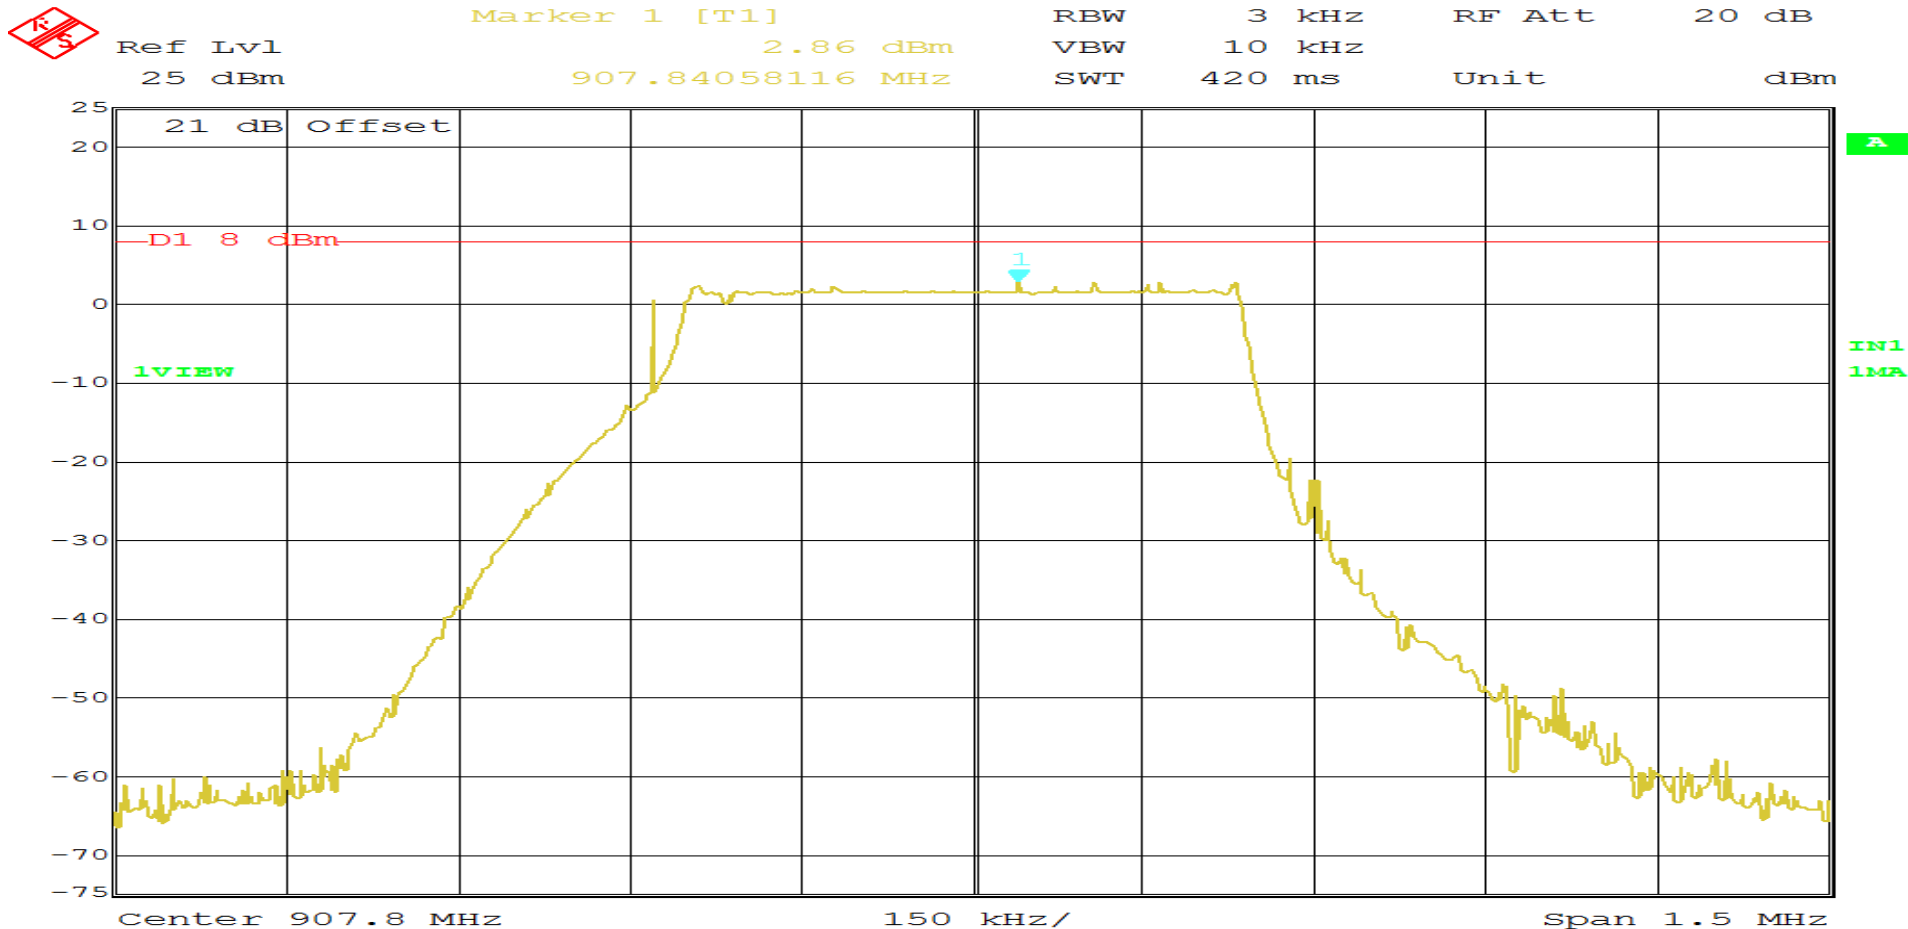

Date: 18.JAN.2016 09:52:48  
Page 2 of 3

# RETLIF TESTING LABORATORIES

|                     |   |            |                                 |
|---------------------|---|------------|---------------------------------|
| Test Method:        | Power Spectral Density                          |            |                                 |
| Customer            | Nke Watteco                                     | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                    |            |                                 |
| Model Number        | S0  | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(DTS) signal at 914.2 MHz |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (e)    |            |                                 |
| Technician          | M. Seamans                                      | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 22.2 °C Relative Humidity: 22.9 %         |            |                                 |
| Notes               | Power Spectral Density: 3.60 dBm Limit: 8 dBm   |            |                                 |

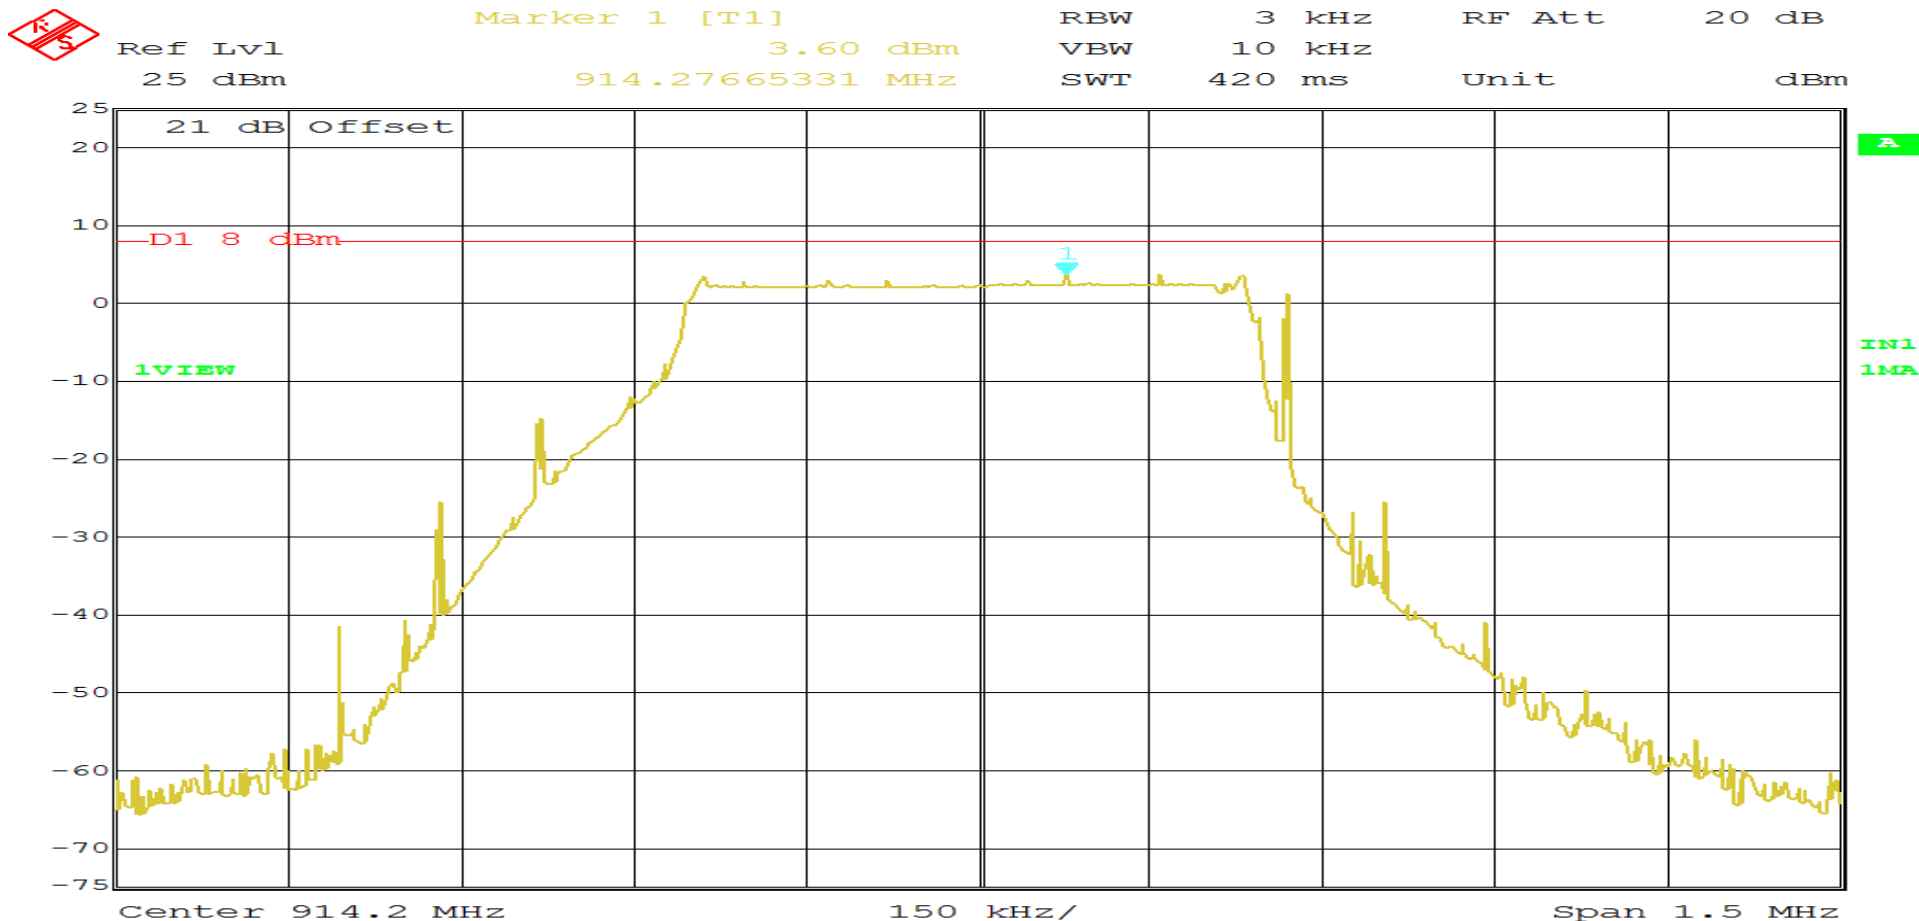

Date: 18.JAN.2016 09:54:43  
Page 3 of 3


**Test Photograph(s)  
FHSS Bandwidth  
20 dB Bandwidth  
FCC Section 15.247(a)(1)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**FHSS Bandwidth**  
**20 dB Bandwidth**

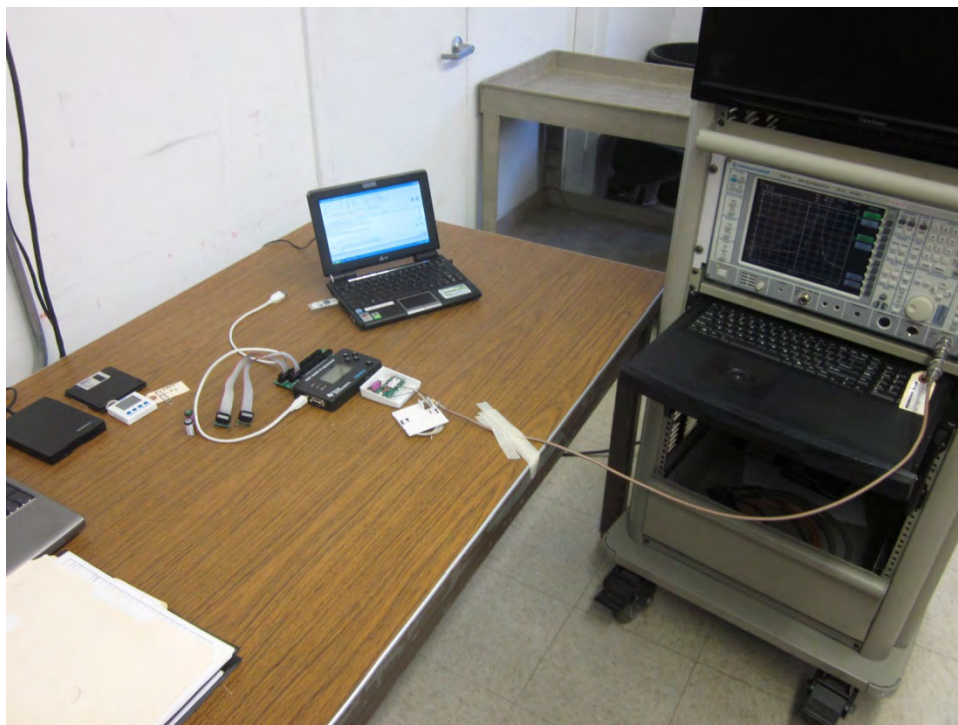

**Test Setup**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A



**FHSS Bandwidth  
20 dB Bandwidth  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | 20dB Bandwidth                                     |            |                                 |
| Customer            | Nke Watteco  | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                       |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 902.3 MHz   |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i) |            |                                 |
| Technician          | M. Seamans   | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.6 °C Relative Humidity: 22.3 %            |            |                                 |
| Notes               | Occupied Bandwidth: 168.33 kHz                     |            |                                 |

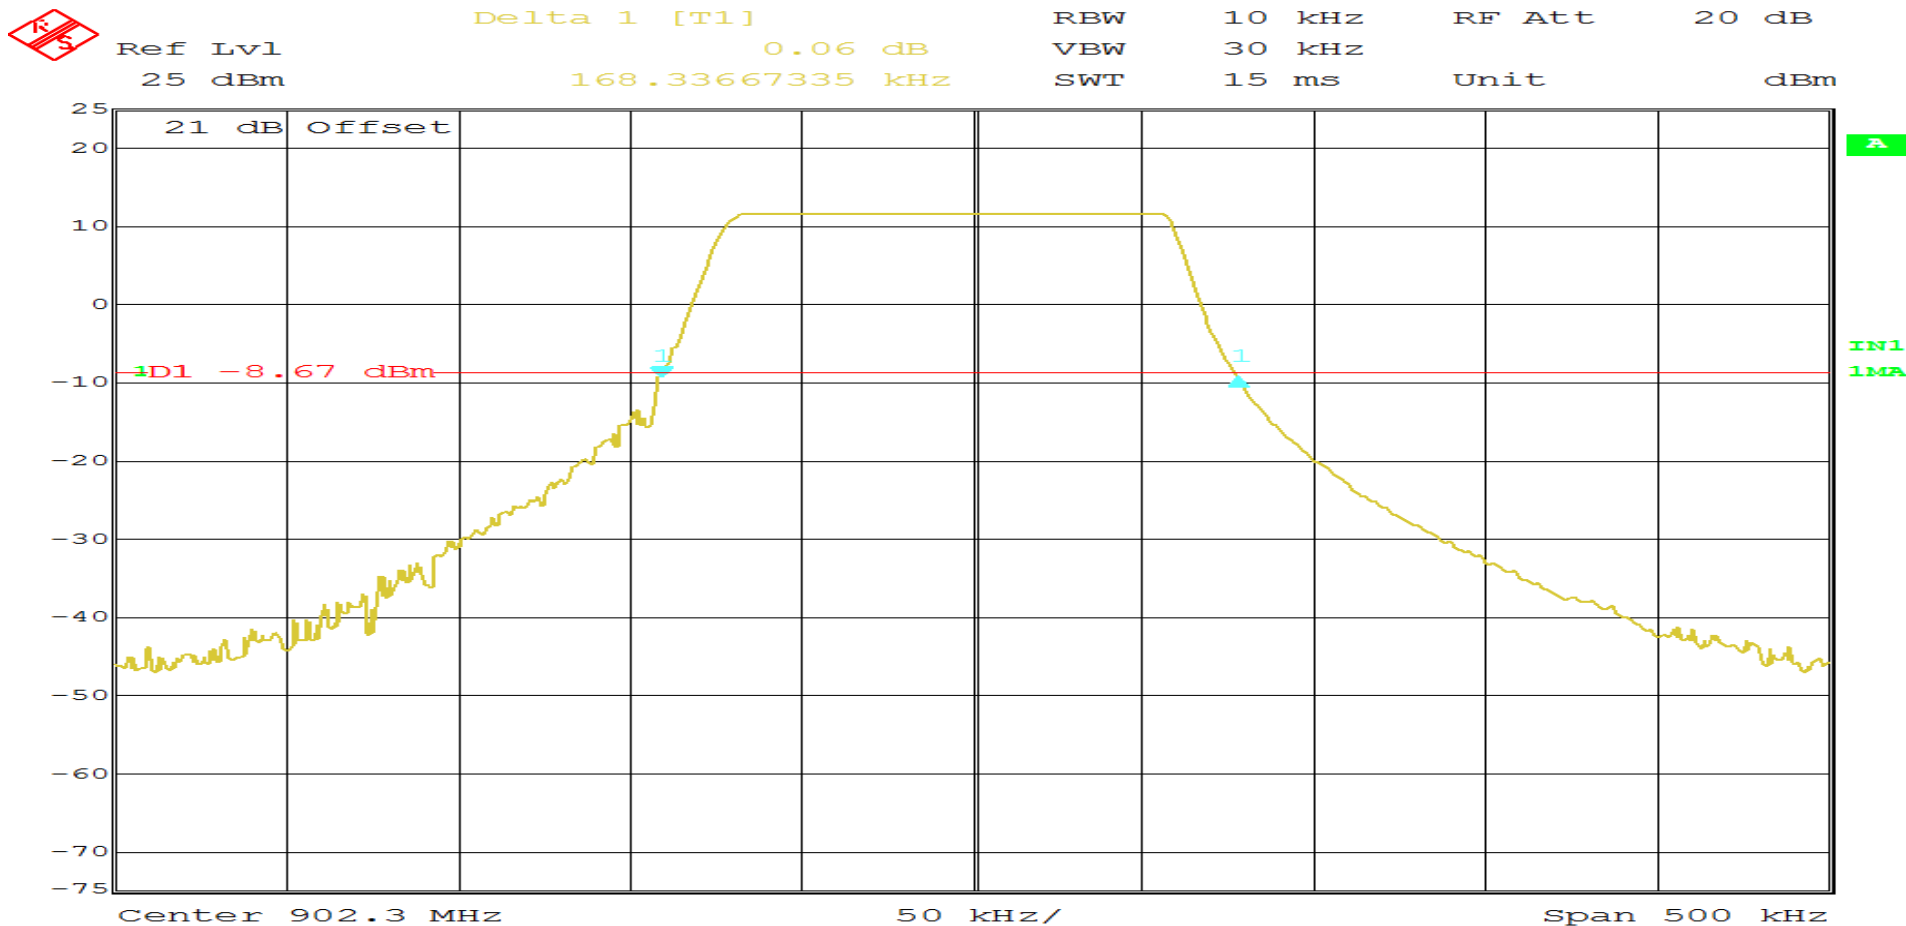

Date: 18.JAN.2016 11:08:53  
Page 1 of 3

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | 20dB Bandwidth                                     |            |                                 |
| Customer            | Nke Watteco  | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                       |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 908.5 MHz   |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i) |            |                                 |
| Technician          | M. Seamans   | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.6 °C Relative Humidity: 22.3 %            |            |                                 |
| Notes               | Occupied Bandwidth: 166.33 kHz                     |            |                                 |

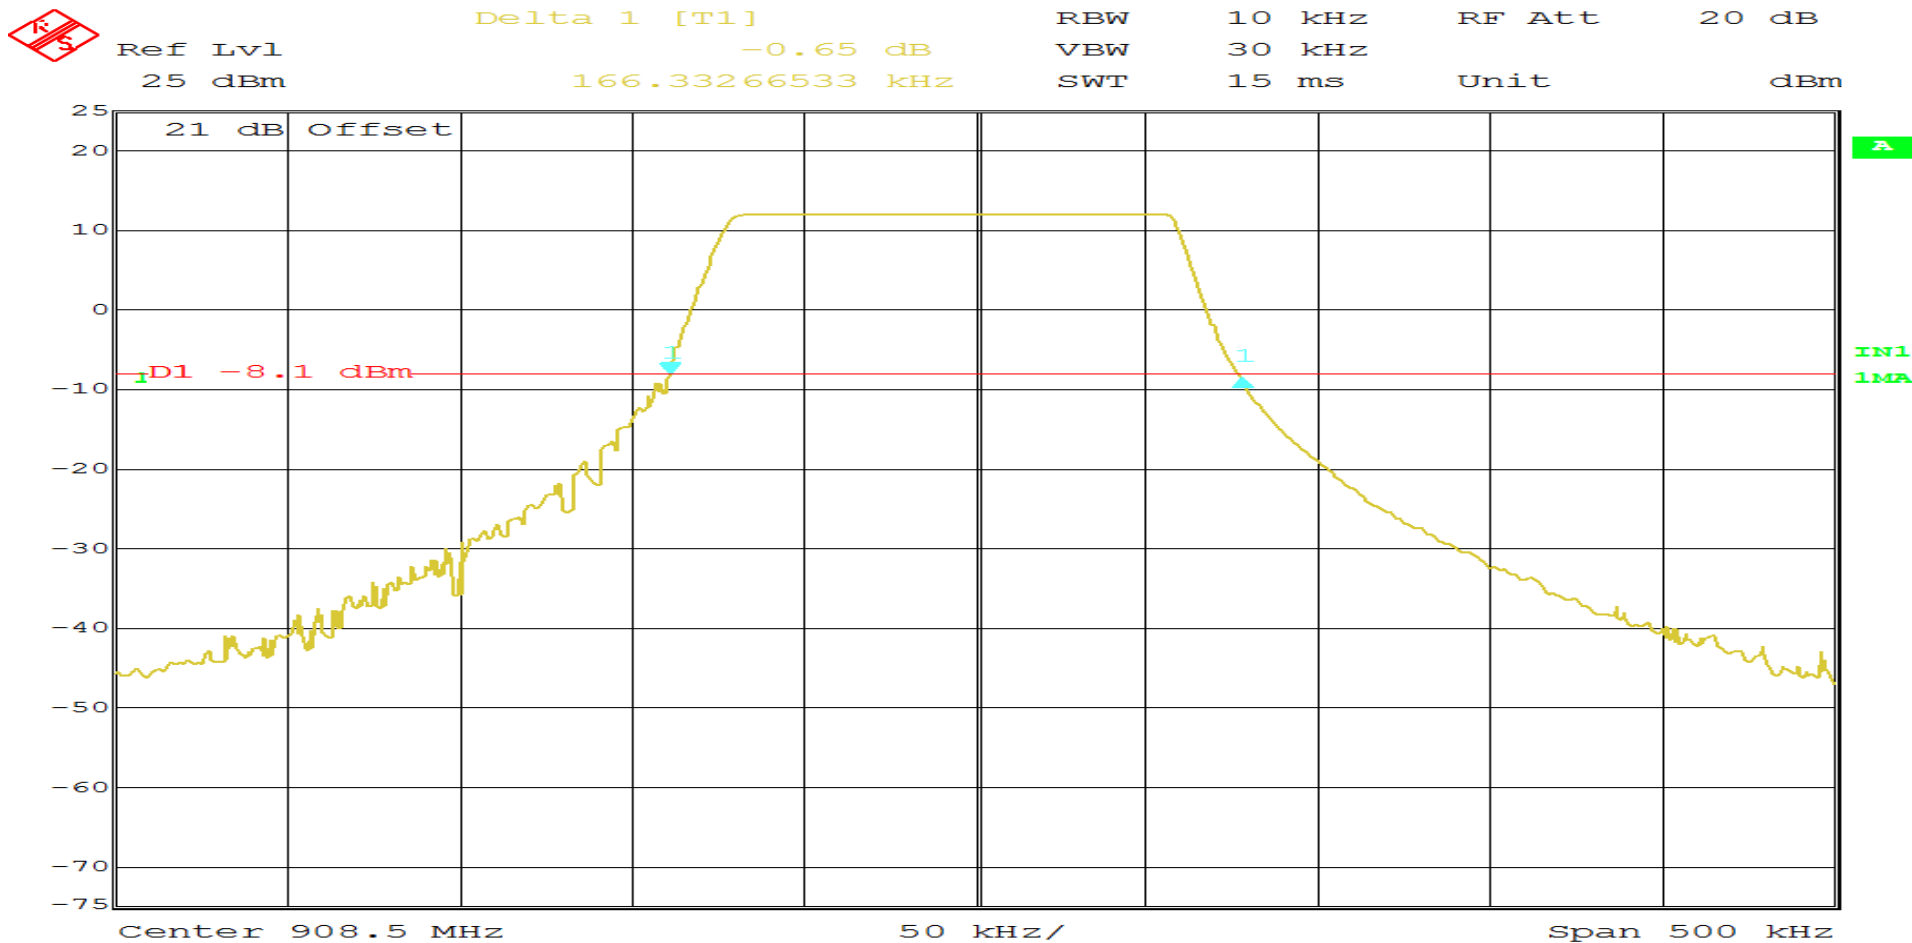

Date: 18.JAN.2016 11:18:34  
 Page 2 of 3

# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | 20dB Bandwidth                                     |            |                                 |
| Customer            | Nke Watteco  | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                       |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting modulated(FHSS) signal at 914.9 MHz   |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i) |            |                                 |
| Technician          | M. Seamans   | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.6 °C Relative Humidity: 22.3 %            |            |                                 |
| Notes               | Occupied Bandwidth: 166.33 kHz                     |            |                                 |

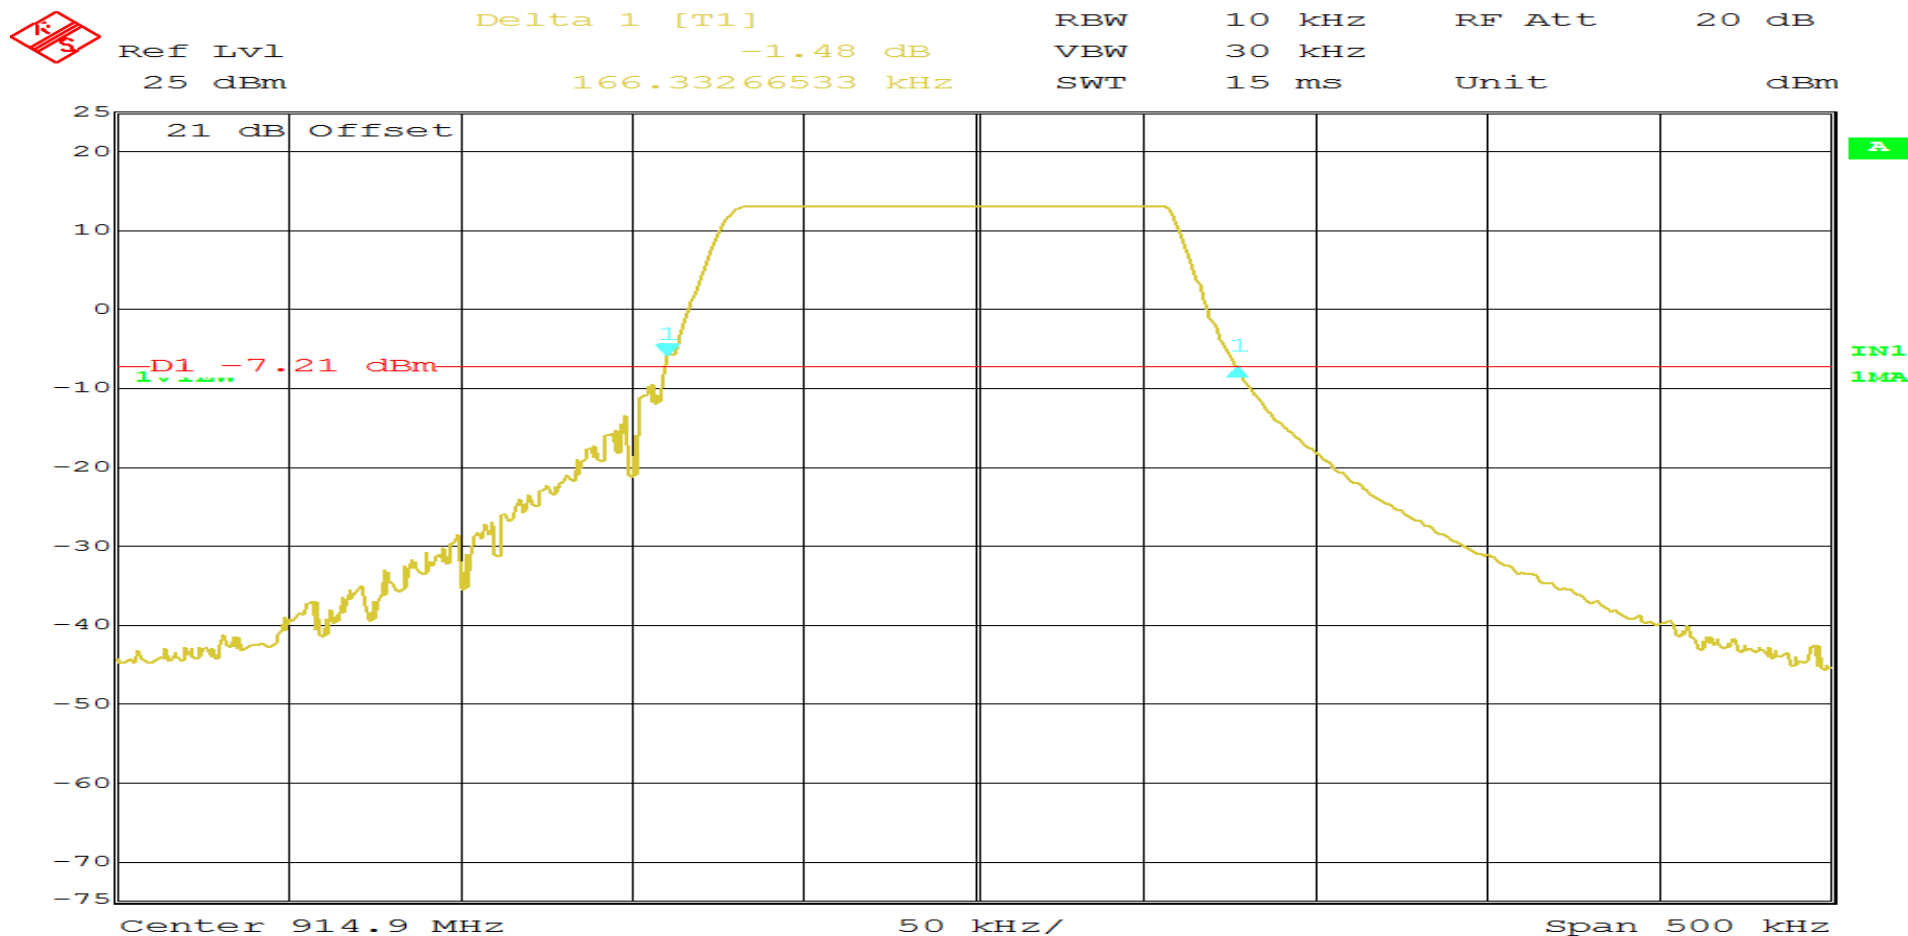

Date: 18.JAN.2016 11:31:00  
 Page 3 of 3


**Test Photograph(s)**  
**Number of Hopping Channels and Time of Occupancy**  
**FCC Section 15.247(a)(1)(iii)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)**  
**Number of Hopping Channels and Time of Occupancy**

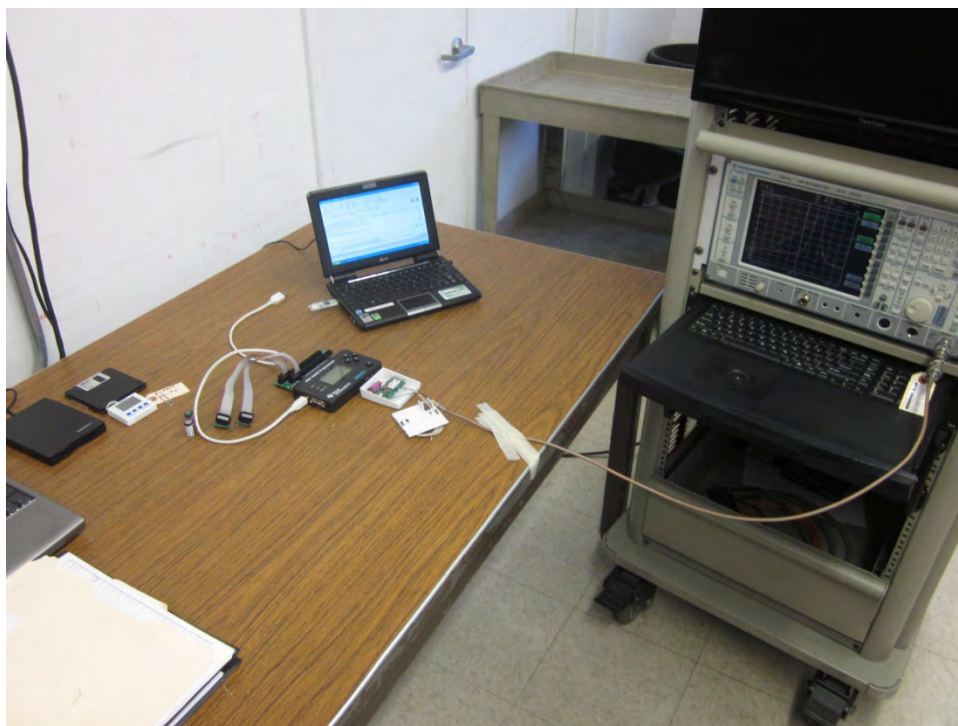

Test Setup



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Number of Hopping Channels and Time of Occupancy  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

|                            |  |                   |                                 |
|----------------------------|--|-------------------|---------------------------------|
| <b>Test Method:</b>        | Number of Hopping Frequencies                      |                   |                                 |
| <b>Customer</b>            | Nke Watteco  | <b>Job No.</b>    | R-6046N-1                       |
| <b>Test Sample</b>         | Pulse Sensor                                       |                   |                                 |
| <b>Model Number</b>        | S0   | <b>Serial No.</b> | 2100547920001                   |
| <b>Operating Mode</b>      | Transmitting hopping frequency data                |                   |                                 |
| <b>Test Specification</b>  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i) |                   |                                 |
| <b>Technician</b>          | M. Seamans   | <b>Date</b>       | January 18 <sup>th</sup> , 2016 |
| <b>Climatic Conditions</b> | Temp: 21.7 °C Relative Humidity: 22.0 %            |                   |                                 |
| <b>Notes</b>               | Total Number of Hopping Frequencies: 64            |                   |                                 |

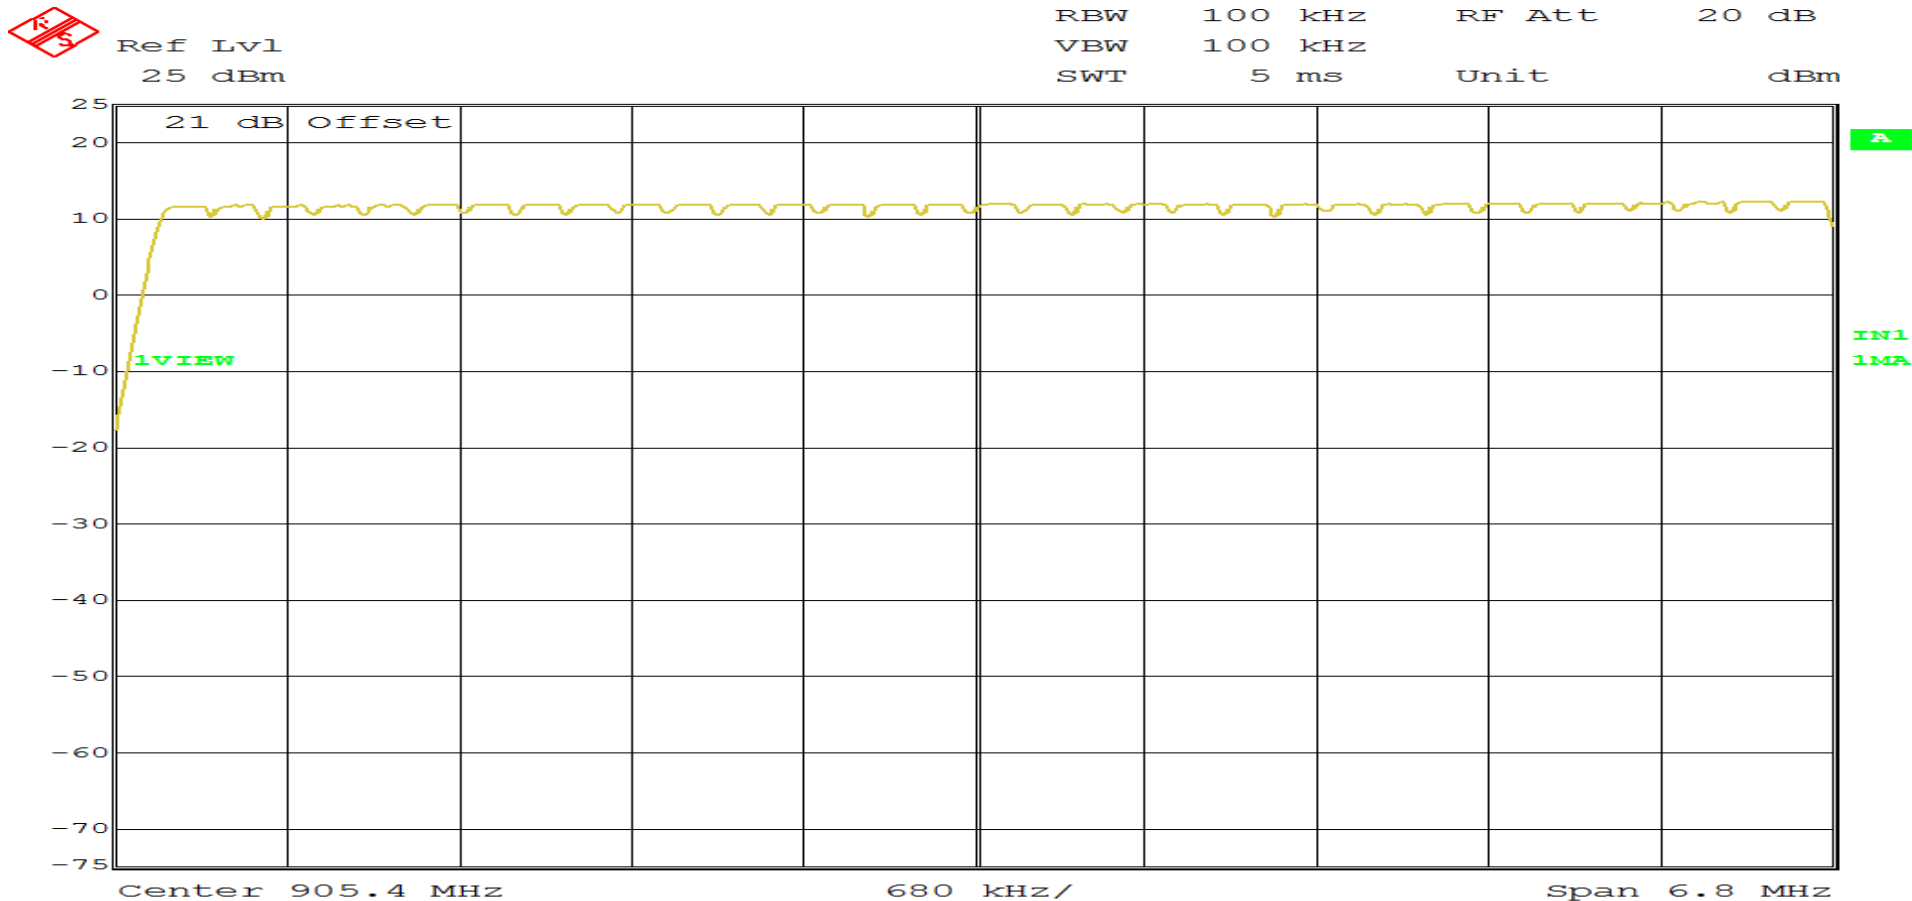

Date: 18.JAN.2016 12:18:26  
Page 1 of 2




# RETLIF TESTING LABORATORIES

|                            |  |                   |                                 |
|----------------------------|--|-------------------|---------------------------------|
| <b>Test Method:</b>        | Number of Hopping Frequencies                      |                   |                                 |
| <b>Customer</b>            | Nke Watteco  | <b>Job No.</b>    | R-6046N-1                       |
| <b>Test Sample</b>         | Pulse Sensor                                       |                   |                                 |
| <b>Model Number</b>        | S0   | <b>Serial No.</b> | 2100547920001                   |
| <b>Operating Mode</b>      | Transmitting hopping frequency data                |                   |                                 |
| <b>Test Specification</b>  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i) |                   |                                 |
| <b>Technician</b>          | M. Seamans   | <b>Date</b>       | January 18 <sup>th</sup> , 2016 |
| <b>Climatic Conditions</b> | Temp: 21.7 °C      Relative Humidity: 22.0 %       |                   |                                 |
| <b>Notes</b>               | Total Number of Hopping Frequencies: 64            |                   |                                 |



Ref Lvl  
25 dBm

RBW    100 kHz    RF Att    20 dB  
VBW    100 kHz  
SWT    5 ms    Unit    dBm

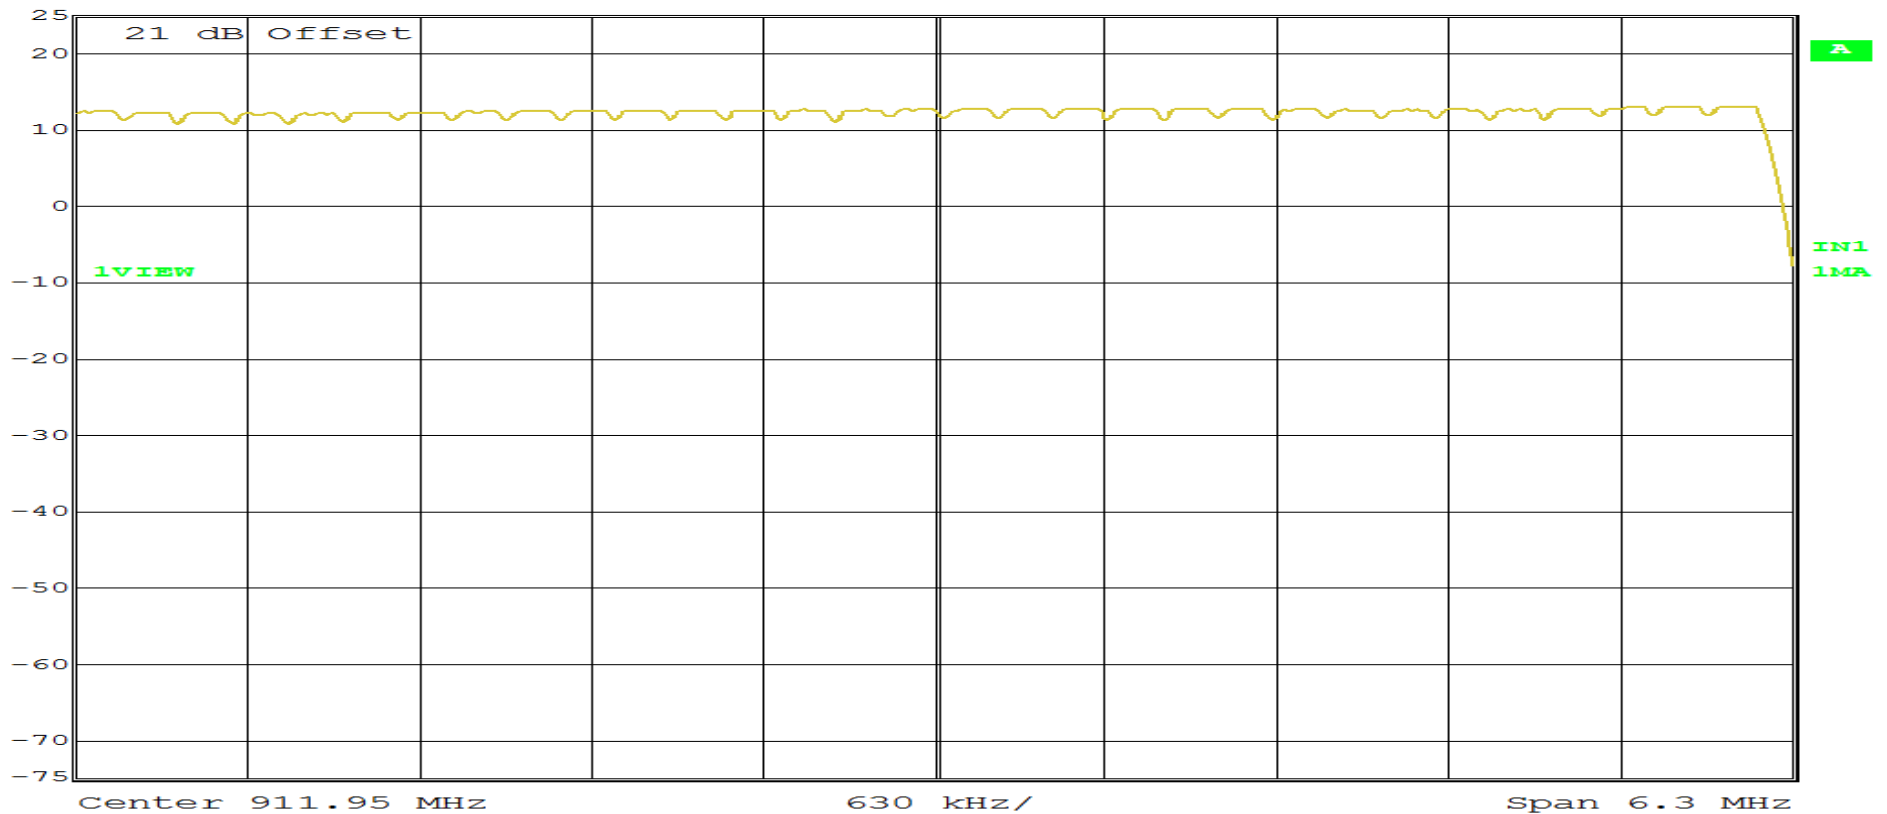

Date: 18.JAN.2016 13:56:33  
Page 2 of 2

**Time of Occupancy  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES


|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Time of Occupancy                                  |            |                                 |
| Customer            | Nke Watteco  | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                       |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting hopping frequency data                |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i) |            |                                 |
| Technician          | M. Seamans   | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.6 °C Relative Humidity: 21.0 %            |            |                                 |
| Notes               | Test Frequency: 908.5 MHz Pulse Width: 82.565 ms   |            |                                 |

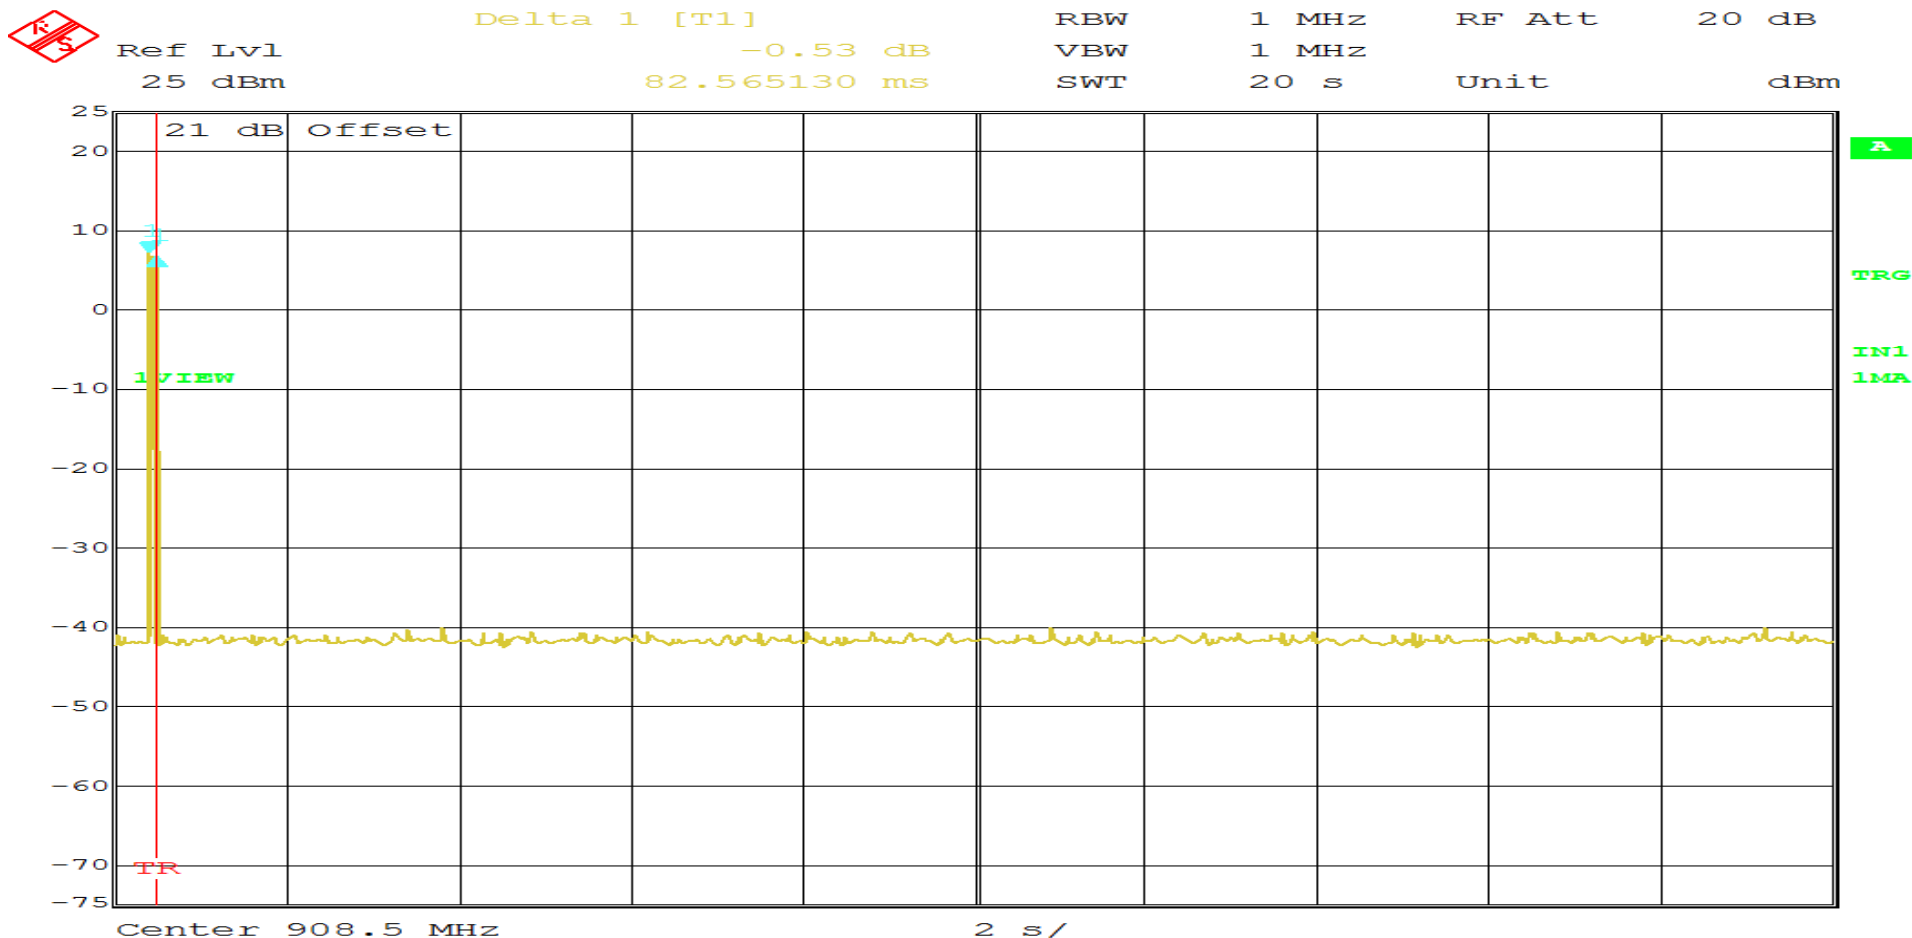

Date: 18.JAN.2016 14:13:53  
Page 1 of 2

# RETLIF TESTING LABORATORIES

|                            |   |                   |                                 |
|----------------------------|---|-------------------|---------------------------------|
| <b>Test Method:</b>        | Time of Occupancy                                   |                   |                                 |
| <b>Customer</b>            | Nke Watteco   | <b>Job No.</b>    | R-6046N-1                       |
| <b>Test Sample</b>         | Pulse Sensor  |                   |                                 |
| <b>Model Number</b>        | S0  | <b>Serial No.</b> | 2100547920001                   |
| <b>Operating Mode</b>      | Transmitting hopping frequency data                 |                   |                                 |
| <b>Test Specification</b>  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)  |                   |                                 |
| <b>Technician</b>          | M. Seamans  | <b>Date</b>       | January 18 <sup>th</sup> , 2016 |
| <b>Climatic Conditions</b> | Temp: 21.6 °C    Relative Humidity: 21.0 %          |                   |                                 |
| <b>Notes</b>               | Test Frequency: 908.5 MHz    Pulse Width: 82.565 ms |                   |                                 |

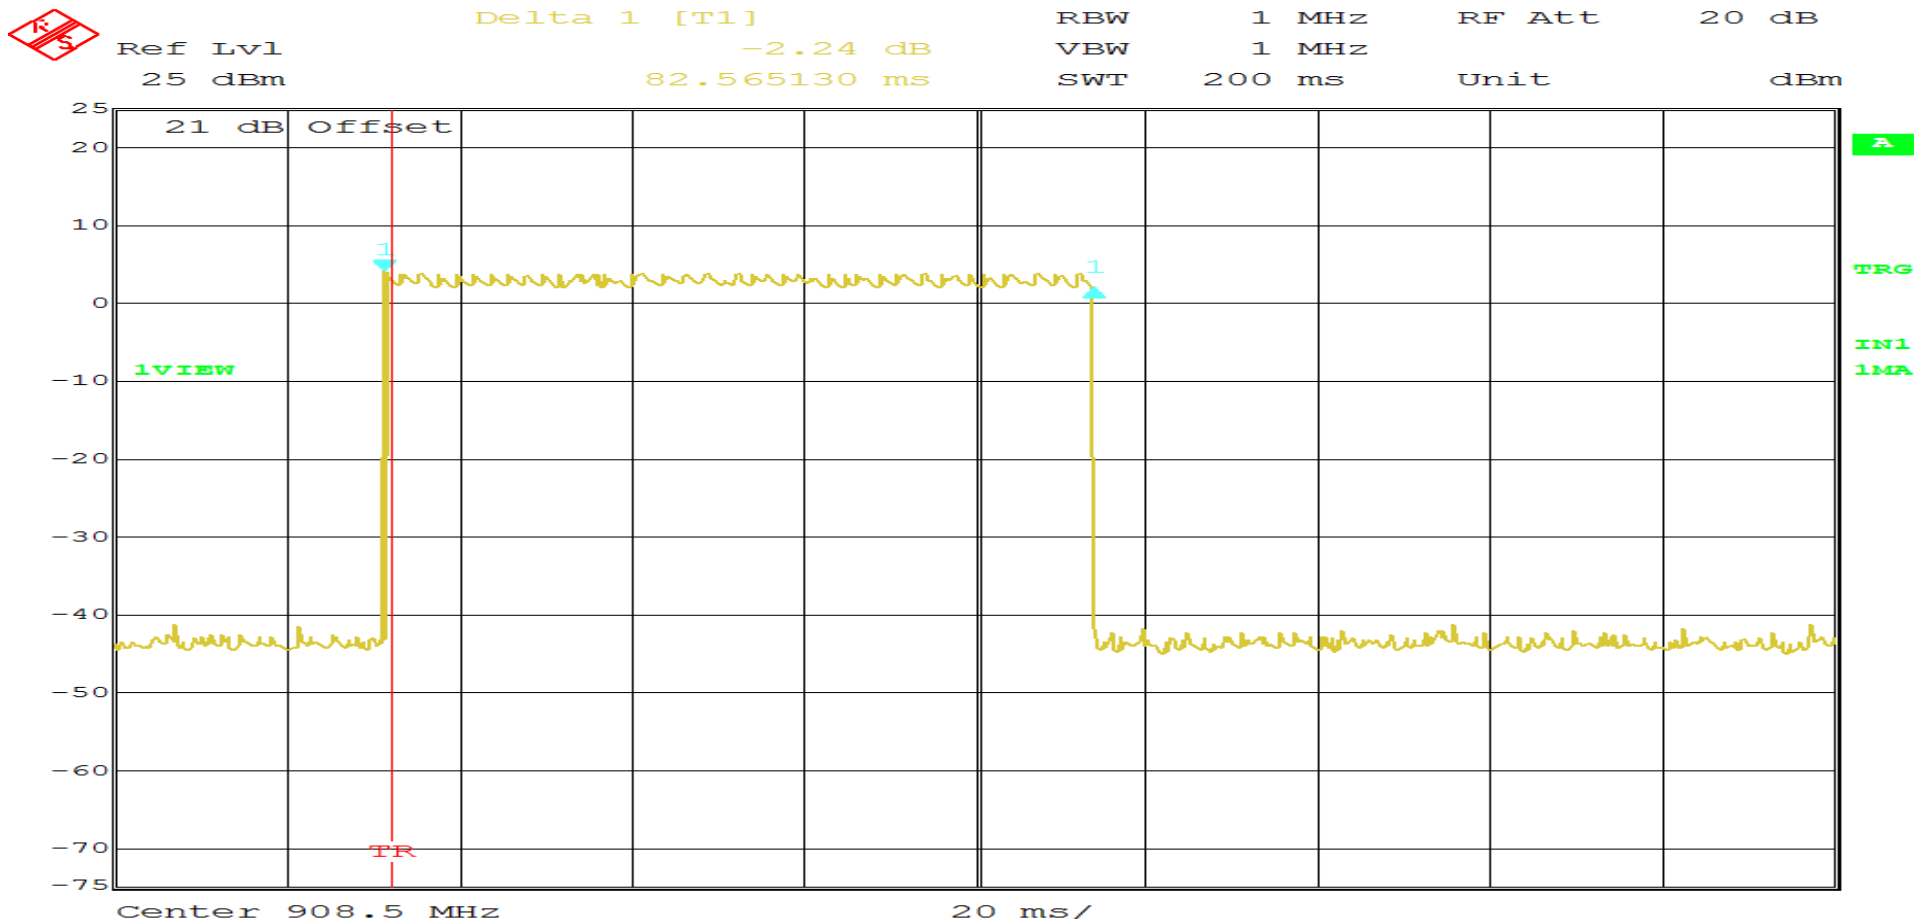

Date: 18.JAN.2016 14:11:28  
Page 2 of 2


**Test Photograph(s)  
Channel Separation  
FCC Section 15.247(a)(1)**



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Test Photograph(s)  
Channel Separation**

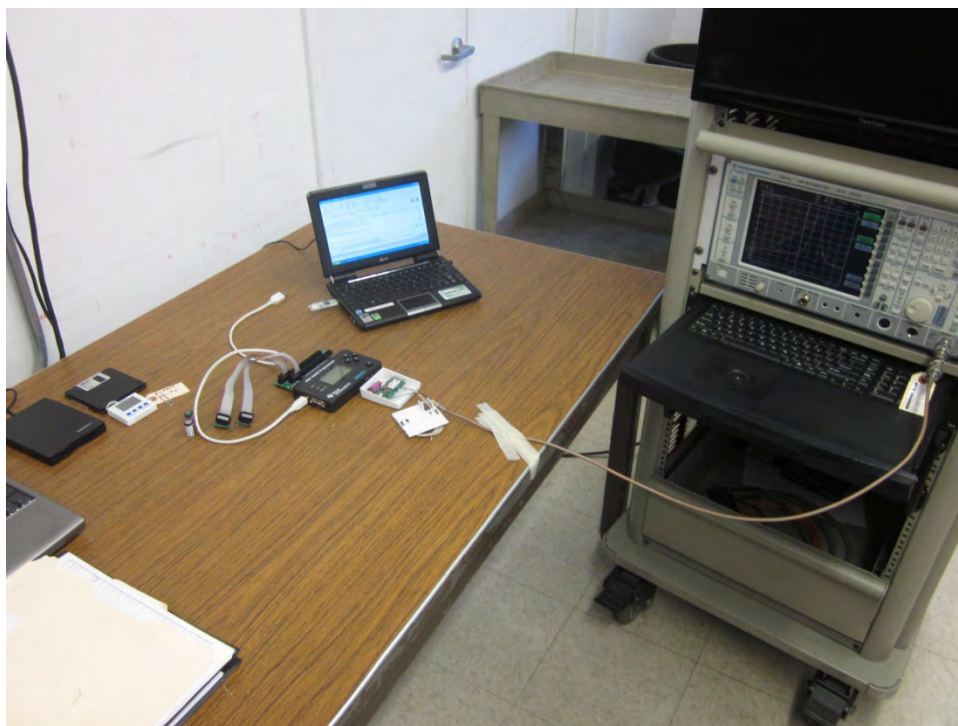

Test Setup



**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

**Channel Separation  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6046N-1, Rev. A

# RETLIF TESTING LABORATORIES

|                     |  |            |                                 |
|---------------------|--|------------|---------------------------------|
| Test Method:        | Channel Carrier Frequency Separation             |            |                                 |
| Customer            | Nke Watteco                                      | Job No.    | R-6046N-1                       |
| Test Sample         | Pulse Sensor                                     |            |                                 |
| Model Number        | S0   | Serial No. | 2100547920001                   |
| Operating Mode      | Transmitting hopping frequency data              |            |                                 |
| Test Specification  | FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)  |            |                                 |
| Technician          | M. Seamans                                       | Date       | January 18 <sup>th</sup> , 2016 |
| Climatic Conditions | Temp: 21.5 °C Relative Humidity: 22.0 %          |            |                                 |
| Notes               | Channel Carrier Frequency Separation: 191.35 kHz |            |                                 |

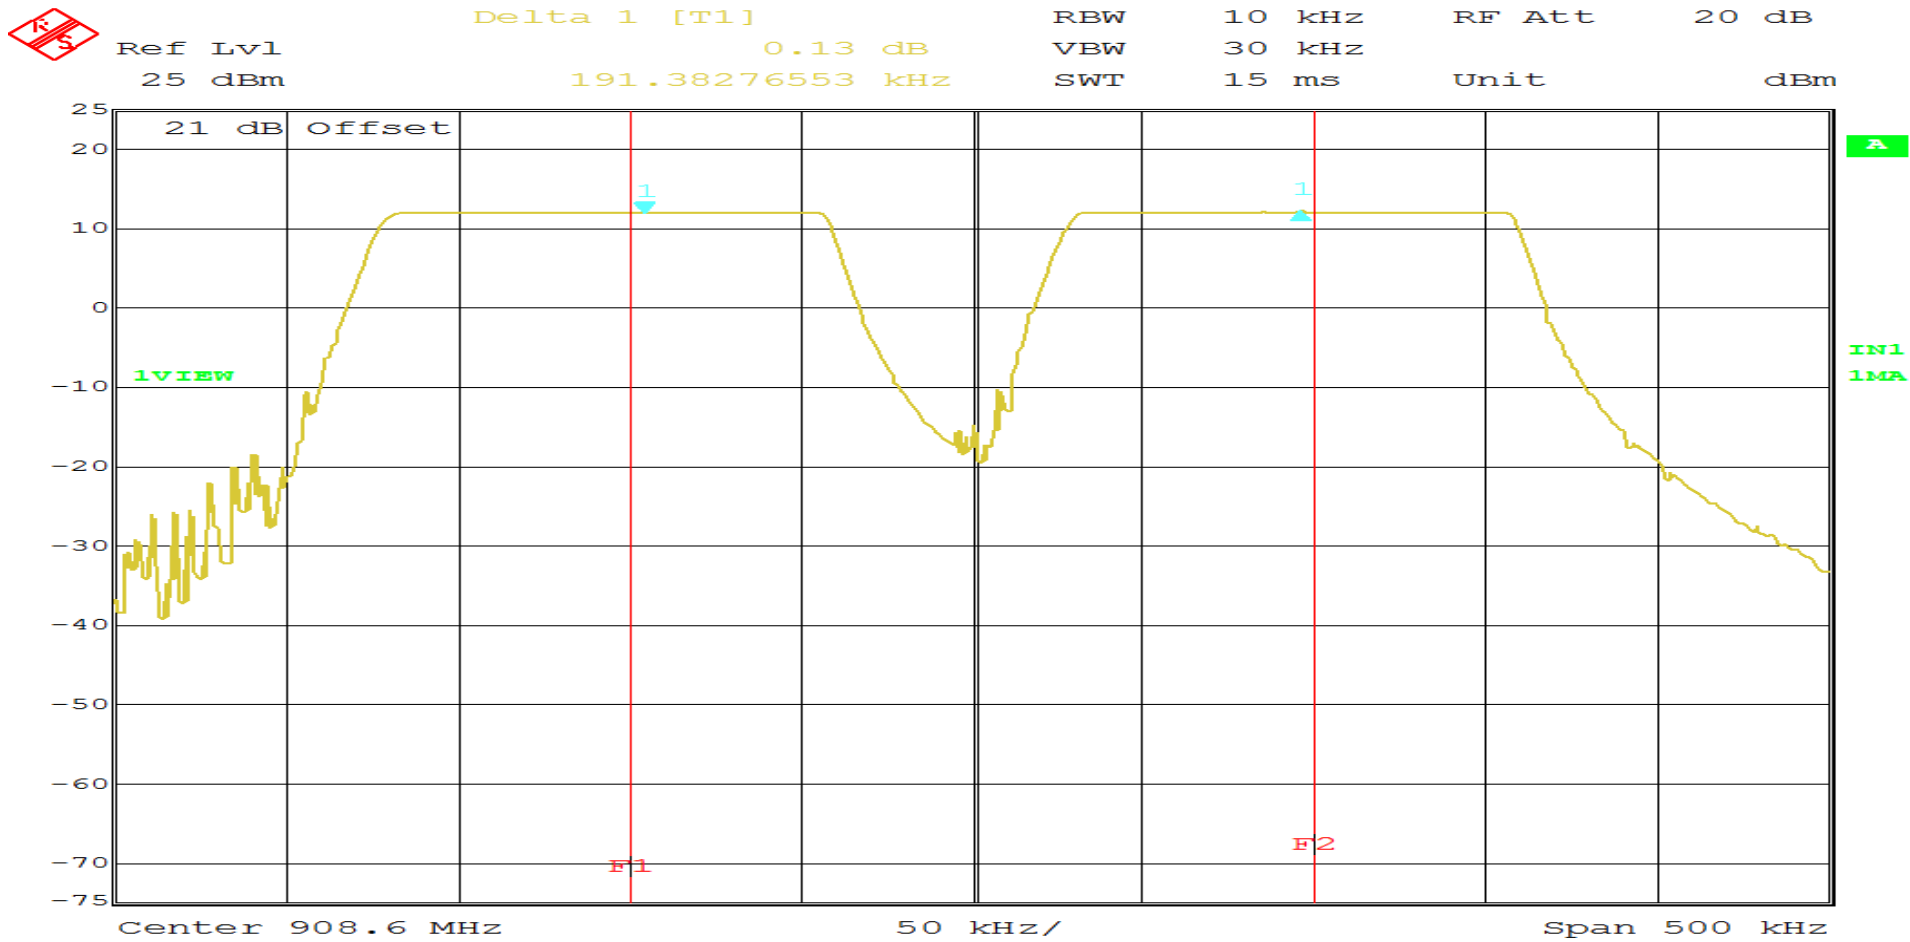

Date: 18.JAN.2016 11:51:51  
 Page 1 of 1