

FCC TEST REPORT

For

Shenzhen AEE Aviation Technology Co.,Ltd

Aerial Photography Equipment

Model No.: MACH I

Prepared For : Shenzhen AEE Aviation Technology Co.,Ltd
Address : AEE Hi-Tech Park,Tangtou Crossroads, Shiyan Town,Baoan District
Shenzhen, China

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180601010-02
Date of Test : Jun. 01~27, 2018
Date of Report : Jun. 27, 2018

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Maximum Peak Output Power Test.....	30
5.1. Test Standard and Limit.....	30
5.2. Test Setup.....	30
5.3. Test Procedure.....	30
5.4. Test Data.....	30
6. Occupy Bandwidth Test.....	32
6.1. Test Standard.....	32
6.2. Test Setup.....	32
6.3. Test Procedure.....	32
6.4. Test Data.....	32
7. Power Spectral Density Test.....	46
7.1. Test Standard and Limit.....	46
7.2. Test Setup.....	46
7.3. Test Procedure.....	46
7.4. Test Data.....	46
8. Antenna Requirement.....	54
8.1. Test Standard and Requirement.....	54
8.2. Antenna Connected Construction.....	55
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	56
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	57
APPENDIX III -- INTERNAL PHOTOGRAPH.....	58

TEST REPORT

Applicant : Shenzhen AEE Aviation Technology Co.,Ltd
Manufacturer : Shenzhen AEE Aviation Technology Co.,Ltd
Product Name : Aerial Photography Equipment
Model No. : MACH I
Trade Mark : AEE
Rating(s) : Input: DC 9V, 2A (via adapter Input: AC 100-240V, 50/60Hz, 0.8A, Output: DC 9V, 2A); DC 7.6V 1900 mAh Battery inside

Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.407
ANSI C63.10: 2013
Test Method(s) : KDB 789033 D02 General UNII Test Procedures New Rules v01r04

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test Jun. 01~27, 2018

Prepared by

(Engineer / Tangcy.Tang)

Reviewer

(Supervisor / Calvin Liu)

Approved & Authorized Signer

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen AEE Aviation Technology Co.,Ltd
Address	:	AEE Hi-Tech Park,Tangtou Crossroads, Shiyan Town,Baoan District Shenzhen, China
Manufacturer	:	Shenzhen AEE Aviation Technology Co.,Ltd
Address	:	AEE Hi-Tech Park,Tangtou Crossroads, Shiyan Town,Baoan District Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	Aerial Photography Equipment	
Model No.	:	MACH I	
Trade Mark	:	AEE	
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter/ DC 7.6V battery inside	
Product Description	:	Operation Frequency:	WIFI 5G: 5745MHz~5825MHz
		Number of Channel:	WIFI 5G: 5 Channels for 802.11a 5 Channels for 802.11n(HT20)
		Modulation Type:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n;
		Antenna Type:	PCB Antenna
		Antenna Gain(Peak):	2.3 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual. 2) This report is for WIFI 5.8G.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacture: Shenzhen Green Power Electronic Technology Co., Ltd Model: GS01500500300 Input: AC 100-240V, 50/60Hz, 0.8A Output(Type C Quick Charge 3.0): 3.6-5V=== 3A, 6-9V=== 2A; 9-12V=== 1.5A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20)	CH 149	5745MHz
	CH 157	5785MHz
	CH 165	5825MHz

Note:


1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50 Ω , Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels

802.11a/n20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		

1.6. Description Of Test Setup

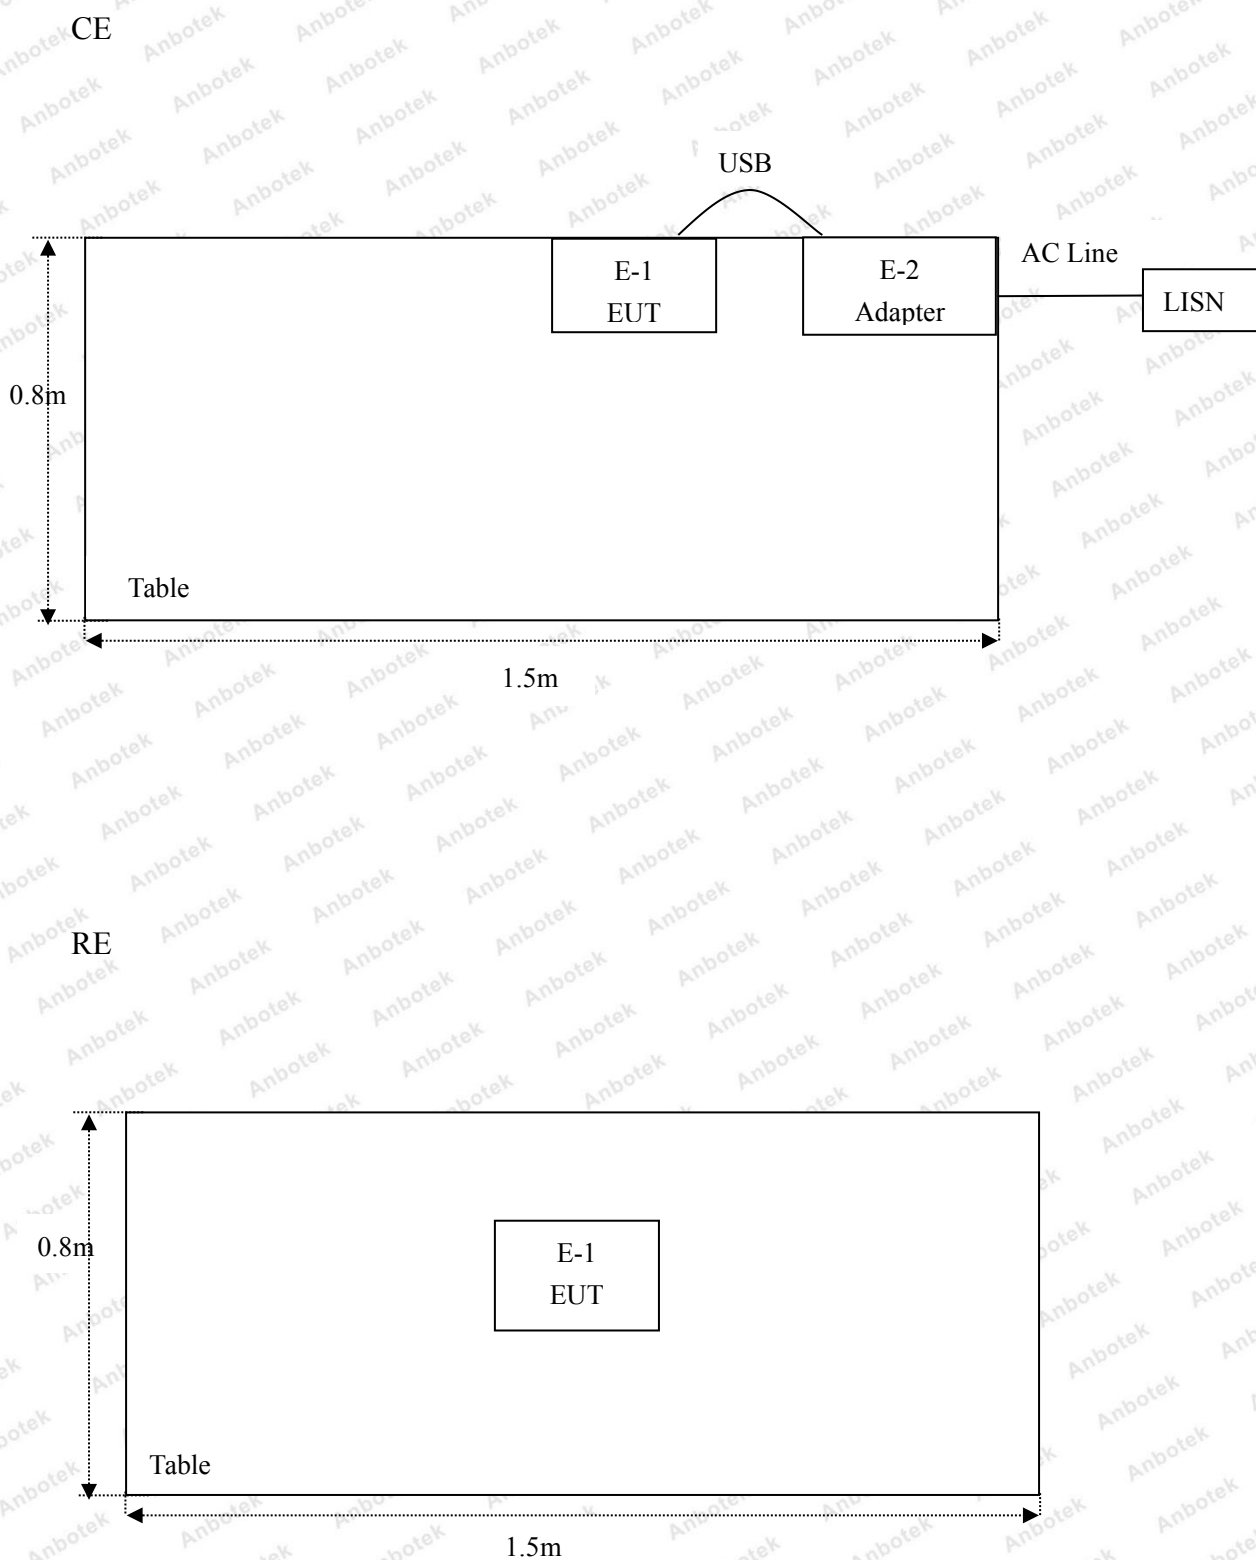

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80B	ZJ-17042804	Nov. 01, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at Shenzhen Anbotech Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results


Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(a)(1)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203/15.407g	Antenna Requirement	PASS

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

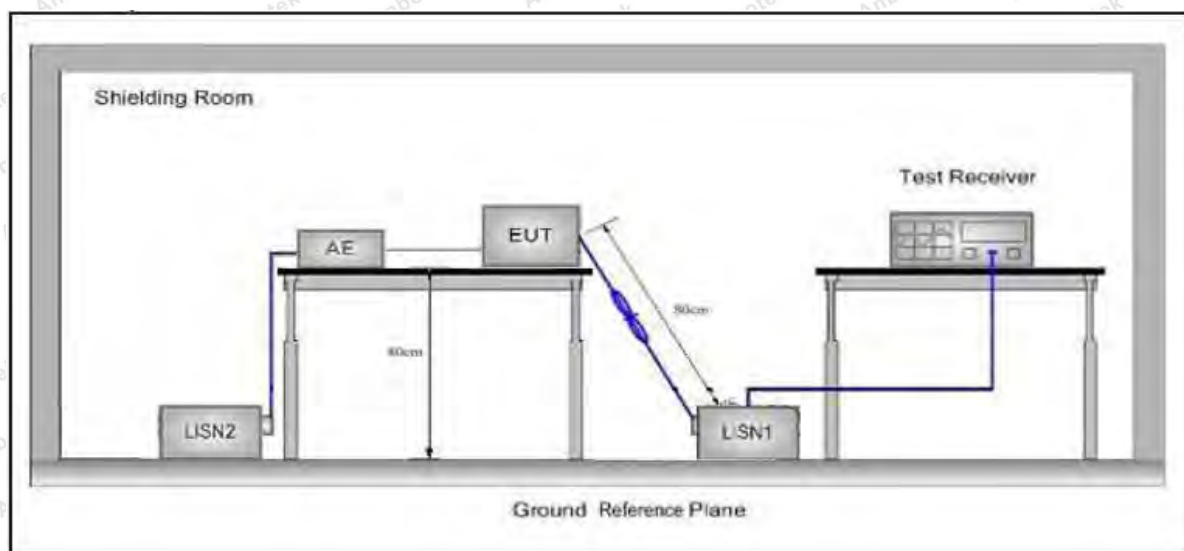

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 24.7°C Hum.: 51%

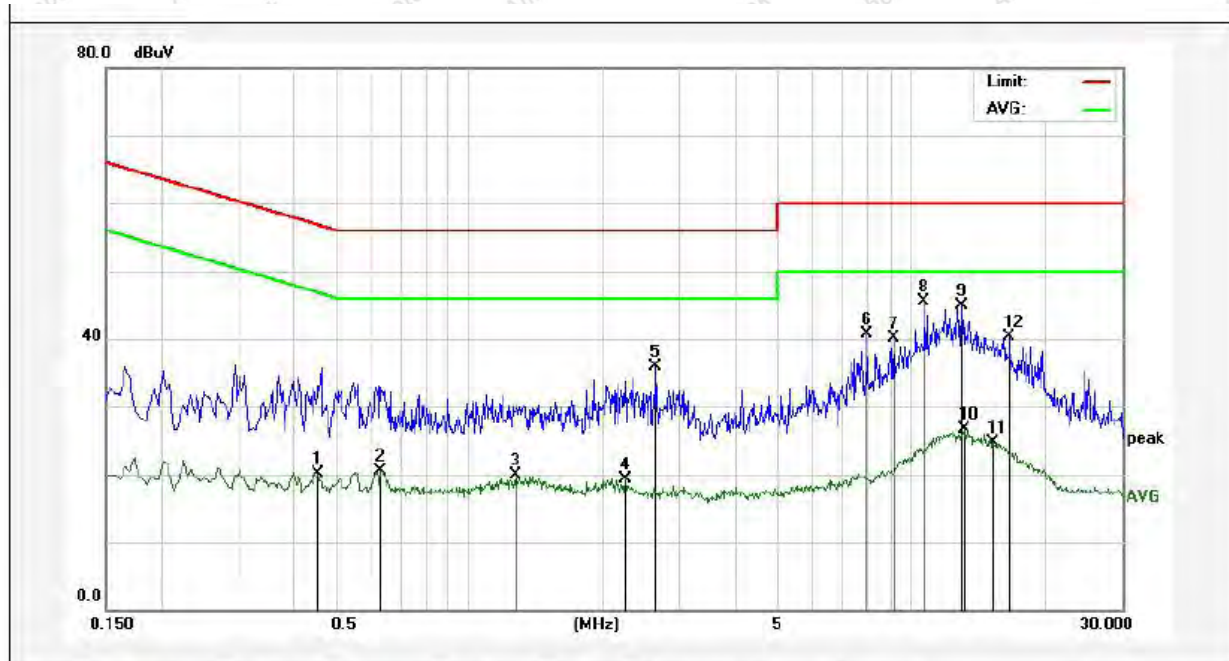

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4540	0.21	19.96	20.17	46.80	-26.63	AVG	
2	0.6300	0.46	20.02	20.48	46.00	-25.52	AVG	
3	1.2740	-0.27	20.13	19.86	46.00	-26.14	AVG	
4	2.2580	-0.87	20.15	19.28	46.00	-26.72	AVG	
5	2.6380	15.72	20.15	35.87	56.00	-20.13	QP	
6	7.9700	20.41	20.29	40.70	60.00	-19.30	QP	
7	9.1420	19.75	20.32	40.07	60.00	-19.93	QP	
8	10.6860	25.24	20.33	45.57	60.00	-14.43	QP	
9	13.0540	24.54	20.29	44.83	60.00	-15.17	QP	
10	13.1460	6.45	20.29	26.74	50.00	-23.26	AVG	
11	15.2580	4.35	20.26	24.61	50.00	-25.39	AVG	
12	16.7099	19.94	20.29	40.23	60.00	-19.77	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 24.7°C Hum.: 51%

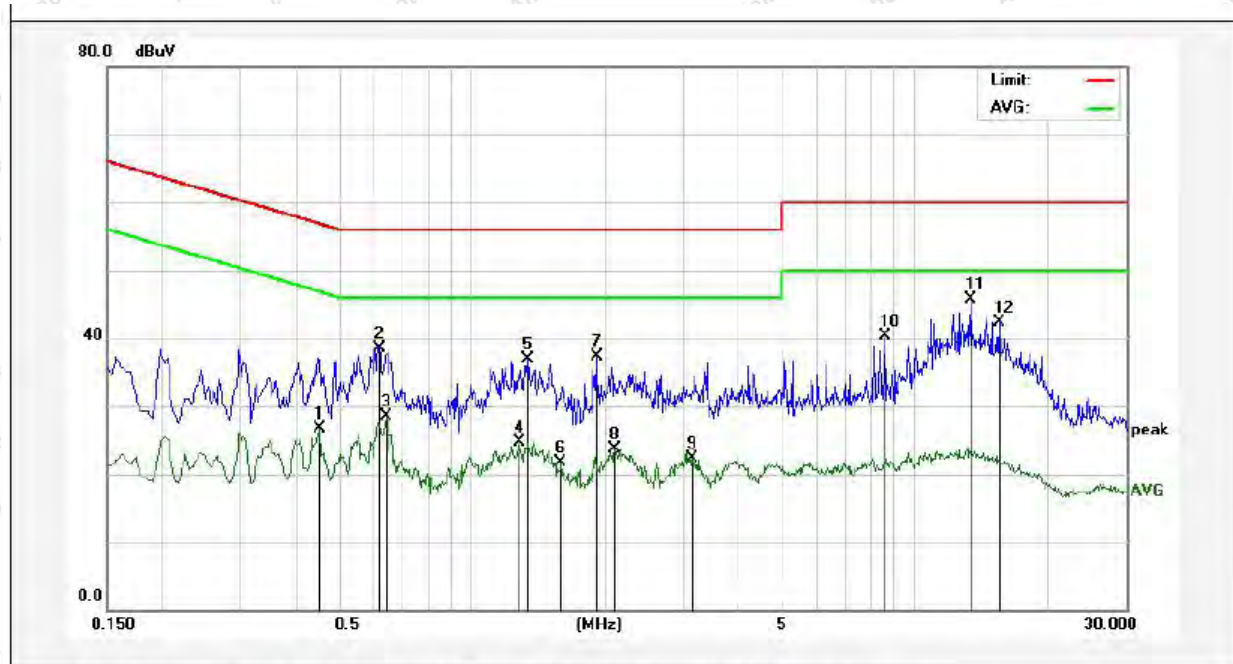

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4540	6.83	19.96	26.79	46.80	-20.01	AVG	
2	0.6180	18.53	20.02	38.55	56.00	-17.45	QP	
3	0.6419	8.39	20.02	28.41	46.00	-17.59	AVG	
4	1.2780	4.60	20.13	24.73	46.00	-21.27	AVG	
5	1.3380	16.74	20.13	36.87	56.00	-19.13	QP	
6	1.5859	1.51	20.13	21.64	46.00	-24.36	AVG	
7	1.9180	17.20	20.14	37.34	56.00	-18.66	QP	
8	2.1060	3.53	20.14	23.67	46.00	-22.33	AVG	
9	3.1420	2.22	20.16	22.38	46.00	-23.62	AVG	
10	8.5820	20.03	20.30	40.33	60.00	-19.67	QP	
11	13.3500	25.41	20.29	45.70	60.00	-14.30	QP	
12	15.5380	22.10	20.27	42.37	60.00	-17.63	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 24.7°C Hum.: 51%

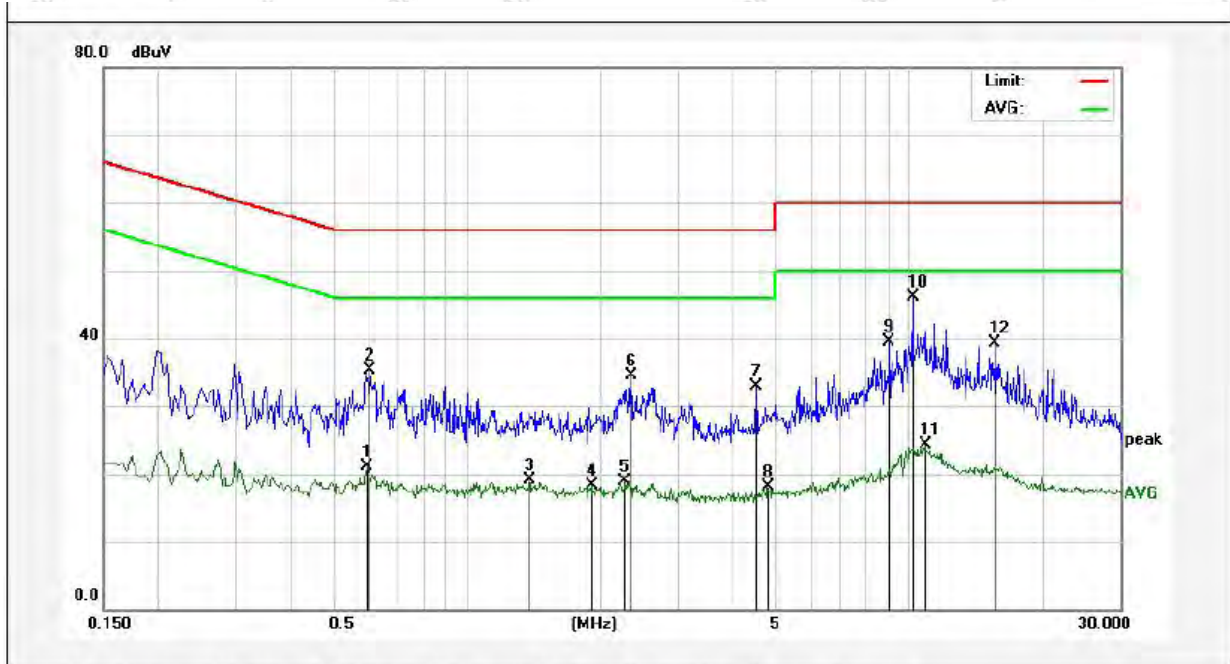

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.5940	1.03	20.01	21.04	46.00	-24.96	AVG	
2	0.6020	15.39	20.01	35.40	56.00	-20.60	QP	
3	1.3860	-1.07	20.13	19.06	46.00	-26.94	AVG	
4	1.9100	-1.93	20.14	18.21	46.00	-27.79	AVG	
5	2.2740	-1.24	20.15	18.91	46.00	-27.09	AVG	
6	2.3580	14.29	20.15	34.44	56.00	-21.56	QP	
7	4.5220	12.80	20.19	32.99	56.00	-23.01	QP	
8	4.7860	-2.05	20.20	18.15	46.00	-27.85	AVG	
9	9.0140	19.29	20.31	39.60	60.00	-20.40	QP	
10	10.2299	25.82	20.34	46.16	60.00	-13.84	QP	
11	10.8580	3.98	20.33	24.31	50.00	-25.69	AVG	
12	15.6380	19.13	20.27	39.40	60.00	-20.60	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 24.7°C Hum.: 51%

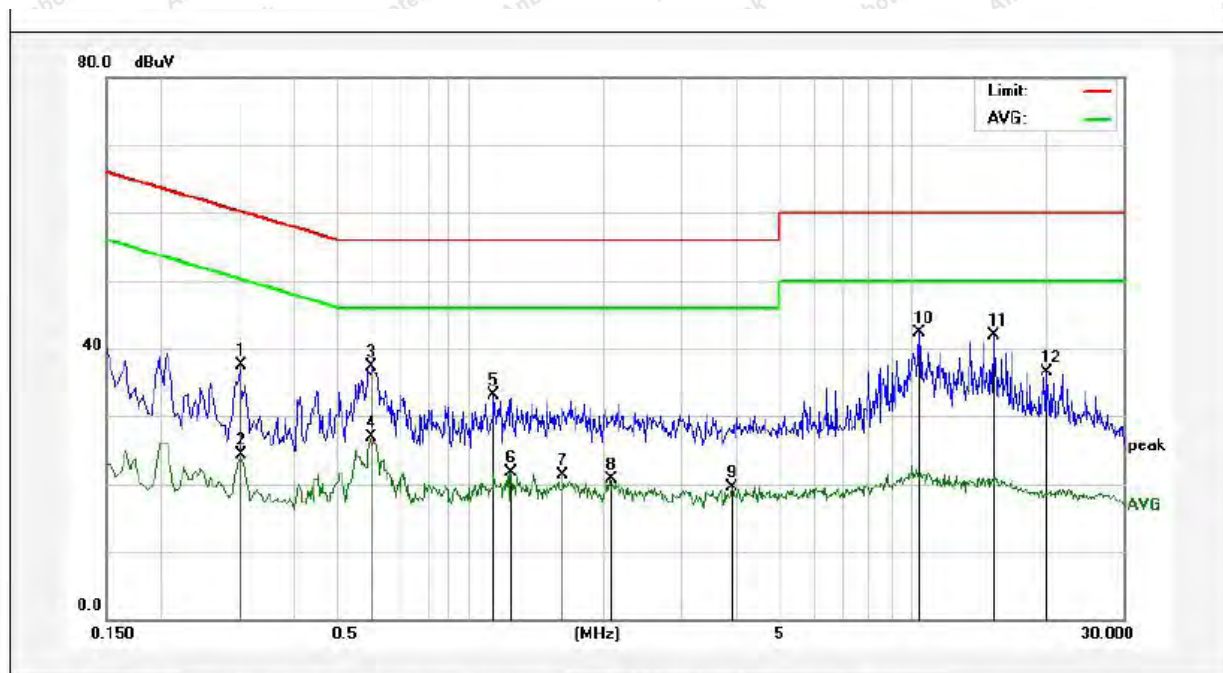

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3020	17.57	19.89	37.46	60.19	-22.73	QP	
2	0.3020	4.40	19.89	24.29	50.19	-25.90	AVG	
3	0.5980	17.20	20.01	37.21	56.00	-18.79	QP	
4	0.5980	6.93	20.01	26.94	46.00	-19.06	AVG	
5	1.1340	12.92	20.12	33.04	56.00	-22.96	QP	
6	1.2340	1.58	20.12	21.70	46.00	-24.30	AVG	
7	1.6220	1.16	20.13	21.29	46.00	-24.71	AVG	
8	2.0700	0.60	20.14	20.74	46.00	-25.26	AVG	
9	3.9140	-0.69	20.18	19.49	46.00	-26.51	AVG	
10	10.3900	21.93	20.33	42.26	60.00	-17.74	QP	
11	15.2740	21.66	20.26	41.92	60.00	-18.08	QP	
12	20.1380	16.22	20.34	36.56	60.00	-23.44	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407, KDB 789033 D02 General UNII Test Procedures New Rules v01r04
---------------	---

Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
Test Limit	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3) Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$, for $EIPR[dBm] = -27dBm$.

For transmitters operating in the 5.725-5.85GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

KDB789033 D02 v01r04 (G)(2)(c)

(i) Sections 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27dBm/MHz.³

(ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

4.2. Test Setup

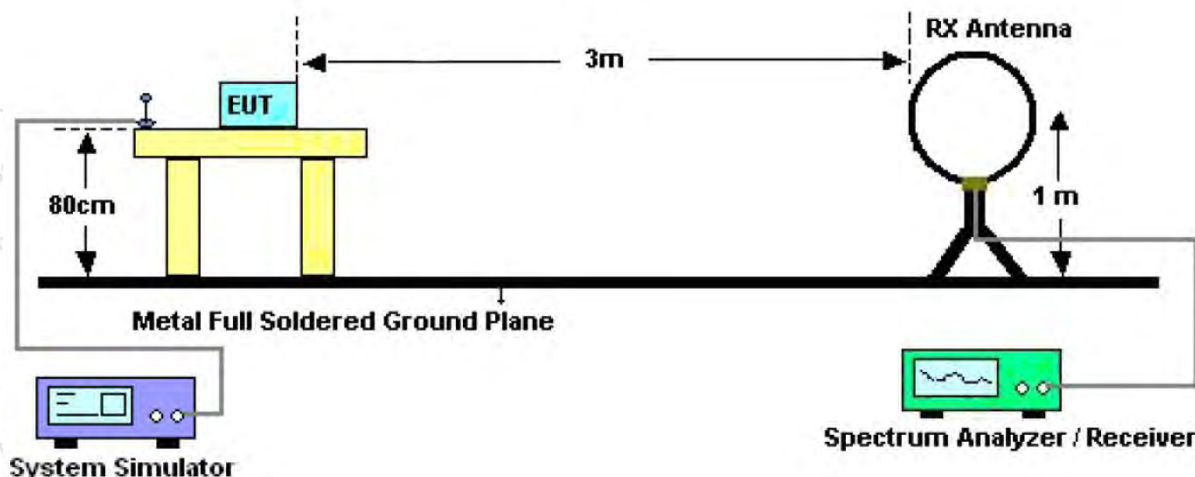


Figure 1. Below 30MHz

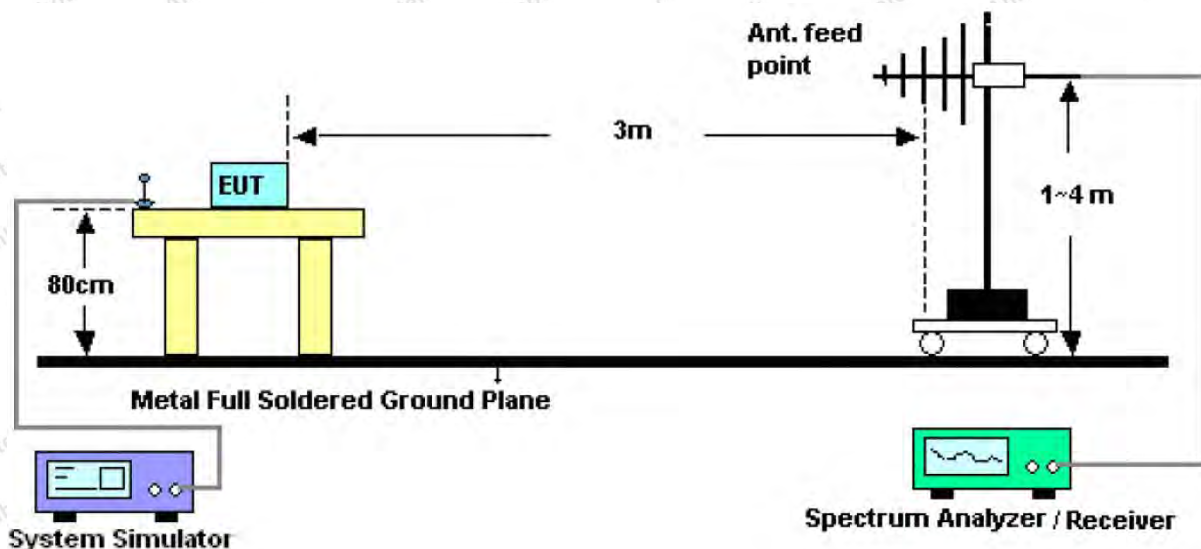


Figure 2. 30MHz to 1GHz

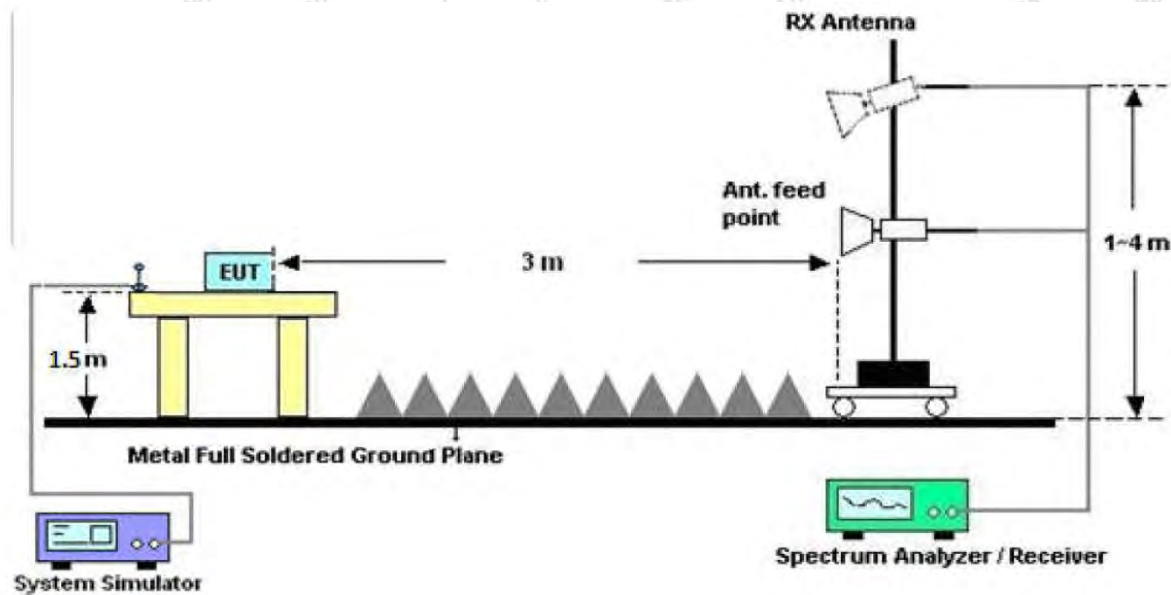


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Note : These results test under Mimo mode.

Test Results (30~1000MHz)

Job No.: SZAWW180601010-02 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 7.4V battery inside
Test Mode: TX Mode Polarization: Horizontal



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	41.78	-18.55	23.23	40.00	-16.77	QP	300	0	
2	37.8121	36.64	-15.56	21.08	40.00	-18.92	QP	300	30	
3	125.8864	53.60	-21.55	32.05	43.50	-11.45	QP	300	54	
4	400.4319	39.95	-12.86	27.09	46.00	-18.91	QP	300	213	
5	601.4265	44.50	-11.20	33.30	46.00	-12.70	QP	300	227	
6	744.8661	39.26	-7.60	31.66	46.00	-14.34	QP	300	360	

Test Results (30~1000MHz)

Job No.: SZAWW180601010-02


Temp.(°C)/Hum.(%RH): 24.3°C/55%RH

Standard: FCC PART 15C

Power Source: DC 7.4V battery inside

Test Mode: TX Mode

Polarization: Vertical

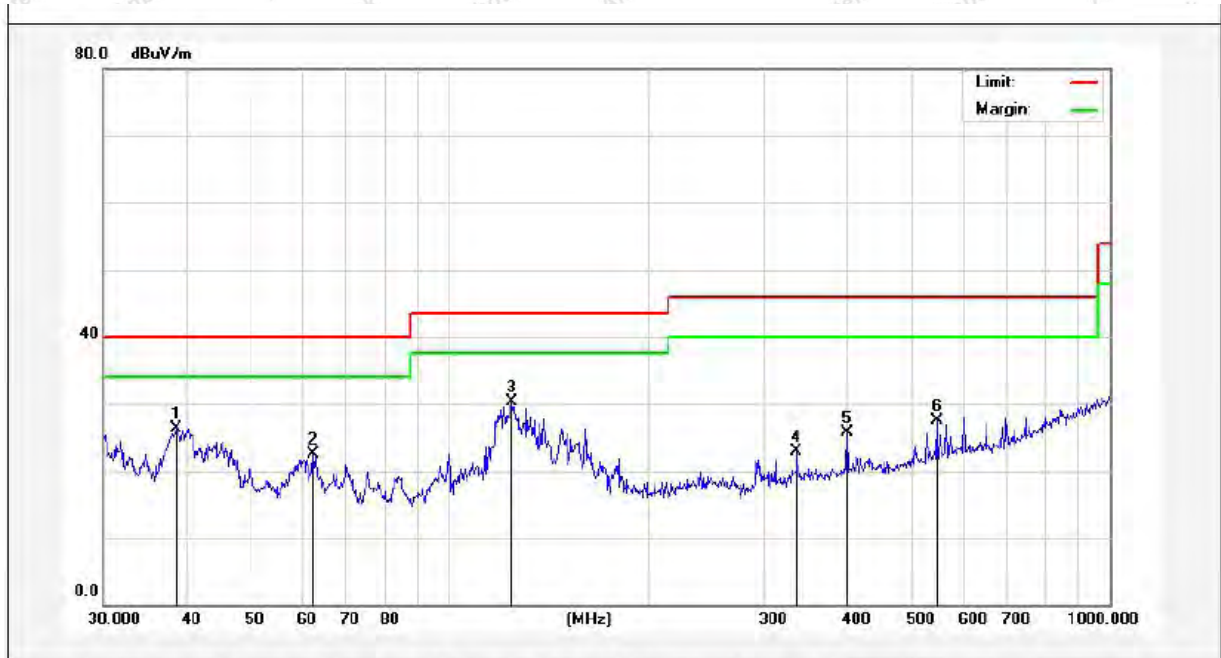

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.6160	40.52	-14.12	26.40	40.00	-13.60	QP	300	0	
2	62.2128	39.29	-16.83	22.46	40.00	-17.54	QP	300	45	
3	124.5690	46.40	-16.01	30.39	43.50	-13.11	QP	300	114	
4	336.0352	36.48	-13.49	22.99	46.00	-23.01	QP	300	224	
5	400.4319	37.57	-11.86	25.71	46.00	-20.29	QP	300	334	
6	547.0977	37.56	-10.14	27.42	46.00	-18.58	QP	300	360	

Test Results (Above 1000MHz)

Test mode:	IEEE 802.11a	Test channel:	Low CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.53	32.66	18.21	34.01	58.39	74.00	-15.61	V
17235.00	35.11	33.42	20.20	35.00	53.73	68.20	-14.47	V
11490.00	36.65	32.66	18.21	34.01	53.51	74.00	-20.49	H
17235.00	36.81	33.42	20.20	35.00	55.43	68.20	-12.77	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	30.44	32.66	18.21	34.01	47.30	54.00	-6.70	V
17235.00	27.63	33.42	20.20	35.00	46.25	54.00	-7.75	V
11490.00	27.01	32.66	18.21	34.01	43.87	54.00	-10.13	H
17235.00	25.98	33.42	20.20	35.00	44.60	54.00	-9.40	H

Test mode:	IEEE 802.11a	Test channel:	Mid CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	41.36	32.67	18.24	34.02	58.25	74.00	-15.75	V
17355.00	35.44	33.44	20.22	35.01	54.09	68.20	-14.11	V
11570.00	36.78	32.67	18.24	34.02	53.67	74.00	-20.33	H
17355.00	34.95	33.44	20.22	35.01	53.60	68.20	-14.60	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.35	32.67	18.24	34.02	46.24	54.00	-7.76	V
17355.00	27.44	33.44	20.22	35.01	46.09	54.00	-7.91	V
11570.00	29.41	32.67	18.24	34.02	46.30	54.00	-7.70	H
17355.00	28.06	33.44	20.22	35.01	46.71	54.00	-7.29	H

Test mode:	IEEE 802.11a	Test channel:	High CH
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.57	32.69	18.26	34.04	56.48	74.00	-17.52	V
17475.00	38.77	33.46	20.23	35.02	57.44	68.20	-10.76	V
11650.00	40.41	32.69	18.26	34.04	57.32	74.00	-16.68	H
17475.00	38.72	33.46	20.23	35.02	57.39	68.20	-10.81	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	29.36	32.69	18.26	34.04	46.27	54.00	-7.73	V
17475.00	28.66	33.46	20.23	35.02	47.33	54.00	-6.67	V
11650.00	27.55	32.69	18.26	34.04	44.46	54.00	-9.54	H
17475.00	27.36	33.46	20.23	35.02	46.03	54.00	-7.97	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	38.63	32.66	18.21	34.01	55.49	74.00	-18.51	V
17235.00	36.55	33.42	20.20	35.00	55.17	68.20	-13.03	V
11490.00	36.85	32.66	18.21	34.01	53.71	74.00	-20.29	H
17235.00	37.17	33.42	20.20	35.00	55.79	68.20	-12.41	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.63	32.66	18.21	34.01	46.49	54.00	-7.51	V
17235.00	27.51	33.42	20.20	35.00	46.13	54.00	-7.87	V
11490.00	29.04	32.66	18.21	34.01	45.90	54.00	-8.10	H
17235.00	27.16	33.42	20.20	35.00	45.78	54.00	-8.22	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	42.77	32.67	18.24	34.02	59.66	74.00	-14.34	V
17355.00	38.46	33.44	20.22	35.01	57.11	68.20	-11.09	V
11570.00	39.41	32.67	18.24	34.02	56.30	74.00	-17.70	H
17355.00	36.55	33.44	20.22	35.01	55.20	68.20	-13.00	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	30.77	32.67	18.24	34.02	47.66	54.00	-6.34	V
17355.00	27.32	33.44	20.22	35.01	45.97	54.00	-8.03	V
11570.00	28.65	32.67	18.24	34.02	45.54	54.00	-8.46	H
17355.00	26.74	33.44	20.22	35.01	45.39	54.00	-8.61	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.07	32.69	18.26	34.04	57.98	74.00	-16.02	V
17475.00	39.45	33.46	20.23	35.02	58.12	68.20	-10.08	V
11650.00	37.01	32.69	18.26	34.04	53.92	74.00	-20.08	H
17475.00	38.15	33.46	20.23	35.02	56.82	68.20	-11.38	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	32.33	32.69	18.26	34.04	49.24	54.00	-4.76	V
17475.00	31.95	33.46	20.23	35.02	50.62	54.00	-3.38	V
11650.00	28.06	32.69	18.26	34.04	44.97	54.00	-9.03	H
17475.00	28.44	33.46	20.23	35.02	47.11	54.00	-6.89	H

Note:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	42.36	29.78	15.69	31.08	56.75	68.20	-11.45	H
5850.00	40.29	30.01	16.82	32.09	55.03	68.20	-13.17	H
5725.00	43.65	29.78	15.69	31.08	58.04	68.20	-10.16	V
5850.00	41.96	30.01	16.82	32.09	56.70	68.20	-11.50	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	32.47	29.78	15.69	31.08	46.86	54.00	-7.14	H
5850.00	32.09	30.01	16.82	32.09	46.83	54.00	-7.17	H
5725.00	33.59	29.78	15.69	31.08	47.98	54.00	-6.02	V
5850.00	33.67	30.01	16.82	32.09	48.41	54.00	-5.59	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	41.69	29.78	15.69	31.08	56.08	68.20	-12.12	H
5850.00	40.33	30.01	16.82	32.09	55.07	68.20	-13.13	H
5725.00	43.26	29.78	15.69	31.08	57.65	68.20	-10.55	V
5850.00	41.07	30.01	16.82	32.09	55.81	68.20	-12.39	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	32.17	29.78	15.69	31.08	46.56	54.00	-7.44	H
5850.00	33.65	30.01	16.82	32.09	48.39	54.00	-5.61	H
5725.00	33.74	29.78	15.69	31.08	48.13	54.00	-5.87	V
5850.00	32.09	30.01	16.82	32.09	46.83	54.00	-7.17	V

For conducted test:

Ant 1



802.11a: Band Edge, Left Side



802.11a: Band Edge, Right Side



802.11n(20): Band Edge, Left Side



802.11n(20): Band Edge, Right Side

Ant 2

For conducted test:



802.11a: Band Edge, Left Side



802.11a: Band Edge, Right Side



802.11n(20): Band Edge, Left Side




802.11n(20): Band Edge, Right Side

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a)(1) (3)
Test Limit	30dBm (1W)

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item : Max. peak output power
Test Voltage : DC 7.4V battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24℃
Humidity : 55%RH

ANT

Mode	Channel Frequency (MHz)	Peak Power output (dBm)			Correctional Limit (dBm)	Results
		ANT1	ANT2	SUM		
802.11a	5745	16.22	16.93	19.49	30	PASS
	5785	16.00	16.43	19.48	30	PASS
	5825	16.97	16.84	19.61	30	PASS
802.11n20	5745	16.44	16.75	19.92	30	PASS
	5785	16.48	16.46	19.23	30	PASS
	5825	16.56	16.39	19.60	30	PASS

Note:


1) For power test the duty cycle is 100% in continuous transmitting mode. Please see the plot of next page.

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.403(i), 15.407 (e)
---------------	--

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;
 Set the VBW > RBW;
 Detector = Peak
 Trace mode = Max hold.
 Sweep - auto couple.

6 dB bandwidth

RBW = 100kHz;
 Set the video bandwidth (VBW) ≥ 3 RBW;
 Detector = Peak
 Trace mode = Max hold.
 Sweep - auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.

5. Repeat until all the rest channels are investigated.

6.4. Test Data

Test Item	:	6dB & 26dB BW	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 7.4V battery inside	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

ANT1

Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	15.37	>0.5MHz	PASS
	5785	15.18		PASS
	5825	15.18		PASS
802.11n20	5745	15.09		PASS
	5785	15.14		PASS
	5825	17.01		PASS


Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	23.67	16.985
	5785	21.07	17.025
	5825	23.59	16.997
802.11n20	5745	23.95	18.193
	5785	21.80	18.128
	5825	21.90	18.122

ANT2


Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	15.14	>0.5MHz	PASS
	5785	14.31		PASS
	5825	15.44		PASS
802.11n20	5745	15.11		PASS
	5785	15.08		PASS
	5825	14.44		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	23.71	16.985
	5785	23.12	17.025
	5825	23.87	16.997
802.11n20	5745	23.78	18.193
	5785	23.38	18.128
	5825	23.86	18.122

ANT1 6dB Bandwidth

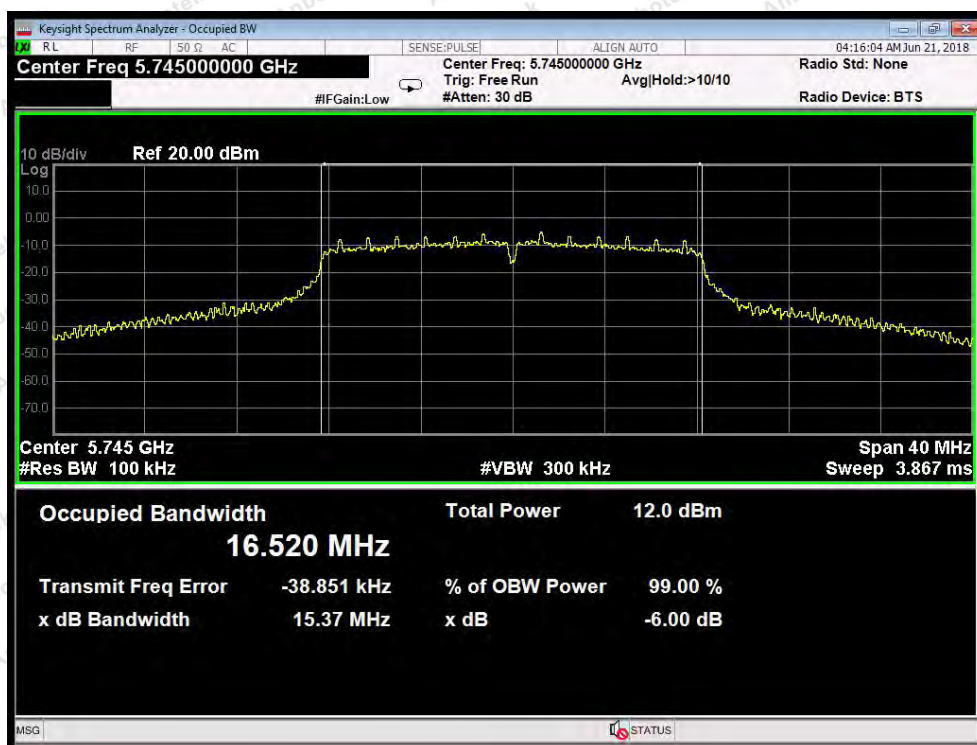


Test Mode: 802.11a--Low

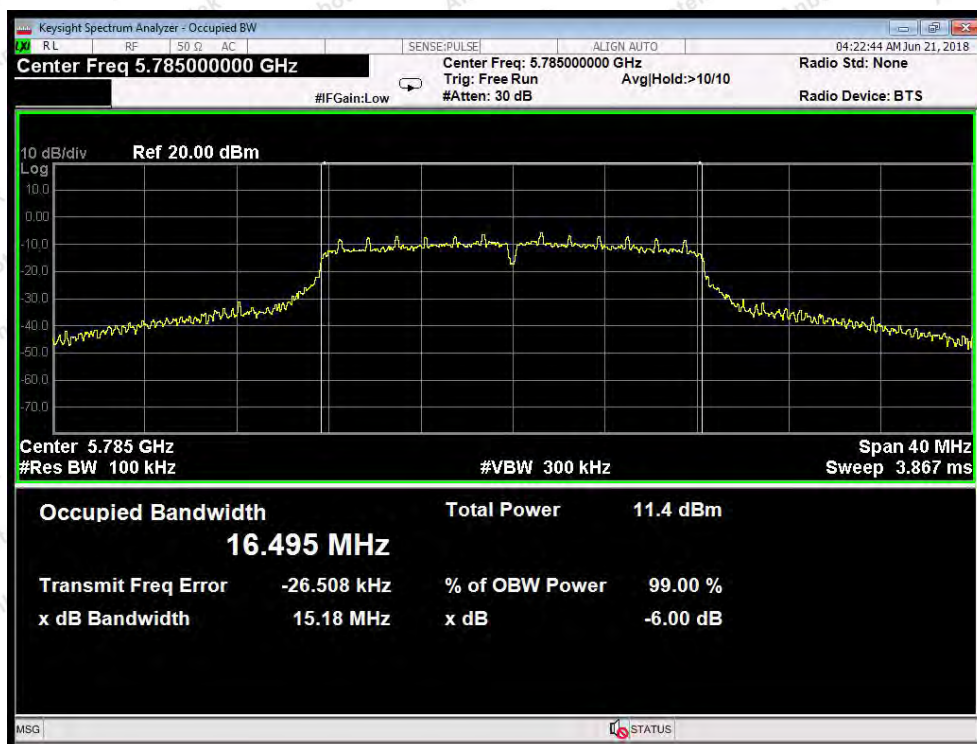


Test Mode: 802.11a---Middle




Test Mode: 802.11a---High

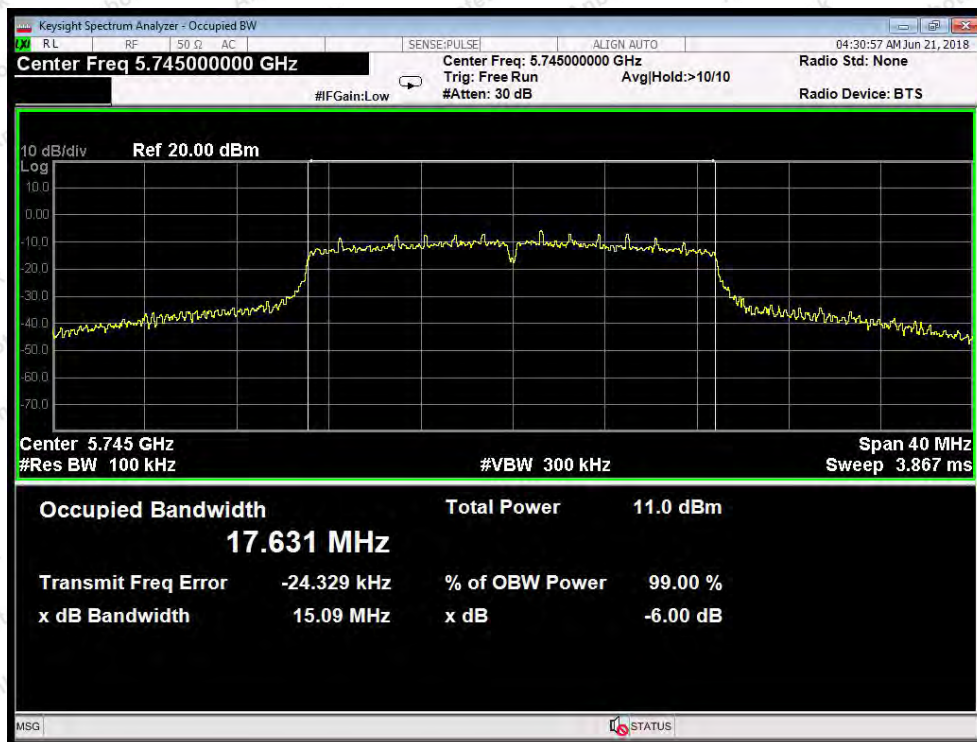

Test Mode: 802.11n20---Low

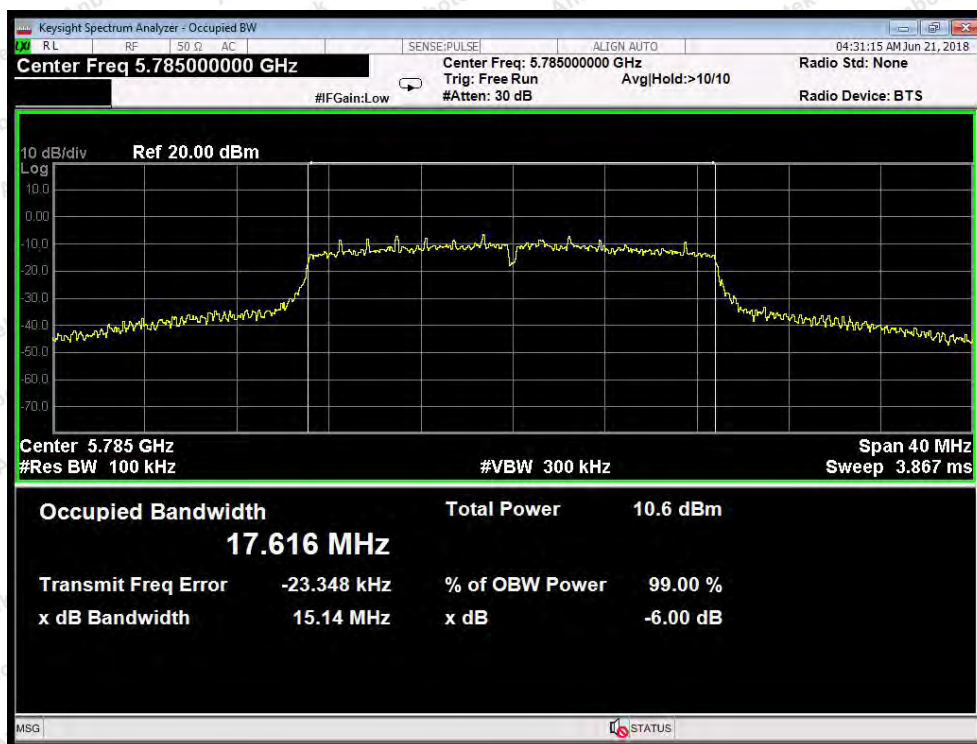


Test Mode: 802.11n20---Middle

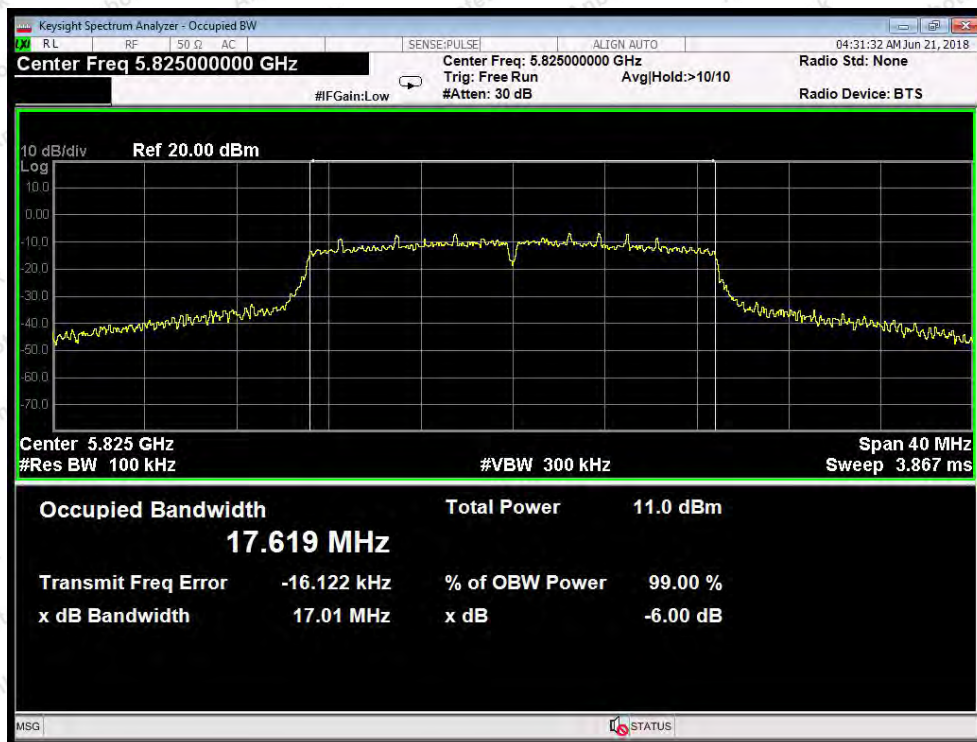


Test Mode: 802.11n20---High

26dB & 99% Bandwidth

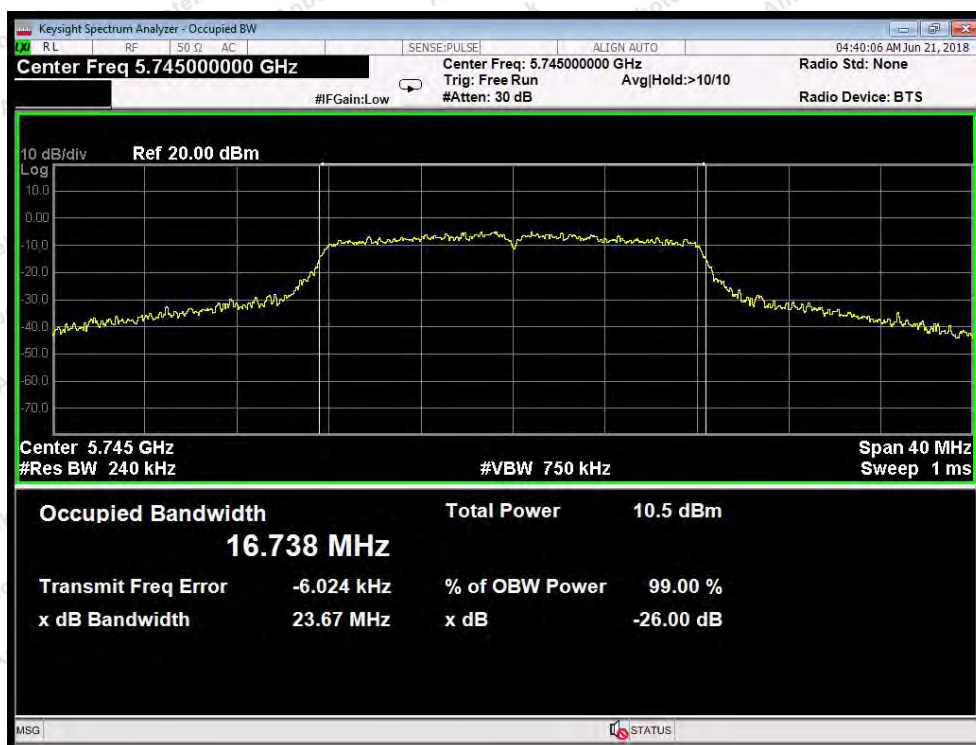

Test Mode: 802.11a--Low

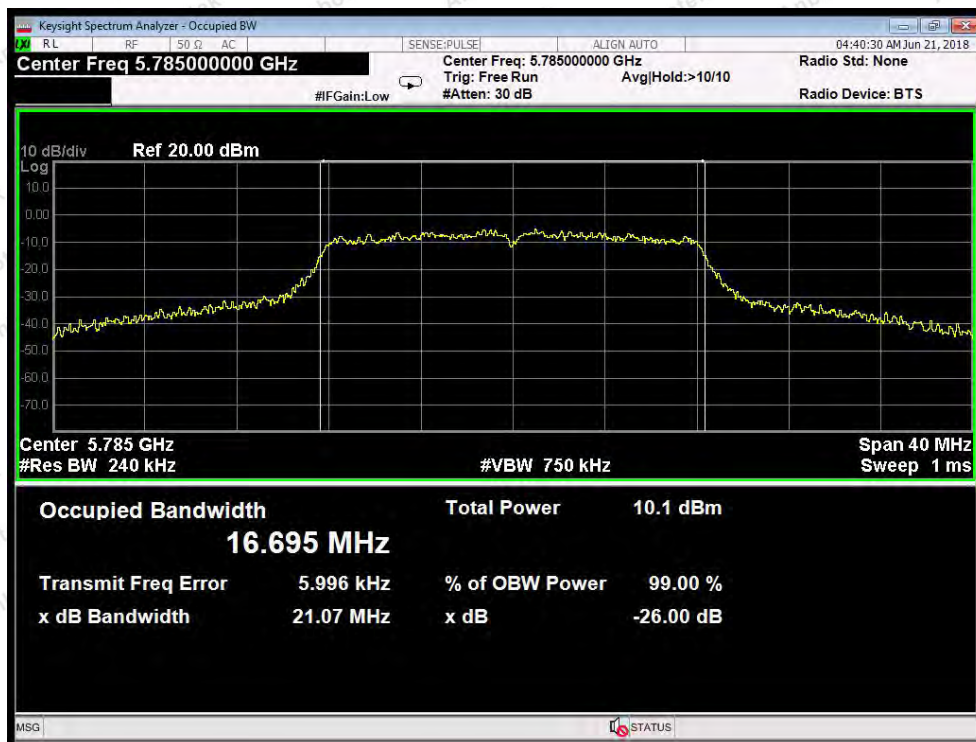

Test Mode: 802.11a---Middle




Test Mode: 802.11a---High



Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle

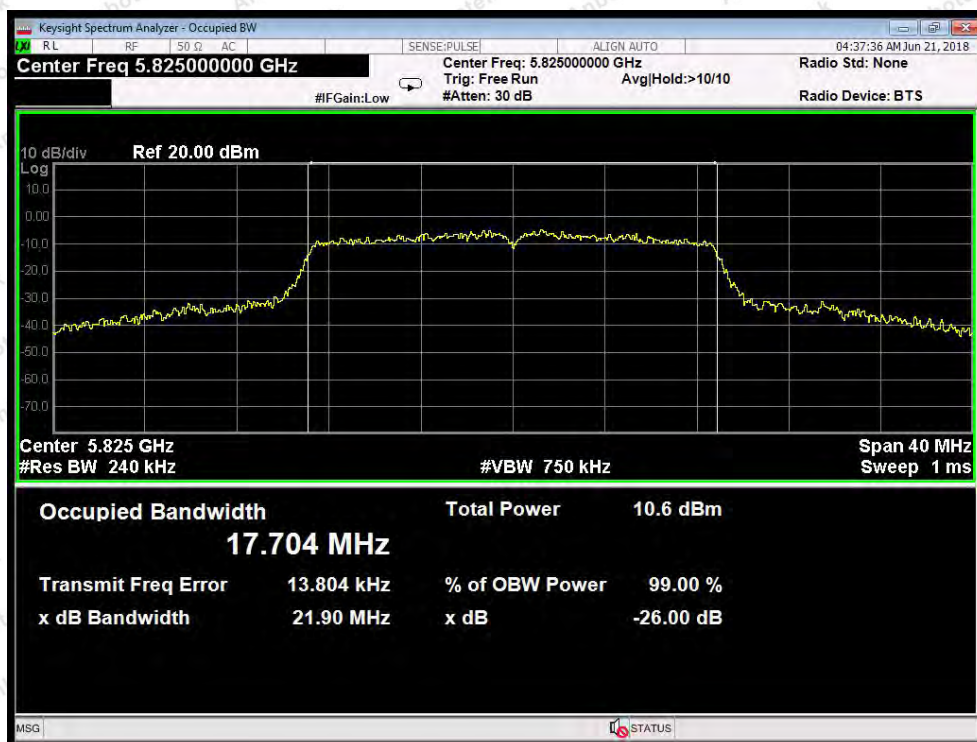


Test Mode: 802.11n20---High

ANT2
6dB Bandwidth

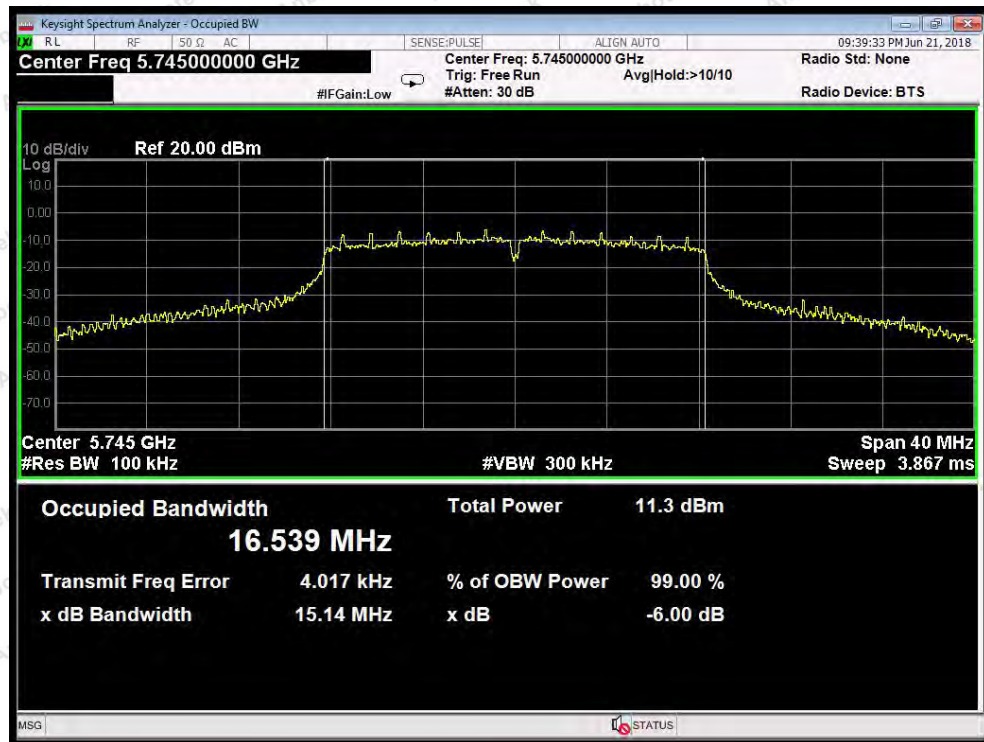

Test Mode: 802.11a--Low

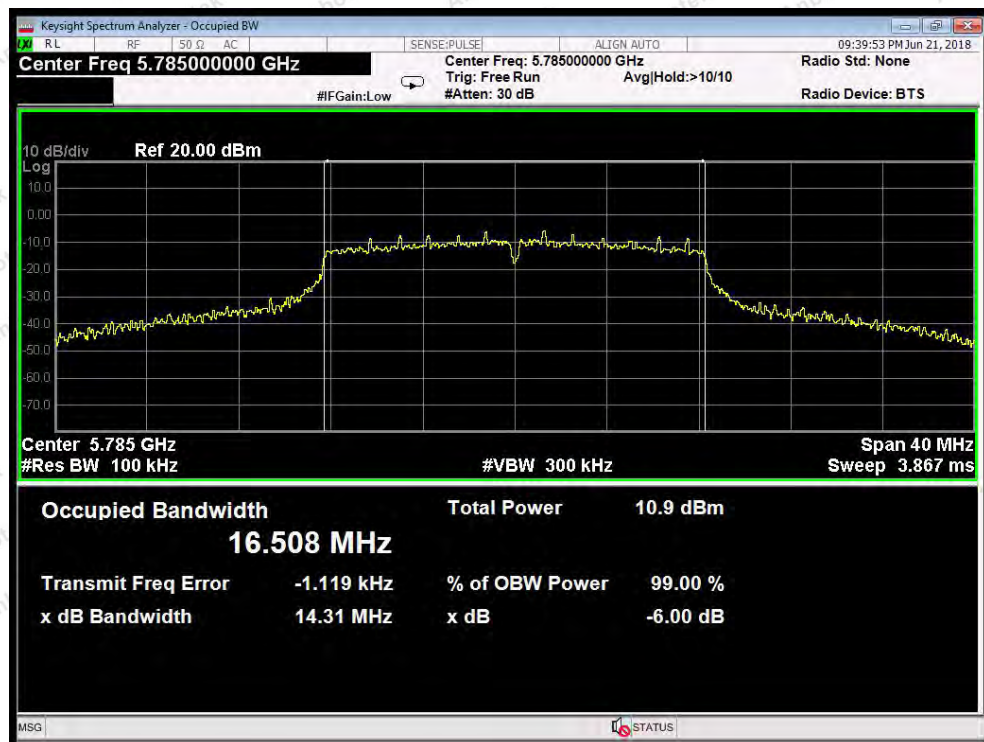

Test Mode: 802.11a---Middle




Test Mode: 802.11a---High



Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle

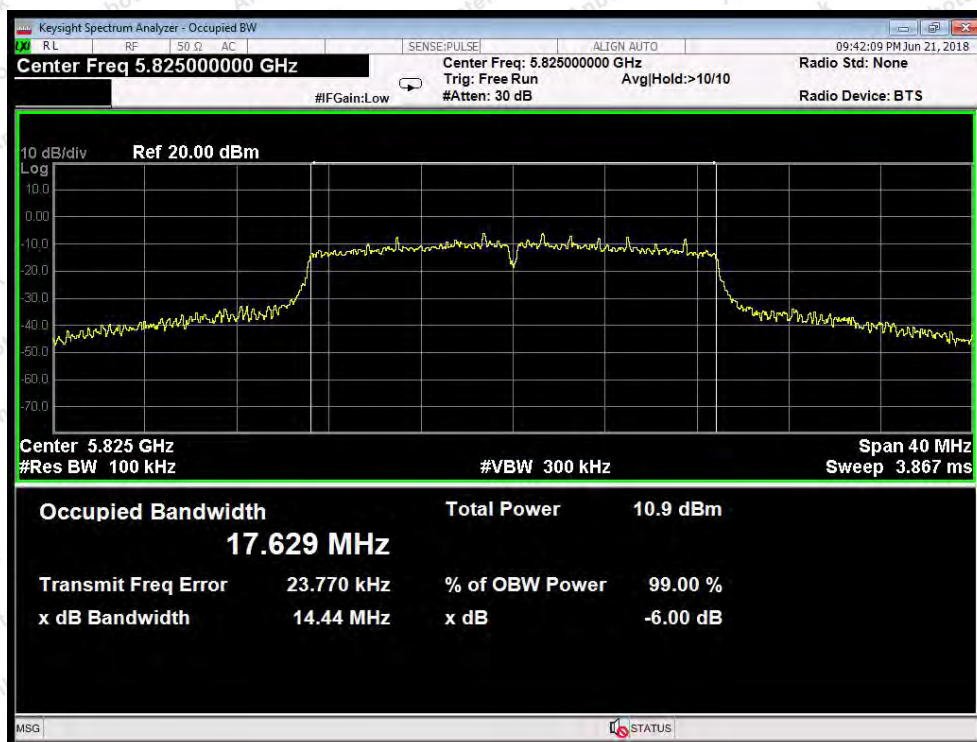


Test Mode: 802.11n20---High


26dB & 99% Bandwidth

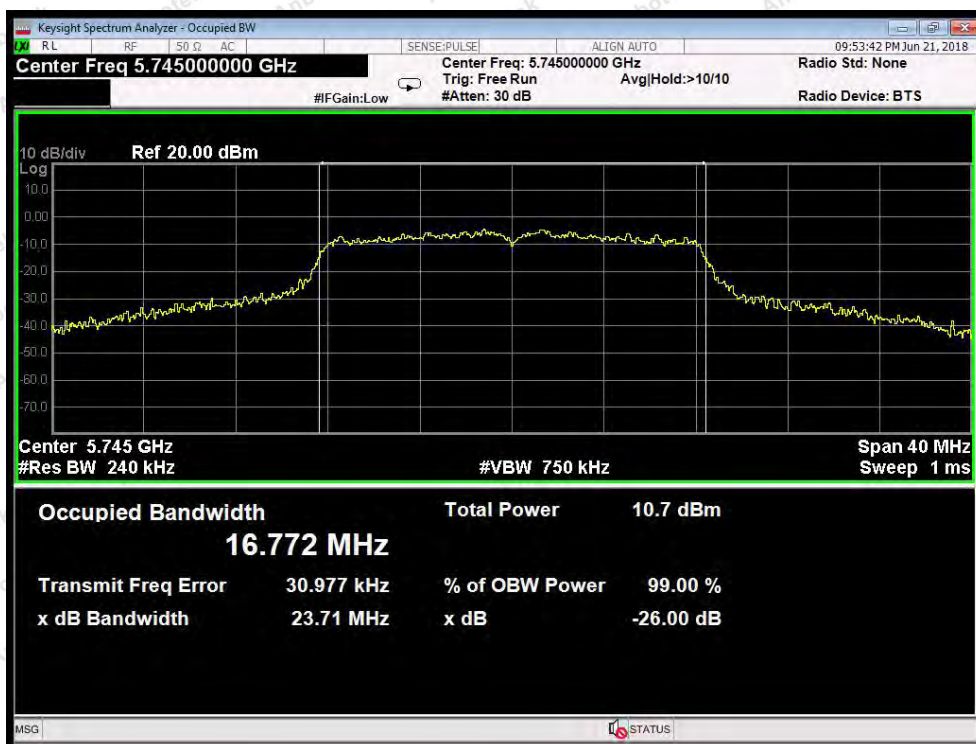

Test Mode: 802.11a--Low

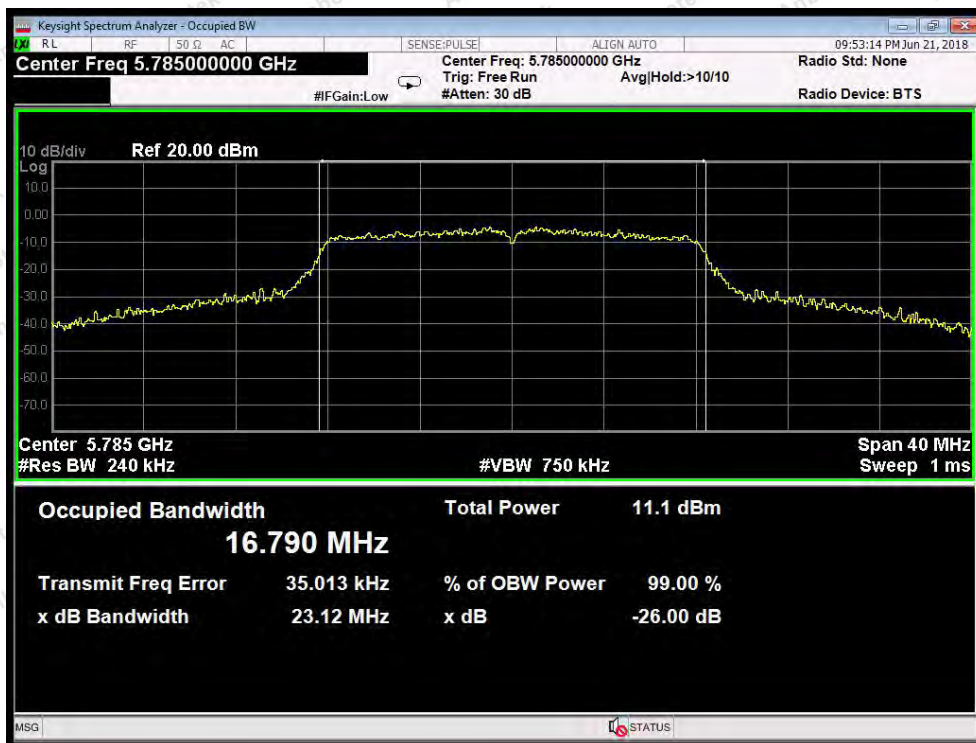


Test Mode: 802.11a---Middle

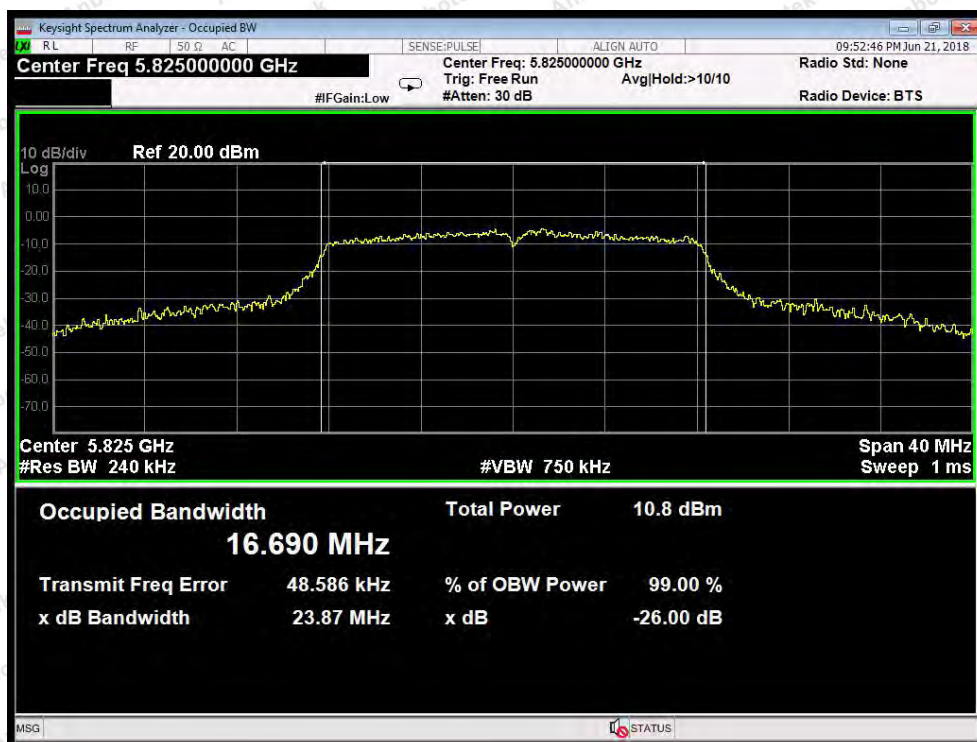


Test Mode: 802.11a---High



Test Mode: 802.11n20---Low

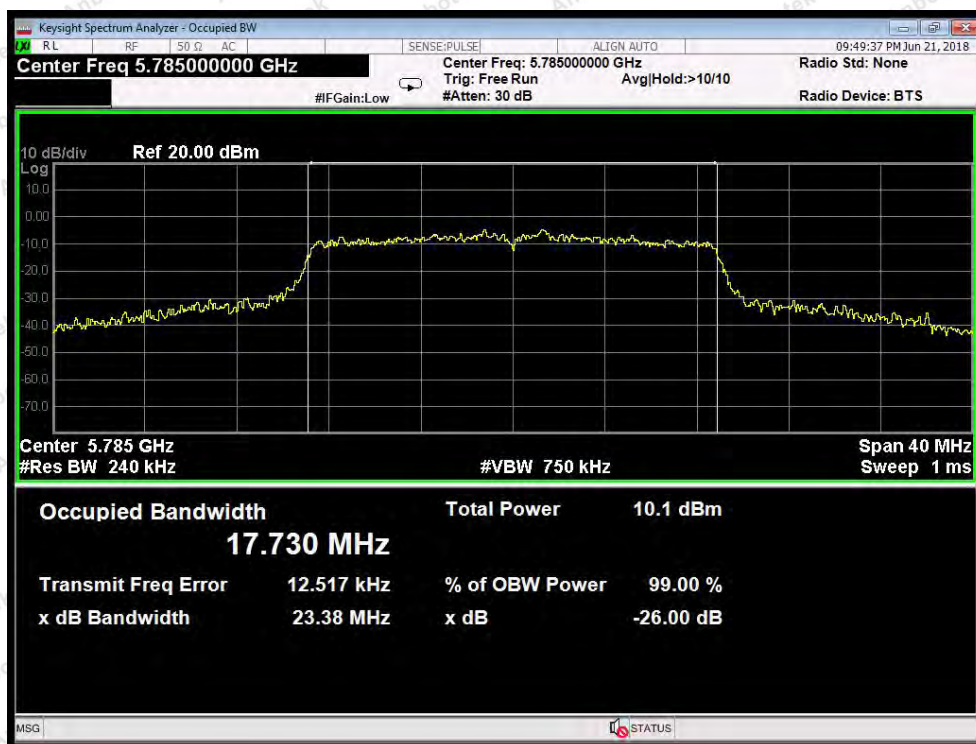

Test Mode: 802.11n20---Middle

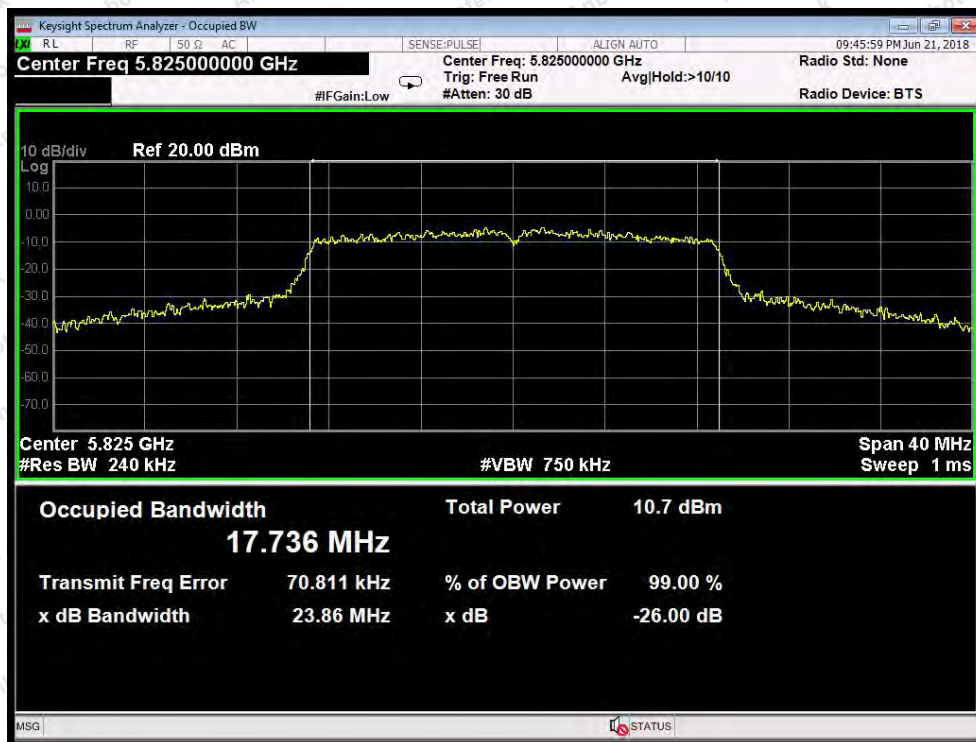


Test Mode: 802.11n20---High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	not exceed 30dBm/500kHz

7.2. Test Setup



7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =510KHz;
3. Set VBW ≥ 3 RBW;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;


7.4. Test Data

Test Item	: Power Spectral Density
Test Voltage	: DC 7.6V battery inside
Test Result	: PASS


Test Mode	: CH Low ~ CH High
Temperature	: 24℃
Humidity	: 55%RH

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm)			Correctional Limit (dBm)	Results
		ANT1	ANT2	SUM		
802.11a	5745	-2.888	-2.918	0.107	30	PASS
	5785	-3.371	-3.156	-0.250	30	PASS
	5825	-3.254	-2.627	0.082	30	PASS
802.11n20	5745	-2.981	-2.884	0.077	30	PASS
	5785	-3.326	-3.319	-0.311	30	PASS
	5825	-3.155	-2.387	0.258	30	PASS

ANT1

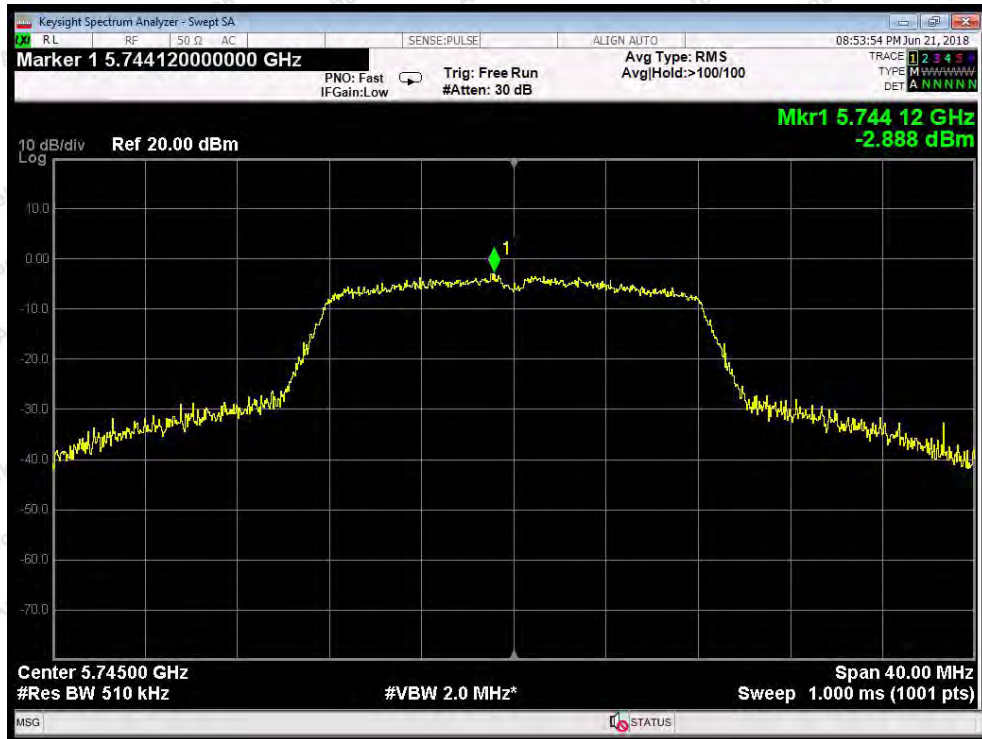


Test Mode: 802.11a--Low

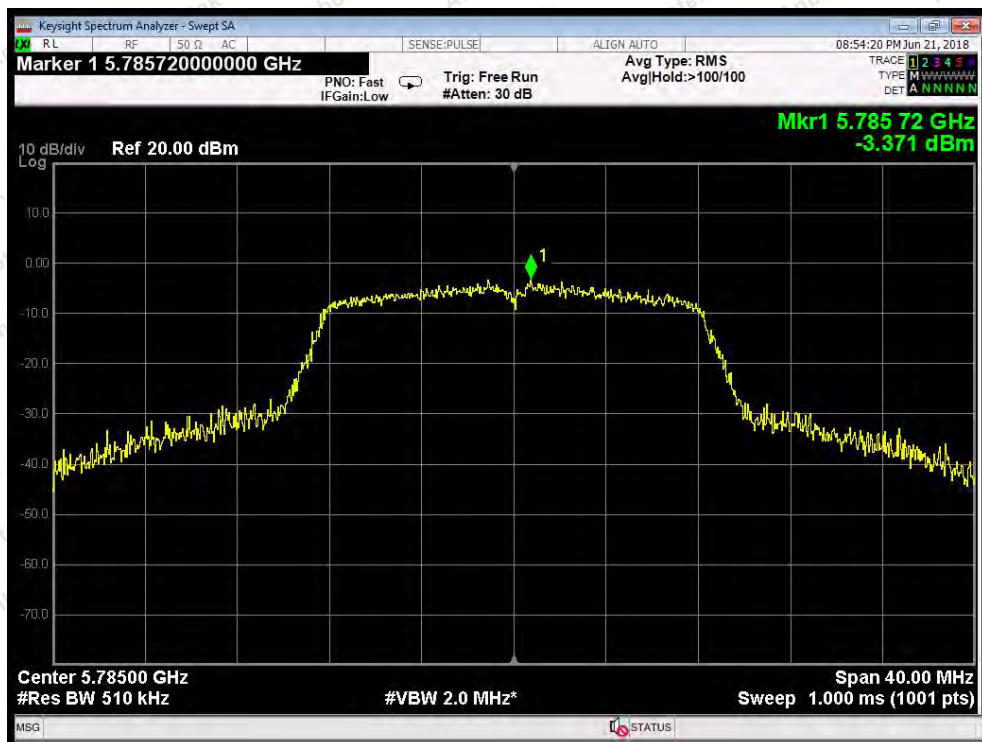

Test Mode: 802.11a---Middle



Test Mode: 802.11a---High

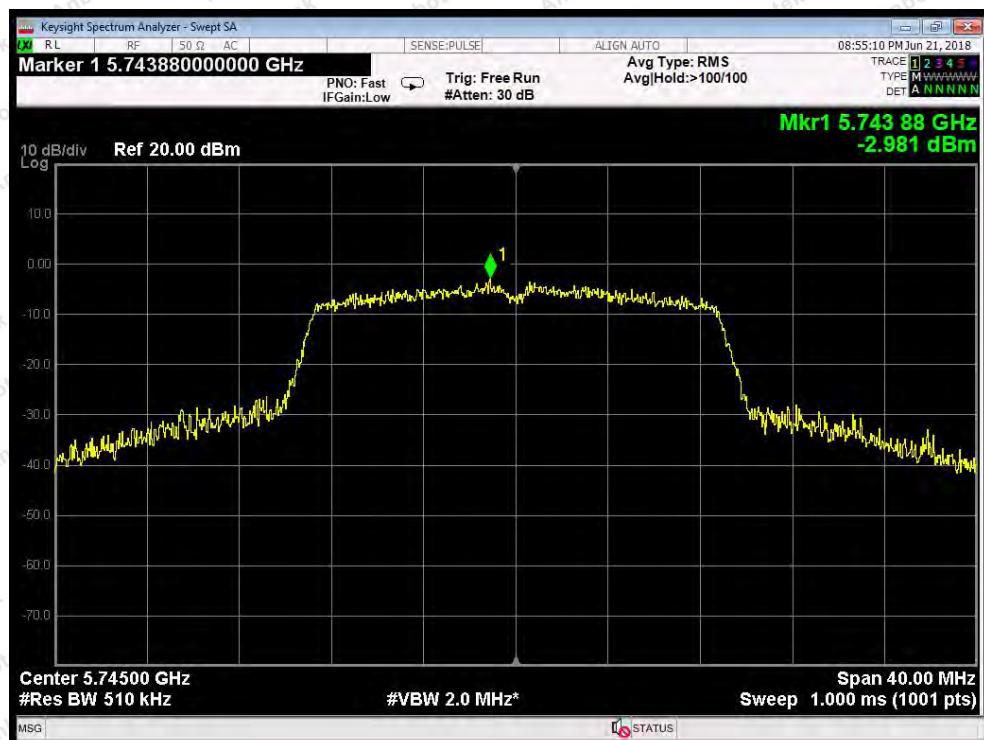

Test Mode: 802.11n20---Low



Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High

ANT2



Test Mode: 802.11a--Low



Test Mode: 802.11a---Middle




Test Mode: 802.11a---High



Test Mode: 802.11n20---Low



Test Mode: 802.11n20---Middle

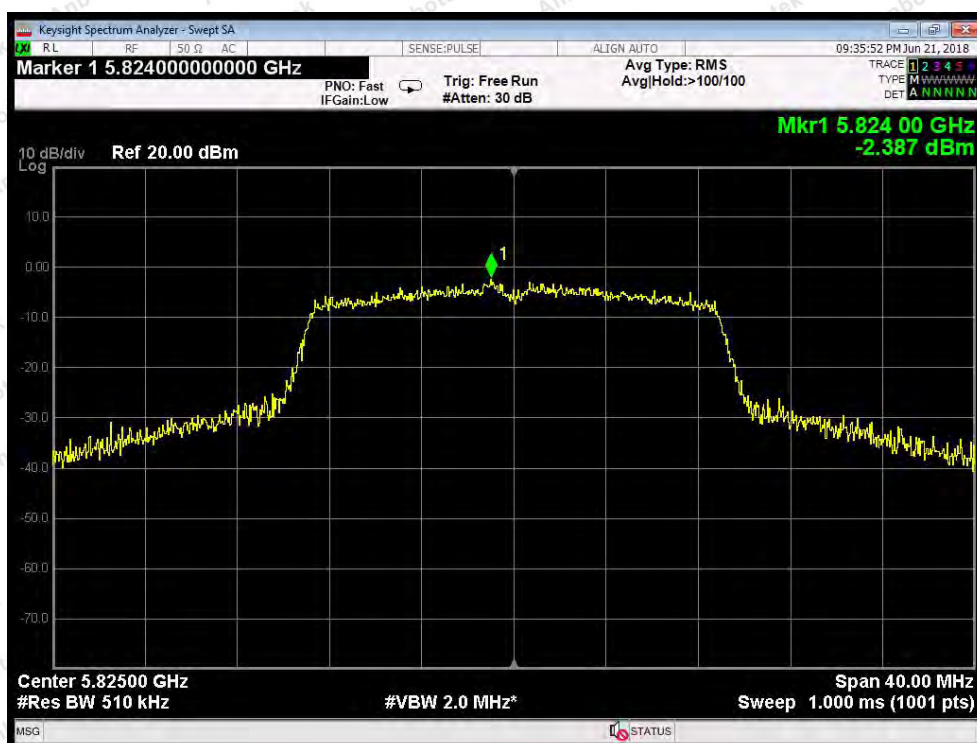

Test Mode: 802.11n20---High


8. Antenna Requirement

8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>

8.2. Antenna Connected Construction

The WIFI antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is 2.3 dBi. It complies with the standard requirement.

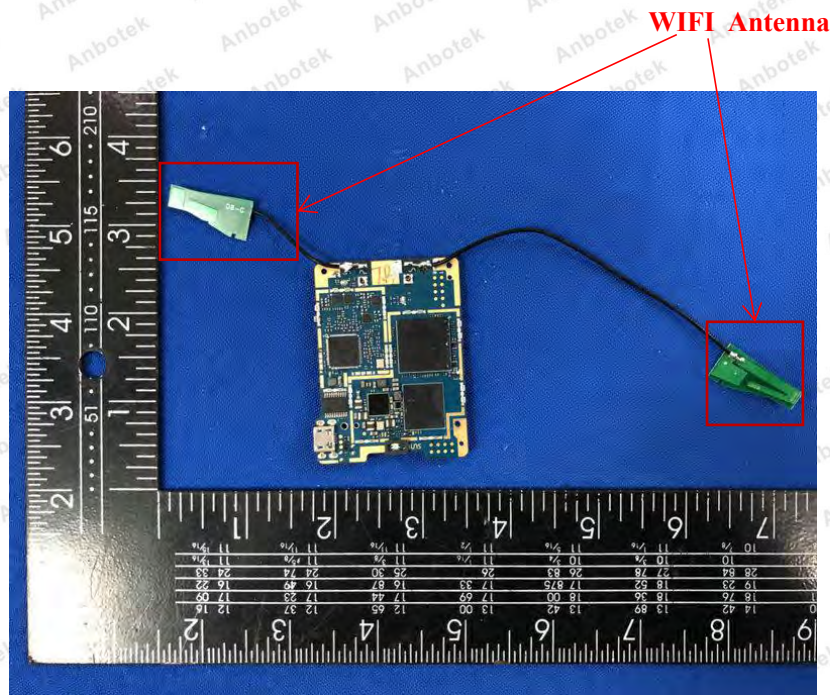

APPENDIX I-- TEST SETUP PHOTOGRAPH

Please see the test report of SZAWW180601010-01

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please see the test report of SZAWW180601010-01

APPENDIX III -- INTERNAL PHOTOGRAPH

Please see the test report of SZAWW180601010-01

----- End of Report -----