



# RF TEST REPORT

**Applicant**      Quectel Wireless Solutions Co., Ltd  
**FCC ID**          XMR201705BG96NA  
**Product**        LTE Cat M1 Module  
**Brand**            Quectel  
**Model**            BG96-NA  
**Report No.**      R1907A0353-R2  
**Issue Date**     August 1, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR47 Part 27C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Peng Tao*

*Approved by: Kai Xu*

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

## Table of Contents

|   |  |           |
|---|--|-----------|
| <b>1</b>  | <b>Test Laboratory .....</b>                             | <b>4</b>  |
| 1.1   | Notes of the Test Report .....                           | 4         |
| 1.2   | Test facility .....                                      | 4         |
| 1.3   | Testing Location .....                                   | 5         |
| <b>2</b>  | <b>General Description of Equipment under Test .....</b> | <b>6</b>  |
| 2.1   | Applied Standards .....                                  | 7         |
| <b>3</b>  | <b>Test Configuration .....</b>                          | <b>8</b>  |
| <b>4</b>  | <b>Test Information .....</b>                            | <b>9</b>  |
| 4.1   | RF Power Output .....                                    | 9         |
| 4.2   | Effective Isotropic Radiated Power .....                 | 12        |
| 4.3   | Occupied Bandwidth .....                                 | 16        |
| 4.4   | Band Edge Compliance .....                               | 19        |
| 4.5   | Peak-to-Average Power Ratio (PAPR) .....                 | 27        |
| 4.6   | Frequency Stability .....                                | 29        |
| 4.7   | Spurious Emissions at Antenna Terminals .....            | 31        |
| 4.8   | Radiates Spurious Emission .....                         | 36        |
| <b>5</b>  | <b>Main Test Instruments .....</b>                       | <b>41</b> |
| <b>ANNEX A: EUT Appearance and Test Setup .....</b> |  | <b>42</b> |
| A.1   | EUT Appearance .....                                     | 42        |
| A.2   | Test Setup .....   | 44        |
| <b>ANNEX B: Product Change Description .....</b>    |  | <b>45</b> |

## Summary of Measurement Results

| Number  | Test Case                               | Clause in FCC rules         | Verdict |
|---|---|-----------------------------|---------|
| 1   | RF power output                         | 2.1046                      | PASS    |
| 2   | Effective Isotropic Radiated power      | 27.50(c)(10)                | PASS    |
| 3   | Occupied Bandwidth                      | 2.1049                      | PASS    |
| 4   | Band Edge Compliance                    | 27.53(g)                    | PASS    |
| 5   | Peak-to-Average Power Ratio             | 27.50(d)/KDB971168 D01(5.7) | PASS    |
| 6   | Frequency Stability                     | 2.1055 / 27.54              | PASS    |
| 7   | Spurious Emissions at Antenna Terminals | 2.1051 /27.53(g)            | PASS    |
| 8   | Radiates Spurious Emission              | 2.1053 /27.53(g)            | PASS    |
| Date of Testing: May 9, 2017 ~ May 23, 2017 and July 10, 2019 ~ July 19, 2019   |   |                             |         |
| Note: PASS: The EUT complies with the essential requirements in the standard.<br>FAIL: The EUT does not comply with the essential requirements in the standard. |   |                             |         |

**BG96-NA (Report No.:R1907A0353-R2) is a variant model of BG96-NA (Report No.: RXA1705-0129RF01R2). This report adds LTE band 12. The detailed product change description please refers to the ANNEX B.**

# **1 Test Laboratory**

## **1.1 Notes of the Test Report**

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

## **1.2 Test facility**

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### Client Information

|                             |  |
|-----------------------------|--|
| <b>Applicant</b>            | Quectel Wireless Solutions Co., Ltd  |
| <b>Applicant address</b>    | Building 5, Shanghai Business Park Phase III (Area B), No.1016<br>Tianlin Road, Minhang District, Shanghai, China 200233 |
| <b>Manufacturer</b>         | Quectel Wireless Solutions Co., Ltd  |
| <b>Manufacturer address</b> | Building 5, Shanghai Business Park Phase III (Area B), No.1016<br>Tianlin Road, Minhang District, Shanghai, China 200233 |

### General information

| EUT Description   |   |           |          |
|---|---|-----------|----------|
| Model:  | BG96-NA   |           |          |
| IMEI:   | 86450803081341  |           |          |
| Hardware Version:   | R1.0  |           |          |
| Software Version:   | BG96NAMAR02A09M1G   |           |          |
| Power Supply:   | External power supply   |           |          |
| Antenna Type:   | The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna) |           |          |
| Test Mode(s):   | LTE Band 12   |           |          |
| LTE Release:  | 13  |           |          |
| LTE Category:   | M1  |           |          |
| Maximum E.I.R.P./ E.R.P.  | LTE Band 12: 20.79dBm   |           |          |
| Rated Power Supply Voltage:   | 3.8V  |           |          |
| Extreme Voltage:  | Minimum: 3.3V    Maximum: 4.3V  |           |          |
| Extreme Temperature:  | Lowest: -40°C    Highest: +85°C   |           |          |
| Operating Frequency Range(s)  | Mode  | Tx (MHz)  | Rx (MHz) |
|   | LTE Band 12   | 699 ~ 716 | 729 ~746 |
| Note: 1. The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details. |   |           |          |

| Accessory equipment |                         |
|---------------------|-------------------------|
| Evaluation Board    | RF Cable                |
| RS232-to-USB Cable  | Antenna: Dipole Antenna |
| Headset             | USB Cable               |

## **2.1 Applied Standards**

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### **Test standards**

**FCC CFR47 Part 2 (2018)**

**FCC CFR47 Part 27C (2018)**

**ANSI C63.26 (2015)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

### 3 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/12/13:

| Test items                              | Modes   | Bandwidth (MHz) |   |   |    |    |    | Modulation |       | RB |     |      | Test Channel |   |   |
|---|---|-----------------|---|---|----|----|----|------------|-------|----|-----|------|--------------|---|---|
|   |   | 1.4             | 3 | 5 | 10 | 15 | 20 | QPSK       | 16QAM | 1  | 50% | 100% | L            | M | H |
| RF power output                         | LTE 12  | O               | O | O | O  | -  | -  | O          | O     | O  | O   | O    | O            | O | O |
| Effective Isotropic Radiated power      | LTE 12  | O               | O | O | O  | -  | -  | O          | O     | O  | O   | O    | O            | O | O |
| Occupied Bandwidth                      | LTE 12  | O               | O | O | O  | -  | -  | O          | O     | -  | -   | O    | O            | O | O |
| Band Edge Compliance                    | LTE 12  | O               | O | O | O  | -  | -  | O          | O     | O  | -   | O    | O            | - | O |
| Peak-to-Average Power Ratio             | LTE 12  | O               | O | O | O  | -  | -  | O          | O     | -  | -   | O    | O            | O | O |
| Frequency Stability                     | LTE 12  | O               | O | O | O  | -  | -  | O          | O     | O  | O   | O    | O            | O | O |
| Spurious Emissions at Antenna Terminals | LTE 12  | O               | O | O | O  | -  | -  | O          | -     | O  | -   | -    | O            | O | O |
| Radiates Spurious Emission              | LTE 12  | O               | - | O | O  | -  | -  | O          | -     | O  | -   | -    | -            | O | - |
| Note                                    | 1. The mark "O" means that this configuration is chosen for testing.<br>2. The mark "-" means that this configuration is not testing. |                 |   |   |    |    |    |            |       |    |     |      |              |   |   |



## 4 Test Information

### 4.1 RF Power Output


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

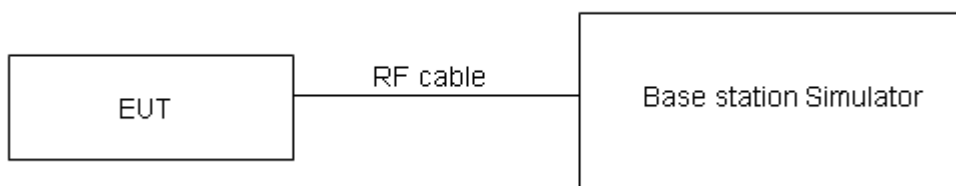

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=0.4$  dB.

**Test Results**

| LTE Band 12 |            |         |           | AV Conducted Power(dBm) |             |             |
|-------------|------------|---------|-----------|-------------------------|-------------|-------------|
| Bandwidth   | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             |
|             |            |         |           | 23017/699.7             | 23095/707.5 | 23173/715.3 |
| 1.4MHz      | QPSK       | 1       | 0         | 23.15                   | 23.00       | 23.03       |
|             |            | 1       | 2         | 22.96                   | 23.16       | 22.99       |
|             |            | 1       | 5         | 22.91                   | 22.93       | 22.94       |
|             |            | 3       | 0         | 22.84                   | 22.90       | 22.87       |
|             |            | 3       | 2         | 22.90                   | 22.87       | 22.83       |
|             |            | 3       | 3         | 22.93                   | 22.89       | 22.84       |
|             |            | 6       | 0         | 21.92                   | 22.00       | 21.93       |
|             | 16QAM      | 1       | 0         | 22.50                   | 22.50       | 22.47       |
|             |            | 1       | 2         | 22.79                   | 22.74       | 22.78       |
|             |            | 1       | 5         | 22.41                   | 22.49       | 22.40       |
|             |            | 3       | 0         | 22.46                   | 22.38       | 22.34       |
|             |            | 3       | 2         | 22.45                   | 22.41       | 22.30       |
|             |            | 3       | 3         | 22.42                   | 22.39       | 22.32       |
|             |            | 5       | 0         | 22.52                   | 22.50       | 22.43       |
| Bandwidth   | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             |
|             |            |         |           | 23025/700.5             | 23095/707.5 | 23165/714.5 |
| 3MHz        | QPSK       | 1       | 0         | 23.17                   | 23.01       | 23.06       |
|             |            | 1       | 2         | 22.99                   | 23.21       | 23.03       |
|             |            | 1       | 5         | 22.93                   | 22.97       | 22.97       |
|             |            | 3       | 0         | 22.87                   | 22.95       | 22.91       |
|             |            | 3       | 2         | 22.93                   | 22.92       | 22.87       |
|             |            | 3       | 3         | 22.95                   | 22.93       | 22.89       |
|             |            | 6       | 0         | 22.00                   | 22.02       | 21.97       |
|             | 16QAM      | 1       | 0         | 22.52                   | 22.53       | 22.49       |
|             |            | 1       | 2         | 22.82                   | 22.78       | 22.81       |
|             |            | 1       | 5         | 22.44                   | 22.51       | 22.43       |
|             |            | 3       | 0         | 22.49                   | 22.43       | 22.38       |
|             |            | 3       | 2         | 22.47                   | 22.45       | 22.33       |
|             |            | 3       | 3         | 22.45                   | 22.44       | 22.36       |
|             |            | 5       | 0         | 22.55                   | 22.55       | 22.47       |
| Bandwidth   | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             |
|             |            |         |           | 23035/701.5             | 23095/707.5 | 23155/713.5 |
| 5MHz        | QPSK       | 1       | 0         | 23.16                   | 22.97       | 23.04       |
|             |            | 1       | 2         | 22.97                   | 23.20       | 23.00       |
|             |            | 1       | 5         | 22.90                   | 22.92       | 22.93       |
|             |            | 3       | 0         | 22.85                   | 22.91       | 22.88       |
|             |            | 3       | 2         | 22.90                   | 22.87       | 22.83       |
|             |            | 3       | 3         | 22.92                   | 22.90       | 22.85       |
|             |            | 6       | 0         | 21.98                   | 21.98       | 21.92       |



|           | 16QAM      | 1       | 0         | 22.47                   | 22.51       | 22.47     |
|-----------|------------|---------|-----------|-------------------------|-------------|-----------|
|           |            | 1       | 2         | 22.80                   | 22.75       | 22.79     |
|           |            | 1       | 5         | 22.41                   | 22.47       | 22.40     |
|           |            | 3       | 0         | 22.46                   | 22.41       | 22.35     |
|           |            | 3       | 2         | 22.44                   | 22.40       | 22.29     |
|           |            | 3       | 3         | 22.43                   | 22.40       | 22.33     |
|           |            | 5       | 0         | 22.52                   | 22.50       | 22.43     |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |           |
|           |            |         |           | 23060/704               | 23095/707.5 | 23130/711 |
| 10MHz     | QPSK       | 1       | 0         | 23.13                   | 22.93       | 23.01     |
|           |            | 1       | 2         | 22.96                   | 23.16       | 22.98     |
|           |            | 1       | 5         | 22.88                   | 22.91       | 22.90     |
|           |            | 3       | 0         | 22.82                   | 22.86       | 22.84     |
|           |            | 3       | 2         | 22.88                   | 22.83       | 22.80     |
|           |            | 3       | 3         | 22.89                   | 22.85       | 22.81     |
|           |            | 6       | 0         | 21.95                   | 21.93       | 21.88     |
|           | 16QAM      | 1       | 0         | 22.45                   | 22.47       | 22.42     |
|           |            | 1       | 2         | 22.76                   | 22.73       | 22.75     |
|           |            | 1       | 5         | 22.39                   | 22.44       | 22.38     |
|           |            | 3       | 0         | 22.43                   | 22.37       | 22.32     |
|           |            | 3       | 2         | 22.41                   | 22.38       | 22.26     |
|           |            | 3       | 3         | 22.40                   | 22.35       | 22.29     |
|           |            | 5       | 0         | 22.50                   | 22.46       | 22.40     |

## 4.2 Effective Isotropic Radiated Power

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Methods of Measurement

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

The measurement results are amend as described below:


Power(EIRP)=PMea- Pcl + Ga

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)


and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### Test setup

#### 30MHz~~~ 1GHz

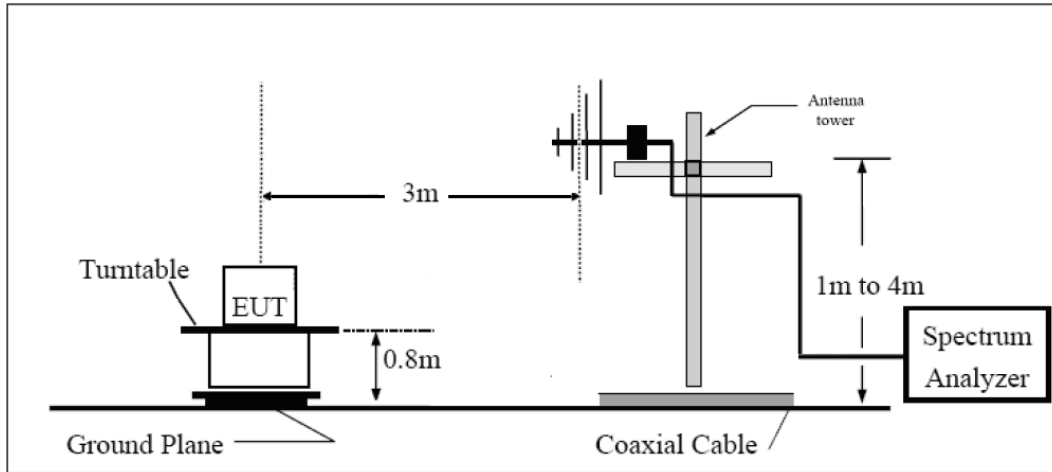

#### Above 1GHz

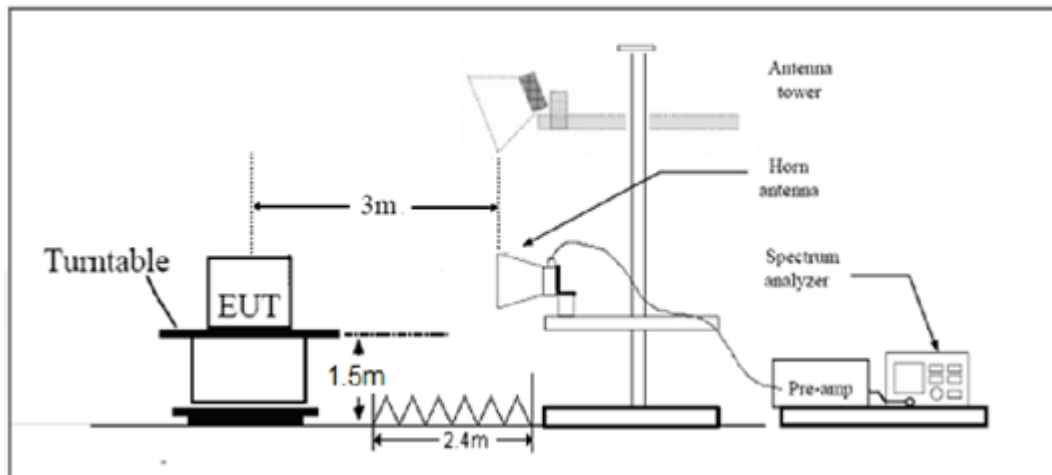

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 27.50(c) (10) specifies that “Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP”

|                        |                                |
|------------------------|--------------------------------|
| Part 27.50(c)(10)Limit | $\leq 3 \text{ W}$ (34.77 dBm) |
|------------------------|--------------------------------|

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19 \text{ dB}$

**Test Results**

| LTE Band 12            |         |                 |              |           |             |            |
|------------------------|---------|-----------------|--------------|-----------|-------------|------------|
| Bandwidth              | Channel | Frequency (MHz) | Polarization | ERP (dBm) | Limit (dBm) | Conclusion |
| <b>1.4 MHz (QPSK)</b>  | Low     | 699.7           | Horizontal   | 20.56     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.79     | 34.77       | Pass       |
|                        | High    | 715.3           | Horizontal   | 20.54     | 34.77       | Pass       |
| <b>3 MHz (QPSK)</b>    | Low     | 700.5           | Horizontal   | 20.58     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.69     | 34.77       | Pass       |
|                        | High    | 714.5           | Horizontal   | 20.48     | 34.77       | Pass       |
| <b>5 MHz (QPSK)</b>    | Low     | 701.5           | Horizontal   | 20.44     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.59     | 34.77       | Pass       |
|                        | High    | 713.5           | Horizontal   | 20.50     | 34.77       | Pass       |
| <b>10 MHz (QPSK)</b>   | Low     | 704             | Horizontal   | 20.64     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.73     | 34.77       | Pass       |
|                        | High    | 711             | Horizontal   | 20.61     | 34.77       | Pass       |
| <b>1.4 MHz (16QAM)</b> | Low     | 699.7           | Horizontal   | 20.11     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.30     | 34.77       | Pass       |
|                        | High    | 715.3           | Horizontal   | 20.06     | 34.77       | Pass       |
| <b>3 MHz (16QAM)</b>   | Low     | 700.5           | Horizontal   | 20.13     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.19     | 34.77       | Pass       |
|                        | High    | 714.5           | Horizontal   | 20.01     | 34.77       | Pass       |
| <b>5 MHz (16QAM)</b>   | Low     | 701.5           | Horizontal   | 19.90     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.13     | 34.77       | Pass       |
|                        | High    | 713.5           | Horizontal   | 19.98     | 34.77       | Pass       |
| <b>10 MHz (16QAM)</b>  | Low     | 704             | Horizontal   | 20.12     | 34.77       | Pass       |
|                        | Mid     | 707.5           | Horizontal   | 20.20     | 34.77       | Pass       |
|                        | High    | 711             | Horizontal   | 20.04     | 34.77       | Pass       |

### 4.3 Occupied Bandwidth

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4 (1.4MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4 (3MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/13 (5MHz).


RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/13 (10MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4 (15MHz/20MHz).

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 12 (1.4MHz/3MHz/5MHz/10MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

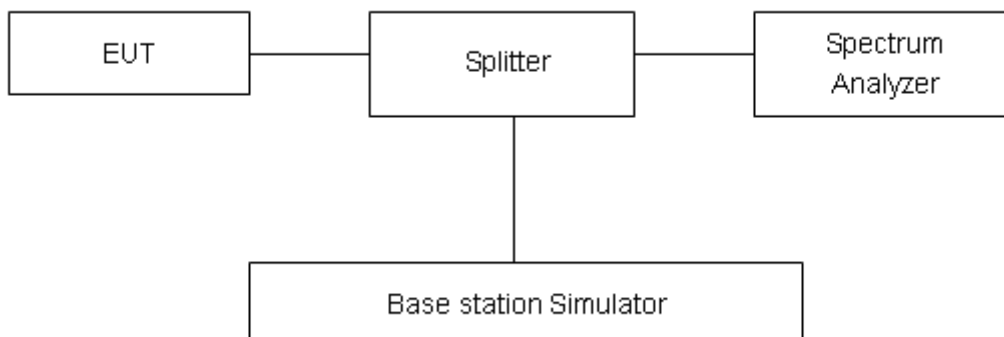

#### Limits

No specific occupied bandwidth requirements in part 2.1049.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=624\text{Hz}$ .




## Test Result

### Variant

| Mode   | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | RB  | Index | Bandwidth(MHz) |        |
|--------|-----------|------------|----------------------------|-----|-------|----------------|--------|
|        |           |            |                            |     |       | 99% Power      | -26dBc |
| Band12 | 1.4MHz    | QPSK       | 23095/707.5                | 6#0 | 0     | 1.1034         | 1.331  |
|        |           | 16QAM      | 23095/707.5                | 6#0 | 0     | 0.9475         | 1.214  |
|        | 3MHz      | QPSK       | 23095/707.5                | 6#0 | 0     | 1.174          | 2.338  |
|        |           | 16QAM      | 23095/707.5                | 6#0 | 0     | 0.9771         | 1.307  |
|        | 5MHz      | QPSK       | 23095/707.5                | 6#0 | 0     | 1.1589         | 2.072  |
|        |           | 16QAM      | 23095/707.5                | 6#0 | 0     | 1.1263         | 2.008  |
|        | 10MHz     | QPSK       | 23095/707.5                | 6#0 | 0     | 1.2324         | 2.35   |
|        |           | 16QAM      | 23095/707.5                | 6#0 | 0     | 1.0727         | 1.578  |

LTE Band 12 QPSK 1.4MHz CH-Middle

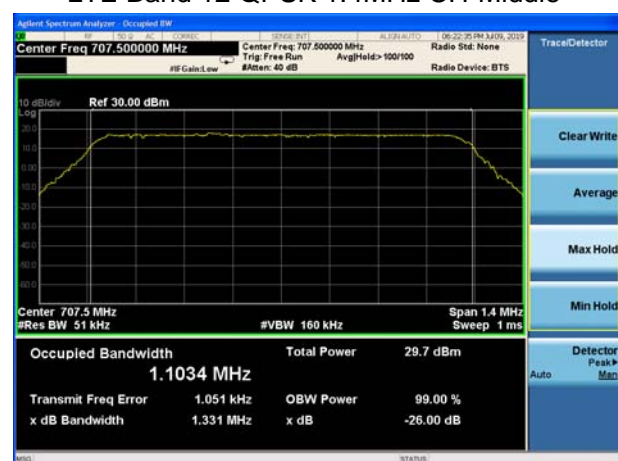


LTE Band 12 QPSK 3MHz CH-Middle



LTE Band 12 QPSK 5MHz CH-Middle



LTE Band 12 QPSK 10MHz CH-Middle

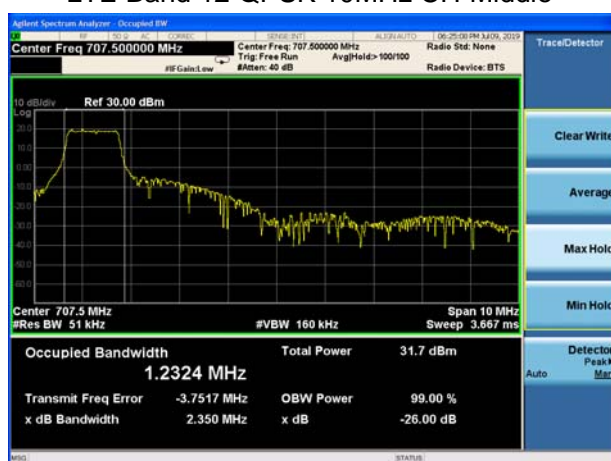



## LTE Band 12 16QAM 1.4MHz CH-Middle



## LTE Band 12 16QAM 3MHz CH-Middle



## LTE Band 12 16QAM 5MHz CH-Middle



## LTE Band 12 16QAM 10MHz CH-Middle



## 4.4 Band Edge Compliance

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |


### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v02r02 Section 6.0

- 1.The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For LTE Band 41 Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.  
RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 4 (1.4MHz).  
RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 4 (3MHz).  
RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/13 (5MHz).  
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 4/13 (10MHz).  
RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 4 (15MHz).  
RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 4 (20MHz)  
RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 12 (1.4MHz/3MHz/5MHz/10MHz). on spectrum analyzer.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

### Test Setup

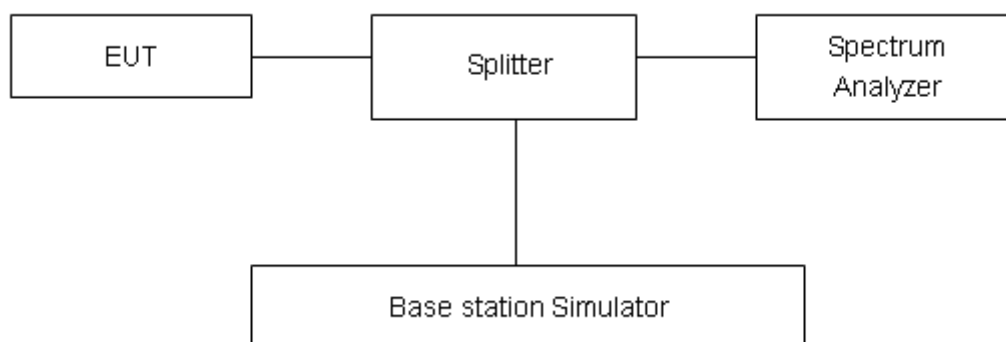



## Limits

Hz band, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log_{10}(P)$  dB."

## Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684\text{dB}$ .




## Test Result

All the test traces in the plots shows the test results clearly.


LTE Band 12 QPSK 1.4MHz CH-Low, 1 RB

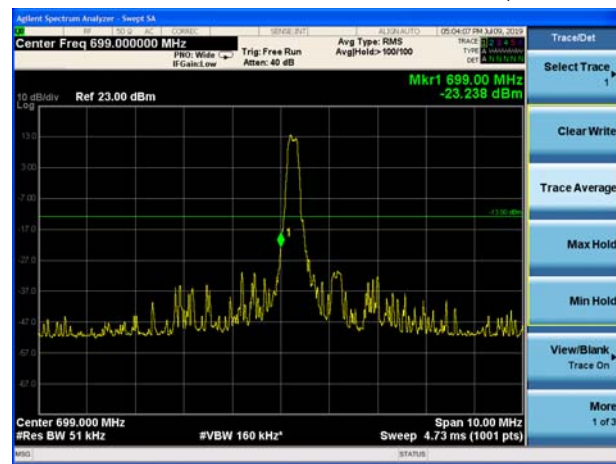


LTE Band 12 QPSK 1.4MHz CH-High, 1 RB

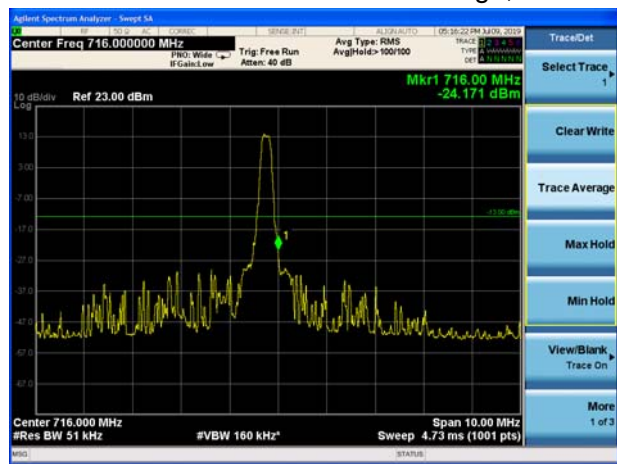


LTE Band 12 QPSK 1.4MHz CH-Low, 100%RB

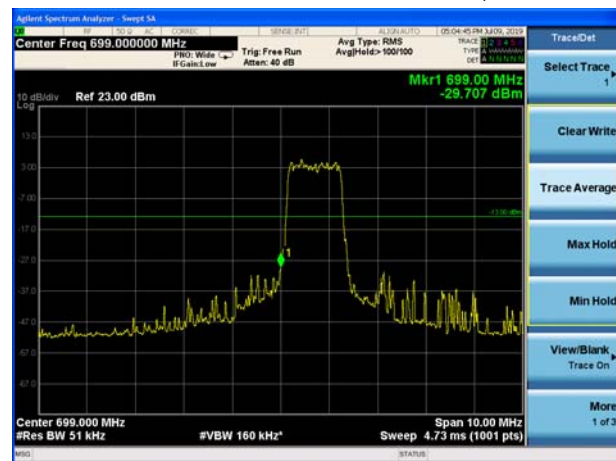


LTE Band 12 QPSK 1.4MHz CH-High, 100%RB

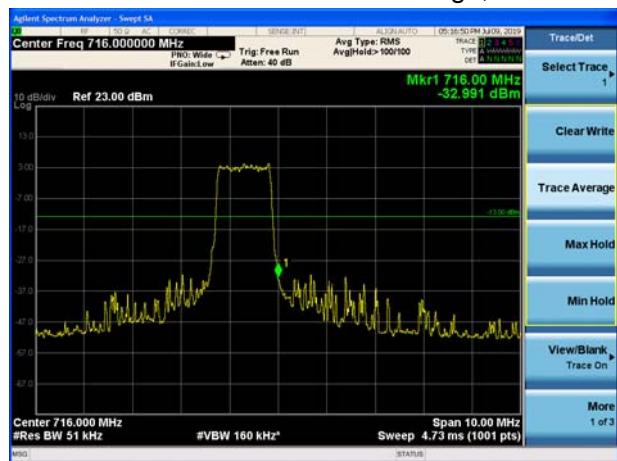

LTE Band 12 QPSK 3MHz CH-Low, 1 RB

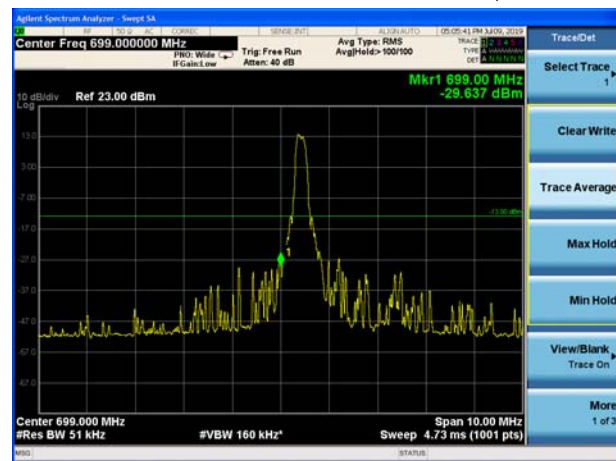


LTE Band 12 QPSK 3MHz CH-High, 1 RB

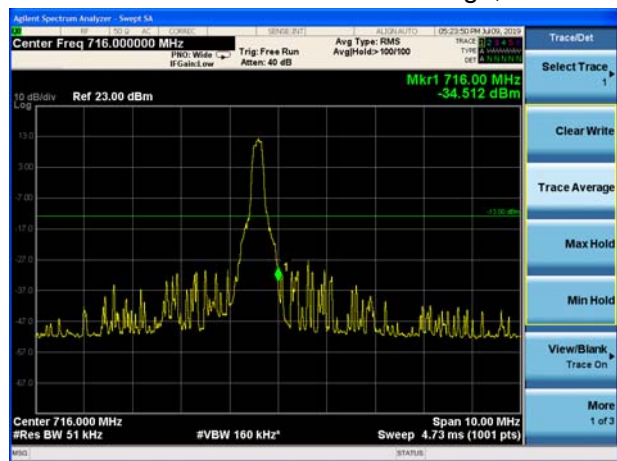







## LTE Band 12 QPSK 3MHz CH-Low, 100%RB

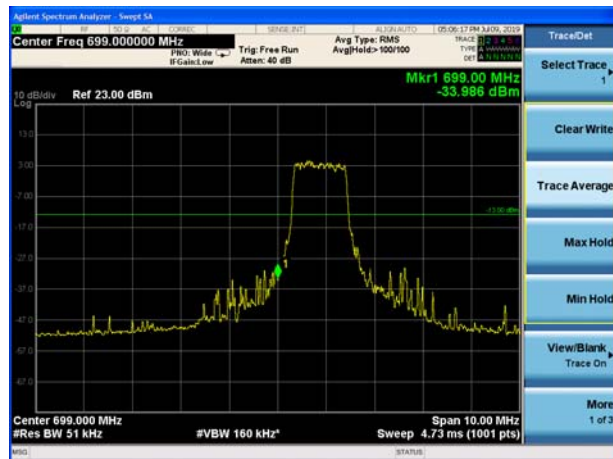


## LTE Band 12 QPSK 3MHz CH-High, 100%RB

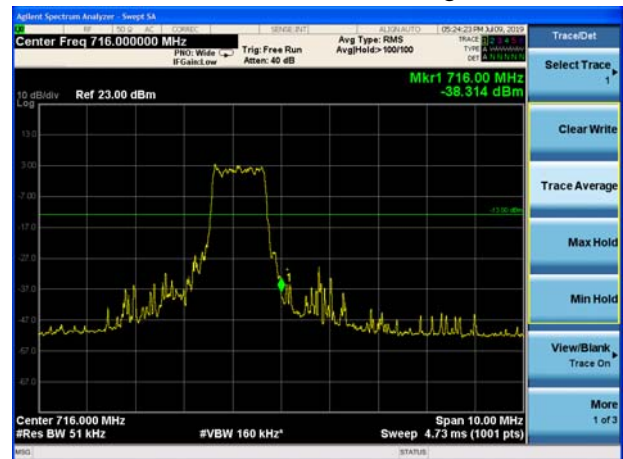


## LTE Band 12 QPSK 5MHz CH-Low, 1 RB

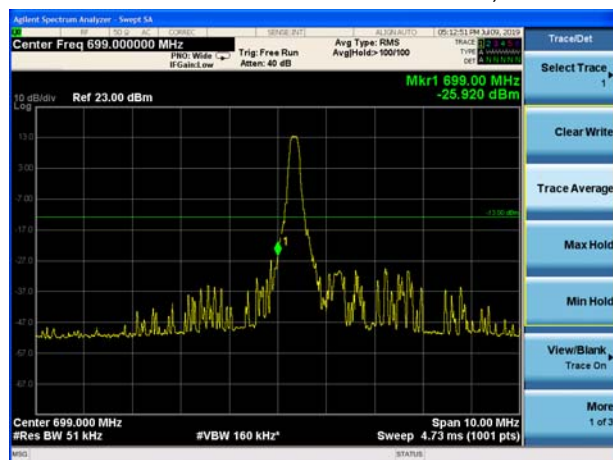


## LTE Band 12 QPSK 5MHz CH-High, 1 RB

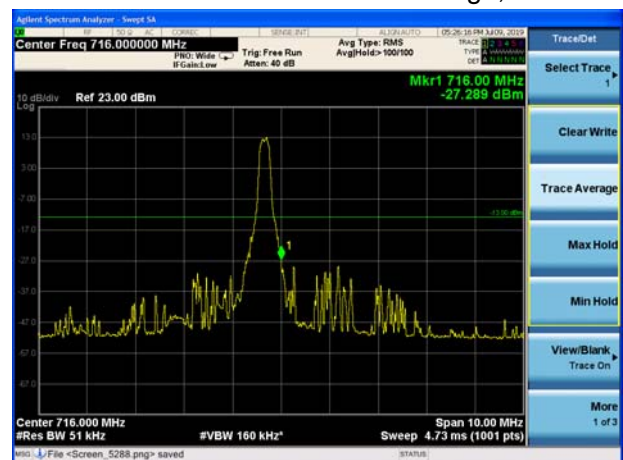

## LTE Band 12 QPSK 5MHz CH-Low, 100%RB

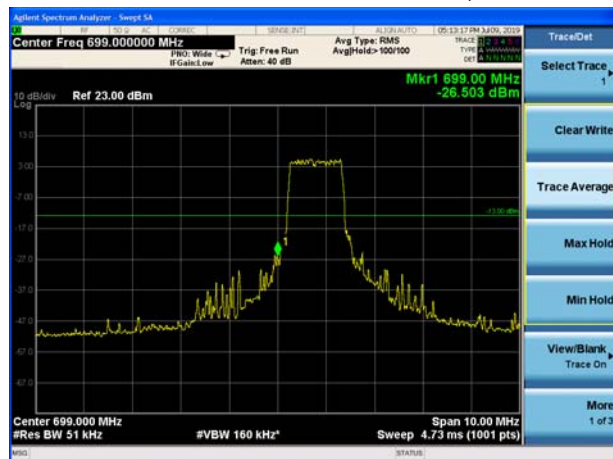


## LTE Band 12 QPSK 5MHz CH-High, 100%RB

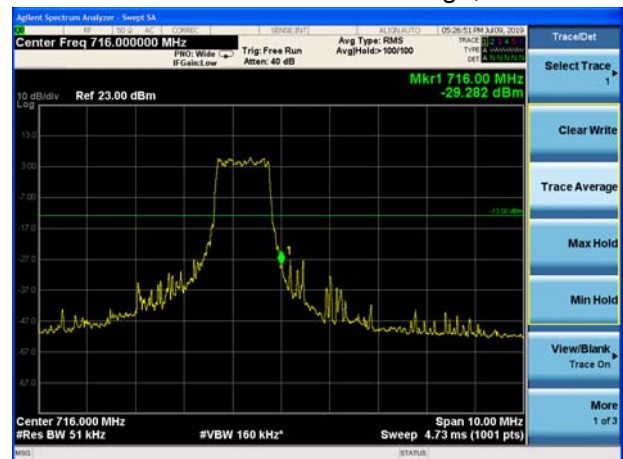





## LTE Band 12 QPSK 10MHz CH-Low, 1 RB

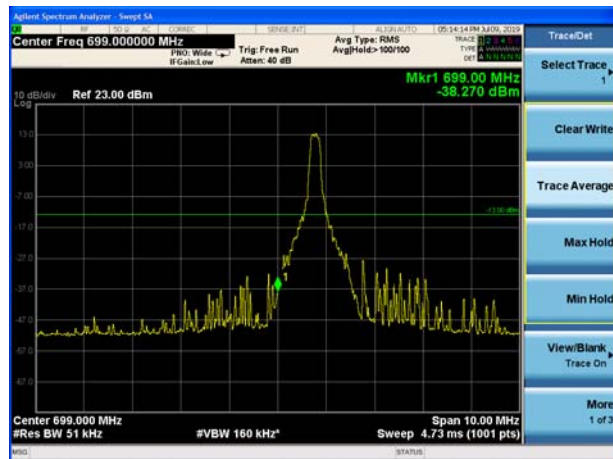


## LTE Band 12 QPSK 10MHz CH-High, 1 RB

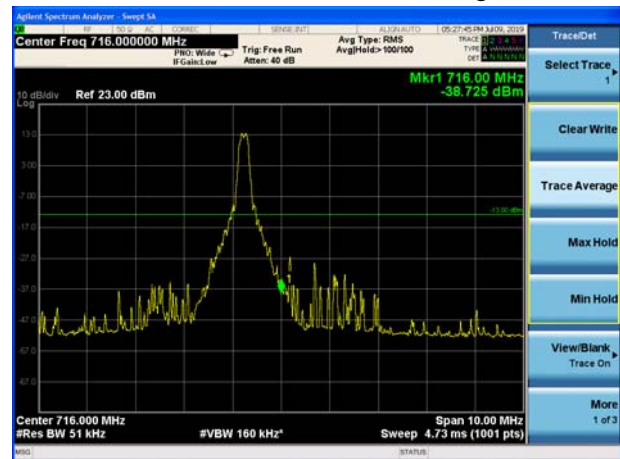


## LTE Band 12 QPSK 10MHz CH-Low, 100%RB

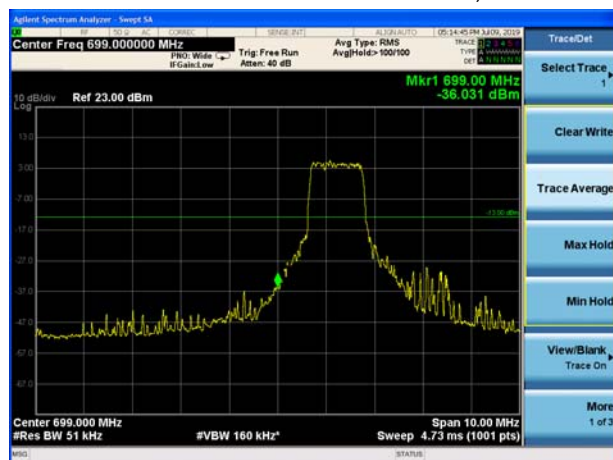


## LTE Band 12 QPSK 10MHz CH-High, 100%RB

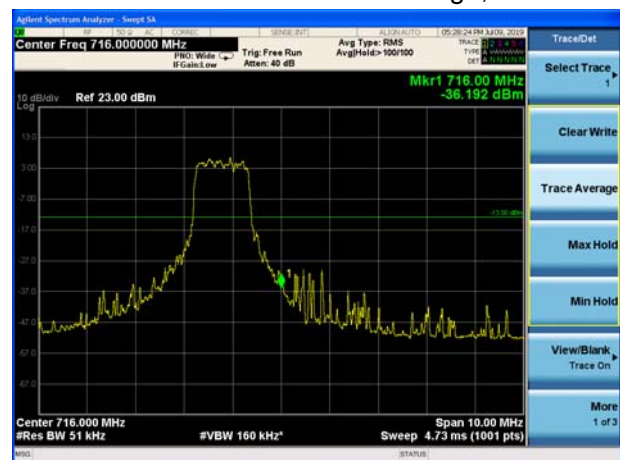

## LTE Band 12 16QAM 1.4MHz CH-Low, 1 RB

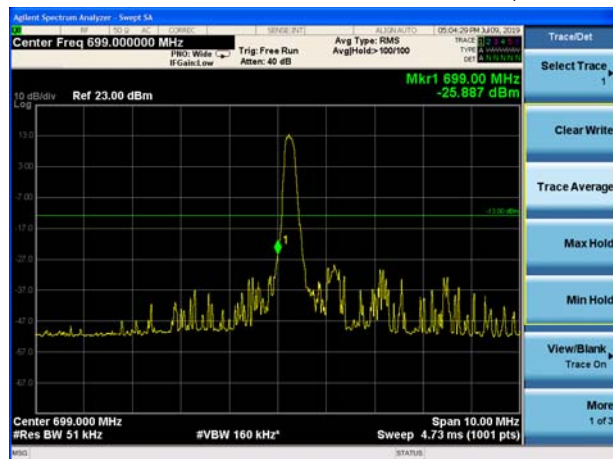


## LTE Band 12 16QAM 1.4MHz CH-High, 1 RB

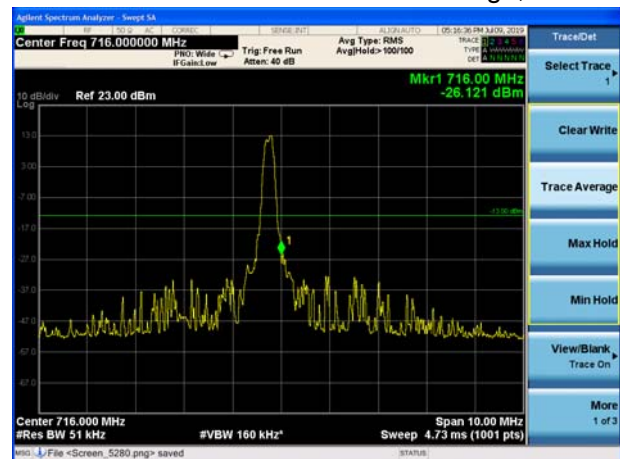





LTE Band 12 16QAM 1.4MHz CH-Low, 100%RB

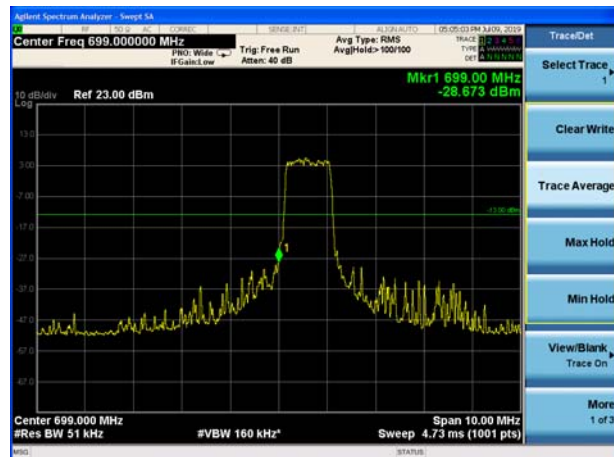


LTE Band 12 16QAM 1.4MHz CH-High, 100%RB

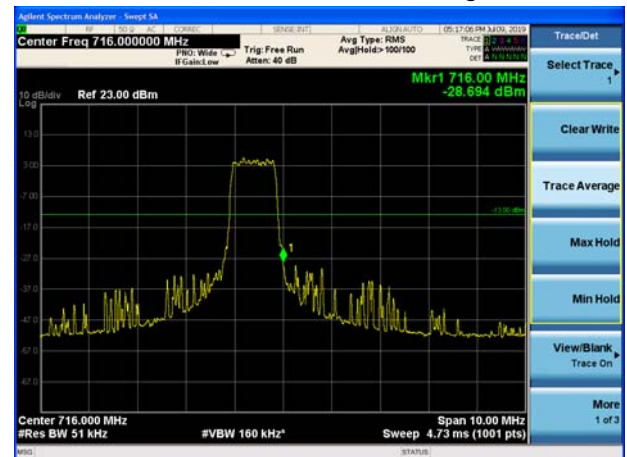


LTE Band 12 16QAM 3MHz CH-Low, 1 RB

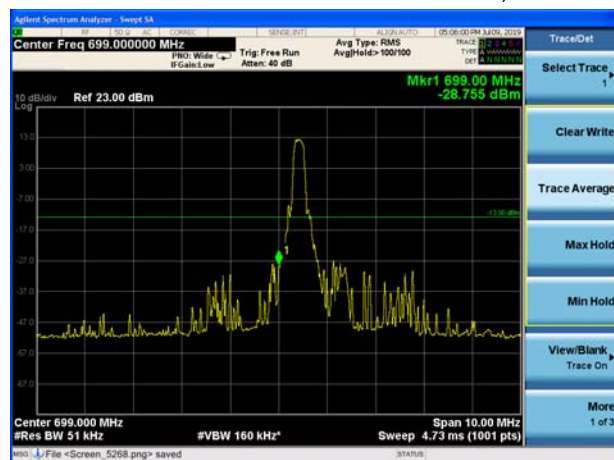


LTE Band 12 16QAM 3MHz CH-High, 1 RB

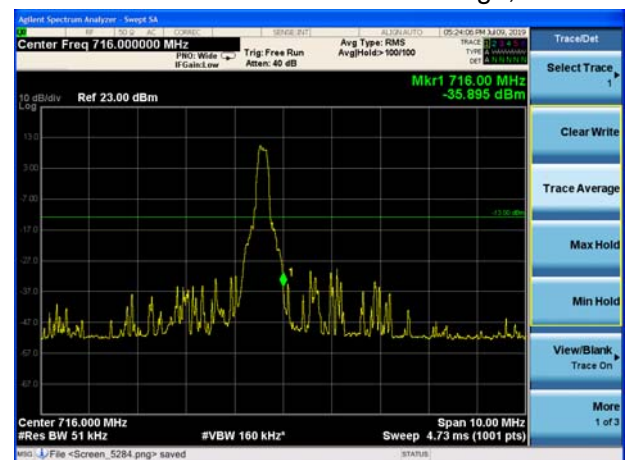

LTE Band 12 16QAM 3MHz CH-Low, 100%RB

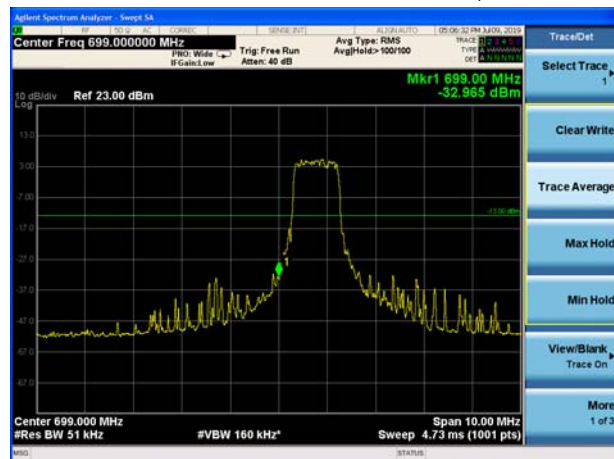


LTE Band 12 16QAM 3MHz CH-High, 100%RB

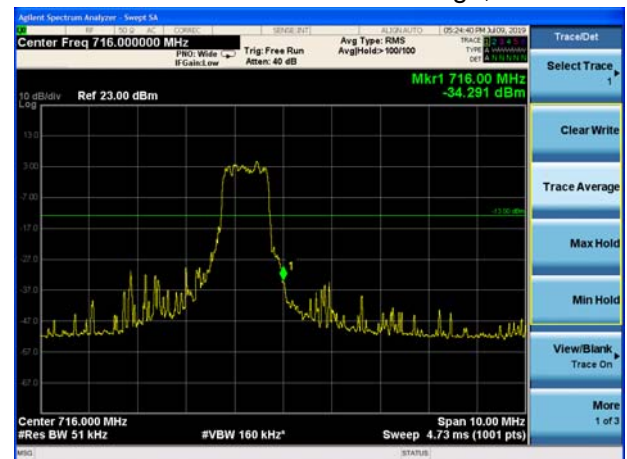







LTE Band 12 16QAM 5MHz CH-Low, 1 RB

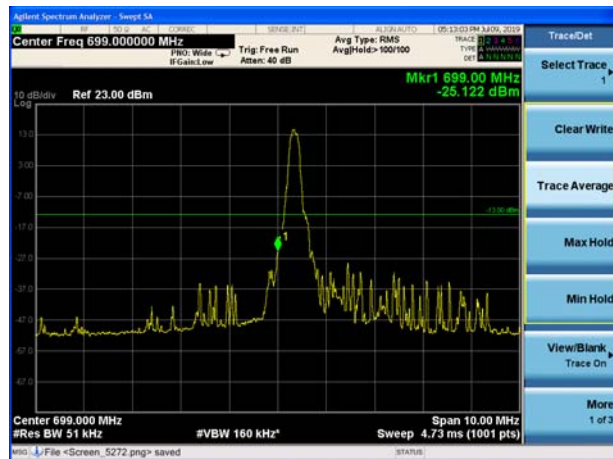


LTE Band 12 16QAM 5MHz CH-High, 1 RB

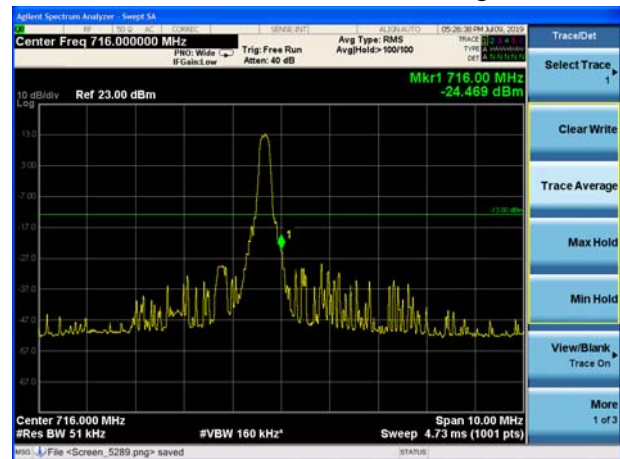


LTE Band 12 16QAM 5MHz CH-Low, 100%RB

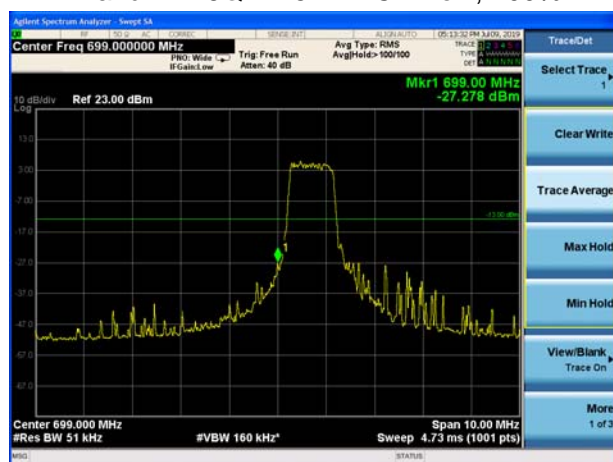


LTE Band 12 16QAM 5MHz CH-High, 100%RB

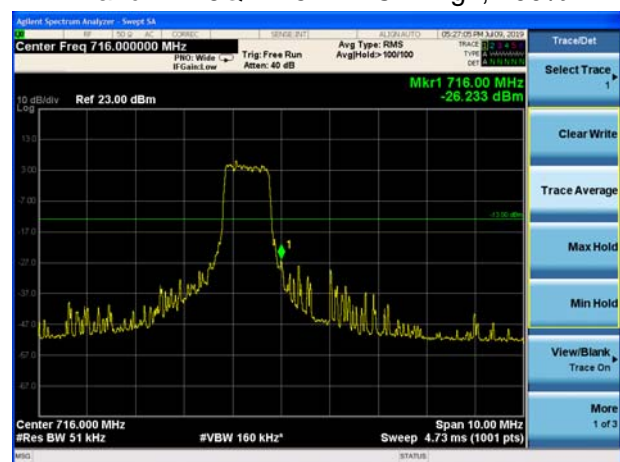

LTE Band 12 16QAM 10MHz CH-Low, 1 RB

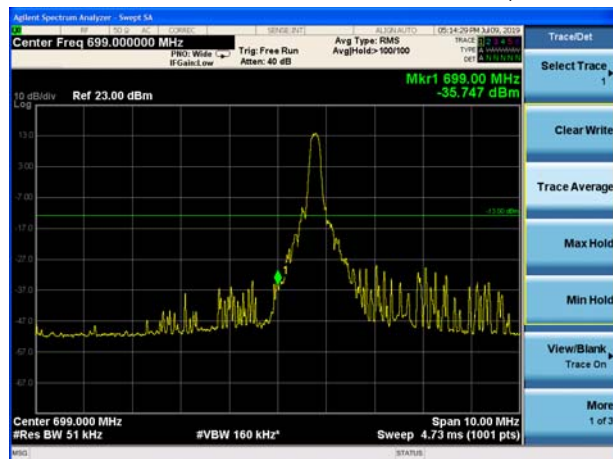


LTE Band 12 16QAM 10MHz CH-High, 1 RB

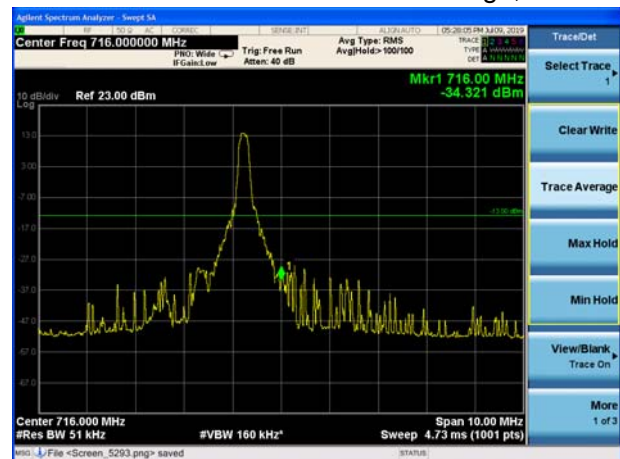




## LTE Band 12 16QAM 10MHz CH-Low, 100%RB

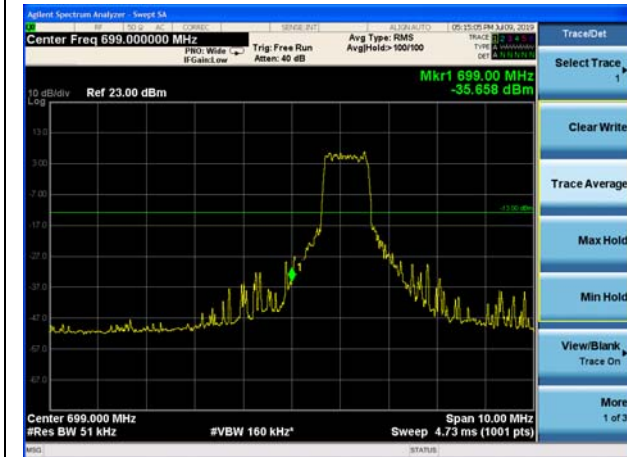

## LTE Band 12 16QAM 10MHz CH-High, 100%RB

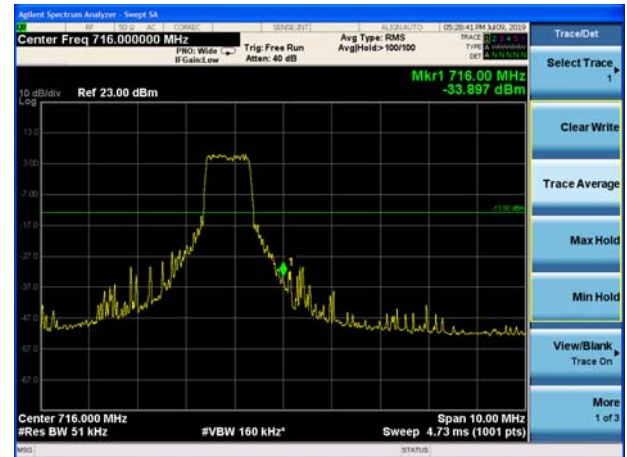

## 4.5 Peak-to-Average Power Ratio (PAPR)

### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

### Test Setup

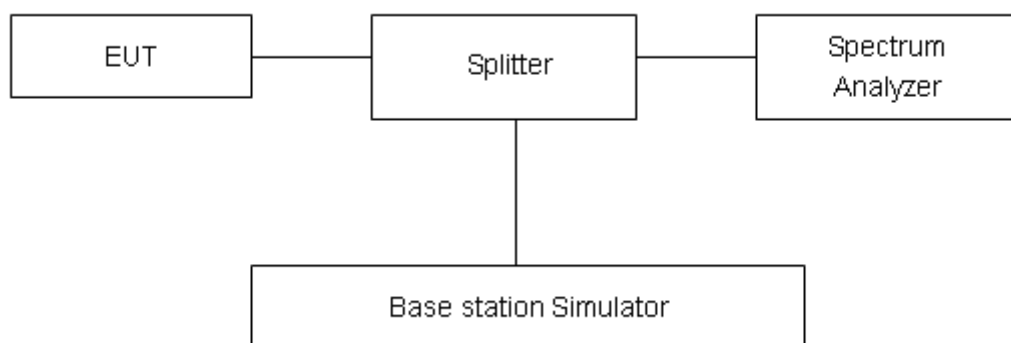

### Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**
**Variant**

| Mode   | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | Peak-to-Average Power Ratio<br>(PAPR) |          |          |
|--------|-----------|------------|----------------------------|---------------------------------------|----------|----------|
|        |           |            |                            | Peak(dBm)                             | Avg(dBm) | PAPR(dB) |
| Band12 | 1.4MHz    | QPSK       | 23095/707.5                | 26.04                                 | 16.58    | 9.46     |
|        |           | 16QAM      | 23095/707.5                | 26.88                                 | 16.35    | 10.53    |
|        | 3MHz      | QPSK       | 23095/707.5                | 25.92                                 | 15.65    | 10.27    |
|        |           | 16QAM      | 23095/707.5                | 26.79                                 | 16.18    | 10.61    |
|        | 5MHz      | QPSK       | 23095/707.5                | 27.06                                 | 17.45    | 9.61     |
|        |           | 16QAM      | 23095/707.5                | 27.06                                 | 16.16    | 10.90    |
|        | 10MHz     | QPSK       | 23095/707.5                | 27.11                                 | 18.09    | 9.02     |
|        |           | 16QAM      | 23095/707.5                | 27.77                                 | 18.17    | 9.60     |

## 4.6 Frequency Stability

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### 2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

### Test setup

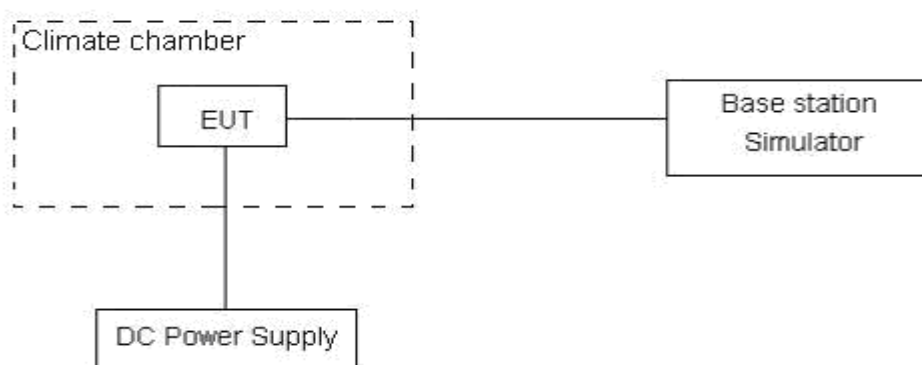

### Limits

No specific frequency stability requirements in part 27.54

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U=0.01$ ppm.

**Test Result**

| LTE Band 12( BANDWIDTH, 10MHz) |         |                    |                    |                              |                              |         |
|--------------------------------|---------|--------------------|--------------------|------------------------------|------------------------------|---------|
| Condition                      |         | Freq.Error<br>(Hz) | Freq.Error<br>(Hz) | Frequency<br>Stability (ppm) | Frequency<br>Stability (ppm) | Verdict |
| BANDWIDTH                      | 10MHz   |                    |                    |                              |                              |         |
| Temperature                    | Voltage | 16QAM              | QPSK               | 16QAM                        | QPSK                         |         |
| Normal (25℃)                   | Normal  | 1.72               | 13.22              | 0.00091                      | 0.00703                      | PASS    |
| Extreme (85℃)                  |         | 1.69               | 8.52               | 0.00090                      | 0.00453                      | PASS    |
| Extreme (80℃)                  |         | 3.93               | 16.58              | 0.00209                      | 0.00882                      | PASS    |
| Extreme (70℃)                  |         | 11.86              | 1.22               | 0.00631                      | 0.00065                      | PASS    |
| Extreme (60℃)                  |         | 10.05              | 16.20              | 0.00535                      | 0.00862                      | PASS    |
| Extreme (50℃)                  |         | 10.28              | 9.45               | 0.00547                      | 0.00503                      | PASS    |
| Extreme (40℃)                  |         | 10.05              | 8.74               | 0.00535                      | 0.00465                      | PASS    |
| Extreme (30℃)                  |         | 2.62               | 9.89               | 0.00140                      | 0.00526                      | PASS    |
| Extreme (20℃)                  |         | 16.54              | 1.66               | 0.00880                      | 0.00088                      | PASS    |
| Extreme (10℃)                  |         | 17.56              | 11.57              | 0.00934                      | 0.00615                      | PASS    |
| Extreme (0℃)                   |         | 4.41               | 9.03               | 0.00235                      | 0.00480                      | PASS    |
| Extreme (-10℃)                 |         | 1.99               | 14.86              | 0.00106                      | 0.00790                      | PASS    |
| Extreme (-20℃)                 |         | 13.79              | 15.88              | 0.00733                      | 0.00845                      | PASS    |
| Extreme (-30℃)                 |         | 14.75              | 3.50               | 0.00785                      | 0.00186                      | PASS    |
| Extreme (-40℃)                 |         | 5.88               | 13.32              | 0.00313                      | 0.00709                      | PASS    |
| 25℃                            | LV      | 4.43               | 13.76              | 0.00236                      | 0.00732                      | PASS    |
|                                | HV      | 15.99              | 2.45               | 0.00851                      | 0.00130                      | PASS    |

## 4.7 Spurious Emissions at Antenna Terminals


### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz for the carrier frequency, or RBW and VBW are set to 1MHz (other frequency), Sweep is set to ATUO. Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

### Test setup

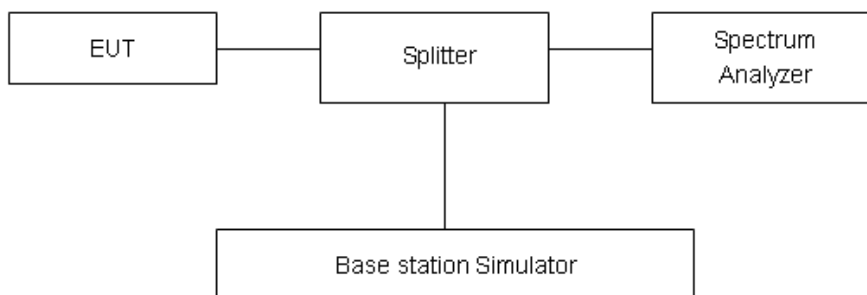

### Limits

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

|       |         |
|-------|---------|
| Limit | -13 dBm |
|-------|---------|

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency   | Uncertainty |
|-------------|-------------|
| 100kHz-2GHz | 0.684 dB    |
| 2GHz-18GHz  | 1.407 dB    |




## Test Result: PASS

## LTE Band 12 1.4MHz CH-Low 30MHz~1GHz

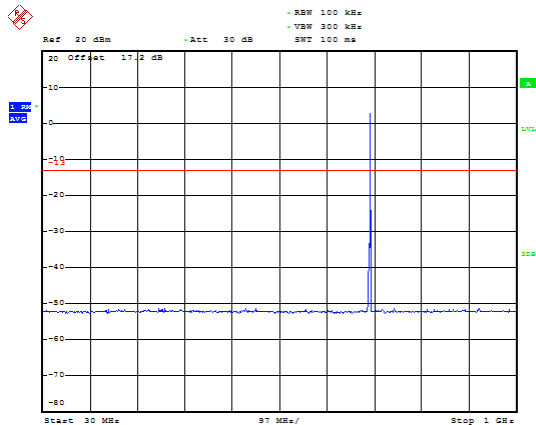


Date: 10.JUL.2019 12:25:49

## LTE Band 12 1.4MHz CH-Low 1GHz~9GHz

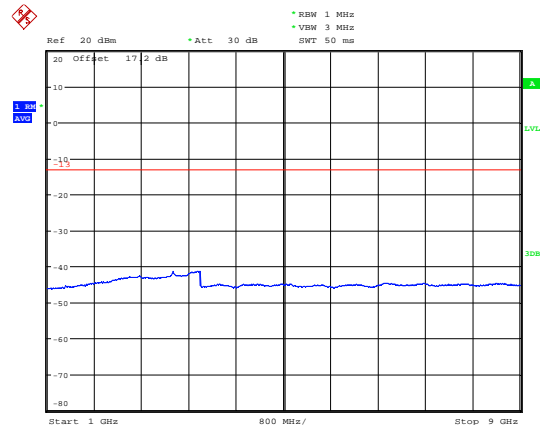


Date: 10.JUL.2019 12:37:57

## LTE Band 12 1.4MHz CH- Middle 30MHz~1GHz

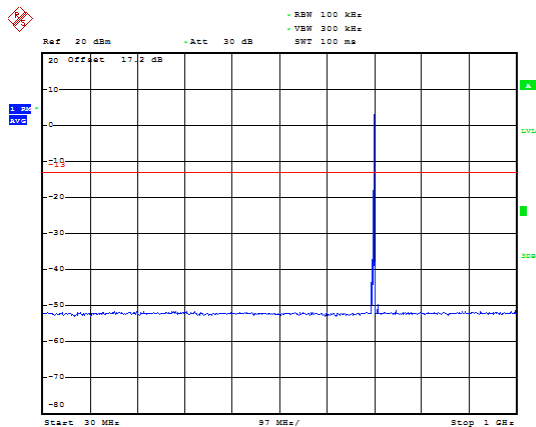


Date: 10.JUL.2019 12:26:26

## LTE Band 12 1.4MHz CH- Middle 1GHz~9GHz

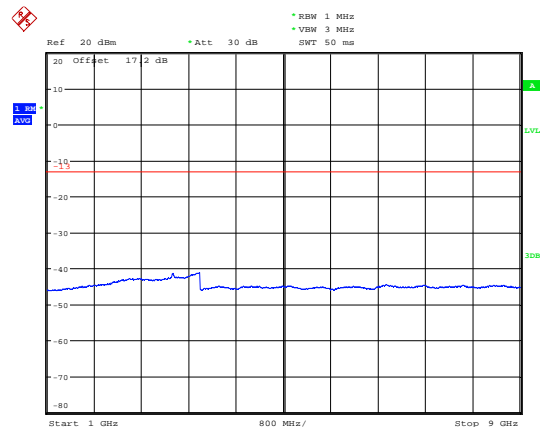


Date: 10.JUL.2019 12:38:48

## LTE Band 12 1.4MHz CH-High 30MHz~1GHz

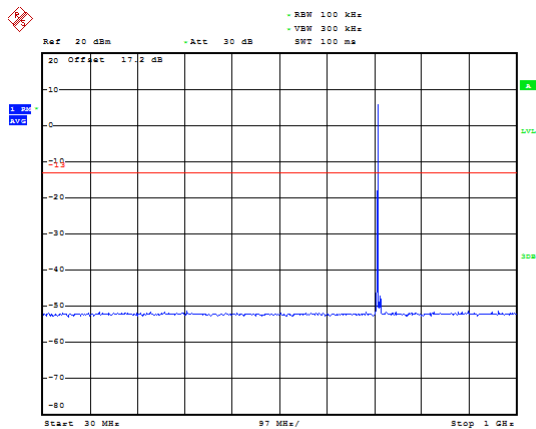

Date: 10.JUL.2019 12:27:17

## LTE Band 12 1.4MHz CH-High 1GHz~9GHz

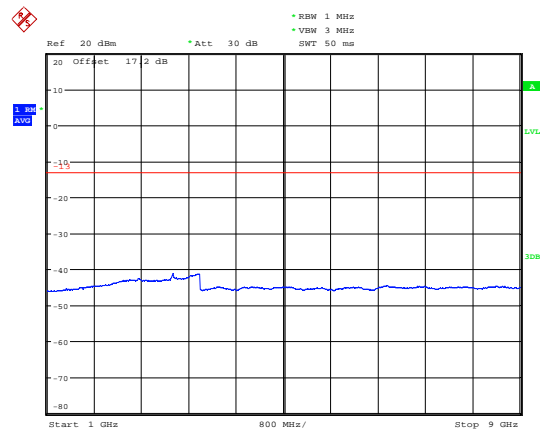


Date: 10.JUL.2019 12:39:05






## LTE Band 12 3MHz CH-Low 30MHz~1GHz

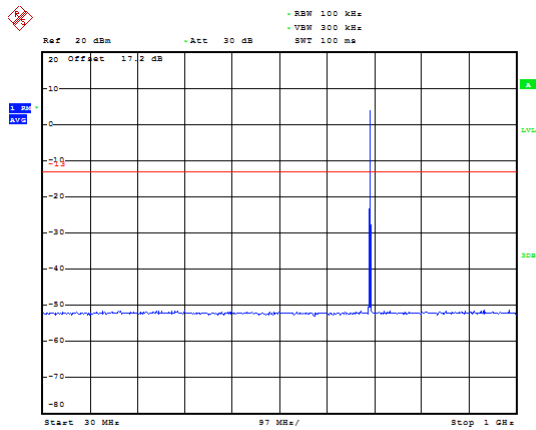


Date: 10.JUL.2019 12:30:03

## LTE Band 12 3MHz CH-Low 1GHz~9GHz

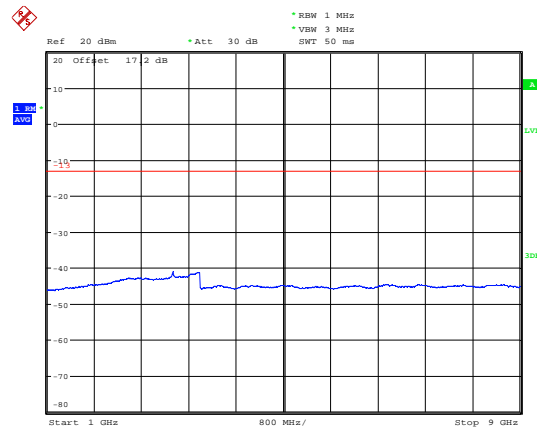


Date: 10.JUL.2019 12:40:02

## LTE Band 12 3MHz CH- Middle 30MHz~1GHz

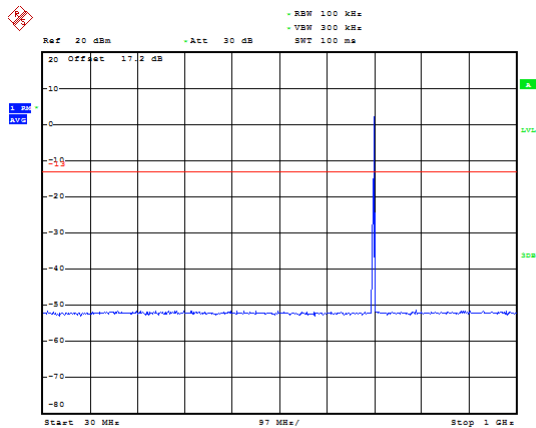


Date: 10.JUL.2019 12:30:32

## LTE Band 12 3MHz CH- Middle 1GHz~9GHz

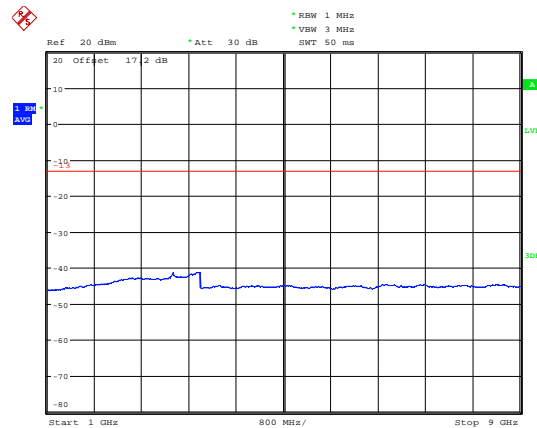


Date: 10.JUL.2019 12:40:35

## LTE Band 12 3MHz CH-High 30MHz~1GHz

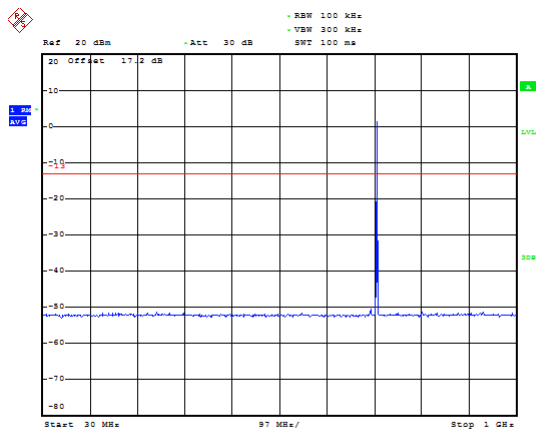

Date: 10.JUL.2019 12:31:28


## LTE Band 12 3MHz CH-High 1GHz~9GHz

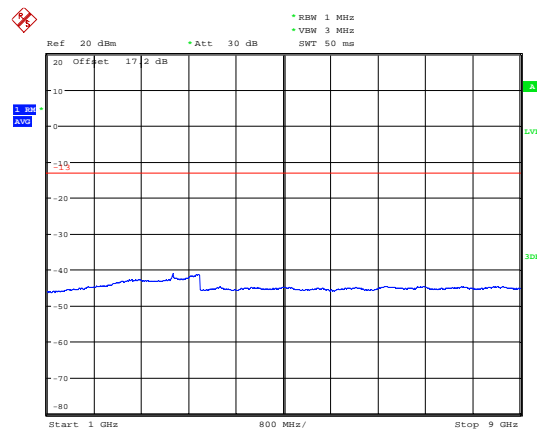

Date: 10.JUL.2019 12:40:54




## LTE Band 12 5MHz CH-Low 30MHz~1GHz

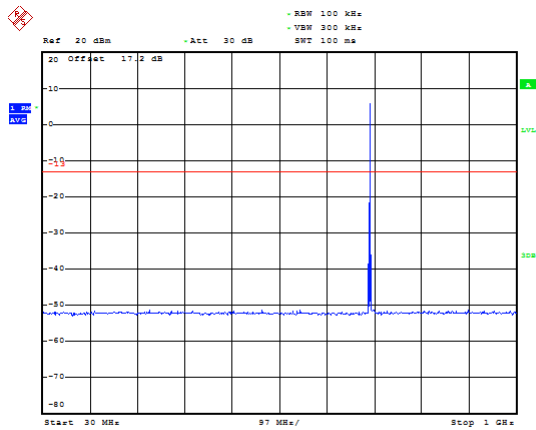


Date: 10.JUL.2019 12:32:18

## LTE Band 12 5MHz CH-Low 1GHz~9GHz

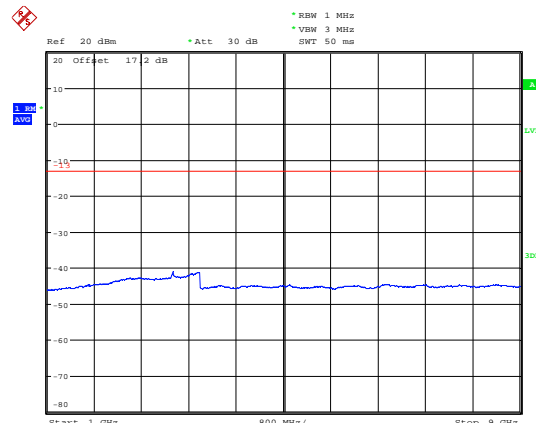


Date: 10.JUL.2019 12:41:10

## LTE Band 12 5MHz CH- Middle 30MHz~1GHz

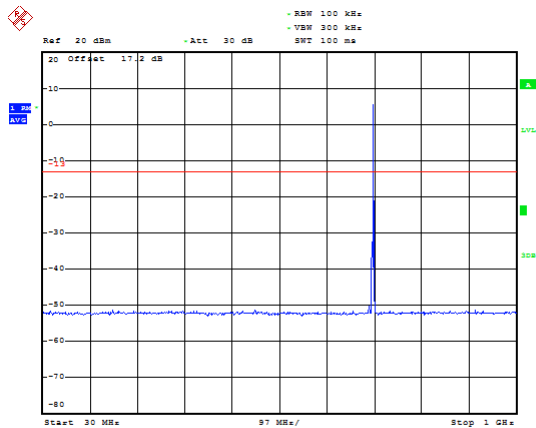


Date: 10.JUL.2019 12:32:40

## LTE Band 12 5MHz CH- Middle 1GHz~9GHz

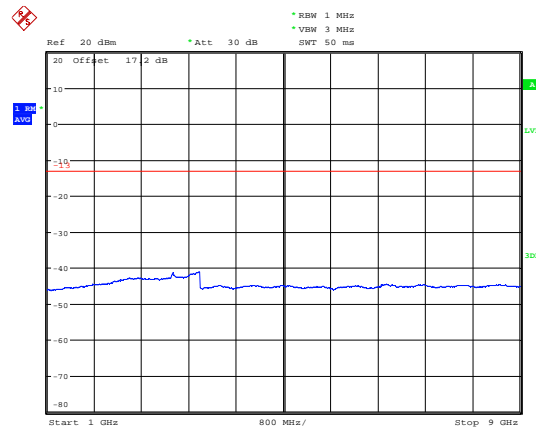


Date: 10.JUL.2019 12:41:37

## LTE Band 12 5MHz CH-High 30MHz~1GHz

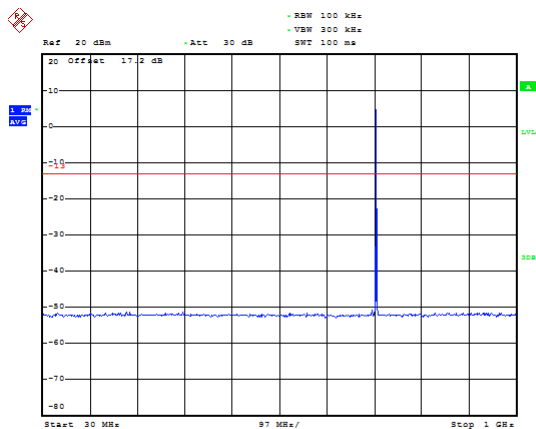

Date: 10.JUL.2019 12:33:19


## LTE Band 12 5MHz CH-High 1GHz~9GHz

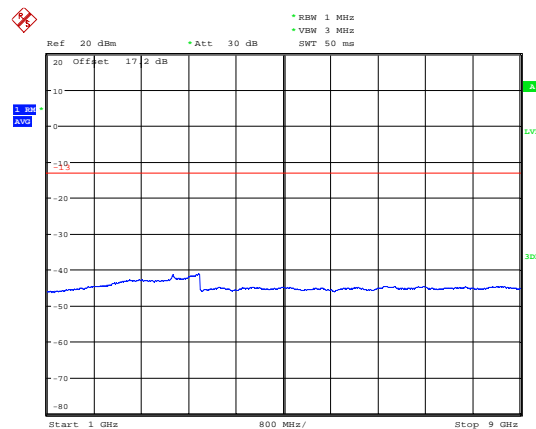

Date: 10.JUL.2019 12:42:08




## LTE Band 12 10MHz CH-Low 30MHz~1GHz

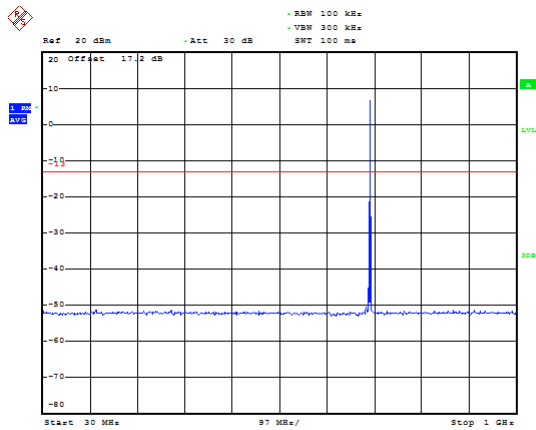


Date: 10.JUL.2019 12:34:00

## LTE Band 12 10MHz CH-Low 1GHz~9GHz

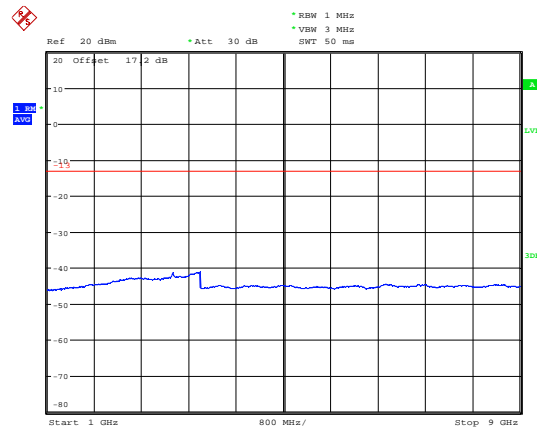


Date: 10.JUL.2019 12:36:57

## LTE Band 12 10MHz CH- Middle 30MHz~1GHz

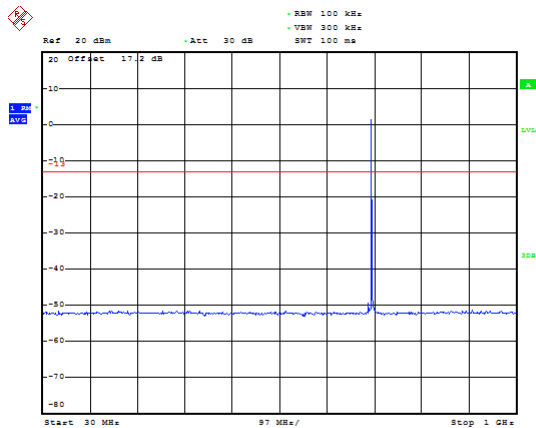


Date: 10.JUL.2019 12:34:35

## LTE Band 12 10MHz CH- Middle 1GHz~9GHz

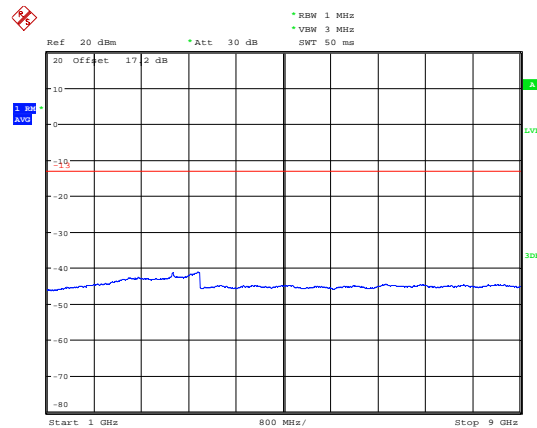


Date: 10.JUL.2019 12:37:30

## LTE Band 12 10MHz CH-High 30MHz~1GHz

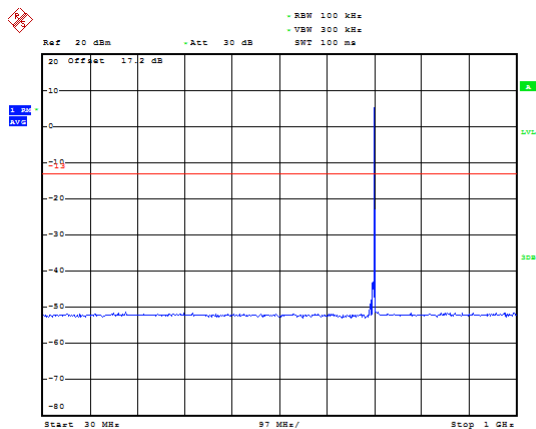

Date: 10.JUL.2019 12:35:40

## LTE Band 12 10MHz CH-High 1GHz~9GHz

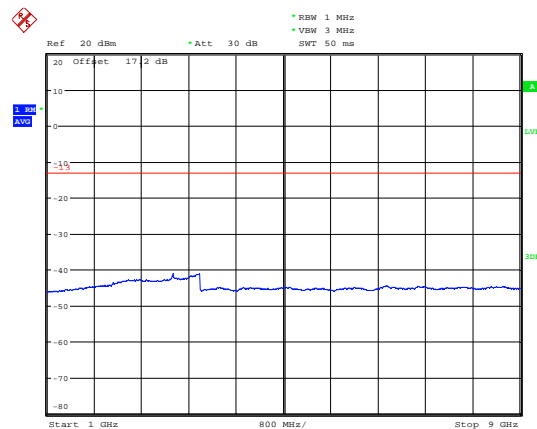

Date: 10.JUL.2019 12:36:25

## 4.8 Radiates Spurious Emission

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAG - Pcl + Ga

The measurement results are amend as described below:


Power(EIRP)=PMea- Pcl + Ga

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)


and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### Test setup

#### 30MHz~~~ 1GHz

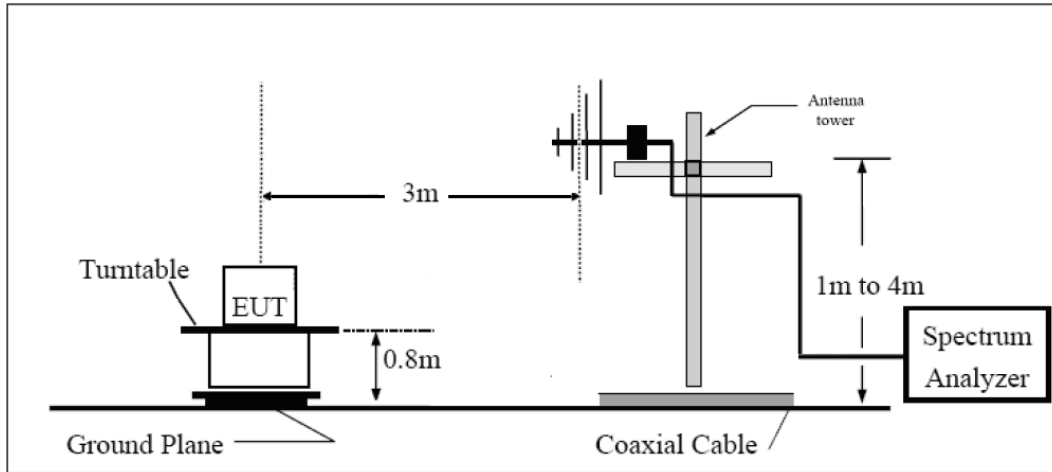

#### Above 1GHz

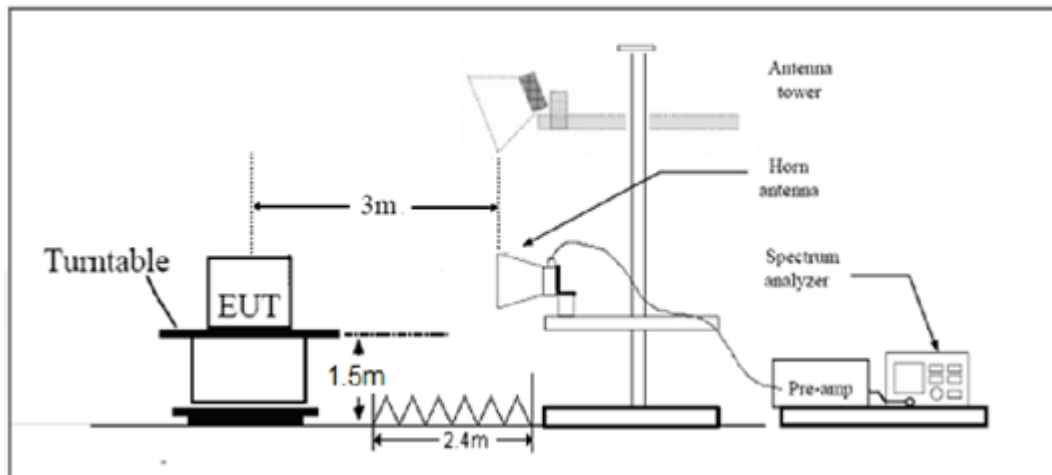

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

### Limits

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

|       |         |
|-------|---------|
| Limit | -13 dBm |
|-------|---------|



## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = \pm 1.96$ ,  $U = \pm 3.55$  dB.

## Test Result

LTE Band 12 QPSK 1.4MHz CH-Middle, RB 1

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2        | 1415.00         | -64.10   | 2.00            | 10.75      | Horizontal           | -57.50          | -13.00      | 44.50       | 45            |
| 3        | 2122.50         | -47.71   | 2.51            | 11.05      | Horizontal           | -41.32          | -13.00      | 28.32       | 90            |
| 4        | 2830.00         | -55.86   | 4.20            | 11.15      | Horizontal           | -51.06          | -13.00      | 38.06       | 315           |
| 5        | 3537.50         | -62.44   | 5.20            | 11.15      | Horizontal           | -58.64          | -13.00      | 45.64       | 90            |
| 6        | 4245.00         | -60.99   | 5.50            | 11.95      | Horizontal           | -56.69          | -13.00      | 43.69       | 315           |
| 7        | 4952.50         | -60.40   | 5.70            | 13.55      | Horizontal           | -54.70          | -13.00      | 41.70       | 225           |
| 8        | 5660.00         | -58.99   | 6.30            | 13.75      | Horizontal           | -53.69          | -13.00      | 40.69       | 135           |
| 9        | 6367.50         | -58.84   | 6.80            | 13.85      | Horizontal           | -53.94          | -13.00      | 40.94       | 45            |
| 10       | 7075.00         | -53.85   | 6.90            | 14.25      | Horizontal           | -48.65          | -13.00      | 35.65       | 0             |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 5MHz CH-Middle, RB 1

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2        | 1415.00         | -59.79   | 2.00            | 10.75      | Horizontal           | -53.19          | -13.00      | 40.19       | 225           |
| 3        | 2122.50         | -47.55   | 2.51            | 11.05      | Horizontal           | -41.16          | -13.00      | 28.16       | 135           |
| 4        | 2830.00         | -57.05   | 4.20            | 11.15      | Horizontal           | -52.25          | -13.00      | 39.25       | 180           |
| 5        | 3537.50         | -63.44   | 5.20            | 11.15      | Horizontal           | -59.64          | -13.00      | 46.64       | 90            |
| 6        | 4245.00         | -60.65   | 5.50            | 11.95      | Horizontal           | -56.35          | -13.00      | 43.35       | 315           |
| 7        | 4952.50         | -61.18   | 5.70            | 13.55      | Horizontal           | -55.48          | -13.00      | 42.48       | 180           |
| 8        | 5660.00         | -59.66   | 6.30            | 13.75      | Horizontal           | -54.36          | -13.00      | 41.36       | 225           |
| 9        | 6367.50         | -57.26   | 6.80            | 13.85      | Horizontal           | -52.36          | -13.00      | 39.36       | 90            |
| 10       | 7075.00         | -53.85   | 6.90            | 14.25      | Horizontal           | -48.65          | -13.00      | 35.65       | 180           |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 12 QPSK 10MHz CH-Middle, RB 1

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2        | 1415.00         | -61.30   | 2.00            | 10.75      | Horizontal           | -54.70          | -13.00      | 41.70       | 180           |
| 3        | 2122.50         | -47.72   | 2.51            | 11.05      | Horizontal           | -41.33          | -13.00      | 28.33       | 135           |
| 4        | 2830.00         | -59.04   | 4.20            | 11.15      | Horizontal           | -54.24          | -13.00      | 41.24       | 45            |
| 5        | 3537.50         | -63.04   | 5.20            | 11.15      | Horizontal           | -59.24          | -13.00      | 46.24       | 45            |
| 6        | 4245.00         | -61.21   | 5.50            | 11.95      | Horizontal           | -56.91          | -13.00      | 43.91       | 135           |
| 7        | 4952.50         | -61.05   | 5.70            | 13.55      | Horizontal           | -55.35          | -13.00      | 42.35       | 315           |
| 8        | 5660.00         | -59.88   | 6.30            | 13.75      | Horizontal           | -54.58          | -13.00      | 41.58       | 225           |
| 9        | 6367.50         | -58.02   | 6.80            | 13.85      | Horizontal           | -53.12          | -13.00      | 40.12       | 45            |
| 10       | 7075.00         | -54.55   | 6.90            | 14.25      | Horizontal           | -49.35          | -13.00      | 36.35       | 0             |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.




## 5 Main Test Instruments

| Name                   | Manufacturer | Type              | Serial Number | Calibration Date | Expiration Date |
|------------------------|--------------|-------------------|---------------|------------------|-----------------|
| Base Station Simulator | R&S          | CMW500            | 113824        | 2019-05-19       | 2020-05-18      |
| Power Splitter         | Hua Xiang    | SHX-GF2-2-13      | 10120101      | /                | /               |
| Spectrum Analyzer      | Key sight    | N9010A            | MY50210259    | 2019-05-19       | 2020-05-18      |
| Signal Analyzer        | R&S          | FSV30             | 100815        | 2018-12-16       | 2019-12-15      |
| Loop Antenna           | SCHWARZBECK  | FMZB1519          | 1519-047      | 2017-09-26       | 2019-09-25      |
| Trilog Antenna         | SCHWARZBECK  | VUBL 9163         | 9163-201      | 2017-11-18       | 2019-11-17      |
| Horn Antenna           | R&S          | HF907             | 100126        | 2018-07-07       | 2020-07-06      |
| Horn Antenna           | ETS-Lindgren | 3160-09           | 00102643      | 2018-06-20       | 2020-06-19      |
| Horn Antenna           | STEATITE     | QSH-SL-26-40-K-15 | 16779         | 2017-07-20       | 2019-07-19      |
| Signal generator       | R&S          | SMB 100A          | 102594        | 2019-05-19       | 2020-05-18      |
| Climatic Chamber       | ESPEC        | SU-242            | 93000506      | 2017-12-17       | 2020-12-16      |
| Preamplifier           | R&S          | SCU18             | 102327        | 2019-05-19       | 2020-05-18      |
| MOB COMMS DC SUPPLY    | Keysight     | 66319D            | MY43004105    | 2019-05-19       | 2020-05-18      |
| RF Cable               | Agilent      | SMA 15cm          | 0001          | 2019-06-14       | 2019-09-13      |
| Software               | R&S          | EMC32             | 9.26.0        | /                | /               |

## ANNEX A: EUT Appearance and Test Setup

### A.1 EUT Appearance

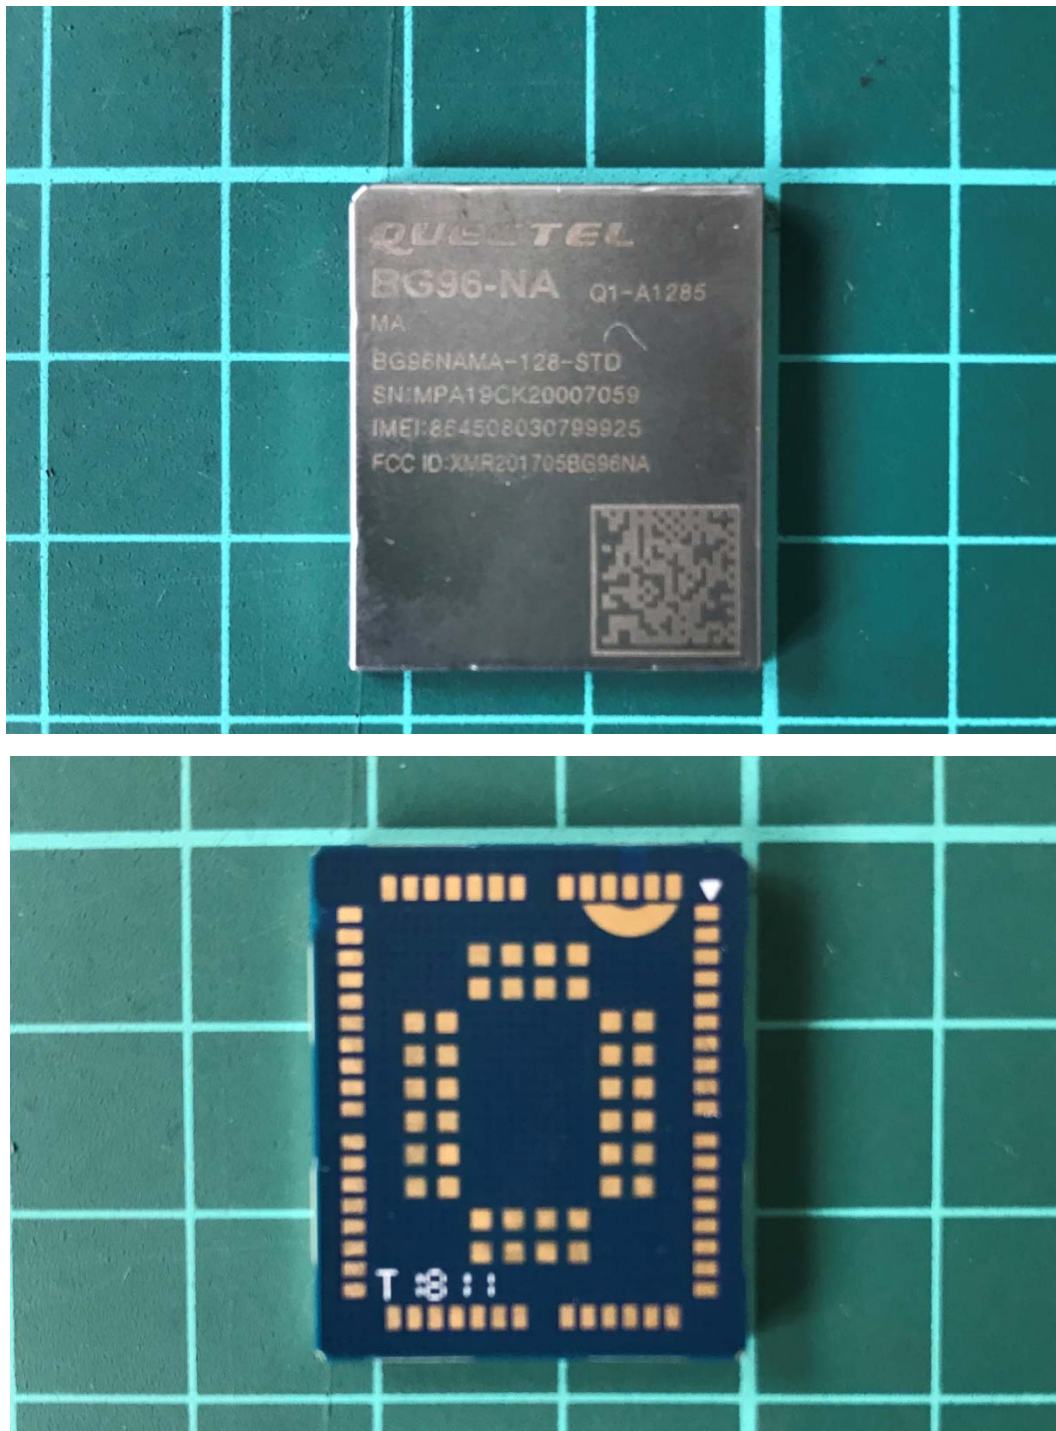



a: EUT

Picture 1 EUT and Accessory



## A.2 Test Setup



30MHz ~ 1GHz



Above 1GHz

Picture 2: Radiated Spurious Emissions Test setup

## ANNEX B: Product Change Description

### Statement

We **Quectel Wireless Solutions Co., Ltd** declare the following models.

**Product Name:** LTE Cat M1 Module

**Model Number:** BG96-NA

**Hardware Version:** R1.0

| Module  | Category | Supported Band |
|---------|----------|----------------|
| BG96-NA | CAT M1   | B2/B4/B12/B13  |

The HW design of BG96-NA is exactly the same with before, it just increases B2/B12. Because B2 and B12 were disabled through software before and now be enabled. The hardware design and software feature are exactly the same.

The change will not impact RF performance for original frequency bands.

Your assistance on this matter is highly appreciated.

Sincerely,

Name: Jean Hu

Title: Certification Section