



FCC PART 15.247 TEST REPORT

For

JEM ACCESSORIES INC.

32 Brunswick Avenue Edison, New Jersey, United States 08817

FCC ID: 2AHAS-XBA91010

Report Type: Product Type:

Original Report 3.5MMBTAUDIO ADAPTER

Report Number: RSZ181206830-00

Report Date: 2019-02-13

Rocky Kang

Reviewed By: RF Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Rocky Kang

Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "**".

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
SPECIAL ACCESSORIES	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	11
APPLICABLE STANDARD	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
CORRECTED FACTOR & MARGIN CALCULATION	
TEST RESULTS SUMMARYTEST DATA	
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST I ROCEDURE	

FCC §15.247(a) (1) - 20 dB EMISSION BANDWIDTH	32
APPLICABLE STANDARD	32
TEST PROCEDURE	
TEST DATA	
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	
TEST DATA	
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	39
APPLICABLE STANDARD	39
TEST PROCEDURE	
TEST DATA	
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	50
APPLICABLE STANDARD	50
TEST PROCEDURE	
TEST DATA	
FCC §15.247(d) - BAND EDGES TESTING	51
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	3.5MMBTAUDIO ADAPTER
Model	XBA9-1010-BLK
Frequency Range	2402-2480MHz
Transmit Power	-4.93dBm
Modulation Technique	GFSK, π/4-DQPSK
Antenna Specification	-3.0 dBi
Voltage Range	DC 3.7V from battery
Date of Test	Oct 18,2018~Dec 17,2018
Sample Serial number	181206830
Received date	2018-10-18
Sample/EUT Status	Good condition

Report No.: RSZ181206830-00

Objective

This test report is prepared on behalf of *JEM ACCESSORIES INC*. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 55

Measurement Uncertainty

Para	meter	Uncertainty	
Occupied Char	nnel Bandwidth	±5%	
RF Output Power	with Power meter	±0.5dB	
RF conducted to	est with spectrum	±1.5dB	
AC Power Lines C	onducted Emissions	±1.95dB	
Emissions,	Below 1GHz	±4.75dB	
Radiated	Above 1GHz	±4.88dB	
Temperature		±3°C	
Humidity		±6%	
Supply	voltages	±0.4%	

Report No.: RSZ181206830-00

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15.247 Page 5 of 55

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

"FCC asistant 2.4.exe" exercise software was used with power level 9.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Adapter	RD0501000- USBA-18MG	N/A
N/A	Earphone	N/A	N/A

Report No.: RSZ181206830-00


External I/O Cable

Cable Description	Length (m)	From Port	То
Un-shielding Detachable USB Cable	0.5	EUT	Adapter

FCC Part 15.247 Page 6 of 55

Block Diagram of Test Setup

For conducted emission:

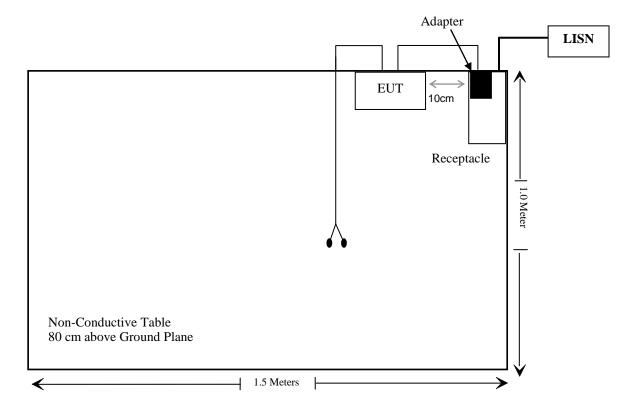

FCC Part 15.247 Page 7 of 55

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Report No.: RSZ181206830-00

FCC Part 15.247 Page 8 of 55

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date		
Conducted Emissions Test							
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2018-07-11	2019-07-11		
Rohde & Schwarz	LISN	ENV216	3560.6650.12- 101613-Yb	2017-12-21	2018-12-21		
Rohde & Schwarz	Rohde & Schwarz Transient Limiter		DE25985	2018-11-21	2019-05-12		
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR		
Un-known	Conducted Emission Cable	78652	UF A210B-1- 0720-504504	2018-11-12	2019-05-12		
	Radia	ated Emission T	'est				
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31		
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-06-23	2019-06-23		
COM-POWER	Pre-amplifier	PA-122	181919	2018-05-22	2018-11-22		
Sonoma instrument	Amplifier	310N	186238	2018-05-12	2019-11-12		
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21		
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11		
Ducommun technologies	RF Cable	UFA147A- 2362-100100	MFR64639 231029-003	2018-08-01	2019-02-01		
Ducommun technologies	RF Cable	104PEA	218124002	2018-05-21	2018-11-21		
Ducommun technologies	RF Cable	RG-214	1	2018-05-21	2018-11-21		
Ducommun technologies	RF Cable	RG-214	2	2018-05-21	2018-11-21		
Ducommun Technologies	Horn Antenna	ARH-4223- 02	1007726-04	2017-12-29	2020-12-28		
Heatsink Required	Amplifier	QLW- 18405536-J0	15964001002	2018-08-01	2019-02-01		
Sinoscite	Band Reject Filter	BSF2402- 2480MN- 0898-001	99632	2018-05-21	2018-11-21		
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR		

Report No.: RSZ181206830-00

FCC Part 15.247 Page 9 of 55

Report No.: RSZ181206830-00

FCC Part 15.247 Page 10 of 55

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ181206830-00

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency	Maximum Tune-up power		Distance Calculat		Threshold	SAR Test
(MHz)	(dBm)	(mW)	(mm) Value		(1-g SAR)	Exclusion
2480	-4	0.4	5	0.13	3.0	Yes

Result: No Standalone SAR test is required

FCC Part 15.247 Page 11 of 55

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ181206830-00

Antenna Connector Construction

The EUT has one PCB antenna arrangement, which was permanently attached and the antenna gain is -3.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.


FCC Part 15.247 Page 12 of 55

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

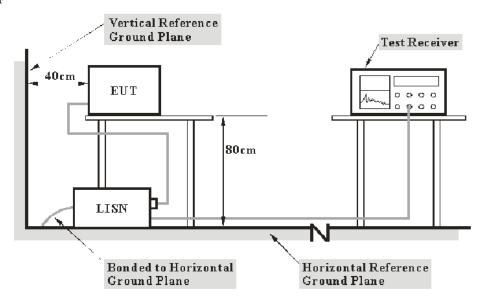

Report No.: RSZ181206830-00

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from FUT and at the

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 13 of 55

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Report No.: RSZ181206830-00

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2018-12-17.

EUT operation mode: transmitting & charging

FCC Part 15.247 Page 14 of 55

AC 120V/60 Hz, Line

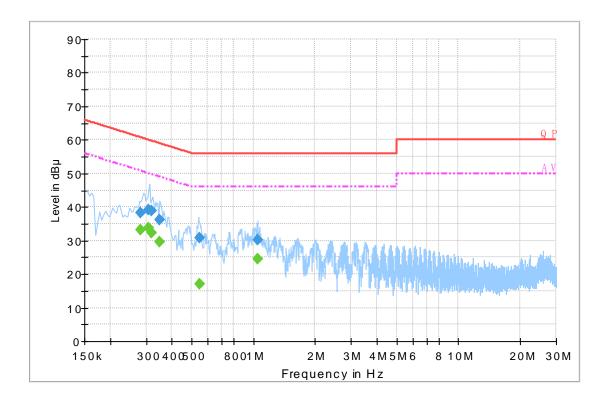


Report No.: RSZ181206830-00

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.281500	38.1	19.8	60.8	22.7	QP
0.309350	39.2	19.8	60.0	20.8	QP
0.317170	38.8	19.8	59.8	21	QP
0.348690	36.1	19.7	59.0	22.9	QP
0.545930	30.7	19.7	56.0	25.3	QP
1.050250	30.3	19.8	56.0	25.7	QP
0.281500	33.0	19.8	50.8	17.8	Ave.
0.309350	33.8	19.8	50.0	16.2	Ave.
0.317170	32.4	19.8	49.8	17.4	Ave.
0.348690	29.6	19.7	49.0	19.4	Ave.
0.545930	17.1	19.7	46.0	28.9	Ave.
1.050250	24.6	19.8	46.0	21.4	Ave.

FCC Part 15.247 Page 15 of 55

AC 120V/60 Hz, Neutral

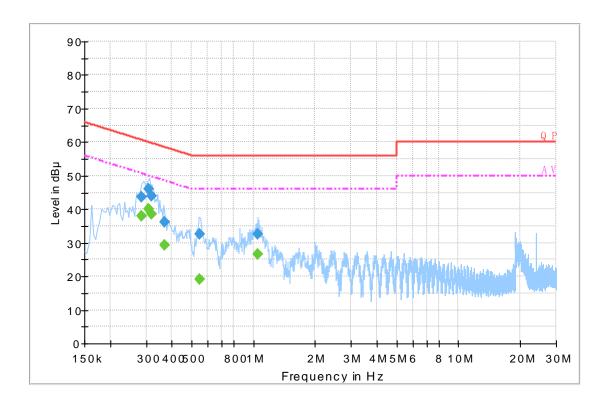

Report No.: RSZ181206830-00

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.285500	43.7	19.8	60.7	17.0	QP
0.309350	46.1	19.8	60.0	13.9	QP
0.317230	43.9	19.8	59.8	15.9	QP
0.368510	36.1	19.7	58.5	22.4	QP
0.545870	32.5	19.7	56.0	23.5	QP
1.050250	32.5	19.8	56.0	23.5	QP
0.285500	37.9	19.8	50.7	12.8	Ave.
0.309350	40.1	19.8	50.0	9.9	Ave.
0.317230	38.6	19.8	49.8	11.2	Ave.
0.368510	29.4	19.7	48.5	19.1	Ave.
0.545870	19.0	19.7	46.0	27.0	Ave.
1.050250	26.6	19.8	46.0	19.4	Ave.

Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor

3) Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 16 of 55

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS


Report No.: RSZ181206830-00

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

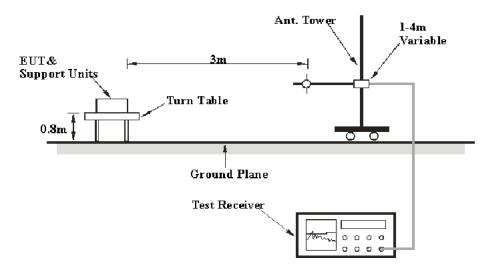

Above 1GHz:

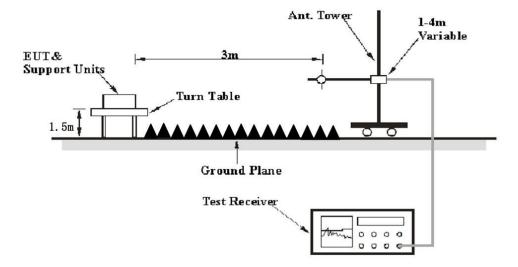

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

FCC Part 15.247 Page 17 of 55

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
ADOVE I GHZ	1 MHz	10 Hz	/	Average

Report No.: RSZ181206830-00

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247</u>.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \le L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

FCC Part 15.247 Page 18 of 55

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Baston Chen on 2018-10-18.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK mode, the worst case is $\pi/4$ -DQPSK Mode)

Report No.: RSZ181206830-00

FCC Part 15.247 Page 19 of 55

30 MHz~1 GHz: (the worst case is $\pi/4$ -DQPSK Mode, Low channel)

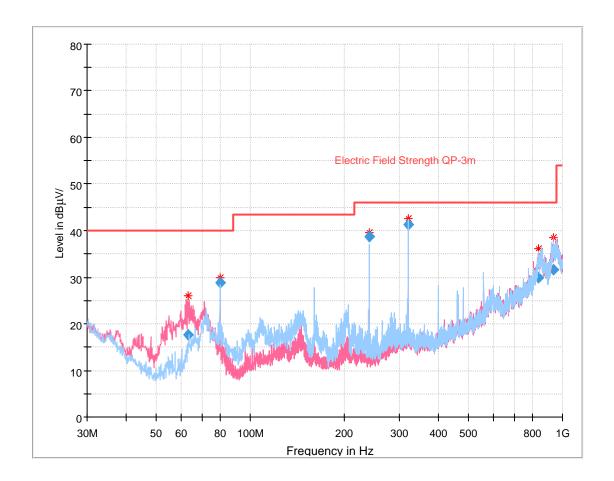

Report No.: RSZ181206830-00

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
63.040125	17.58	108.0	V	78.0	-20.3	40.00	22.42
80.026750	28.92	390.0	Н	34.0	-20.0	40.00	11.08
239.999750	38.78	107.0	Н	165.0	-14.1	46.00	7.22
319.993250	41.32	101.0	Н	89.0	-10.7	46.00	4.68
836.801375	29.84	101.0	Н	285.0	5.6	46.00	16.16
935.689375	31.68	179.0	V	67.0	8.3	46.00	14.32

FCC Part 15.247 Page 20 of 55

Б	Receiver		T4 - 1-1 -	Rx An	tenna	Corrected	Corrected	T,	M .
Frequency (MHz)	Reading (dBµV)	PK/QP/Ave.	Turntable Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Low Channel (2402 MHz)								
2390.00	27.45	PK	104	1.8	Н	33.00	60.45	74	13.55
2390.00	13.60	Ave.	104	1.8	Н	33.00	46.60	54	7.40
2483.50	27.43	PK	15	2.4	Н	33.20	60.63	74	13.37
2483.50	13.55	Ave.	15	2.4	Н	33.20	46.75	54	7.25
4804.00	47.72	PK	301	1.0	Н	7.88	55.60	74	18.40
4804.00	40.35	Ave.	301	1.0	Н	7.88	48.23	54	5.77
			Middle C	hannel	(2441 N	MHz)			
4882.00	46.61	PK	240	1.8	Н	9.21	56.82	74	18.18
4882.00	39.95	Ave.	240	1.8	Н	9.21	49.16	54	4.84
			High Cl	annel (2	2480 M	Hz)			
2390.00	27.46	PK	176	2.2	Н	33.00	60.46	74	13.54
2390.00	13.50	Ave.	176	2.2	Н	33.00	46.50	54	7.50
2483.50	27.53	PK	173	2.3	Н	33.20	60.73	74	13.27
2483.50	13.62	Ave.	173	2.3	Н	33.20	46.82	54	7.18
4960.00	47.60	PK	193	1.3	Н	9.07	56.67	74	17.33
4960.00	40.27	Ave.	333	2.4	Н	9.07	49.34	54	4.66

Report No.: RSZ181206830-00

Note:

 $Corrected\ Factor = Antenna\ factor\ (RX) + Cable\ Loss - Amplifier\ Factor$

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.


FCC Part 15.247 Page 21 of 55

Pre-scan with High channel Peak **Horizontal**

Report No.: RSZ181206830-00

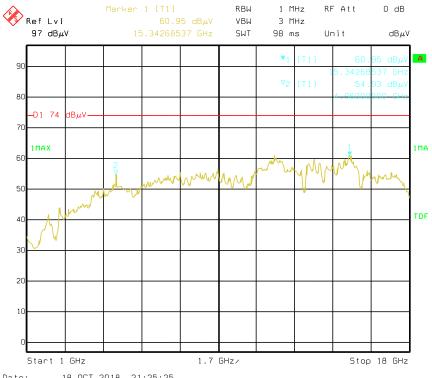




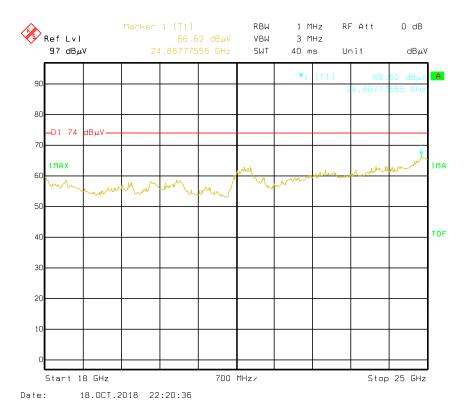



FCC Part 15.247 Page 22 of 55

Report No.: RSZ181206830-00

Vertical

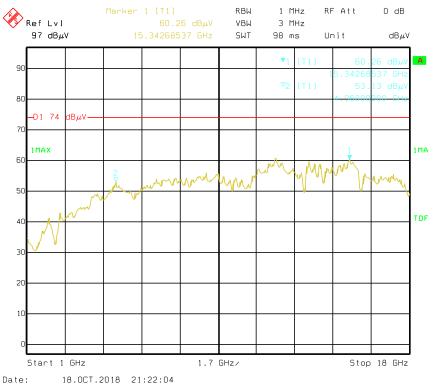




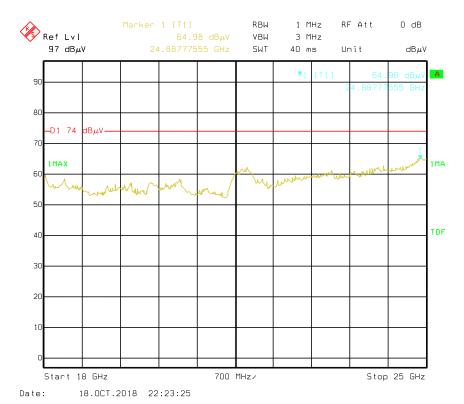


FCC Part 15.247 Page 23 of 55

Pre-scan for Average Horizontal


Report No.: RSZ181206830-00

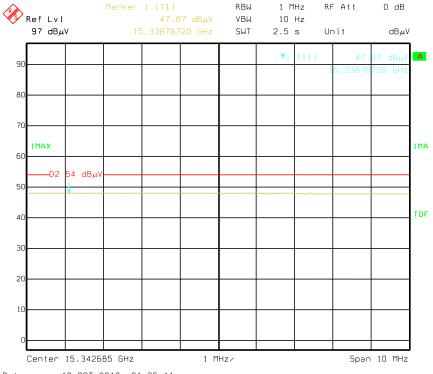




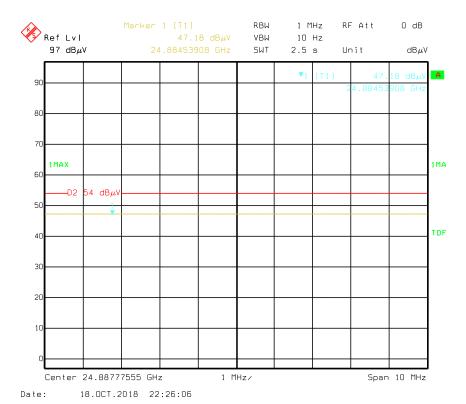


FCC Part 15.247 Page 24 of 55

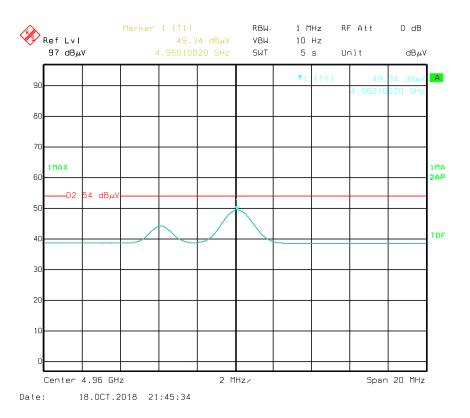


Vertical

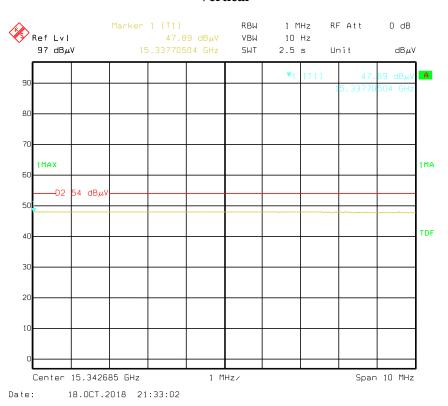

FCC Part 15.247 Page 25 of 55

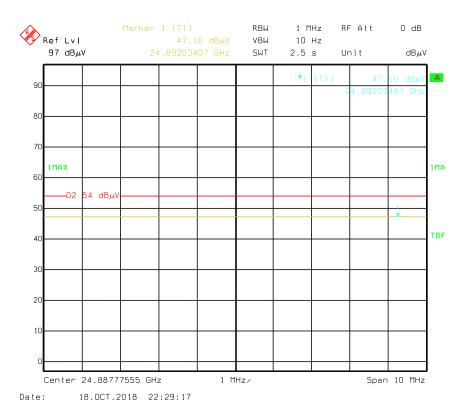

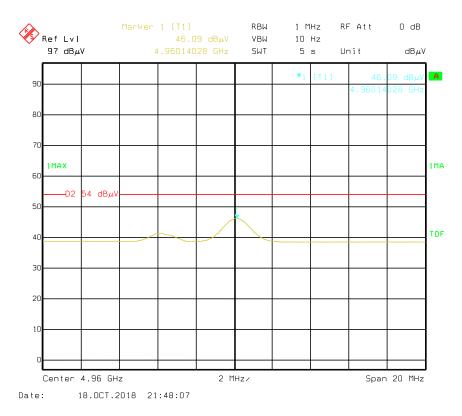

FCC Part 15.247 Page 26 of 55

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Report No.: RSZ181206830-00

Test Procedure

- 1. Set the EUT in transmitting mode, maxhold the channel.
- 2. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 ℃	
Relative Humidity:	56 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Moon Tan on 2018-12-17.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

FCC Part 15.247 Page 27 of 55


Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
			BDR(GFSK)		
Low	1.003	0.85	0.567	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.003	0.85	0.567	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	0.84	0.560	> two-thirds of the 20 dB bandwidth	Compliance
		E	DR(π/4-DQPSK)		
Low	1.003	1.2	0.800	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.000	1.2	0.800	> two-thirds of the 20 dB bandwidth	Compliance
High	1.000	1.21	0.807	> two-thirds of the 20 dB bandwidth	Compliance

Please refer to the following plots.

FCC Part 15.247 Page 28 of 55


BDR (GFSK): Low Channel

Report No.: RSZ181206830-00

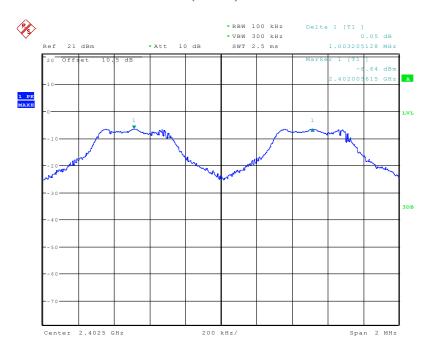

Date: 17.DEC.2018 15:17:41

BDR (GFSK): Middle Channel

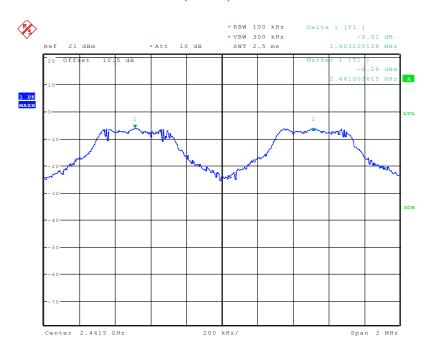


Date: 17.DEC.2018 15:20:04

FCC Part 15.247 Page 29 of 55


BDR (GFSK): High Channel

Report No.: RSZ181206830-00

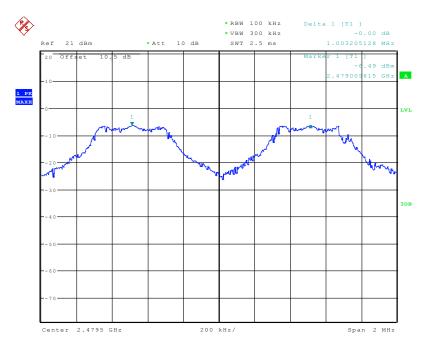

Date: 17.DEC.2018 15:21:56

EDR ($\pi/4$ -DQPSK): Low Channel

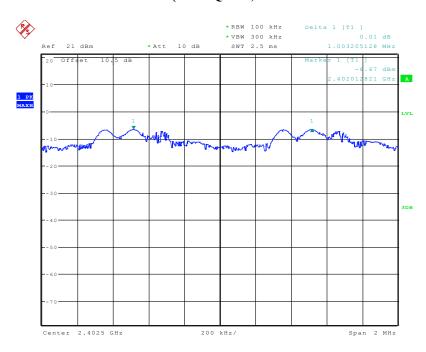


Date: 17.DEC.2018 15:31:31

FCC Part 15.247 Page 30 of 55


EDR ($\pi/4$ -DQPSK): Middle Channel

Report No.: RSZ181206830-00

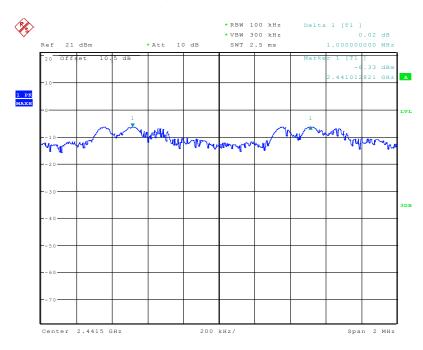

Date: 17.DEC.2018 15:28:28

EDR ($\pi/4$ -DQPSK): High Channel

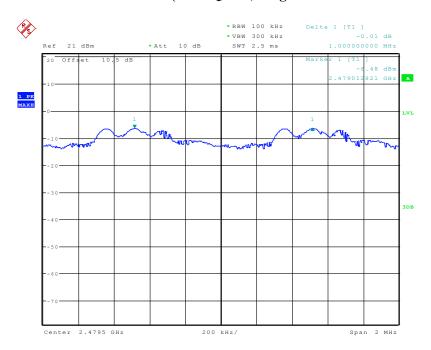

Date: 17.DEC.2018 15:26:21

FCC Part 15.247 Page 31 of 55

FCC $\S15.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ181206830-00

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-17.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

FCC Part 15.247 Page 32 of 55

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	
	Low	2402	0.85	
BDR (GFSK)	Middle	2441	0.85	
	High	2480	0.84	
	Low	2402	1.20	
EDR (π/4-DQPSK)	Middle	2441	1.20	
	High	2480	1.21	

BDR (GFSK): Low Channel

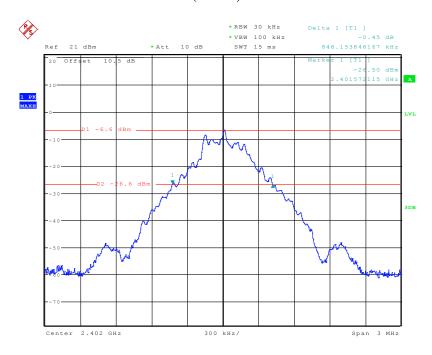


Date: 17.DEC.2018 15:13:36

FCC Part 15.247 Page 33 of 55


BDR (GFSK): Middle Channel

Report No.: RSZ181206830-00

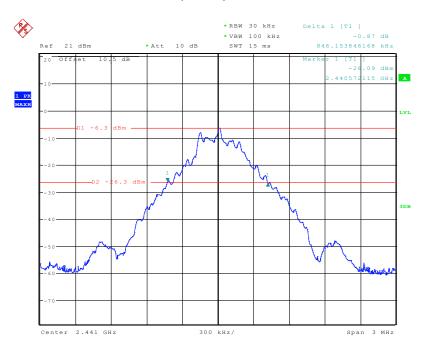

Date: 17.DEC.2018 15:12:19

BDR (GFSK): High Channel

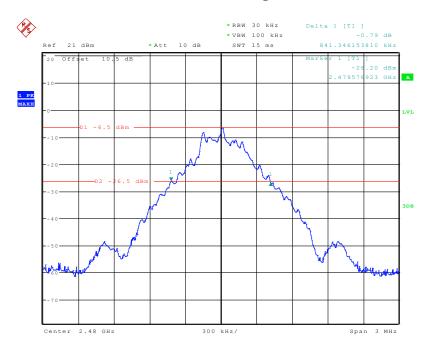


Date: 17.DEC.2018 15:10:01

FCC Part 15.247 Page 34 of 55


EDR ($\pi/4$ -DQPSK): Low Channel

Report No.: RSZ181206830-00

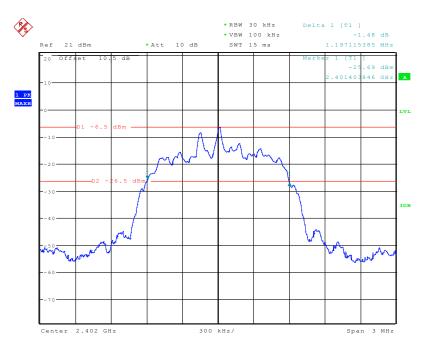

Date: 17.DEC.2018 15:05:58

EDR ($\pi/4$ -DQPSK): Middle Channel

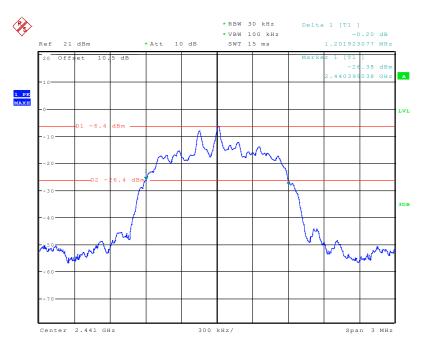


Date: 17.DEC.2018 15:07:31

FCC Part 15.247 Page 35 of 55

EDR ($\pi/4$ -DQPSK): High Channel

Report No.: RSZ181206830-00

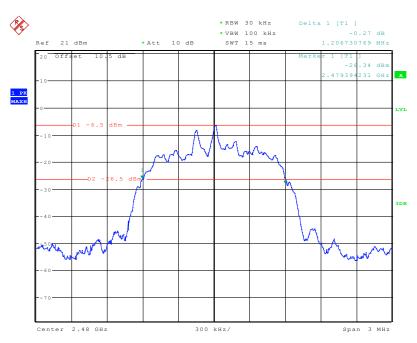

Date: 17.DEC.2018 15:08:26

FCC Part 15.247 Page 36 of 55

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ181206830-00

Test Procedure

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-17.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Frequency Range (MHz) Number of Hopping Channel (CH)		Limit (CH)	
BDR (GFSK)	2400-2483.5	79	≥15	
EDR (π/4-DQPSK)	2400-2483.5	79	≥15	

FCC Part 15.247 Page 37 of 55


BDR (GFSK): Number of Hopping Channels

Report No.: RSZ181206830-00

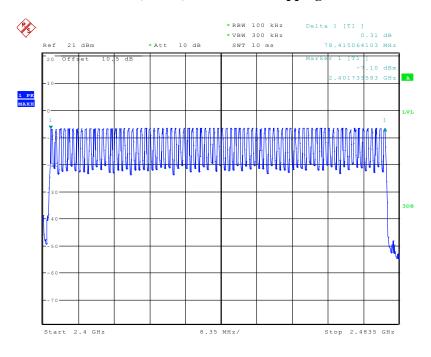

Date: 17.DEC.2018 16:04:53

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

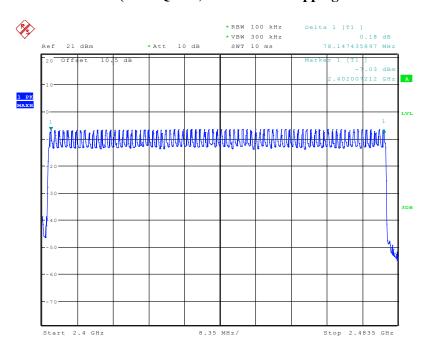

Date: 17.DEC.2018 15:59:33

FCC Part 15.247 Page 38 of 55

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ181206830-00

Test Procedure

- 1. The EUT was worked in channel hopping.
- 2. Set the RBW to: 1MHz.
- 3. Set the VBW \geq 3×RBW.
- 4. Set the span to 0Hz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-17.

EUT operation mode: Transmitting

FCC Part 15.247 Page 39 of 55

Test Result: Compliance. Please refer to following table and plots

 $BDR\ Mode\ (GFSK)$

Mode	Channel Pulse Width (ms)		Dwell Time (s)	Limit (s)	Result	
	Low	0.42	0.134	0.4	Pass	
DH 1	Middle	0.42	0.134	0.4	Pass	
DHI	High	0.42	0.134	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
	Low	1.70	0.272	0.4	Pass	
D 4	Middle	1.70	0.272	0.4	Pass	
DH 3	High	1.70	0.272	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
	Low	2.93	0.313	0.4	Pass	
DH 5	Middle	2.93	0.313	0.4	Pass	
DH 5	High	2.93	0.313	0.4	Pass	
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s						

Report No.: RSZ181206830-00


EDR Mode (\pi/4-DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result	
	Low	0.43	0.138	0.4	Pass	
DH 1	Middle	0.43	0.138	0.4	Pass	
DHI	High	0.43	0.138	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
	Low	1.70	0.272	0.4	Pass	
DH 3	Middle	1.70	0.272	0.4	Pass	
	High	1.70	0.272	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
	Low	2.94	0.314	0.4	Pass	
DH 5	Middle	2.94	0.314	0.4	Pass	
DHS	High	2.94	0.314	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s					

FCC Part 15.247 Page 40 of 55


BDR (GFSK)

Report No.: RSZ181206830-00

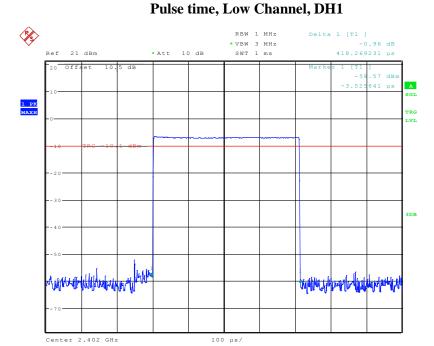

Date: 17.DEC.2018 16:08:03

Pulse time, Middle Channel, DH1

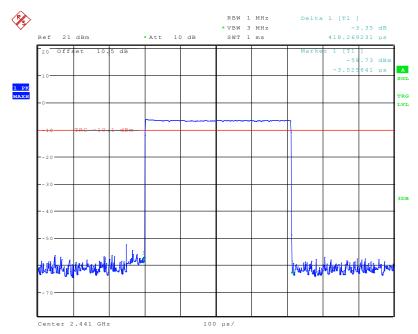


Date: 17.DEC.2018 16:08:46

FCC Part 15.247 Page 41 of 55


Pulse time, High Channel, DH1

Report No.: RSZ181206830-00

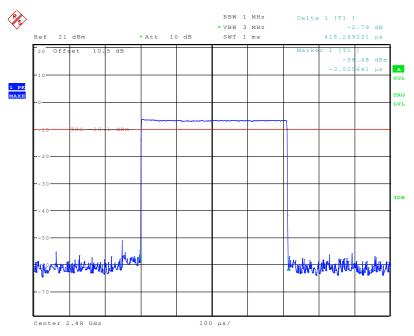

Date: 17.DEC.2018 16:09:01

Pulse time, Low Channel, DH3

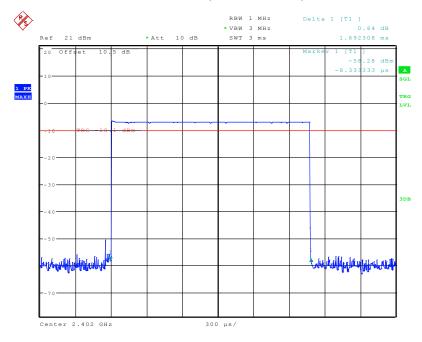


Date: 17.DEC.2018 16:13:21

FCC Part 15.247 Page 42 of 55


Pulse time, Middle Channel, DH3

Report No.: RSZ181206830-00

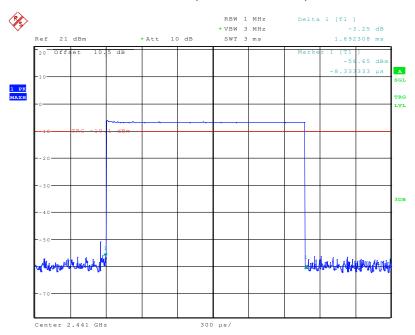

Date: 17.DEC.2018 16:13:11

Pulse time, High Channel, DH3

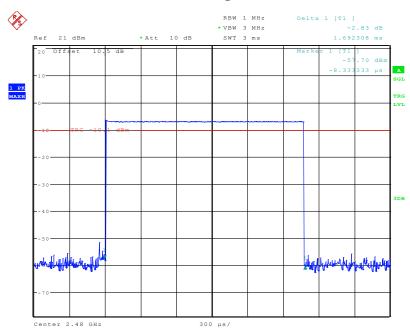


Date: 17.DEC.2018 16:12:59

FCC Part 15.247 Page 43 of 55


Pulse time, Low Channel, DH5

Report No.: RSZ181206830-00

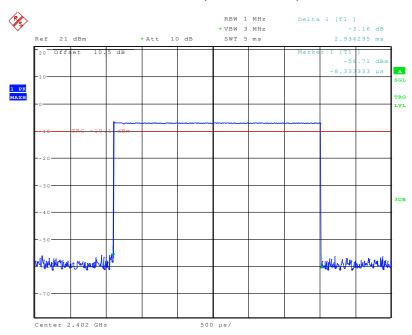

Date: 17.DEC.2018 16:15:46

Pulse time, Middle Channel, DH5

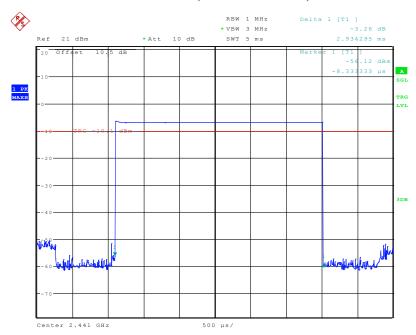


Date: 17.DEC.2018 16:16:13

FCC Part 15.247 Page 44 of 55

Pulse time, High Channel, DH5


Report No.: RSZ181206830-00

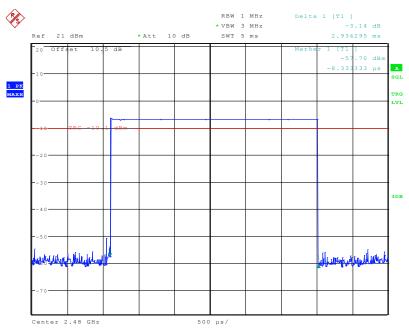

Date: 17.DEC.2018 16:16:25

EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, 2DH1

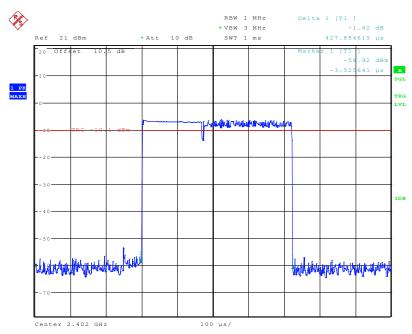


Date: 17.DEC.2018 16:10:09

FCC Part 15.247 Page 45 of 55


Pulse time, Middle Channel, 2DH1

Report No.: RSZ181206830-00

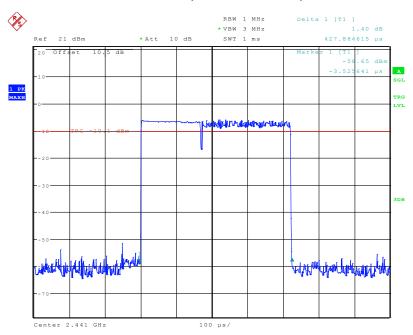

Date: 17.DEC.2018 16:09:58

Pulse time, High Channel, 2DH1

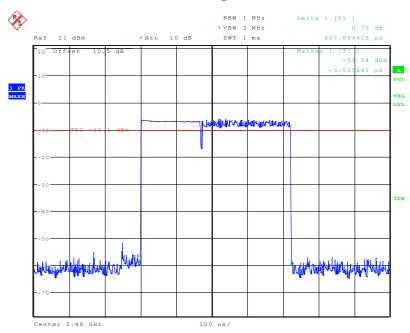


Date: 17.DEC.2018 16:09:43

FCC Part 15.247 Page 46 of 55


Pulse time, Low Channel, 2DH3

Report No.: RSZ181206830-00

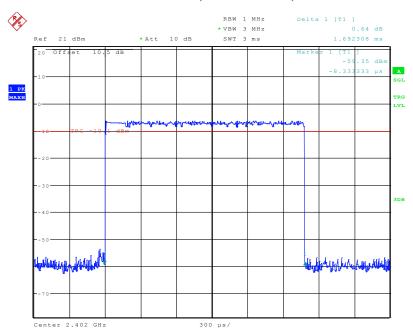

Date: 17.DEC.2018 16:11:45

Pulse time, Middle Channel, 2DH3

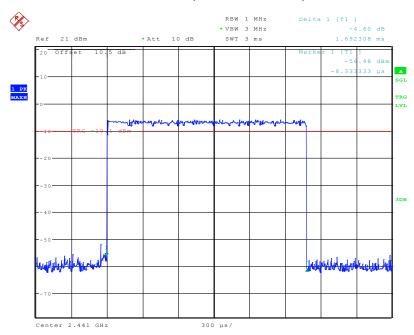


Date: 17.DEC.2018 16:12:17

FCC Part 15.247 Page 47 of 55


Pulse time, High Channel, 2DH3

Report No.: RSZ181206830-00

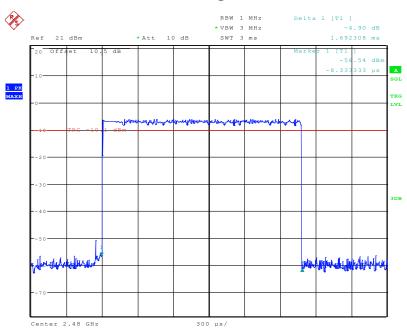

Date: 17.DEC.2018 16:12:31

Pulse time, Low Channel, 2DH5

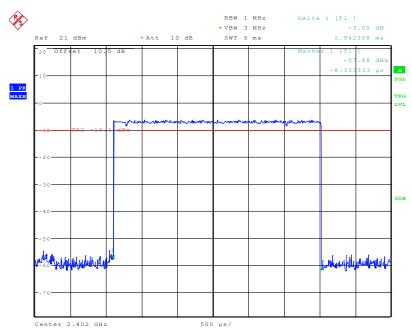


Date: 17.DEC.2018 16:17:26

FCC Part 15.247 Page 48 of 55


Pulse time, Middle Channel, 2DH5

Report No.: RSZ181206830-00

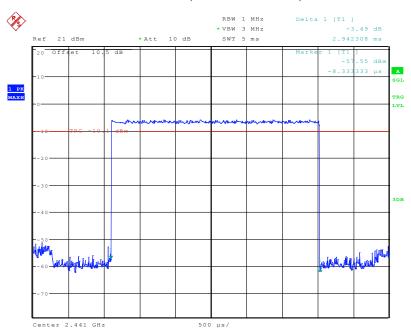

Date: 17.DEC.2018 16:17:18

Pulse time, High Channel, 2DH5

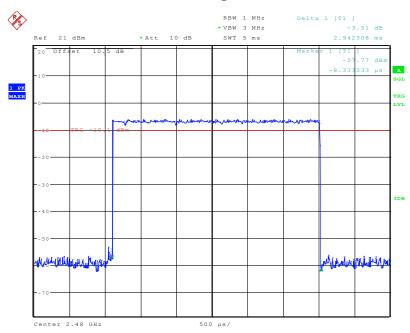

Date: 17.DEC.2018 16:16:53

FCC Part 15.247 Page 49 of 55

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ181206830-00

Test Procedure

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-17.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency	Peak Output Power		Limit (mW)
	(MHz)	(dBm)	(mW)		
	Low	2402	-6.24	0.238	125
BDR (GFSK)	Middle	2441	-5.86	0.259	125
(3-2-)	High	2480	-6.01	0.251	125
	Low	2402	-5.27	0.297	125
EDR (π/4-DQPSK)	Middle	2441	-4.93	0.321	125
(1 = Q 1 512)	High	2480	-5.05	0.313	125

FCC Part 15.247 Page 50 of 55

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ181206830-00

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-17.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

FCC Part 15.247 Page 51 of 55


BDR (GFSK): Band Edge-Left Side Hopping

Report No.: RSZ181206830-00

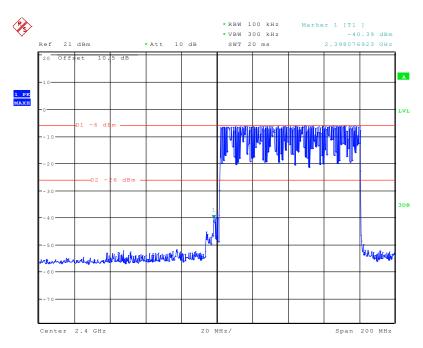

Date: 17.DEC.2018 15:37:24

Single

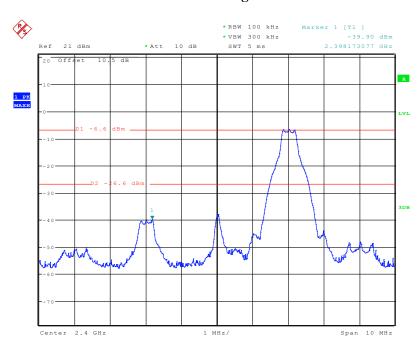


Date: 17.DEC.2018 15:35:11

FCC Part 15.247 Page 52 of 55


BDR (GFSK): Band Edge-Right Side Hopping

Report No.: RSZ181206830-00

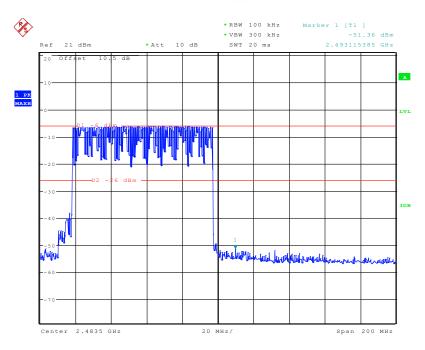

Date: 17.DEC.2018 15:41:03

Single

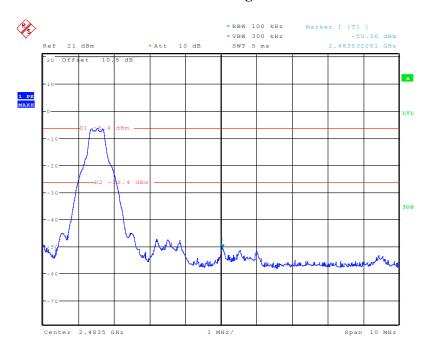


Date: 17.DEC.2018 15:42:33

FCC Part 15.247 Page 53 of 55


EDR (π /4-DQPSK): Band Edge-Left Side Hopping

Report No.: RSZ181206830-00

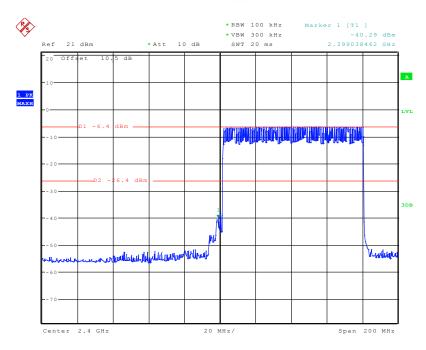

Date: 17.DEC.2018 15:52:20

Single

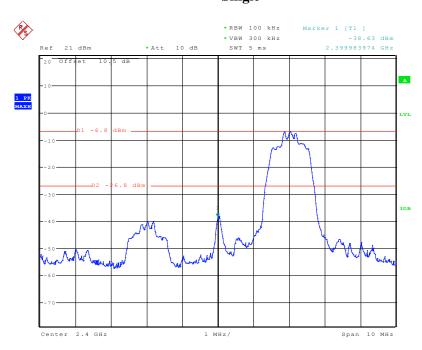


Date: 17.DEC.2018 15:53:28

FCC Part 15.247 Page 54 of 55


EDR (π /4-DQPSK): Band Edge-Right Side Hopping

Report No.: RSZ181206830-00

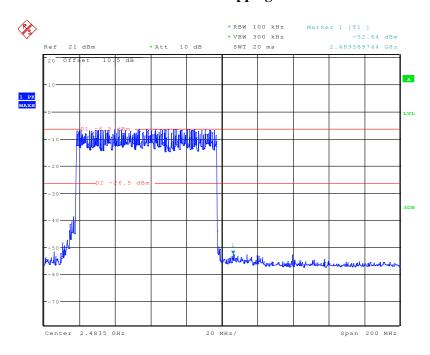

Date: 17.DEC.2018 15:47:50

Single

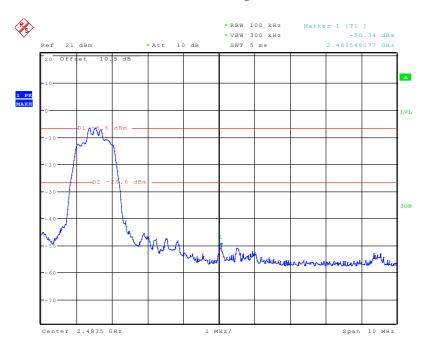

Date: 17.DEC.2018 15:46:13

***** END OF REPORT *****

FCC Part 15.247 Page 55 of 55