

DFS Test Report

Report No.: RF170912E01D-2

FCC ID: 2AHBN-AP61

Test Model: AP61E

Series Model: AP61

Received Date: Sep. 14, 2017

Test Date: Mar. 01 to 07, 2018

Issued Date: Apr. 02, 2018

Applicant: Mist Systems, Inc.

Address: 1601 South De Anza Blvd. Suite 248 Cupertino California United States

95014

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,

Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,

Taiwan R.O.C.

FCC Registration /

723255 / TW2022 **Designation Number:**





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Relea	se Control Record	3
1	Certificate of Conformity	4
2	EUT Information	5
2.1 2.2 2.3 2.4 2.5 2.6 2.7	Operating Frequency Bands and Mode of EUT EUT Software and Firmware Version Description of Available Antennas to the EUT EUT Maximum and Minimum Conducted Power EUT Maximum and Minimum EIRP Power Transmit Power Control (TPC) Statement of Manufacturer	5 6 9 . 13
3.	U-NII DFS Rule Requirements	. 18
3.1 3.2	Working Modes and Required Test Items Test Limits and Radar Signal Parameters	
4.	Test & Support Equipment List	. 22
4.1 4.2	Test Instruments Description of Support Units	
5.	Test Procedure	23
5.1 5.2 5.3 5.4	DFS Measurement System	24 24
6.	Test Results	26
6.2. 6.2.	2 U-NII Detection Bandwidth	. 27 . 27 . 32 . 38 . 40 . 70
7.	Information on The Testing Laboratories	
8.	APPENDIX-A	. 73



Release Control Record

Issue No.	Description	Date Issued
RF170912E01D-2	Original release.	Apr. 02, 2018

Page No. 3 / 117 Report Format Version: 6.1.2

Report No.: RF170912E01D-2 Reference No.: 171109E01



Certificate of Conformity

Product: Premium Outdoor Wi-Fi & BLE Array AP

Brand: Mist

Test Model: AP61E

Series Model: AP61

Sample Status: ENGINEERING SAMPLE

Applicant: Mist Systems, Inc.

Test Date: Mar. 01 to 07, 2018

Standards: FCC Part 15, Subpart E (Section 15.407)

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Wendy Wu / Specialist , Date: Prepared by: Apr. 02, 2018

Approved by: Date: Apr. 02, 2018

May Chen / Manager



2 EUT Information

2.1 Operating Frequency Bands and Mode of EUT

Table 1: Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency Range		
Operational Mode	5250~5350MHz	5470~5725MHz	
Master	✓	✓	

2.2 EUT Software and Firmware Version

Table 2: The EUT Software/Firmware Version

No.	Product	Model No.	Software/Firmware Version
1	Premium Outdoor Wi-Fi & BLE Array AP	AP61E, AP61	aph_apfw-0.1.11835-andal-ce66.tar.xz



2.3 Description of Available Antennas to the EUT

Table 3: Antenna List

			Table 3: Ar	ntenna List			
or Model No.: AP6	1						
		WLAN	I - 2.4GHz			•	
Antenna Set	Transmitter Circuit		ntenna Gain (dBi)	Frequency (GHz		Antenna Typ	e Connecter Type
			3.87	2.4~2.4			
			4.94	5.15~5	5.25		
	Chain (0)		4.66	5.25~5	5.35	PIFA	i-pex(MHF)
		,	4.25	5.47~5.	.725		
			4.42	5.725~	5.85		
			3.91	2.4~2.4	835		
		,	4.23	5.15~5	5.25		
	Chain (1)		4.54	5.25~5	5.35	PIFA	i-pex(MHF)
			4.66	5.47~5.	.725		
4		,	4.70	5.725~	5.85		
1			3.93	2.4~2.4	835		
	Chain (2)	,	4.53	5.15~5	5.25		
		4.86		5.25~5	5.35	PIFA	i-pex(MHF)
		,	4.95	5.47~5.725			
		,	4.94 5.725		5.85		
			3.81	2.4~2.4	835		
			4.50	5.15~5	5.25		
	Chain (3)	4.92		5.25~5	5.35	PIFA	i-pex(MHF)
		4.71		5.47~5.725			
			4.90	5.725~	5.85		
Ra	adio 2- WLAN I	RX only	y - 2.4GHz	+ 5GHz (S	canning	g radio antenn	na)
Antenna No.	Antenna Net Gain (Frequence (GI	cy Range Hz)	Ant	enna Type	Connecter Type
	3.85		2.4~2	.4835			
	4.61		5.15-	-5.25	PIFA		
1	4.71		5.25	-5.35			i-pex(MHF)
	4.72		5.47~	5.725			
	4.73		5.725~5.85		1		
_	_			Bluetooth			_
Antenna No.	Antenna Net Gain (cy Range Hz)	Ant	enna Type	Connecter Type
1	3.56		2.4~2	.4835		Omni	i-pex(MHF)
2	5.01		2.4~2	.4835		Patch	i-pex(MHF)



For Model I	No.: AP61E						
		Radio 1	- WLAN - 2.4GHz +	5GHz (Exte	rnal antenna	a)	
Antenna Set	Transmitter Circuit	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connecter Type
	Chain (0)	PCTEL	FPMI2458-DP4NM	6 5 5 5 5	2.4~2.4835 5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Sector	R-N Type
	Chain (1)	PCTEL	FPMI2458-DP4NM	6 5 5 5 5	2.4~2.4835 5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Sector	R-N Type
1	Chain (2)	PCTEL	FPMI2458-DP4NM	6 5 5 5 5	2.4~2.4835 5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Sector	R-N Type
	Chain (3)	PCTEL	FPMI2458-DP4NM	6 5 5 5 5	2.4~2.4835 5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Sector	R-N Type
Antenna Set	Transmitter Circuit	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connecter Type
	Chain (0)	PCTEL	MPMI2458-4-NM	4 4 4 4	2.4~2.4835 5.15~5.25	Omnidirectional	R-N Type
	Chain (1)	PCTEL	MPMI2458-4-NM	4 4 4 4 4	2.4~2.4835 5.15~5.25	Omnidirectional	R-N Type
2	Chain (2)	PCTEL	MPMI2458-4-NM	4 4 4 4	2.4~2.4835 5.15~5.25	Omnidirectional	R-N Type
	Chain (3)	PCTEL	MPMI2458-4-NM	4 4 4 4	2.4~2.4835 5.15~5.25	Omnidirectional	R-N Type



Radio 2 - WLAN RX only - 2.4GHz + 5GHz (Scanning radio antenna)						
Antenna No.	Transmitter Circuit	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connecter Type	
		3.85	2.4~2.4835			
		4.61	5.15~5.25			
1	Chain (0)	4.71	5.25~5.35	PIFA	i-pex(MHF)	
		4.72	5.47~5.725			
		4.73	5.725~5.85			
		Radio 3 -	Bluetooth			
Antenna No.	Transmitter Circuit	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connecter Type	
1	Chain (0)	3.56	2.4~2.4835	Omni	i-pex(MHF)	
2	Chain (1)	5.01	2.4~2.4835	Patch	i-pex(MHF)	



2.4 EUT Maximum and Minimum Conducted Power

Table 4: The Measured Conducted Output Power

802.11a

1Tx Mode

Frequency Band	MAX. F	Power	MIN. Power		
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)	
5250~5350	247.742	23.94	62.230	17.94	
5470~5725	146.218	21.65	36.728	15.65	

802.11ac (VHT20)

1Tx Mode

Frequency Band	MAX. F	Power	MIN. Power		
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)	
5250~5350	248.886	23.96	62.517	17.96	
5470~5725	145.881	21.64	36.644	15.64	

802.11ac (VHT40)

1Tx Mode

Frequency Band	MAX. F	Power	MIN. Power		
(MHz)	Output	Output	Output	Output	
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)	
5250~5350	239.332	23.79	60.117	17.79	
5470~5725	218.273	23.39	54.828	17.39	

802.11ac (VHT80)

1Tx Mode

Frequency Band	MAX. F	Power	MIN. Power		
(MHz)	Output	Output	Output	Output	
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)	
5250~5350	34.514	15.38	8.670	9.38	
5470~5725	123.027	20.90	30.903	14.90	

Report No.: RF170912E01D-2 Page No. 9 / 117 Report Format Version: 6.1.2



802.11a

2Tx Mode

Frequency Band	MAX. F	Power	MIN. Power		
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)	
5250~5350	156.699	21.95	39.355	15.95	
5470~5725	156.699	21.95	39.355	15.95	

802.11ac (VHT20)

2Tx Mode

Frequency Band	MAX. Power		MIN. Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	154.565	21.89	38.815	15.89
5470~5725	156.724	21.95	39.355	15.95

802.11ac (VHT40)

2Tx Mode

Frequency Band	MAX. Power		MIN. F	Power
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	156.699	21.95	39.355	15.95
5470~5725	156.146	21.94	39.264	15.94

802.11ac (VHT80)

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	Output	Output	Output	Output
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)
5250~5350	128.411	21.09	32.285	15.09
5470~5725	156.004	21.93	39.174	15.93



802.11a

3Tx Mode

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	Output	Output	Output	Output
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)
5250~5350	105.248	20.22	26.424	14.22
5470~5725	105.311	20.22	26.424	14.22

802.11ac (VHT20)

3Tx Mode

Frequency Band	MAX. F	Power	MIN. F	Power
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	101.335	20.06	25.468	14.06
5470~5725	89.735	19.53	22.542	13.53

802.11ac (VHT40)

3Tx Mode

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	104.361	20.19	26.242	14.19
5470~5725	104.99	20.21	26.363	14.21

802.11ac (VHT80)

3Tx CDD Mode

Frequency Band	MAX. F	Power	MIN. F	Power
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	62.352	17.95	15.668	11.95
5470~5725	104.461	20.19	26.242	14.19



802.11a

4Tx Mode

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	•	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	74.876	18.74	18.793	12.74
5470~5725	74.955	18.75	18.836	12.75

802.11ac (VHT20)

4Tx Mode

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	77.907	18.92	19.588	12.92
5470~5725	78.915	18.97	19.815	12.97

802.11ac (VHT40)

4Tx Mode

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	78.489	18.95	19.724	12.95
5470~5725	75.738	18.79	19.011	12.79

802.11ac (VHT80)

Frequency Band	MAX. F	Power	MIN. Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	73.56	18.67	18.493	12.67
5470~5725	78.607	18.95	19.724	12.95



2.5 EUT Maximum and Minimum EIRP Power

Table 5: The EIRP Output Power List

802.11a

1Tx Mode

Frequency Band	MAX. EIR	P Power	MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	783.429	28.94	196.789	22.94
5470~5725	462.382	26.65	116.145	20.65

802.11ac (VHT20)

1Tx Mode

Frequency Band	MAX. EIR	P Power	MIN. EIR	P Power
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	787.047	28.96	197.697	22.96
5470~5725	461.316	26.64	115.878	20.64

802.11ac (VHT40)

1Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	756.834	28.79	190.108	22.79
5470~5725	690.240	28.39	173.380	22.39

802.11ac (VHT80)

1Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	109.143	20.38	27.416	14.38
5470~5725	389.046	25.90	97.724	19.90

Report No.: RF170912E01D-2 Page No. 13 / 117 Report Format Version: 6.1.2 Reference No.: 171109E01



802.11a

2Tx Mode

Frequency Band	MAX. EIR	P Power	MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	495.526	26.95	124.451	20.95
5470~5725	494.915	26.95	124.451	20.95

802.11ac (VHT20)

2Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIR	P Power
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	977.487	29.90	245.471	23.90
5470~5725	991.141	29.96	248.886	23.96

802.11ac (VHT40)

2Tx Mode

Frequency Band	MAX. EIR	P Power	MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	990.983	29.96	248.886	23.96
5470~5725	987.486	29.95	248.313	23.95

802.11ac (VHT80)

Frequency Band	MAX. EIRP Power		MIN. EIR	P Power
(MHz)	Output	Output	Output	Output
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)
5250~5350	812.086	29.10	204.174	23.10
5470~5725	986.588	29.94	247.742	23.94



802.11a

3Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIR	P Power
(MHz)	Output	Output	Output	Output
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)
5250~5350	332.823	25.22	83.560	19.22
5470~5725	333.023	25.22	83.560	19.22

802.11ac (VHT20)

3Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	961.080	29.83	241.546	23.83
5470~5725	851.063	29.30	213.796	23.30

802.11ac (VHT40)

3Tx Mode

Frequency Band	MAX. EIR	P Power	MIN. EIRP Power	
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)
5250~5350	989.779	29.96	248.886	23.96
5470~5725	995.745	29.98	250.035	23.98

802.11ac (VHT80)

Frequency Band	MAX. EIRP Power		MIN. EIR	P Power
(MHz)	Output	Output	Output	Output
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)
5250~5350	591.358	27.72	148.594	21.72
5470~5725	990.727	29.96	248.886	23.96



802.11a

4Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIR	P Power
(MHz)	Output	Output	Output	Output
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)
5250~5350	236.779	23.74	59.429	17.74
5470~5725	237.029	23.75	59.566	17.75

802.11ac (VHT20)

4Tx Mode

Frequency Band	MAX. EIRP Power		MIN. EIRP Power		
(MHz)	Output Power(mW)	·		Output Power(dBm)	
5250~5350	985.318	29.94	Power(mW) 247.742	23.94	
5470~5725	998.067	29.99	250.611	23.99	

802.11ac (VHT40)

4Tx Mode

Frequency Band	MAX. EIRP Power uency Band		MIN. EIRP Power		
(MHz)	Output Power(mW)	Output Power(dBm)	Output Power(mW)	Output Power(dBm)	
5250~5350	992.679	29.97	249.459	23.97	
5470~5725	957.886	29.81	240.436	23.81	

802.11ac (VHT80)

Frequency Band	quency Band (MHz) MAX. EIRP Power Output Output		MIN. EIRP Power		
(MHz)			Output	Output	
	Power(mW)	Power(dBm)	Power(mW)	Power(dBm)	
5250~5350	930.340	29.69	233.884	23.69	
5470~5725	994.171	29.97	249.459	23.97	



2.6 Transmit Power Control (TPC)

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

Applicable	EIRP	FCC 15.407 (h)(1)
\checkmark	>500mW	The TPC mechanism is required for system with an EIRP of above 500mW
	<500mW	The TPC mechanism is not required for system with an EIRP of less 500mW

The UUT can adjust a transmitter's output power based on the signal level present at the receiver.TPC is auto controlled by software.

2.7 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

Report No.: RF170912E01D-2 Page No. 17 / 117 Report Format Version: 6.1.2



3. U-NII DFS Rule Requirements

3.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 6 and 7 for the applicability of DFS requirements for each of the operational modes.

Table 6: Applicability of DFS Requirements Prior to Use a Channel

	Operational Mode				
Requirement	Master	Client without radar detection	Client with radar detection		
Non-Occupancy Period	✓	✓ note	✓		
DFS Detection Threshold	✓	Not required	✓		
Channel Availability Check Time	✓	Not required	Not required		
U-NII Detection Bandwidth	✓	Not required	✓		

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 7: Applicability of DFS Requirements during Normal Operation.

	Operational Mode			
Requirement	Master or Client with radar detection	Client without radar detection		
DFS Detection Threshold	✓	Not required		
Channel Closing Transmission Time	✓	✓		
Channel Move Time	✓	✓		
U-NII Detection Bandwidth	✓	Not required		

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection	
U-NII Detection Bandwidth and Statistical Performance Check	Not required		
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link	
All other tests	Any single BW mode	Not required	

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Report No.: RF170912E01D-2 Page No. 18 / 117 Report Format Version: 6.1.2



3.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 8: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)	
EIRP ≥ 200 milliwatt	-64 dBm	
EIRP < 200 milliwatt and	20.15	
power spectral density < 10 dBm/MHz	-62 dBm	
EIRP < 200 milliwatt that do not meet the	24.15	
power spectral density requirement	-64 dBm	

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 9: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Report No.: RF170912E01D-2 Page No. 19 / 117 Report Format Version: 6.1.2



Parameters of DFS Test Signals

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 10: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066µ sec, with a minimum increment of 1µ sec, excluding PRI values selected in Test A		Roundup $ \begin{bmatrix} \frac{1}{360} \\ \frac{19 \cdot 10^6}{PRI_{\mu \text{ sec}}} \end{bmatrix} $	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Note 4 Of		regate (Radar Types 1	-4)	80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Report No.: RF170912E01D-2 Page No. 20 / 117 Report Format Version: 6.1.2



Table 11: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency.

- a) the Channel center frequency
- b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth
- c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth

It include 10 trails for every subset, the formula as below,

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

 $FL+(0.4*Chirp\ Width\ [in\ MHz])$

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

FH-(0.4*Chirp Width [in MHz])

Table 12: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Report No.: RF170912E01D-2 Page No. 21 / 117 Report Format Version: 6.1.2



4. Test & Support Equipment List

Test Instruments 4.1

Table 13: Test Instruments List

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL	
Spectrum Analyzer R&S	FSV40	100964	Jul. 01, 2017	Jun. 30, 2018	
Vector Signal Generator Agilent	N5182B	MY53051263	Sep. 13, 2017	Sep. 12, 2018	
Horn_Antenna EMCO	1018G	0001	Dec. 12, 2017	Dec. 11, 2018	
DFS Control Box	BV-DFS-CB	001	Sep. 18, 2017	Sep. 17, 2018	

4.2 **Description of Support Units**

Table 14: Support Unit Information

No.	Product	Brand	Model No.	FCC ID	Spec
1	WiFi USB Adapter	NETGEAR	A6210	PY313400249	

NOTE: This device was functioned as a ☐Master ☐Slave device during the DFS test.

Table 15: Software/Firmware Information

No.	Product	Model No.	Software/Firmware Version
1	WiFi USB Adapter		Driver Version: 04/21/2015,
			5.1.22.0

Report No.: RF170912E01D-2 Page No. 22 / 117 Report Format Version: 6.1.2




5. Test Procedure

5.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 10, 11 and 12. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Radiated Setup Configuration of DFS Measurement System

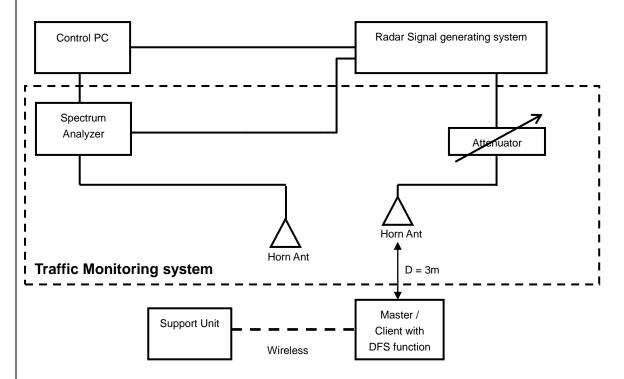

Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

a)	The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.	
b)	Software to ping the client is permitted to simulate data transfer but must have random ping intervals.	
c)	Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.	✓
d)	Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.	

Report No.: RF170912E01D-2 Page No. 23 / 117 Report Format Version: 6.1.2




5.2 Calibration of DFS Detection Threshold Level

The measured channel is 5500MHz and 5510MHz and 5530MHz. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Radiated setup configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64dBm. The tested level is lower than required level hence it provides margin to the limit.

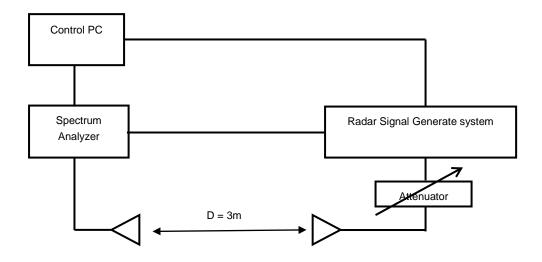

5.3 Deviation from Test Standard

No deviation.


Report No.: RF170912E01D-2 Page No. 24 / 117 Report Format Version: 6.1.2 Reference No.: 171109E01



5.4 Radiated Test Setup Configuration

Master mode

The EUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

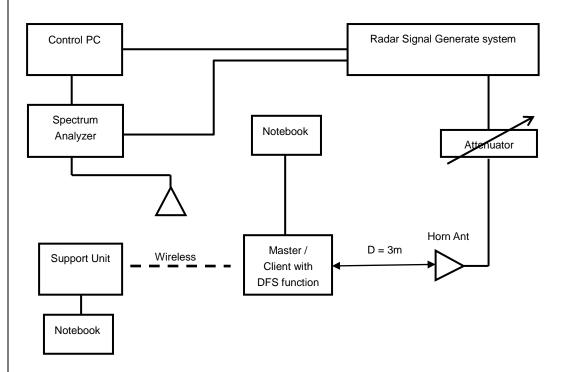

Note: The UUT main beam of the antenna is directly toward the radar emitter during testing.

Report No.: RF170912E01D-2 Page No. 25 / 117 Report Format Version: 6.1.2 Reference No.: 171109E01



6. Test Results

6.1 Summary of Test Results

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass



6.2 Test Results

6.2.1 Test Mode: Device Operating In Master Mode.


The radar test waveforms are injected into the Master.

This test was investigated for different bandwidth (20MHz \ 40MHz and 80MHz).

The following plots was done on 80MHz as a representative


DFS Detection Threshold

For detection threshold level of -64dBm, the tested level is lower than required level for 1dB, hence it provides margin to the limit.

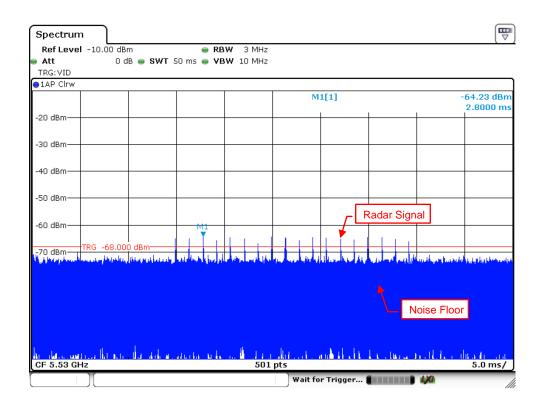


Radar Signal 0



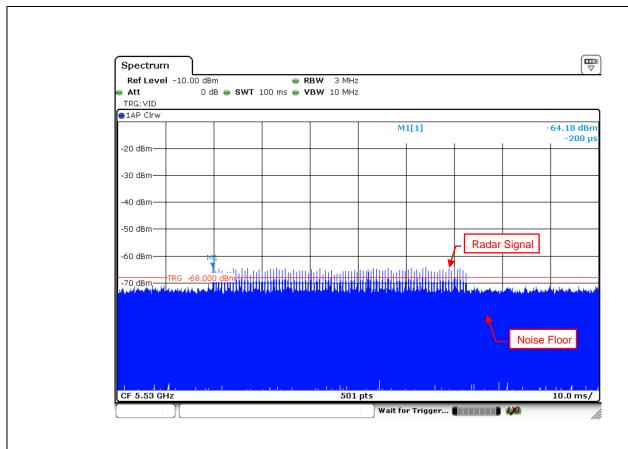


Radar Signal 1 (Test A)

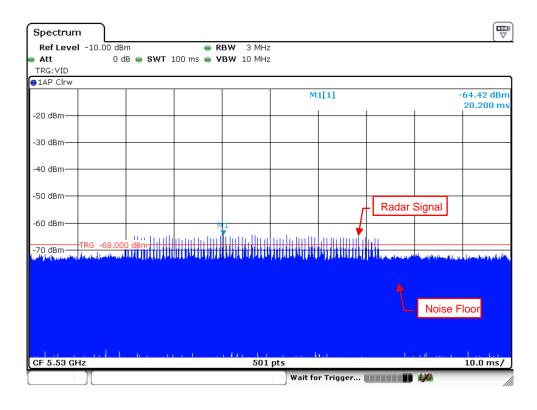


Radar Signal 1 (Test B)



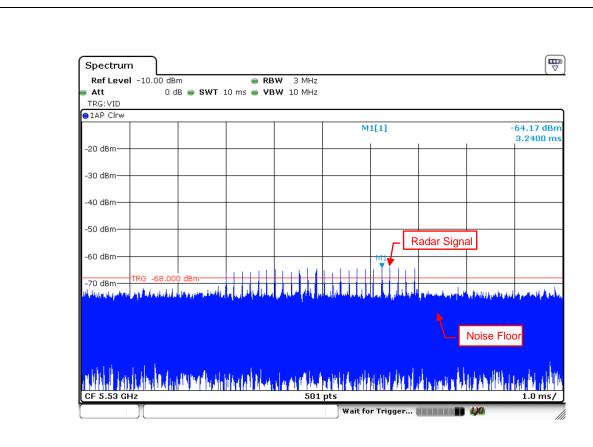


Radar Signal 2

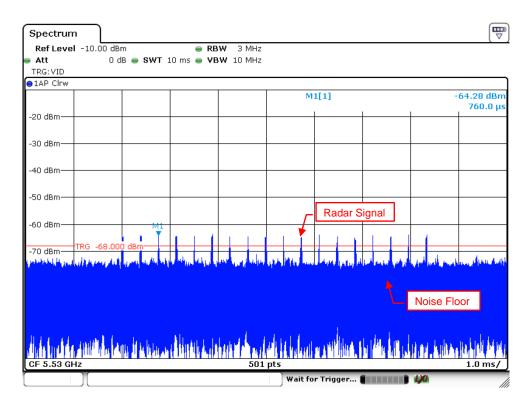


Radar Signal 3



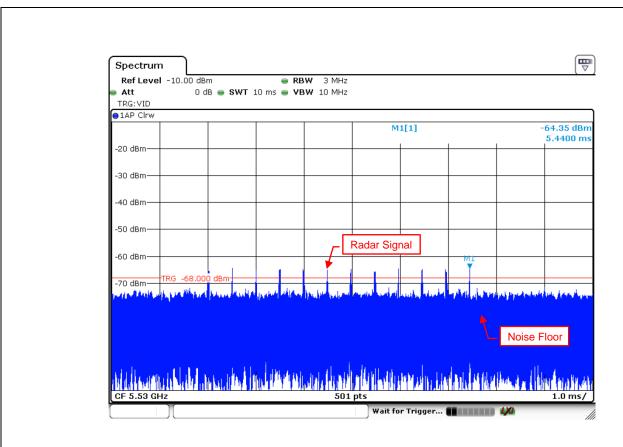


Single Burst of Radar Signal 4

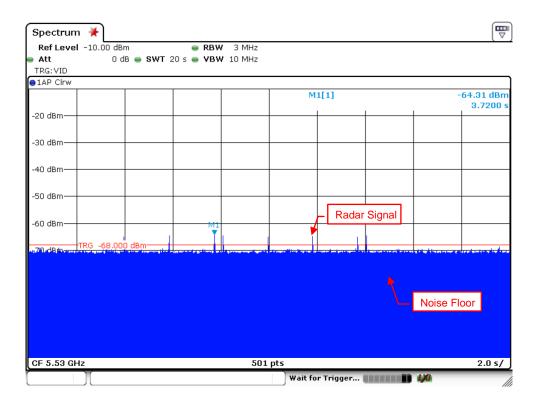


Radar Signal 5



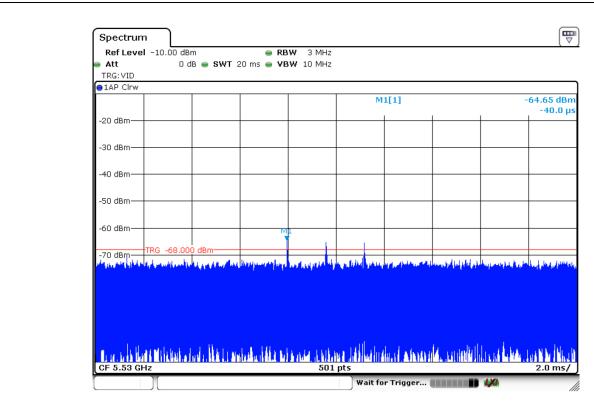


Single Burst of Radar Signal 5

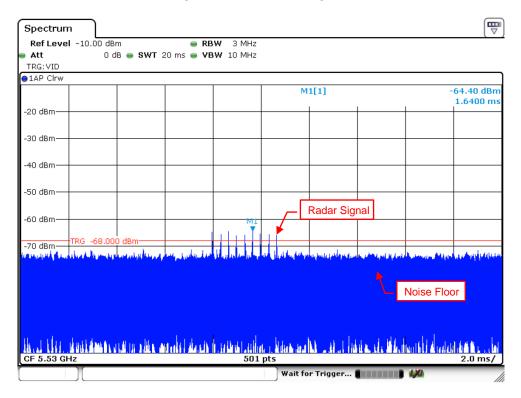


Radar Signal 6



6.2.2 U-NII Detection Bandwidth

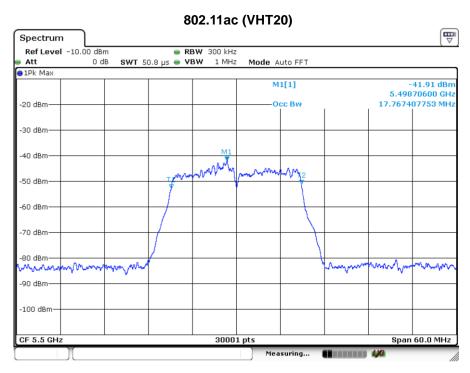


U-NII 99% Channel bandwidth

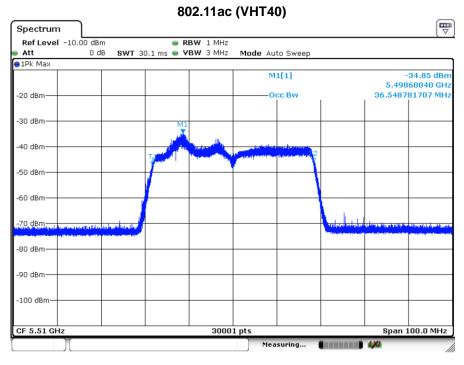

U-NII 99% Channel bandwidth



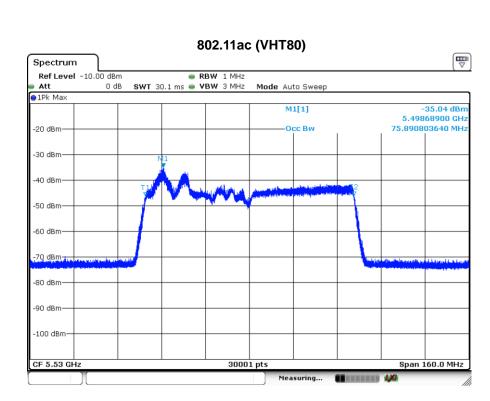

U-NII 99% Channel bandwidth



Detection Bandwidth Test - 802.11ac (VHT20)

Radar Type 0

EUT Frequency: 5500MHz

EUT 99% Power bandwidth: 17.767MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 17.767MHz

Detection bandwidth (5509(FH) – 5491(FL)) : 18MHz Test Result : PASS

Test Result : PASS											
Radar				Trial N	Numbe	r / Det	ection				Detection
Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Rate (%)
5491(FL)	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90
5492	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5493	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5494	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5496	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5497	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5498	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5499	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5501	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5502	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5503	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5504	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5506	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5507	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90
5508	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5509(FH)	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90

Report No.: RF170912E01D-2 Page No. 34 / 117 Report Format Version: 6.1.2



Detection Bandwidth Test - 802.11ac (VHT40)

Radar Type 0

EUT Frequency: 5510MHz

EUT 99% Power bandwidth: 36.549MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 36.549MHz

Detection bandwidth (5529(FH) - 5491(FL)): 38MHz

Test Result : PASS

Radar	Radar Trial Number / Detection										
Frequency				man		וי טפוו					Detection
(MHz)	1	2	3	4	5	6	7	8	9	10	Rate (%)
5491(FL)	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90
5492	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5493	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5494	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5496	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5497	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5498	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5499	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5501	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5502	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5503	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5504	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5506	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5507	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5508	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5509	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5511	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5512	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5513	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5514	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5516	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5517	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5518	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5519	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5521	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5522	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5523	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5524	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5526	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5527	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5528	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90
5529(FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	90

Report No.: RF170912E01D-2 Page No. 35 / 117 Report Format Version: 6.1.2



Detection Bandwidth Test - 802.11ac (VHT80)

Radar Type 0

EUT Frequency: 5530MHz

EUT 99% Power bandwidth: 75.891MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 75.891MHz

Detection bandwidth (5568(FH) – 5492(FL)) : 76MHz Test Result : PASS

Test Result : PASS											
Radar		Trial Number / Detection									
Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5492(FL)	Yes	No	Yes	90							
5493	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5494	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5496	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5497	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5498	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5499	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5501	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5502	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5503	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5504	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5506	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5507	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5508	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5509	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5511	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5512	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5513	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5514	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5516	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5517	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5518	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5519	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5521	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5522	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5523	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5524	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5526	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5527	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5528	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5529	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5531	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5532	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5533	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5534	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5536	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
2230	res	res	res	res	res	res	res	res	res	res	100

Report No.: RF170912E01D-2 Page No. 36 / 117 Report Format Version: 6.1.2 Reference No.: 171109E01



| 5537 | Yes | 100 |
|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 5538 | Yes | 100 |
| 5539 | Yes | 100 |
| 5540 | Yes | 100 |
| 5541 | Yes | 100 |
| 5542 | Yes | 100 |
| 5543 | Yes | 100 |
| 5544 | Yes | 100 |
| 5545 | Yes | 100 |
| 5546 | Yes | 100 |
| 5547 | Yes | 100 |
| 5548 | Yes | 100 |
| 5549 | Yes | 100 |
| 5550 | Yes | 100 |
| 5551 | Yes | 100 |
| 5552 | Yes | 100 |
| 5553 | Yes | 100 |
| 5554 | Yes | 100 |
| 5555 | Yes | 100 |
| 5556 | Yes | 100 |
| 5557 | Yes | 100 |
| 5558 | Yes | 100 |
| 5559 | Yes | 100 |
| 5560 | Yes | 100 |
| 5561 | Yes | 100 |
| 5562 | Yes | 100 |
| 5563 | Yes | 100 |
| 5564 | Yes | 100 |
| 5565 | Yes | 100 |
| 5566 | Yes | 100 |
| 5567 | Yes | 100 |
| 5568(FH) | Yes | 100 |




6.2.3 Channel Availability Check Time

If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

	Observation			
Timing of Radar Signal	EUT	Spectrum Analyzer		
Within 1 to 6 second	Detected	No transmissions		
Within 54 to 60 second	Detected	No transmissions		


Initial Channel Availability Check Time

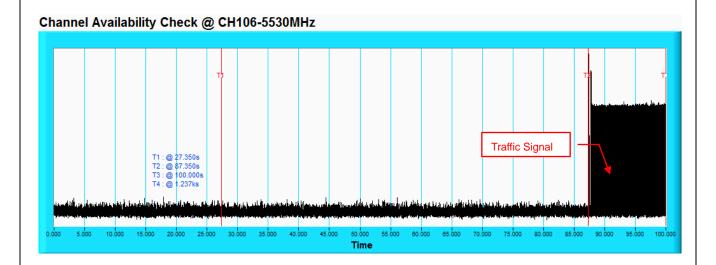

NOTE: T1 denotes the end of power-up time period is 27.35th second. T2 denotes the end of Channel Availability Check time is 87.35th second. Channel Availability Check time is equal to (T2 – T1) 60 seconds.




Radar Burst at the Beginning of the Channel Availability Check Time

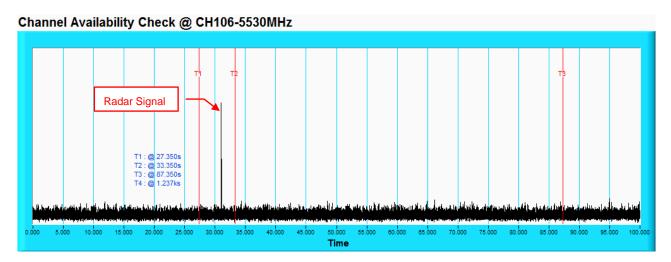

NOTE: T1 denotes the end of power up time period is 27.35th second. T2 denotes 33.35th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T3 denotes the 87.35th second.

Radar Burst at the End of the Channel Availability Check Time Channel Availability Check @ CH106-5530MHz

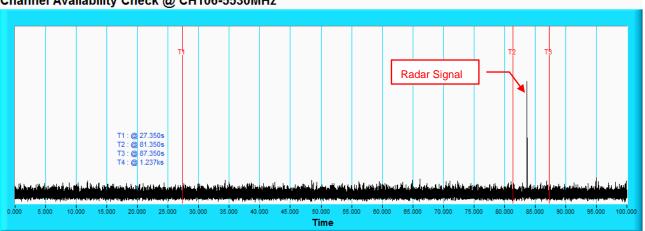

NOTE: T1 denotes the end of power up time period is 27.35th second.T2 denotes 81.35th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T3 denotes the 87.35th second.




6.2.4 Channel Closing Transmission and Channel Move Time

Wireless Traffic Loading

802.11ac (VHT20)



802.11ac (VHT40)

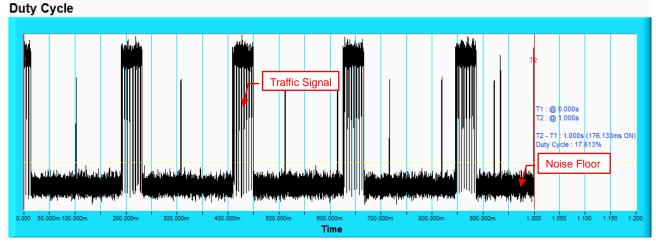

802.11ac (VHT80)

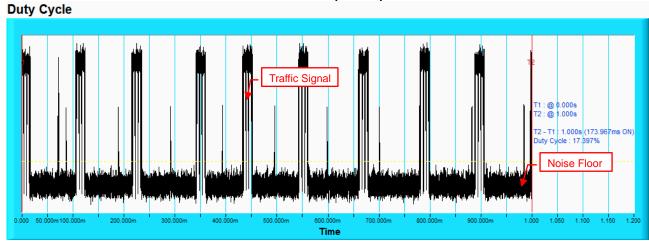




Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)	
	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\left[\begin{array}{c} 1\\ \overline{360} \end{array}\right]$.	18			
1	Test B: 15 unique PRI values randomly selected within the range of 518~3066µ sec with a minimum of 1µ sec, excluding PRI values selected in Test A	Roundup $ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{ sec}}} \right) $		30	90	
2	1-5	150-230	23-29	30	83.3	
3	6-10	200-500	16-18	30	76.7	
4	11-20	200-500	12-16	30	83.3	
	Aggregate (Radar	Types 1-4)		120	83.33	

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	86.7

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	90

Report No.: RF170912E01D-2 Page No. 41 / 117 Report Format Version: 6.1.2

Reference No.: 171109E01



Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)	
	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\left[\begin{array}{c} 1\\ \overline{360} \end{array}\right]$.	18			
1	Test B: 15 unique PRI values randomly selected within the range of 518~3066µ sec with a minimum of 1µ sec, excluding PRI values selected in Test A	Roundup $ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{ sec}}} \right) $		30	90	
2	1-5	150-230	23-29	30	76.7	
3	6-10	200-500	16-18	30	76.7	
4	11-20	200-500	12-16	30	80	
	Aggregate (Radar	Types 1-4)		120	80.83	

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	80

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	90



Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)	
	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\left[\begin{array}{c} 1\\ 360 \end{array}\right]$.		30		
1	Test B: 15 unique PRI values randomly selected within the range of 518~3066µ sec with a minimum of 1µ sec, excluding PRI values selected in Test A	Roundup $ \begin{cases} \frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{ sec}}} \end{cases} $	18		90	
2	1-5	150-230	23-29	30	86.7	
3	6-10	200-500	16-18	30	76.7	
4	11-20	200-500	12-16	30	86.7	
	Aggregate (Radar	Types 1-4)	-	120	85	

Table 2: Long Pulse Radar Test Waveform

adar ype	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	80


Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	90


Report No.: RF170912E01D-2 Page No. 43 / 117 Report Format Version: 6.1.2

Reference No.: 171109E01



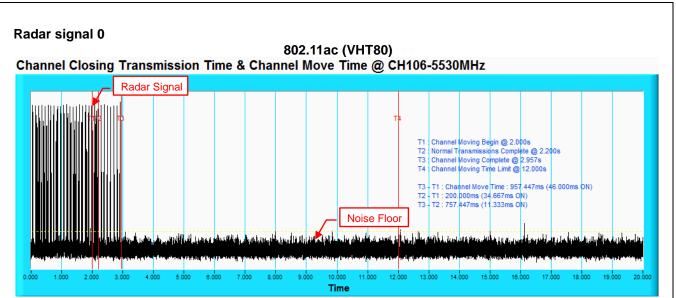


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

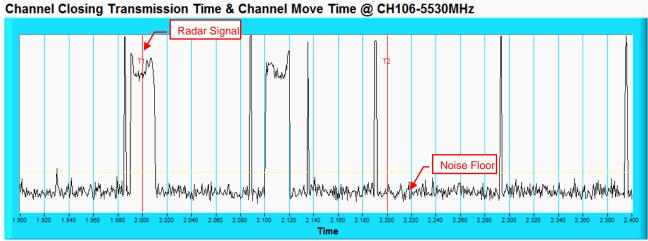


NOTE: Zoom in of the first 500ms after radar signal applied.



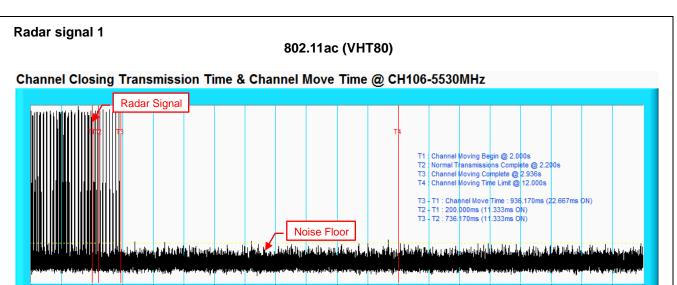


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Time

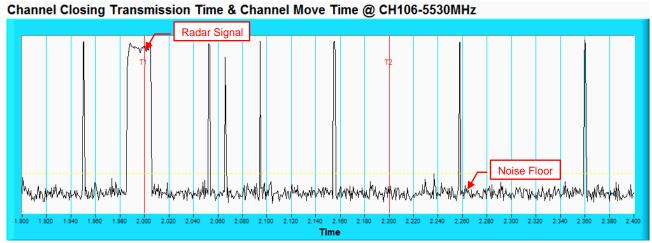


NOTE: Zoom in of the first 500ms after radar signal applied.



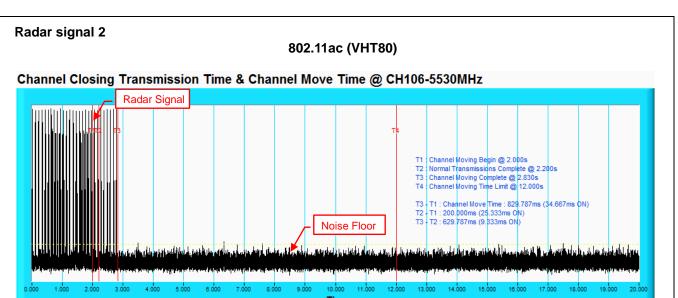


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

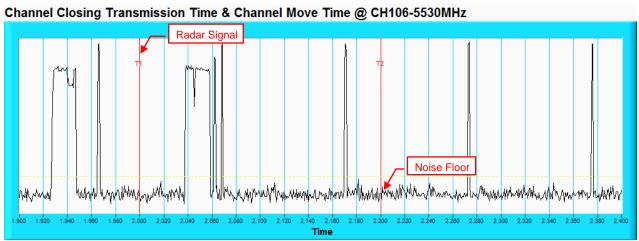


NOTE: Zoom in of the first 500ms after radar signal applied.

Reference No.: 171109E01



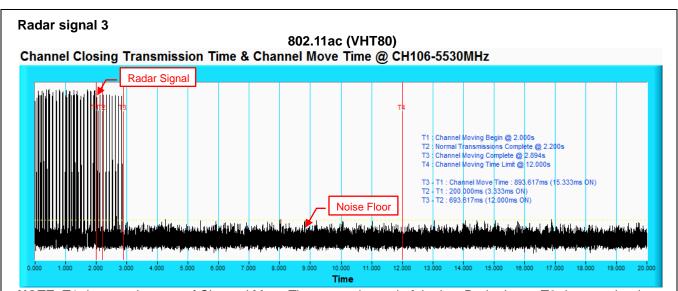


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

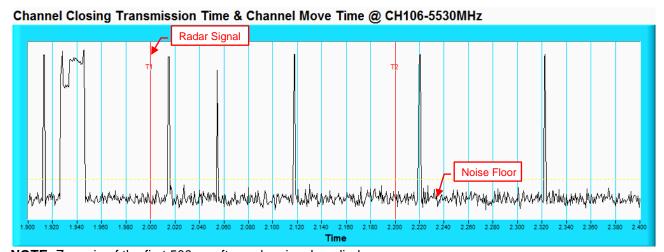


NOTE: Zoom in of the first 500ms after radar signal applied.



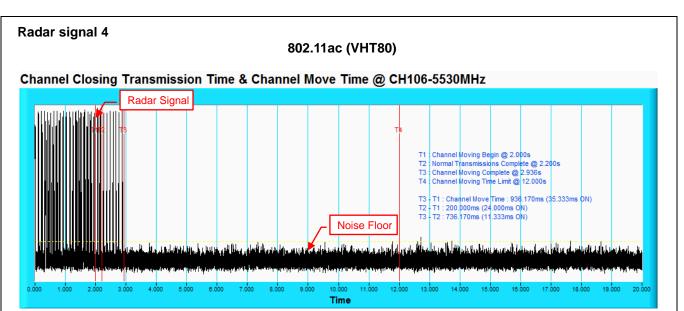

NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

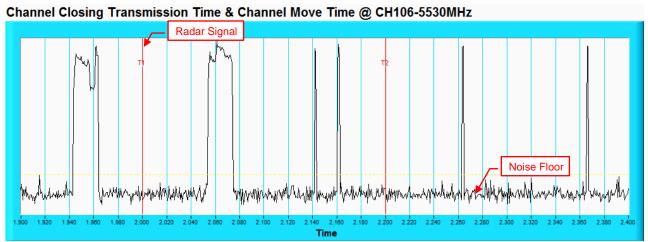

NOTE: Zoom in of the first 500ms after radar signal applied.



802.11ac (VHT20)

Турє	1 Radar St	atistical Perf	ormances			
Trial	Test	Pulse	Pulse	Pulses	Pulse	Detection
#	Frequency	Repetition	Repetition	per	Repetition	
	(MHz)	Frequency	Frequency	Burst	Interval	
		Number (1	(Pulse per		(microseconds)	
		to 23)	seconds)			
1	5500	15	1253	67	798	Yes
2	5498	16	1223	65	818	Yes
3	5491	4	1730	92	578	Yes
4	5501	11	1393	74	718	Yes
5	5495	22	1066	57	938	Yes
6	5501	7	1567	83	638	Yes
7	5498	2	1859	99	538	Yes
8	5493	8	1520	81	658	Yes
9	5508	1	1931	102	518	Yes
10	5508	19	1139	61	878	Yes
11	5492	21	1089	58	918	Yes
12	5507	23	326.2	18	3066	Yes
13	5492	9	1475	78	678	Yes
14	5508	5	1672	89	598	Yes
15	5492	6	1618	86	618	No
16	5502		1111	59	900	Yes
17	5506		1024	55	977	No
18	5508		625.8	34	1598	No
19	5502		730.5	39	1369	Yes
20	5502		1181	63	847	Yes
21	5493		400.6	22	2496	Yes
22	5506		529.4	28	1889	Yes
23	5499		347.6	19	2877	Yes
24	5506		641.4	34	1559	Yes
25	5505		508.9	27	1965	Yes
26	5499		345.4	19	2895	Yes
27	5494		580.7	31	1722	Yes
28	5495		786.8	42	1271	Yes
29	5497		808.4	43	1237	Yes
30	5497		517.1	28	1934	Yes
					Detection R	Rate: 90 %



		al Performance		DDI/s)	Datastica
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
4	(MHz)	0.4	4 7	474	\/aa
1	5500	24	1.7	174	Yes
2	5504	27	3.8	176	No
3	5506	28	4	161	Yes
4	5492	28	4.3	226	No
5	5499	24	1.9	193	Yes
6	5493	23	1.1	230	Yes
7	5497	29	4.5	198	No
8	5502	26	2.9	227	Yes
9	5506	26	2.8	171	Yes
10	5506	27	3.6	221	Yes
11	5498	23	1.1	180	Yes
12	5499	23	1.3	189	Yes
13	5492	25	2.5	204	Yes
14	5504	29	4.5	203	Yes
15	5494	29	5	170	Yes
16	5504	26	3.1	201	Yes
17	5495	24	2.1	218	Yes
18	5500	25	2.6	208	Yes
19	5494	24	1.8	223	Yes
20	5495	23	1.2	220	Yes
21	5494	26	2.9	224	Yes
22	5509	28	4	160	Yes
23	5495	25	2.5	209	Yes
24	5508	23	1	205	Yes
25	5502	27	3.7	151	Yes
26	5505	25	2.5	186	No
27	5501	23	1.5	190	Yes
28	5499	23	1.3	185	Yes
29	5500	23	1.2	175	No
				_	Yes
30	5500	24	1.7	216 Detection F	`



Type 3	Radar Statistic	al Performanc	es			
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection	
	Frequency	Burst	Width(us)			
	(MHz)		, ,			
1	5500	16	6.7	467	Yes	
2	5508	18	8.8	304	Yes	
3	5505	18	9	316	Yes	
4	5497	18	9.3	439	Yes	
5	5495	16	6.9	420	Yes	
6	5504	16	6.1	249	No	
7	5509	18	9.5	463	Yes	
8	5500	17	7.9	258	Yes	
9	5501	17	7.8	212	No	
10	5505	17	8.6	236	Yes	
11	5495	16	6.1	474	Yes	
12	5507	16	6.3	461	Yes	
13	5494	17	7.5	437	Yes	
14	5496	18	9.5	287	No	
15	5498	18	10	395	Yes	
16	5496	17	8.1	322	Yes	
17	5501	16	7.1	468	Yes	
18	5499	17	7.6	255	No	
19	5509	16	6.8	423	Yes	
20	5499	16	6.2	456	No	
21	5498	17	7.9	351	Yes	
22	5492	18	9	411	Yes	
23	5492	17	7.5	279	Yes	
24	5507	16	6	431	Yes	
25	5500	17	8.7	324	No	
26	5499	17	7.5	419	Yes	
27	5504	16	6.5	447	Yes	
28	5500	16	6.3	481	Yes	
29	5504	16	6.2	438	No	
30	5492	16	6.7	270	Yes	
	Detection Rate: 76.7 %					



Type 4 Radar Statistical Performances					
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
	(MHz)				
1	5500	12	12.5	467	Yes
2	5493	15	17.2	304	Yes
3	5493	15	17.8	316	Yes
4	5492	16	18.5	439	Yes
5	5502	13	13.1	420	Yes
6	5507	12	11.3	249	No
7	5494	16	18.8	463	Yes
8	5505	14	15.3	258	Yes
9	5500	14	15.1	212	No
10	5492	15	16.9	236	Yes
11	5497	12	11.2	474	Yes
12	5497	12	11.7	461	Yes
13	5506	13	14.4	437	Yes
14	5508	16	18.9	287	Yes
15	5493	16	19.9	395	No
16	5498	14	15.7	322	Yes
17	5492	13	13.4	468	Yes
18	5506	13	14.5	255	Yes
19	5499	13	12.9	423	Yes
20	5495	12	11.5	456	Yes
21	5508	14	15.3	351	Yes
22	5507	15	17.8	411	No
23	5496	13	14.3	279	No
24	5499	12	11.1	431	Yes
25	5508	15	17	324	Yes
26	5502	13	14.5	419	Yes
27	5503	12	12.1	447	Yes
28	5509	12	11.7	481	Yes
29	5504	12	11.6	438	Yes
30	5507	12	12.7	270	Yes
Detection Rate: 83.3 %					



802.11ac (VHT20)

Type 5	Type 5 Radar Statistical Performances						
Trial #	Minimum	Chirp Center	Test Signal Name	Detection			
	Chirp Width(MHz)	Frequency(MHz)					
1	7	5500	LP_Signal_01	Yes			
2	15	5500	LP_Signal_02	Yes			
3	16	5500	LP_Signal_03	Yes			
4	18	5500	LP_Signal_04	Yes			
5	8	5500	LP_Signal_05	Yes			
6	5	5500	LP_Signal_06	Yes			
7	18	5500	LP_Signal_07	Yes			
8	12	5500	LP_Signal_08	Yes			
9	12	5500	LP_Signal_09	Yes			
10	15	5500	LP_Signal_10	Yes			
11	5	5493	LP_Signal_11	Yes			
12	6	5493	LP_Signal_12	Yes			
13	11	5495	LP_Signal_13	No			
14	18	5498	LP_Signal_14	Yes			
15	20	5499	LP_Signal_15	Yes			
16	13	5496	LP_Signal_16	Yes			
17	9	5495	LP_Signal_17	Yes			
18	11	5495	LP_Signal_18	Yes			
19	8	5494	LP_Signal_19	Yes			
20	5	5493	LP_Signal_20	Yes			
21	12	5504	LP_Signal_21	No			
22	17	5502	LP_Signal_22	Yes			
23	10	5505	LP_Signal_23	Yes			
24	5	5507	LP_Signal_24	Yes			
25	15	5503	LP_Signal_25	Yes			
26	11	5505	LP_Signal_26	No			
27	7	5506	LP_Signal_27	Yes			
28	6	5507	LP_Signal_28	No			
29	6	5507	LP_Signal_29	Yes			
30	8	5506	LP_Signal_30	Yes			
	Detection Rate: 86.7 %						

The Long Pulse Radar pattern shown in Appendix A.1



Type 6 Radar Statistical Performances								
Trial #	Pulses per	Pulse Width(us)	PRI(us)	Detection				
	Burst		` ,					
1	9	1	333.3	Yes				
2	9	1	333.3	Yes				
3	9	1	333.3	Yes				
4	9	1	333.3	Yes				
5	9	1	333.3	Yes				
6	9	1	333.3	Yes				
7	9	1	333.3	Yes				
8	9	1	333.3	Yes				
9	9	1	333.3	Yes				
10	9	1	333.3	Yes				
11	9	1	333.3	Yes				
12	9	1	333.3	No				
13	9	1	333.3	Yes				
14	9	1	333.3	Yes				
15	9	1	333.3	No				
16	9	1	333.3	Yes				
17	9	1	333.3	Yes				
18	9	1	333.3	Yes				
19	9	1	333.3	Yes				
20	9	1	333.3	Yes				
21	9	1	333.3	Yes				
22	9	1	333.3	Yes				
23	9	1	333.3	Yes				
24	9	1	333.3	Yes				
25	9	1	333.3	Yes				
26	9	1	333.3	Yes				
27	9	1	333.3	Yes				
28	9	1	333.3	Yes				
29	9	1	333.3	Yes				
30	9	1	333.3	No				
	Detection Rate: 90 %							



Type 6 Radar Statistical Performances					
Trial #	Hopping Frequency	Detection			
	Sequence Name				
1	HOP_FREQ_SEQ_01	Yes			
2	HOP_FREQ_SEQ_02	Yes			
3	HOP_FREQ_SEQ_03	Yes			
4	HOP_FREQ_SEQ_04	Yes			
5	HOP_FREQ_SEQ_05	Yes			
6	HOP_FREQ_SEQ_06	Yes			
7	HOP_FREQ_SEQ_07	Yes			
8	HOP_FREQ_SEQ_08	Yes			
9	HOP_FREQ_SEQ_09	Yes			
10	HOP_FREQ_SEQ_10	Yes			
11	HOP_FREQ_SEQ_11	Yes			
12	HOP_FREQ_SEQ_12	No			
13	HOP_FREQ_SEQ_13	Yes			
14	HOP_FREQ_SEQ_14	Yes			
15	HOP_FREQ_SEQ_15	No			
16	HOP_FREQ_SEQ_16	Yes			
17	HOP_FREQ_SEQ_17	Yes			
18	HOP_FREQ_SEQ_18	Yes			
19	HOP_FREQ_SEQ_19	Yes			
20	HOP_FREQ_SEQ_20	Yes			
21	HOP_FREQ_SEQ_21	Yes			
22	HOP_FREQ_SEQ_22	Yes			
23	HOP_FREQ_SEQ_23	Yes			
24	HOP_FREQ_SEQ_24	Yes			
25	HOP_FREQ_SEQ_25	Yes			
26	HOP_FREQ_SEQ_26	Yes			
27	HOP_FREQ_SEQ_27	Yes			
28	HOP_FREQ_SEQ_28	Yes			
29	HOP_FREQ_SEQ_29	Yes			
30	HOP_FREQ_SEQ_30	No			
		Detection Rate: 90 %			

The Frequency Hopping Radar pattern shown in Appendix A.2



Type 1 Radar Statistical Performances								
Trial	Test	Pulse	Pulse	Pulses	Pulse	Detection		
#	Frequency	Repetition	Repetition	per	Repetition			
	(MHz)	Frequency	Frequency	Burst	Interval			
		Number (1	(Pulse per		(microseconds)			
		to 23)	seconds)					
1	5510	15	1253	67	798	Yes		
2	5520	16	1223	65	818	Yes		
3	5500	4	1730	92	578	Yes		
4	5500	11	1393	74	718	No		
5	5526	22	1066	57	938	Yes		
6	5504	7	1567	83	638	Yes		
7	5495	2	1859	99	538	Yes		
8	5510	8	1520	81	658	Yes		
9	5527	1	1931	102	518	Yes		
10	5517	19	1139	61	878	Yes		
11	5503	21	1089	58	918	Yes		
12	5524	23	326.2	18	3066	Yes		
13	5513	9	1475	78	678	Yes		
14	5492	5	1672	89	598	Yes		
15	5527	6	1618	86	618	Yes		
16	5493		1111	59	900	Yes		
17	5509		1024	55	977	Yes		
18	5491		625.8	34	1598	Yes		
19	5525		730.5	39	1369	Yes		
20	5506		1181	63	847	Yes		
21	5513		400.6	22	2496	Yes		
22	5491		529.4	28	1889	Yes		
23	5527		347.6	19	2877	Yes		
24	5495		641.4	34	1559	Yes		
25	5501		508.9	27	1965	Yes		
26	5496		345.4	19	2895	Yes		
27	5523		580.7	31	1722	Yes		
28	5509		786.8	42	1271	No		
29	5506		808.4	43	1237	No		
30	5499		517.1	28	1934	Yes		
	Detection Rate: 90 %							



Type 2 Radar Statistical Performances					
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
	(MHz)				
1	5510	24	1.7	174	Yes
2	5520	27	3.8	176	Yes
3	5500	28	4	161	Yes
4	5508	28	4.3	226	No
5	5503	24	1.9	193	Yes
6	5528	23	1.1	230	No
7	5497	29	4.5	198	Yes
8	5510	26	2.9	227	Yes
9	5522	26	2.8	171	Yes
10	5499	27	3.6	221	Yes
11	5491	23	1.1	180	Yes
12	5510	23	1.3	189	No
13	5492	25	2.5	204	No
14	5512	29	4.5	203	Yes
15	5510	29	5	170	Yes
16	5523	26	3.1	201	Yes
17	5515	24	2.1	218	Yes
18	5505	25	2.6	208	Yes
19	5514	24	1.8	223	Yes
20	5498	23	1.2	220	Yes
21	5501	26	2.9	224	No
22	5495	28	4	160	Yes
23	5498	25	2.5	209	No
24	5506	23	1	205	Yes
25	5511	27	3.7	151	Yes
26	5511	25	2.5	186	No
27	5507	23	1.5	190	Yes
28	5502	23	1.3	185	Yes
29	5505	23	1.2	175	Yes
30	5517	24	1.7	216	Yes
Detection Rate: 76.7 %					

Report No.: RF170912E01D-2 Reference No.: 171109E01

Page No. 57 / 117

Report Format Version: 6.1.2



Trial #	Test	al Performance Pulses per	Pulse	PRI(us)	Detection
π	Frequency	Burst	Width(us)	1 1(1(03)	Detection
	(MHz)	Durst	vviati i(us)		
1	5510	16	6.7	467	Yes
2	5520	18	8.8	304	Yes
3	5500	18	9	316	No
4	5526	18	9.3	439	Yes
5	5509	16	6.9	420	Yes
6	5513	16	6.1	249	Yes
7	5492	18	9.5	463	Yes
8	5503	17	7.9	258	Yes
9	5497	17	7.8	212	Yes
10	5504	17	8.6	236	Yes
11	5528	16	6.1	474	Yes
12	5515	16	6.3	461	No
13	5516	17	7.5	437	Yes
14	5493	18	9.5	287	Yes
15	5507	18	10	395	Yes
16	5510	17	8.1	322	Yes
17	5512	16	7.1	468	Yes
18	5525	17	7.6	255	Yes
19	5506	16	6.8	423	Yes
20	5495	16	6.2	456	Yes
21	5505	17	7.9	351	Yes
22	5523	18	9	411	Yes
23	5521	17	7.5	279	Yes
24	5525	16	6	431	No
25	5511	17	8.7	324	No
26	5510	17	7.5	419	No
27	5516	16	6.5	447	Yes
28	5494	16	6.3	481	No
29	5515	16	6.2	438	Yes
30	5504	16	6.7	270	No



Type 4 Radar Statistical Performances					
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
	(MHz)				
1	5510	12	12.5	467	Yes
2	5520	15	17.2	304	No
3	5500	15	17.8	316	Yes
4	5494	16	18.5	439	Yes
5	5516	13	13.1	420	Yes
6	5528	12	11.3	249	No
7	5497	16	18.8	463	Yes
8	5495	14	15.3	258	No
9	5516	14	15.1	212	Yes
10	5524	15	16.9	236	Yes
11	5514	12	11.2	474	Yes
12	5492	12	11.7	461	Yes
13	5514	13	14.4	437	Yes
14	5527	16	18.9	287	Yes
15	5507	16	19.9	395	Yes
16	5504	14	15.7	322	Yes
17	5502	13	13.4	468	Yes
18	5504	13	14.5	255	No
19	5524	13	12.9	423	Yes
20	5510	12	11.5	456	Yes
21	5503	14	15.3	351	Yes
22	5503	15	17.8	411	Yes
23	5494	13	14.3	279	Yes
24	5496	12	11.1	431	Yes
25	5523	15	17	324	No
26	5516	13	14.5	419	No
27	5498	12	12.1	447	Yes
28	5516	12	11.7	481	Yes
29	5522	12	11.6	438	Yes
30	5491	12	12.7	270	Yes
Detection Rate: 80 %					



	Type 5 Radar Statistical Performances						
Trial #	Minimum	Chirp Center	Test Signal Name	Detection			
	Chirp Width(MHz)	Frequency(MHz)	J				
1	7	5510	LP_Signal_01	Yes			
2	15	5510	LP_Signal_02	Yes			
3	16	5510	LP_Signal_03	Yes			
4	18	5510	LP_Signal_04	Yes			
5	8	5510	LP_Signal_05	Yes			
6	5	5510	LP_Signal_06	No			
7	18	5510	LP_Signal_07	Yes			
8	12	5510	LP_Signal_08	Yes			
9	12	5510	LP_Signal_09	No			
10	15	5510	LP_Signal_10	No			
11	5	5493	LP_Signal_11	No			
12	6	5493	LP_Signal_12	Yes			
13	11	5495	LP_Signal_13	Yes			
14	18	5498	LP_Signal_14	Yes			
15	20	5499	LP_Signal_15	Yes			
16	13	5496	LP_Signal_16	Yes			
17	9	5495	LP_Signal_17	Yes			
18	11	5495	LP_Signal_18	Yes			
19	8	5494	LP_Signal_19	Yes			
20	5	5493	LP_Signal_20	Yes			
21	12	5524	LP_Signal_21	Yes			
22	17	5522	LP_Signal_22	Yes			
23	10	5525	LP_Signal_23	Yes			
24	5	5527	LP_Signal_24	Yes			
25	15	5523	LP_Signal_25	No			
26	11	5525	LP_Signal_26	Yes			
27	7	5526	LP_Signal_27	Yes			
28	6	5527	LP_Signal_28	Yes			
29	6	5527	LP_Signal_29	No			
30	8	5526	LP_Signal_30	Yes			
			Detection	Rate: 80 %			

The Long Pulse Radar pattern shown in Appendix A.1



Type 6 Radar Statistical Performances				
Trial #	Pulses per	Pulse Width(us)	PRI(us)	Detection
	Burst		. ,	
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	No
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	No
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	No
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
Detection Rate: 90 %				



Type 6 Radar Statistical Performances				
Trial #	Hopping Frequency Detection			
	Sequence Name			
1	HOP_FREQ_SEQ_01	Yes		
2	HOP_FREQ_SEQ_02	Yes		
3	HOP_FREQ_SEQ_03	Yes		
4	HOP_FREQ_SEQ_04	No		
5	HOP_FREQ_SEQ_05	Yes		
6	HOP_FREQ_SEQ_06	Yes		
7	HOP_FREQ_SEQ_07	Yes		
8	HOP_FREQ_SEQ_08	Yes		
9	HOP_FREQ_SEQ_09	Yes		
10	HOP_FREQ_SEQ_10	No		
11	HOP_FREQ_SEQ_11	Yes		
12	HOP_FREQ_SEQ_12	Yes		
13	HOP_FREQ_SEQ_13	Yes		
14	HOP_FREQ_SEQ_14	Yes		
15	HOP_FREQ_SEQ_15	Yes		
16	HOP_FREQ_SEQ_16	Yes		
17	HOP_FREQ_SEQ_17	Yes		
18	HOP_FREQ_SEQ_18	Yes		
19	HOP_FREQ_SEQ_19	Yes		
20	HOP_FREQ_SEQ_20	Yes		
21	HOP_FREQ_SEQ_21	Yes		
22	HOP_FREQ_SEQ_22	No		
23	HOP_FREQ_SEQ_23	Yes		
24	HOP_FREQ_SEQ_24	Yes		
25	HOP_FREQ_SEQ_25	Yes		
26	HOP_FREQ_SEQ_26	Yes		
27	HOP_FREQ_SEQ_27	Yes		
28	HOP_FREQ_SEQ_28	Yes		
29	HOP_FREQ_SEQ_29	Yes		
30	HOP_FREQ_SEQ_30	Yes		
		Detection Rate: 90 %		

The Frequency Hopping Radar pattern shown in Appendix A.2



Туре	Type 1 Radar Statistical Performances					
Trial	Test	Pulse	Pulse	Pulses	Pulse	Detection
#	Frequency	Repetition	Repetition	per	Repetition	
	(MHz)	Frequency	Frequency	Burst	Interval	
		Number (1	(Pulse per		(microseconds)	
		to 23)	seconds)			
1	5530	15	1253	67	798	Yes
2	5540	16	1223	65	818	No
3	5560	4	1730	92	578	Yes
4	5520	11	1393	74	718	Yes
5	5500	22	1066	57	938	Yes
6	5496	7	1567	83	638	Yes
7	5560	2	1859	99	538	Yes
8	5503	8	1520	81	658	Yes
9	5523	1	1931	102	518	Yes
10	5560	19	1139	61	878	Yes
11	5519	21	1089	58	918	Yes
12	5557	23	326.2	18	3066	Yes
13	5555	9	1475	78	678	Yes
14	5512	5	1672	89	598	Yes
15	5518	6	1618	86	618	Yes
16	5559		1111	59	900	Yes
17	5543		1024	55	977	Yes
18	5565		625.8	34	1598	No
19	5559		730.5	39	1369	Yes
20	5496		1181	63	847	Yes
21	5529		400.6	22	2496	Yes
22	5535		529.4	28	1889	Yes
23	5553		347.6	19	2877	Yes
24	5522		641.4	34	1559	Yes
25	5495		508.9	27	1965	Yes
26	5493		345.4	19	2895	No
27	5513		580.7	31	1722	Yes
28	5561		786.8	42	1271	Yes
29	5511		808.4	43	1237	Yes
30	5499		517.1	28	1934	Yes
	Detection Rate: 90 %					



802.11ac (VHT80)

Type 2 Radar Statistical Performances					
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
	(MHz)				
1	5530	24	1.7	174	Yes
2	5540	27	3.8	176	No
3	5560	28	4	161	Yes
4	5520	28	4.3	226	Yes
5	5500	24	1.9	193	Yes
6	5497	23	1.1	230	Yes
7	5539	29	4.5	198	Yes
8	5506	26	2.9	227	Yes
9	5534	26	2.8	171	No
10	5527	27	3.6	221	Yes
11	5524	23	1.1	180	Yes
12	5538	23	1.3	189	Yes
13	5543	25	2.5	204	Yes
14	5504	29	4.5	203	Yes
15	5499	29	5	170	No
16	5531	26	3.1	201	Yes
17	5555	24	2.1	218	Yes
18	5547	25	2.6	208	Yes
19	5518	24	1.8	223	Yes
20	5535	23	1.2	220	Yes
21	5556	26	2.9	224	Yes
22	5554	28	4	160	Yes
23	5555	25	2.5	209	Yes
24	5541	23	1	205	Yes
25	5558	27	3.7	151	No
26	5564	25	2.5	186	Yes
27	5493	23	1.5	190	Yes
28	5555	23	1.3	185	Yes
29	5534	23	1.2	175	Yes
30	5567	24	1.7	216	Yes
Detection Rate: 86.7 %					



802.11ac (VHT80)

Type 3 Radar Statistical Performances					
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
	(MHz)				
1	5530	16	6.7	467	No
2	5540	18	8.8	304	No
3	5560	18	9	316	No
4	5520	18	9.3	439	Yes
5	5500	16	6.9	420	Yes
6	5567	16	6.1	249	Yes
7	5560	18	9.5	463	Yes
8	5516	17	7.9	258	Yes
9	5528	17	7.8	212	No
10	5516	17	8.6	236	Yes
11	5526	16	6.1	474	Yes
12	5514	16	6.3	461	Yes
13	5520	17	7.5	437	Yes
14	5515	18	9.5	287	No
15	5519	18	10	395	Yes
16	5532	17	8.1	322	No
17	5528	16	7.1	468	Yes
18	5552	17	7.6	255	Yes
19	5540	16	6.8	423	Yes
20	5502	16	6.2	456	Yes
21	5546	17	7.9	351	Yes
22	5544	18	9	411	Yes
23	5527	17	7.5	279	Yes
24	5498	16	6	431	Yes
25	5552	17	8.7	324	Yes
26	5538	17	7.5	419	Yes
27	5505	16	6.5	447	No
28	5500	16	6.3	481	Yes
29	5521	16	6.2	438	Yes
30	5536	16	6.7	270	Yes
	Detection Rate: 76.7 %				

Page No. 65 / 117

Report Format Version: 6.1.2



802.11ac (VHT80)

Type 4 Radar Statistical Performances					
Trial #	Test	Pulses per	Pulse	PRI(us)	Detection
	Frequency	Burst	Width(us)		
	(MHz)				
1	5530	12	12.5	467	No
2	5540	15	17.2	304	Yes
3	5560	15	17.8	316	Yes
4	5520	16	18.5	439	Yes
5	5500	13	13.1	420	No
6	5562	12	11.3	249	Yes
7	5509	16	18.8	463	Yes
8	5554	14	15.3	258	Yes
9	5531	14	15.1	212	Yes
10	5560	15	16.9	236	Yes
11	5529	12	11.2	474	Yes
12	5501	12	11.7	461	No
13	5493	13	14.4	437	Yes
14	5543	16	18.9	287	Yes
15	5534	16	19.9	395	Yes
16	5498	14	15.7	322	Yes
17	5544	13	13.4	468	Yes
18	5566	13	14.5	255	Yes
19	5549	13	12.9	423	Yes
20	5530	12	11.5	456	Yes
21	5516	14	15.3	351	Yes
22	5535	15	17.8	411	Yes
23	5526	13	14.3	279	Yes
24	5546	12	11.1	431	Yes
25	5546	15	17	324	Yes
26	5531	13	14.5	419	Yes
27	5541	12	12.1	447	Yes
28	5502	12	11.7	481	Yes
29	5514	12	11.6	438	No
30	5551	12	12.7	270	Yes
Detection Rate: 86.7 %					



	Type 5 Radar Statistical Performances					
Trial #	Minimum	Chirp Center	Test Signal Name	Detection		
	Chirp Width(MHz)	Frequency(MHz)	· ·			
1	7	5530	LP_Signal_01	No		
2	15	5530	LP_Signal_02	Yes		
3	16	5530	LP_Signal_03	Yes		
4	18	5530	LP_Signal_04	Yes		
5	8	5530	LP_Signal_05	Yes		
6	5	5530	LP_Signal_06	Yes		
7	18	5530	LP_Signal_07	Yes		
8	12	5530	LP_Signal_08	Yes		
9	12	5530	LP_Signal_09	No		
10	15	5530	LP_Signal_10	Yes		
11	5	5494	LP_Signal_11	Yes		
12	6	5494	LP_Signal_12	Yes		
13	11	5496	LP_Signal_13	Yes		
14	18	5499	LP_Signal_14	Yes		
15	20	5500	LP_Signal_15	Yes		
16	13	5497	LP_Signal_16	Yes		
17	9	5496	LP_Signal_17	Yes		
18	11	5496	LP_Signal_18	Yes		
19	8	5495	LP_Signal_19	Yes		
20	5	5494	LP_Signal_20	No		
21	12	5563	LP_Signal_21	Yes		
22	17	5561	LP_Signal_22	Yes		
23	10	5564	LP_Signal_23	No		
24	5	5566	LP_Signal_24	No		
25	15	5562	LP_Signal_25	Yes		
26	11	5564	LP_Signal_26	Yes		
27	7	5565	LP_Signal_27	Yes		
28	6	5566	LP_Signal_28	Yes		
29	6	5566	LP_Signal_29	No		
30	8	5565	LP_Signal_30	Yes		
Detection Rate: 80 %						

The Long Pulse Radar pattern shown in Appendix A.1



Type 6 F	Type 6 Radar Statistical Performances				
Trial #	Pulses per	Pulse Width(us)	PRI(us)	Detection	
	Burst				
1	9	1	333.3	Yes	
2	9	1	333.3	Yes	
3	9	1	333.3	Yes	
4	9	1	333.3	Yes	
5	9	1	333.3	Yes	
6	9	1	333.3	Yes	
7	9	1	333.3	Yes	
8	9	1	333.3	Yes	
9	9	1	333.3	Yes	
10	9	1	333.3	Yes	
11	9	1	333.3	Yes	
12	9	1	333.3	Yes	
13	9	1	333.3	No	
14	9	1	333.3	Yes	
15	9	1	333.3	Yes	
16	9	1	333.3	Yes	
17	9	1	333.3	Yes	
18	9	1	333.3	Yes	
19	9	1	333.3	Yes	
20	9	1	333.3	Yes	
21	9	1	333.3	Yes	
22	9	1	333.3	Yes	
23	9	1	333.3	Yes	
24	9	1	333.3	Yes	
25	9	1	333.3	Yes	
26	9	1	333.3	No	
27	9	1	333.3	Yes	
28	9	1	333.3	Yes	
29	9	1	333.3	No	
30	9	1	333.3	Yes	
	Detection Rate: 90 %				




Type 6 Radar Statistical Performances				
Trial #	Hopping Frequency	Detection		
	Sequence Name			
1	HOP_FREQ_SEQ_01	Yes		
2	HOP_FREQ_SEQ_02	Yes		
3	HOP_FREQ_SEQ_03	Yes		
4	HOP_FREQ_SEQ_04	Yes		
5	HOP_FREQ_SEQ_05	Yes		
6	HOP_FREQ_SEQ_06	Yes		
7	HOP_FREQ_SEQ_07	Yes		
8	HOP_FREQ_SEQ_08	Yes		
9	HOP_FREQ_SEQ_09	Yes		
10	HOP_FREQ_SEQ_10	Yes		
11	HOP_FREQ_SEQ_11	Yes		
12	HOP_FREQ_SEQ_12	Yes		
13	HOP_FREQ_SEQ_13	No		
14	HOP_FREQ_SEQ_14	Yes		
15	HOP_FREQ_SEQ_15	Yes		
16	HOP_FREQ_SEQ_16	Yes		
17	HOP_FREQ_SEQ_17	Yes		
18	HOP_FREQ_SEQ_18	Yes		
19	HOP_FREQ_SEQ_19	Yes		
20	HOP_FREQ_SEQ_20	Yes		
21	HOP_FREQ_SEQ_21	Yes		
22	HOP_FREQ_SEQ_22	Yes		
23	HOP_FREQ_SEQ_23	Yes		
24	HOP_FREQ_SEQ_24	Yes		
25	HOP_FREQ_SEQ_25	Yes		
26	HOP_FREQ_SEQ_26	No		
27	HOP_FREQ_SEQ_27	Yes		
28	HOP_FREQ_SEQ_28	Yes		
29	HOP_FREQ_SEQ_29	No		
30	HOP_FREQ_SEQ_30	Yes		
		Detection Rate: 90 %		

The Frequency Hopping Radar pattern shown in Appendix A.2




6.2.5 Non-Occupancy Period

1) Test results demonstrating an associated client link is established with the master on a test frequency.




EUT (master) links with Client on 5530MHz

2) The master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

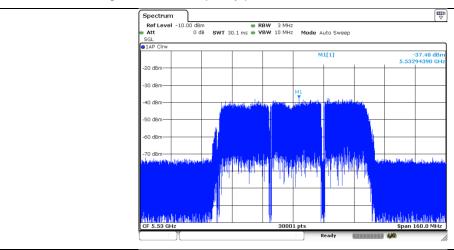

Client performed with channel-loading via master.




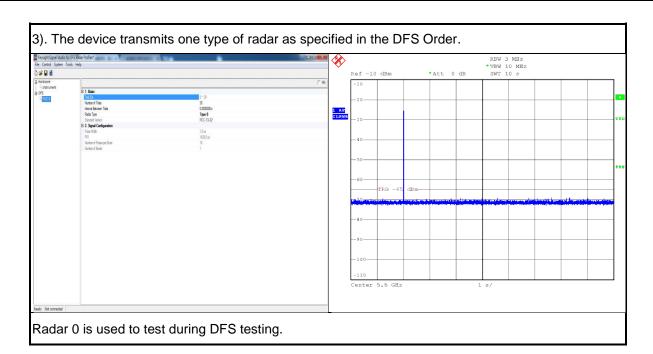

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;

Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;

5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

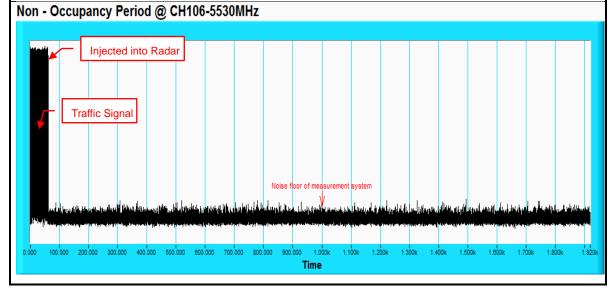



7. Information on The Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-2-26052180 Tel: 886-3-6668565 Fax: 886-2-26051924 Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

Report No.: RF170912E01D-2 Page No. 72 / 117 Report Format Version: 6.1.2

Reference No.: 171109E01



8. APPENDIX-A

RADAR TEST SIGNAL

A.1 The Long Pulse Radar Pattern

Long Pulse Radar Test Signal
Test Signal Name: LP_Signal_01
Number of Bursts in Trial: 10

INUITI	Dei Oi Duist	S III I IIai.	10			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	58.7	1765	-	-
2	3	7	84.3	1452	1398	1571
3	3	7	87.4	1358	1377	1111
4	3	7	91.4	1554	1036	1662
5	1	7	61.8	1828	-	-
6	1	7	51.8	1621	-	-
7	3	7	93.4	1063	1317	1923
8	2	7	73.8	1804	1156	-
9	2	7	72.6	1935	1079	-
10	2	7	82.5	1049	1478	-
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Report No.: RF170912E01D-2 Page No. 73 / 117 Report Format Version: 6.1.2

Reference No.: 171109E01



Test Signal Name: LP_Signal_02

Number of Bursts in Trial: 16

Number of Bursts in Trial: 16							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
1	1	15	51.3	1713	-	-	
2	1	15	54	1485	-	-	
3	2	15	69.1	1043	1750	-	
4	3	15	93.8	1665	1844	1155	
5	3	15	99.1	1505	1825	1538	
6	2	15	76	1866	1508	-	
7	1	15	63.5	1889	-	-	
8	2	15	69.8	1024	1578	-	
9	1	15	60.9	1067	-	-	
10	1	15	52.9	1162	-	-	
11	2	15	73.7	1211	1581	-	
12	3	15	87.8	1516	1753	1473	
13	2	15	68.6	1029	1730	-	
14	1	15	50.9	1930	-	-	
15	2	15	83	1675	1303	-	
16	2	15	69.5	1296	1410	-	
17							
18							
19							
20							



Test Signal Name: LP_Signal_03

Number of Bursts in Trial: 17

Numl	ber of Burst	s in Trial:	17			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	16	56.4	1603	-	-
2	1	16	53.9	1545	-	-
3	1	16	53.5	1943	-	-
4	1	16	59.4	1206	-	-
5	2	16	78.5	1305	1969	-
6	3	16	86.1	1355	1823	1948
7	2	16	67	1788	1958	-
8	2	16	74.5	1213	1124	-
9	2	16	81.3	1215	1366	-
10	2	16	81.5	1429	1293	-
11	2	16	79.9	1345	1990	-
12	1	16	50.5	1996	-	-
13	3	16	88.4	1871	1121	1723
14	1	16	65.7	1964	-	-
15	3	16	93	1962	1265	1267
16	1	16	63.6	1020	-	-
17	2	16	78.1	1737	1422	-
18						
19						
20						



Test Signal Name: LP_Signal_04

Number of Bursts in Trial: Pulses per Chrip Pulse Burst PRI-3 (us) PRI-1 (us) PRI-2 (us) Burst (MHz) Width(us) 76.8 72.6 -70.4 -88.6 --93.3 86.7 86.7 57.7 78.1 59.9 65.7 86.4 58.3 92.3 95.4



Test Signal Name: LP_Signal_05

Number of Bursts in Trial: 11

Numl	Number of Bursts in Trial: 11								
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)			
1	3	8	89.4	1574	1736	1023			
2	2	8	70.2	1655	1500	-			
3	1	8	63.2	1445	-	-			
4	1	8	53.9	1098	-	-			
5	1	8	65.2	1918	-	-			
6	3	8	87.1	1453	1658	1236			
7	3	8	94.6	1896	1154	1456			
8	1	8	62.4	1646	-	-			
9	2	8	67.6	1600	1439	-			
10	3	8	96.2	1629	1909	1879			
11	1	8	62.9	1793	-	-			
12									
13									
14									
15									
16									
17									
18									
19									
20									



Test Signal Name: LP_Signal_06

Number of Bursts in Trial: 8

Num	Number of Bursts in Trial: 8							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	5	81.4	1413	1565	-		
2	3	5	95.3	1774	1131	1995		
3	1	5	60	1160	-	-		
4	1	5	60.1	1922	-	-		
5	1	5	59.6	1069	-	1		
6	3	5	91.8	1259	1810	1477		
7	2	5	78.4	1763	1487	-		
8	1	5	62.6	1122	-	1		
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								



Test Signal Name: LP_Signal_07

Number of Bursts in Trial: 19

Num	ber of Burst	s in Trial:	19			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	62.4	1000	-	-
2	2	18	67.9	1925	1039	-
3	3	18	99	1890	1228	1326
4	1	18	60.3	1210	-	-
5	2	18	72.7	1688	1548	-
6	3	18	91.9	1988	1503	1201
7	2	18	78.3	1309	1198	-
8	3	18	88.9	1080	1399	1115
9	1	18	64.5	1087	-	-
10	1	18	60.3	1133	-	-
11	1	18	65.8	1579	-	-
12	3	18	93.5	1619	1682	1758
13	3	18	92.2	1533	1842	1979
14	3	18	96.2	1672	1744	1971
15	2	18	70.3	1414	1692	-
16	1	18	53.5	1706	-	-
17	3	18	93.4	1870	1242	1395
18	1	18	64.9	1438	-	-
19	2	18	72.9	1239	1817	-
20						



Test Signal Name: LP_Signal_08

Number of Bursts in Trial: 14

Num	ber of Burst	s in Trial:	14			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	57.3	1698	-	-
2	2	12	83.3	1700	1427	-
3	1	12	62.5	1952	-	-
4	2	12	76.1	1612	1397	-
5	3	12	87.5	1139	1901	1400
6	3	12	97.1	1352	1798	1636
7	2	12	73.8	1496	1536	-
8	1	12	55.2	1357	-	-
9	1	12	62.5	1811	-	-
10	2	12	68.1	1251	1843	-
11	3	12	99.9	1819	1057	1017
12	1	12	61.3	1342	-	-
13	2	12	73.9	1725	1872	-
14	1	12	58	1747	-	-
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_09

Number of Bursts in Trial: 13

Num	Number of Bursts in Trial: 13								
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)			
1	3	12	95.8	1465	1975	1904			
2	2	12	79.9	1764	1174	-			
3	2	12	77.4	1235	1584	-			
4	3	12	90.4	1114	1974	1027			
5	1	12	59.9	1126	-	-			
6	3	12	90.5	1275	1985	1845			
7	1	12	62	1062	-	-			
8	3	12	87	1463	1587	1887			
9	3	12	98.3	1586	1187	1651			
10	2	12	80.1	1277	1881	-			
11	1	12	52.1	1330	-	-			
12	1	12	51.7	1333	-	-			
13	1	12	52.7	1867	-	-			
14									
15									
16									
17									
18									
19									
20									



Test Signal Name: LP_Signal_10

Number of Bursts in Trial: 16

Number of Bursts in Trial: 16								
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	15	70.7	1934	1731	ı		
2	3	15	85.3	1179	1751	1711		
3	2	15	75	1034	1261	-		
4	1	15	56.4	1954	-	-		
5	2	15	66.7	1243	1090	-		
6	3	15	94.8	1224	1970	1214		
7	2	15	68.8	1701	1280	-		
8	2	15	71	1563	1537	1		
9	2	15	79.4	1525	1389	1		
10	3	15	100	1717	1498	1740		
11	3	15	91.9	1295	1037	1829		
12	1	15	61.5	1949	-	-		
13	1	15	63.2	1596	-	1		
14	3	15	99	1254	1919	1073		
15	3	15	86.6	1606	1849	1202		
16	1	15	65.8	1635	-	-		
17								
18								
19								
20								



Test Signal Name: LP_Signal_11
Number of Bursts in Trial: 8

Numl	Number of Bursts in Trial: 8								
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)			
1	2	5	70.7	1897	1749	-			
2	1	5	64.6	1965	-	-			
3	3	5	99	1012	1045	1772			
4	3	5	91.9	1583	1466	1549			
5	3	5	85.5	1420	1780	1459			
6	3	5	96.5	1530	1924	1835			
7	1	5	66.2	1550	-	-			
8	3	5	92.9	1929	1335	1883			
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									



Test Signal Name: LP_Signal_12

Number of Bursts in Trial: 9

Num	Number of Bursts in Trial: 9							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	1	6	63.1	1642	-	-		
2	3	6	83.5	1005	1981	1250		
3	2	6	74.5	1914	1474	-		
4	1	6	60.9	1430	-	-		
5	2	6	70.4	1680	1542	1		
6	3	6	85.1	1048	1127	1393		
7	2	6	82.4	1605	1282	-		
8	2	6	74	1108	1691	1		
9	3	6	85.7	1486	1976	1212		
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								



Test Signal Name: LP_Signal_13

Number of Bursts in Trial: 12

Pulses per Chrip Pulse Burst PRI-1 (us) PRI-2 (us) PRI-3 (us) Burst Width(us) (MHz) 94.4 ---87.6 61.7 -83.2 66.6 55.1 66.4 -85.6



Test Signal Name: LP_Signal_14

Number of Bursts in Trial: 19

Numl	Number of Bursts in Trial: 19							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	18	78.9	1613	1263	-		
2	3	18	96.7	1627	1432	1986		
3	3	18	91.5	1472	1759	1784		
4	2	18	75.4	1274	1795	-		
5	2	18	71.1	1968	1444	-		
6	2	18	77.5	1588	1441	-		
7	1	18	65.4	1710	-	-		
8	1	18	53.1	1419	-	-		
9	1	18	59.9	1518	-	-		
10	2	18	67.3	1195	1168	-		
11	2	18	74.2	1386	1216	-		
12	2	18	69	1557	1132	-		
13	2	18	82.1	1987	1186	-		
14	3	18	93.3	1365	1032	1728		
15	2	18	83.3	1103	1568	-		
16	2	18	70.3	1699	1281	-		
17	1	18	57.9	1285	-	-		
18	1	18	50.6	1850	-	-		
19	3	18	94.3	1479	1218	1733		
20								



Test Signal Name: LP_Signal_15

Number of Bursts in Trial: 20

Num	ber of Bursts	Number of Bursts in Trial: 20								
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)				
1	2	20	67.5	1434	1117	-				
2	2	20	67.8	1567	1773	-				
3	2	20	75.9	1846	1362	ı				
4	2	20	68.9	1237	1818	-				
5	3	20	96	1339	1796	1852				
6	1	20	66.6	1289	-	ı				
7	2	20	78.3	1862	1856	-				
8	1	20	58.9	1412	-	ı				
9	2	20	81.5	1113	1591	•				
10	2	20	82.4	1059	1861	ı				
11	3	20	86.8	1797	1163	1320				
12	3	20	98.5	1268	1300	1868				
13	2	20	80.1	1086	1482	•				
14	3	20	86.3	1860	1407	1998				
15	1	20	57.2	1241	-	-				
16	3	20	84.3	1808	1873	1628				
17	3	20	86.8	1258	1302	1978				
18	2	20	83	1690	1378	-				
19	3	20	85.6	1327	1956	1311				
20	3	20	99.4	1112	1815	1262				



Report Format Version: 6.1.2

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_16

Number of Bursts in Trial: 14

Numl	Number of Bursts in Trial: 14							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	1	13	57.5	1379	-	-		
2	2	13	67	1551	1620	-		
3	2	13	70.9	1939	1083	-		
4	2	13	75.7	1332	1476	-		
5	2	13	77.1	1840	1010	-		
6	2	13	78.8	1371	1618	-		
7	1	13	51	1494	-	-		
8	1	13	55.4	1794	-	-		
9	2	13	68.5	1590	1266	-		
10	3	13	100	1484	1314	1428		
11	3	13	96.4	1363	1361	1292		
12	3	13	97.2	1694	1480	1446		
13	3	13	86.4	1447	1227	1102		
14	2	13	72.1	1184	1638	-		
15								
16								
17								
18								
19								
20								



Test Signal Name: LP_Signal_17

Number of Bursts in Trial: 11

Numl	per of Bursts	s in Trial:	11			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	62.4	1329	-	-
2	2	9	67.8	1364	1937	-
3	1	9	53	1790	-	-
4	2	9	77.8	1546	1906	-
5	3	9	95.6	1145	1743	1499
6	1	9	58.8	1199	-	-
7	3	9	92.8	1424	1408	1381
8	2	9	68.5	1340	1972	-
9	3	9	84	1607	1663	1270
10	2	9	70.8	1468	1760	-
11	2	9	73.1	1869	1515	-
12						-
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_18

Number of Bursts in Trial: 13

Numb	Number of Bursts in Trial: 13							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	11	68.8	1504	1973	-		
2	3	11	94.2	1920	1299	1467		
3	2	11	82.7	1003	1351	-		
4	2	11	74.8	1597	1457	-		
5	1	11	58.9	1874	-	-		
6	3	11	96.5	1838	1708	1328		
7	3	11	87.3	1405	1271	1687		
8	2	11	72.4	1200	1433	-		
9	1	11	51.3	1475	-	-		
10	3	11	86.8	1159	1652	1942		
11	1	11	50.4	1056	-	-		
12	3	11	97	1884	1876	1415		
13	1	11	50.1	1519	-	-		
14								
15								
16								
17								
18								
19								
20								



Test Signal Name: LP_Signal_19
Number of Bursts in Trial: 10

ber of Burst	s in Trial:	10			
Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
3	8	91.9	1301	1337	1645
2	8	67.2	1983	1040	-
1	8	65.5	1671	-	-
2	8	72.8	1489	1016	-
3	8	90.5	1552	1180	1064
2	8	81.6	1807	1853	-
3	8	86	1312	1905	1278
3	8	89.6	1152	1068	1832
1	8	62.1	1119	-	-
1	8	58	1234	-	-
	Pulses per Burst 3 2 1 2 3 2 3 2 3 1	3 8 2 8 1 8 2 8 3 8 2 8 3 8 3 8 1 8	Pulses per Burst Chrip (MHz) Pulse Width(us) 3 8 91.9 2 8 67.2 1 8 65.5 2 8 72.8 3 8 90.5 2 8 81.6 3 8 86 3 8 89.6 1 8 62.1	Pulses per Burst Chrip (MHz) Pulse Width(us) PRI-1 (us) 3 8 91.9 1301 2 8 67.2 1983 1 8 65.5 1671 2 8 72.8 1489 3 8 90.5 1552 2 8 81.6 1807 3 8 86 1312 3 8 89.6 1152 1 8 62.1 1119	Pulses per Burst Chrip (MHz) Pulse Width(us) PRI-1 (us) PRI-2 (us) 3 8 91.9 1301 1337 2 8 67.2 1983 1040 1 8 65.5 1671 - 2 8 72.8 1489 1016 3 8 90.5 1552 1180 2 8 81.6 1807 1853 3 8 86 1312 1905 3 8 89.6 1152 1068 1 8 62.1 1119 -



Test Signal Name: LP_Signal_20
Number of Bursts in Trial: 8

Num	ber of Burst	s in Trial:	8			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	73.8	1071	1915	-
2	3	5	89.5	1294	1450	1025
3	2	5	81.2	1144	1146	-
4	1	5	59	1041	-	-
5	3	5	87.5	1096	1941	1018
6	2	5	76.7	1667	1947	-
7	1	5	56.5	1573	-	-
8	3	5	89	1033	1391	1304
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_21

Number of Bursts in Trial: 14

Number of Bursts in Trial: 14								
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	12	83.1	1762	1058	-		
2	1	12	50	1739	-	-		
3	1	12	52.6	1055	-	-		
4	1	12	58.2	1704	-	-		
5	3	12	84.6	1226	1177	1886		
6	2	12	68.3	1269	1851	-		
7	2	12	80.6	1814	1074	-		
8	1	12	59.5	1009	-	-		
9	1	12	53.4	1417	-	-		
10	1	12	59.1	1431	-	-		
11	2	12	74.8	1002	1394	-		
12	3	12	85	1670	1755	1158		
13	3	12	85.3	1307	1560	1078		
14	1	12	61.9	1197	-	-		
15								
16								
17								
18								
19								
20								



Report Format Version: 6.1.2

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_22
Number of Bursts in Trial: 17

Num	ber of Bursts	s in Trial:	17			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	70.8	1022	1015	-
2	1	17	52.9	1483	-	-
3	3	17	86	1524	1308	1287
4	2	17	78.4	1821	1406	-
5	3	17	93.3	1991	1966	1290
6	2	17	70	1858	1471	-
7	2	17	78.1	1507	1705	-
8	1	17	52.4	1060	-	-
9	3	17	84.8	1859	1839	1993
10	3	17	83.5	1150	1492	1443
11	1	17	56.7	1208	-	-
12	3	17	86.2	1674	1125	1053
13	1	17	58.8	1436	-	-
14	3	17	85.4	1686	1509	1577
15	2	17	77.7	1297	1298	-
16	3	17	87.4	1649	1894	1075
17	3	17	99.8	1185	1167	1616
18						
19						
20						



Test Signal Name: LP_Signal_23

Number of Bursts in Trial: 12

Numl	Number of Bursts in Trial: 12							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	3	10	95.7	1353	1813	1028		
2	3	10	94.9	1735	1994	1084		
3	3	10	97.9	1354	1792	1418		
4	2	10	67.4	1348	1008	-		
5	3	10	96.9	1916	1425	1283		
6	3	10	97.6	1384	1050	1569		
7	3	10	83.6	1231	1219	1194		
8	2	10	82.6	1128	1346	-		
9	3	10	97.2	1142	1769	1173		
10	3	10	92.3	1181	1164	1458		
11	2	10	80.9	1222	1756	-		
12	2	10	78.1	1190	1999	-		
13								
14								
15								
16								
17								
18								
19								
20								



Test Signal Name: LP_Signal_24
Number of Bursts in Trial: 8

Num	Number of Bursts in Trial: 8							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	5	76.9	1564	1767	-		
2	1	5	64.7	1437	-	-		
3	2	5	77.1	1046	1944	-		
4	2	5	72.7	1440	1374	-		
5	1	5	61.9	1035	-	-		
6	2	5	68.6	1205	1892	-		
7	2	5	78.3	1047	1273	-		
8	2	5	73.1	1426	1863	-		
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								



Test Signal Name: LP_Signal_25

Number of Bursts in Trial: 16

Numi	Number of Bursts in Trial: 16							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	1	15	59.1	1718	-	ı		
2	3	15	83.5	1070	1129	1318		
3	3	15	86.5	1176	1253	1442		
4	1	15	60.8	1209	-	-		
5	2	15	80.7	2000	1360	1		
6	1	15	65.2	1101	-	1		
7	2	15	69.1	1511	1030	-		
8	1	15	51.5	1161	-	1		
9	3	15	98.5	1061	1951	1812		
10	1	15	59.5	1325	-	1		
11	3	15	95.3	1284	1650	1169		
12	2	15	81.8	1460	1077	•		
13	1	15	66	1149	-	•		
14	1	15	59.3	1373	-	-		
15	2	15	79.2	1836	1534	-		
16	3	15	90.2	1455	1738	1490		
17								
18								
19								
20								



Test Signal Name: LP_Signal_26
Number of Bursts in Trial: 13

Numl	ber of Burst	s in Trial:	13			
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	87.5	1343	1331	1313
2	3	11	94.6	1448	1543	1803
3	2	11	73.9	1722	1514	-
4	1	11	55.4	1506	-	-
5	1	11	52.3	1960	-	-
6	3	11	95.8	1240	1380	1252
7	3	11	96.1	1372	1411	1908
8	2	11	77.8	1885	1593	-
9	3	11	97.2	1021	1614	1633
10	2	11	74.3	1582	1097	-
11	1	11	57.9	1031	-	-
12	2	11	68.8	1927	1936	-
13	2	11	79.6	1857	1470	-
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_27

Number of Bursts in Trial: 9

Number of Bursts in Trial: 9							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
1	1	7	63.4	1595	-	-	
2	3	7	97	1451	1660	1562	
3	2	7	66.7	1116	1544	-	
4	3	7	99.5	1553	1526	1768	
5	1	7	64.3	1107	-	-	
6	3	7	90.7	1992	1626	1899	
7	1	7	62.1	1630	-	-	
8	1	7	58.3	1676	-	-	
9	3	7	87	1726	1696	1464	
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							



Test Signal Name: LP_Signal_28

Number of Bursts in Trial: 9

Number of Bursts in Trial: 9							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
1	3	6	86.8	1673	1383	1653	
2	2	6	81.7	1841	1911	-	
3	2	6	78.4	1900	1229	-	
4	2	6	82.1	1527	1072	-	
5	3	6	84.1	1893	1742	1491	
6	3	6	87.7	1247	1341	1955	
7	3	6	97	1559	1685	1572	
8	3	6	99.1	1641	1727	1848	
9	1	6	62	1245	-	ı	
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							



Test Signal Name: LP_Signal_29

Number of Bursts in Trial: 8

Numl	Number of Bursts in Trial: 8							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	2	6	67.5	1193	1182	-		
2	3	6	85.6	1221	1741	1338		
3	3	6	86.9	1580	1775	1809		
4	3	6	85.3	1082	1854	1095		
5	2	6	67.3	1898	1977	-		
6	3	6	94.8	1791	1350	1230		
7	2	6	72.9	1681	1323	-		
8	2	6	70.7	1709	1123	-		
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								



Test Signal Name: LP_Signal_30

Number of Bursts in Trial: 10

Number	Number of Bursts in Trial: 10							
Burst	Pulses per Burst	Chrip (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	1	8	63.3	1044	-	-		
2	3	8	87.4	1945	1602	1203		
3	1	8	58.7	1556	-	-		
4	1	8	63.6	1598	-	-		
5	1	8	56.3	1110	-	-		
6	1	8	57.2	1878	-	-		
7	1	8	50.3	1659	-	-		
8	2	8	71.9	1143	1724	-		
9	3	8	85.1	1404	1715	1449		
10	1	8	62.5	1276	-	-		
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								



A.2 The Frequency Hopping Radar pattern

Норі	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_01							
Frequency (MHz)	0	1	2	3	4			
0	5684	5647	5388	5528	5616			
5	5491	5605	5502	5588	5683			
10	5313	5430	5420	5521	5622			
15	5292	5485	5489	5387	5265			
20	5419	5271	5508	5386	5410			
25	5494	5600	5471	5711	5584			
30	5719	5342	5361	5308	5639			
35	5397	5580	5664	5667	5349			
40	5290	5541	5665	5322	5585			
45	5501	5330	5264	5350	5718			
50	5447	5378	5340	5445	5285			
55	5389	5252	5368	5469	5713			
60	5384	5516	5254	5689	5318			
65	5416	5459	5607	5475	5514			
70	5630	5542	5263	5379	5455			
75	5411	5550	5617	5554	5708			
80	5688	5619	5604	5258	5695			
85	5559	5301	5690	5596	5537			
90	5701	5448	5611	5658	5338			
95	5525	5327	5413	5555	5546			

Нор	ping Frequen	cy Sequenc	e Name: HOP_	FREQ_SEQ_	_02
Frequency (MHz)	0	1	2	3	4
0	5464	5411	5324	5689	5458
5	5630	5530	5577	5276	5415
10	5719	5316	5461	5619	5643
15	5380	5612	5592	5432	5554
20	5427	5340	5449	5475	5383
25	5382	5549	5674	5437	5618
30	5286	5706	5318	5523	5595
35	5264	5293	5460	5442	5263
40	5604	5624	5603	5562	5582
45	5430	5310	5347	5311	5296
50	5712	5254	5516	5496	5374
55	5687	5574	5556	5423	5331
60	5581	5487	5379	5723	5285
65	5650	5298	5463	5666	5337
70	5541	5548	5538	5668	5260
75	5526	5677	5586	5376	5669
80	5299	5277	5289	5255	5462
85	5384	5361	5407	5588	5474
90	5681	5395	5482	5396	5670
95	5355	5580	5700	5295	5658

Report No.: RF170912E01D-2 Page No. 103 / 117 Report Format Version: 6.1.2

Report No.: RF170912E01D-2 Reference No.: 171109E01



Норг	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_03							
Frequency (MHz)	0	1	2	3	4			
0	5719	5650	5260	5278	5678			
5	5672	5552	5652	5439	5622			
10	5580	5502	5339	5664	5371			
15	5264	5695	5477	5271	5338			
20	5506	5487	5467	5356	5648			
25	5401	5402	5541	5425	5692			
30	5275	5263	5565	5415	5306			
35	5384	5256	5595	5540	5707			
40	5327	5579	5359	5668	5430			
45	5369	5252	5599	5605	5547			
50	5560	5510	5518	5269	5280			
55	5521	5400	5458	5512	5544			
60	5305	5555	5586	5596	5499			
65	5412	5689	5607	5344	5620			
70	5524	5293	5636	5697	5422			
75	5551	5337	5405	5441	5352			
80	5610	5365	5701	5324	5429			
85	5542	5722	5272	5498	5419			
90	5304	5372	5635	5723	5598			
95	5274	5286	5564	5281	5589			

Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_04							
Frequency (MHz)	0	1	2	3	4			
0	5499	5414	5671	5439	5520			
5	5714	5477	5252	5505	5451			
10	5484	5369	5543	5534	5685			
15	5459	5391	5323	5425	5463			
20	5346	5575	5428	5556	5329			
25	5536	5350	5605	5645	5686			
30	5467	5581	5707	5381	5717			
35	5710	5445	5475	5624	5273			
40	5663	5379	5412	5479	5470			
45	5673	5666	5648	5513	5427			
50	5305	5389	5481	5393	5598			
55	5649	5711	5365	5457	5709			
60	5694	5332	5641	5250	5387			
65	5509	5542	5700	5361	5424			
70	5622	5314	5510	5296	5336			
75	5478	5595	5342	5565	5631			
80	5328	5447	5661	5508	5415			
85	5724	5330	5640	5287	5297			
90	5593	5495	5567	5504	5453			
95	5635	5316	5486	5690	5376			



Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_05							
Frequency (MHz)	0	1	2	3	4			
0	5657	5653	5607	5600	5265			
5	5378	5499	5327	5668	5658			
10	5415	5633	5681	5254	5706			
15	5547	5421	5329	5470	5655			
20	5354	5266	5369	5645	5302			
25	5677	5333	5274	5720	5509			
30	5664	5596	5491	5433	5584			
35	5566	5420	5426	5577	5693			
40	5495	5320	5710	5670	5595			
45	5628	5388	5358	5276	5260			
50	5569	5649	5263	5534	5309			
55	5663	5513	5303	5295	5399			
60	5316	5335	5488	5523	5310			
65	5256	5294	5425	5386	5496			
70	5299	5660	5454	5554	5462			
75	5708	5612	5580	5460	5442			
80	5672	5478	5624	5525	5268			
85	5482	5347	5411	5262	5646			
90	5290	5701	5510	5390	5503			
95	5270	5313	5610	5492	5485			

Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_06							
Frequency (MHz)	0	1	2	3	4			
0	5437	5417	5543	5286	5582			
5	5420	5424	5402	5356	5390			
10	5346	5422	5722	5449	5252			
15	5635	5548	5432	5515	5372			
20	5265	5335	5407	5637	5275			
25	5690	5529	5439	5475	5279			
30	5551	5456	5621	5336	5643			
35	5253	5626	5657	5691	5676			
40	5491	5532	5578	5258	5667			
45	5427	5608	5301	5446	5411			
50	5541	5611	5270	5700	5352			
55	5357	5631	5358	5617	5616			
60	5710	5274	5327	5564	5712			
65	5623	5636	5531	5724	5259			
70	5466	5661	5606	5555	5579			
75	5399	5509	5333	5513	5268			
80	5485	5570	5698	5361	5638			
85	5342	5646	5324	5310	5506			
90	5605	5598	5419	5585	5391			
95	5516	5302	5534	5520	5325			



Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_07							
Frequency (MHz)	0	1	2	3	4			
0	5692	5656	5479	5447	5327			
5	5462	5446	5477	5519	5694			
10	5655	5308	5288	5547	5273			
15	5723	5675	5535	5560	5564			
20	5501	5348	5251	5578	5478			
25	5642	5579	5313	5690	5345			
30	5551	5417	5451	5290	5370			
35	5487	5354	5502	5468	5283			
40	5671	5618	5664	5356	5588			
45	5384	5504	5464	5428	5276			
50	5441	5575	5449	5571	5331			
55	5529	5720	5456	5254	5657			
60	5455	5559	5683	5652	5298			
65	5409	5627	5565	5402	5358			
70	5309	5472	5615	5605	5422			
75	5609	5680	5525	5701	5537			
80	5646	5263	5698	5473	5552			
85	5667	5556	5619	5361	5562			
90	5546	5380	5281	5287	5471			
95	5503	5649	5548	5607	5467			

Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_08							
Frequency (MHz)	0	1	2	3	4			
0	5472	5420	5415	5608	5644			
5	5504	5371	5552	5585	5426			
10	5586	5572	5329	5267	5294			
15	5714	5327	5638	5508	5281			
20	5667	5289	5718	5696	5369			
25	5330	5370	5683	5347	5257			
30	5709	5535	5669	5569	5271			
35	5429	5461	5380	5507	5416			
40	5307	5366	5609	5383	5661			
45	5285	5568	5467	5465	5517			
50	5693	5266	5622	5627	5381			
55	5422	5637	5525	5521	5348			
60	5594	5419	5602	5287	5385			
65	5423	5273	5632	5688	5251			
70	5687	5699	5551	5502	5431			
75	5584	5250	5468	5652	5260			
80	5592	5615	5549	5580	5333			
85	5438	5506	5440	5603	5721			
90	5625	5395	5444	5655	5651			
95	5435	5362	5660	5353	5326			



Нор	ping Frequenc	cy Sequenc	ce Name: HOP_F	FREQ_SEC)_09
Frequency (MHz)	0	1	2	3	4
0	5252	5659	5351	5294	5389
5	5643	5393	5627	5273	5633
10	5517	5361	5370	5462	5315
15	5327	5454	5266	5553	5473
20	5667	5261	5332	5669	5257
25	5279	5573	5312	5381	5299
30	5695	5492	5409	5343	5469
35	5568	5552	5651	5282	5330
40	5621	5449	5547	5623	5280
45	5592	5451	5550	5523	5580
50	5617	5323	5378	5716	5679
55	5366	5350	5479	5614	5545
60	5565	5714	5584	5594	5308
65	5466	5571	5581	5340	5618
70	5490	5537	5505	5434	5390
75	5611	5541	5328	5516	5281
80	5612	5452	5519	5510	5306
85	5557	5688	5326	5411	5631
90	5704	5289	5668	5346	5558
95	5429	5521	5657	5436	5339

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	REQ_SEC	Q_10
Frequency (MHz)	0	1	2	3	4
0	5410	5423	5287	5358	5706
5	5685	5318	5702	5436	5462
10	5351	5625	5411	5657	5336
15	5415	5484	5272	5598	5675
20	5427	5268	5324	5642	5523
25	5606	5301	5513	5438	5584
30	5449	5624	5495	5289	5610
35	5643	5447	5435	5341	5460
40	5532	5485	5388	5277	5521
45	5431	5633	5581	5526	5370
50	5493	5499	5429	5330	5502
55	5688	5538	5433	5329	5364
60	5536	5368	5274	5589	5609
65	5412	5297	5530	5663	5550
70	5413	5293	5465	5620	5605
75	5283	5712	5349	5425	5490
80	5614	5445	5512	5269	5452
85	5361	5356	5271	5511	5461
90	5621	5576	5637	5366	5586
95	5545	5553	5689	5719	5648



Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_11								
Frequency (MHz)	0	1	2	3	4				
0	5665	5662	5698	5519	5451				
5	5252	5340	5302	5599	5669				
10	5282	5414	5452	5377	5357				
15	5503	5611	5375	5643	5479				
20	5683	5496	5684	5413	5615				
25	5411	5458	5407	5617	5449				
30	5480	5473	5406	5364	5269				
35	5584	5274	5259	5588	5255				
40	5299	5712	5423	5531	5353				
45	5716	5542	5579	5257	5369				
50	5675	5419	5325	5632	5251				
55	5387	5658	5507	5400	5439				
60	5534	5355	5435	5358	5498				
65	5602	5382	5305	5474	5634				
70	5606	5608	5607	5688	5308				
75	5394	5513	5595	5570	5553				
80	5609	5575	5509	5464	5678				
85	5416	5614	5562	5709	5344				
90	5266	5468	5410	5702	5600				
95	5668	5635	5442	5372	5385				

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	FREQ_SEC)_12
Frequency (MHz)	0	1	2	3	4
0	5445	5523	5634	5680	5293
5	5294	5265	5377	5665	5401
10	5591	5300	5493	5475	5378
15	5494	5263	5478	5671	5594
20	5662	5722	5405	5588	5677
25	5407	5610	5721	5483	5522
30	5459	5363	5482	5421	5307
35	5413	5447	5611	5644	5710
40	5320	5361	5296	5271	5282
45	5391	5324	5600	5632	5623
50	5376	5531	5605	5479	5439
55	5341	5709	5477	5381	5529
60	5604	5358	5304	5321	5428
65	5638	5689	5575	5277	5706
70	5592	5708	5456	5567	5267
75	5266	5633	5371	5576	5347
80	5561	5334	5676	5506	5659
85	5258	5617	5379	5514	5579
90	5516	5542	5431	5337	5253
95	5519	5655	5395	5349	5647



Нор	ping Frequen	cy Sequenc	ce Name: HOP_I	FREQ_SEC)_13
Frequency (MHz)	0	1	2	3	4
0	5700	5287	5570	5366	5513
5	5433	5452	5353	5705	5522
10	5564	5631	5670	5399	5582
15	5390	5581	5636	5388	5602
20	5256	5663	5494	5561	5565
25	5259	5338	5350	5517	5661
30	5348	5320	5697	5552	5538
35	5407	5516	5655	5549	5403
40	5677	5536	5268	5686	5371
45	5658	5685	5409	5499	5455
50	5694	5349	5423	5530	5295
55	5424	5674	5352	5294	5659
60	5347	5377	5370	5555	5400
65	5675	5711	5683	5543	5701
70	5710	5278	5514	5557	5502
75	5671	5590	5365	5323	5503
80	5379	5258	5459	5439	5706
85	5447	5567	5633	5362	5596
90	5277	5610	5531	5358	5722
95	5529	5460	5465	5334	5319

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	REQ_SEC	Q_14
Frequency (MHz)	0	1	2	3	4
0	5383	5526	5506	5527	5355
5	5475	5687	5516	5437	5453
10	5353	5672	5390	5420	5670
15	5517	5684	5681	5580	5610
20	5422	5604	5486	5534	5356
25	5683	5541	5551	5703	5334
30	5277	5347	5325	5594	5629
35	5678	5669	5569	5388	5583
40	5615	5301	5362	5518	5351
45	5490	5619	5263	5674	5375
50	5631	5633	5308	5647	5270
55	5718	5724	5614	5493	5323
60	5312	5459	5466	5423	5485
65	5293	5345	5326	5613	5256
70	5262	5358	5472	5661	5714
75	5532	5519	5660	5582	5398
80	5657	5538	5279	5371	5529
85	5386	5500	5574	5636	5402
90	5412	5521	5406	5560	5286
95	5283	5395	5640	5290	5363



Нор	ping Frequen	cy Sequenc	ce Name: HOP_	FREQ_SEQ	_15
Frequency (MHz)	0	1	2	3	4
0	5638	5290	5442	5688	5575
5	5517	5709	5602	5679	5644
10	5287	5617	5713	5585	5441
15	5283	5547	5690	5629	5297
20	5521	5491	5545	5507	5719
25	5535	5269	5655	5270	5698
30	5652	5596	5620	5258	5720
35	5571	5444	5483	5702	5666
40	5553	5359	5447	5331	5573
45	5677	5316	5561	5251	5332
50	5684	5397	5470	5689	5431
55	5581	5329	5312	5294	5624
60	5411	5255	5408	5714	5546
65	5275	5649	5466	5532	5636
70	5641	5647	5339	5381	5495
75	5619	5551	5421	5703	5616
80	5531	5319	5627	5693	5449
85	5497	5391	5539	5715	5462
90	5518	5280	5572	5654	5380
95	5451	5289	5342	5277	5274

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	REQ_SEC	Q_16
Frequency (MHz)	0	1	2	3	4
0	5418	5529	5378	5374	5417
5	5559	5634	5677	5270	5473
10	5693	5406	5279	5305	5462
15	5274	5674	5318	5489	5657
20	5583	5567	5480	5607	5387
25	5375	5284	5619	5409	5587
30	5666	5295	5273	5343	5397
35	5336	5367	5597	5638	5491
40	5684	5356	5689	5656	5260
45	5272	5351	5505	5508	5293
50	5536	5535	5422	5509	5643
55	5314	5562	5709	5282	5369
60	5699	5588	5298	5424	5342
65	5713	5633	5705	5471	5578
70	5520	5541	5371	5308	5332
75	5408	5285	5512	5586	5539
80	5557	5425	5710	5720	5526
85	5427	5616	5392	5286	5400
90	5428	5513	5675	5676	5653
95	5495	5304	5724	5315	5698



Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_17								
Frequency (MHz)	0	1	2	3	4				
0	5673	5293	5314	5535	5637				
5	5698	5656	5277	5433	5680				
10	5624	5292	5320	5403	5483				
15	5362	5326	5421	5719	5681				
20	5537	5251	5524	5453	5398				
25	5336	5578	5388	5556	5451				
30	5573	5623	5510	5522	5638				
35	5439	5427	5275	5408	5477				
40	5357	5429	5449	5353	5683				
45	5669	5264	5696	5325	5713				
50	5381	5684	5311	5672	5494				
55	5480	5332	5489	5612	5328				
60	5614	5602	5479	5301	5394				
65	5632	5703	5570	5648	5508				
70	5694	5620	5310	5716	5442				
75	5457	5350	5392	5661	5417				
80	5560	5664	5306	5496	5485				
85	5330	5588	5577	5675	5313				
90	5419	5395	5523	5455	5412				
95	5411	5303	5399	5273	5707				

Нор	ping Frequenc	cy Sequenc	ce Name: HOP_F	REQ_SEC	<u>)_</u> 18
Frequency (MHz)	0	1	2	3	4
0	5453	5532	5250	5599	5479
5	5265	5581	5352	5596	5412
10	5458	5556	5361	5598	5504
15	5450	5524	5289	5495	5448
20	5417	5465	5648	5426	5286
25	5663	5306	5492	5590	5493
30	5462	5580	5296	5578	5615
35	5531	5525	5322	5316	5537
40	5367	5592	5350	5612	5649
45	5347	5279	5378	5503	5257
50	5385	5362	5317	5327	5520
55	5443	5622	5585	5256	5644
60	5343	5701	5393	5597	5660
65	5340	5586	5423	5702	5445
70	5326	5496	5560	5559	5337
75	5552	5613	5260	5391	5501
80	5345	5338	5522	5553	5374
85	5404	5301	5407	5540	5510
90	5309	5705	5406	5368	5444
95	5294	5313	5275	5519	5654



Норр	ing Frequen	cy Sequenc	e Name: HOP_	FREQ_SEQ	_19
Frequency (MHz)	0	1	2	3	4
0	5611	5296	5661	5285	5699
5	5307	5603	5427	5284	5619
10	5389	5345	5402	5318	5525
15	5538	5580	5627	5712	5687
20	5456	5583	5503	5262	5399
25	5552	5612	5509	5693	5624
30	5535	5351	5537	5368	5448
35	5656	5717	5706	5327	5678
40	5711	5630	5620	5305	5357
45	5444	5629	5430	5337	5431
50	5390	5608	5561	5413	5375
55	5615	5271	5708	5397	5517
60	5441	5556	5385	5334	5288
65	5595	5594	5546	5599	5550
70	5381	5701	5551	5688	5545
75	5302	5455	5426	5606	5540
80	5492	5565	5323	5388	5696
85	5655	5411	5617	5421	5582
90	5416	5539	5410	5516	5557
95	5477	5682	5587	5417	5366

Нор	Hopping Frequency Sequence Name: HOP_FREQ_SEQ_20							
Frequency (MHz)	0	1	2	3	4			
0	5391	5535	5597	5446	5444			
5	5349	5625	5502	5447	5448			
10	5698	5609	5540	5513	5546			
15	5529	5610	5633	5282	5404			
20	5464	5652	5254	5372	5440			
25	5712	5322	5658	5674	5337			
30	5494	5583	5697	5476	5381			
35	5598	5356	5722	5469	5703			
40	5621	5441	5373	5395	5484			
45	5655	5387	5262	5438	5593			
50	5324	5351	5707	5638	5430			
55	5514	5596	5708	5462	5682			
60	5320	5495	5635	5382	5651			
65	5504	5720	5548	5479	5278			
70	5414	5677	5449	5274	5521			
75	5269	5675	5482	5369	5483			
80	5385	5723	5594	5471	5334			
85	5386	5536	5614	5704	5416			
90	5318	5443	5574	5620	5461			
95	5580	5566	5612	5615	5393			



Нор	ping Frequen	cy Sequenc	ce Name: HOP_I	FREQ_SEC)_21
Frequency (MHz)	0	1	2	3	4
0	5646	5299	5533	5607	5286
5	5488	5550	5577	5513	5655
10	5629	5398	5581	5708	5567
15	5617	5262	5261	5327	5596
20	5375	5343	5385	5345	5706
25	5316	5426	5692	5716	5701
30	5451	5323	5374	5674	5423
35	5413	5394	5606	5636	5405
40	5408	5559	5362	5438	5680
45	5589	5356	5537	5542	5263
50	5515	5650	5639	5512	5305
55	5422	5457	5401	5643	5275
60	5294	5508	5584	5618	5444
65	5574	5592	5543	5685	5317
70	5282	5551	5328	5254	5373
75	5549	5569	5320	5502	5521
80	5310	5546	5285	5626	5436
85	5434	5526	5490	5620	5519
90	5255	5325	5637	5688	5675
95	5478	5448	5338	5556	5605

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	REQ_SEC)_22
Frequency (MHz)	0	1	2	3	4
0	5426	5538	5469	5293	5506
5	5530	5572	5652	5676	5387
10	5560	5662	5622	5331	5588
15	5705	5389	5364	5372	5313
20	5383	5412	5423	5335	5318
25	5594	5265	5546	5251	5283
30	5590	5408	5623	5494	5562
35	5504	5287	5284	5550	5719
40	5491	5497	5505	5435	5609
45	5472	5679	5414	5493	5332
50	5614	5566	5264	5462	5384
55	5700	5259	5612	5276	5675
60	5451	5695	5601	5431	5344
65	5393	5610	5424	5338	5488
70	5486	5268	5651	5555	5518
75	5689	5463	5483	5298	5323
80	5519	5697	5282	5428	5626
85	5278	5621	5694	5541	5632
90	5559	5525	5289	5585	5271
95	5255	5526	5376	5427	5721



Нор	ping Frequen	cy Sequenc	e Name: HOP_	FREQ_SEQ	_23
Frequency (MHz)	0	1	2	3	4
0	5584	5302	5405	5454	5348
5	5572	5497	5252	5364	5691
10	5394	5548	5663	5526	5609
15	5318	5516	5467	5320	5505
20	5391	5578	5424	5291	5482
25	5592	5274	5256	5285	5422
30	5576	5365	5656	5300	5692
35	5701	5558	5437	5561	5574
40	5435	5270	5432	5538	5452
45	5287	5472	5546	5694	5393
50	5315	5617	5353	5328	5413
55	5688	5705	5473	5721	5329
60	5616	5640	5433	5257	5573
65	5642	5342	5646	5634	5254
70	5654	5404	5390	5334	5606
75	5464	5550	5386	5672	5279
80	5623	5529	5457	5338	5562
85	5495	5641	5355	5724	5531
90	5380	5722	5310	5510	5371
95	5406	5349	5356	5649	5554

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	REQ_SEC)_24
Frequency (MHz)	0	1	2	3	4
0	5364	5541	5341	5615	5568
5	5614	5519	5327	5527	5423
10	5325	5337	5704	5721	5630
15	5309	5643	5570	5365	5697
20	5302	5647	5305	5416	5264
25	5273	5477	5360	5319	5464
30	5465	5322	5396	5549	5512
35	5268	5308	5354	5687	5475
40	5397	5657	5373	5510	5526
45	5370	5432	5433	5599	5484
50	5269	5491	5668	5442	5583
55	5650	5601	5642	5420	5292
60	5692	5458	5306	5585	5362
65	5558	5368	5291	5466	5500
70	5569	5252	5715	5279	5253
75	5560	5250	5359	5357	5652
80	5542	5705	5543	5556	5453
85	5276	5440	5534	5517	5546
90	5414	5537	5260	5392	5591
95	5288	5452	5554	5408	5660



Нор	ping Frequen	cy Sequenc	ce Name: HOP_I	FREQ_SEQ	_25
Frequency (MHz)	0	1	2	3	4
0	5619	5305	5277	5679	5410
5	5278	5444	5402	5593	5630
10	5256	5601	5270	5441	5651
15	5397	5673	5576	5511	5310
20	5338	5343	5505	5712	5636
25	5393	5680	5464	5353	5506
30	5451	5279	5611	5701	5710
35	5407	5399	5722	5365	5389
40	5333	5362	5311	5275	5523
45	5299	5412	5453	5491	5652
50	5371	5620	5667	5719	5628
55	5309	5594	5314	5596	5610
60	5586	5663	5587	5471	5627
65	5669	5481	5465	5666	5715
70	5621	5676	5295	5372	5324
75	5323	5282	5577	5536	5684
80	5328	5477	5320	5482	5556
85	5337	5617	5420	5273	5635
90	5432	5376	5480	5625	5395
95	5500	5662	5373	5579	5640

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_26						
Frequency (MHz)	0	1	2	3	4	
0	5399	5544	5688	5365	5630	
5	5320	5466	5477	5281	5459	
10	5565	5390	5311	5636	5672	
15	5485	5325	5679	5455	5703	
20	5318	5407	5284	5497	5685	
25	5427	5720	5408	5568	5387	
30	5645	5340	5711	5351	5475	
35	5530	5546	5490	5518	5400	
40	5647	5445	5724	5418	5520	
45	5606	5392	5536	5549	5705	
50	5496	5368	5295	5717	5607	
55	5441	5405	5550	5634	5716	
60	5572	5501	5307	5411	5286	
65	5657	5508	5662	5553	5493	
70	5309	5382	5329	5512	5643	
75	5675	5597	5366	5504	5259	
80	5666	5593	5306	5483	5648	
85	5355	5335	5315	5540	5342	
90	5360	5551	5435	5668	5269	
95	5646	5706	5394	5610	5395	



Нор	ping Frequen	cy Sequenc	ce Name: HOP_	FREQ_SEQ	_27
Frequency (MHz)	0	1	2	3	4
0	5557	5405	5624	5526	5472
5	5362	5391	5552	5444	5666
10	5496	5654	5352	5259	5693
15	5573	5452	5307	5403	5420
20	5704	5700	5586	5658	5315
25	5669	5514	5294	5421	5687
30	5668	5469	5627	5350	5685
35	5581	5314	5293	5486	5528
40	5662	5517	5535	5372	5619
45	5510	5283	5523	5275	5544
50	5346	5331	5430	5385	5593
55	5407	5515	5602	5508	5273
60	5326	5333	5608	5454	5710
65	5596	5718	5457	5356	5565
70	5295	5653	5488	5505	5644
75	5717	5509	5485	5511	5679
80	5374	5470	5643	5645	5550
85	5713	5632	5503	5437	5703
90	5683	5434	5652	5276	5622
95	5412	5530	5640	5438	5603

Нор	ping Frequen	cy Sequenc	ce Name: HOP_F	REQ_SEC)_28
Frequency (MHz)	0	1	2	3	4
0	5337	5644	5560	5687	5692
5	5501	5413	5627	5607	5398
10	5427	5540	5490	5454	5714
15	5564	5579	5410	5448	5612
20	5712	5264	5641	5578	5631
25	5581	5521	5717	5455	5254
30	5690	5625	5684	5401	5548
35	5252	5672	5585	5446	5703
40	5325	5611	5503	5423	5514
45	5367	5255	5702	5568	5313
50	5626	5720	5397	5420	5253
55	5707	5306	5361	5705	5421
60	5479	5402	5491	5462	5262
65	5531	5400	5416	5659	5632
70	5550	5349	5634	5637	5378
75	5485	5502	5464	5516	5362
80	5555	5466	5288	5314	5630
85	5706	5642	5270	5713	5571
90	5563	5629	5556	5359	5686
95	5599	5658	5677	5633	5256



Нор	ping Frequen	cy Sequenc	ce Name: HOP_	FREQ_SEQ	_29
Frequency (MHz)	0	1	2	3	4
0	5592	5408	5496	5373	5534
5	5543	5338	5702	5673	5261
10	5329	5531	5649	5260	5652
15	5706	5513	5493	5720	5333
20	5679	5667	5604	5469	5470
25	5445	5502	5489	5393	5579
30	5582	5424	5553	5368	5391
35	5385	5478	5599	5714	5639
40	5316	5441	5566	5608	5296
45	5710	5310	5626	5292	5675
50	5421	5448	5509	5454	5651
55	5494	5315	5420	5715	5450
60	5656	5504	5569	5357	5346
65	5617	5571	5285	5619	5437
70	5331	5364	5488	5351	5343
75	5423	5485	5698	5447	5443
80	5411	5701	5294	5562	5616
85	5413	5526	5724	5536	5510
90	5607	5409	5289	5664	5614
95	5418	5268	5446	5640	5464

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_30						
Frequency (MHz)	0	1	2	3	4	
0	5372	5647	5432	5534	5279	
5	5585	5360	5302	5361	5434	
10	5667	5593	5572	5369	5281	
15	5265	5261	5519	5441	5521	
20	5631	5499	5620	5659	5577	
25	5357	5322	5648	5606	5523	
30	5435	5468	5539	5639	5327	
35	5566	5530	5476	5274	5374	
40	5628	5575	5399	5379	5331	
45	5605	5700	5690	5393	5587	
50	5345	5465	5378	5597	5695	
55	5277	5498	5682	5269	5513	
60	5437	5421	5660	5346	5449	
65	5401	5280	5389	5440	5557	
70	5607	5592	5414	5715	5403	
75	5350	5491	5675	5319	5382	
80	5505	5366	5428	5390	5636	
85	5282	5255	5586	5404	5561	
90	5380	5704	5454	5292	5300	
95	5377	5560	5689	5595	5511	

--- END ---