



EMC Technologies Pty Ltd

ABN 82 057 105 549
176 Harrick Road, Keilor Park
Victoria 3042, Australia

Ph: + 613 9365 1000
Fax: + 613 9331 7455
Email: sales@emctech.com.au

**RADIO TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart C (Section 15.247)**

Test Sample: Commercial refrigeration controller with
Bluetooth LE connectivity

Model: SCS Connect

FCC ID: 2AHCE-SCS1

Report Number: M150729-1 Rev2
(This report replaces M150729-1 Rev1)

Tested for: Wellington Drive Technologies Ltd

Issue Date: 13 December 2016

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

**RADIO TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart C (Section 15.247)**

EMC Technologies Report No.: M150729-1 Rev2

Issue Date: 13 December 2016

Contents

1.0	INTRODUCTION	4
2.0	GENERAL INFORMATION	5
3.0	ANTENNA REQUIREMENT (§15.203)	7
4.0	CONDUCTED EMISSIONS (§15.207)	7
5.0	DTS 6 dB BANDWIDTH (§15.247 (a)(2))	10
6.0	PEAK OUTPUT POWER (§15.247 (b)(3))	13
7.0	BAND-EDGE EMISSION MEASUREMENTS	16
8.0	SPURIOUS EMISSION MEASUREMENTS (§15.247 (d))	18
9.0	POWER SPECTRAL DENSITY (§15.247 (d))	27
10.0	§2.1049 OCCUPIED BANDWIDTH – 99% POWER	30
11.0	COMPLIANCE STATEMENT	32
12.0	UNCERTAINTY	32
	APPENDIX A	33
	MEASUREMENT INSTRUMENT DETAILS	33



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

RADIO TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart C (Section 15.247)

Report Number: M150729-1 Rev2
FCC ID: 2AHCE-SCS1

Test Sample: Commercial refrigeration controller with Bluetooth LE connectivity
Model Number: SCS Connect
Serial Number: C82115 00482
Part Number: SCSLC1013
Manufacturer: Wellington Drive Technologies Ltd

Equipment Type: Intentional Radiator (Transceiver)

Manufacturer: Wellington Drive Technologies Ltd
Address: 21 Arrenway Drive, Rosedale
Phone: Auckland 0632, New Zealand
Contact: Thomas Hong
Email: Thomas.hong@wdtl.com

Test Standards: **FCC Part 15** – Radio Frequency Devices
FCC Part 15 Subpart C – Intentional Radiators
Section 15.247 – Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10 – 2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices


KDB 558074 v03r05

Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

Test Date: 21st, 24th of August and 5th of September 2015

Test Engineer: 
Mahan Ghassempouri

Attestation: *I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.*

Authorised Signatory: 
Chris Zombolas
Technical Director
EMC Technologies Pty Ltd

Issued by: EMC Technologies Pty Ltd, 176 Harrick Rd., Keilor Park, VIC 3042, Australia
Phone: +61 3 9365 1000 **Fax:** +61 3 9331 7455 **Web:** www.emctech.com.au



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

RADIO TEST REPORT FOR CERTIFICATION to FCC PART 15 Subpart C (Section 15.247)

1.0 INTRODUCTION

Radio tests were performed on the commercial refrigeration controller with BLE, Model: SCS Connect, in accordance with the methodology prescribed in 47 CFR Part 15. The EUT included a 2.4 GHz transmitter using Bluetooth Low Energy (BLE) protocol.

Test results and procedures were performed in accordance with the following Federal Communications Commission (FCC) standards/regulations:

47 CFR, Part 15, Subpart C	Rules for intentional radiators (particularly section 15.247)
Section 15.203:	Antenna requirements
Section 15.205:	Restricted bands of operation
Section 15.207:	Conducted Emission Limits
Section 15.209:	Radiated Emission Limits (General requirements)
Section 15.247:	Operation in the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz

The test sample **complied** with the requirements of 47 CFR, Part 15 Subpart C - Section 15.247.

The measurement procedure used was in accordance with ANSI C63.10-2013. The instrumentation conformed to the requirements of ANSI C63.2-2009.

1.1 Summary of Results

FCC Part 15 Subpart C	Test Performed	Results
15.203	Antenna requirement	Complied
15.205	Operation in restricted Band	Complied
15.207	Conducted emissions limits	Complied
15.209	Radiated emissions limits	Complied
15.247 (a)(2)	Minimum 6 dB Bandwidth	Complied
15.247 (b)(3)	Peak Output Power	Complied
15.247 (c)	Antenna Gain > 6 dBi	N/A as the EUT used integral antenna with less than 6 dBi gain and no external antenna connector
15.247 (d)	Out of Band Emissions	Complied
15.247 (e)	Peak Power Spectral Density	Complied
15.247 (f)	Hybrid Systems	N/A assessed to digital modulation requirements
15.247 (g)	Hopping channel application	N/A assessed to digital modulation requirements
15.247 (h)	Incorporation of intelligence within FHSS	N/A assessed to digital modulation requirements
15.247 (i)	Radio Frequency Hazard	Complied, output power was less than 20 mW
2.1049	Occupied bandwidth	1.026 MHz

N/A: Not Applicable

1.2 Modifications by EMC Technologies

No modifications were required to achieve compliance.

2.0 GENERAL INFORMATION

(Information supplied by the Client)

2.1 EUT (Transmitter) Details

The RF transmitter was a Bluetooth Low Energy device operating in the 2.4 GHz band. It used a PCB antenna. A temporary UFL connector was mounted on the device to provide a means for measuring conducted output power. Transmitter specifications are shown in table below.

Test Sample:	Commercial refrigeration controller with Bluetooth LE connectivity
Model Number:	SCS Connect
Serial Number:	C82115 00482
Part Number:	SCSLC1013
Voltage Rating:	90 VAC – 240 VAC
Supported Radio Standards:	Bluetooth Low Energy (BLE)
Operating Frequency Range:	2400 MHz to 2483.5 MHz Low Channel: 2402 MHz Middle Channel: 2440 MHz High Channel: 2480 MHz
Nominal Channel Bandwidth:	1 MHz
Antenna Assembly Gain:	-1.53 dBi
Operating Temperature Range:	-20 °C to 55 °C

2.2 EUT (Host) Details

The EUT was a fridge controller to regulate temperature inside a cabinet. It incorporated a Bluetooth LE radio for configuration and tracking remotely.

The product was housed in a plastic enclosure approximately 8.1 x 10 x 3.6 cm (L x W x H).

2.3 Test Procedure

Radio measurements to demonstrate compliance with FCC part 47CFR15.247 were performed in accordance with the procedures of ANSI C63.10-2013 and KDB 558074 v03r05 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

2.4 Test Facility

2.4.1 General

Measurements were performed at EMC Technologies' laboratory in Keilor Park, Victoria Australia. EMC Technologies Pty Ltd is listed by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies is listed as an FCC part 47CFR2.948 test lab and may perform the testing required under Parts 15 and 18 – **FCC Registration Number 90560**

EMC Technologies Pty Ltd has also been accredited as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 & 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001**.

EMC Technologies' indoor open area test site (iOATS) has been accepted by Industry Canada for the performance of radiated measurements in accordance with RSS-Gen Issue 4 - **Industry Canada iOATS number - IC 3569B**



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

2.4.2 NATA Accreditation

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI), NPL (UK), NIST (USA) and an internal quality system to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

EMC Technologies is accredited in Australia by the National Association of Testing Authorities (NATA). All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation.

The current full scope of accreditation can be found on the NATA website: www.nata.com.au. It also includes a large number of emissions, immunity, SAR, EMR and Safety standards.

2.5 Test Equipment Calibration

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Keysight Technologies (Australia) Pty Ltd, Rohde and Schwarz, NMI, NPL or NIST. All equipment calibration is traceable to Australia national standards at the National Measurements Institute. The reference antenna calibration was performed by NPL and the working antennas (BiLog and horn) calibrated by EMC Technologies. The complete list of test equipment used for the measurements, including calibration dates and traceability is contained in Appendix A

FCC PART 15 Subpart C (Section 15.247)**3.0 ANTENNA REQUIREMENT (§15.203)**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT used a permanently attached PCB antenna therefore considered sufficient to comply with the provisions of this section. There was no external antenna connector available to the user.

4.0 CONDUCTED EMISSIONS (§15.207)**4.1. Test procedure**

The arrangement specified in ANSI C63.4: 2009 was adhered to for the conducted EMI measurements. The EUT was placed in the RF screened enclosure and a CISPR EMI Receiver as defined in ANSI C63.2: 2009 was used to perform the measurements.

The EMI Receiver was operated under program control using the Max-Hold function and automatic frequency scanning, measurement and data logging techniques. The specified 0.15 MHz to 30 MHz frequency range was sub-divided into sub-ranges to ensure that all short duration peaks were captured.

The various operating modes of the system were investigated. For each of the sub-ranges, the EMI receiver was set to continuous scan with the Peak detector set to Max-Hold mode. The Quasi-Peak detector and the Average detector were then invoked to measure the actual Quasi-Peak and Average level of the most significant peaks, which were detected.

The voltage levels were automatically measured in software and compared to the test limit. The method of calculation was as follows:

$$V_{EMI} = V_{Rx} + LBPF$$

Where: V_{EMI} = the Measured EMI voltage in dB μ V to be compared to the limit.
 V_{Rx} = the Voltage in dB μ V read directly at the EMI receiver.
 LBPF = the insertion loss in dB of the cables and the Limiter and Band Pass Filter.

4.2. Results


The measurement data pertaining to each frequency sub-range were concatenated to form a single graph of (peak) amplitude versus frequency. This was performed for both Active and Neutral lines and the composite graph was subsequently plotted. A list of the highest relevant peaks and the respective Quasi-Peak and Average values were also plotted on the graph.

Active Line, 0.15 - 30 MHzWellington Drive Technologies
SCS ConnectLimit1: FCC_BQPN
Limit2: FCC_BAVNFCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)FCC Class B
Conducted Emissions (dBuV)
~ = QP ValueJob No: M150729
Test Date: 04/09/2015
* = CISPR AV

Trace 2: Active Line

R:\FME\B2015\JUL\M150729 WELLINGTON DRIVE TECHNOLOGIES LTD\CONDUCTED FILES\M150729C\GraphA.br
t:L0191016 c1:NONE c2:C2840116 p:NONE a:NONE
Site ID: Room#2,176 Harrick Rd, Keilor Park, Vic Test Officer: James Fitzgerald-Plot date:12-02-2015 11:02:14
Wtst-0-Wplt:160 Rev:9-Rx:Rohde&Schwarz,ESU-40,100392/04

Graph No. 1

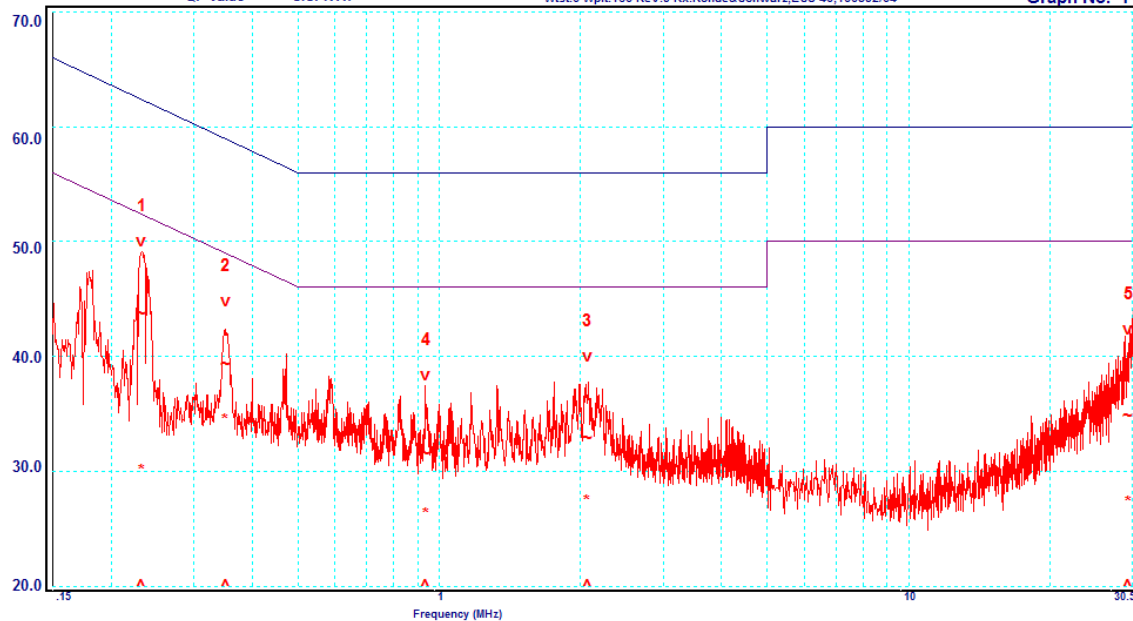

Peak	Frequency MHz	Line	Measured QP Level dBμV	QP Limit dBμV	ΔQP ±dB	Measured AV Level dBμV	AV Limit dBμV	ΔAV ±dB
1	0.233	Active	43.7	62.4	-18.7	30.0	52.4	-22.4
2	0.351	Active	39.2	58.9	-19.7	34.4	48.9	-14.5
3	2.074	Active	32.8	56.0	-23.2	27.3	46.0	-18.7
4	0.937	Active	31.5	56.0	-24.5	26.2	46.0	-19.8
5	29.43	Active	34.8	60.0	-25.2	27.2	50.0	-22.8



Accreditation No. 5292


This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

Neutral Line, 0.15 - 30 MHz

Wellington Drive Technologies
SCS ConnectLimit1: FCC_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
Limit2: FCC_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)FCC Class B
Conducted Emissions (dBμV)
~ = QP Value * = CISPR AvJob No: M150729
Test Date: 04/09/2015Trace 2: Active Line
R:\FME\B2015\JUL\150729 WELLINGTON DRIVE TECHNOLOGIES LTD\CONDUCTED FILES\M150729C\GraphA.br
t:L0191016 c1:NONE c2:C2840116 p:NONE a:NONE
Site ID: Room#2, 176 Harrick Rd, Keilor Park, Vic Test Officer: James Fitzgerald-Plot date: 12-02-2015 11:02:14
Vltst0-Wpllt:160 Rev: 9-Rx: Rohde & Schwarz E SU-40, 100392104

Graph No. 1

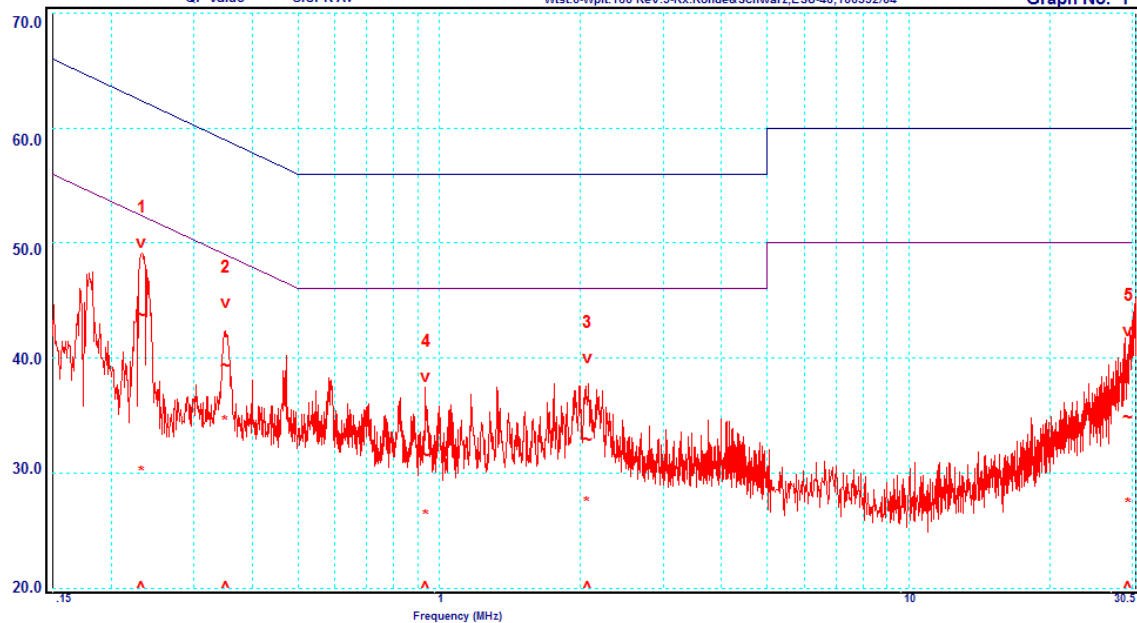

Peak	Frequency MHz	Line	Measured QP Level dBμV	QP Limit dBμV	ΔQP ±dB	Measured AV Level dBμV	AV Limit dBμV	ΔAV ±dB
1	0.234	Neutral	45.6	62.3	-16.7	30.9	52.3	-21.4
2	0.585	Neutral	33.5	56.0	-22.5	28.3	46.0	-17.7
3	0.180	Neutral	41.7	64.5	-22.8	29.5	54.5	-25.0
4	2.105	Neutral	32.0	56.0	-24.0	26.0	46.0	-20.0
5	29.84	Neutral	32.0	60.0	-28.0	24.9	50.0	-25.1



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.


Other than the certificate on page 3 this document shall not be reproduced except in full.

5.0 DTS 6 dB BANDWIDTH (§15.247 (a)(2))

Minimum 6 dB bandwidth shall be at least 500 kHz. Measurements were performed on low, middle and high channel. Care was taken so that the bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.


5.1. Results

Measurement results are shown in the following graphs.

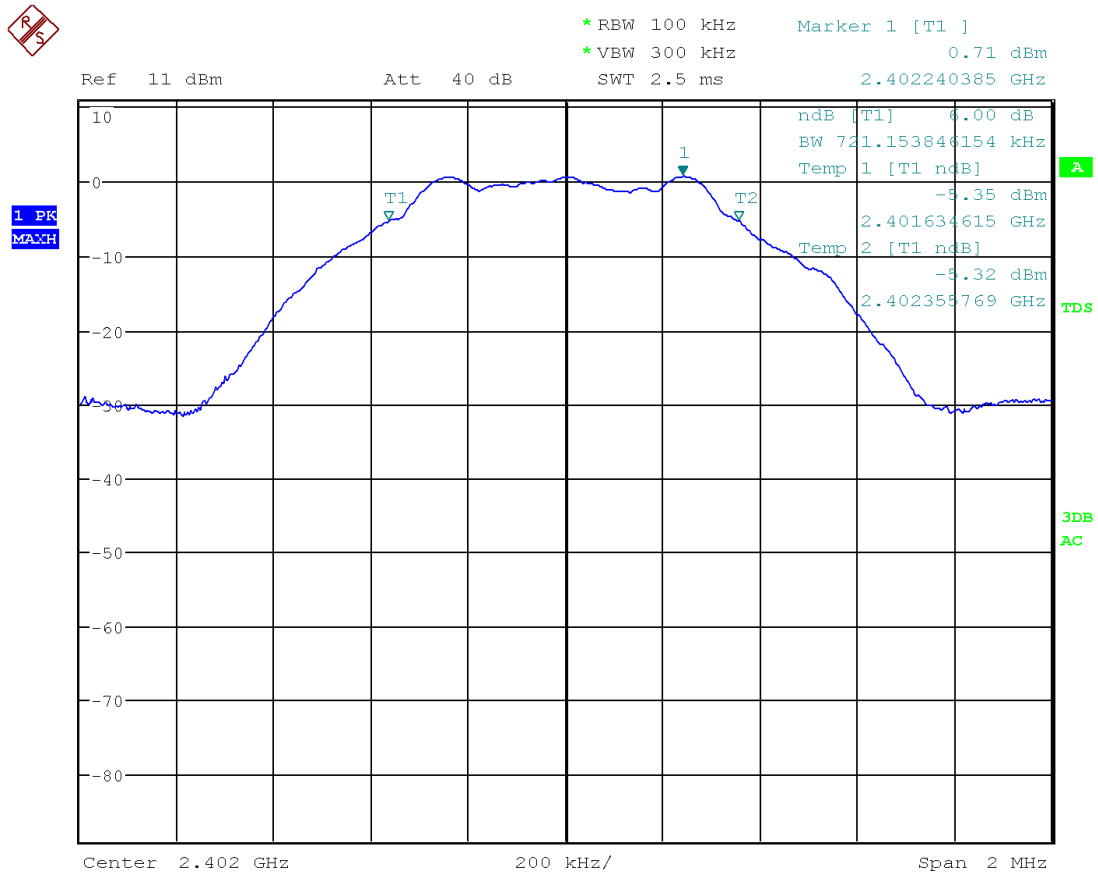

Modulation	6 dB Bandwidth (kHz)	Limit (kHz)	Result
BLE	721.15	> 500	Pass

Graph 1: 6 dB bandwidth, low channel

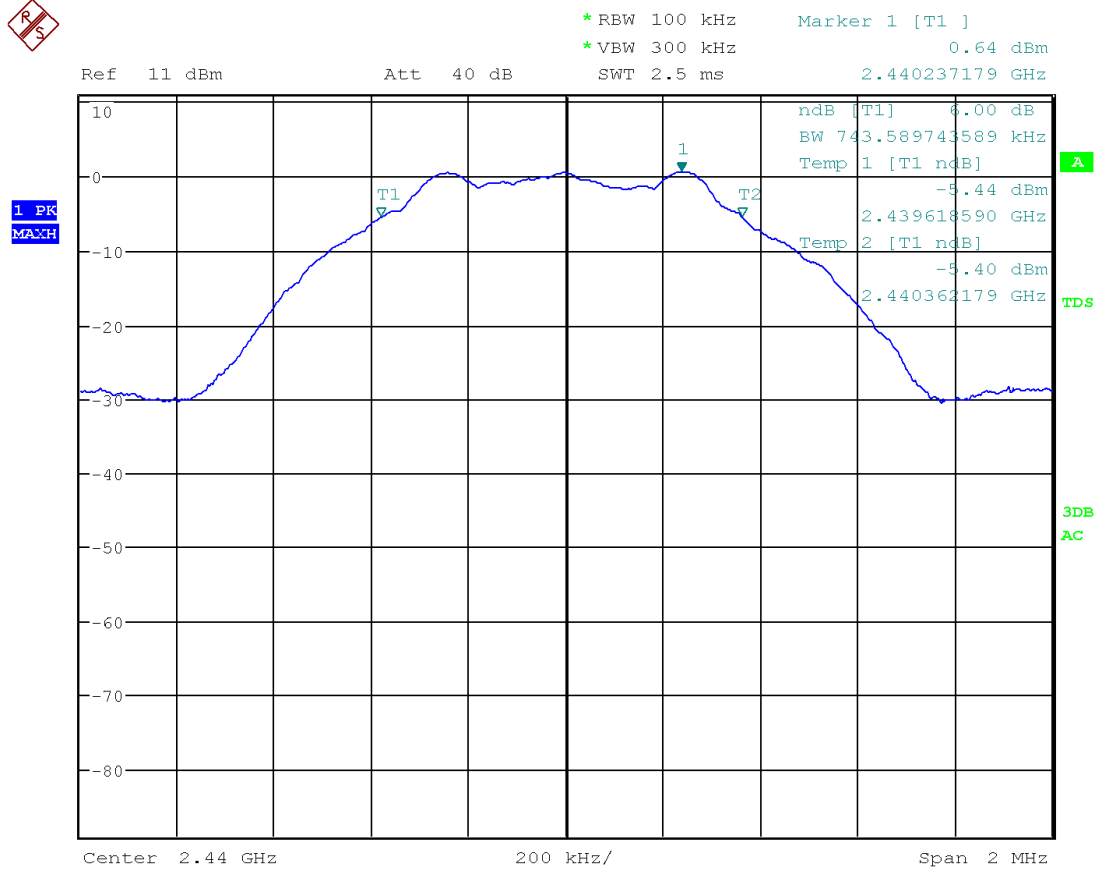

Modulation	6 dB Bandwidth (kHz)	Limit (kHz)	Result
BLE	743.59	> 500	Pass


Graph 2: 6 dB bandwidth, middle channel



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

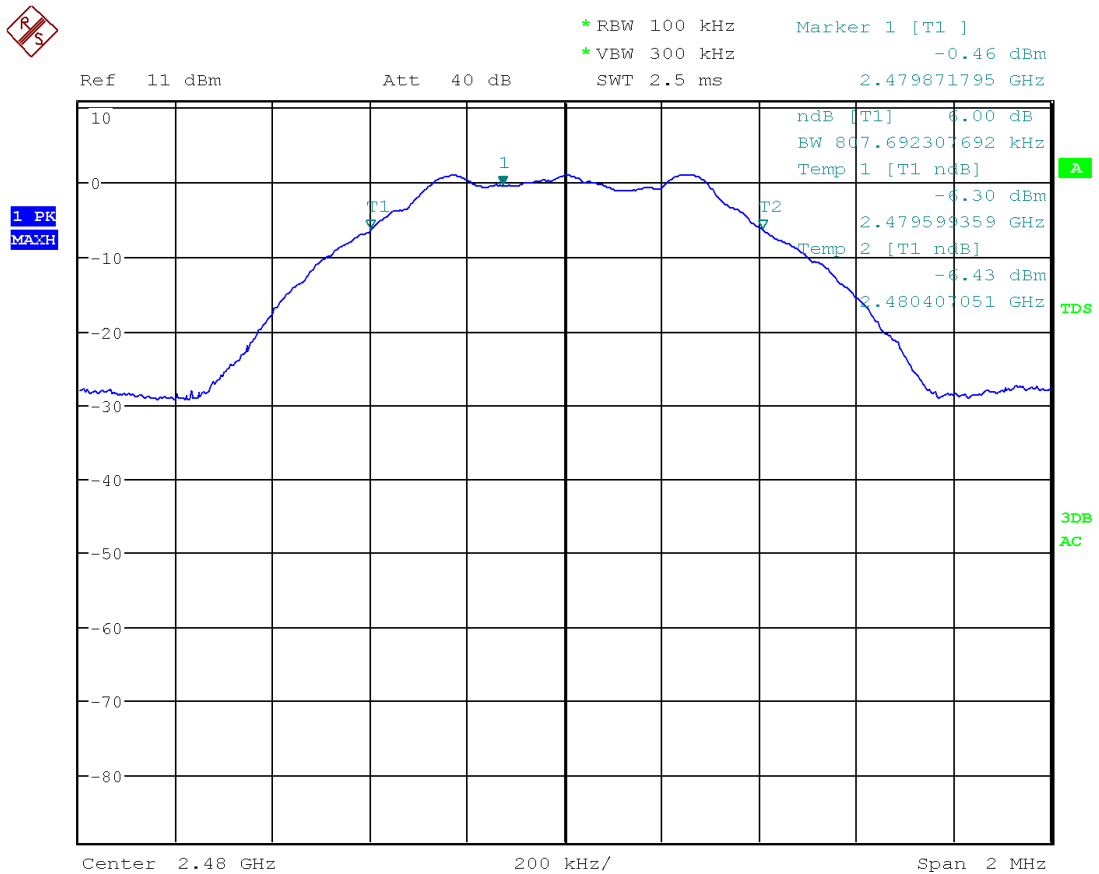

Modulation	6 dB Bandwidth (kHz)	Limit (kHz)	Result
BLE	807.69	>500	Pass


Graph 3: 6 dB bandwidth, high channel

6.0 PEAK OUTPUT POWER (§15.247 (b)(3))

As there was a temporary antenna connector available on the PCB the test was performed using conducted measurement. Maximum peak conducted power method (clause 9.1.1 of KDB 558074 v03r05) was used for measurement. Cable loss between connector and spectrum analyser were accounted for in reading.


6.1. Results

Measurement results are shown in the following graphs.

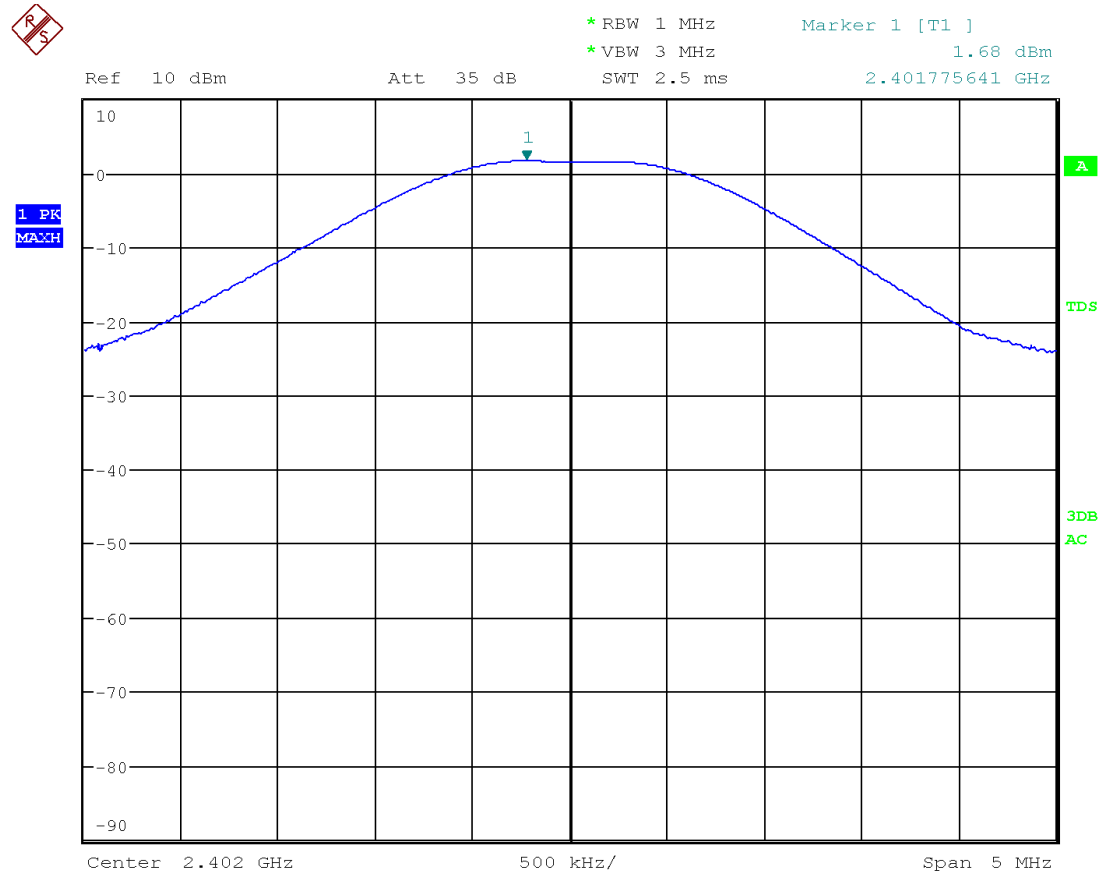

Channel	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Low	1.68	30	-28.32	Pass

Graph 4: Conducted power, low channel

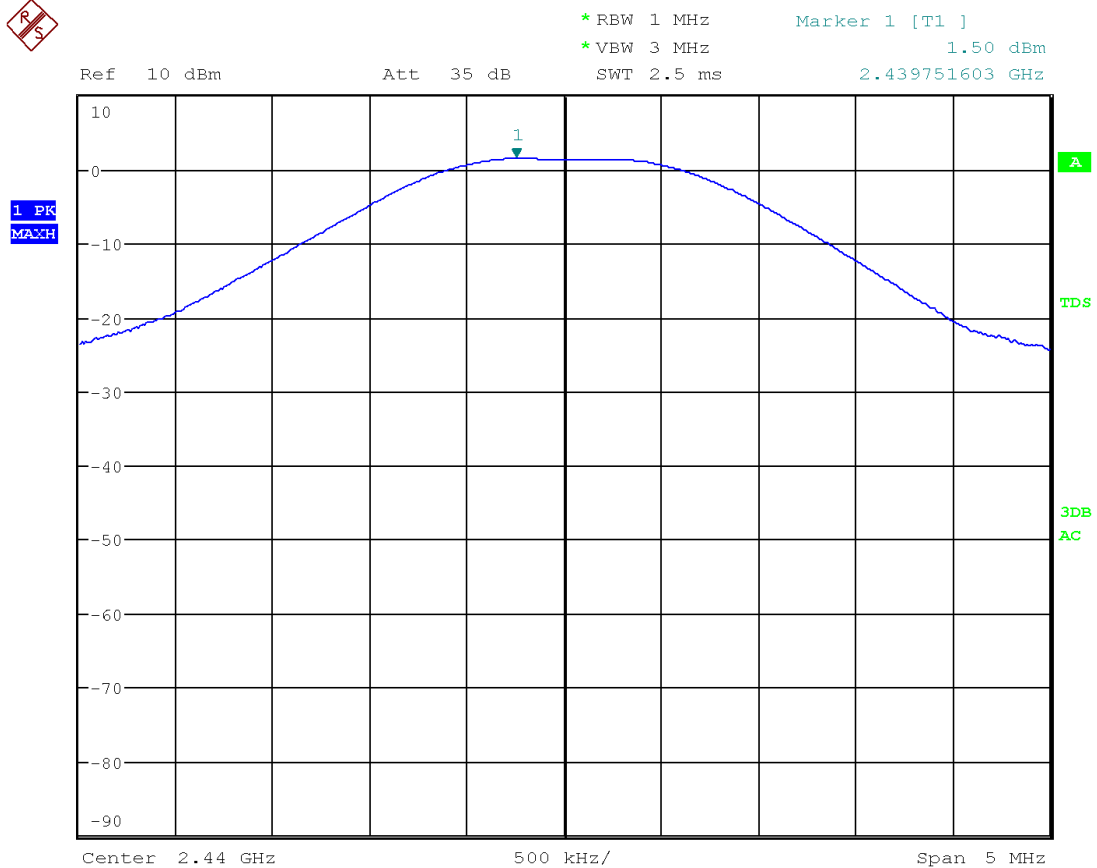

Channel	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Middle	1.50	30	-28.50	Pass

Graph 5: Conducted power, middle channel




This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz 2.15 dBm
 Ref 10 dBm Att 35 dB SWT 2.5 ms 2.479815705 GHz

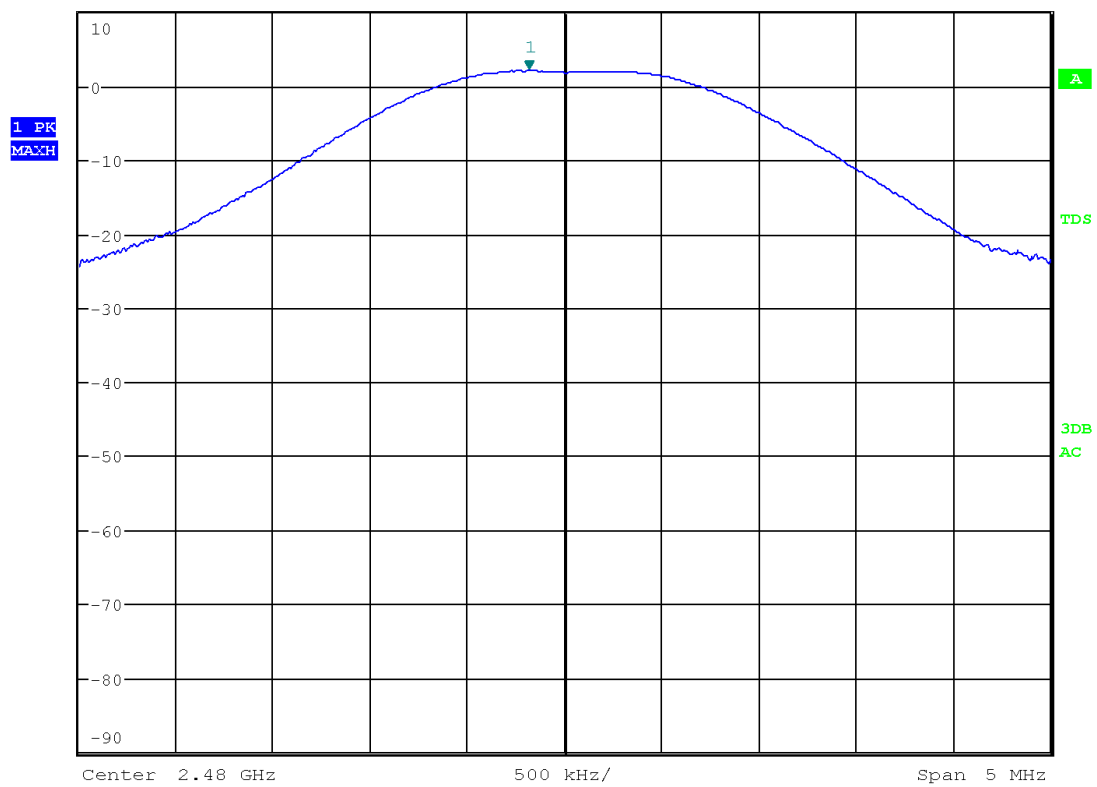

Channel	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
High	2.15	30	-27.85	Pass

Graph 6: Conducted power, high channel



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.


7.0 BAND-EDGE EMISSION MEASUREMENTS

Band edge emission were investigated according to KDB 558074 D01 v03r05 clause 13. Emissions within 2 MHz of an authorised band edge were measured using the marker-delta method (KDB 558074 D01 v03r05 clause 13.2). Results from section 6 of this report were used for in band emission values. In band emission were obtained using 3 MHz resolution bandwidth, instead of 1 MHz, which represents worse case.

7.1. Results

All emissions above and below the edge of the authorised band were more than 20 dB below the in band intentional emission.


Measurement results are shown in the following graphs.

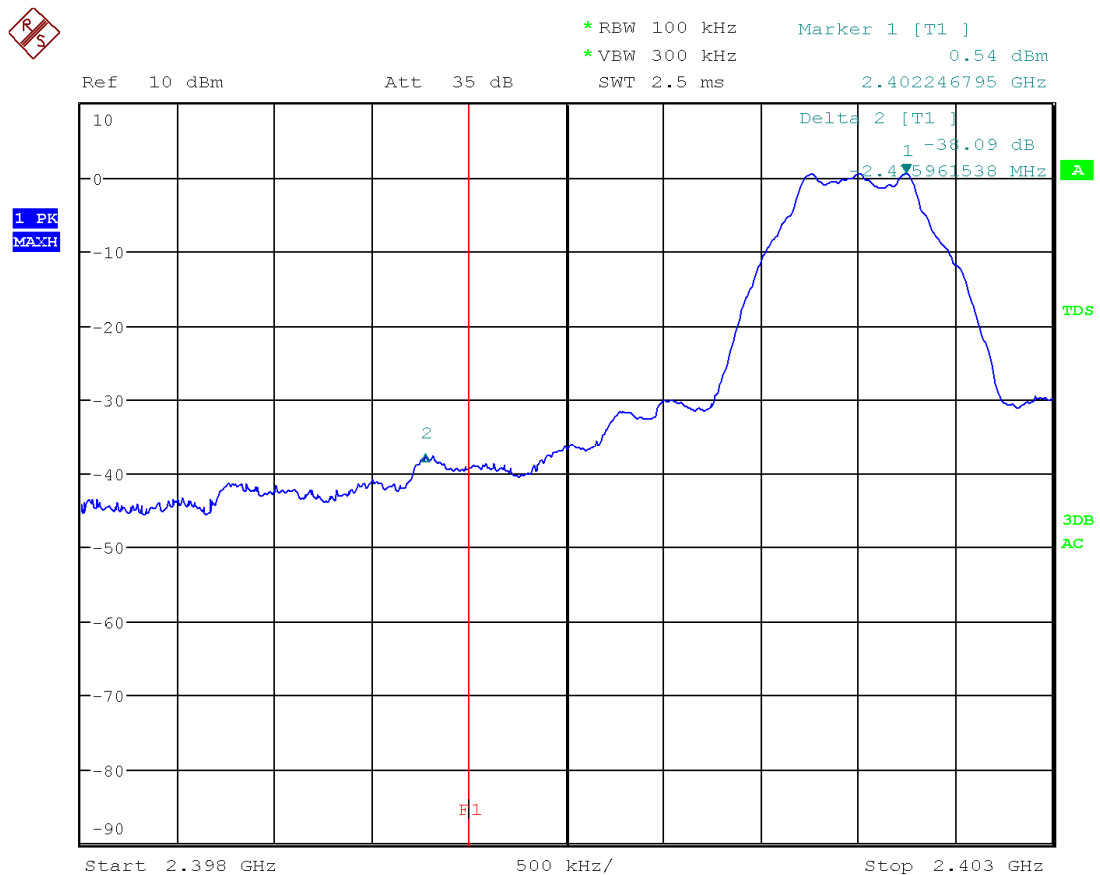

Vertical marker F1 was positioned at 2400 MHz.

In Band Emission (dBm)	Delta (dB)	Band Edge Emission (dBm)	Limit (dBm)	Margin (dB)	Result
1.68	-38.09	-36.41	-18.32	-18.09	Pass

Graph 7: Lower band-edge emissions

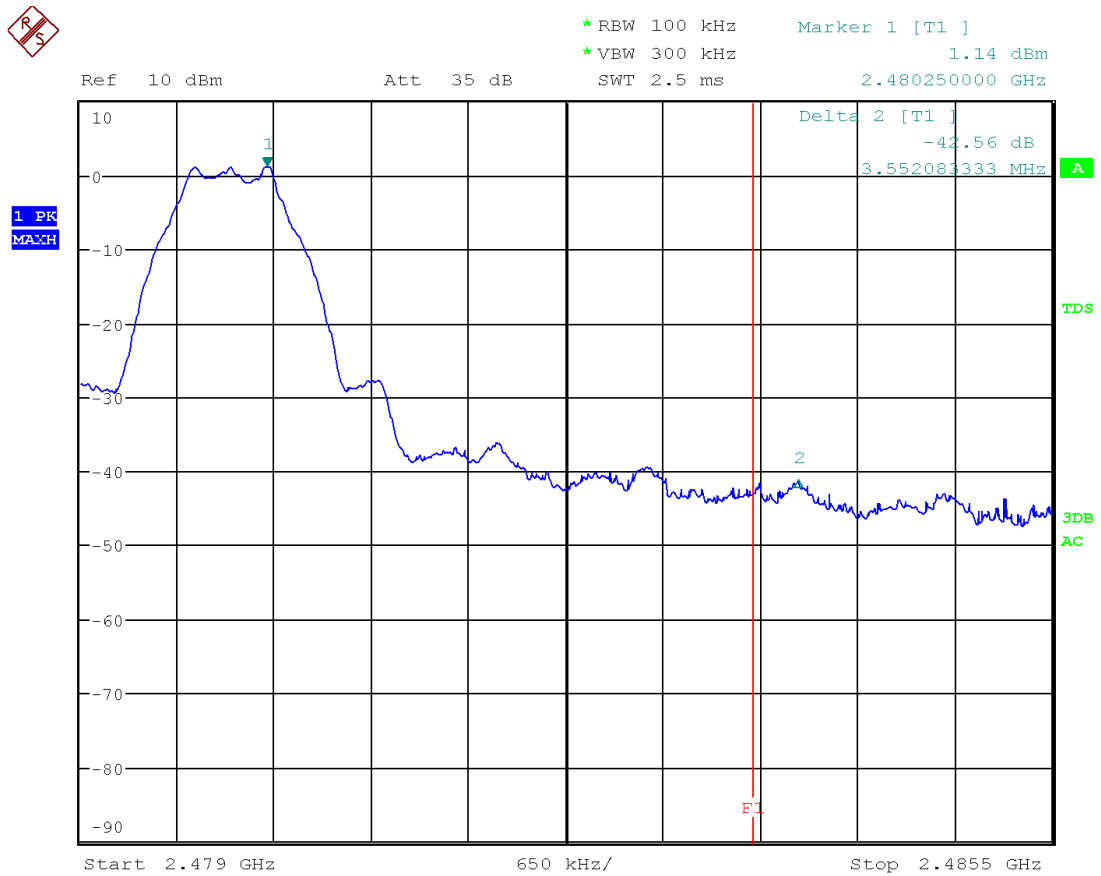

Vertical marker F1 was positioned at 2483.5 MHz.

In Band Emission (dBm)	Delta (dB)	Band Edge Emission (dBm)	Limit (dBm)	Margin (dB)	Result
2.15	-42.56	-40.41	-17.85	-22.56	Pass


Graph 8: Upper band-edge emissions

8.0 SPURIOUS EMISSION MEASUREMENTS (§15.247 (d))

8.1. Emission in non-restricted bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Conducted method was used according to clause 11 of KDB 558074 D01.

8.1.1. Results

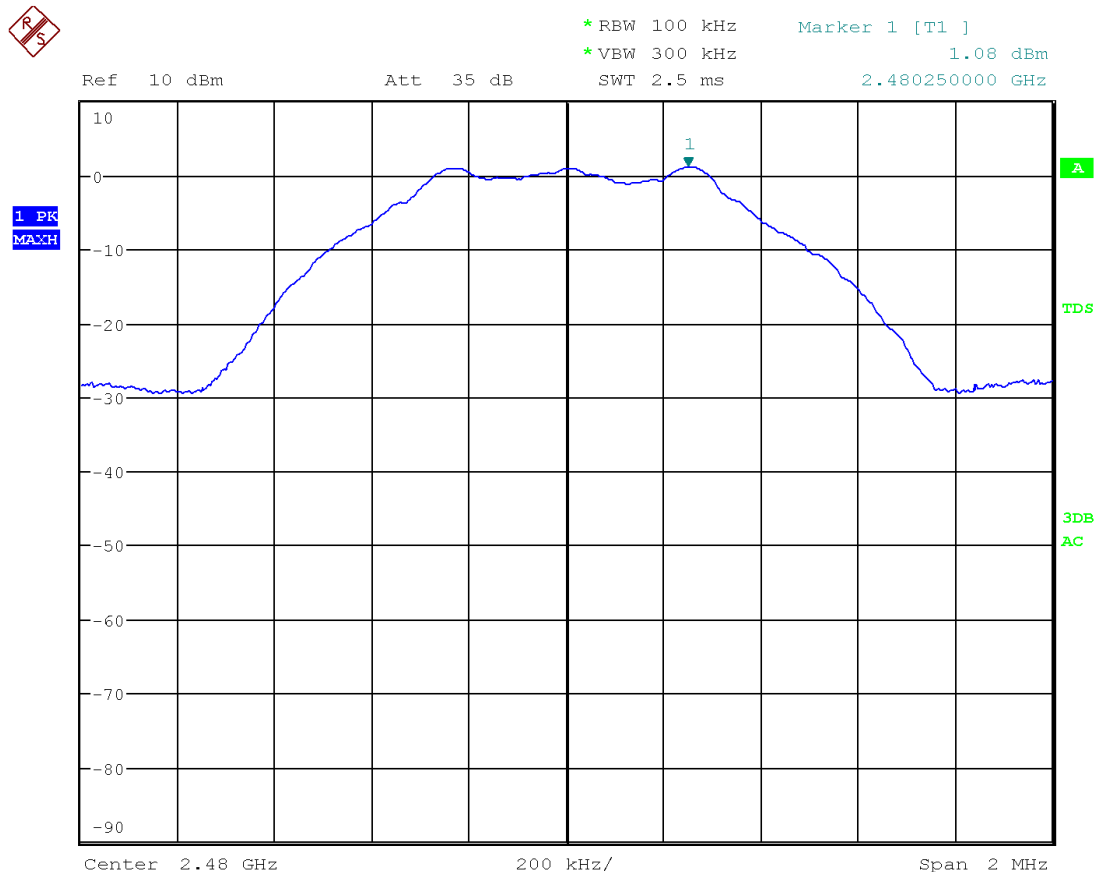


Peak	Frequency (MHz)	SA Reading (dBm)	Limit (dBm)
1	2480.25	1.08	-18.92 (1.08 - 20)

Graph 9: Reference level measurement (in band emission)




*RBW 200 Hz Marker 1 [T1]
 *VBW 300 kHz -71.60 dBm
 *SWT 3.6 s 9.940000000 kHz

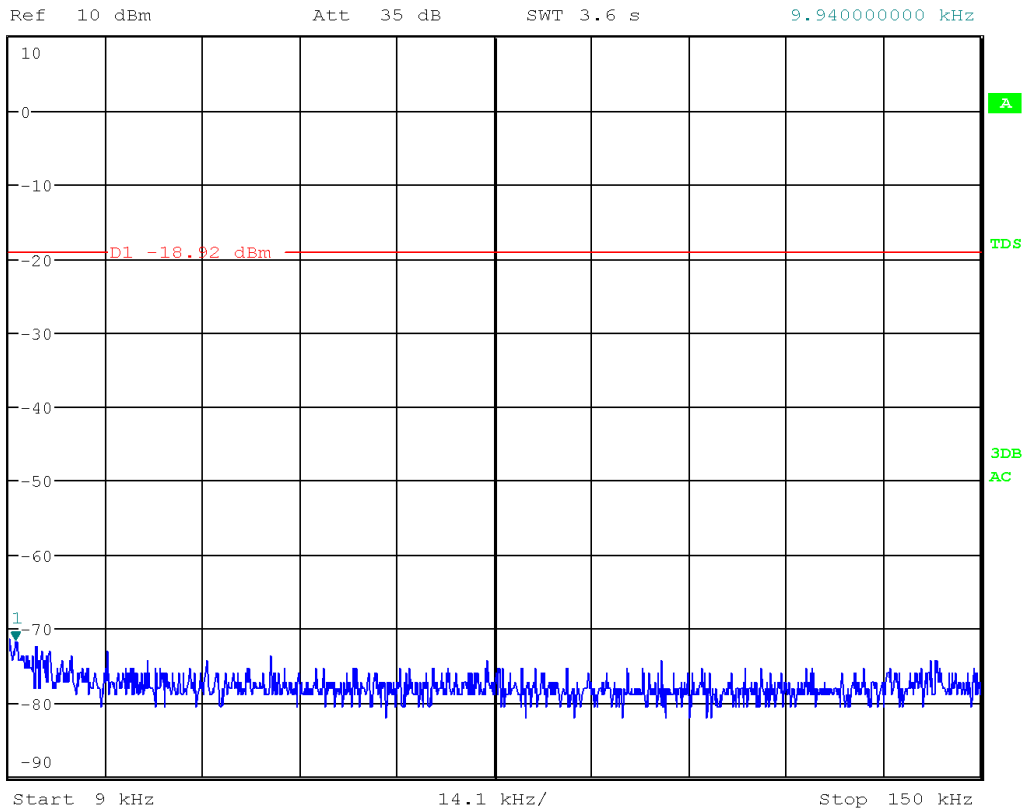

Graph 10: Conducted spurious emissions, 9 kHz-150 kHz



*RBW 10 kHz Marker 1 [T1]
 *VBW 300 kHz -56.11 dBm
 *SWT 35 s 194.552238806 kHz

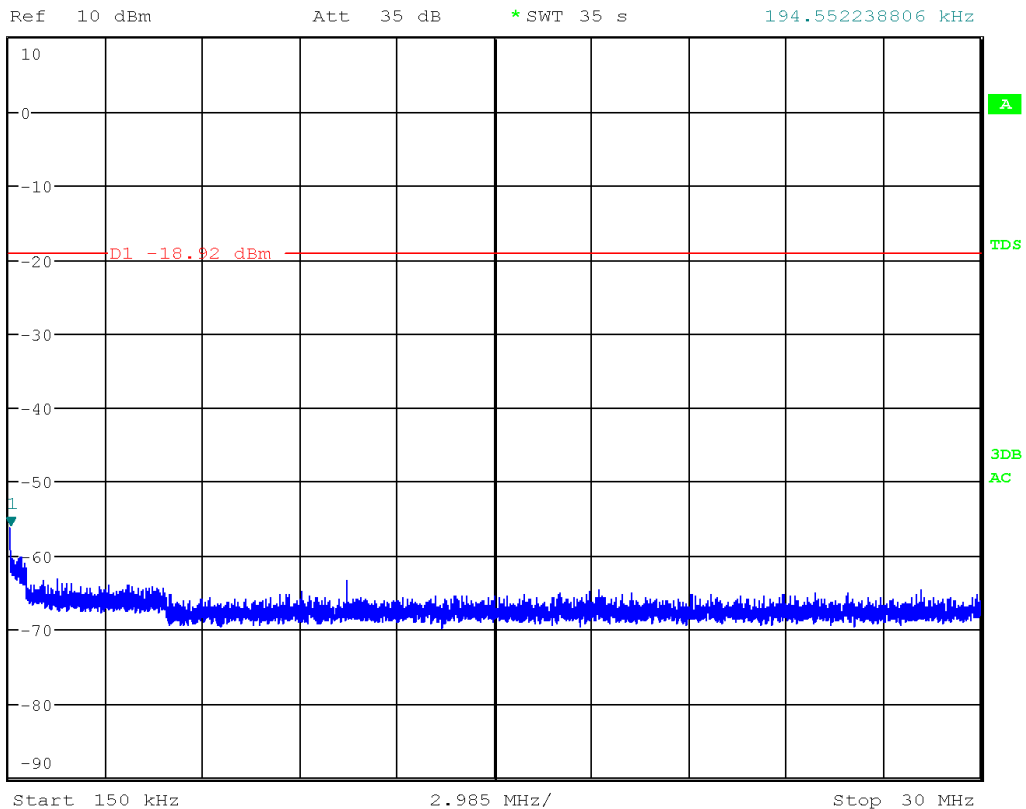


Graph 11: Conducted spurious emissions, 150 kHz-30 MHz




This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

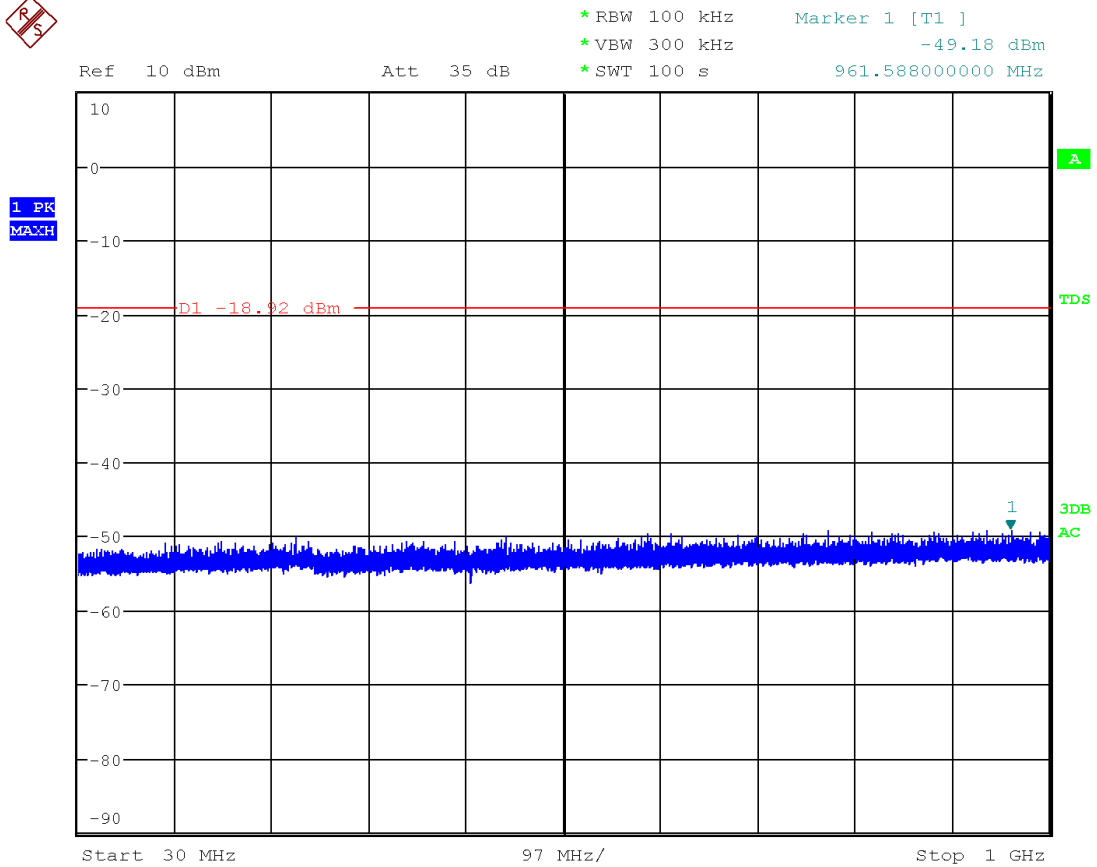

Graph 12: Conducted spurious emissions, 30 MHz-1 GHz

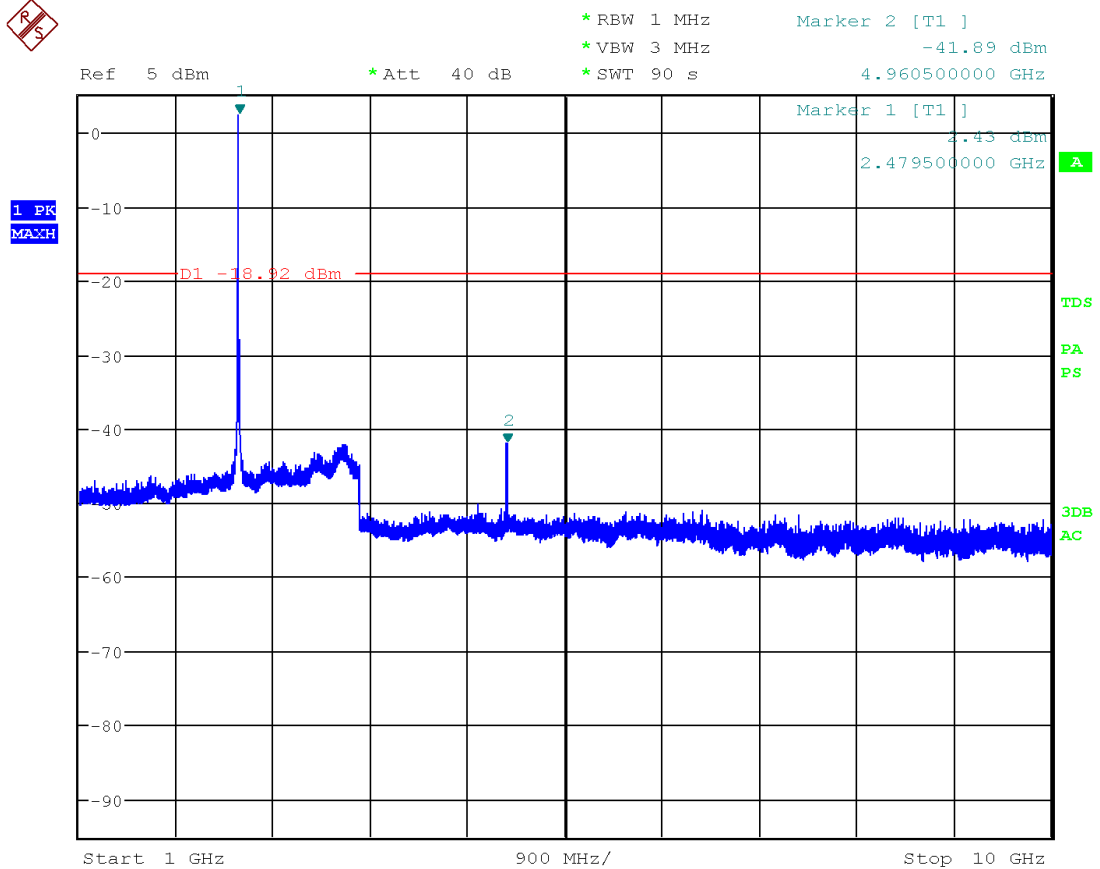


Graph 13: Conducted spurious emissions, 1 GHz-10 GHz




Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

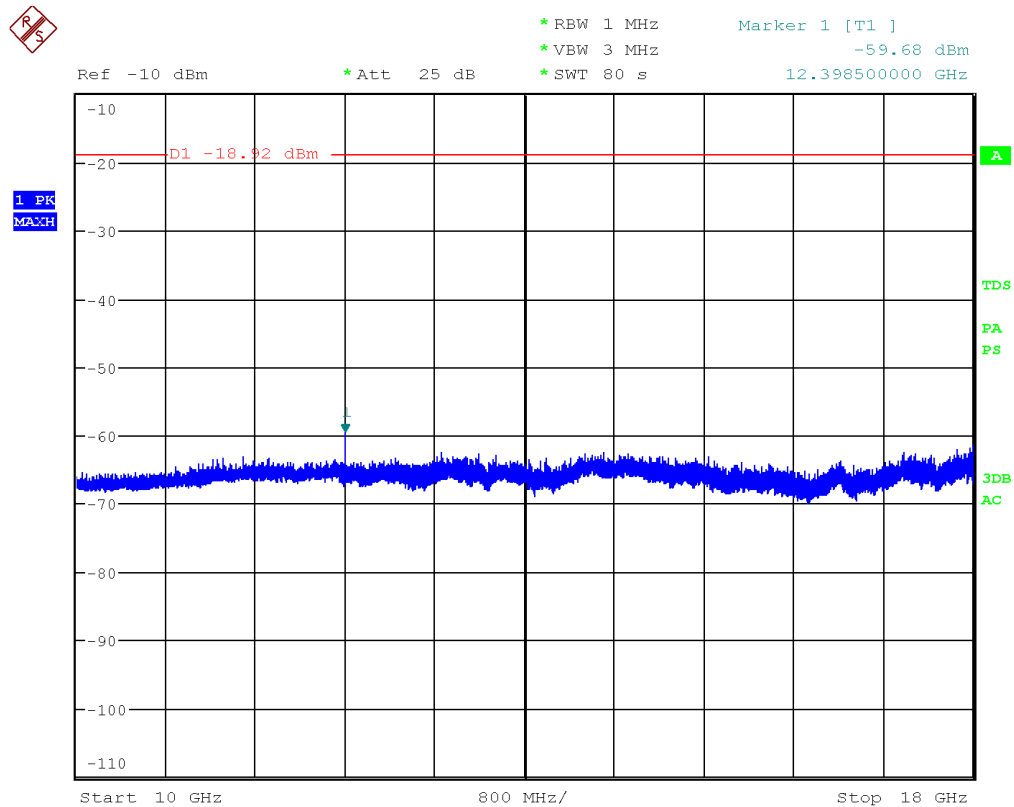

Graph 14: Conducted spurious emissions, 10 GHz-18 GHz

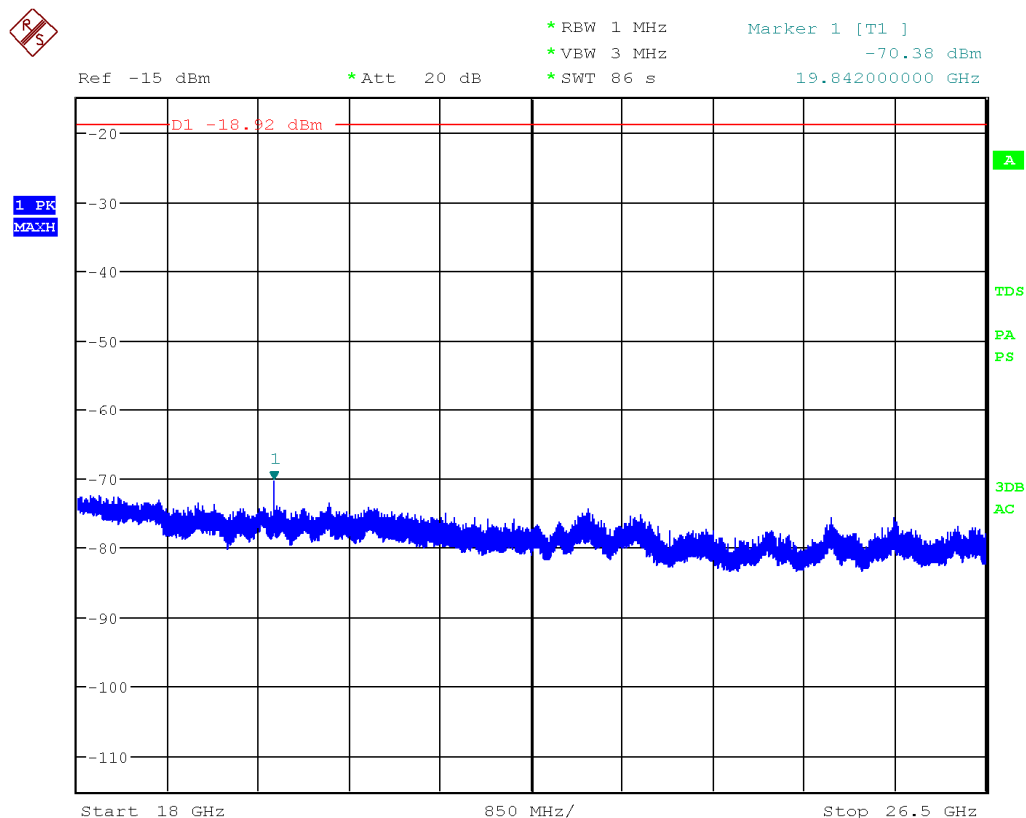

Graph 15: Conducted spurious emissions, 18 GHz-26.5 GHz

Horizontal line D1 was set to the level 20 dB lower than in band emission (figure 9).

All emissions were more than 20 dB below the maximum in-band emission.

8.2. Radiated Spurious Emissions

In order to ensure the compliance to the requirements of emission in restricted bands, radiated measurements were performed. Frequency range of 9 kHz to 26.5 GHz was investigated for any emissions falling in restricted frequency bands. Limits of FCC 15.209 were applied.

The EUT was placed 1.5 metres above the floor during the test (note: deviation from ANSI C63.10: 2013). The EUT was checked in three orthogonal planes to determine maximum emission, only the worst case is reproduced for the report.

Radiated EMI tests were performed inside a compliant CISPR16-1-4 semi-anechoic chamber for a 2m x 2m x 2m test volume up to 18 GHz, at a test distance of 10, 3 and 1 metres. The EUT was set up on the table top (placed on turntable) of total height 150 cm above the ground plane. The test frequency range was sub-divided into smaller bands with sufficient frequency resolution to permit reliable display and identification of possible EMI peaks while also permitting fast frequency scan times. A calibrated loop antenna was used for measurements between 9 kHz and 30 MHz. A calibrated Biconilog antenna was used for measurements between 30 MHz and 1000 MHz. Calibrated EMCO standard gain horn antennas were used for measurements between 1 to 26.5 GHz.

- The measurement of emissions between 9 - 150 kHz was measured with the resolution bandwidth of 200 Hz and the video bandwidth of 1 kHz.
- The measurement of emissions between 150 kHz - 30 MHz was measured with the resolution bandwidth of 9 kHz and the video bandwidth of 30 kHz.
- The measurement of emissions between 30 - 1000 MHz was measured with the resolution bandwidth of 120 kHz and the video bandwidth of 300 kHz.
- The measurement of emissions above 1000 MHz was measured using a following setting:
Peak measurements setting: RBW = VBW = 1 MHz
Average measurements setting: RBW = 1 MHz and VBW = 10 Hz

The receiver bandwidth was set to 6 dB.

The EUT was slowly rotated with the Peak Detector set to Max-Hold. This was performed for two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. The procedure was repeated with the device orientated in three orthogonal axis to further maximise the emission.

Each significant peak was investigated with the Quasi-peak, Peak or Average Detectors as appropriate. The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical antenna polarisations.

The field strength was calculated automatically by the software using all the pre-stored calibration data. The method of calculation is shown below:

$$E = V + AF - G + L$$

Where:

- E** = Radiated Field Strength in dB μ V/m.
- V** = EMI Receiver Voltage in dB μ V. (measured value)
- AF** = Antenna Factor in dB. (stored as a data array)
- G** = Preamplifier Gain in dB. (stored as a data array)
- L** = Cable loss in dB. (stored as a data array of Insertion Loss versus frequency)

• Example Field Strength Calculation

Assuming a receiver reading of 34.0 dB μ V is obtained at 90 MHz, the Antenna Factor at that frequency is 9.2 dB. The cable loss is 1.9 dB while the preamplifier gain is 20 dB. The resulting Field Strength is therefore as follows:


$$34.0 + 9.2 + 1.9 - 20 = 25.1 \text{ dB}\mu\text{V/m}$$



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.


Other than the certificate on page 3 this document shall not be reproduced except in full.

8.2.1. Results

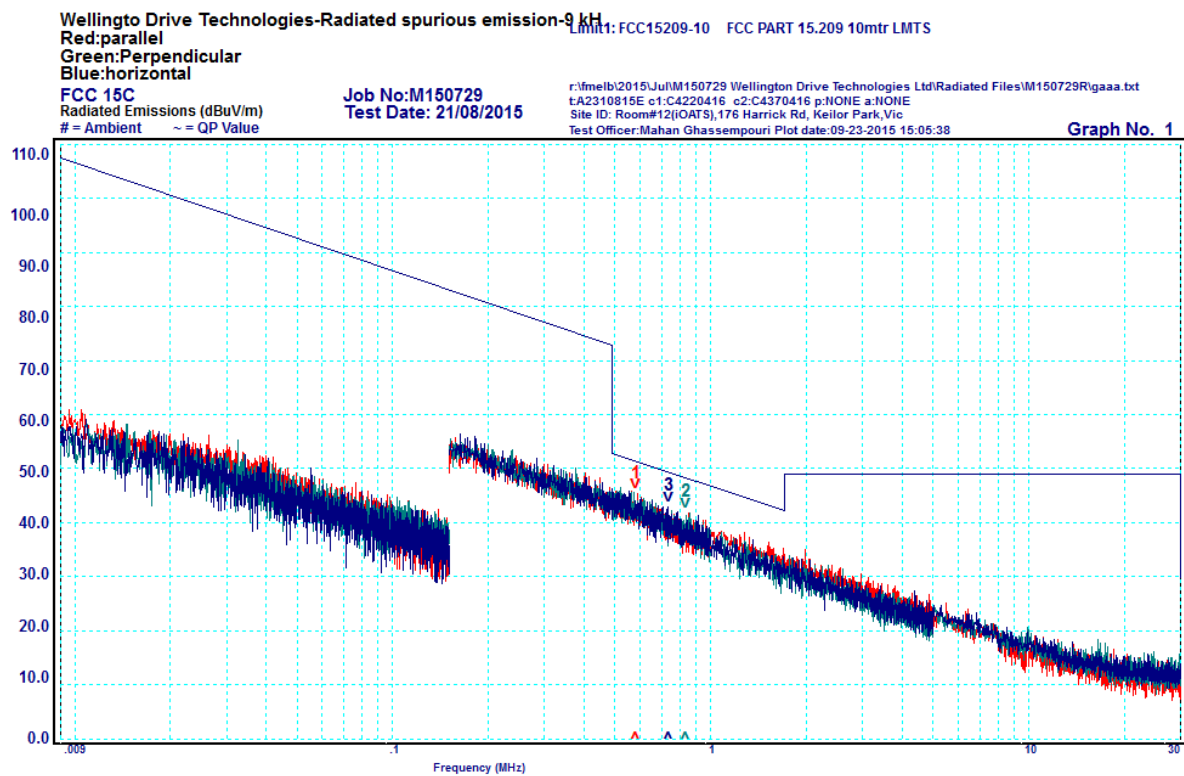

No emissions from the EUT were detected above the system noise floor.

Graph 16: Radiated emission, 9 kHz-30 MHz, loop antenna, radiated emissions with restricted band limit applied over full range

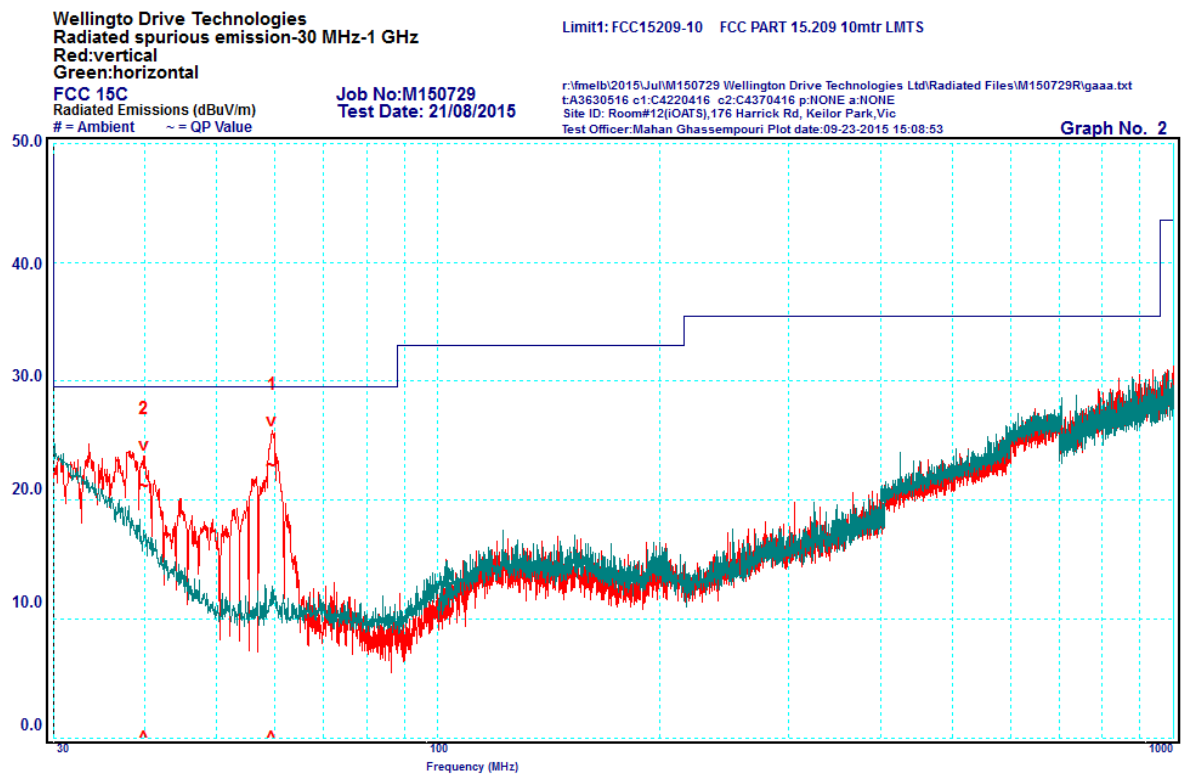

Graph 17: 25 MHz – 1 GHz, radiated emissions radiated emissions with restricted band limit applied over full range

Peak	Frequency (MHz)	Polarisation	Measured QP Level (dB μ V/m)	QP Limit (dB μ V/m)	Δ QP \pm dB
1	59.45	Vertical	22.90	29.50	-6.6
2	39.86	Vertical	21.10	29.50	-8.4



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

Wellington Drive Technologies
Radiated spurious emission-1 GHz-26.5 GHz-peak
Red:vertical
Green:horizontal


Limit1: FCC15209Pk FCC PART 15.209, 1-18GHz@3mtr, 18-40GHz@1mtr

FCC 15C
Radiated Emissions (dBuV/m)
= Ambient ~ = PKValue

Job No:M150729
Test Date: 21/08/2015

r:\fmelb\2015\Jul\M150729 Wellington Drive Technologies Ltd\Radiated Files\M150729G\gaaa.txt
t:A3071115 c1:C2730516 c2:NONE p:NONE a:NONE
Site ID: Room#12(iOATS),176 Harrick Rd, Keilor Park,Vic
Test Officer:Mahan Ghassempouri Plot date:09-23-2015 15:20:31

Graph No. 3

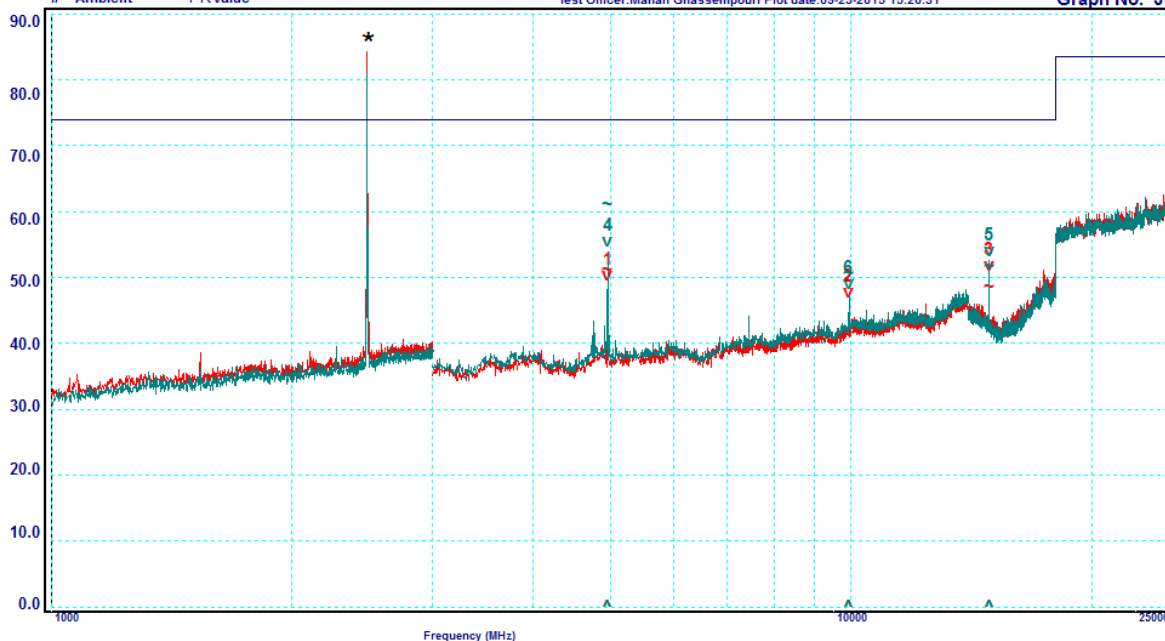

Graph 18: 1 GHz – 26.5 GHz, radiated emissions with restricted band limit applied over full range, peak detector

Peak	Frequency (MHz)	Polarisation	Measured Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Δ Peak \pm dB
1	4959.45	Vertical	51.20	74.00	-22.80
2	9919.01	Vertical	49.50	74.00	-24.50
3	14877.44	Vertical	48.60	74.00	-25.40
4	4952.42	Horizontal	61.10	74.00	-12.90
5	14877.63	Horizontal	51.60	74.00	-22.40
6	9918.98	Horizontal	50.60	74.00	-23.40

Note: Intentional radiation is excluded from measurement



Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.


Wellington Drive Technologies
Radiated spurious emission-1 GHz-26.5 GHz-peak
Red:vertical
Green:horizontal
FCC 15C
Radiated Emissions (dBuV/m)
= Ambient ~ = AV Value

Job No:M150729
Test Date: 21/08/2015

Limit1: FCC15209Av FCC PART 15.209, 1-18GHz@3mtr, 18-40GHz@1mtr

r:\fmelb\2015\Jul\M150729 Wellington Drive Technologies Ltd\Radiated Files\M150729Glgaaa.txt
t:A3071115 c1:C2730516 c2:NONE p:NONE a:NONE
Site ID: Room#12(IQATS),176 Harrick Rd, Keilor Park,Vic
Test Officer:Mahan Ghassempouri Plot date:09-23-2015 15:32:31

Graph No. 4

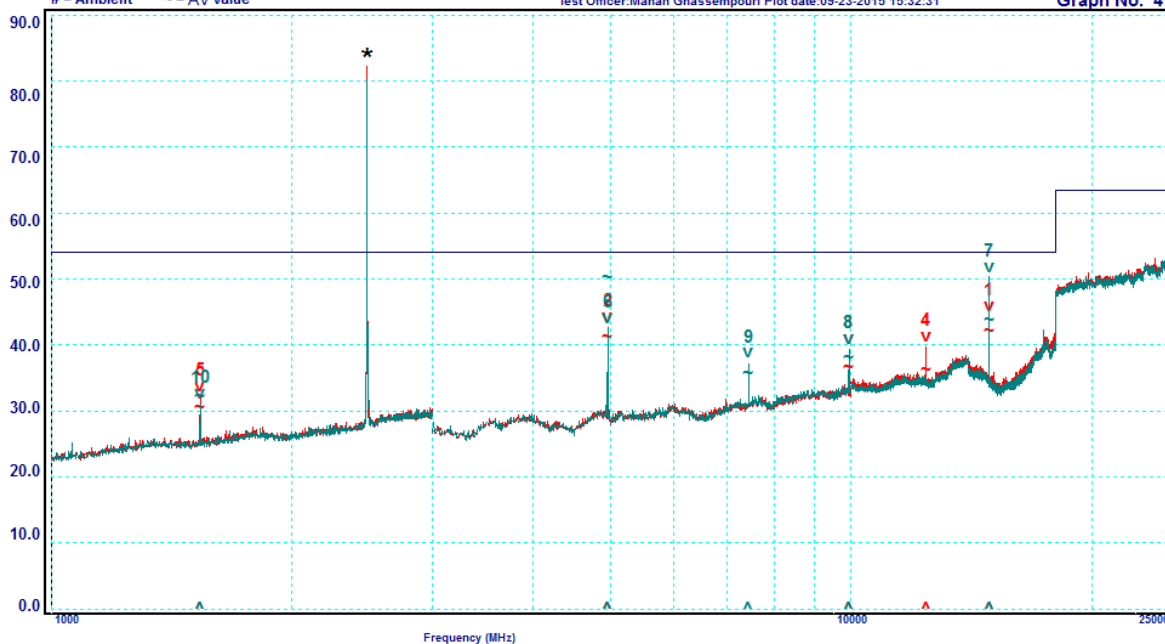

Graph 19: 1 GHz – 26.5 GHz, radiated emissions with restricted band limit applied over full range, average detector

Peak	Frequency (MHz)	Polarisation	Measured AV Level (dBuV/m)	AV Limit (dBuV/m)	$\Delta AV \pm dB$
1	14878.52	Vertical	42.20	54.00	-11.80
2	4959.54	Vertical	41.10	54.00	-12.90
3	9918.82	Vertical	36.50	54.00	-17.50
4	12398.69	Vertical	36.10	54.00	-17.90
5	1536.02	Vertical	30.50	54.00	-23.50
6	4959.65	Horizontal	50.10	54.00	-3.90
7	14878.29	Horizontal	43.70	54.00	-10.30
8	9918.89	Horizontal	38.00	54.00	-16.00
9	7439.32	Horizontal	35.70	54.00	-18.30
10	1536.11	Horizontal	32.10	54.00	-21.90


Note: Intentional radiation is excluded from measurement

9.0 POWER SPECTRAL DENSITY (§15.247 (d))

The PKPSD method according to KDB 558074 was used to demonstrate compliance.

9.1. Results

Measurement results are shown in the following graphs.

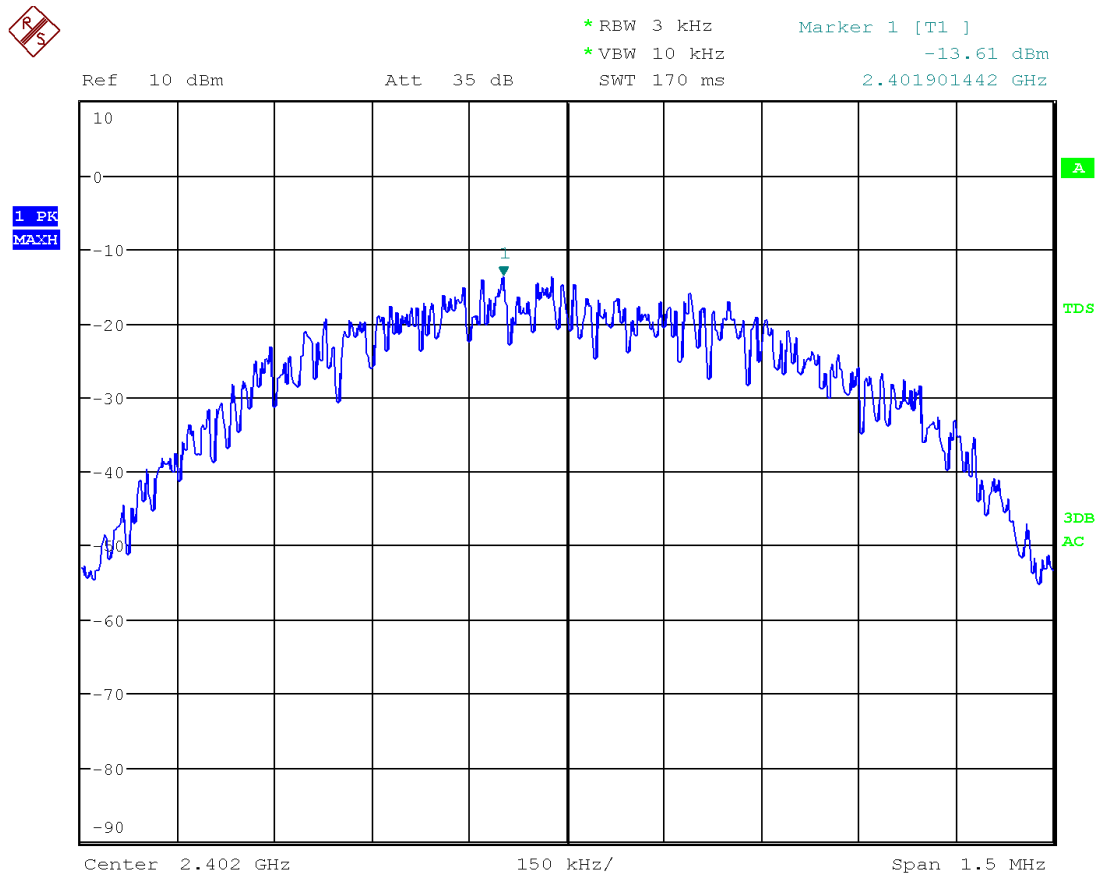


Channel	Peak PSD (dBm/3 kHz)	Limit (dBm)	Margin (dB)	Result
Low	-13.61	8	21.61	Pass

Graph 20: Transmitter peak power spectral density, low channel



* RBW 3 kHz Marker 1 [T1]
 * VBW 10 kHz -14.07 dBm
 Ref 10 dBm Att 35 dB SWT 170 ms 2.439973558 GHz

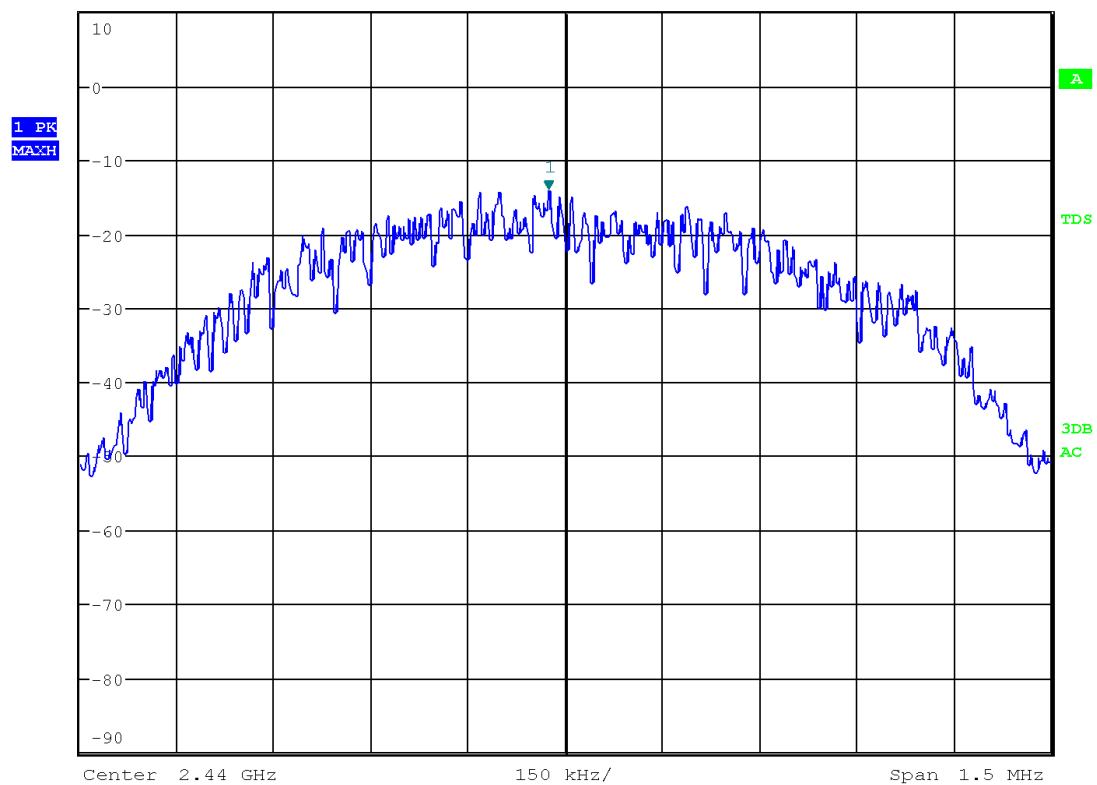

Channel	Peak PSD (dBm/3 kHz)	Limit (dBm)	Margin (dB)	Result
Middle	-14.07	8	22.07	Pass

Graph 21: Transmitter peak power spectral density, middle channel




Accreditation No. 5292

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.



* RBW 3 kHz Marker 1 [T1]
 * VBW 10 kHz -13.26 dBm
 Ref 10 dBm Att 35 dB SWT 170 ms 2.479882212 GHz

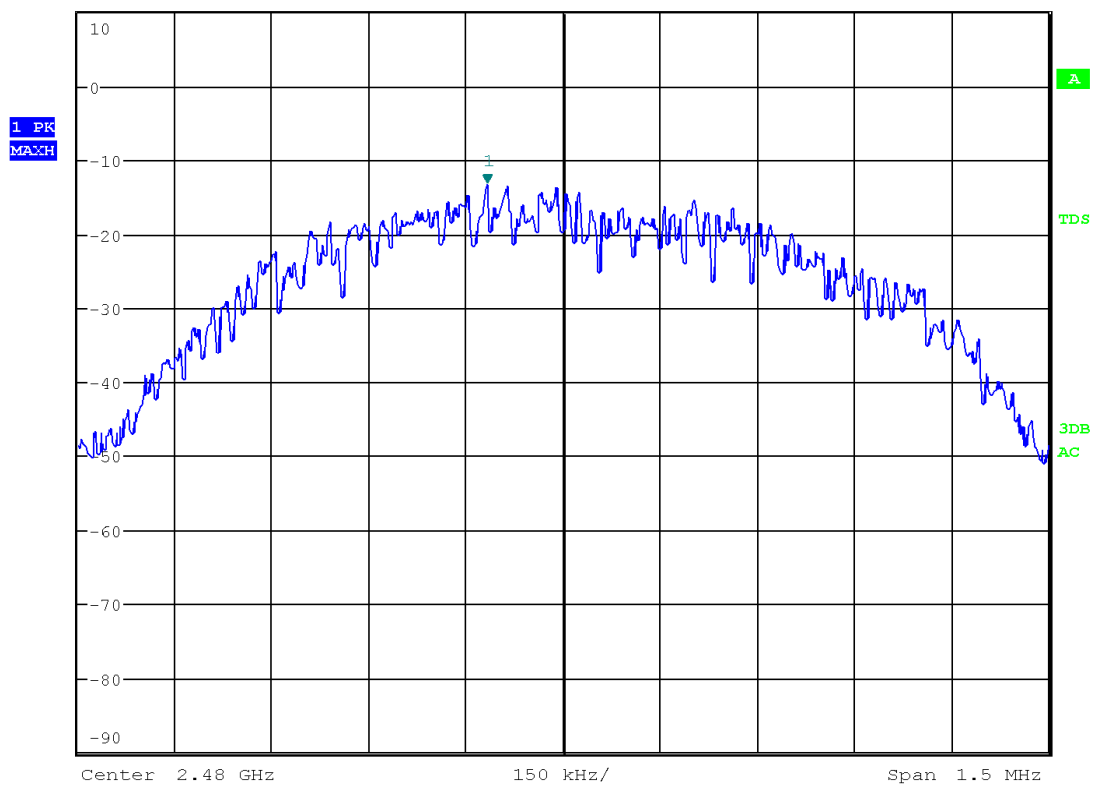

Channel	Peak PSD (dBm/3 kHz)	Limit (dBm)	Margin (dB)	Result
High	-13.26	8	21.26	Pass

Graph 20: Transmitter peak power spectral density, high channel




This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.


Other than the certificate on page 3 this document shall not be reproduced except in full.

10.0 §2.1049 OCCUPIED BANDWIDTH – 99% POWER


The bandwidth containing 99% power of the transmitted signal was measured using the procedure from ANSI C63.10 section 6.9.

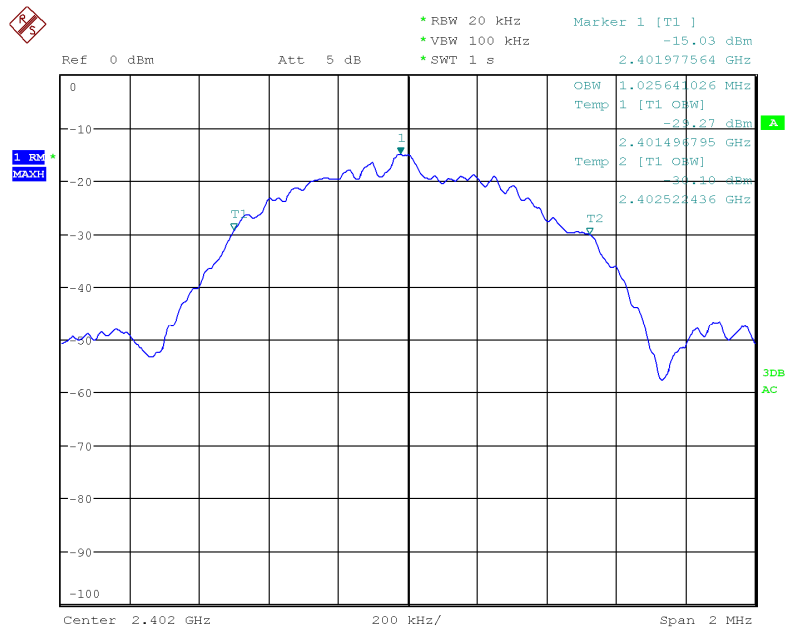

The lowest channel 99% power bandwidth was **1.026 MHz**.

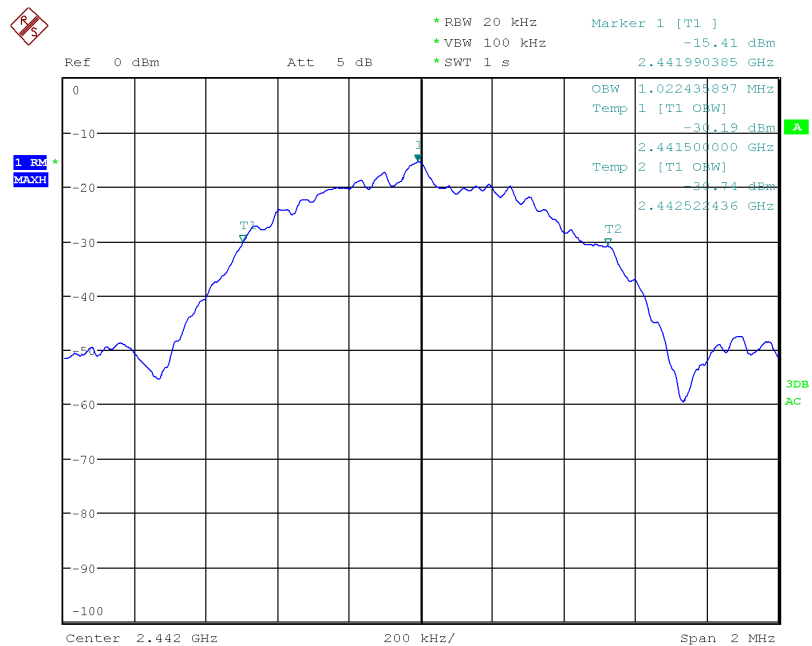

The middle channel 99% power bandwidth was **1.022 MHz**.

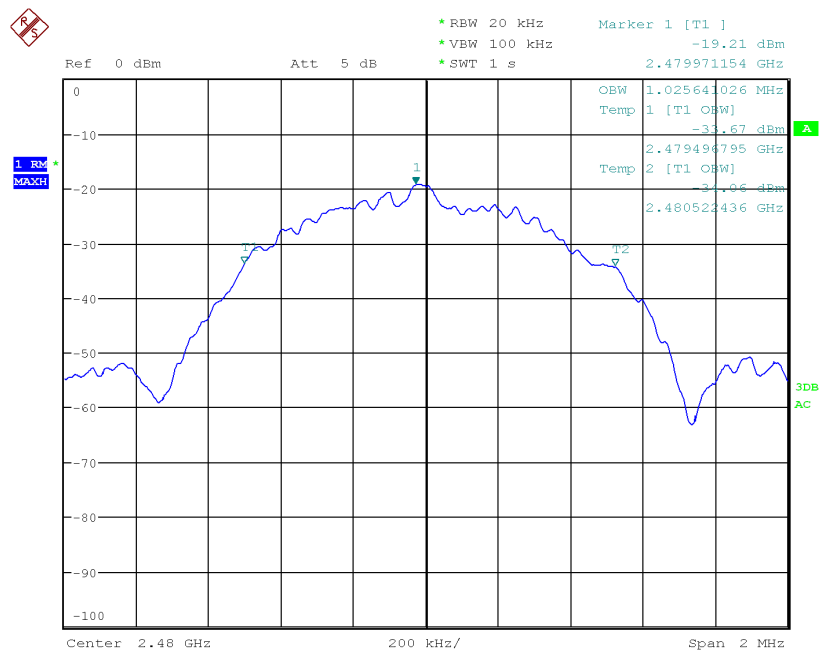

The highest channel 99% power bandwidth was **1.026 MHz**.

11.0 COMPLIANCE STATEMENT

Commercial refrigeration controller with Bluetooth LE connectivity, Model: SCS Connect (part number: SCSLC1013) tested on behalf of Wellington Drive Technologies Ltd, **complied** with the requirements of 47 CFR, Part 15 Subpart C - Rules for Radio Frequency Devices (intentional radiators), Section 15.247 - Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

Summary of results are shown in below table:

FCC Part 15 Subpart C	Test Performed	Results
15.203	Antenna requirement	Complied
15.205	Operation in restricted Band	Complied
15.207	Conducted emissions limits	Complied
15.209	Radiated emissions limits	Complied
15.247 (a)(2)	Minimum 6 dB bandwidth	Complied
15.247 (b)(3)	Peak output power	Complied
15.247 (c)	Antenna gain > 6 dBi	N/A as the EUT uses integral antenna with less than 6 dBi gain and there is no external antenna connector
15.247 (d)	Out of band emissions	Complied
15.247 (e)	Peak power spectral density	Complied
15.247 (f)	Hybrid systems	N/A as the EUT uses digital modulation
15.247 (g)	Hopping channel application	N/A as the EUT uses digital modulation
15.247 (h)	Incorporation of intelligence within FHSS	N/A as the EUT uses digital modulation
15.247 (i)	Radio Frequency Hazard	Complied, output power was less than 20 mW
2.1049	Occupied bandwidth	1.026 MHz

12.0 UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainty for emissions tests shown within this report are as follows:

Conducted Emissions: 9 kHz to 30 MHz ± 3.2 dB

Radiated Emissions:

9 kHz to 30 MHz	± 4.1 dB
30 MHz to 300 MHz	± 5.1 dB
300 MHz to 1000 MHz	± 4.7 dB
1 GHz to 18 GHz	± 4.6 dB
18 GHz to 26 GHz	± 5.1 dB

Peak Output Power: ± 1.5 dB

Peak Power Spectral Density: ± 1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

Other than the certificate on page 3 this document shall not be reproduced except in full.

APPENDIX A**MEASUREMENT INSTRUMENT DETAILS**

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yy	Due Date dd/mm/yy	Cal. Interval
Chamber	Frankonia SAC-10-2 (R-139)	8/1/2015	8/1/2016	1 Year, *1
EMI Receiver	R&S ESU40 20 Hz – 40 GHz Sn: 100392 (R-140)	09/10/2014	09/10/2015	1 Year, *2
	R&S ESU40 20 Hz – 40 GHz Sn: 100182 (R-037)	12/02/2015	12/02/2016	1 Year, *2
Antennas	EMCO 6502 Active Loop A-231 9kHz-30MHz Sn. 9311-2801	20/07/2015	20/07/2018	3 Year, *2
	SUNOL JB6 BICONILOG 30 – 6000 MHz Sn. A012312 (A-363)	16/05/2014	16/05/2016	2 Year, *2
	EMCO 3115 Broadband Horn 1 – 18 GHz Sn. 8908-3282 (A-004)	09/05/2013	09/05/2016	3 Year, *1
	ETS-Lindgren Horn 3160-09 18-26.5 GHz Sn. 66032 (A-307)	12/11/2012	12/11/2015	3 Year, *1
	ETS-Lindgren Horn 3160-10 26.5-40 GHz Sn. 66032 (A-306)	12/11/2012	12/11/2015	3 Year, *1

Note *1. Internal NATA calibration.

Note *2. External NATA / A2LA calibration