



## FCC PART 15.247

### TEST REPORT

For

**AKUVOX (XIAMEN) NETWORKS CO., LTD.**

10/F, No. 56, Software Park II, Xiamen, China

**FCC ID: 2AHCR-VPR48G**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Video Phone
<b>Test Engineer:</b> <u>Kevin Hu</u> <i>Kevin hu</i>	
<b>Report Number:</b> <u>RXM161109054B</u>	
<b>Report Date:</b> <u>2017-01-16</u>	
<b>Reviewed By:</b> <u>Henry Ding</u> <i>Henry Ding</i> EMC Leader	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Chengdu) 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China Tel: 028-65523123, Fax: 028-65525125 www.baclcorp.com	

**Note:** This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION .....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S) .....	4
TEST METHODOLOGY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	6
SUPPORT CABLE LIST AND DETAILS .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY .....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP .....	12
TEST PROCEDURE .....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST EQUIPMENT LIST AND DETAILS .....	13
TEST DATA .....	13
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
MEASUREMENT UNCERTAINTY .....	18
EUT SETUP .....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	20
TEST PROCEDURE .....	20
TEST EQUIPMENT LIST AND DETAILS .....	20
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	21
TEST DATA .....	21
<b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST EQUIPMENT LIST AND DETAILS .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31

TEST EQUIPMENT LIST AND DETAILS .....	31
TEST DATA.....	31
<b>FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST EQUIPMENT LIST AND DETAILS .....	37
TEST DATA.....	37
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>41</b>
APPLICABLE STANDARD .....	41
TEST PROCEDURE .....	41
TEST EQUIPMENT LIST AND DETAILS .....	41
TEST DATA.....	41
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>57</b>
APPLICABLE STANDARD .....	57
TEST PROCEDURE .....	57
TEST EQUIPMENT LIST AND DETAILS .....	57
TEST DATA.....	57
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>63</b>
APPLICABLE STANDARD .....	63
TEST PROCEDURE .....	63
TEST EQUIPMENT LIST AND DETAILS .....	63
TEST DATA.....	64

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The **AKUVOX (XIAMEN) NETWORKS CO., LTD.**'s product, model number: **VP-R48G (FCC ID: 2AHCR-VPR48G)** (the "EUT") in this report was a **Video Phone**, which was measured approximately: 24 cm (L) × 11 cm (W) × 19 cm (H), rated input voltage: DC12V from adapter or DC48V from POE adapter.

Adapter information:

MODEL: RD1201000-C55-26MG

INPUT: AC 100-240V , 50/60Hz ,0.6A

OUTPUT: DC 12V, 1A

*\*All measurement and test data in this report was gathered from final production sample, serial number: 161109054 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2016-11-11, and EUT conformed to test requirement.*

### Objective

This report is prepared on behalf of **AKUVOX (XIAMEN) NETWORKS CO., LTD.** in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2AHCR-VPR48G.

FCC Part 15C DTS submissions with FCC ID: 2AHCR-VPR48G.

## Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The uncertainty of any RF tests which use conducted method measurement is  $\pm 3.17$  dB, the uncertainty of any radiation on emissions measurement is:

30M~200MHz:  $\pm 4.7$  dB;

200M~1GHz:  $\pm 6.0$  dB;

1G~6GHz:  $\pm 5.13$  dB;

6G~25GHz:  $\pm 5.47$  dB;

And the uncertainty will not be taken into consideration for all test data recorded in the report.

## Test Facility

The test site used by BACL to collect test data is located in the 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

---

### Description of Test Configuration

The system was configured for testing in engineering mode.

### EUT Exercise Software

The engineering mode configured the maximum power as default setting.

### Equipment Modifications

No modification was made to the EUT.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
PHILIPS	Monitor	227E3L	AU3A1140001077
Kinston	Flash Disk	4GB	482788
ipod	Headset	N/A	N/A
IBM	PC	8176	99Y7315
Tenda	Router	T311R	478925

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	no	yes	1.2	Adapter	EUT
HDMI Cable	yes	yes	1.5	HDMI Port of EUT	Monitor
RJ45 Cable	yes	no	10	EUT	PC
RJ45 Cable	yes	no	10	EUT	Router
RJ45 Cable	yes	no	1.0	POE adapter	EUT
Earphone cable	no	no	1.2	EUT	earphone

## Block Diagram of Test Setup

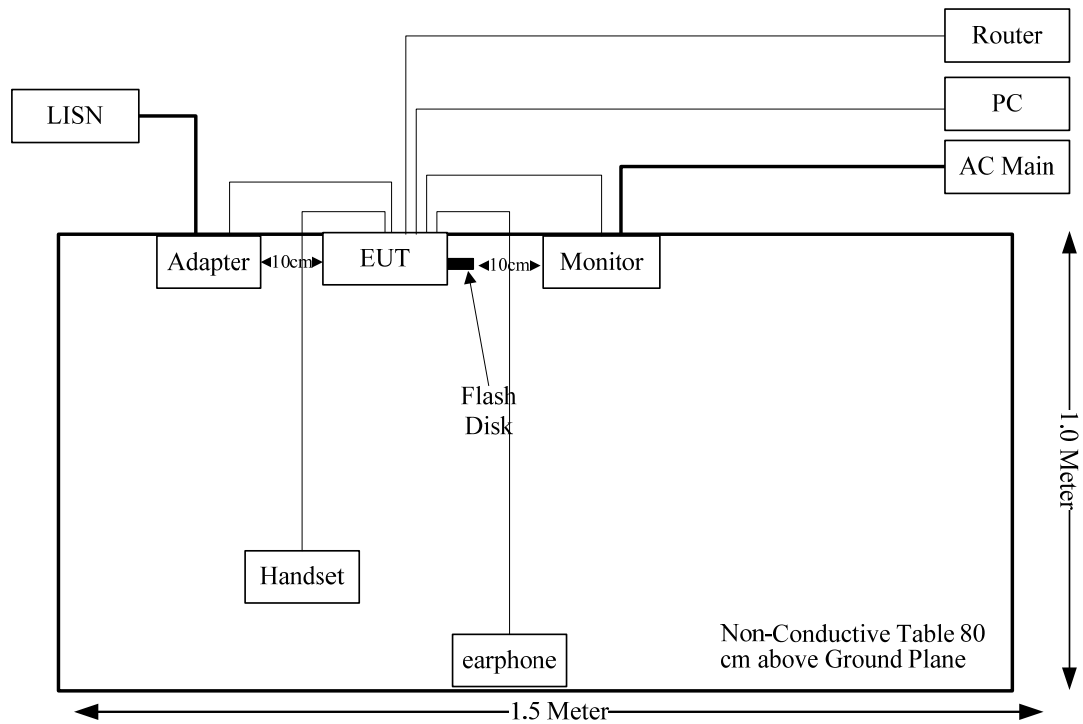

## SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance



## FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN 2.4GHz	2412-2462	2	1.58	23	199.53	20.00	0.0629	1.0
BLE	2402-2480	2	1.58	7	5.01	20.00	0.0016	1.0
Bluetooth BDR/EDR	2402-2480	2	1.58	7	5.01	20.00	0.0016	1.0

The 2.4GHz WLAN and Bluetooth BDR/EDR/BLE can't transmit simultaneously:

**Result:** The device meet FCC MPE at 20 cm distance

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for Wifi/BT, and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

–compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;  
 –non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


–compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;  
 –non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2:2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Chengdu) is  $\pm 3.17$  dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup

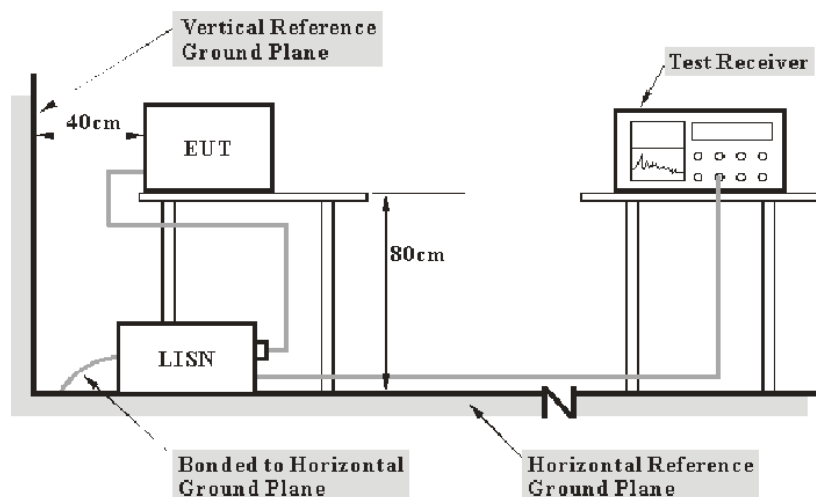

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

$VDF$ : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6550.06	2016-12-02	2017-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	357.8810.52	2016-10-31	2017-10-30
N/A	Conducted Cable	NO.5	N/A	2016-11-10	2017-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data


#### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	41%
ATM Pressure:	101.1 kPa

*The testing was performed by Kevin Hu on 2017-01-16.*

Test Mode: Transmitting(Adapter mode)


AC120 V, 60 Hz, Line:

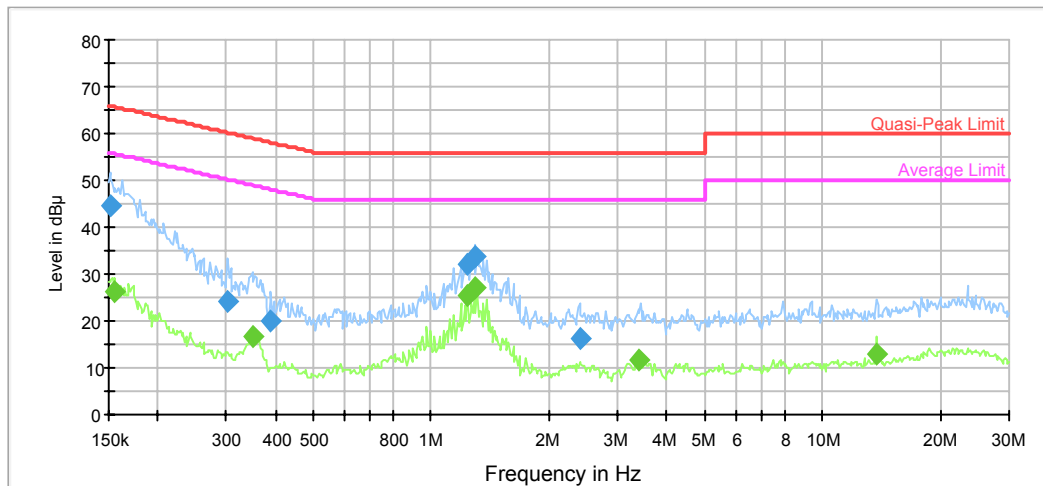

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151200	44.4	9.000	L1	19.7	21.5	65.9	Compliance
0.302425	24.3	9.000	L1	19.7	35.9	60.2	Compliance
0.390261	20.2	9.000	L1	19.8	37.9	58.1	Compliance
1.239175	32.0	9.000	L1	19.7	24.0	56.0	Compliance
1.289541	33.5	9.000	L1	19.7	22.5	56.0	Compliance
2.400804	16.1	9.000	L1	19.7	39.9	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.156097	26.3	9.000	L1	19.7	29.4	55.7	Compliance
0.351859	16.9	9.000	L1	19.7	32.0	48.9	Compliance
1.239175	25.6	9.000	L1	19.7	20.4	46.0	Compliance
1.289541	27.1	9.000	L1	19.7	18.9	46.0	Compliance
3.408946	11.9	9.000	L1	19.7	34.1	46.0	Compliance
13.747168	13.0	9.000	L1	20.0	37.0	50.0	Compliance

**AC120 V, 60 Hz, Neutral:**

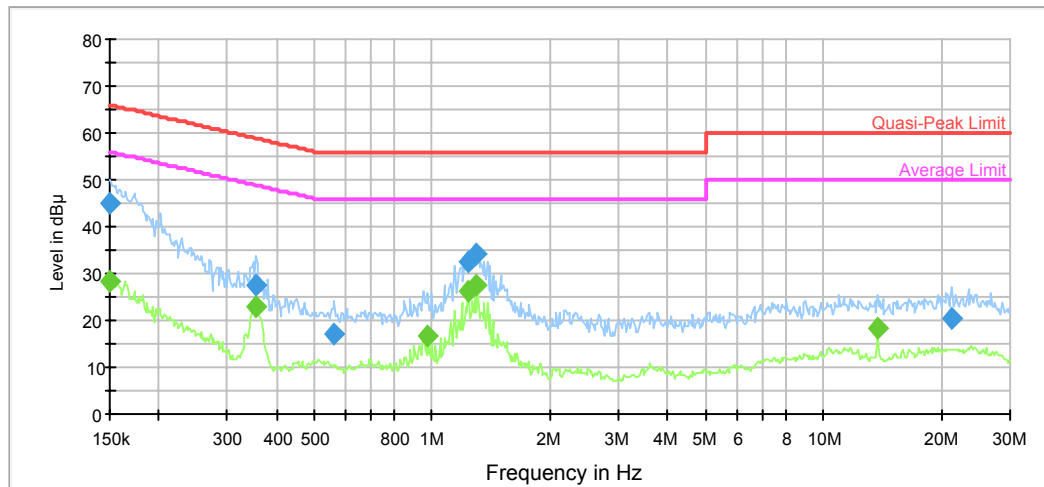


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	44.9	9.000	N	19.7	21.1	66.0	Compliance
0.354674	27.6	9.000	N	19.6	31.3	58.9	Compliance
0.563041	16.9	9.000	N	19.6	39.1	56.0	Compliance
1.239175	32.6	9.000	N	19.6	23.4	56.0	Compliance
1.289541	34.1	9.000	N	19.6	21.9	56.0	Compliance
21.307992	20.5	9.000	N	20.0	39.5	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	28.5	9.000	N	19.7	27.5	56.0	Compliance
0.354674	23.0	9.000	N	19.6	25.9	48.9	Compliance
0.975701	16.6	9.000	N	19.7	29.4	46.0	Compliance
1.239175	26.3	9.000	N	19.6	19.7	46.0	Compliance
1.289541	27.4	9.000	N	19.6	18.6	46.0	Compliance
13.747168	18.2	9.000	N	19.9	31.8	50.0	Compliance

Test Mode: Transmitting(POE mode)

120 V, 60 Hz, Line:

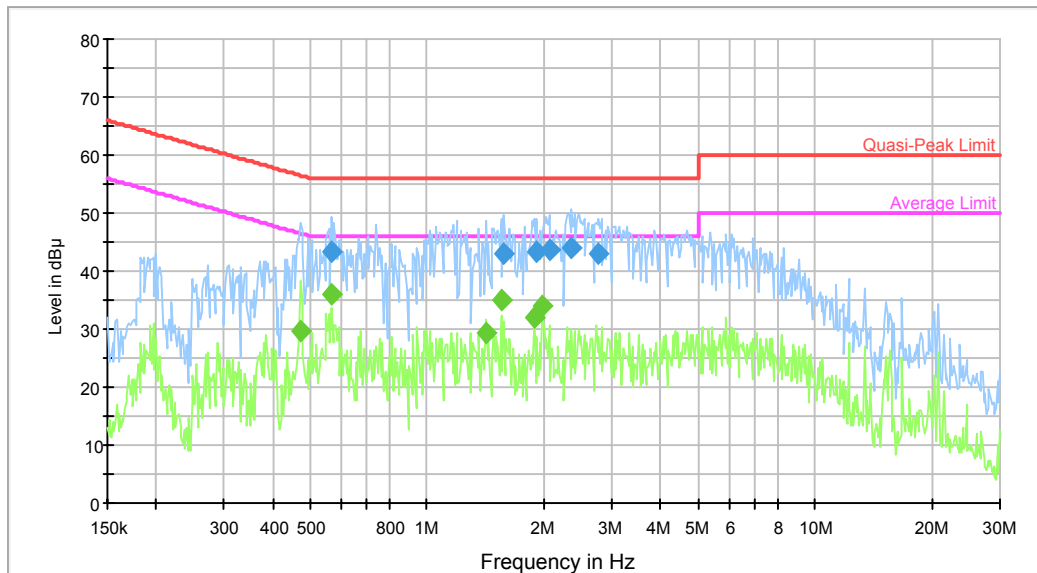


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Polarity	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.567545	43.3	9.000	L1	19.7	12.7	56.0	Compliance
1.573796	43.0	9.000	L1	19.7	13.0	56.0	Compliance
1.920710	43.5	9.000	L1	19.8	12.5	56.0	Compliance
2.063510	43.6	9.000	L1	19.8	12.4	56.0	Compliance
2.362847	44.0	9.000	L1	19.7	12.0	56.0	Compliance
2.771062	43.0	9.000	L1	19.7	13.0	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Polarity	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.472507	29.6	9.000	L1	19.7	16.9	46.5	Compliance
0.567545	35.9	9.000	L1	19.7	10.1	46.0	Compliance
1.418932	29.5	9.000	L1	19.7	16.5	46.0	Compliance
1.548915	34.9	9.000	L1	19.7	11.1	46.0	Compliance
1.890344	31.9	9.000	L1	19.8	14.1	46.0	Compliance
1.982914	33.9	9.000	L1	19.8	12.1	46.0	Compliance



**120V, 60 Hz, Neutral:**

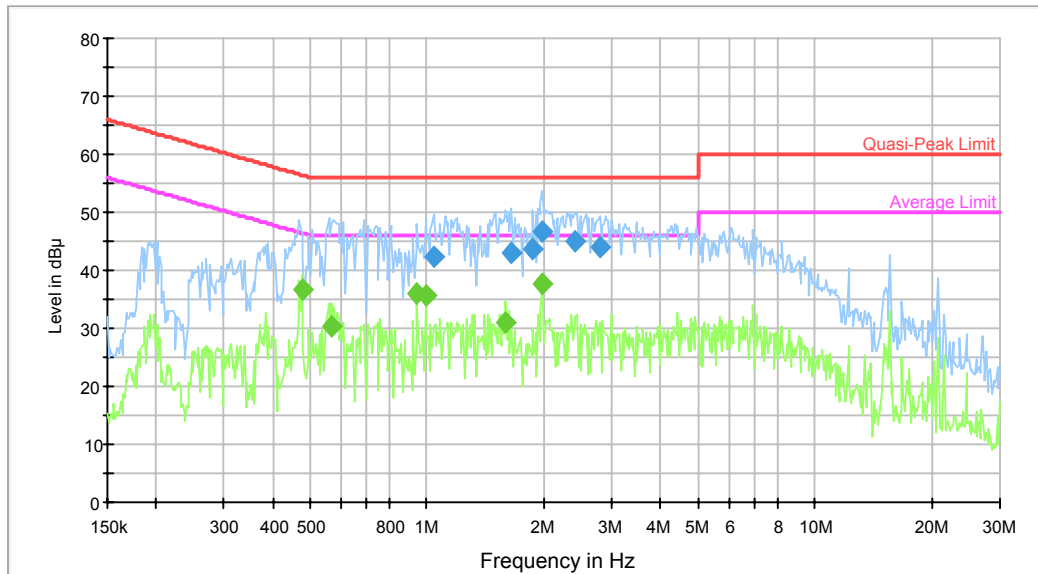

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Polarity	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
1.039922	42.2	9.000	N	19.7	13.8	56.0	Compliance
1.650866	43.1	9.000	N	19.7	12.9	56.0	Compliance
1.875341	43.6	9.000	N	19.7	12.4	56.0	Compliance
1.982914	46.5	9.000	N	19.7	9.5	56.0	Compliance
2.400804	45.0	9.000	N	19.7	11.0	56.0	Compliance
2.793231	43.9	9.000	N	19.7	12.1	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Polarity	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.476287	36.7	9.000	N	19.6	9.7	46.4	Compliance
0.567545	30.3	9.000	N	19.6	15.7	46.0	Compliance
0.945093	35.9	9.000	N	19.7	10.1	46.0	Compliance
0.991374	35.7	9.000	N	19.7	10.3	46.0	Compliance
1.599078	31.1	9.000	N	19.7	14.9	46.0	Compliance
1.982914	37.6	9.000	N	19.7	8.4	46.0	Compliance

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cisp}$  of Table 2, then:

–compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;  
–non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cisp}$  of Table 2, then:

–compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit;  
–non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Chengdu) is:

30M~200MHz: ±4.7 dB;

200M~1GHz: ±6.0 dB;

1G~6GHz: ±5.13dB;


6G~25GHz: ±5.47 dB;

Table 2 – Values of  $U_{cisp}$


Measurement	$U_{cisp}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

## EUT Setup

### Below 1GHz:

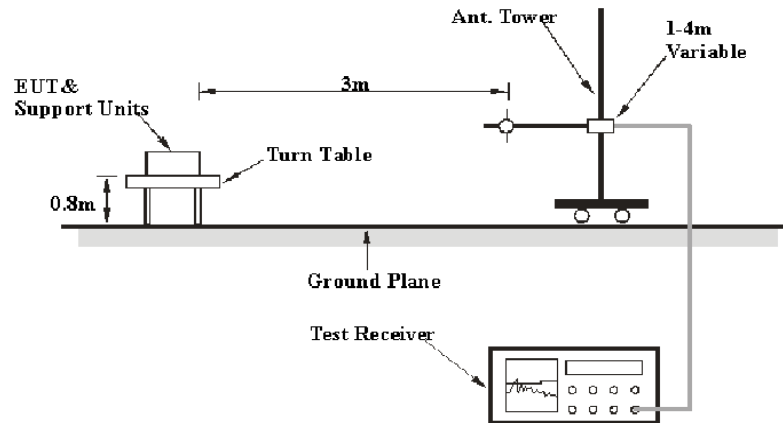

### Above 1GHz:

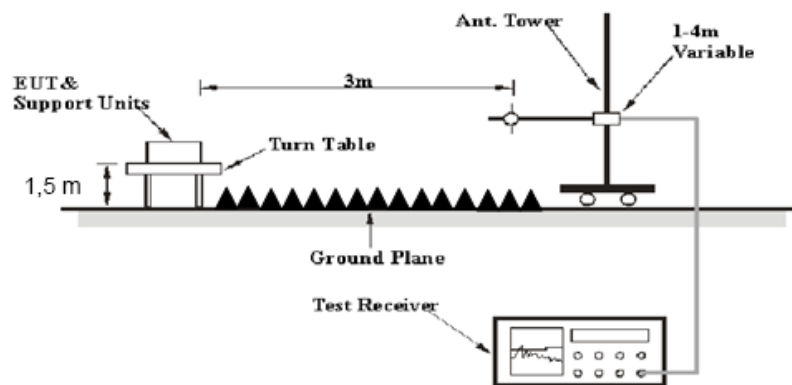

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A101808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2016-05-20	2017-05-19
HP	Amplifier	8449B	3008A00277	2016-12-02	2017-12-01
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2016-11-10	2017-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2016-11-10	2017-11-09
N/A	RF Cable (above 1GHz)	NO.2	N/A	2013-11-10	2017-11-09

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23.7 °C
<b>Relative Humidity:</b>	48%
<b>ATM Pressure:</b>	101.2 kPa

*\* The testing was performed by Kevin Hu on 2017-01-09.*

*Test Mode: Transmitting(Adapter mode was the worst)*

**30MHz-25GHz:**  
**BDR Mode (GFSK):**

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	73.24	PK	H	23.53	3.00	0.00	99.77	N/A	N/A
2402	54.47	AV	H	23.53	3.00	0.00	81.00	N/A	N/A
2402	65.1	PK	V	23.53	3.00	0.00	91.63	N/A	N/A
2402	46.39	AV	V	23.53	3.00	0.00	72.92	N/A	N/A
2390	25.64	PK	H	23.57	3.00	0.00	52.21	74.00	21.79
2390	13.52	AV	H	23.57	3.00	0.00	40.09	54.00	13.91
4804	33.54	PK	H	30.77	5.12	26.87	42.56	74.00	31.44
4804	21.19	AV	H	30.77	5.12	26.87	30.21	54.00	23.79
7206	34.33	PK	H	34.71	6.16	26.35	48.85	74.00	25.15
7206	22.43	AV	H	34.71	6.16	26.35	36.95	54.00	17.05
9608	33.2	PK	H	37.06	7.82	26.18	51.90	74.00	22.10
9608	21.08	AV	H	37.06	7.82	26.18	39.78	54.00	14.22
1345	39.43	PK	H	23.70	2.46	26.48	39.11	74.00	34.89
1345	27.58	AV	H	23.70	2.46	26.48	27.26	54.00	26.74
341.37	41.63	QP	V	14.86	1.16	27.73	29.92	46.00	16.08
396.66	43.99	QP	V	16.03	1.59	28.20	33.41	46.00	12.59
Middle Channel: 2441 MHz									
2441	74.75	PK	H	23.40	3.00	0.00	101.15	N/A	N/A
2441	54.1	AV	H	23.40	3.00	0.00	80.50	N/A	N/A
2441	64.24	PK	V	23.40	3.00	0.00	90.64	N/A	N/A
2441	45.41	AV	V	23.40	3.00	0.00	71.81	N/A	N/A
4882	33.79	PK	H	31.02	5.09	26.87	43.03	74.00	30.97
4882	21.35	AV	H	31.02	5.09	26.87	30.59	54.00	23.41
7323	32.86	PK	H	34.95	6.22	26.40	47.63	74.00	26.37
7323	20.42	AV	H	34.95	6.22	26.40	35.19	54.00	18.81
9764	33.26	PK	H	37.16	7.71	26.27	51.86	74.00	22.14
9764	21.77	AV	H	37.16	7.71	26.27	40.37	54.00	13.63
1150	39.85	PK	H	23.19	2.19	26.67	38.56	74.00	35.44
1150	26.98	AV	H	23.19	2.19	26.67	25.69	54.00	28.31
1405	39.66	PK	H	23.85	2.54	26.42	39.63	74.00	34.37
1405	27.35	AV	H	23.85	2.54	26.42	27.32	54.00	26.68
341.37	41.83	QP	V	14.86	1.16	27.73	30.12	46.00	15.88
396.66	43.71	QP	V	16.03	1.59	28.20	33.13	46.00	12.87
High Channel: 2480 MHz									
2480	71.89	PK	H	23.27	2.99	0.00	98.15	N/A	N/A
2480	53.91	AV	H	23.27	2.99	0.00	80.17	N/A	N/A
2480	62.93	PK	V	23.27	2.99	0.00	89.19	N/A	N/A
2480	43.99	AV	V	23.27	2.99	0.00	70.25	N/A	N/A
2483.5	27.66	PK	H	23.26	2.99	0.00	53.91	74.00	20.09
2483.5	13.69	AV	H	23.26	2.99	0.00	39.94	54.00	14.06
4960	34.59	PK	H	31.27	5.05	26.88	44.03	74.00	29.97
4960	21.88	AV	H	31.27	5.05	26.88	31.32	54.00	22.68
7440	33.47	PK	H	35.18	6.27	26.45	48.47	74.00	25.53
7440	21.53	AV	H	35.18	6.27	26.45	36.53	54.00	17.47
9920	32.26	PK	H	37.25	7.60	26.37	50.74	74.00	23.26
9920	20.15	AV	H	37.25	7.60	26.37	38.63	54.00	15.37
1345	41.83	PK	H	23.70	2.46	26.48	41.51	74.00	32.49
1345	29.42	AV	H	23.70	2.46	26.48	29.10	54.00	24.90
341.37	41.75	QP	V	14.86	1.16	27.73	30.04	46.00	15.96
396.66	43.63	QP	V	16.03	1.59	28.20	33.05	46.00	12.95

EDR Mode ( $\pi/4$ -DQPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	72.78	PK	H	23.53	3.00	0.00	99.31	N/A	N/A
2402	60.04	AV	H	23.53	3.00	0.00	86.57	N/A	N/A
2402	63.13	PK	V	23.53	3.00	0.00	89.66	N/A	N/A
2402	50.42	AV	V	23.53	3.00	0.00	76.95	N/A	N/A
2390	26.11	PK	H	23.57	3.00	0.00	52.68	74.00	21.32
2390	13.39	AV	H	23.57	3.00	0.00	39.96	54.00	14.04
4804	33.57	PK	H	30.77	5.12	26.87	42.59	74.00	31.41
4804	21.64	AV	H	30.77	5.12	26.87	30.66	54.00	23.34
7206	34.07	PK	H	34.71	6.16	26.35	48.59	74.00	25.41
7206	22.14	AV	H	34.71	6.16	26.35	36.66	54.00	17.34
9608	33.25	PK	H	37.06	7.82	26.18	51.95	74.00	22.05
9608	21.36	AV	H	37.06	7.82	26.18	40.06	54.00	13.94
1150	39.73	PK	H	23.19	2.19	26.67	38.44	74.00	35.56
1150	28.01	AV	H	23.19	2.19	26.67	26.72	54.00	27.28
341.37	40.88	QP	V	14.86	1.16	27.73	29.17	46.00	16.83
396.66	43.91	QP	V	16.03	1.59	28.20	33.33	46.00	12.67
Middle Channel: 2441 MHz									
2441	72.86	PK	H	23.40	3.00	0.00	99.26	N/A	N/A
2441	60.39	AV	H	23.40	3.00	0.00	86.79	N/A	N/A
2441	63.79	PK	V	23.40	3.00	0.00	90.19	N/A	N/A
2441	51.42	AV	V	23.40	3.00	0.00	77.82	N/A	N/A
4882	33.57	PK	H	31.02	5.09	26.87	42.81	74.00	31.19
4882	21.96	AV	H	31.02	5.09	26.87	31.20	54.00	22.80
7323	34.01	PK	H	34.95	6.22	26.40	48.78	74.00	25.22
7323	22.34	AV	H	34.95	6.22	26.40	37.11	54.00	16.89
9764	33.58	PK	H	37.16	7.71	26.27	52.18	74.00	21.82
9764	21.33	AV	H	37.16	7.71	26.27	39.93	54.00	14.07
1345	40.19	PK	H	23.70	2.46	26.48	39.87	74.00	34.13
1345	28.42	AV	H	23.70	2.46	26.48	28.10	54.00	25.90
1150	40.55	PK	H	23.19	2.19	26.67	39.26	74.00	34.74
1150	27.94	AV	H	23.19	2.19	26.67	26.65	54.00	27.35
341.37	40.8	QP	V	14.86	1.16	27.73	29.09	46.00	16.91
396.66	43.64	QP	V	16.03	1.59	28.20	33.06	46.00	12.94
High Channel: 2480 MHz									
2480	70.9	PK	H	23.27	2.99	0.00	97.16	N/A	N/A
2480	58.84	AV	H	23.27	2.99	0.00	85.10	N/A	N/A
2480	62.28	PK	V	23.27	2.99	0.00	88.54	N/A	N/A
2480	49.97	AV	V	23.27	2.99	0.00	76.23	N/A	N/A
2483.5	26.9	PK	H	23.26	2.99	26.89	26.26	74.00	47.74
2483.5	14.23	AV	H	23.26	2.99	26.89	13.59	54.00	40.41
4960	34.26	PK	H	31.27	5.05	26.88	43.70	74.00	30.30
4960	22.49	AV	H	31.27	5.05	26.88	31.93	54.00	22.07
7440	33.73	PK	H	35.18	6.27	26.45	48.73	74.00	25.27
7440	21.18	AV	H	35.18	6.27	26.45	36.18	54.00	17.82
9920	33.67	PK	H	37.25	7.60	26.37	52.15	74.00	21.85
9920	21.31	AV	H	37.25	7.60	26.37	39.79	54.00	14.21
1345	40.04	PK	H	23.70	2.46	26.48	39.72	74.00	34.28
1345	28.35	AV	H	23.70	2.46	26.48	28.03	54.00	25.97
341.37	40.87	QP	V	14.86	1.16	27.73	29.16	46.00	16.84
396.66	43.39	QP	V	16.03	1.59	28.20	32.81	46.00	13.19

EDR Mode (8-DPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	73.02	PK	H	23.53	3.00	0.00	99.55	N/A	N/A
2402	58.91	AV	H	23.53	3.00	0.00	85.44	N/A	N/A
2402	63.65	PK	V	23.53	3.00	0.00	90.18	N/A	N/A
2402	50.57	AV	V	23.53	3.00	0.00	77.10	N/A	N/A
2390	26.14	PK	H	23.57	3.00	0.00	52.71	74.00	21.29
2390	13.4	AV	H	23.57	3.00	0.00	39.97	54.00	14.03
4804	34.06	PK	H	30.77	5.12	26.87	43.08	74.00	30.92
4804	22.72	AV	H	30.77	5.12	26.87	31.74	54.00	22.26
7206	33.84	PK	H	34.71	6.16	26.35	48.36	74.00	25.64
7206	21.35	AV	H	34.71	6.16	26.35	35.87	54.00	18.13
9608	33.12	PK	H	37.06	7.82	26.18	51.82	74.00	22.18
9608	21.93	AV	H	37.06	7.82	26.18	40.63	54.00	13.37
1150	40.57	PK	H	23.19	2.19	26.67	39.28	74.00	34.72
1150	28.61	AV	H	23.19	2.19	26.67	27.32	54.00	26.68
341.37	41.29	QP	V	14.86	1.16	27.73	29.58	46.00	16.42
396.66	43.72	QP	V	16.03	1.59	28.20	33.14	46.00	12.86
Middle Channel: 2441 MHz									
2441	73.15	PK	H	23.40	3.00	0.00	99.55	N/A	N/A
2441	59.41	AV	H	23.40	3.00	0.00	85.81	N/A	N/A
2441	63.81	PK	V	23.40	3.00	0.00	90.21	N/A	N/A
2441	51.27	AV	V	23.40	3.00	0.00	77.67	N/A	N/A
4882	34.16	PK	H	31.02	5.09	26.87	43.40	74.00	30.60
4882	22.73	AV	H	31.02	5.09	26.87	31.97	54.00	22.03
7323	33.27	PK	H	34.95	6.22	26.40	48.04	74.00	25.96
7323	21.38	AV	H	34.95	6.22	26.40	36.15	54.00	17.85
9764	33.05	PK	H	37.16	7.71	26.27	51.65	74.00	22.35
9764	21.61	AV	H	37.16	7.71	26.27	40.21	54.00	13.79
1345	39.86	PK	H	23.70	2.46	26.48	39.54	74.00	34.46
1345	28.03	AV	H	23.70	2.46	26.48	27.71	54.00	26.29
1150	41.27	PK	H	23.19	2.19	26.67	39.98	74.00	34.02
1150	28.83	AV	H	23.19	2.19	26.67	27.54	54.00	26.46
341.37	41.49	QP	V	14.86	1.16	27.73	29.78	46.00	16.22
396.66	43.44	QP	V	16.03	1.59	28.20	32.86	46.00	13.14
High Channel: 2480 MHz									
2480	71.16	PK	H	23.27	2.99	0.00	97.42	N/A	N/A
2480	58.81	AV	H	23.27	2.99	0.00	85.07	N/A	N/A
2480	62.42	PK	V	23.27	2.99	0.00	88.68	N/A	N/A
2480	50.01	AV	V	23.27	2.99	0.00	76.27	N/A	N/A
2483.5	26.51	PK	H	23.26	2.99	0.00	52.76	74.00	21.24
2483.5	14.02	AV	H	23.26	2.99	0.00	40.27	54.00	13.73
4960	33.79	PK	H	31.27	5.05	26.88	43.23	74.00	30.77
4960	21.28	AV	H	31.27	5.05	26.88	30.72	54.00	23.28
7440	32.62	PK	H	35.18	6.27	26.45	47.62	74.00	26.38
7440	20.84	AV	H	35.18	6.27	26.45	35.84	54.00	18.16
9920	32.41	PK	H	37.25	7.60	26.37	50.89	74.00	23.11
9920	20.93	AV	H	37.25	7.60	26.37	39.41	54.00	14.59
1345	41.23	PK	H	23.70	2.46	26.48	40.91	74.00	33.09
1345	29.71	AV	H	23.70	2.46	26.48	29.39	54.00	24.61
341.37	41.41	QP	V	14.86	1.16	27.73	29.70	46.00	16.30
396.66	43.36	QP	V	16.03	1.59	28.20	32.78	46.00	13.22



## **FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**

### **Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Procedure**

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	38%
<b>ATM Pressure:</b>	100.9kPa

\* The testing was performed by Kevin Hu on 2017-01-12.

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency	Channel Separation	Limit
		MHz	MHz	MHz
BDR (GFSK)	Low	2402	1.002	0.63
	Middle	2441	0.998	0.63
	High	2480	1.002	0.63
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.002	0.87
	Middle	2441	1.002	0.87
	High	2480	1.002	0.89
EDR (8DPSK)	Low	2402	0.998	0.85
	Middle	2441	1.002	0.85
	High	2480	1.002	0.85

Note: Limit= (2/3)× 20dB bandwidth


BDR Mode (GFSK):

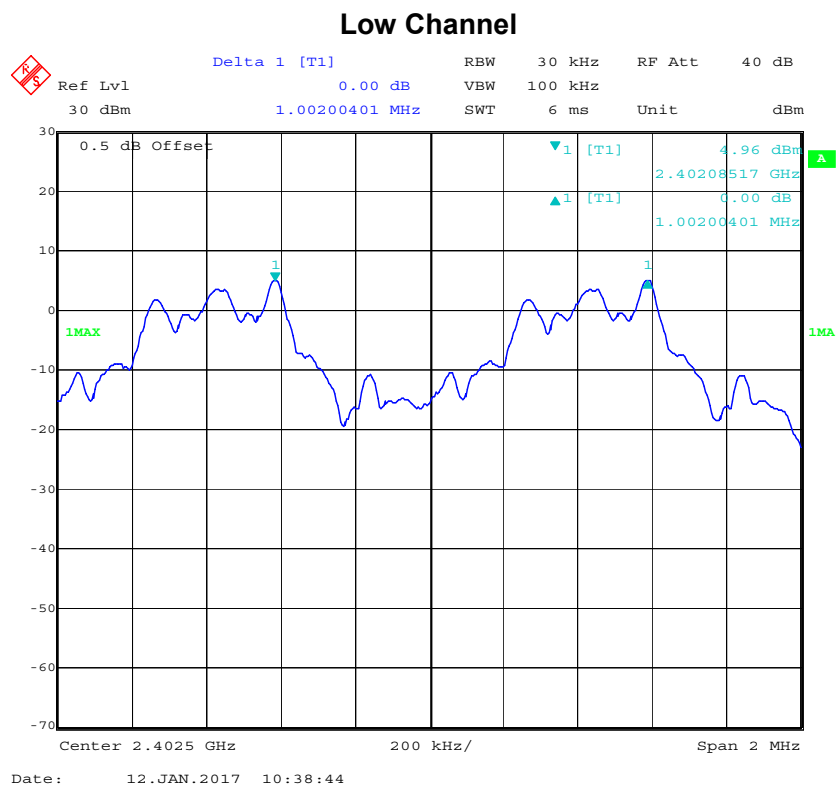




EDR Mode ( $\pi/4$ -DQPSK):


Low Channel

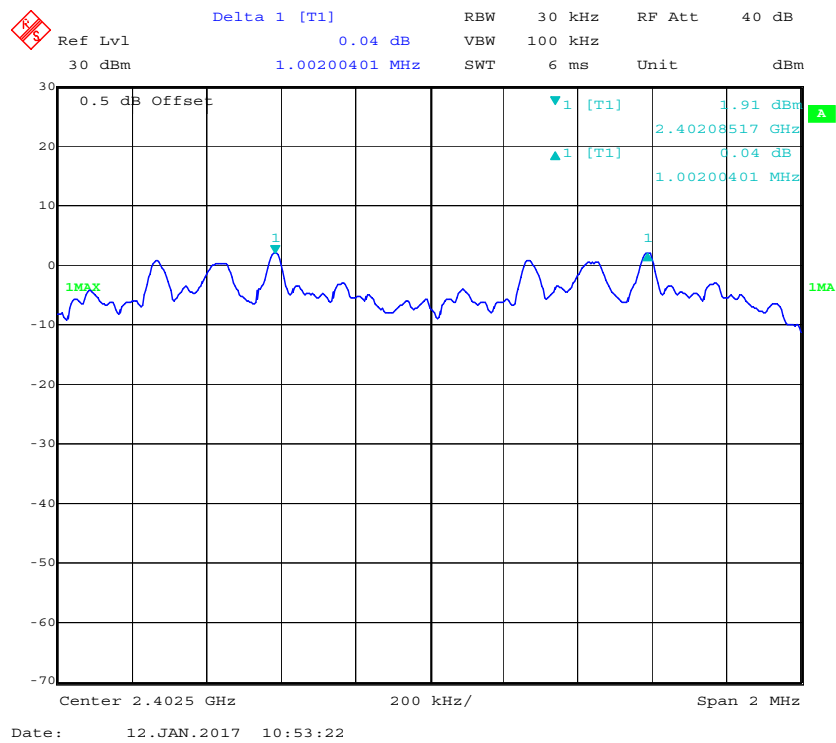

Middle Channel

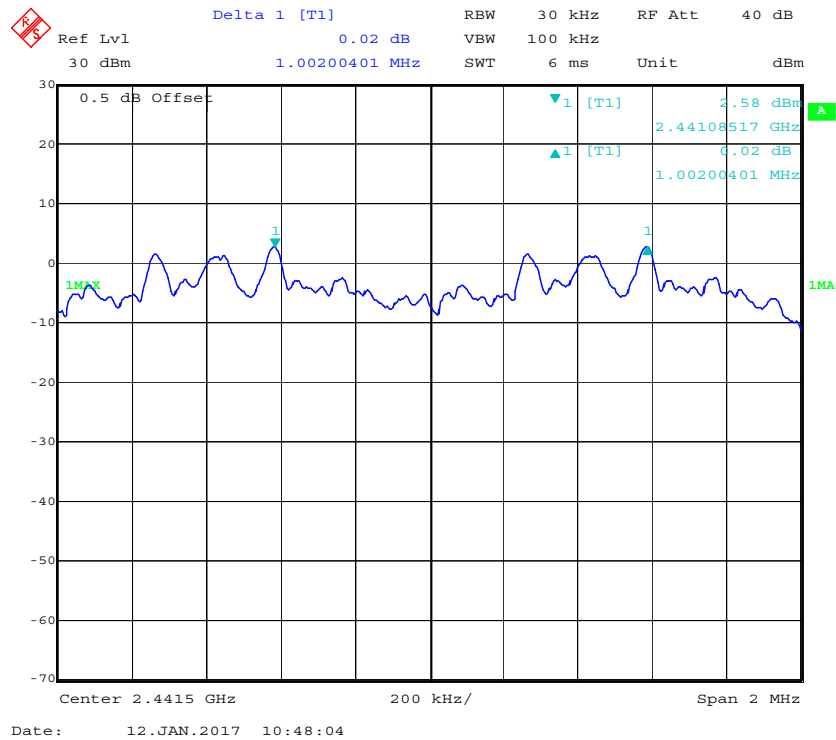


### High Channel

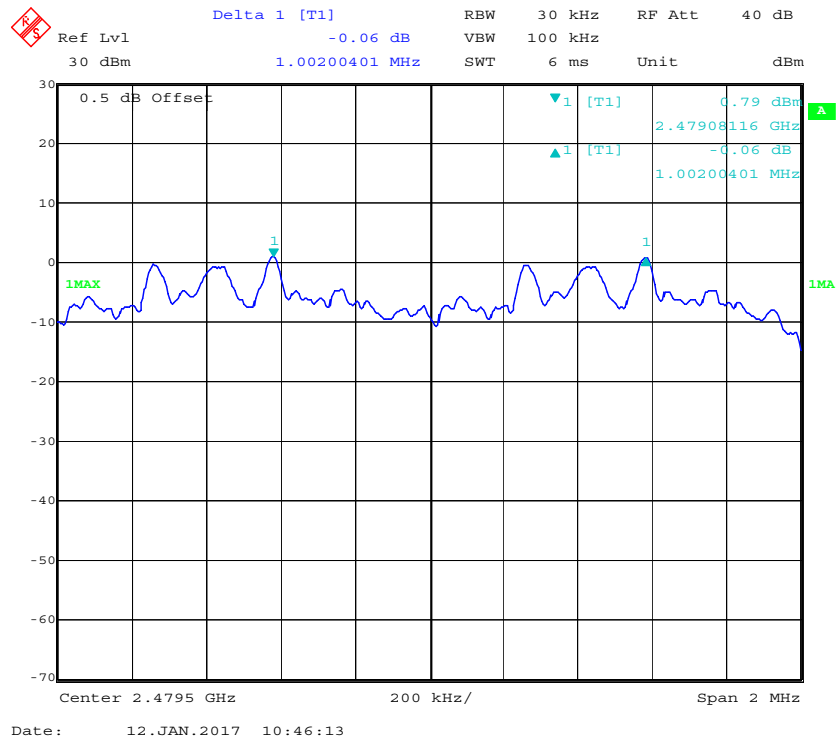


EDR Mode (8-DPSK):


### Low Channel

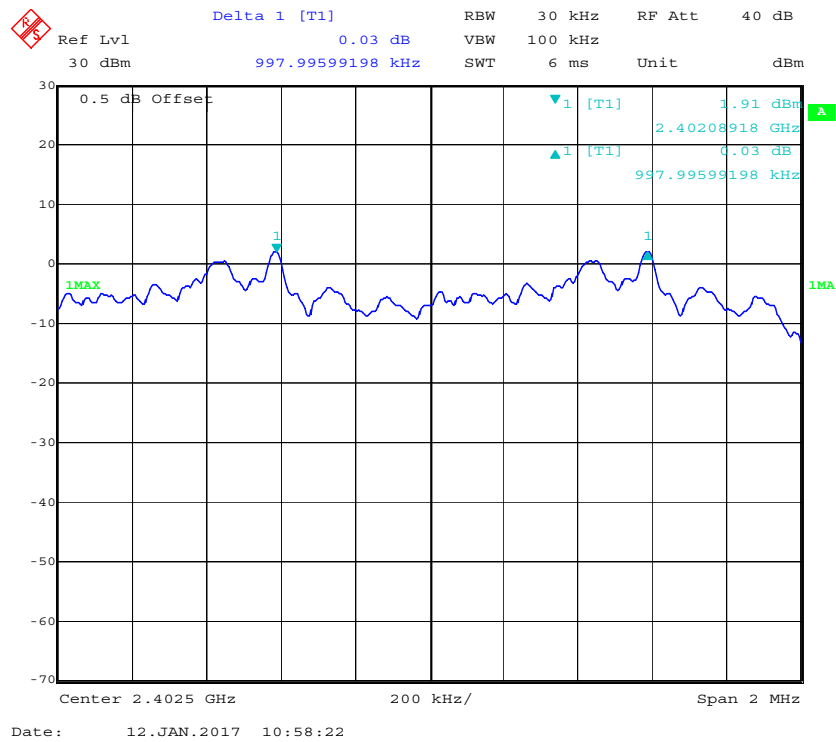

### Middle Channel

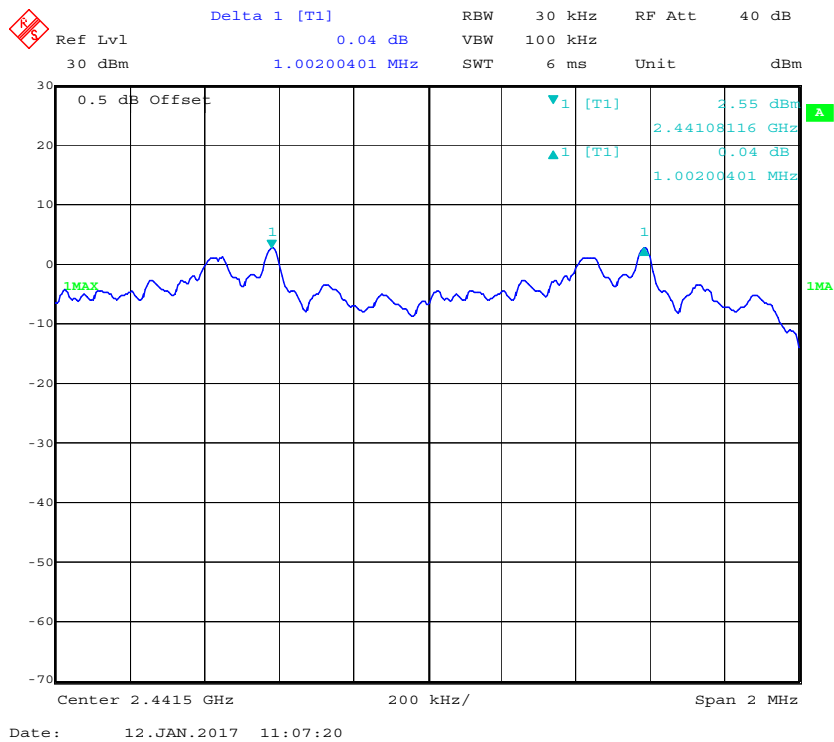

### High Channel

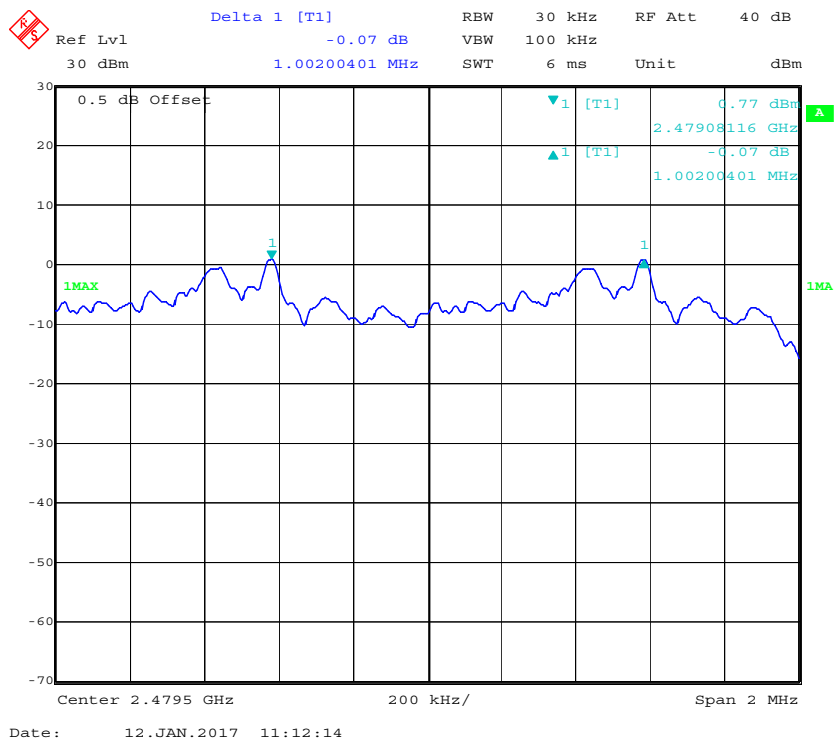

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	38%
ATM Pressure:	100.9 kPa


\* The testing was performed by Kevin Hu on 2017-01-12.

**Test Result:** Compliance.

Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.94
	Middle	2441	0.95
	High	2480	0.95
EDR Mode ( $\pi/4$ -DQPSK)	Low	2402	1.31
	Middle	2441	1.31
	High	2480	1.33
EDR Mode (8-DPSK)	Low	2402	1.27
	Middle	2441	1.27
	High	2480	1.27

## Low Channel

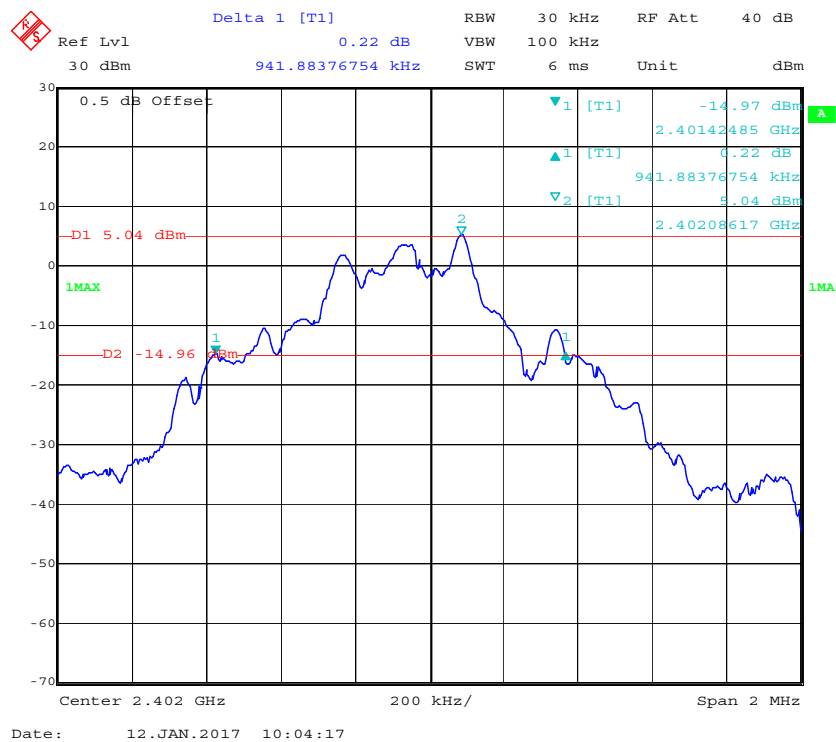




### Middle Channel

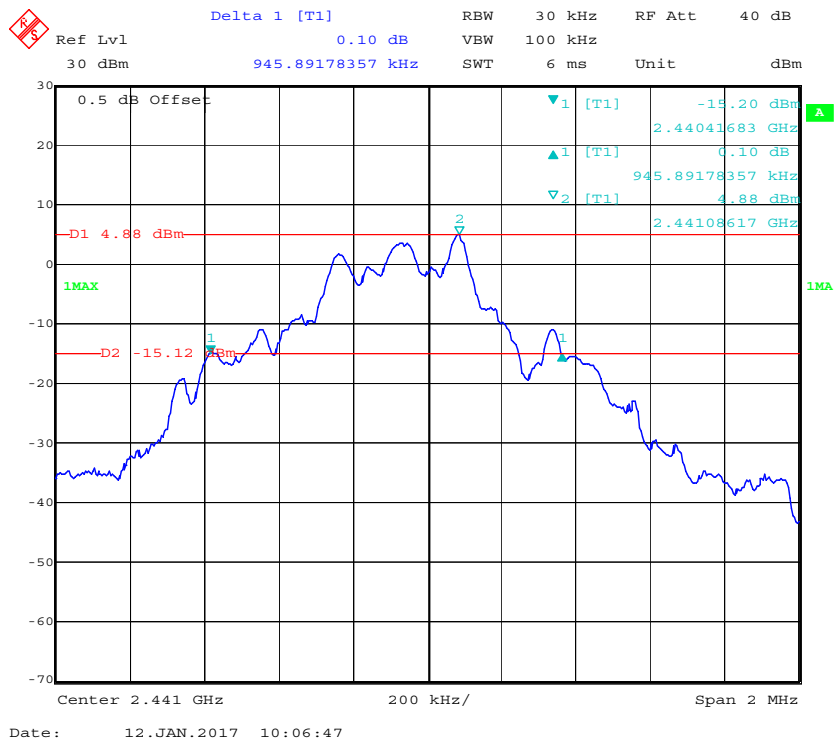


### High Channel

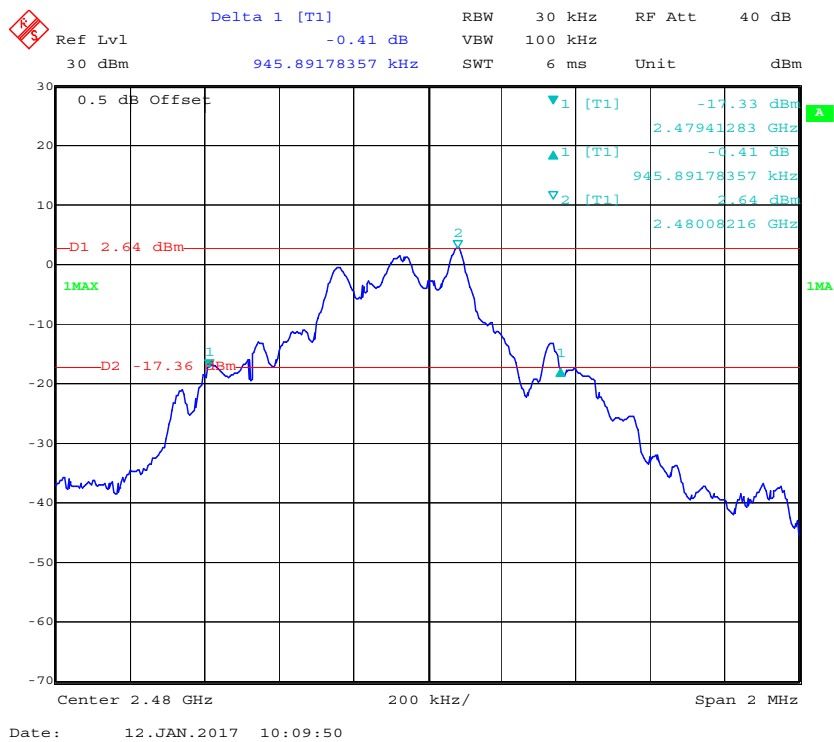


EDR Mode ( $\pi/4$ -DQPSK):


### Low Channel

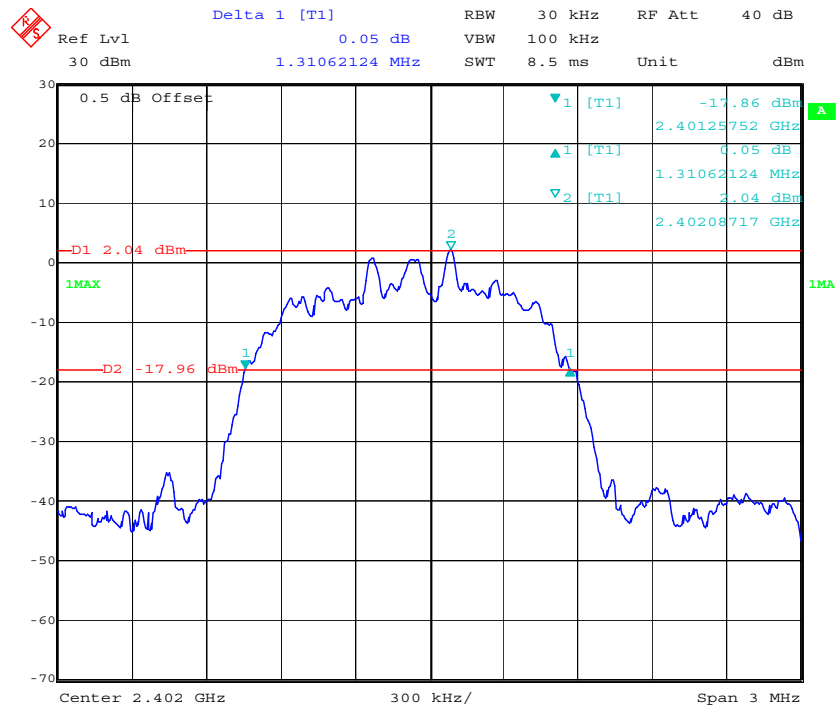

### Middle Channel

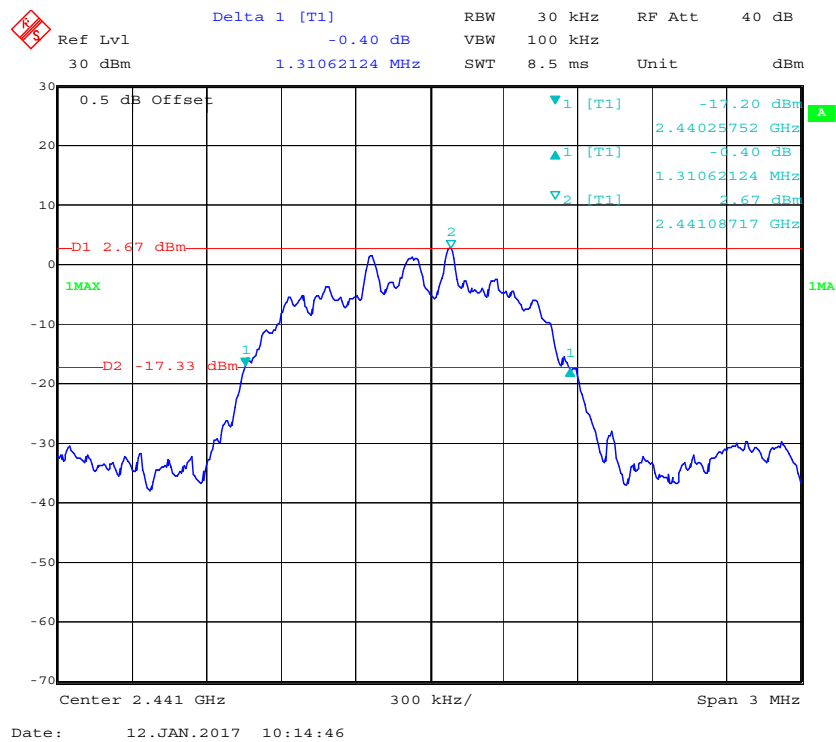


### High Channel

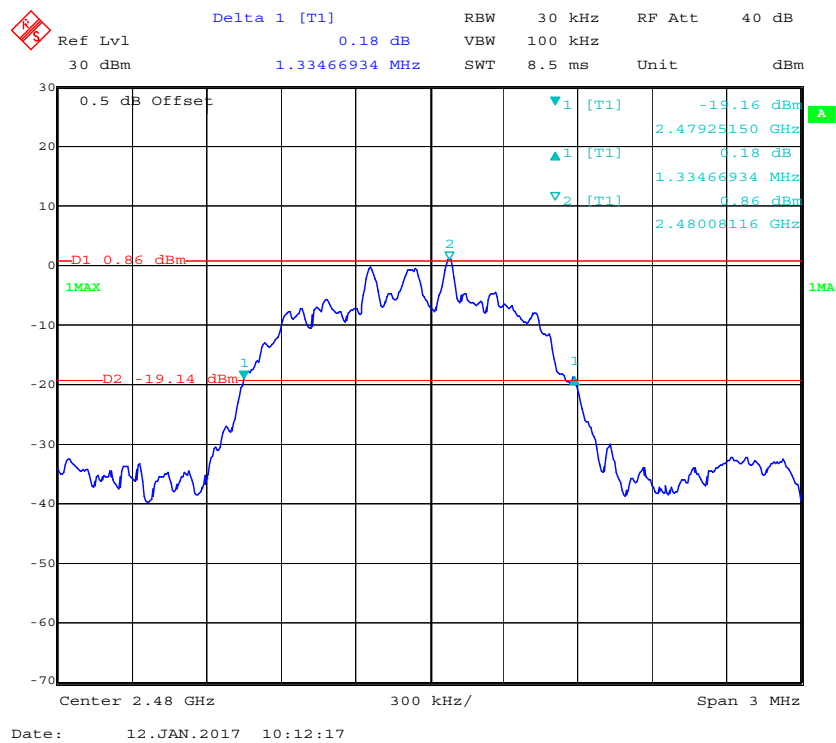


EDR Mode (8-DPSK):


### Low Channel

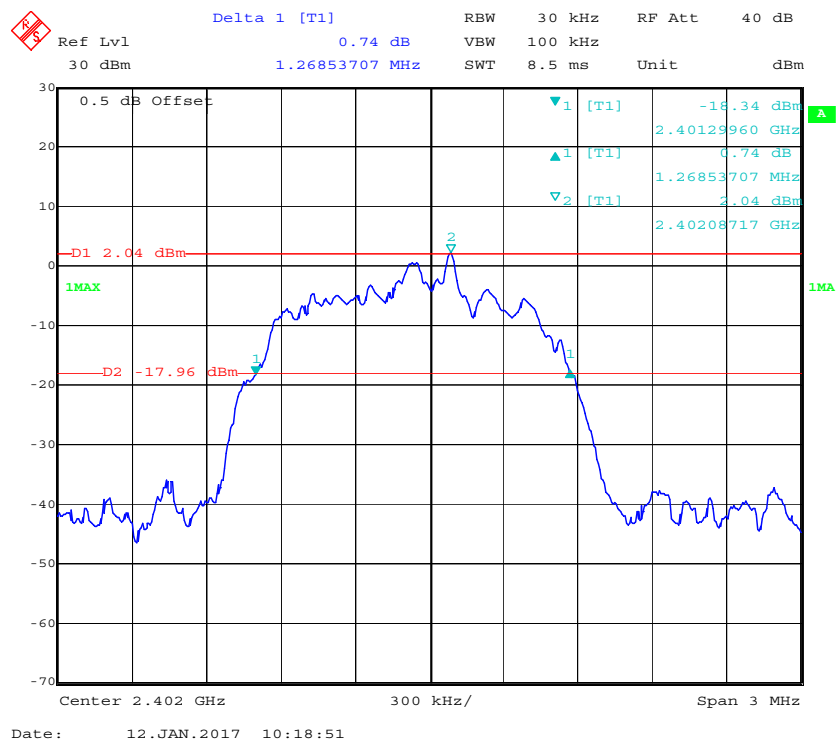

### Middle Channel

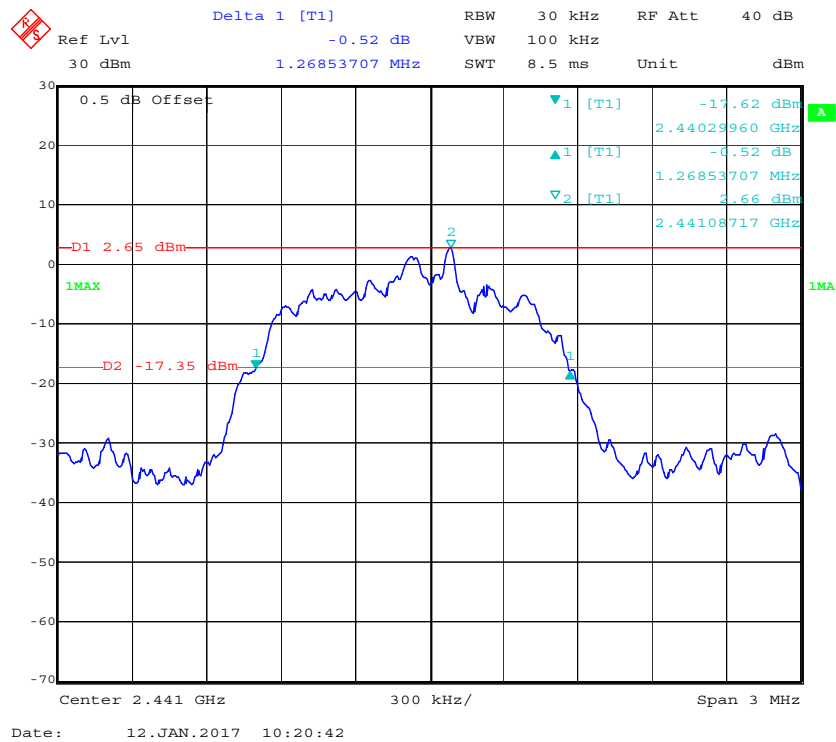

### High Channel

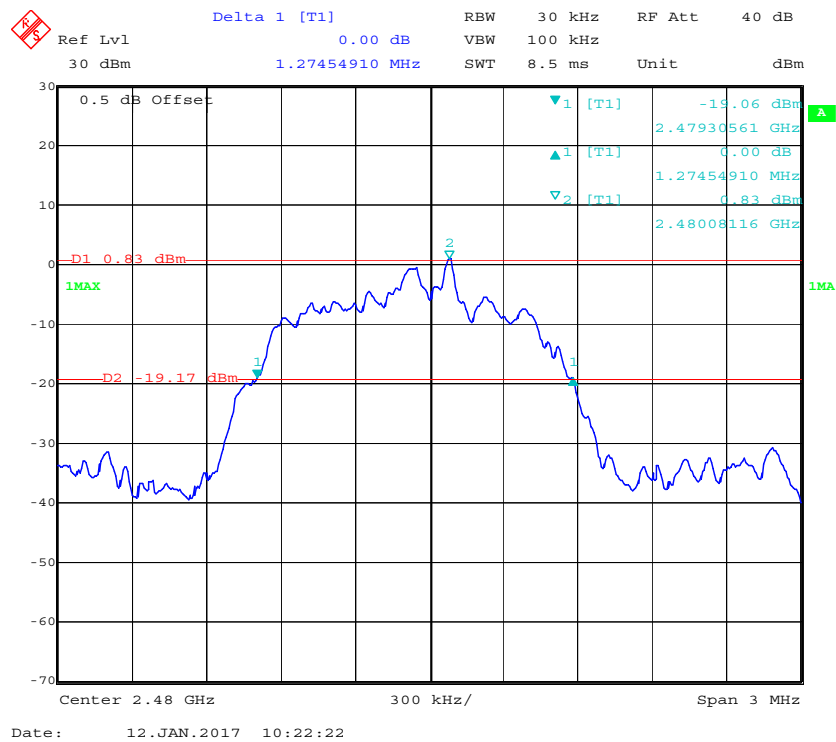

## **FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	38%
<b>ATM Pressure:</b>	100.9kPa

\* The testing was performed by Kevin Hu on 2017-01-12.

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### Number of Hopping Channels

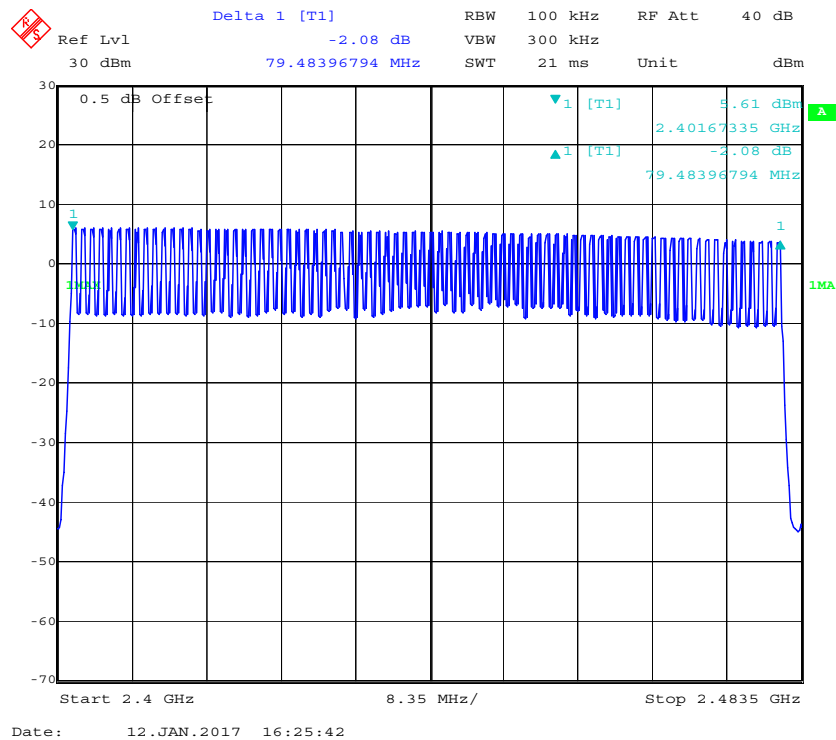


EDR Mode ( $\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	$\geq 15$

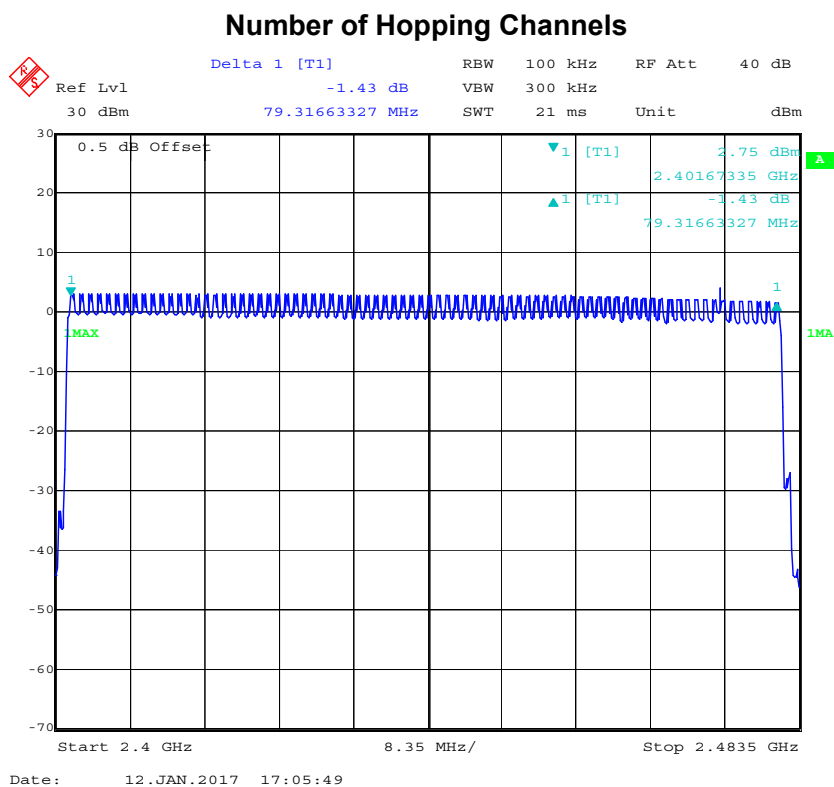

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

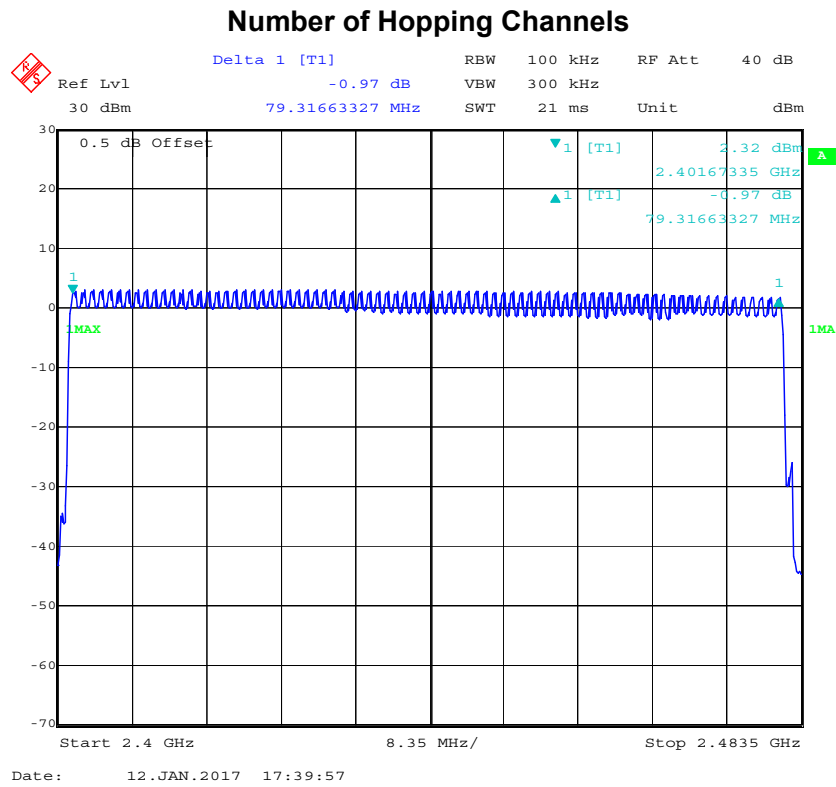



## **FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	38%
<b>ATM Pressure:</b>	100..9kPa

\* The testing was performed by Kevin Hu on 2017-01-12.

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.186	0.060	0.4	Compliance
	Middle	0.184	0.059	0.4	Compliance
	High	0.186	0.060	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.695	0.271	0.4	Compliance
	Middle	1.695	0.271	0.4	Compliance
	High	1.696	0.271	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.95	0.315	0.4	Compliance
	Middle	2.95	0.315	0.4	Compliance
	High	2.95	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


### DH1: Low Channel

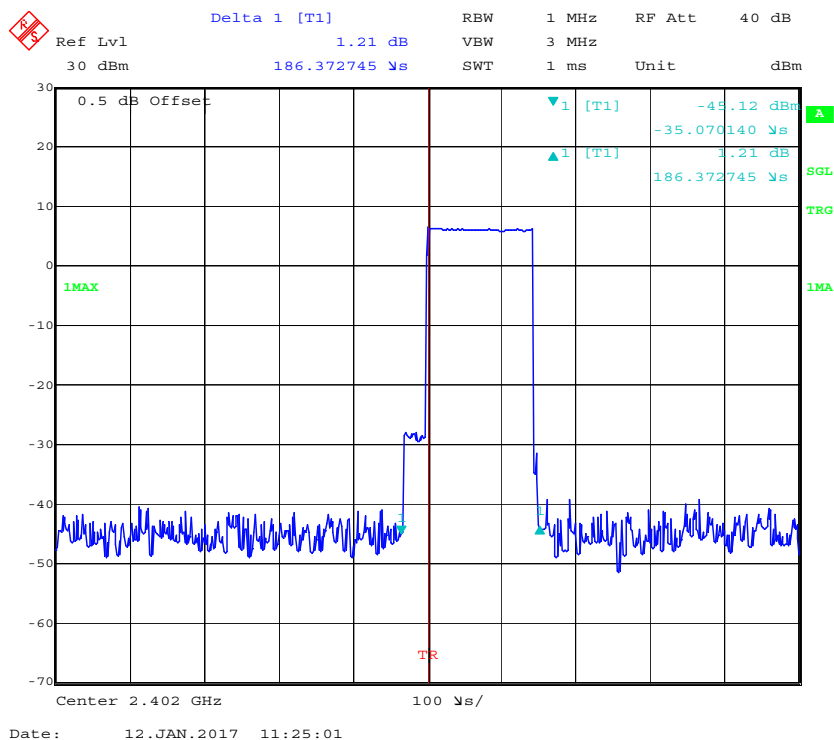


### DH1: Middle Channel

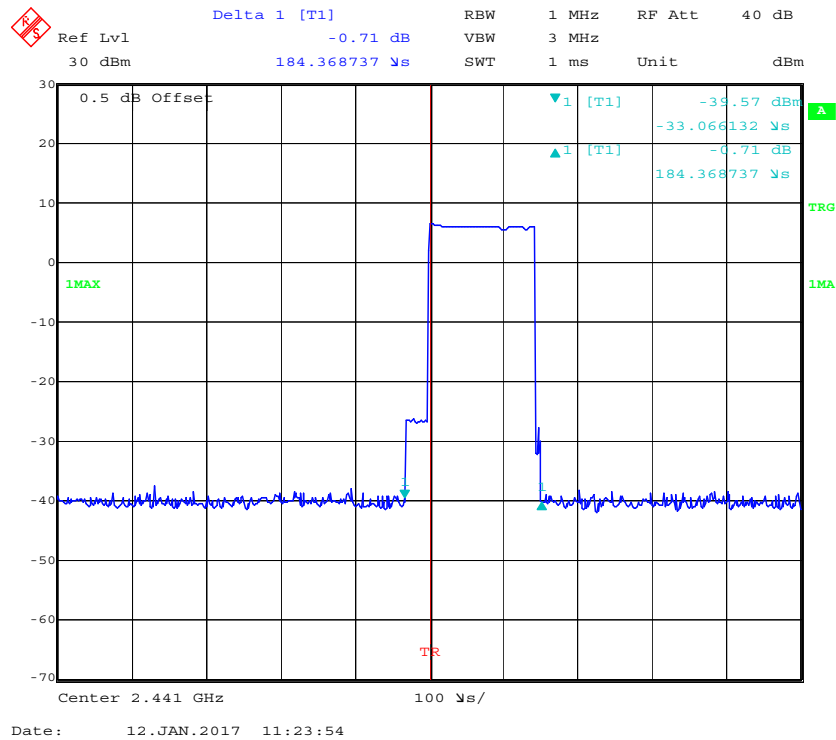


### DH1: High Channel

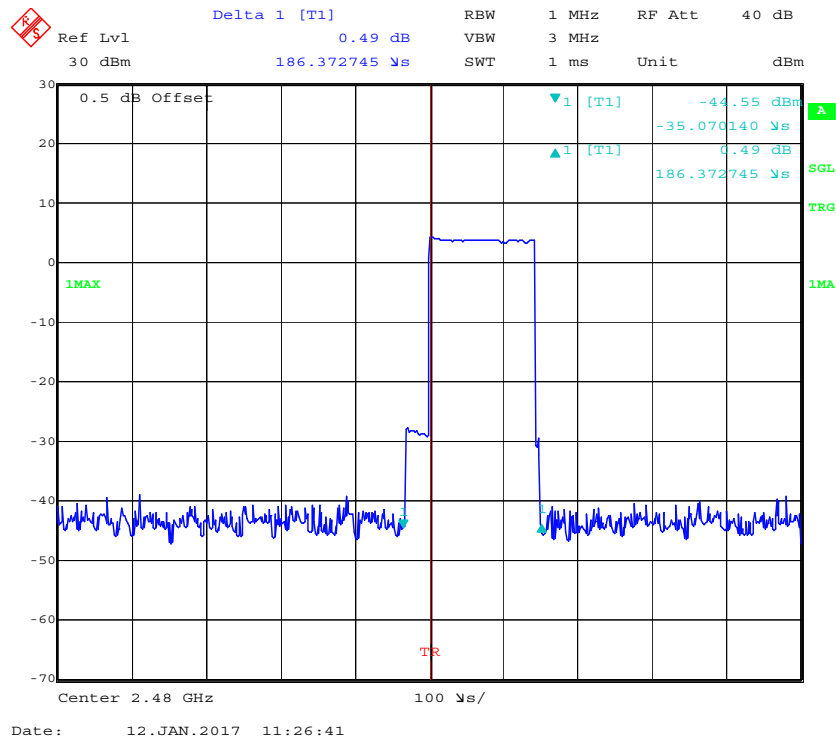


### DH3: Low Channel

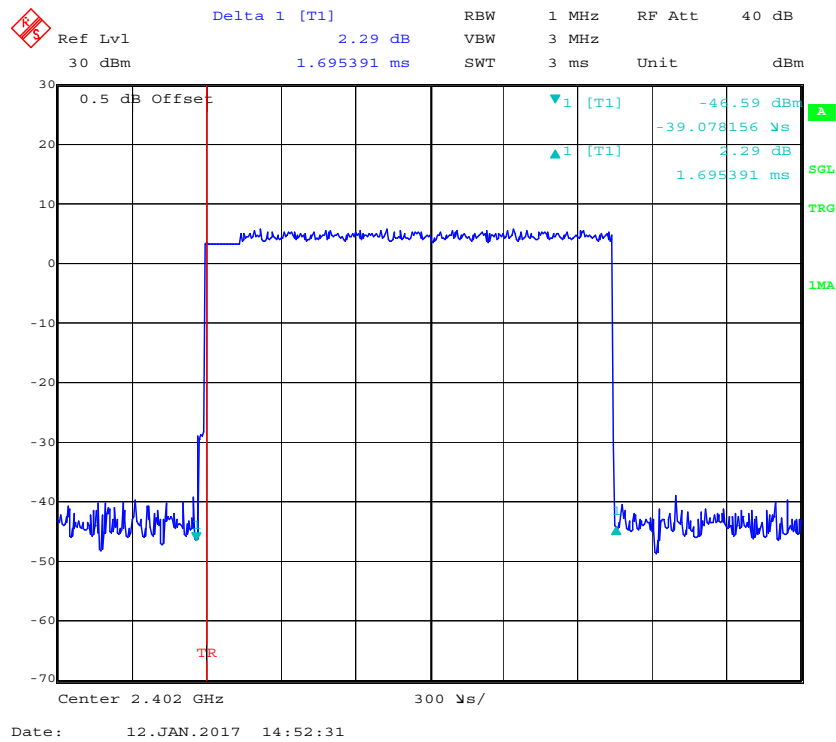


### DH3: Middle Channel

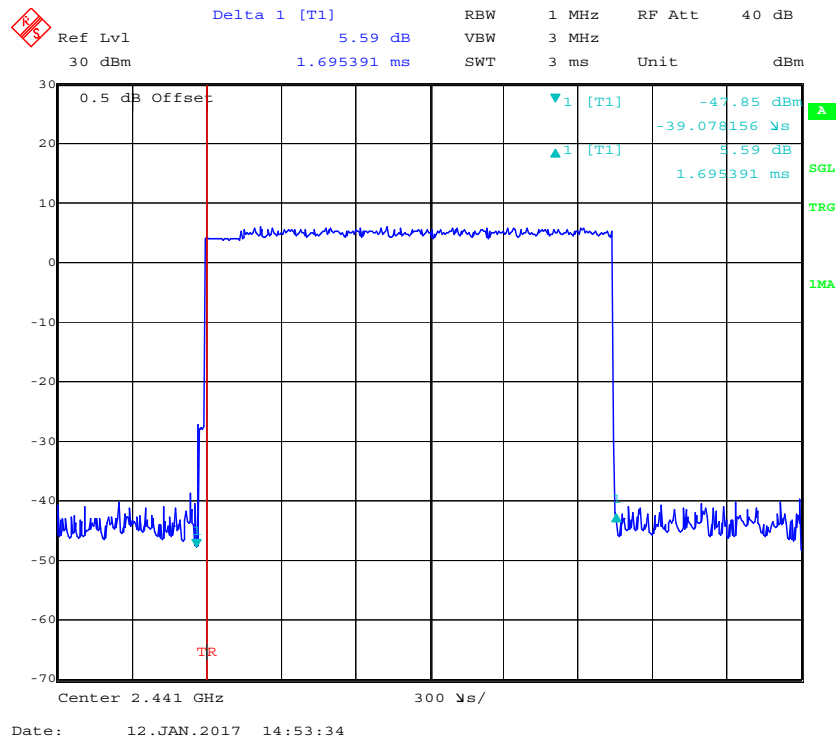


### DH3: High Channel

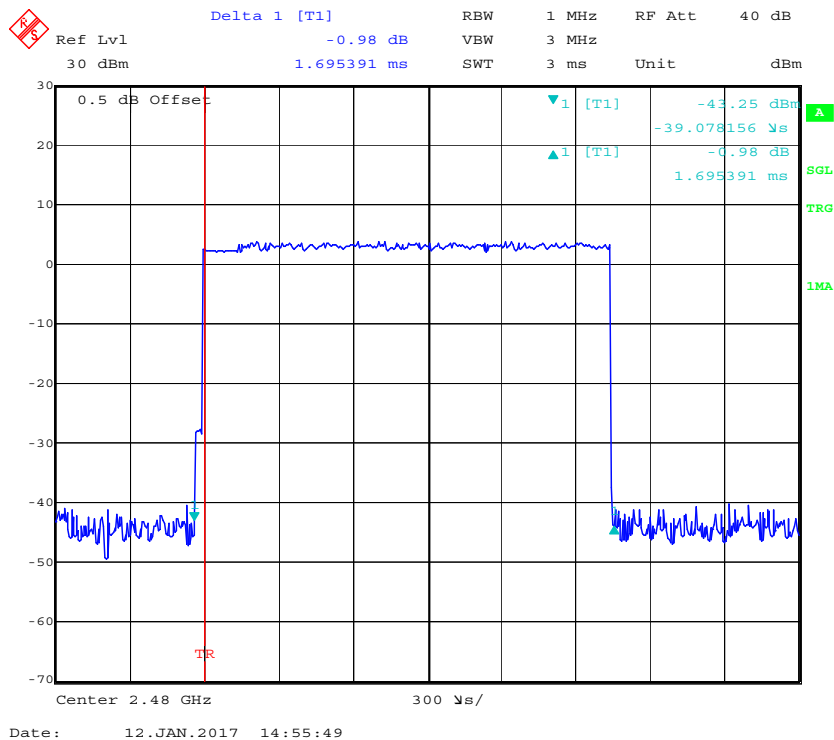


### DH5: Low Channel

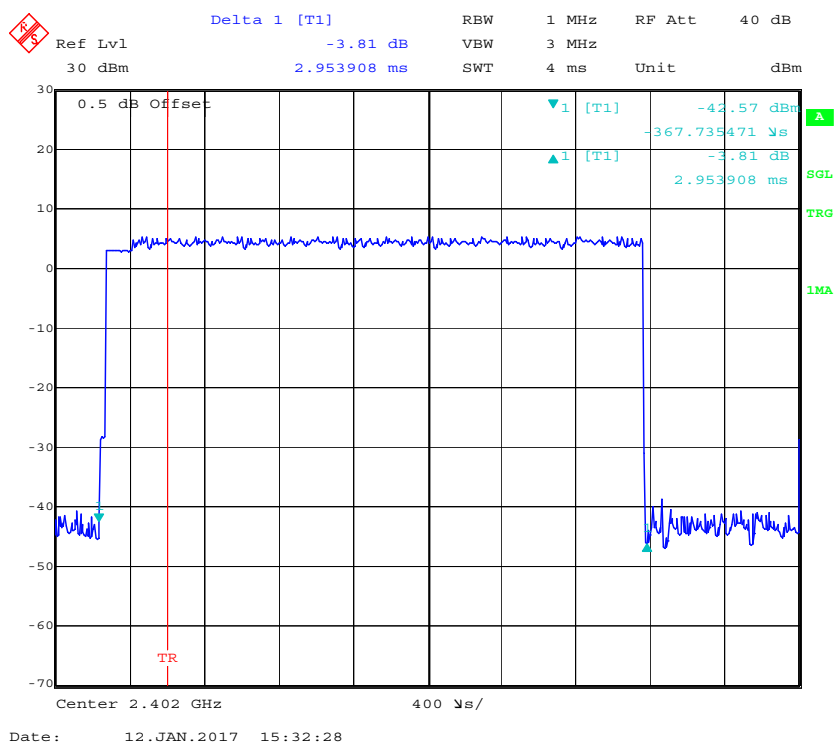

### DH5: Middle Channel

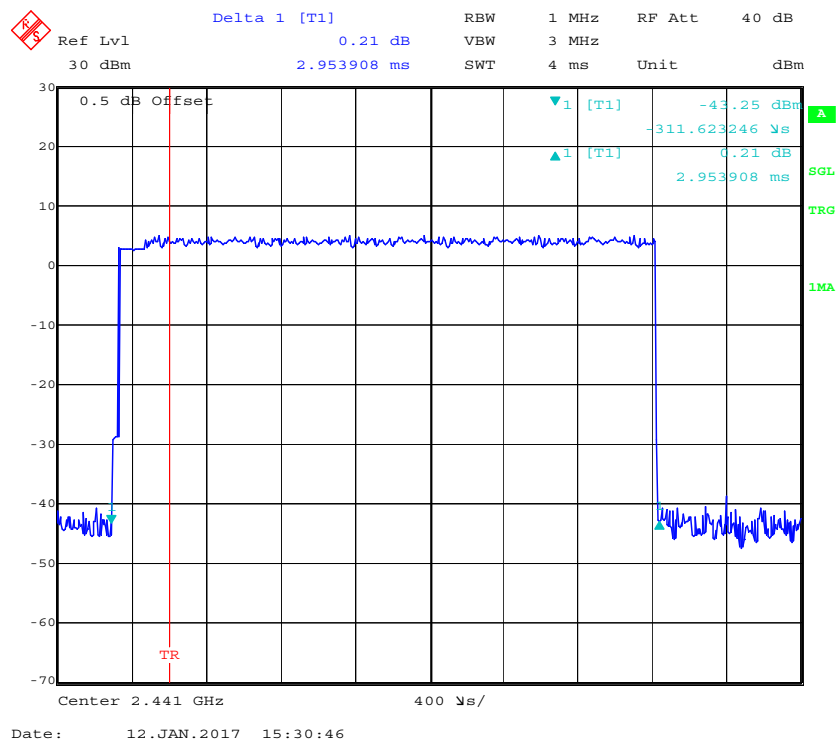


### DH5: High Channel

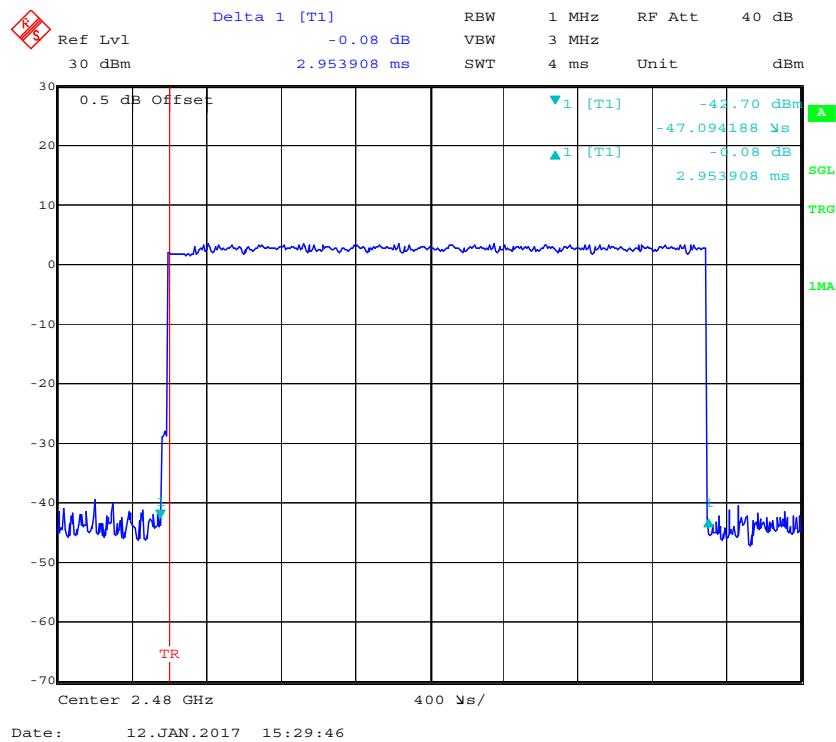


EDR Mode ( $\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.433	0.139	0.4	Compliance
	Middle	0.435	0.139	0.4	Compliance
	High	0.435	0.139	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.69	0.270	0.4	Compliance
	Middle	1.69	0.270	0.4	Compliance
	High	1.69	0.270	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.56	0.273	0.4	Compliance
	Middle	2.95	0.315	0.4	Compliance
	High	2.95	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				


2DH1: Low Channel

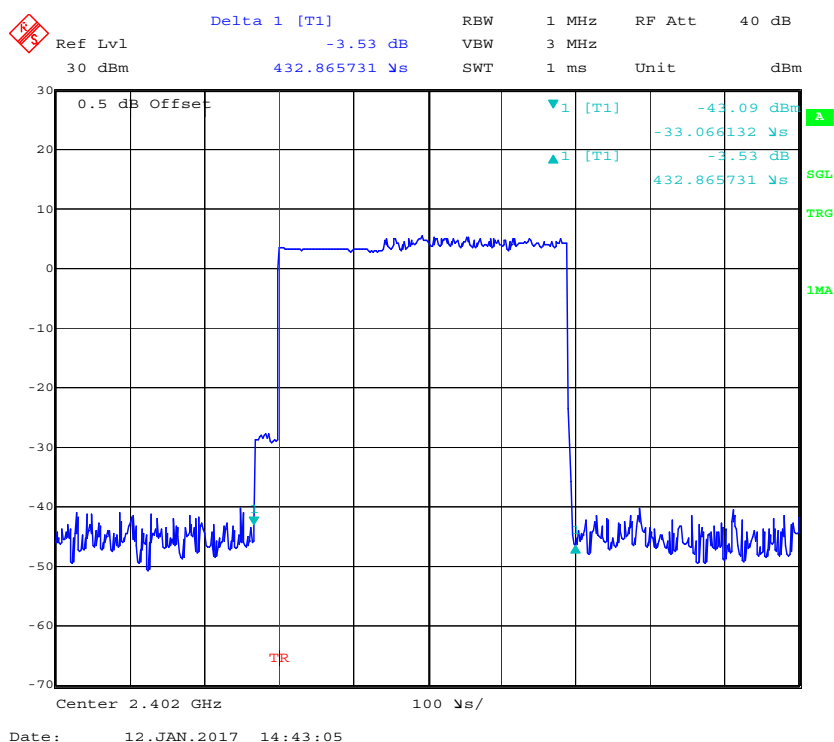

### 2DH1: Middle Channel

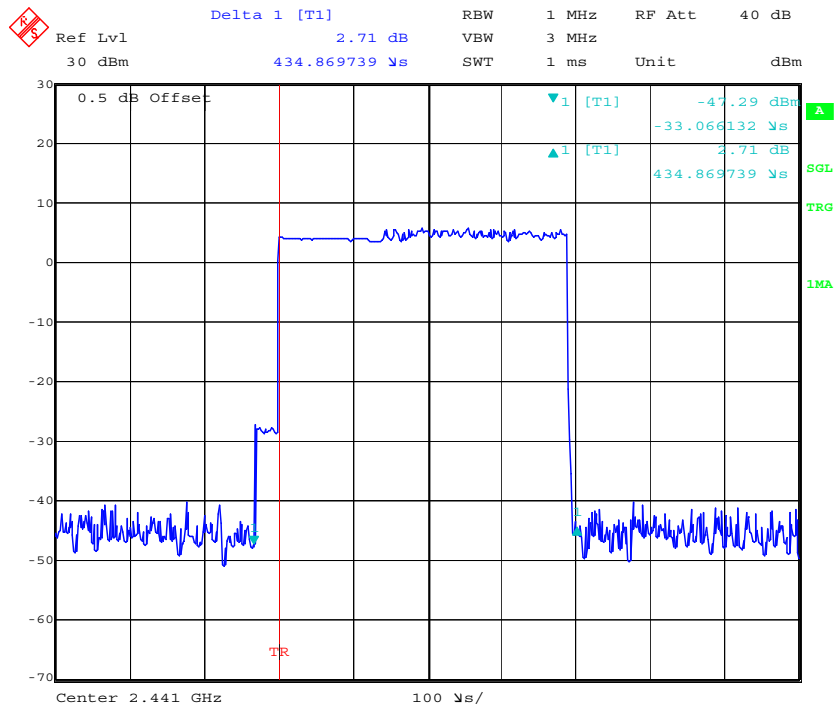


### 2DH1: High Channel

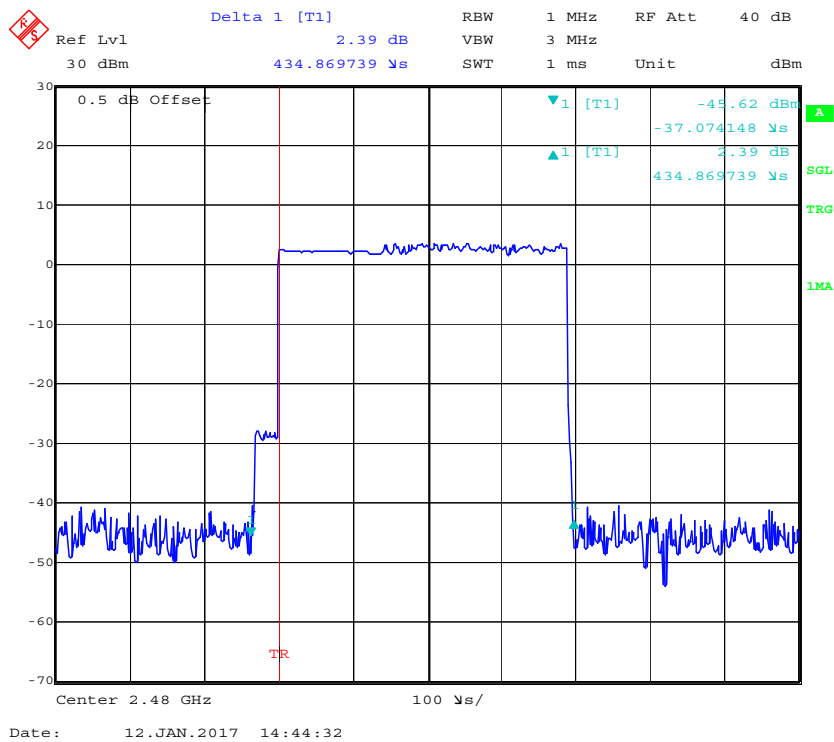





### 2DH3: Low Channel

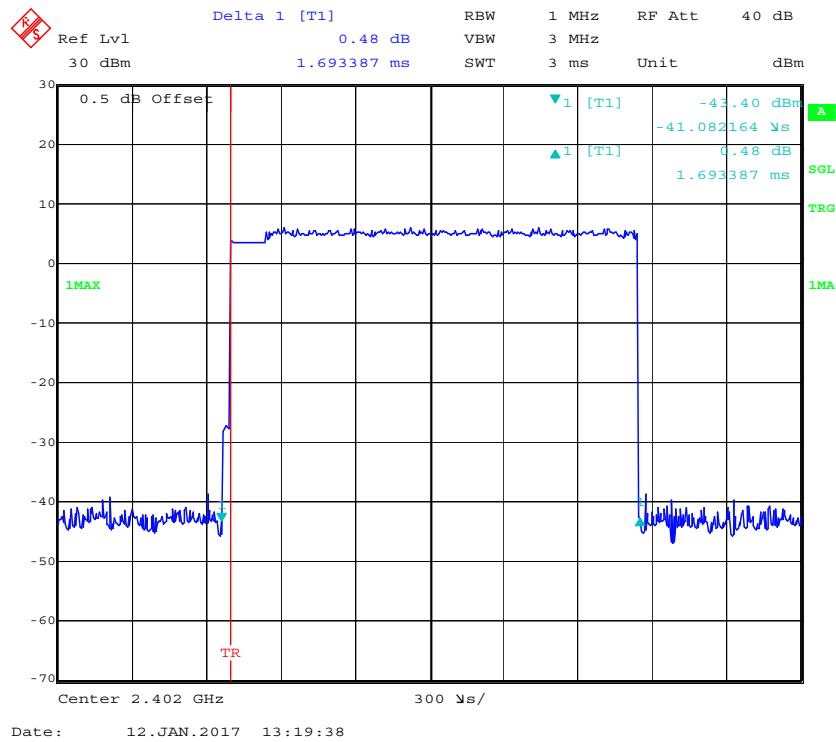


### 2DH3: Middle Channel

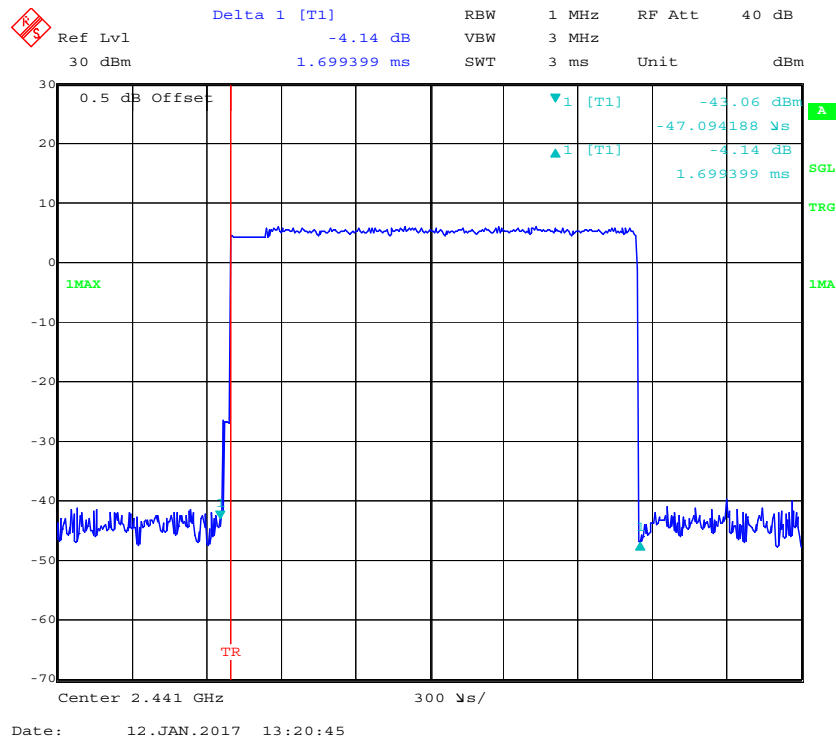


### 2DH3: High Channel

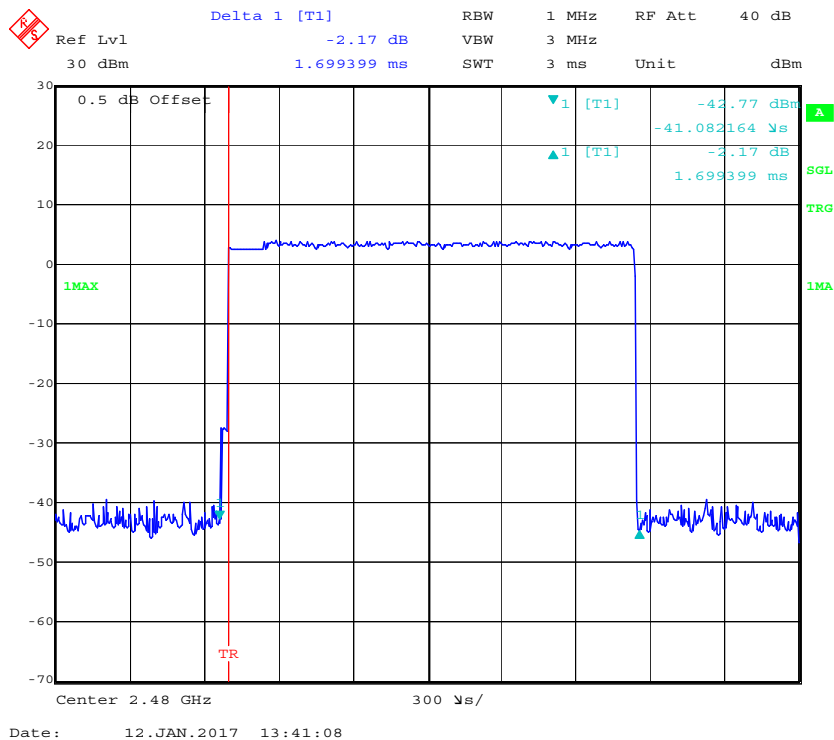


### 2DH5: Low Channel

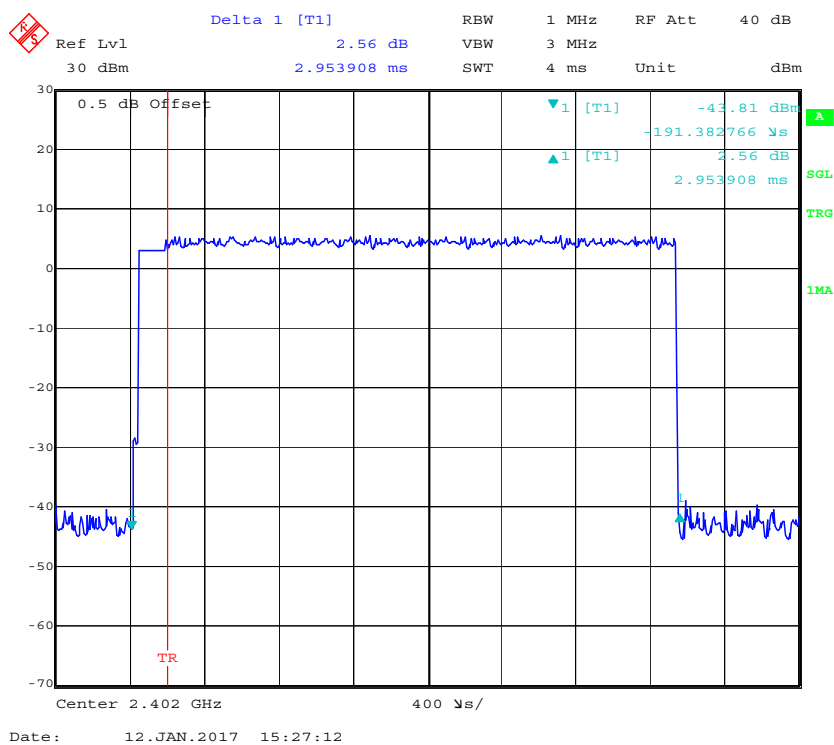

## 2DH5: Middle Channel

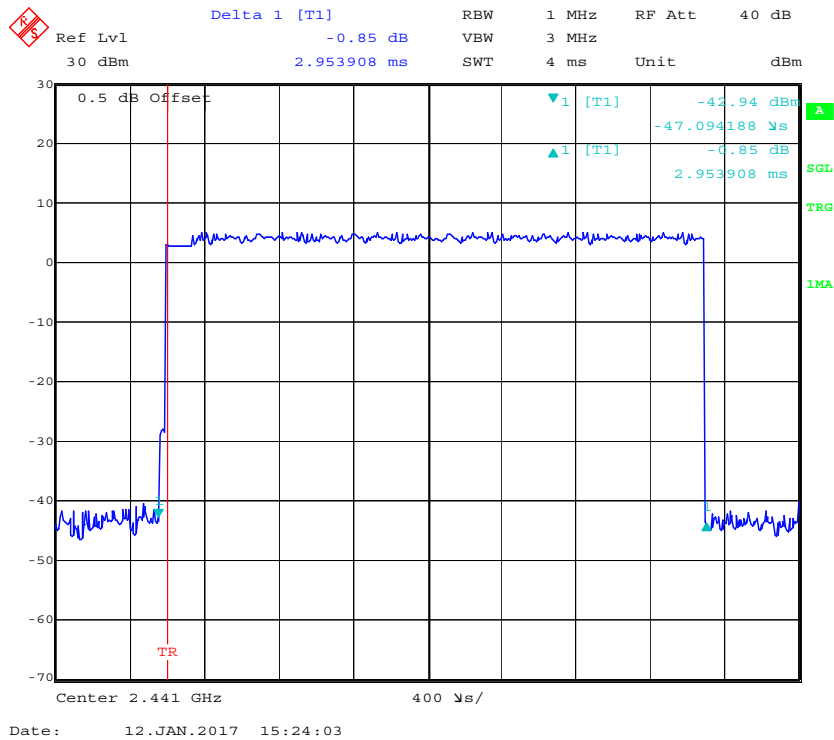


## 2DH5: High Channel

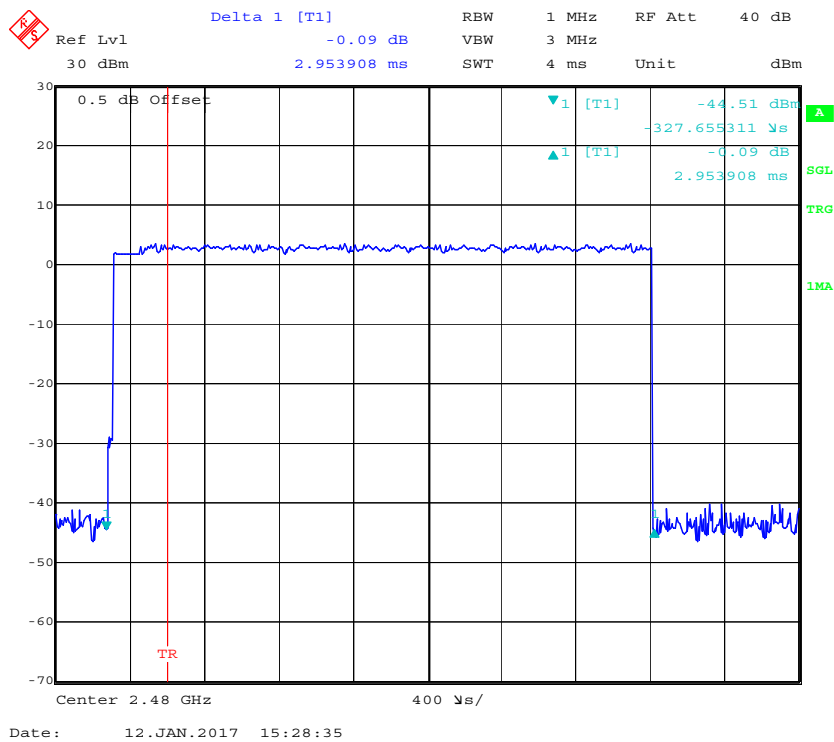


EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.433	0.139	0.4	Compliance
	Middle	0.435	0.139	0.4	Compliance
	High	0.433	0.139	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
3DH3	Low	1.69	0.270	0.4	Compliance
	Middle	1.69	0.270	0.4	Compliance
	High	1.69	0.270	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
3DH5	Low	2.96	0.316	0.4	Compliance
	Middle	2.94	0.314	0.4	Compliance
	High	2.96	0.316	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


3DH1: Low Channel

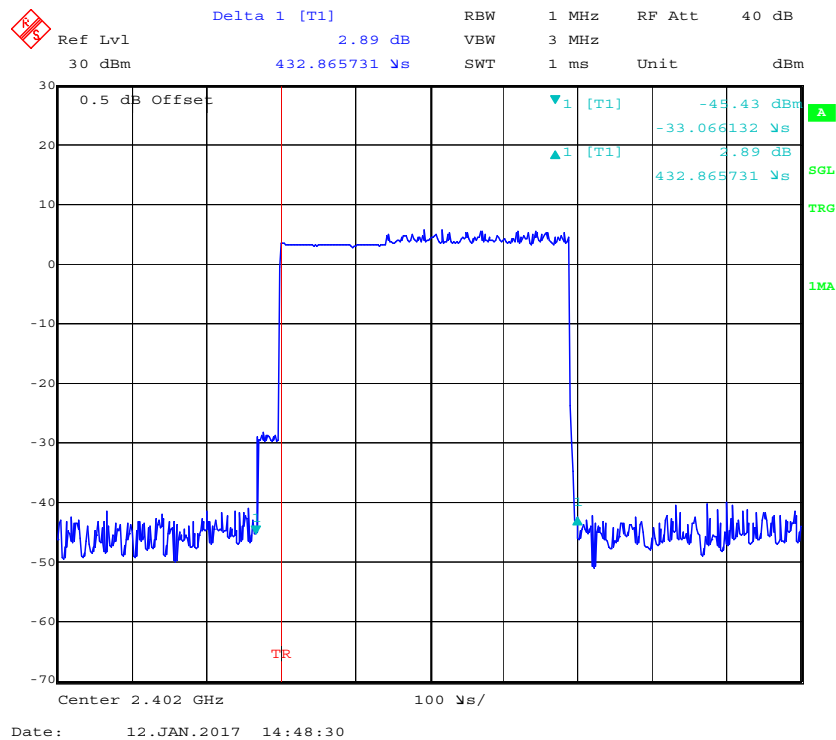


### 3DH1: Middle Channel

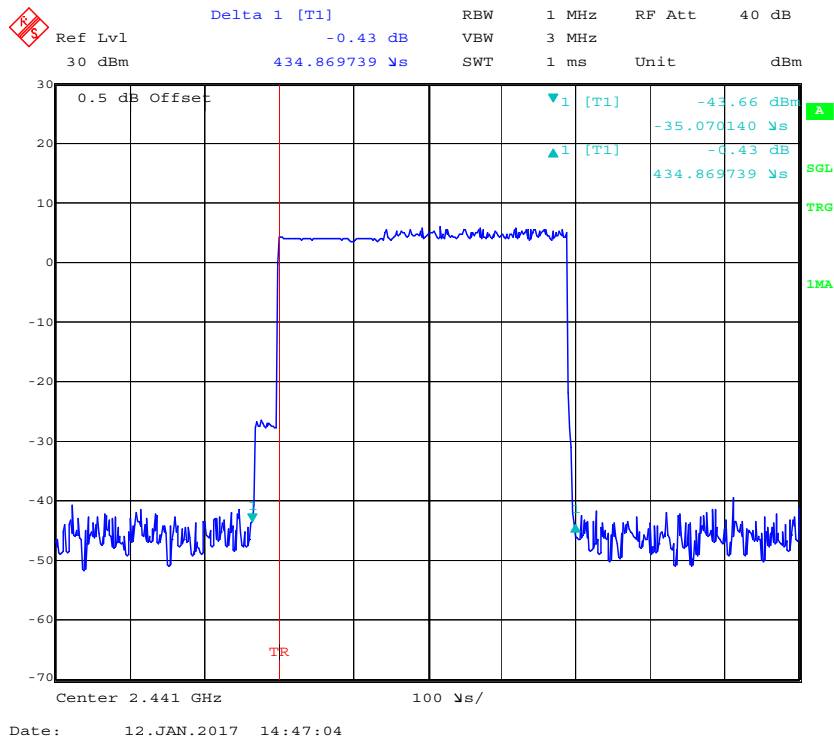


### 3DH1: High Channel

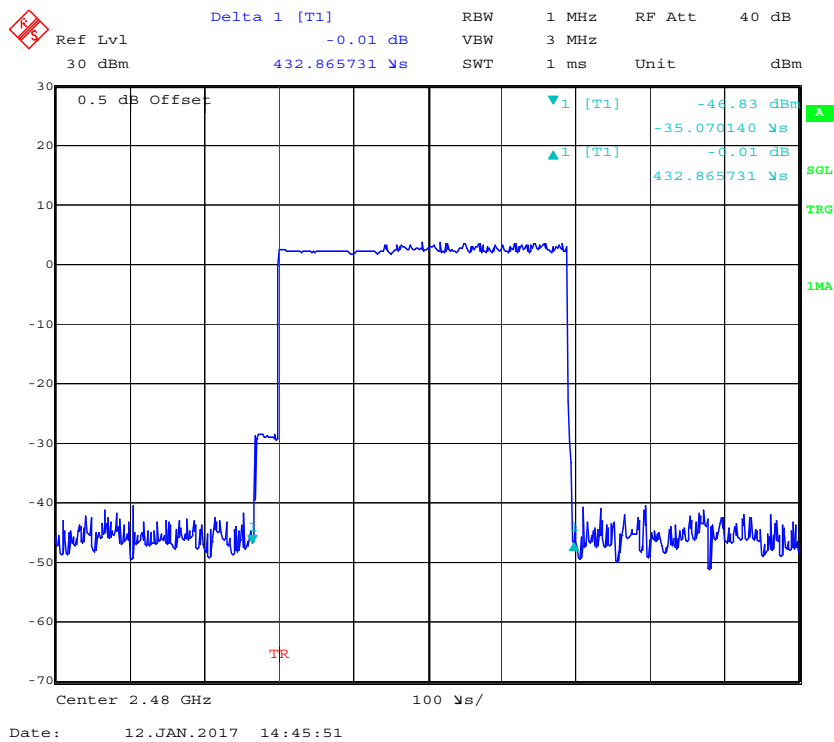

### 3DH3: Low Channel

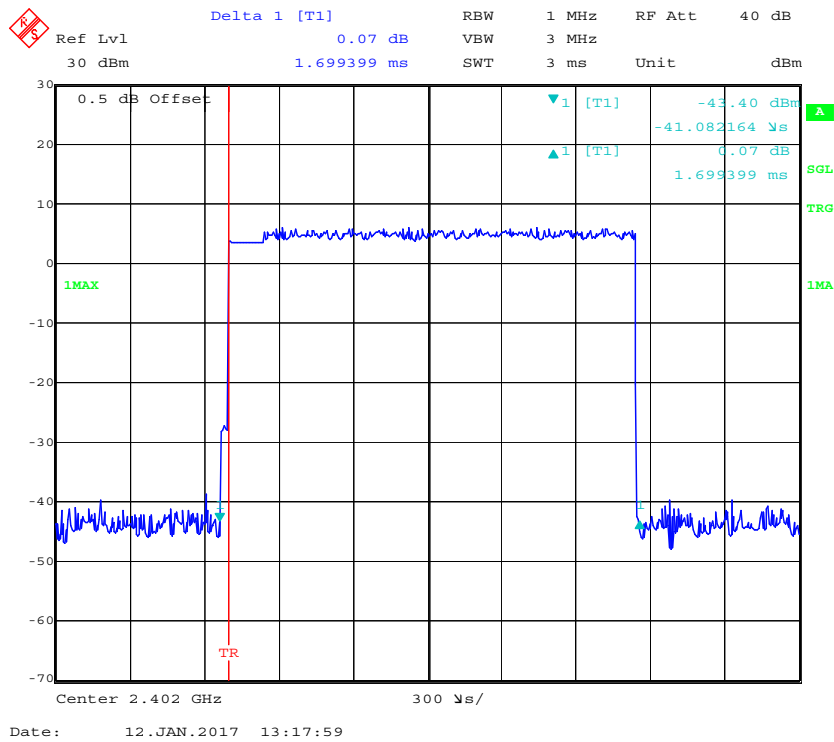


### 3DH3: Middle Channel

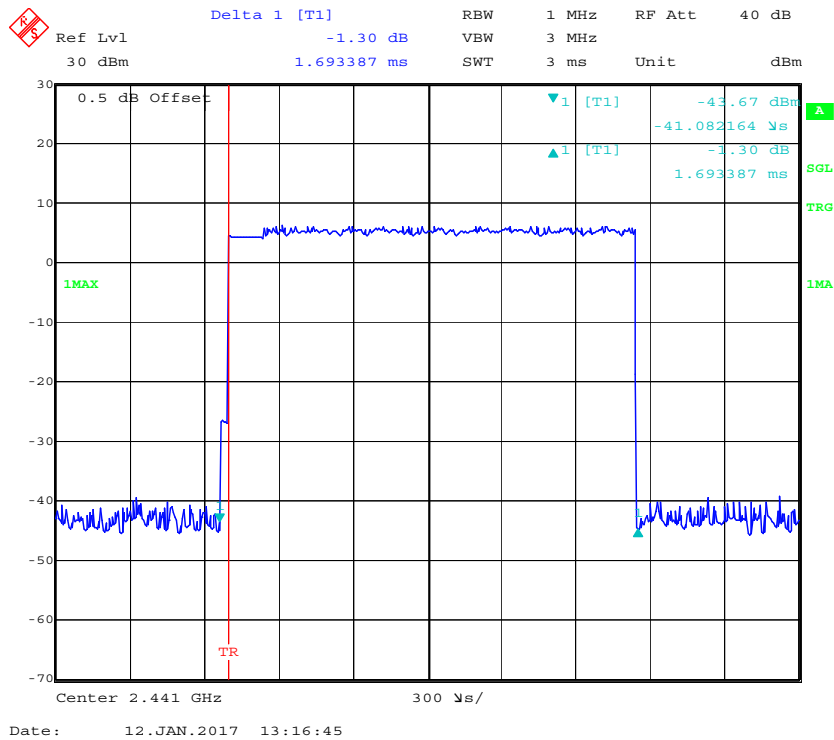




### 3DH5: Middle Channel

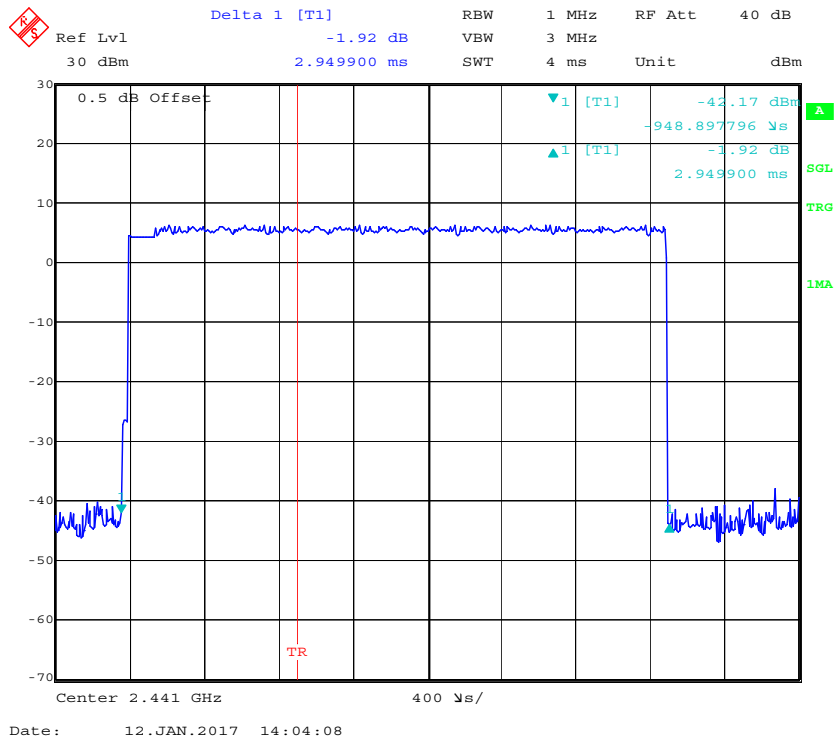

### 3DH5: High Channel

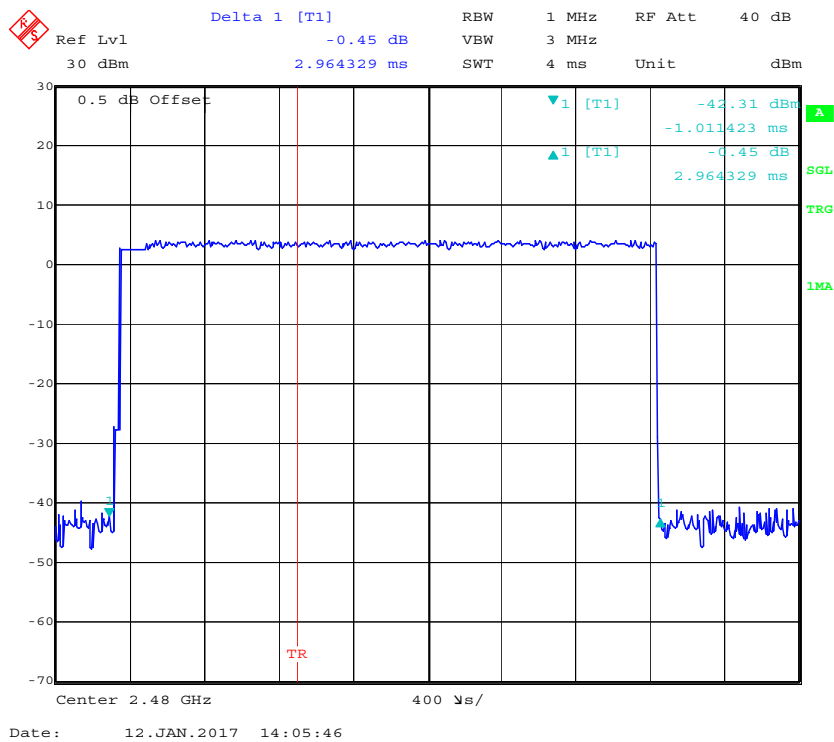



## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	38%
ATM Pressure:	100.9kPa

\* The testing was performed by Kevin Hu on 2017-01-12.


**Test Result:** Compliance.

*Test Mode: Transmitting*


Mode	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	6.43	30
	2441	6.55	30
	2480	4.44	30
EDR Mode ( $\pi/4$ -DQPSK)	2402	5.58	30
	2441	5.83	30
	2480	3.55	30
EDR Mode (8-DPSK)	2402	6.08	30
	2441	5.95	30
	2480	3.8	30

Note: The data above was tested in conducted mode.


*BDR Mode (GFSK):*

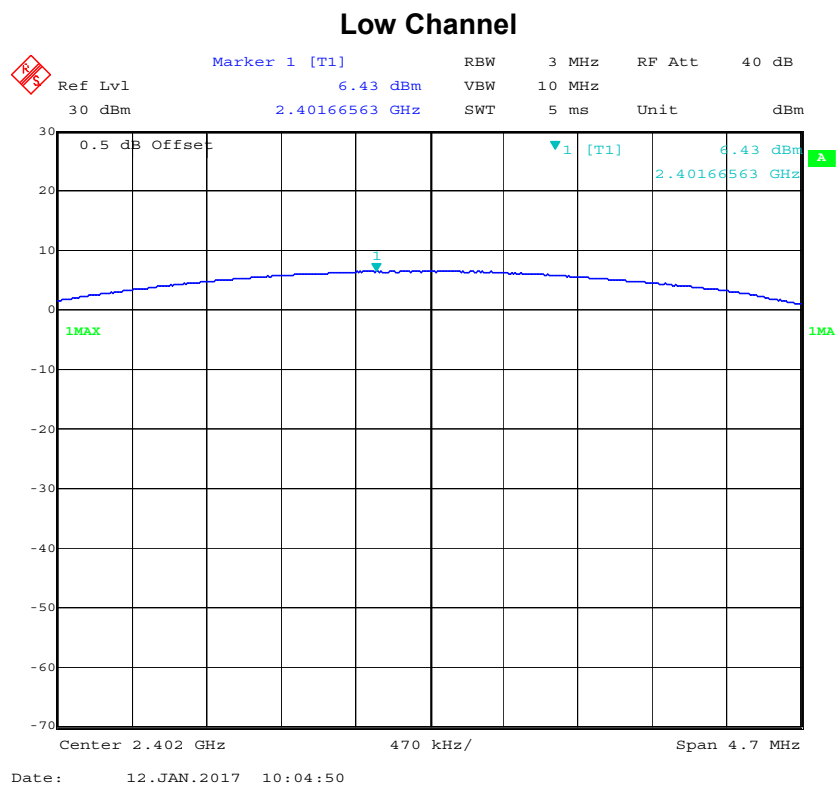

### Middle Channel

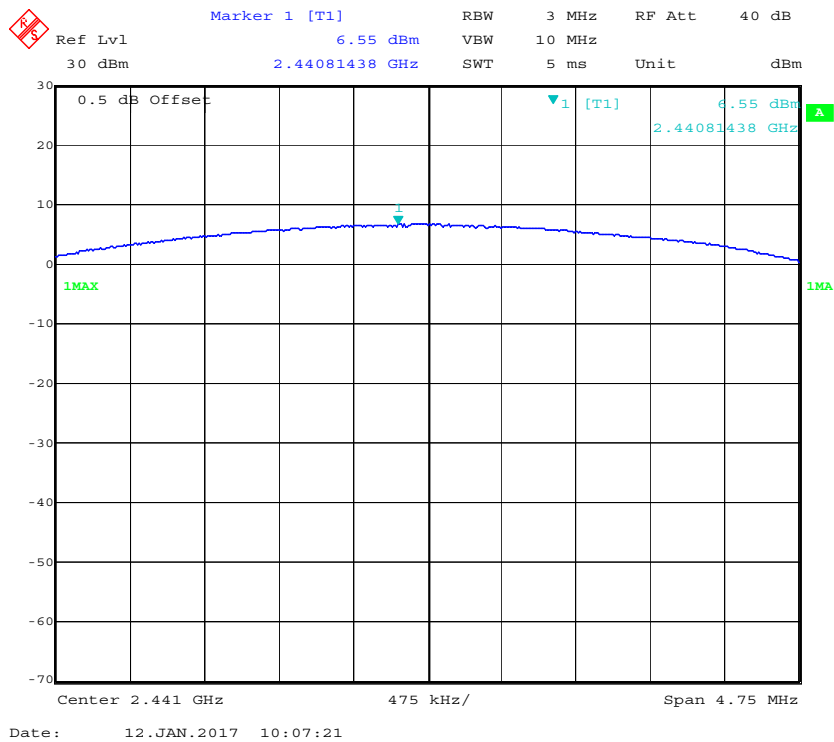


### High Channel

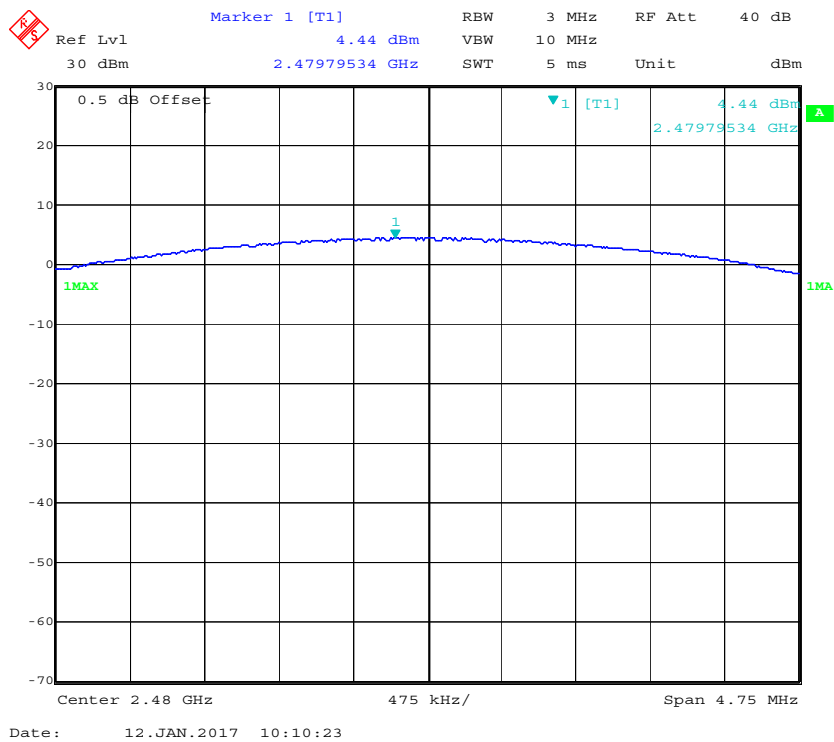


EDR Mode ( $\pi/4$ -DQPSK):


### Low Channel

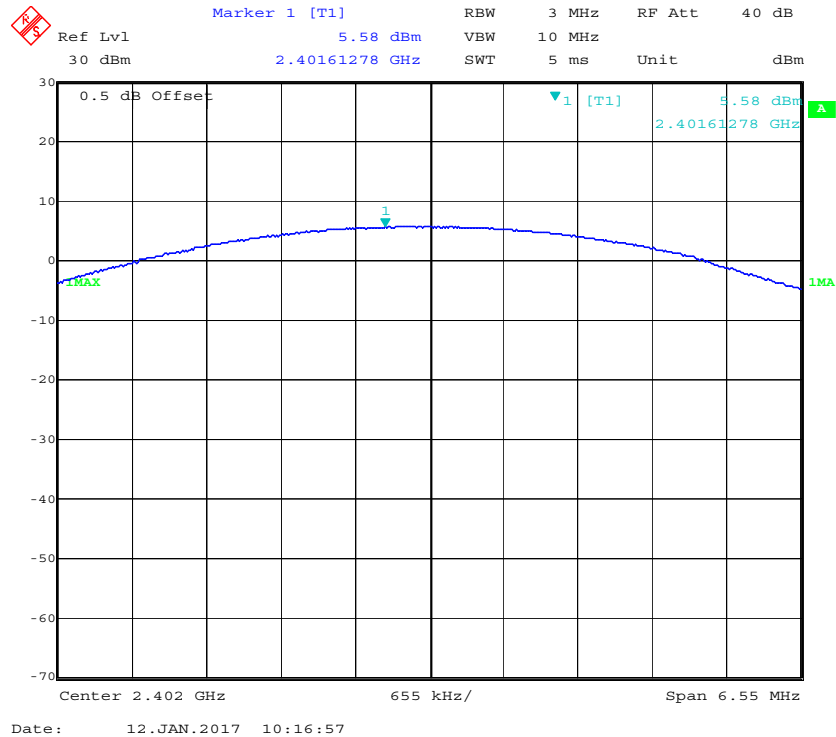

### Middle Channel

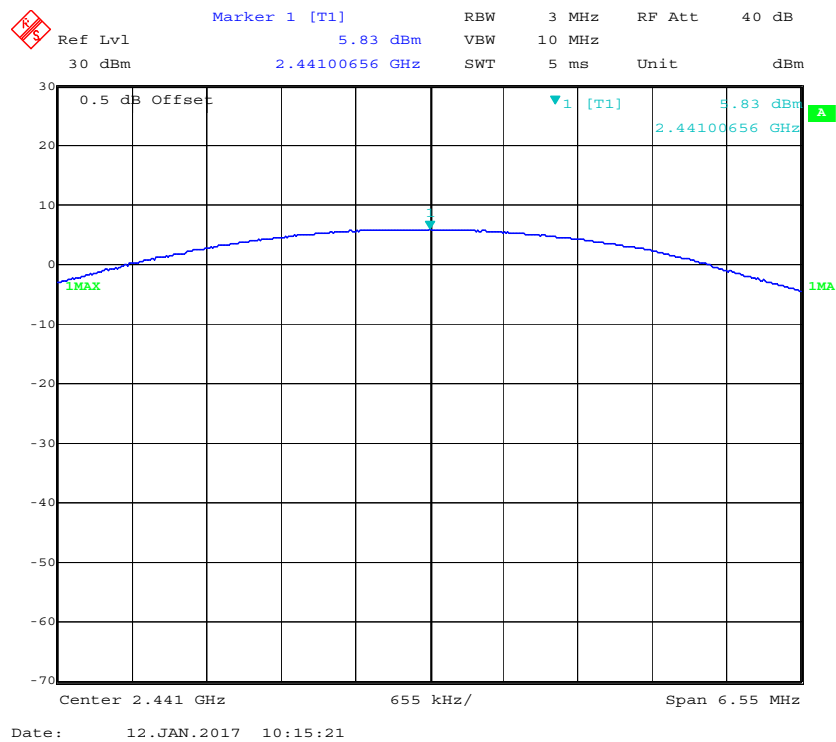


### High Channel

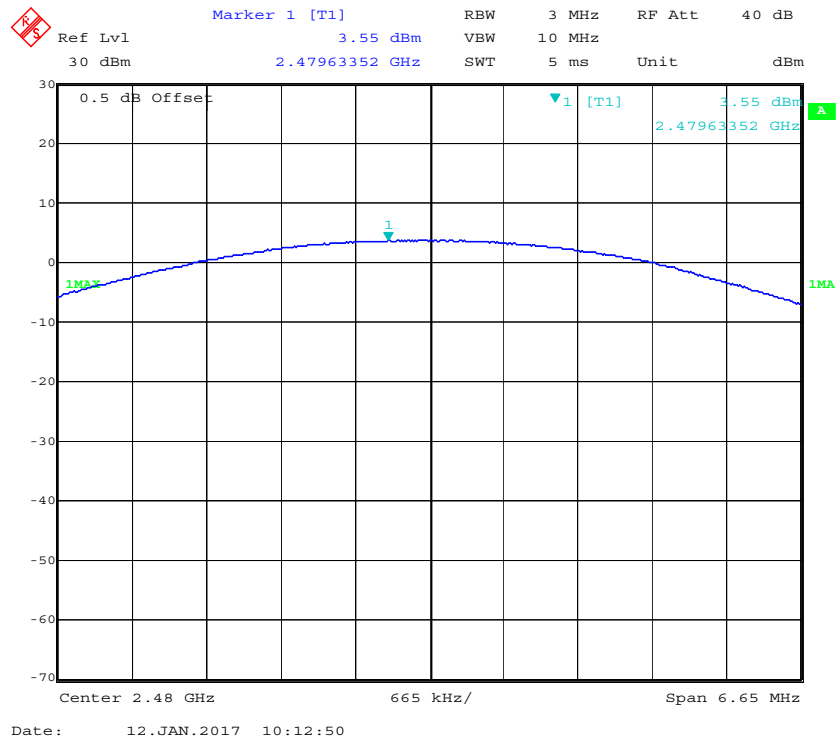


EDR Mode (8-DPSK):


### Low Channel

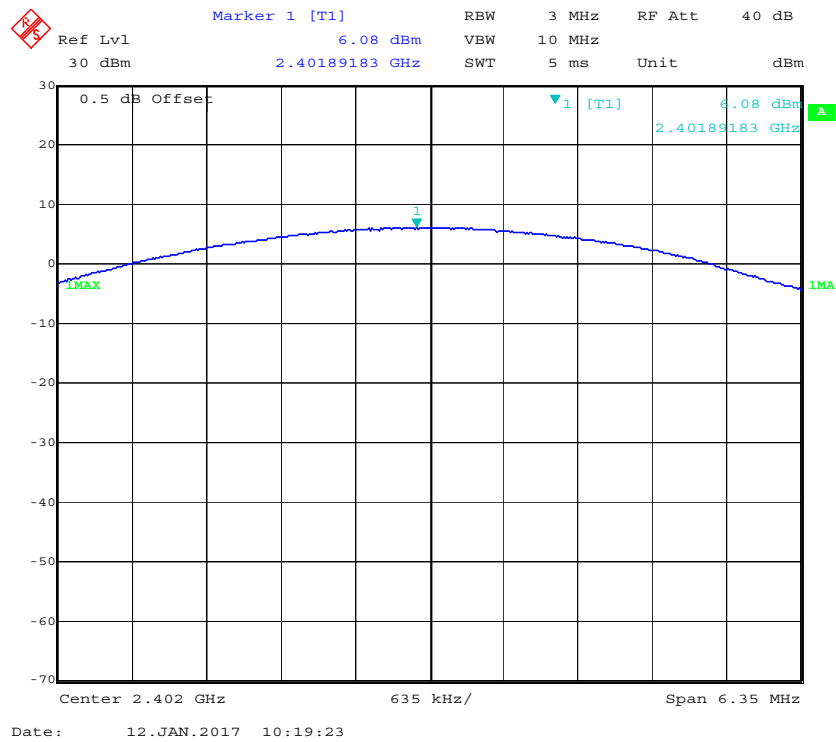

### Middle Channel

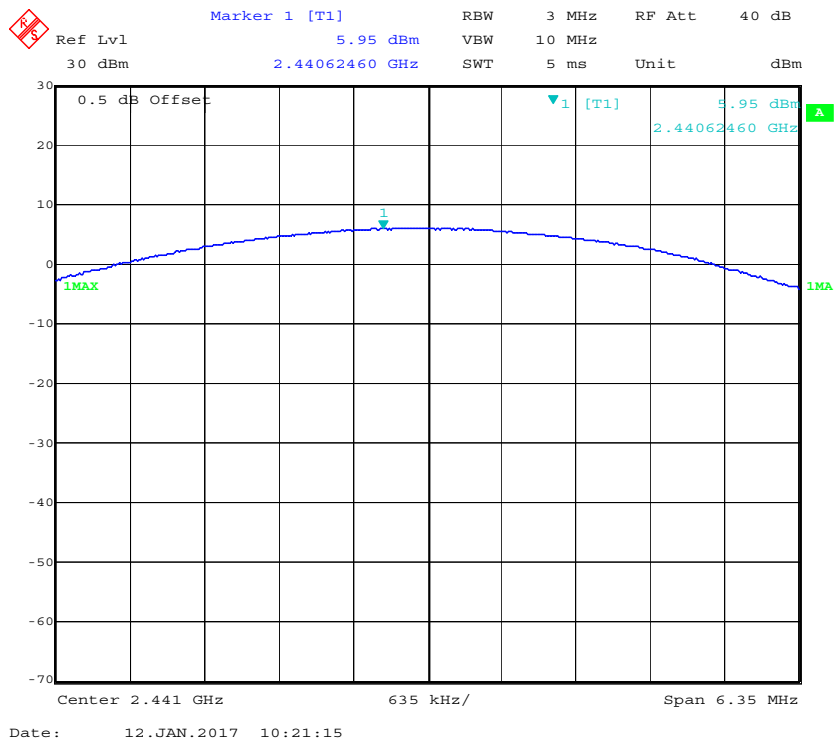

### High Channel

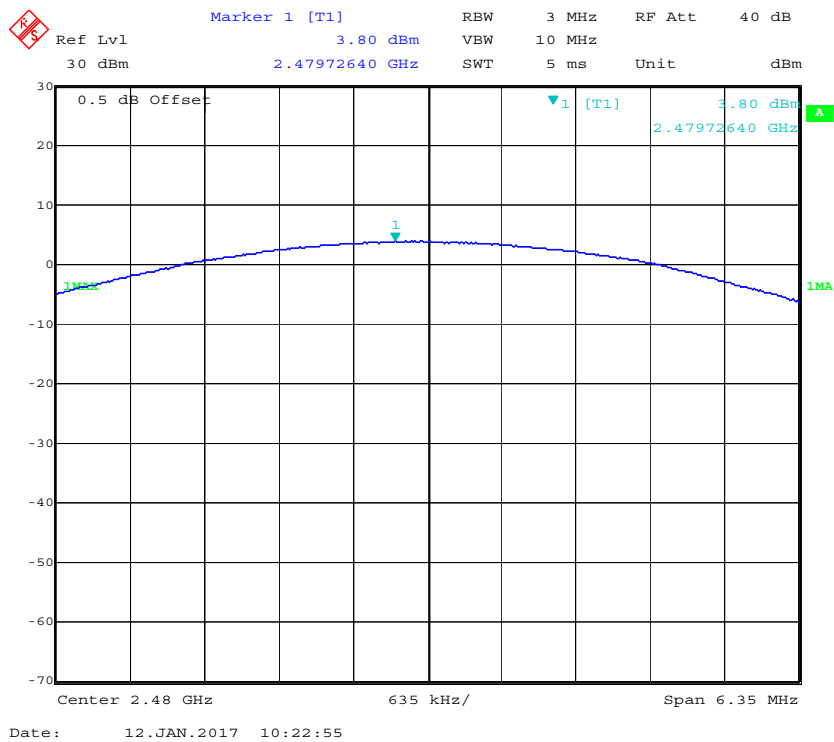

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).






### Band Edge, Right Side

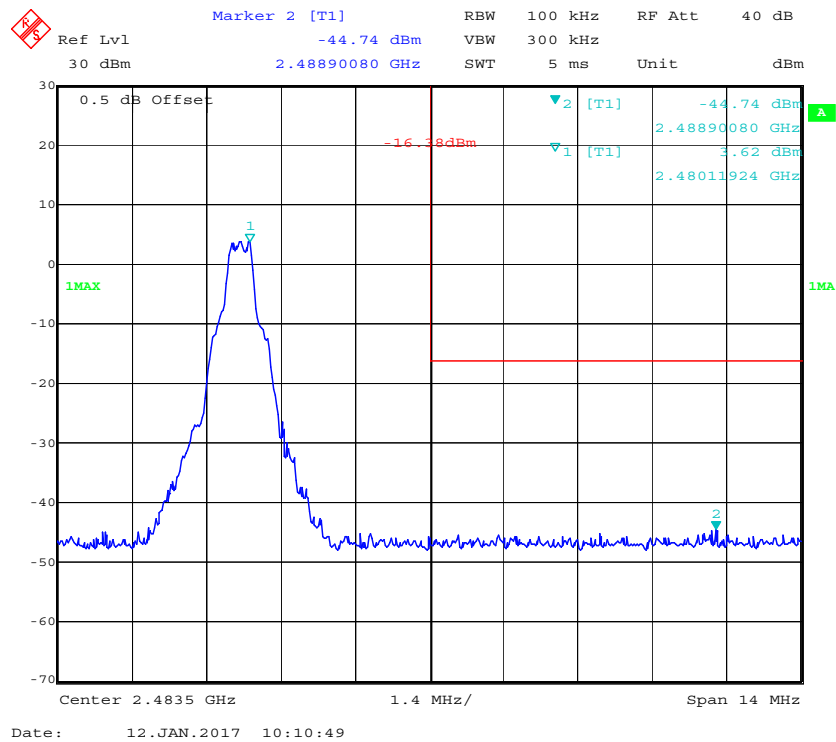


EDR Mode ( $\pi/4$ -DQPSK):

### Band Edge, Left Side

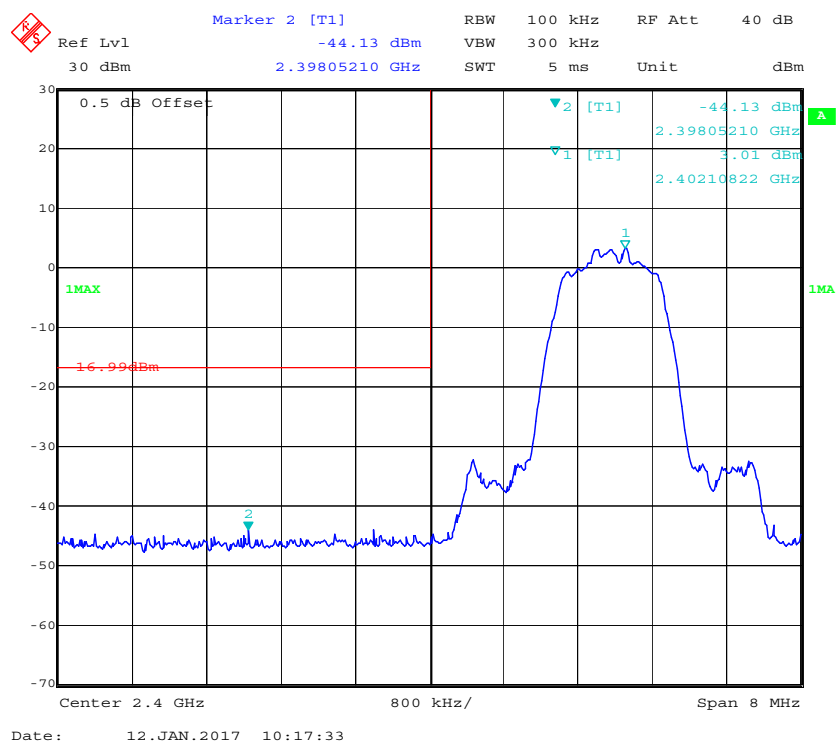

### Band Edge, Right Side

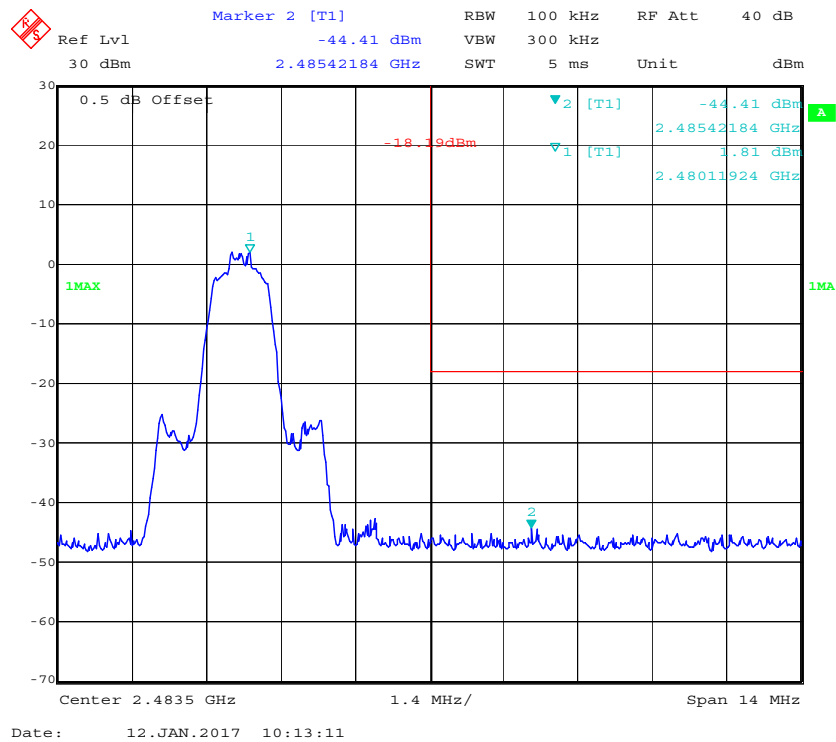

EDR Mode (8-DPSK):

### Band Edge, Left Side

