

FCC TEST REPORT  
FOR  
Rev-A-Shelf  
RF Receiver  
Model No.: WLDIM-1REC

Prepared for : Rev-A-Shelf  
Address : 12400 Earl Jones Way, Louisville, KENTUCKY 40299, USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an  
Avenue, Bao'an District, Shenzhen, Guangdong, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : January 04, 2016  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : January 04, 2016 - February 01, 2016  
Date of Report : February 01, 2016

**FCC TEST REPORT****FCC CFR 47 PART 15 Subpart B: 2015****Report Reference No. .... : LCS1512312922E****Date Of Issue ..... : February 01, 2016****Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.****Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China****Testing Location/ Procedure..... : Full application of Harmonised standards ☒  
Partial application of Harmonised standards ☐  
Other standard testing method ☐****Applicant's Name ..... : Rev-A-Shelf****Address ..... : 12400 Earl Jones Way, Louisville, KENTUCKY 40299, USA****Test Specification****Standard..... : FCC CFR 47 PART 15 Subpart B: 2015, ANSI C63.4-2014****Test Report Form No..... : LCSEMC-1.0****TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.****Master TRF..... : Dated 2011-03****Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description..... : RF Receiver****Trade Mark ..... : Tresco Lighting****Model/Type Reference ..... : WLDIM-1REC****Ratings..... : DC 12~24V****Result ..... : Positive****Compiled by:**

Jacky Li/ File administrators

**Supervised by:**

Glin Lu/ Technique principal

**Approved by:**

Gavin Liang/ Manager

## FCC -- TEST REPORT

**Test Report No. : LCS1512312922E**February 01, 2016

Date of issue

Type / Model..... : WLDIM-1REC

EUT..... : RF Receiver

**Applicant..... : Rev-A-Shelf**

Address..... : 12400 Earl Jones Way, Louisville, KENTUCKY 40299, USA

Telephone..... : 502 379 4364

Fax..... : 502 491 2215

**Manufacturer..... : Shenzhen Sunricher Technology Limited**Address..... : 3rd Floor,B building,Jia'an Industrial Building,Liu Xian Third  
road,No.72 area, Xin'an Street, Baoan District,Shenzhen, China

Telephone..... : (+86)-0755-86017718

Fax..... : (+86)-0755-26765389

**Factory..... : Shenzhen Sunricher Technology Limited**Address..... : 3rd Floor,B building,Jia'an Industrial Building,Liu Xian Third  
road,No.72 area, Xin'an Street, Baoan District,Shenzhen, China

Telephone..... : (+86)-0755-86017718

Fax..... : (+86)-0755-26765389

**Test Result** according to the standards on page 5: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>5</b>
1.1.Description of Standards and Results.....	5
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1.Description of Device (EUT) .....	6
2.2.Description of Test Facility .....	6
2.3.Statement of the measurement uncertainty.....	6
2.4.Measurement Uncertainty .....	7
<b>3. RADIATED EMISSION MEASUREMENT .....</b>	<b>8</b>
3.1. Test Equipment.....	8
3.2. Block Diagram of Test Setup .....	8
3.3. Radiated Emission Limit (Class B) .....	9
3.4. EUT Configuration on Measurement .....	9
3.5. Operating Condition of EUT .....	9
3.6. Test Procedure .....	9
3.7. Radiated Emission Noise Measurement Result.....	10

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC CFR 47 PART 15 Subpart B: 2015	Class B	N/A
Radiated disturbance	FCC CFR 47 PART 15 Subpart B: 2015	Class B	PASS
N/A is an abbreviation for Not Applicable.			

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : RF Receiver

Model Number : WLDIM-1REC

Power Supply : DC 12~24V

Frequency Range : 916.5MHz

Modulation Technology : ASK

Antenna Type and Gain : Integral Antenna, 2.0 dBi(Max.)

### 2.2. Description of Test Facility

EMC Lab. : CNAS Registration Number. is L4595.  
FCC Registration Number. is 899208.  
Industry Canada Registration Number. is 9642A-1.  
VCCI Registration Number. is C-4260 and R-3804.  
ESMD Registration Number. is ARCB0108.  
UL Registration Number. is 100571-492.  
TUV SUD Registration Number. is SCN1081.  
TUV RH Registration Number. is UA 50296516-001

### 2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.4.Measurement Uncertainty

Test Item	Frequency Range	Expanded uncertainty (Ulab)	Expanded uncertainty (Ucisp)
Conducted Emission	(9kHz to 150kHz)	2.63 dB	4.0 dB
	(150kHz to 30MHz)	2.35 dB	3.6 dB
Radiated Emission	(9kHz to 30MHz)	3.68 dB	N/A
Radiated Emission	(30MHz to 1000MHz)	3.48 dB	5.2 dB
Radiated Emission	(above 1000MHz)	3.90 dB	N/A

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.


### 3. RADIATED EMISSION MEASUREMENT

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2015/02/04
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2015/06/18
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2015/06/18
4	EMI Test Software	AUDIX	E3	N/A	2015/06/18
5	Positioning Controller	MF	MF-7082	/	2015/06/18

#### 3.2. Block Diagram of Test Setup

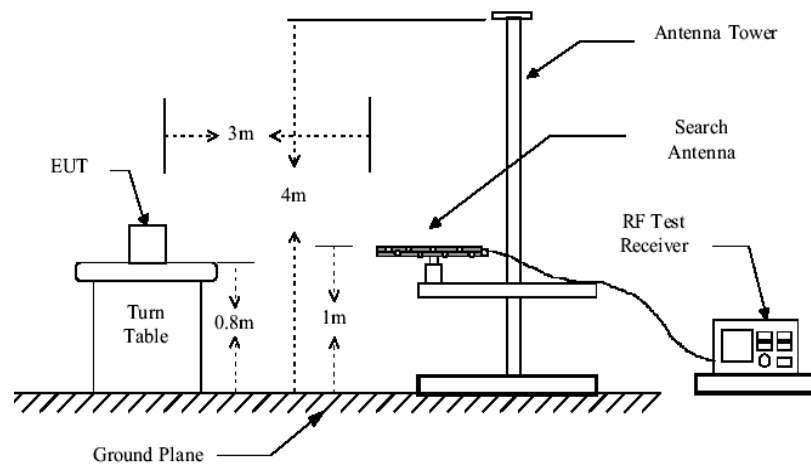

*Below 1G*

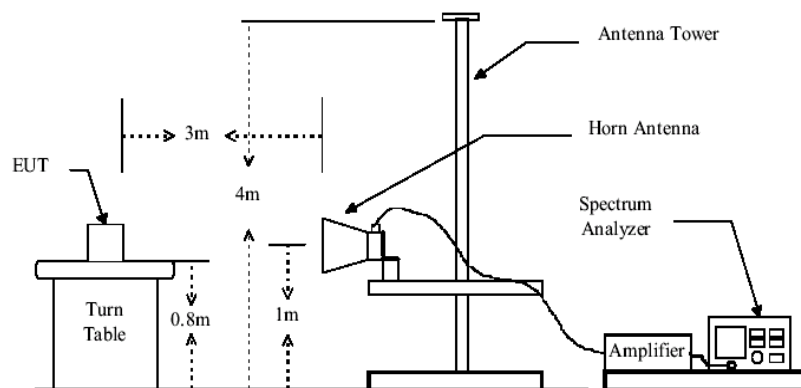

*Above 1G*



### 3.3. Radiated Emission Limit (Class B)

Limits for radiated disturbance Blow 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark : (1) Emission level  $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 3.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2.

4.5.2. Let the EUT work in test mode (on) and measure it.

### 3.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Below 1G:

The bandwidth of the EMI test receiver is set at 120kHz, 1000kHz.

The frequency range from 30MHz to 1000MHz is checked.


Above 1G:

The bandwidth of the EMI test receiver is set at 1MHz, 3MHz for Peak detector.

The bandwidth of the EMI test receiver is set at 1MHz, 10Hz for Average detector

The frequency range from 1GHz to 26.5GHz is checked.

### 3.7. Radiated Emission Noise Measurement Result PASS.

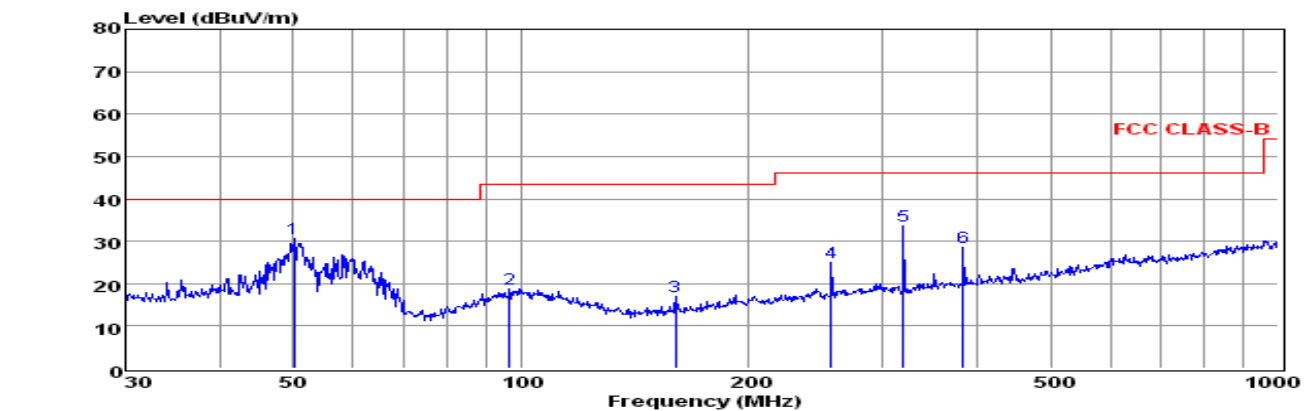


Env./Ins: 24°C/56%  
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	50.06	16.93	0.54	13.25	30.72	40.00	-9.28	QP
2	96.44	5.22	0.58	12.93	18.73	43.50	-24.77	QP
3	159.78	7.64	0.75	8.66	17.05	43.50	-26.45	QP
4	256.52	12.02	1.02	12.06	25.10	46.00	-20.90	QP
5	319.94	19.19	1.16	13.33	33.68	46.00	-12.32	QP
6	383.93	12.81	1.13	14.68	28.62	46.00	-17.38	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

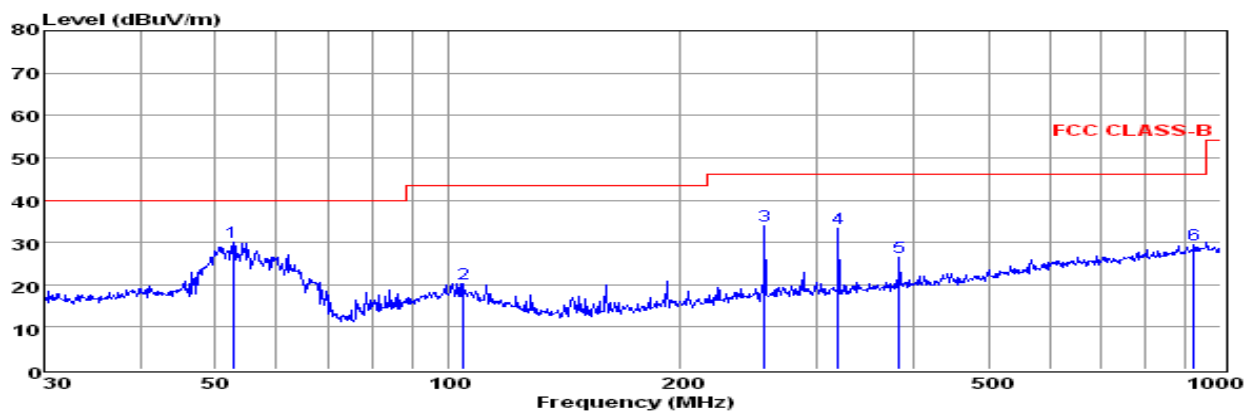

Env./Ins: 24°C/56%  
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	52.76	16.33	0.46	13.12	29.91	40.00	-10.09	QP
2	104.54	6.89	0.61	12.75	20.25	43.50	-23.25	QP
3	256.52	20.84	1.02	12.06	33.92	46.00	-12.08	QP
4	319.94	18.74	1.16	13.33	33.23	46.00	-12.77	QP
5	383.93	10.77	1.13	14.68	26.58	46.00	-19.42	QP
6	922.52	6.31	1.99	21.24	29.54	46.00	-16.46	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

<b>Test Mode:</b> Receive	<b>Tested by:</b> Jacky
<b>Test voltage:</b> DC 24V	<b>Test Distance:</b> 3m
<b>Detector Function:</b> Peak+AV	<b>Test Results:</b> Passed

Polarization	Frequency MHz	Emission Level dB $\mu$ V/m		Limits dB $\mu$ V/m		Margin dB $\mu$ V/m	
		Peak	AVG	Peak	AVG	Peak	AVG
Horizontal	1765.58	59.76	42.74	74.00	54.00	-14.24	-11.26
	2658.10	61.52	45.58	74.00	54.00	-12.48	-8.42
	3874.61	54.38	38.36	74.00	54.00	-19.62	-15.64
Vertical	2216.97	58.04	41.41	74.00	54.00	-15.96	-12.59
	2986.44	60.11	43.22	74.00	54.00	-13.89	-10.78
	4216.20	55.54	41.87	74.00	54.00	-18.46	-12.13

**Notes:**

1. Measuring frequencies from 9k~26.5GHz , No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~26.5GHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measure

-----THE END OF REPORT-----