

FCC TEST REPORT

For

LTE Digital Mobile Phone

Model Number: NX629J

FCC ID: 2AHJO-NX629J

Report Number : WT198004687

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,
Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

Test report declaration

Applicant : Nubia Technology Co., Ltd.
Address : 10/F, Tower A, Hans Innovation Mansion, North Ring Rd.,
No.9018,High-Tech Park, Nanshan District, Shenzhen, China.
Manufacturer : Nubia Technology Co., Ltd.
Address : 10/F, Tower A, Hans Innovation Mansion, North Ring Rd.,
No.9018,High-Tech Park, Nanshan District, Shenzhen, China.
EUT : LTE Digital Mobile Phone
Description :
Model No : NX629J
Trade mark : nubia
FCC ID : 2AHJO-NX629J

Test Standards:

FCC PART 22H, 24E , 27 AND 90S(2018)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.26 (2015) & KDB971168 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 22H, 24E, 27 and 90S.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.


Project
Engineer:



(Chen Silin 陈司林)

Date: Sep.06, 2019


Checked by:



(Lin Yixiang 林奕翔)

Date: Sep.06, 2019

Approved by:



(Lin Bin 林斌)

Date: Sep.06, 2019

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer	5
2.3. Measurement Uncertainty	6
3. PRODUCT DESCRIPTION.....	7
3.1. EUT Description.....	7
3.2. Related Submittal(s) / Grant (s)	8
3.3. Operating Condition of EUT.....	8
3.4. Support Equipment List	8
3.5. Test Conditions.....	8
3.6. Special Accessories	8
3.7. Equipment Modifications	8
4. TEST EQUIPMENT USED.....	9
5. TEST RESULTS.....	10
5.1. Spurious Emissions Radiated	10

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1053	22.917 24.238 27.53 90.691	Radiated Spurious Emissions	PASS

Remark: "N/A" means "Not applicable."

The tests documented in this report were performed in accordance with ANSI C63.26 (2015), FCC CFR 47 Part 2, Part 22H, Part 24E, Part 27 and Part 90S.

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The samples mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

2.3.Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Radiated Emission

30MHz~1000MHz 4.5dB

1GHz~26.5GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1.EUT Description

Table 2 Specification of the Equipment under Test

Product Type:	LTE Digital Mobile Phone
Hardware Revision :	NX629J_V1AMB
Software Revision :	NX629J_V1S_ENCommon_V1.01
FCC ID:	2AHJO-NX629J
Frequency:	<p>GSM850: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>PCS1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>WCDMA 850: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>WCDMA 1700: TX: 1710MHz~1755MHz RX 2110MHz~2155MHz</p> <p>WCDMA 1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>CDMA2000 BC0: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>CDMA2000 BC1: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>LTE Band 2: TX 1850MHz~1910MHz RX 1930MHz~1990MHz</p> <p>LTE Band 4: TX: 1710MHz~1755MHz RX 2110MHz~2155MHz</p> <p>LTE Band 5: TX 824MHz~849MHz RX 869MHz~894MHz</p> <p>LTE Band 7: TX 2500MHz~2570MHz RX 2620MHz~2690MHz</p> <p>LTE Band 12: TX 699 ~ 716MHz RX 729 ~ 746MHz</p> <p>LTE Band 17: TX 704~716MHz RX 734~ 746MHz</p> <p>LTE Band 25: TX 1850MHz~1915MHz RX 1930MHz~1995MHz</p> <p>LTE Band 26: TX 814MHz~849MHz RX: 859MHz~894MHz</p> <p>LTE Band 30: TX 2305MHz~2315MHz RX 2350MHz~2360MHz</p> <p>LTE Band 41: TX 2496MHz~2690MHz RX: 2496MHz~2690MHz</p> <p>LTE Band 66: TX 1710MHz~1780MHz RX: 2110MHz~2200MHz</p>

Type(s) of Modulation:	GSM:GMSK, 8PSK WCDMA:QPSK CDMA2000:QPSK CDMA2000 1x EV-DO:QPSK / 8PSK LTE:QPSK, 16QAM, 64QAM(downlink only)
Antenna Type:	Internal Antenna
Operating voltage:	DC 3.8V from battery DC 5V from adapter
Remark: This is a derivative report based on original reports SET2019-02851, SET2019-02851 & SET2019-03740. The model NX629J changes the Air Inlet, and the APP processor chip is changed from qualcomm 855 to qualcomm 855 pro. All other parts of the product, including the circuit theory, electrical design and the Critical Components are the same. Considering above changes, full test are performed of RSE in this report.	

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AHJO-NX629J filing to comply with FCC PART 22H, 24E, 27, 90S.

3.3. Operating Condition of EUT

The spurious emission measurements were carried out in full-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.4. Support Equipment List

Table 3 Support Equipment List

Name	Model No	S/N	Manufacturer
--	--	--	--

3.5. Test Conditions

Date of test : Aug.26, 2019 - Sep.03, 2019

Date of EUT Receive : Aug.20, 2019

Temperature: 20 ~ 22 °C

Relative Humidity: 47-52%

3.6. Special Accessories

Not available for this EUT intended for grant.

3.7. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 4 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Mar.11, 2019	1 Year
SB5472/02	Bilog Antenna	Schwarzbeck	VULB9163	Jun.01, 2019	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.01, 2018	1 Year
SB8501/11	Horn Antenna	ETS-Lindgren	3160-09	Jan.21,2017	3 Years
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	Feb.20, 2019	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	Feb.18, 2019	1 Year
SB8501/14	Preamplifier	Rohde & Schwarz	SCU-03	Feb.20, 2019	1 Year
SB8501/02	Communication Test Unit	Rohde & Schwarz	CMU200	Nov.26, 2018	1 Year
SB12724/08	Wideband Radio communication Tester	Rohde & Schwarz	CMW500	May.29, 2019	1 Year
SB12724/06	Wideband Radio communication Tester	Rohde & Schwarz	CMW500	Sep.01, 2018	1 Year
--	Radiated Test Software	Rohde & Schwarz	EMC 32 8.50.0	--	--

5. TEST RESULTS

5.1. Spurious Emissions Radiated

5.1.1. Test Standard

FCC: CFR Part 2.1051, CFR Part 22.917, CFR Part 24.238, CFR Part 27.53 ,
CFR Part 27.53

5.1.2. Test Limit

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radio telephone Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100

kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC: §27.53

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge and $55 + 10 \log (P)$ dB at 5.5 megahertz from the channel edges. (Channel edges are defined under §27.5 (i) Frequency assignment for the BRS/EBS band)

(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions

are attenuated at least 26 dB below the transmitter power.

FCC 90.669

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

5.1.3. Test Procedure

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Wideband Radio Communication Tester (CMW500) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°.

Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.

5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.

6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS). $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.

7. Determine the level of spurious emissions using the following equation:

$\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$:

8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.

9. Determine the level of spurious emissions using the following equation:


$\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$:

10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(Note: Steps 5 and 6 above are performed prior to testing and LOSS is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings: RBW=VBW=1MHz

5.1.4. Test Setup

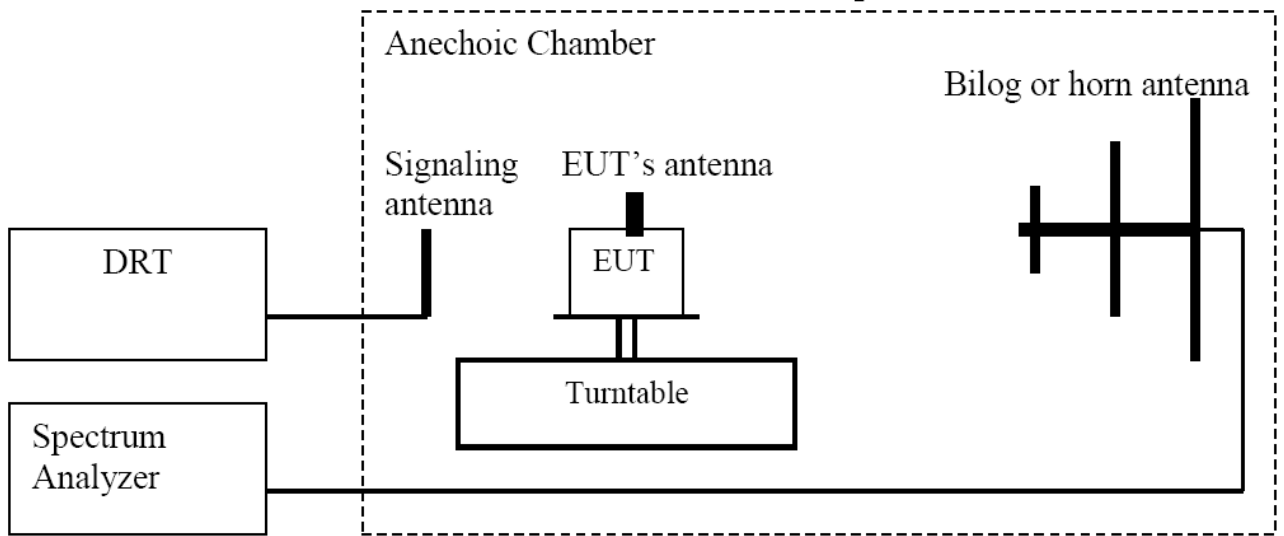

5.1.5. Test Data

only the worst case is recorded in this report:

Test Band = GSM850

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP) [dBm]		[dBm]
1673.2	-3.37	0.9	6.77	40.6	-38.1	Horizontal	-13
1673.2	-4.57	0.9	6.77	40.6	-39.3	Vertical	-13

Test Band = GSM1900

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3760	-9.63	4.6	9.53	39	-43.7	Horizontal	-13
3760	-11.83	4.6	9.53	39	-45.9	Vertical	-13

Test Band = WCDMA850

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP) [dBm]		[dBm]
1672.8	-9.97	0.9	6.77	40.6	-44.7	Horizontal	-13
1672.8	-12.37	0.9	6.77	40.6	-47.1	Vertical	-13

Test Band = WCDMA1700

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3465.2	-9.51	4.1	9.41	39	-43.2	Horizontal	-13
3465.2	-11.11	4.1	9.41	39	-44.8	Vertical	-13

Test Band = WCDMA1900

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3760	-10.43	4.6	9.53	39	-44.5	Horizontal	-13
3760	-12.73	4.6	9.53	39	-46.8	Vertical	-13

Test Band = CDMA2000 BC0

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBd]	dB	Level (ERP) [dBm]		[dBm]
1673.2	-11.67	0.9	6.77	40.6	-46.4	Horizontal	-13
1673.2	-13.47	0.9	6.77	40.6	-48.2	Vertical	-13

Test Band = CDMA2000 BC1

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3760	-9.43	4.6	9.53	39	-43.5	Horizontal	-13
3760	-12.23	4.6	9.53	39	-46.3	Vertical	-13

Test Band = LTE Band 2

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3760	-9.53	4.6	9.53	39	-43.6	Horizontal	-13
3760	-7.33	4.6	9.53	39	-41.4	Vertical	-13

Test Band = LTE Band 4

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3465	-11.01	4.1	9.41	39	-44.7	Horizontal	-13
3465	-8.61	4.1	9.41	39	-42.3	Vertical	

Test Band = LTE Band 5

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
1673	-8.47	0.9	6.77	40.6	-43.2	Horizontal	-13
1673	-9.17	0.9	6.77	40.6	-43.9	Vertical	-13

Test Band = LTE Band 7

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
5070	-5.48	6.32	10	38.5	-40.3	Horizontal	-25
5070	-10.88	6.32	10	38.5	-45.7	Vertical	-25

Test Band = LTE Band 12

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	Polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (ERP) [dBm]		[dBm]
1415	-9.37	0.9	6.77	40.6	-44.1	Horizontal	-13
1415	-12.17	0.9	6.77	40.6	-46.9	Vertical	-13

Test Band = LTE Band 17

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	Polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (ERP) [dBm]		[dBm]
1420	-7.97	0.9	6.77	40.6	-42.7	Horizontal	-13
1420	-10.67	0.9	6.77	40.6	-45.4	Vertical	-13

Test Band = LTE Band 25

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	Polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3765	-9.33	4.6	9.53	39	-43.4	Horizontal	-13
3765	-12.03	4.6	9.53	39	-46.1	Vertical	-13

Test Band = LTE Band 26

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	Polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
1863	-7.97	0.9	6.77	40.6	-42.7	Horizontal	-13
1863	-9.57	0.9	6.77	40.6	-44.3	Vertical	-13

Test Band = LTE Band 30

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	Polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
4620	-13.41	4.5	9.81	38.6	-46.7	Horizontal	-40
4620	-11.71	4.5	9.81	38.6	-45	Vertical	-40

Test Band = LTE Band 41

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
5210	-10.08	6.32	10	38.5	-44.9	Horizontal	-25
5210	-11.38	6.32	10	38.5	-46.2	Vertical	-25

Test Band = LTE Band 66

Test Channel = MCH

Freq.	SG. Level	Cable Loss	Antenna Gain	Preamp	Substitution	polarization	Limit
[MHz]	[dBm]	[dB]	[dBi]	dB	Level (EIRP) [dBm]		[dBm]
3490	-12.11	4.1	9.41	39	-45.8	Horizontal	-13
3490	-9.81	4.1	9.41	39	-43.5	Vertical	-13

END OF REPORT