

FCC TEST REPORT

For

Shenzhen Neoon Industrial Co., LTD

smart band smart wristband

Model No.: IT 112, IT 111, C1, H10 PLUS X7 Pro, 115 PLUS

Prepared For Shenzhen Neoon Industrial Co., LTD

Address Cofco Fuan Intelligent Robot Manufacturing Industrial Park, Baoan

District, Shenzhen, China

Prepared By Shenzhen Anbotek Compliance Laboratory Limited

Address 1/F, Building D, Sogood Science and Technology Park, Sanwei

community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,

China.518102

Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number SZAWW190111007-01

Date of Receipt Jan. 11, 2019

Date of Test Jan. 11~24, 2019

Date of Report Jan. 24, 2019



Contents

1. General Information	b		100fer	Yupo .	Jog
General Information 1.1. Client Information	otek Ani	00° P	, wotok	popoter.	And 5
1.3. Auxiliary Equipment Used During	Test	Kupotek	Anbo	6	k popote,
1.4. Description of Test Modes	Anbo	r. wotel	Anbore .	Anv	6
1.5. List of channels	Anbore	P.O.	dy,,	otek Aup	
1.2. Description of Device (EUT)	· Kipote	Yup,		wate _k	Who the William C
1.7. Measurement Uncertainty		,ate ^N	Upor p		10
1.8. Description of Test Facility	Vr. VII.		Repoter	Anbo	10
2. Summary of Test Results	poter	Anbe	- otek	Vilpore	11
3. Conducted Emission Test		Anbor	P11,	k kabotel	12
3.1. Test Standard and Limit		Roboter	Anbe		12
3.2. Test Setup	Anb	M	tek Aup	or Am	12
3.3. Test Procedure	Anbor	ν	4970	aboten A	12
3.3. Test Procedure	rek Pop	oter Ar	100	teotek.	12
4. Radiation Spurious Emission and Band E 4.1. Test Standard and Limit 4.2. Test Setup	dge	wotek.	Anbor	VII.	17
4.1. Test Standard and Limit	/por		popoter	Anbe	17
4.2. Test Setup	Anbote	Anb	botel	Anbors	17
4.3. Test Procedure	botek	Anbora		rek wpo	18
4.4. Test Data	A.,	e anbo	ie. Aup.		
5. Maximum Peak Output Power Test	And		hotek A	ipor bi	27
4.2. Test Setup	ek Anb	obo	nate _k	4.nbote"	27
5.2 Test Setup					Anb
5.3. Test Procedure	Nek .	botek	Aupor	Vr. Ofek	27
5.4. Test Data	Anbo	b. rotek	Anbote.	Mun	27
5.3. Test Procedure	Aupote.	Anu	oV , , , , , , , , o	iek Anbo	30
6.1. Test Standard and Limit	obotek	Anbo.		ote ^k	30
6.2. Test Setup		tek An	oore, Vi	in rek	30
6.3. Test Procedure	P.U.	101	abotek	Anbor	30
6.4. Test Data	ootek A	nbo	, otek	Vupots,	30
7. Power Spectral Density Test	botek	Anbore	Ann	abotek	
7.1. Test Standard and Limit	Arr. stek	abotek	Anbo	.v	33
7.2. Test Setup	Anbo	r not	K Anbo	Amo	33
7.3. Test Procedure	Anbolo	P.U.	101	potell An	33
7.4. Test Data	ye 6000	ier Ani	,	rotek	M ^{holo} 33
8. 100kHz Bandwidth of Frequency Band E	dge Require	ment	Anbolo	Vie.	36
8.1. Test Standard and Limit	, S 110 quin	atek	anbotek	Aupo	36
8.2 Test Setup	Lupoter	Anb.	hotek	Anbolo	36
8.3. Test Procedure	,botek	Anboto	P.M.	ek "nboti	34
8.4 Test Data	An	Anbote	And	. Yo.	34
6.3. Test Procedure	Anb	or. Yo	otek Anl	Dore Will	- WI
9.1 Test Standard and Requirement	k Anbo	······································	atek	Anbotel	AC AC
7.1. 165t Standard and Requirement		wole.	'up.	Ve.	4t





9.2. Antenna Connected Construction	6	aboter	Anu	Notok	Vupor 1	4(
APPENDIX I TEST SETUP PHOTOGRAPH	You	100tek	Anbote	Pu. Yek		4:
APPENDIX II EXTERNAL PHOTOGRAPH		br.	anbote	And		43
APPENDIX III INTERNAL PHOTOGRAPH					br.	л-



TEST REPORT

Applicant : Shenzhen Neoon Industrial Co., LTD

Manufacturer : Shenzhen Neoon Industrial Co., LTD

Product Name : smart band smart wristband

Model No. : IT 112, IT 111, C1, H10 PLUS X7 Pro, 115 PLUS

Trade Mark : N.A

Rating(s) : Input: DC 5V, 0.5A (with DC 3.7V, 180 mAh Battery inside)

Test Standard(s) : FCC Part15 Subpart C 2018, Section 15.247

Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v05

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test	Niance /		Sept. 12~20, 2018	
Anbotek Anbotek	Compliance Laborated Anbotek		Dotte nu	
Prepared By	Anbotek Product Safety	Anbotek Anbot	otek Anbotek An	potek Anbotes
otek Anbotek	* Approved *		Engineer / Dolly Mo)	
	Anbotek Anbotek	Anbotek Anbotek	All Made with	
Reviewer			Snavy Meng	
TC VIC WCI	stek shoten A	nbotek Anbotes	k Anbotek Anbot	sek spotek
V-10/1		(Su	pervisor / Snowy Meng)	
		Anbotek And	Marie	
			Sally Zhong	
Approved & Author	ized Signer		Anbotek Anbot	k abotek
	obotek Anbotek An	botek Ambo (I	Manager / Sally Zhang)	otek Anbotek



1. General Information

1.1. Client Information

Applicant	: Shenzhen Neoon Industrial Co., LTD
Address	: Cofco Fuan Intelligent Robot Manufacturing Industrial Park, Baoan District, Shenzhen, China
Manufacturer	: Shenzhen Neoon Industrial Co., LTD
Address	: Cofco Fuan Intelligent Robot Manufacturing Industrial Park, Baoan District, Shenzhen, China
Factory	: Shenzhen Neoon Industrial Co., LTD
Address	Cofco Fuan Intelligent Robot Manufacturing Industrial Park, Baoan District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	smart band smart wristband	Anbotek Anbotek Anbo botek Anbo				
Model No.	:	700 Pr. 1	7 Pro, 115 PLUS except the appearance color, so we prepare "IT 112"				
Trade Mark	:	N.A.	Inbotek Anbotek Anbotek Anbotek				
Test Power Supply	:	AC 240V, 50Hz for adapter/ AC	120V, 50Hz for adapter / DC 3.7V Battery inside				
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)					
		Operation Frequency: Transfer Rate:	2402MHz~2480MHz 1 Mbits/s				
Product		Number of Channel:	40 Channels				
Description	:	Modulation Type:	GFSK				
		Antenna Type:	PCB Antenna				
		Antenna Gain(Peak):	TdBi Anbotek Anbotek Anbotek				
	Model No. Trade Mark Test Power Supply Test Sample No. Product	Model No. : Trade Mark : Test Power Supply : Test Sample No. :	Model No. IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) Trade Mark IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) Trade Mark IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.) IT 112, IT 111, C1, H10 PLUS X (Note: All samples are the same of for test only.)				

Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used During Test

	Adapter	:	Manufacturer: ZTE	VI.
c)			M/N: STC-A2050I1000USBA-C	
			S/N: 201202102100876	
			Input: 100-240V~50/60Hz 0.3A	¥,
			Output: DC 5V, 1000mA	

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	botek Anbotek Anbotek Anbotek Anbotek Anbotek Anbotek
Mode 2	CH19 Anbotek Anbotek Anbotek
Mode 3	CH39 Anbotek Anbotek Anbotek
Mode 4	Keeping TX+ Charging Mode

For Conducted Emission					
Final Test Mode	Description				
Mode 4	Keeping TX+ Charging Mode	nbe			

	For Radiated Emission							
F	inal Test Mo	de			Description			
Aupor	Mode 1	otek A	poter Aup	otek h	CH00	ote Am	hotek	Anbotek
Anbo	Mode 2	nbotek	Aupoter L	unb wotek	CH19	mboto	An.	Anbo
oten Ar	Mode 3	anbotek.	Anbote.	Ann	СН39	Anbor	Ai.	P.C
Apoter	Mode 4	Anbotek	Aupore	Kee	eping TX+ Chargi	ing Mode	k who	tek

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps for radiated emission due to the highest RF output power.



1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10,000	2422	19	2440	28	2458	37	2476
02	2406	ek 11 An	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		olek I
06	2414	15,000	2432	24	2450	33	2468		
07	2416	16 _M	2434	25	2452	34	2470		
08	2418	ote ^k 17	2436	26	2454	⁸ 35 M	2472		


Note:

- 1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
- 2. EUT built-in battery-powered, fully-charged battery use of the test battery.




1.6. Description Of Test Setup

CE

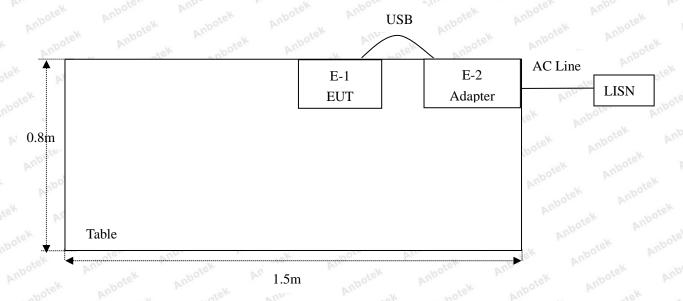

RE

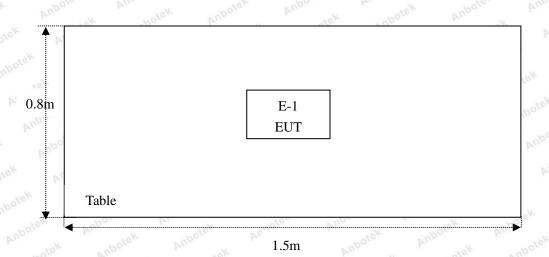



1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.
	100	100	You	70° Di.	-40t-	Interval
otek 1. nbotek	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.00	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
Anbox 7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 19, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Apr. 02, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Nov. 01, 2018	1 Year

1.7. Measurement Uncertainty

0	Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)	Anbotek Anbote Am
			Ur = 3.8 dB (Vertical)	Anbotek Anbot An
71			Anbotek Anbote And	Anbotek Anbotek
	Conduction Uncertainty	:	Uc = 3.4dB	otek Anboten Anbo

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Test Item	Result
Antenna Requirement	PASS
Conducted Emission	PASS
Spurious Emission	PASS
Conducted Peak Output Power	PASS
6dB Occupied Bandwidth	PASS
Power Spectral Density	PASS
Band Edge	PASS
	Antenna Requirement Conducted Emission Spurious Emission Conducted Peak Output Power 6dB Occupied Bandwidth Power Spectral Density


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207	Anbote Ans botek	Anbotek Anbo stek	
	Engguenav	Maximum RF	Line Voltage (dBuV)	
	Frequency	Quasi-peak Level	Average Level	
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *	
è	500kHz~5MHz	56	46	
	5MHz~30MHz	60	50	
Remark: (1) *Dec	creasing linearly with logarithm of	of the frequency.	notek anbote	

(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

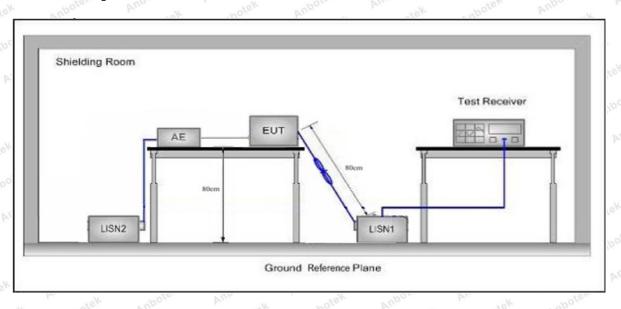

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room

Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 240V, 60Hz for adapter

Comment: Live Line

-2.32

11.24

3.2060

3.2659

11

12

20.16

20.17

17.84

31.41

46.00

56.00


-28.16

-24.59

AVG

QP

Tem.: 22.3℃ Hum.: 51%

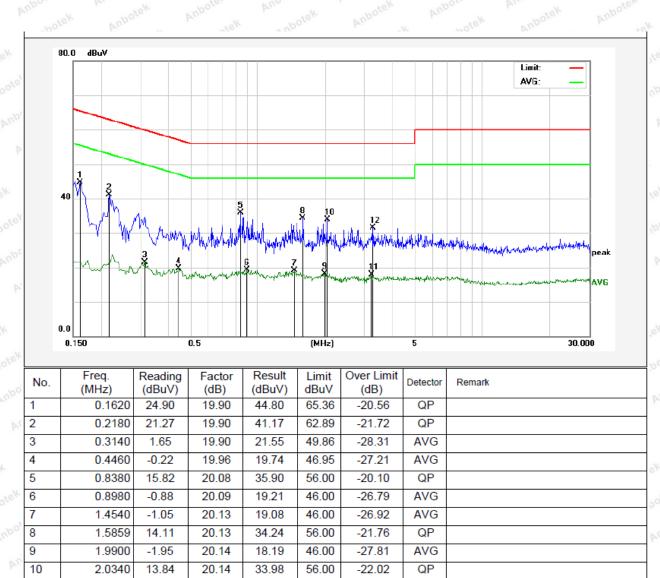

10

11

12

1.9300

2.5700

2.9660

0.17

-1.34

14.61

20.14

20.15

20.16

20.31

18.81

46.00

46.00

56.00

-25.69

-27.19

-21.23

AVG

AVG

FCC ID: 2AHMD-IT112


Conducted Emission Test Data

Test Site: 1# Shielded Room

Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 240V, 60Hz for adapter

Comment: Neutral Line

Tem.: 22.3°C Hum.: 51%

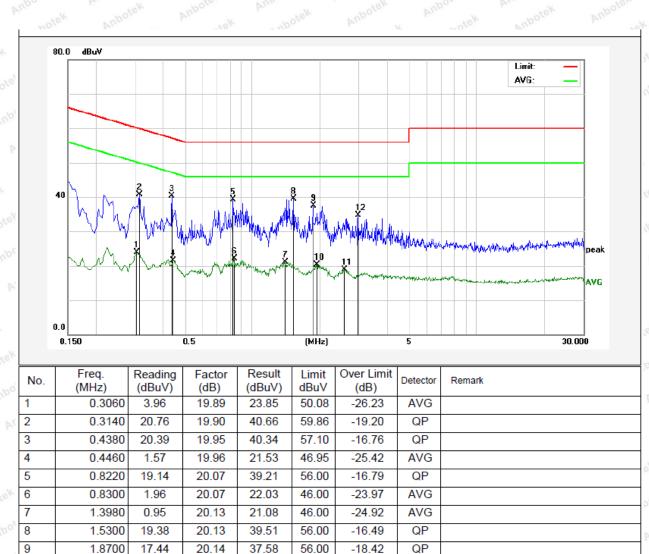



9

10

11 12 1.6700

2.0340

3.2659

3.5340

9.38

-2.85

-3.34

20.13

20.14

20.17

20.17

29.51

17.29

16.83

28.96

56.00

46.00

46.00

56.00


Conducted Emission Test Data

Test Site: 1# Shielded Room

Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 120V, 60Hz for adapter

Comment: Live Line

Tem.: 22.3℃ Hum.: 51%

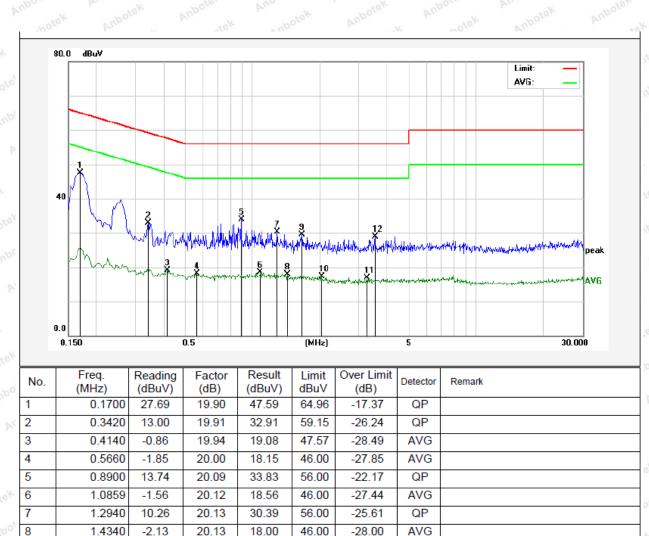

-26.49

-28.71

-29.17

-27.04

QP

AVG

AVG

QP




Conducted Emission Test Data

Test Site: 1# Shielded Room

Operating Condition: Keeping TX+ Charging Mode
Test Specification: AC 120V, 60Hz for adapter

Comment: Neutral Line

Tem.: 22.3°C Hum.: 51%

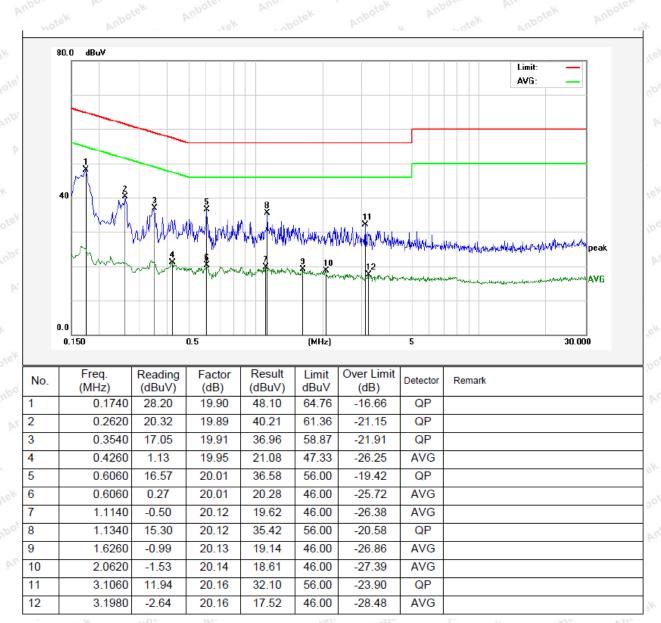

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.20	09 and 15.205			
	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	stek Anbor	ek abotel	300
	0.490MHz-1.705MHz	24000/F(kHz)	nbotek Anbo	tek by	stell 30 Anthore
	1.705MHz-30MHz	30	Anbotek A	lbos by	abotek 30 Anb
Test Limit	30MHz~88MHz	100	40.0	Quasi-peak	Anbotek A
	88MHz~216MHz	150 nootek	43.5	Quasi-peak	Anb3tek
	216MHz~960MHz	200	46.0	Quasi-peak	Albotek Albotek
	960MHz~1000MHz	500	54.0	Quasi-peak	tek 3 Anbote
	1000 41	500	54.0	Average	botek 3 Anbr
	Above 1000MHz	And hotek	74.0	Peak	abote 3

Remark:

- (1) The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

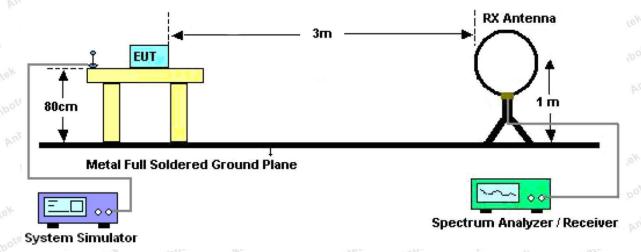


Figure 1. Below 30MHz



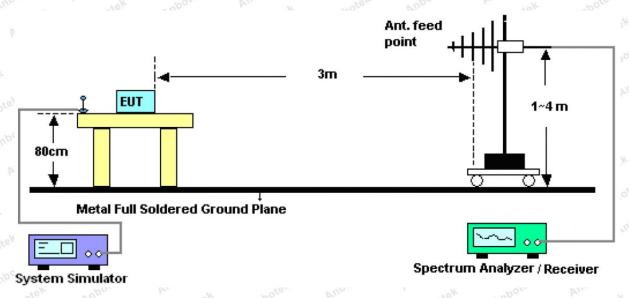


Figure 2. 30MHz to 1GHz

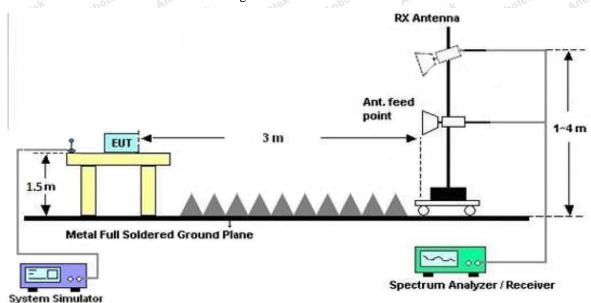


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying



aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, pre-scan the GFSK modulation, and found the GFSK modulation Middle channel which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Test Results (30~1000MHz)

Job No.: SZAWW190111007-01 Temp.(°C)/Hum.(%RH): 23.4°C/59%RH

Standard: FCC PART 15C Power Source: DC 3.7V Battery inside

Test Mode: Mode 2 Polarization: Horizontal

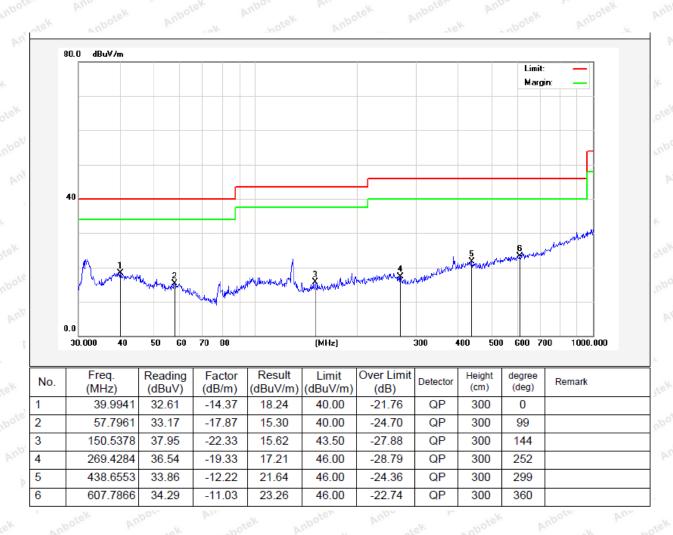




Test Results (30~1000MHz)

Job No.: SZAWW190111007-01 Temp.(℃)/Hum.(%RH): 23.4℃/59%RH

Standard: FCC PART 15C Power Source: DC 3.7V Battery inside

Test Mode: Mode 2 Polarization: Vertical

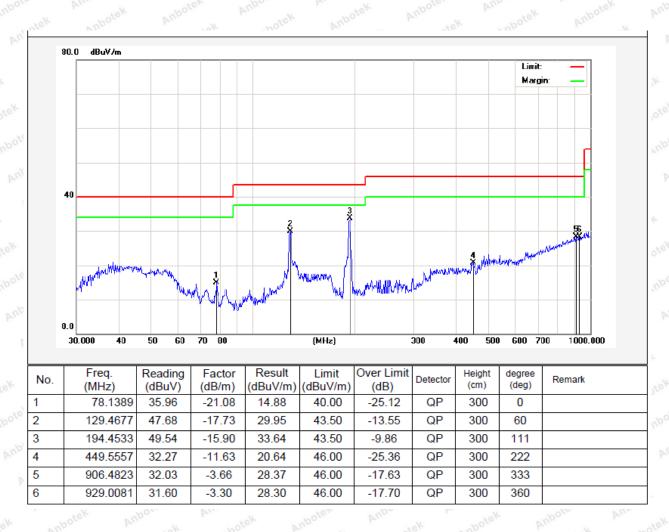

Test Results (1GHz-25GHz)

Test Mode: CH00 Test channel: Lowest								
				Peak Value				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	38.05	34.04	6.58	34.09	44.58	74.00	-29.42	botek V
7206.00	32.33	37.11	7.73	34.50	42.67	74.00	-31.33	AnbV
9608.00	31.91	39.31	9.23	34.79	45.66	74.00	-28.34	V
12010.00	** *	otek P	upoto. b	in hotek	Anbotek	74.00	An abotek	V
14412.00	**	nbotek	Aupolen	Aug Potek	Anbotek	74.00	k anboi	e ^K V
4804.00	42.49	34.04	6.58	34.09	49.02	74.00	-24.98	poteK
7206.00	34.15	37.11	7.73	34.50	44.49	74.00	-29.51	Anb H
9608.00	31.40	39.31	9.23	34.79	45.15	74.00	-28.85	Н
12010.00	* *	stek A	botel P	upo otek	Anbotek	74.00	Anthotek	Н
14412.00	*	potek	Anboies	Aub. ofek	Anbotek	74.00	A NOT	e ^N H
V	AV.		A	verage Value	e			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	26.73	34.04	6.58	34.09	33.26	54.00	-20.74	V
7206.00	20.93	37.11	7.73	34.50	31.27	54.00	-22.73	V
9608.00	19.96	39.31	9.23	34.79	33.71	54.00	-20.29	V
12010.00	Anbot*	Aup	Anbotek	Anbot	rak Am	54.00	Jek Ani	V
14412.00	***	And	ek Anbo	lek Anb	or by	54.00	nboten	V
4804.00	31.04	34.04	6.58	34.09	37.57	54.00	-16.43	H
7206.00	23.15	37.11	7.73	34.50	33.49	54.00	-20.51	H
9608.00	19.75	39.31	9.23	34.79	33.50	54.00	-20.50	H
12010.00	Anbotek	Anboro	Anbotek	Anbore	K Anbu	54.00	kek Vup	Н
14412.00	Anl'* lek	Vupor	k ho	ek Anb	oter Aug	54.00	potek F	H H

Test Results (1GHz-25GHz)

Test Mode: 0	CH19			Test	channel: Midd	le		
				Peak Value				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	37.07	34.38	6.69	34.09	44.05	74.00	-29.95	potek
7320.00	31.68	37.22	7.78	34.53	42.15	74.00	-31.85	AnbVe
9760.00	31.33	39.46	9.35	34.80	45.34	74.00	-28.66	V
12200.00	tek *	otek P	upote. b	'un Potek	Anbotek	74.00	A. abotek	V
14640.00	**	nbotek	Anboten	Ansbotek	Anbotek	74.00	k vupo,	e ^k V
4880.00	41.31	34.38	6.69	34.09	48.29	74.00	-25.71	pote ^K H
7320.00	33.41	37.22	7.78	34.53	43.88	74.00	-30.12	$_{Anb}\mathbf{H}^{e^{V}}$
9760.00	30.73	39.46	9.35	34.80	44.74	74.00	-29.26	Н
12200.00	* *	stek bi	pore, b	nbootek	anbotek	74.00	Am	H
14640.00	*	obotek	Anbolen	Anbo	Anbotek	74.00	y abot	₩ Н
			A	verage Valu	e			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	25.94	34.38	6.69	34.09	32.92	54.00	-21.08	V
7320.00	20.40	37.22	7.78	34.53	30.87	54.00	-23.13	V
9760.00	19.49	39.46	9.35	34.80	33.50	54.00	-20.50	, tek V
12200.00	Anbote*	Aup	Anbotek	Anbot	rek bu	54.00	ien Aut	V
14640.00	*	Anbe	ek Aupo	lek Aut	or bu	54.00	bote	V
4880.00	30.15	34.38	6.69	34.09	37.13	54.00	-16.87	Н
7320.00	22.56	37.22	7.78	34.53	33.03	54.00	-20.97	H
9760.00	19.20	39.46	9.35	34.80	33.21	54.00	-20.79	H
12200.00	Anbotek	Anboro	Anbotek	Anbore	K VUDO	54.00	lek Vup	H
14640.00	Anl'* Lek	Aupor	k anbot	ek Anb	ote. And	54.00	potek P	H H

Test Results (1GHz-25GHz)

Test Mode: 0	CH39			Test	channel: Highe	est		
				Peak Value				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	36.24	34.72	6.79	34.09	43.66	74.00	-30.34	botek V
7440.00	31.13	37.34	7.82	34.57	41.72	74.00	-32.28	AnbVter
9920.00	30.84	39.62	9.46	34.81	45.11	74.00	-28.89	V
12400.00	* *	otek P	Upole, b	"un Potek	Anbotek	74.00	An apolek	V
14880.00	*	nbotek	Aupoter	Annabotek	Anbotek	74.00	sk anbol	e ^k V
4960.00	40.31	34.72	6.79	34.09	47.73	74.00	-26.27	o ^{te} H
7440.00	32.79	37.34	7.82	34.57	43.38	74.00	-30.62	Anb Hek
9920.00	30.16	39.62	9.46	34.81	44.43	74.00	-29.57	Ho
12400.00	*	stek A	Poter b	nbo	Anbotek	74.00	Anv	H
14880.00	*	botek	Aupoles	Anbe	Anbotek	74.00	y And	³ [}] H
A.C.	- 04-		A	verage Valu				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.31	34.72	6.79	34.09	32.73	54.00	-21.27	V
7440.00	19.97	37.34	7.82	34.57	30.56	54.00	-23.44	V
9920.00	19.11	39.62	9.46	34.81	33.38	54.00	-20.62	, ekV
12400.00	Anbote*	Anbo	Anbotek	Anbot	Pur	54.00	ofer Aut	V
14880.00	*	Aube	ek Anbo	lek Vu	COA MA	54.00	hotek	V
4960.00	29.43	34.72	6.79	34.09	36.85	54.00	-17.15	H
7440.00	22.08	37.34	7.82	34.57	32.67	54.00	-21.33	H
9920.00	18.75	39.62	9.46	34.81	33.02	54.00	-20.98	H
12400.00	Ambotek	Anbore	Anapotek	Anbott	K Mupo	54.00	tek Aup	Н
14880.00	An/*lek	Vupor	ek Anboi	ek Ant	ole, Yup,	54.00	obotek p	H H


Remark:

- 1. Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:





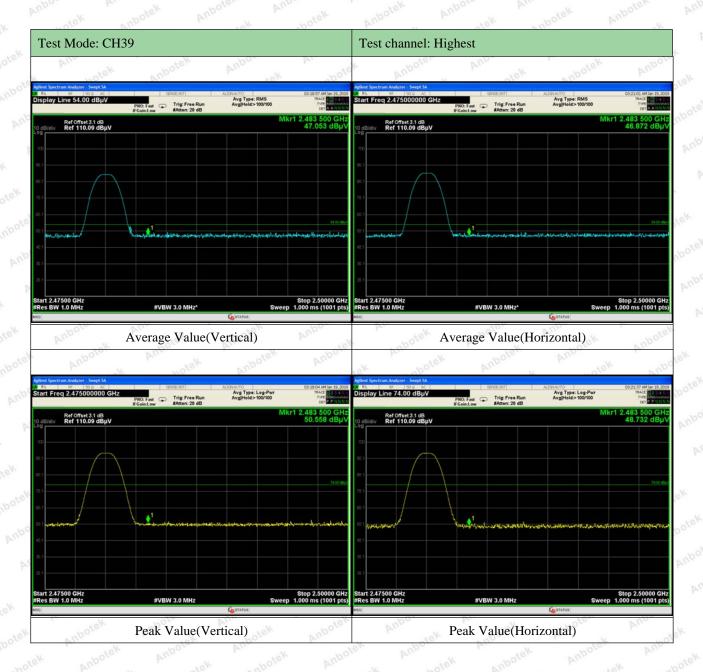

Remark:


1. Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Ž.	Test Standard	FCC Part15 C	Section 15.24	7 (b)(3)	Ans	Anbotek	Anbo	þ.,
	Test Limit	30dBm	Anbotek	Anboro	Air.	Anbotek	Anbo	

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- 1. Set the RBW ≥DTS bandwidth.
- 2. Set the VBW≥3*RBW.
- 3. Set the span $\geq 3*RBW$.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data

Test Item	:	Max. peak output power	Test Mode :	CH Low ~ CH High
Test Voltage	:	DC 3.7V Battery inside	Temperature :	24℃
Test Result	:	PASS	Humidity :	55%RH

	Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
4	2402	-2.897	30	PASS
* Nate	2440	-3.443	botek 30 Anbotek	PASS
abotek	2480	-3.283	30 Magaza	PASS





CH: Low



CH: Middle



CH: High

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

(0)	Test Standard	FCC Part15 (C Section 15.24	7 (a)(2)	Andbotek	Anbotek	Anbo.	pe-
	Test Limit	>500kHz	Anbotek	Aupor	Air.	Anbotek	Anbo	t-

6.2. Test Setup



6.3. Test Procedure

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as:

RBW = 100kHz, $VBW \ge 3*RBW = 300kHz$,

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

- 4. Mark the peak frequency and -6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

6.4. Test Data


Test Item	:	6dB Bandwidth	Test Mode :	CH Low ~ CH High
Test Voltage	:	DC 3.7V Battery inside	Temperature :	24℃
Test Result	:	PASS	Humidity :	55%RH

Channel	Thannel Frequency(MHz) Bandwidth (kHz)		Frequency(MHz) Bandwidth (kHz)		Limit (kHz)	Results
Low	2402	688.8	rek Pur potek	PASS		
Middle	2440	687.8	>500	PASS		
High High	2480	696.4	hor tek hote	PASS		





CH: Low

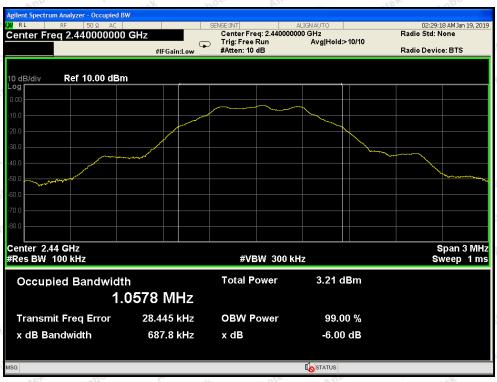

CH: Middle




CH: High

7. Power Spectral Density Test

7.1. Test Standard and Limit

77	Test Standard	FCC Part15 C	Section 15.24	7 (e)	An botek	Anbotek	Anbo.	2.
	Test Limit	8dBm	Anbotek	Anbore	An. botek	Anbotek	Anbo	F 8

7.2. Test Setup



7.3. Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
- 3. Record the max. reading.
- 4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data


Test Item : Power Spectral Density Test Mode : CH Low ~ CH High

Test Voltage : DC 3.7V Battery inside Temperature : 24°C

Test Voltage : DC 3.7V Battery inside Temperature : 24° C Test Result : PASS Humidity : 55%RH

Channel	Frequency (MHz)	PSD (dBm/KHz)	Limit (dBm/KHz)	Results
Low	2402	-18.368	8.00	PASS
Middle	2440	-18.976	8.00	PASS
hote High Anbote	2480	-18.750	8.00	PASS



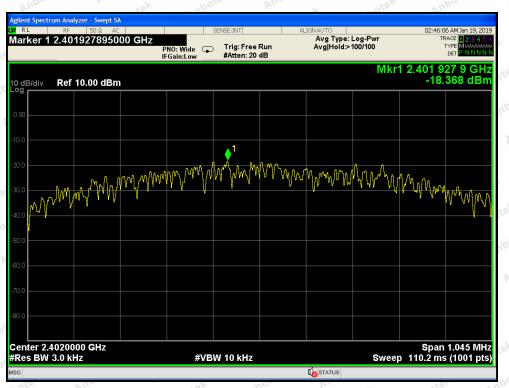

CH: Low



CH: Middle





CH: High

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:

- 1. Set the RBW = 100KHz.
- 2. Set the VBW = 300KHz.
- 3. Sweep time = auto couple.
- 4. Detector function = peak.
- 5. Trace mode = max hold.
- 6. Allow trace to fully stabilize.

8.4. Test Data


Test Item : Band edge : CH Low ~ CH High

Test Voltage : DC 3.7V Battery inside Temperature : 24°C


Test Result : PASS Humidity : 55%RH

Frequency Band (MHz)		Delta Peak to Band Emission (dBc)	Limit (dBc)	Results	
poter	2400	55.871	>20	PASS	
Aupore	2483.5	63.164	>20	PASS	



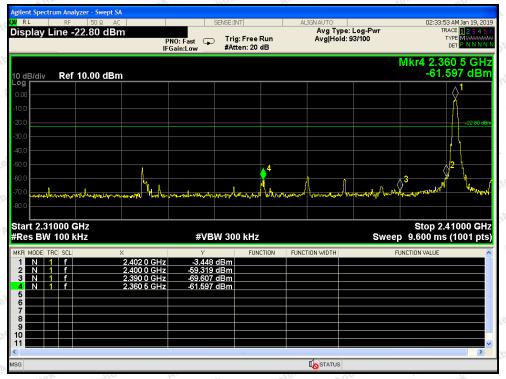


CH: Low

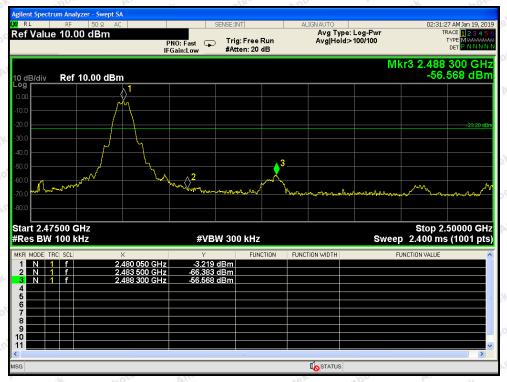


CH: High




Conducted Emission Method

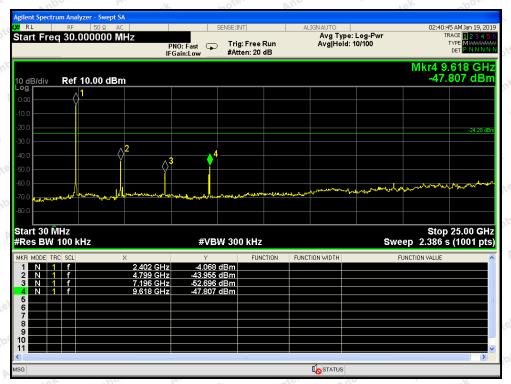

CH: Low

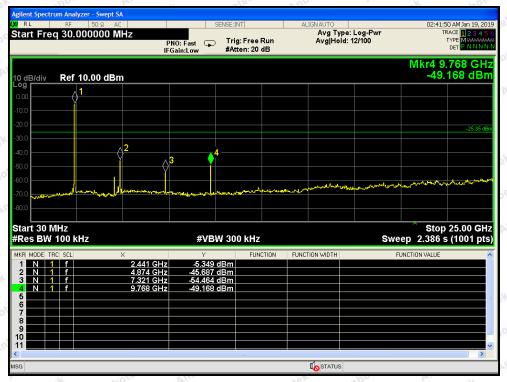

CH: Middle

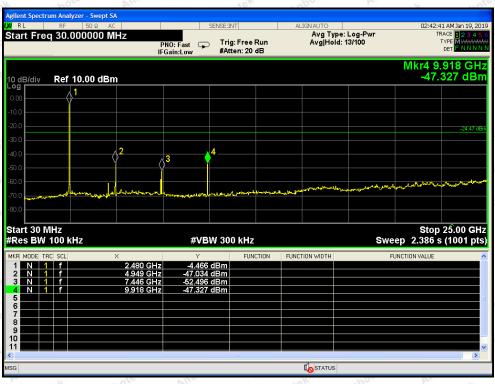

CH: High

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
	1) 15 202 with sampletek Anborek Anborek Anborek Anborek
	1) 15.203 requirement:
	An intentional radiator shall be designed to ensure that no antenna other than that furnished by
	the responsible party shall be used with the device. The use of a permanently attached
	antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer
	Arrive Steller Miles In the Second Arrive Arrive
	may design the unit so that a broken antenna can be replaced by the user, but the use of a
Requirement	standard antenna jack or electrical connector is prohibited.
	2) 15.247(c) (1)(i) requirement:
	Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed.
	Point-to-point operations may employ transmitting antennas with directional gain greater than
	6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1
	ate and the not All ten into
	dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The bluetooth antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 1 dBi. It complies with the standard requirement.





APPENDIX I -- TEST SETUP PHOTOGRAPH






Photo of Radiation Emission Test







APPENDIX II -- EXTERNAL PHOTOGRAPH
















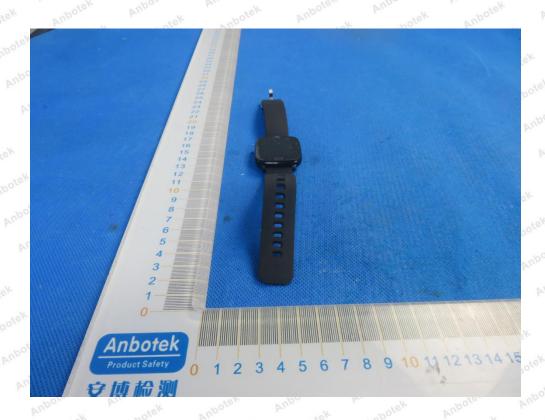







APPENDIX III -- INTERNAL PHOTOGRAPH







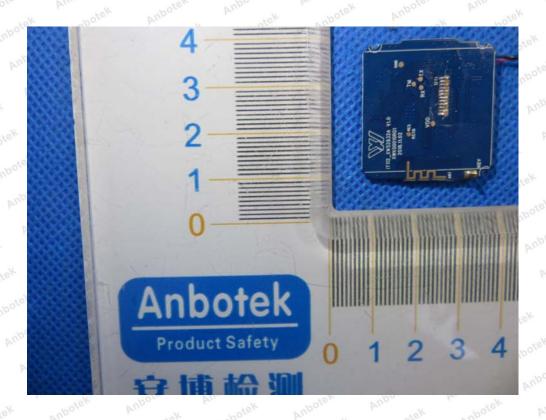

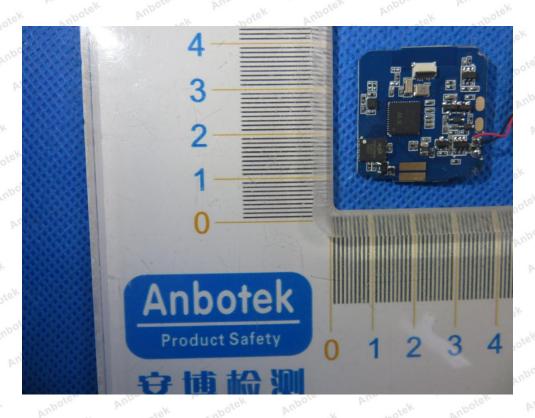







--- End of Report -