



STUNT VEHICLE SPIN DRIFTER 360

HAT





SPIN DRIFTER 360°

The car requires 6 "AA" 1.5V batteries (not included). The controller requires one 9V battery (not included). When changing batteries, adult supervision is required. Use alkaline batteries for the best performance.

- Carefully remove items from the package.
 Locate the battery door on the bottom of the car.
 Pull the latch on the door to the left and lift up to access the battery compartment. Insert 6 "AA" batteries while observing the correct polarity (Fig.2).
 Replace the battery compartment door.
 Slide the battery door on the back of the controller down to open.
 Insert one 9V battery while observing the correct polarity (Fig.3).
 Replace the battery compartment door.
 Switch both the car and controller power switches to the "ON" position.

BATTERY INSTALLATION

SAFETY PRECAUTIONS

- Do not operate during thunderstorms or rain.

 Avoid water, sand and snow when operating your car.

 Do not submerge car or controller in water.

 Never operate your car on the street or highway.

 Adult supervision is recommended when operating this car.

 Remove all batteries when not in use to avoid accidental operation.

 Never operate your car in a confined or crowded area, and do not use people or animals as obstacles.
- people or animals as obstacles.


 Do not run your car into furniture, objects or hard surfaces, as this will cause damage to both the objects and the car.
- while the car is switched to "ON".
- Do not leave car or controller near sources of heat or under direct sunlight for long periods of time.
 Do not leave car or controller outside overnight. Dampness is harmful to interior components.









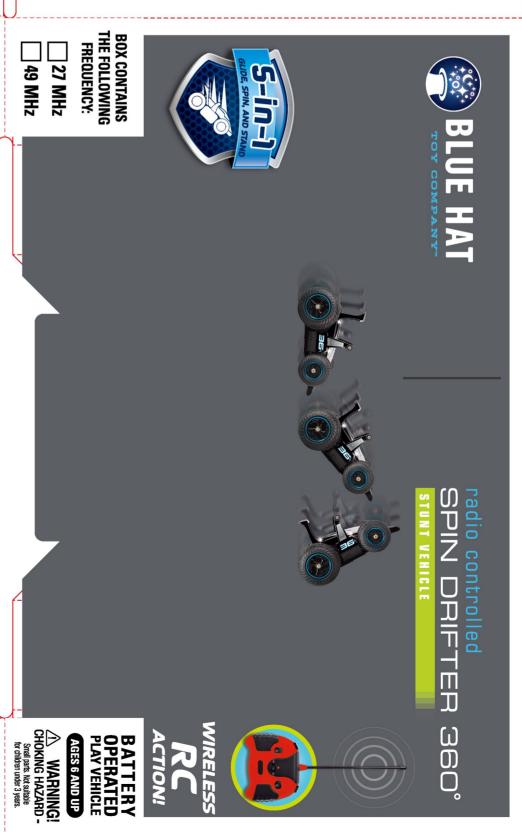

BOX CONTAINS THE FOLLOWING FREQUENCY:



