FCC RF Test Report

APPLICANT : Altocirro LLC

EQUIPMENT: Electronic Display Device

MODEL NAME : CW96BW FCC ID : 2AHSB-7349

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E) CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was completed on Feb. 02, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 1 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAF	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Product Feature of Equipment Under Test	5
	1.3	Product Specification of Equipment Under Test	6
	1.4	Modification of EUT	6
	1.5	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
	1.6	Testing Location	8
	1.7	Applicable Standards	
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	g
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	CON	DUCTED TEST RESULT	12
	3.1	Measuring Instruments	12
	3.2	Test Setup	12
	3.3	Test Result of Conducted Test	12
	3.4	Conducted Output Power	13
	3.5	Peak-to-Average Ratio	14
	3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement	15
	3.7	Conducted Band Edge	16
	3.8	Conducted Spurious Emission	17
	3.9	Frequency Stability	18
4	RADI	ATED TEST ITEMS	19
	4.1	Measuring Instruments	19
	4.2	Test Setup	19
	4.3	Test Result of Radiated Test	19
	4.4	Effective Radiated Power and Effective Isotropic Radiated Power Measurement	20
	4.5	Field Strength of Spurious Radiation Measurement	22
5	LIST	OF MEASURING EQUIPMENT	23
6	UNC	ERTAINTY OF EVALUATION	24
ΑP	PEND	IX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	IX B. TEST RESULTS OF RADIATED TEST	

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 2 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG662705-01A	Rev. 01	Initial issue of report	Mar. 10, 2017

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 3 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS
3.6	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	Reporting Only	PASS
3.7	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS
0.0	§2.1055 §22.355	Frequency Stability	< 2.5 ppm for Part 22	DAGG
3.9	§2.1055 §24.235	for Temperature & Voltage	Within Authorized Band	PASS
4.4	§22.913(a)(2) Effective Radiated Power		< 7 Watts	PASS
4.4	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS
4.5	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 4 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

1 General Description

1.1 Applicant

Altocirro LLC

7250 Redwood Blvd., Suite 300 Novato, California 94945

1.2 Product Feature of Equipment Under Test

Product Feature						
Equipment	Electronic Display Device					
Model Name	CW96BW					
FCC ID	2AHSB-7349					
	GSM/EGPRS/WCDMA/HSPA/LTE					
EUT supports Radios application	WLAN 11b/g/n HT20					
	Bluetooth BR/EDR					

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 5 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

1.3 Product Specification of Equipment Under Test

Standards	Standards-related Product Specification					
	GSM/GPR	·				
		824.2 MHz ~ 848.8 MHz				
		1850.2 MHz ~ 1909.8MHz				
Tx Frequency	WCDMA:					
		826.4 MHz ~ 846.6 MHz				
		1852.4 MHz ~ 1907.6 MHz				
	GSM/GPR					
	850:	869.2 MHz ~ 893.8 MHz				
	1900:	1930.2 MHz ~ 1989.8 MHz				
Rx Frequency	WCDMA:					
	Band V:	871.4 MHz ~ 891.6 MHz				
	Band II:	1932.4 MHz ~ 1987.6 MHz				
	<ant. 1=""></ant.>					
	GSM/GPR	S/EDGE:				
	850:	31.36 dBm				
	1900:	28.58 dBm				
	WCDMA:					
	Band V:	22.17 dBm				
	Band II:	22.55 dBm				
Maximum Output Power to Antenna	<ant. 2=""></ant.>					
	GSM/GPRS/EDGE:					
		31.07 dBm				
		28.27 dBm				
	WCDMA:					
	Band V:	21.77 dBm				
	Band II:	22.17 dBm				
Antenna Type	Fixed Interr					
	<ant. 1=""></ant.>					
	Cellular Band: -0.75 dBi					
Antenna Gain	PCS Band:	1.86 dBi				
	<ant. 2=""></ant.>					
		nd: -1.63 dBi				
	PCS Band:					
	GSM: GMS					
	GPRS: GMSK EDGE: GMSK / 8PSK					
Type of Modulation	WCDMA: BPSK (Uplink)					
	HSDPA: 16QAM (Downlink)					
	HSUPA: QPSK (Uplink)					

Report No.: FG662705-01A

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 6 of 24

 TEL: 886-3-327-3456
 Report Issued Date
 : Mar. 10, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 01

FCC ID : 2AHSB-7349 Report Template No.: BU5-FG22/24/27 Version 1.2

1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

<Ant. 1>

FCC Rule	Rule Frequency Range (MHz) System		Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.9661	0.0132 ppm	246KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.2323	0.0108 ppm	249KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.1089	0.0084 ppm	4M07F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	1.2972	0.0064 ppm	247KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.5383	0.0282 ppm	249KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.3119	0.0059 ppm	4M09F9W

<Ant. 2>

FCC Rule	CC Rule Frequency Range (MHz) System		Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.8054	0.0442 ppm	248KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1824	0.0132 ppm	243KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0822	0.0143 ppm	4M07F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.7145	0.0330 ppm	249KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.2547	0.0064 ppm	253KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.1611	0.0250 ppm	4M09F9W

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 7 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.
rest Site Location	TEL: +886-3-327-3456
	FAX: +886-3-328-4978
Took Site No	Sporton Site No.
Test Site No.	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,
Test Site Location	Taoyuan City, Taiwan (R.O.C.)
Test Site Location	TEL: +886-3-327-0868
	FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
rest site No.	03CH13-HY

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 8 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
- 2. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes							
Band	Radiated TCs	Conducted TCs					
CSM 950	■ GPRS class 8 Link	■ GPRS class 8 Link					
GSM 850	■ EDGE class 8 Link	■ EDGE class 8 Link					
CCM 4000	■ GPRS class 8 Link	■ GPRS class 8 Link					
GSM 1900	■ EDGE class 8 Link	■ EDGE class 8 Link					
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 9 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

2.2 Connection Diagram of Test System

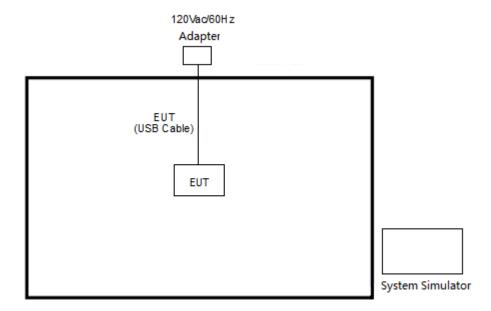

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Adapter	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).
=
$$4.2 + 10 = 14.2$$
 (dB)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 10 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

2.5 Frequency List of Low/Middle/High Channels

Frequency List							
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest			
GSM850	Channel	128	189	251			
GSIVIOSU	Frequency	824.2	836.4	848.8			
WCDMA	Channel	4132	4182	4233			
Band V	Frequency	826.4	836.4	846.6			
GSM1900	Channel	512	661	810			
G2M1900	Frequency	1850.2	1880.0	1909.8			
WCDMA	Channel	9262	9400	9538			
Band II	Frequency	1852.4	1880.0	1907.6			

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 11 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

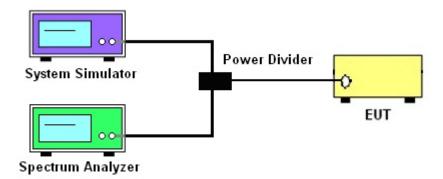

3.2.3 Frequency Stability

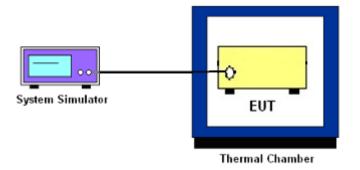

3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 12 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 13 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 14 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- 6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 16 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 17 of 24

Report Issued Date : Mar. 10, 2017

Report Version : Rev. 01

Report No.: FG662705-01A

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 18 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

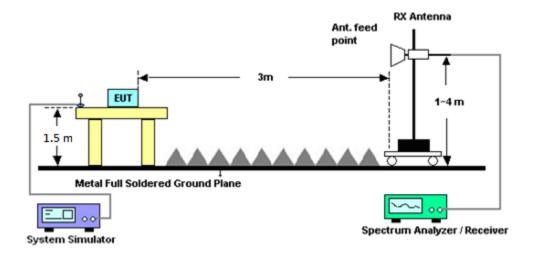

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 19 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No.: FG662705-01A

4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
- 2. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
- 3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- 4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. Tx Cable loss + Substitution antenna gain Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP = LVL + Correction factor and ERP = EIRP 2.15. Take the record of the output power at substitution antenna.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 20 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 21 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG662705-01A

4.5.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12.ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

FCC ID: 2AHSB-7349 Report Template No.: BU5-FG22/24/27 Version 1.2

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 27, 2016	Jan. 25, 2017 ~ Feb. 02, 2017	Jun. 26, 2017	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 16, 2016	Jan. 25, 2017 ~ Feb. 02, 2017	Nov. 15, 2017	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;Cur rent:0~5A	Nov. 22, 2016	Jan. 25, 2017 ~ Feb. 02, 2017	Nov. 21, 2017	Conducted (TH03-HY)
Base Station(Measu	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 03, 2016	Jan. 25, 2017 ~ Feb. 02, 2017	Aug,04, 2017	Conducted (TH03-HY)
Amplifier	Sonoma-Instrum ent	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Dec. 20, 2017	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&008	40103&04	30MHz to 1GHz	Jan. 07, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 06, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	Apr. 25, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Apr. 24, 2017	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-1	1590074	1GHz~18GHz	Jun. 27, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Jun. 26, 2017	Radiation (03CH13-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Jun. 13, 2017	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Jan. 09, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 08, 2018	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	N/A	Mar. 14, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Mar. 13, 2017	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1m~4m	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jan. 18, 2017 ~ Jan. 21, 2017	N/A	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz- 40GHz	Nov. 08, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 07, 2017	Radiation (03CH13-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 04, 2017	Jan. 18, 2017 ~ Jan. 21, 2017	Jan. 03, 2018	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 08, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Nov. 07, 2017	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 31, 2016	Jan. 18, 2017 ~ Jan. 21, 2017	Mar. 30, 2017	Radiation (03CH13-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 23 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report No. : FG662705-01A

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Managed and the sectod of the Comment and the Comment	
Measuring Uncertainty for a Level of	4.90
Confidence of 95% (U = 2Uc(y))	4.50

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	5.40
Confidence of 95% (U = 2Uc(y))	5.40

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : 24 of 24
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

<Ant. 1>

	Conducted Power (*Unit: dBm)					
Band		GSM850			GSM1900	
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	31.33	31.36	31.32	28.52	28.50	28.58
GPRS class 10	28.53	28.61	28.63	25.94	25.92	25.97
EGPRS class 8	25.44	25.27	25.12	24.72	24.70	24.71
EGPRS class 10	22.93	22.71	22.62	22.18	22.15	22.16

	Conducted Power (*Unit: dBm)					
Band	W	CDMA Band	V	WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.17	22.16	22.15	22.47	22.46	22.55
HSDPA Subtest-1	21.91	22.09	21.98	22.46	22.45	22.54
HSDPA Subtest-2	21.79	21.85	21.84	22.19	22.22	22.44
HSDPA Subtest-3	21.52	21.63	21.62	21.84	21.93	22.10
HSDPA Subtest-4	21.30	21.50	21.46	21.65	21.72	21.80
HSUPA Subtest-1	21.00	21.14	21.28	22.00	22.14	22.12
HSUPA Subtest-2	18.76	18.74	18.78	19.26	19.40	19.55
HSUPA Subtest-3	19.57	19.66	19.74	20.15	20.05	20.19
HSUPA Subtest-4	18.76	19.06	19.05	19.30	19.56	19.57
HSUPA Subtest-5	21.69	21.83	21.82	22.20	22.15	22.41

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : A1 of A2
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

<Ant. 2>

	Conducted Power (*Unit: dBm)							
Band		GSM850			GSM850 GSM1900			
Channel	128	189	251	512	661	810		
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8		
GPRS class 8	31.06	31.07	30.92	28.04	28.15	28.27		
GPRS class 10	28.17	28.23	28.24	25.50	25.62	25.72		
EGPRS class 8	24.99	24.82	24.65	24.24	24.31	24.38		
EGPRS class 10	22.50	22.33	22.10	21.70	21.79	21.85		

	Conducted Power (*Unit: dBm)					
Band	W	CDMA Band	V	WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	21.72	21.77	21.73	22.15	22.14	22.17
HSDPA Subtest-1	21.54	21.57	21.63	22.05	22.03	22.04
HSDPA Subtest-2	21.28	21.44	21.34	21.46	21.55	21.58
HSDPA Subtest-3	21.15	21.15	21.23	21.40	21.51	21.37
HSDPA Subtest-4	20.82	20.89	21.03	20.60	20.60	20.66
HSUPA Subtest-1	20.65	20.71	20.69	21.68	21.68	21.63
HSUPA Subtest-2	18.31	18.37	18.36	19.05	19.04	19.00
HSUPA Subtest-3	19.12	19.15	19.22	20.00	20.02	20.05
HSUPA Subtest-4	18.60	18.67	18.75	19.11	19.03	19.04
HSUPA Subtest-5	21.37	21.53	21.40	21.55	21.53	21.53

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : A2 of A2
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

A1. GSM


<Ant. 1>

Peak-to-Average Ratio

Mode	GSN	Limit: 13dB	
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	3.28	
Middle CH	0.20	3.20	PASS
Highest CH	0.16	3.24	


Report No. : FG662705-01A

Mode	GSM	Limit: 13dB	
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.28	2.84	
Middle CH	0.24	2.84	PASS
Highest CH	0.24	2.64	

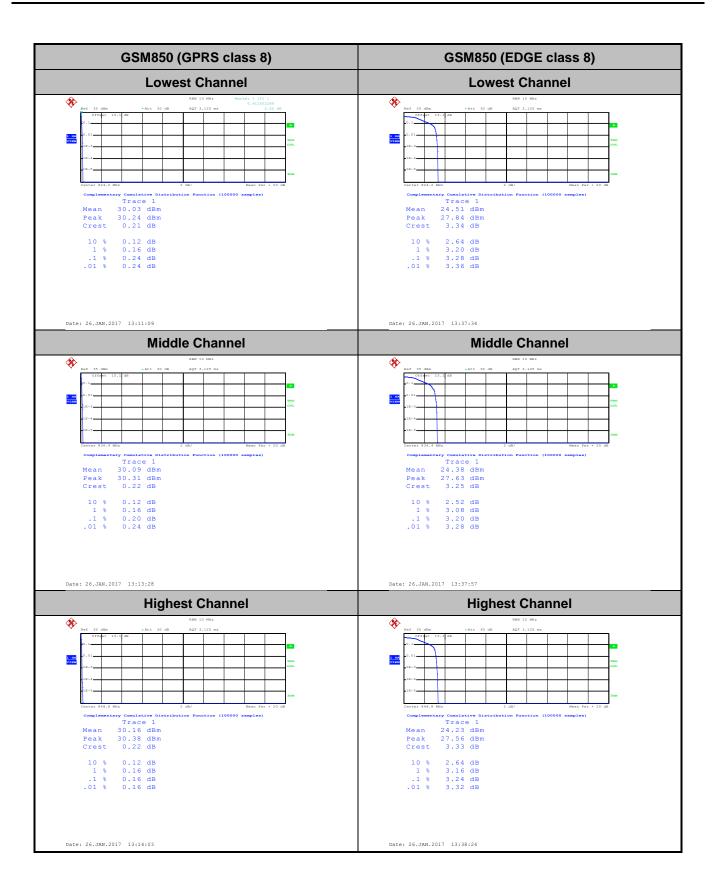

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report No.: FG662705-01A

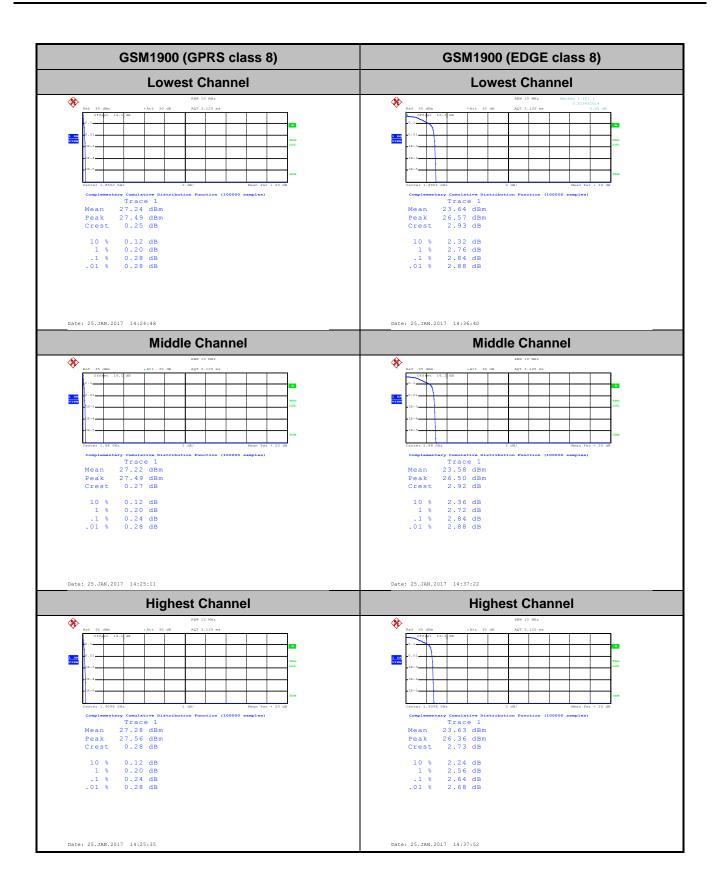

26dB Bandwidth


Mode	GSM850			
Mod.	GPRS class 8 EDGE class 8			
Lowest CH	0.308	0.291		
Middle CH	0.300	0.302		
Highest CH	0.304	0.299		

Report No. : FG662705-01A


Mode	GSM1900			
Mod.	GPRS class 8 EDGE class 8			
Lowest CH	0.314	0.300		
Middle CH	0.312	0.312		
Highest CH	0.309	0.304		

SPORTON INTERNATIONAL INC. Page Number : A1-4 of 14

Report No.: FG662705-01A

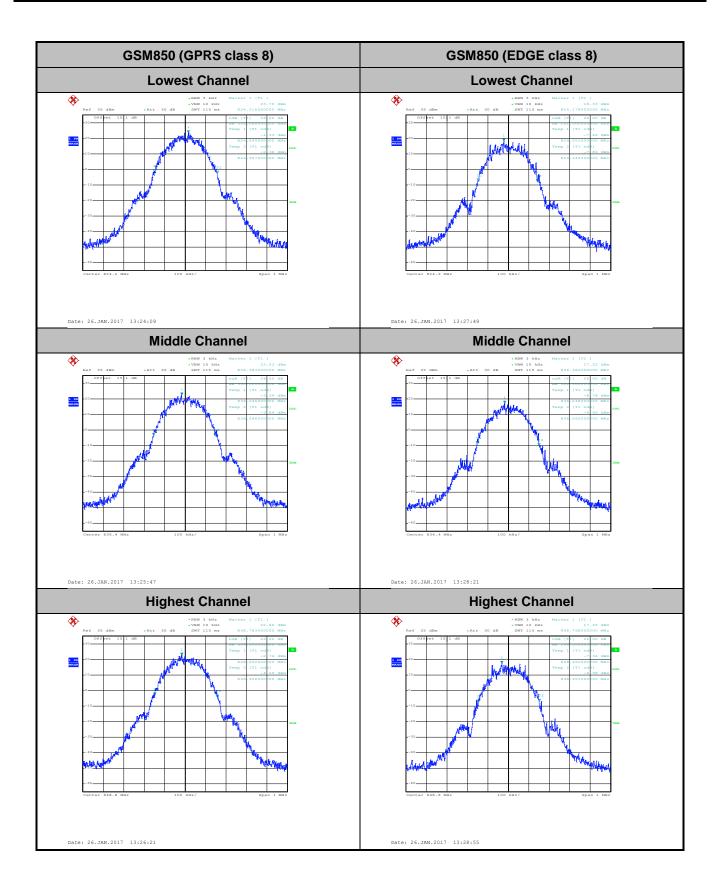



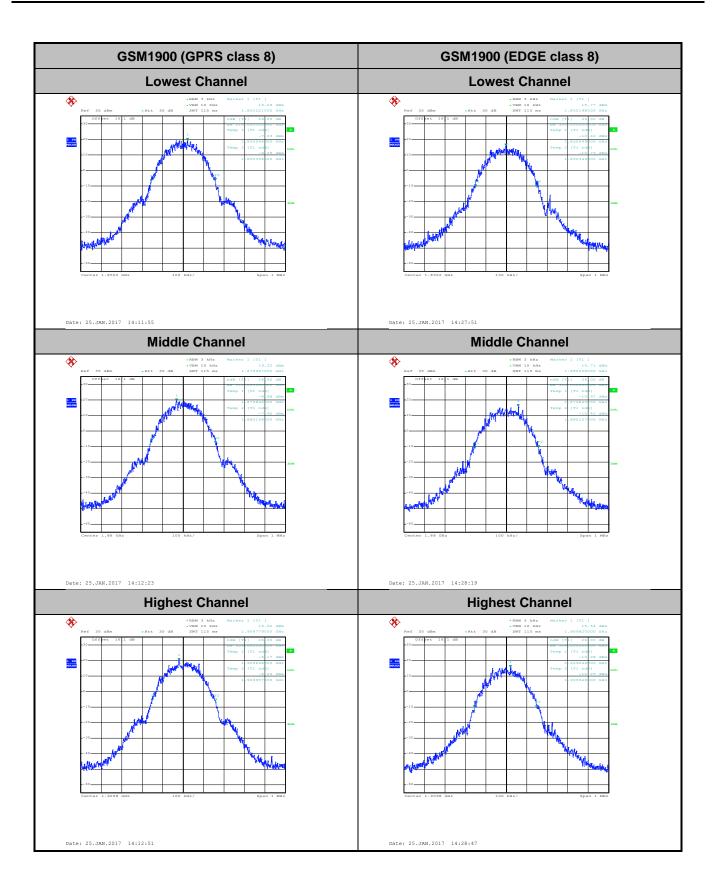

Occupied Bandwidth


Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.245	0.246
Middle CH	0.245	0.238
Highest CH	0.246	0.249

Report No. : FG662705-01A


Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.247	0.248
Middle CH	0.246	0.243
Highest CH	0.244	0.249

SPORTON INTERNATIONAL INC. Page Number : A1-7 of 14


Report No.: FG662705-01A

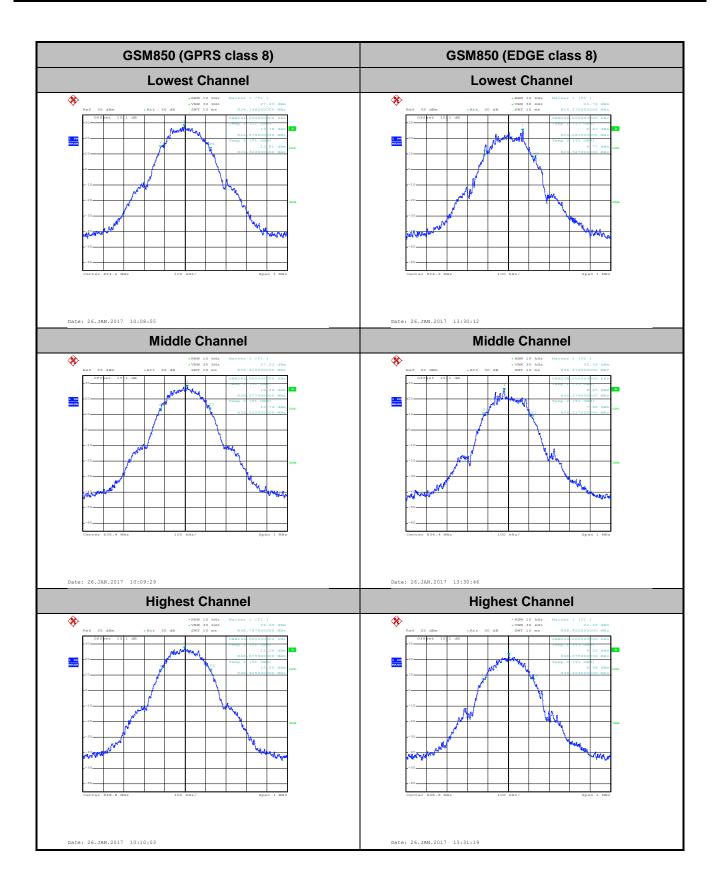


CC RF Test Report No.: FG662705-01A

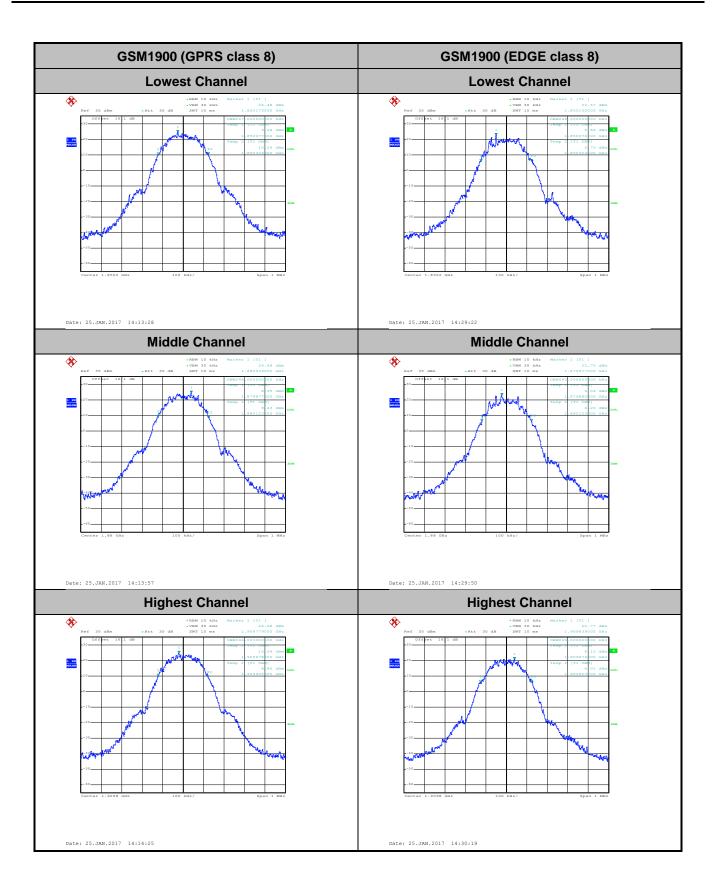


Conducted Band Edge

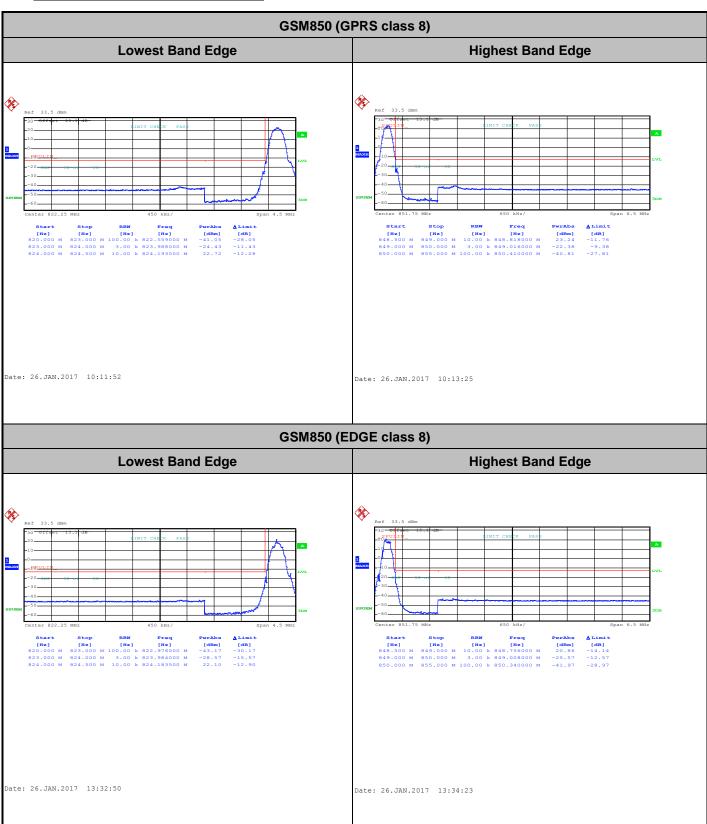

TEL: 886-3-327-3456 FAX: 886-3-328-4978 : A1-10 of 14

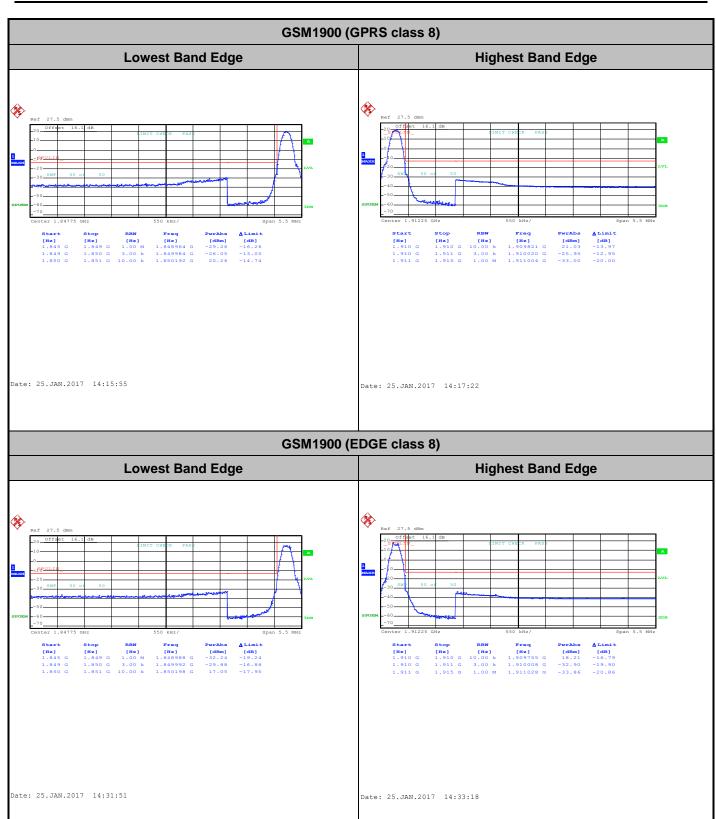


Conducted Spurious Emission

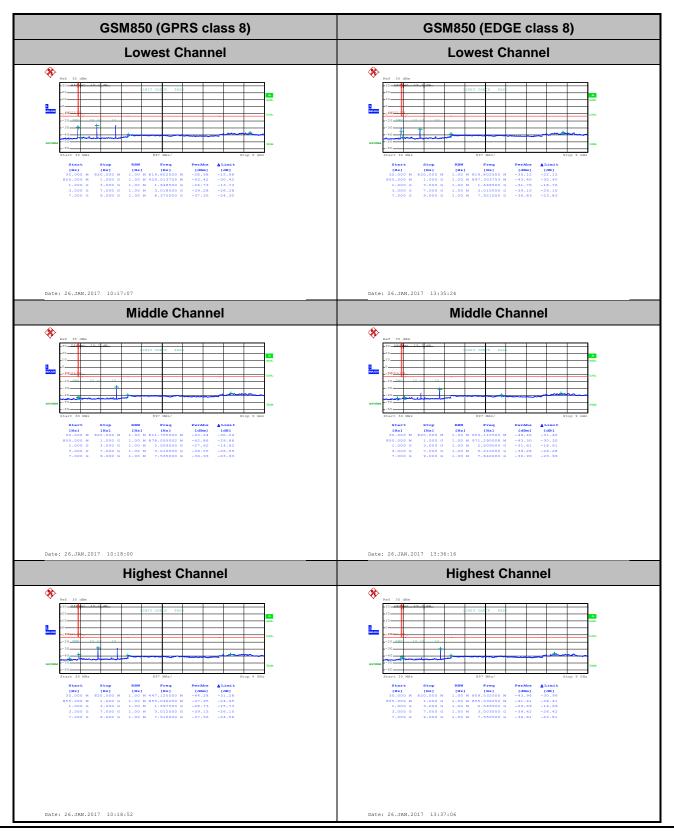

TEL: 886-3-327-3456 FAX: 886-3-328-4978



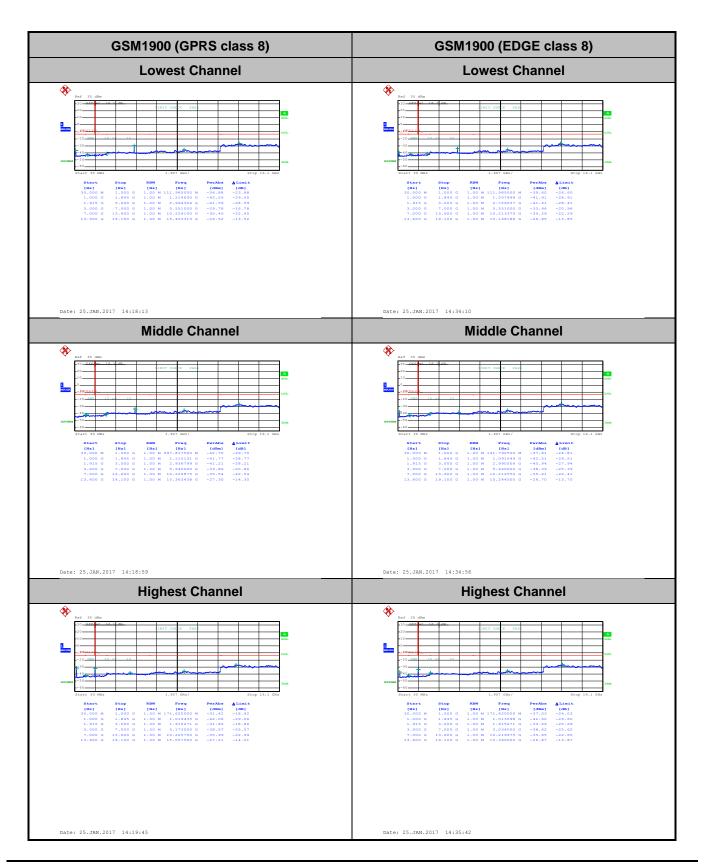

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviatio	n (ppm)	Result
50	Normal Voltage	0.0120	0.0060	
40	Normal Voltage	0.0096	0.0108	
30	Normal Voltage	0.0096	0.0024	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0024	0.0060	
0	Normal Voltage	0.0120	0.0000	
-10	Normal Voltage	0.0132	0.0012	PASS
-20	Normal Voltage	0.0072	0.0024	
-30	Normal Voltage	0.0048	0.0024	
20	Maximum Voltage	0.0036	0.0060	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0060	0.0036	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviatio	n (ppm)	Result
50	Normal Voltage	0.0016	0.0043	
40	Normal Voltage	0.0027	0.0021	
30	Normal Voltage	0.0021	0.0037	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0048	0.0059	
0	Normal Voltage	0.0064	0.0271	
-10	Normal Voltage	0.0005	0.0282	PASS
-20	Normal Voltage	0.0037	0.0261	
-30	Normal Voltage	0.0027	0.0239	
20	Maximum Voltage	0.0021	0.0021	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0000	0.0043	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A1-14 of 14

A2. WCDMA


<Ant. 1>

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.40	3.28	
Middle CH	3.28	2.88	PASS
Highest CH	3.20	2.56	

TEL: 886-3-327-3456 FAX: 886-3-328-4978



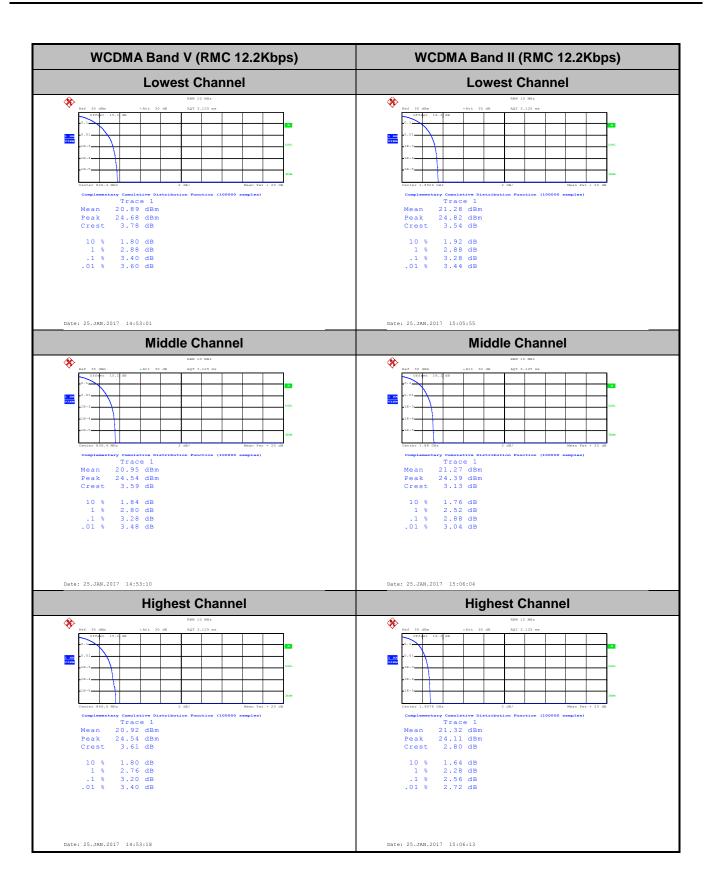


26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.61	4.62
Middle CH	4.63	4.65
Highest CH	4.61	4.66

Report No. : FG662705-01A

Report No.: FG662705-01A

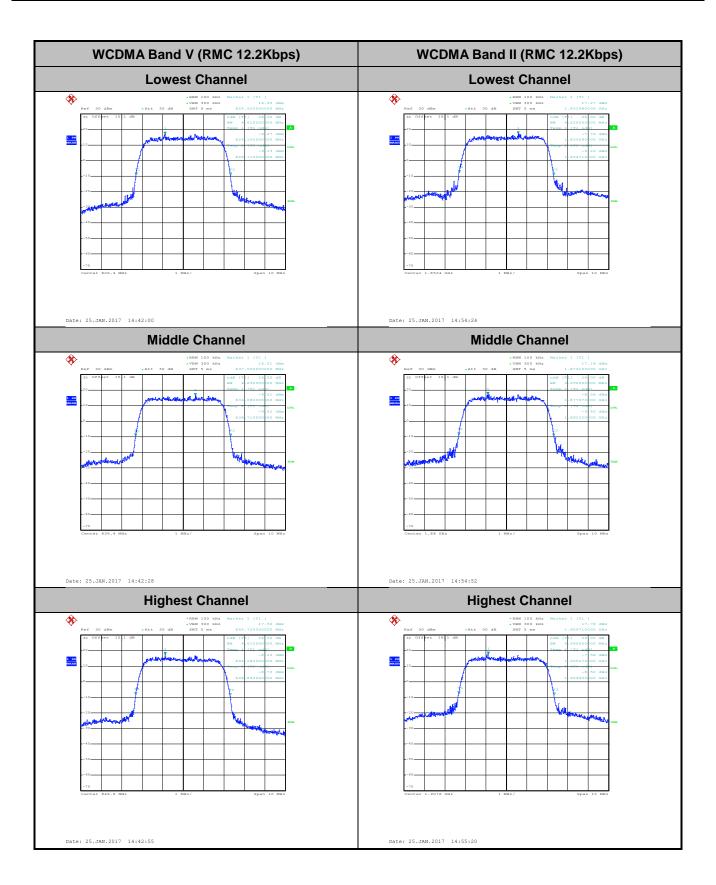


Occupied Bandwidth


Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.06	4.08
Middle CH	4.07	4.08
Highest CH	4.06	4.09

TEL: 886-3-327-3456 FAX: 886-3-328-4978


CC RF Test Report No.: FG662705-01A

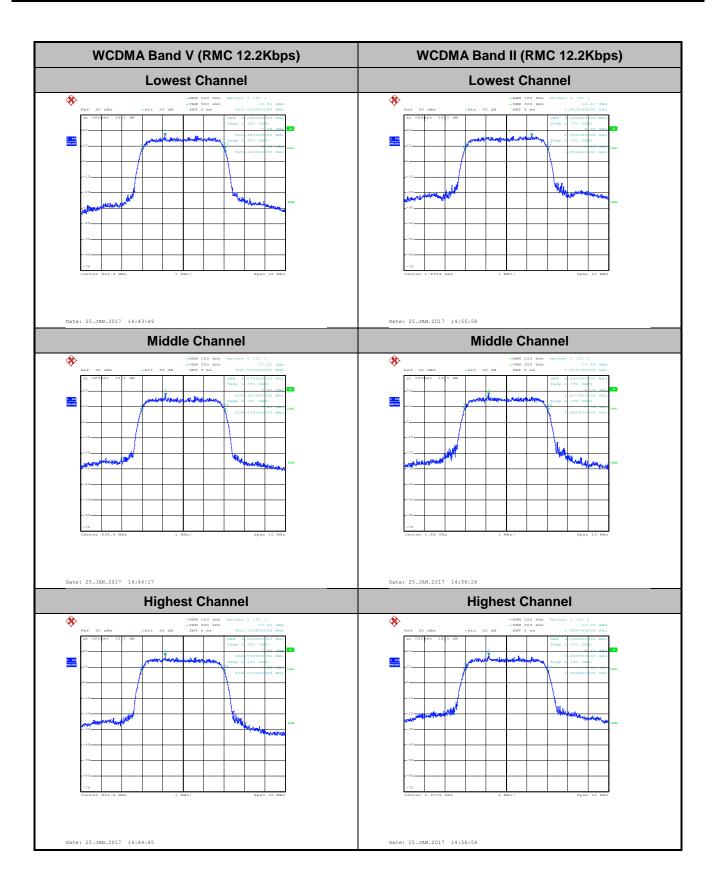

Conducted Band Edge

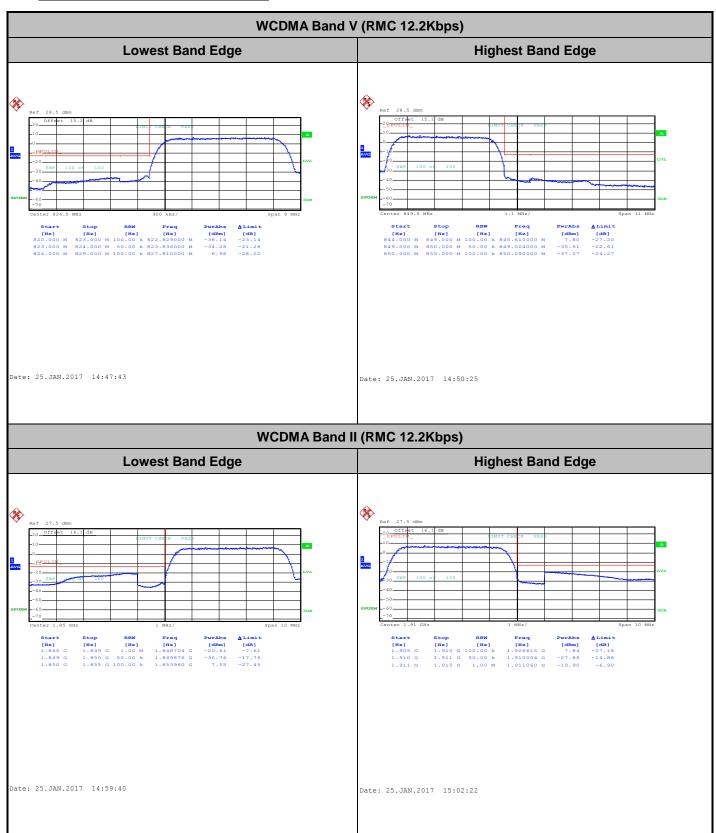

TEL: 886-3-327-3456 FAX: 886-3-328-4978

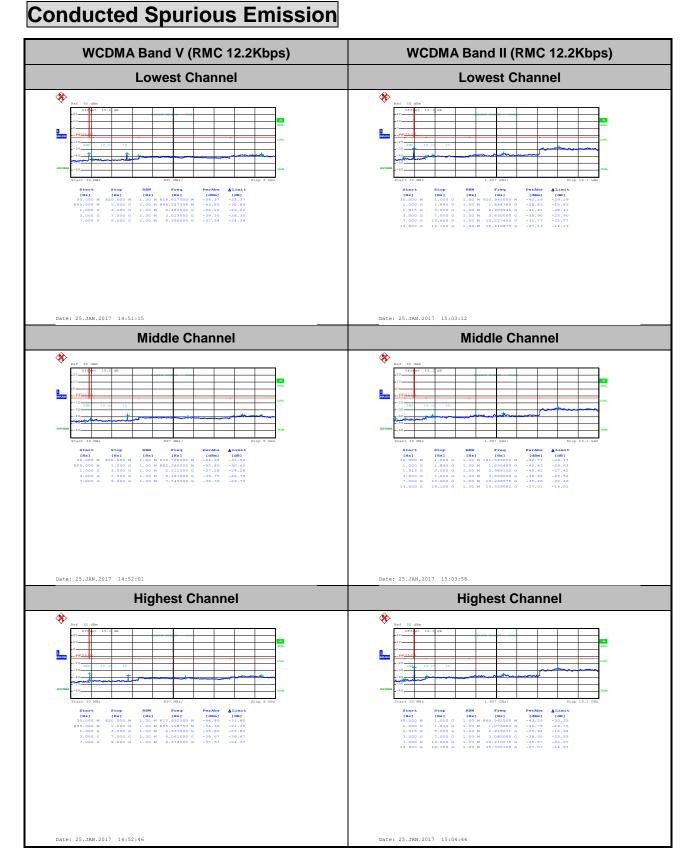

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	
40	Normal Voltage	0.0072	
30	Normal Voltage	0.0084	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0048	
-10	Normal Voltage	0.0048	PASS
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0012	
20	Maximum Voltage	0.0036	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0048	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0027	
40	Normal Voltage	0.0027	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0027	
0	Normal Voltage	0.0053	
-10	Normal Voltage	0.0059	PASS
-20	Normal Voltage	0.0053	
-30	Normal Voltage	0.0043	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0027	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: A2-9 of 9

A3. GSM


<Ant. 2>


Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.20	3.12	
Middle CH	0.20	3.32	PASS
Highest CH	0.20	3.40	

Report No. : FG662705-01A

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	2.92	
Middle CH	0.24	2.64	PASS
Highest CH	0.24	2.80	

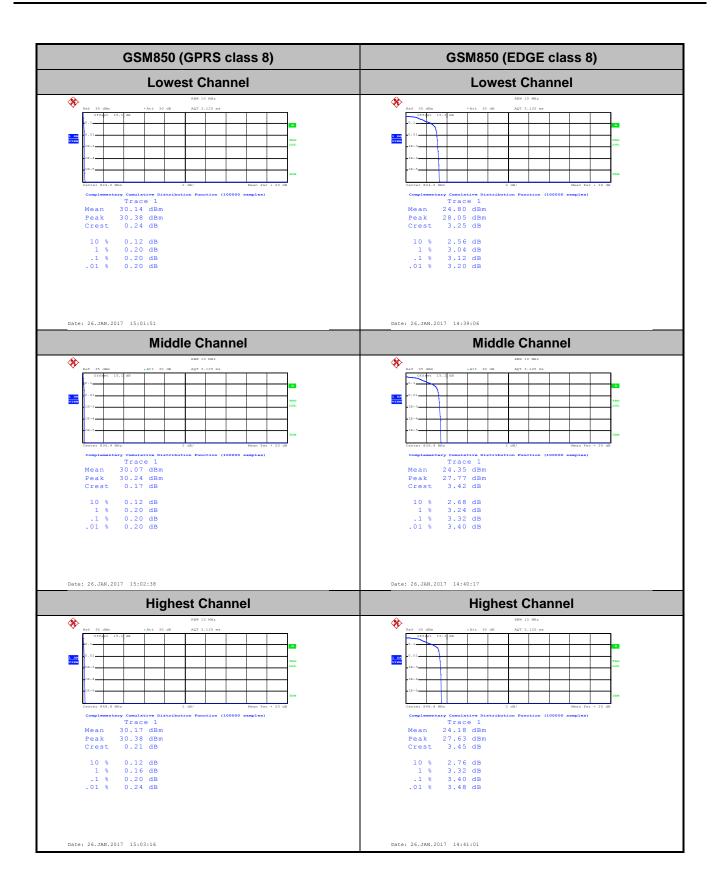

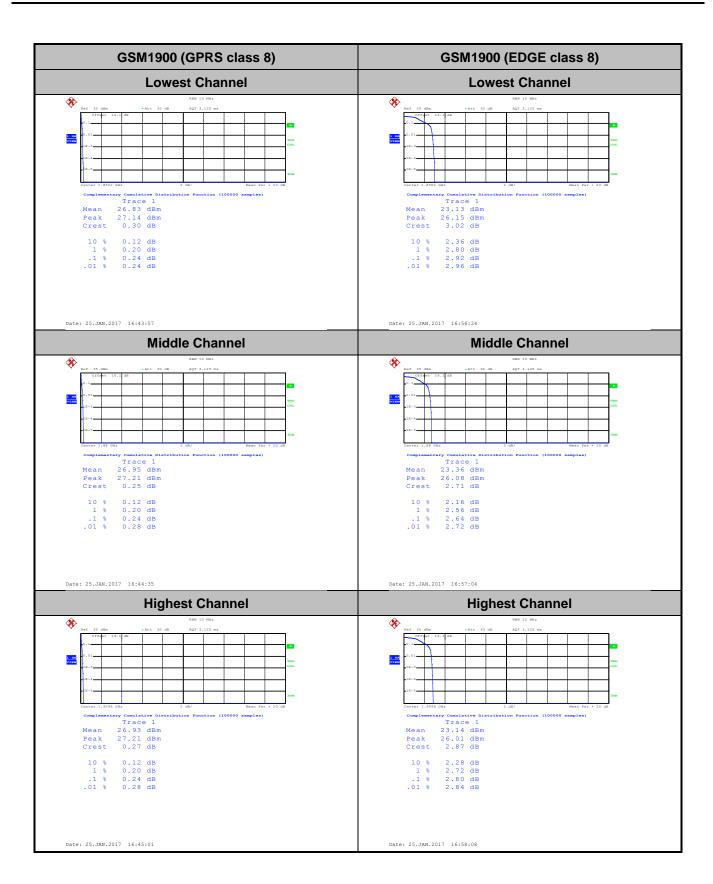


26dB Bandwidth

Mode	GSM850	
Mod.	GPRS class 8 EDGE class 8	
Lowest CH	0.313	0.299
Middle CH	0.315	0.311
Highest CH	0.300	0.298


Report No. : FG662705-01A

Mode	GSM1900	
Mod.	GPRS class 8 EDGE class 8	
Lowest CH	0.309	0.313
Middle CH	0.315	0.307
Highest CH	0.310	0.310

C RF Test Report No.: FG662705-01A

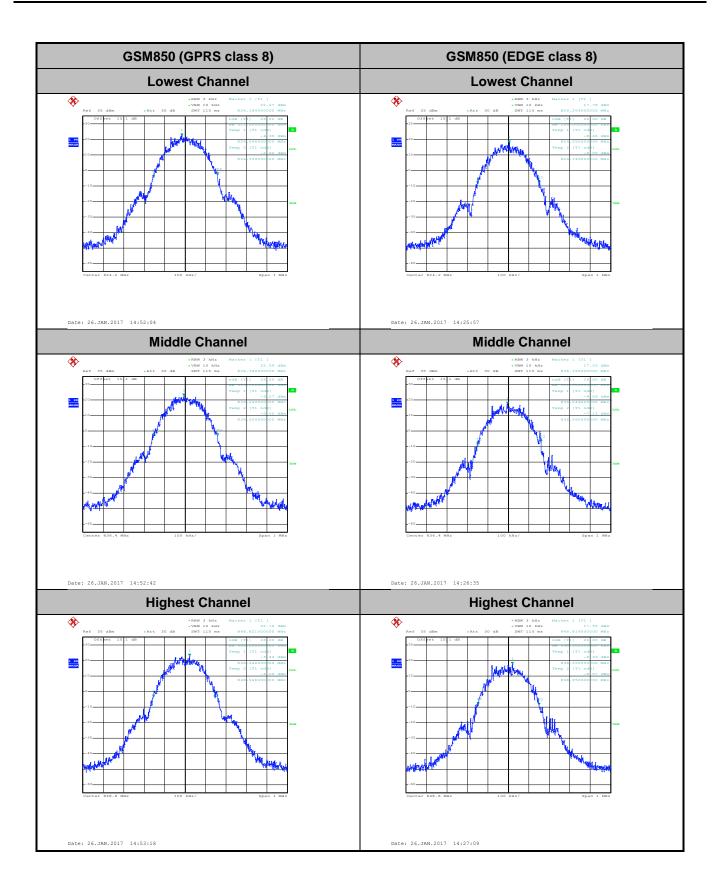

Report No.: FG662705-01A

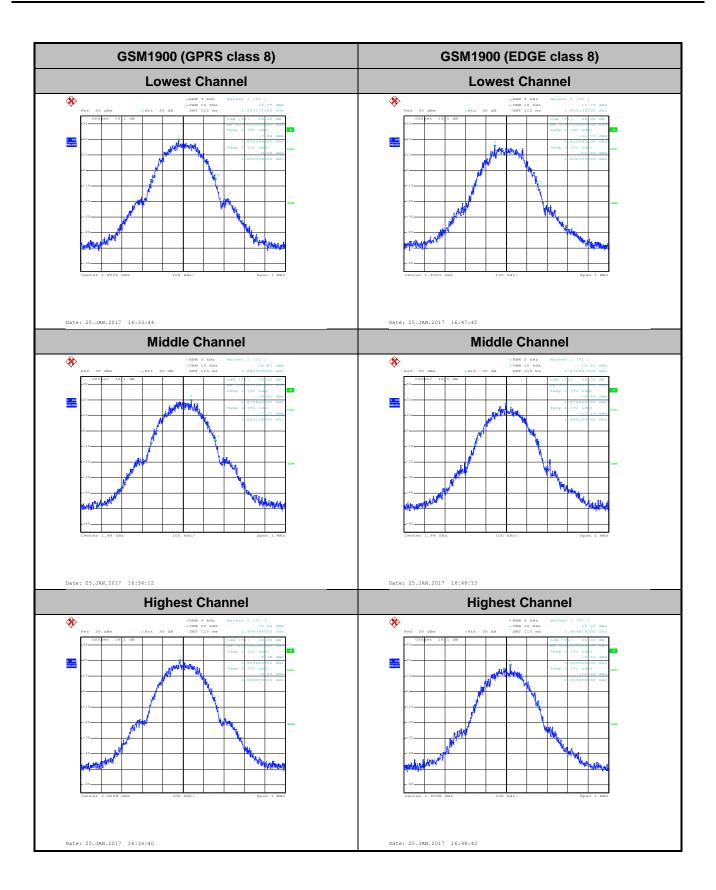

Occupied Bandwidth


Mode	GSM850	
Mod.	GPRS class 8 EDGE class 8	
Lowest CH	0.248	0.243
Middle CH	0.246	0.241
Highest CH	0.244	0.243

Report No. : FG662705-01A


Mode	GSM1900		
Mod. GPRS class 8		EDGE class 8	
Lowest CH	0.249	0.250	
Middle CH	0.246	0.253	
Highest CH	0.247	0.252	

SPORTON INTERNATIONAL INC. Page Number : A3-7 of 14


C RF Test Report No.: FG662705-01A

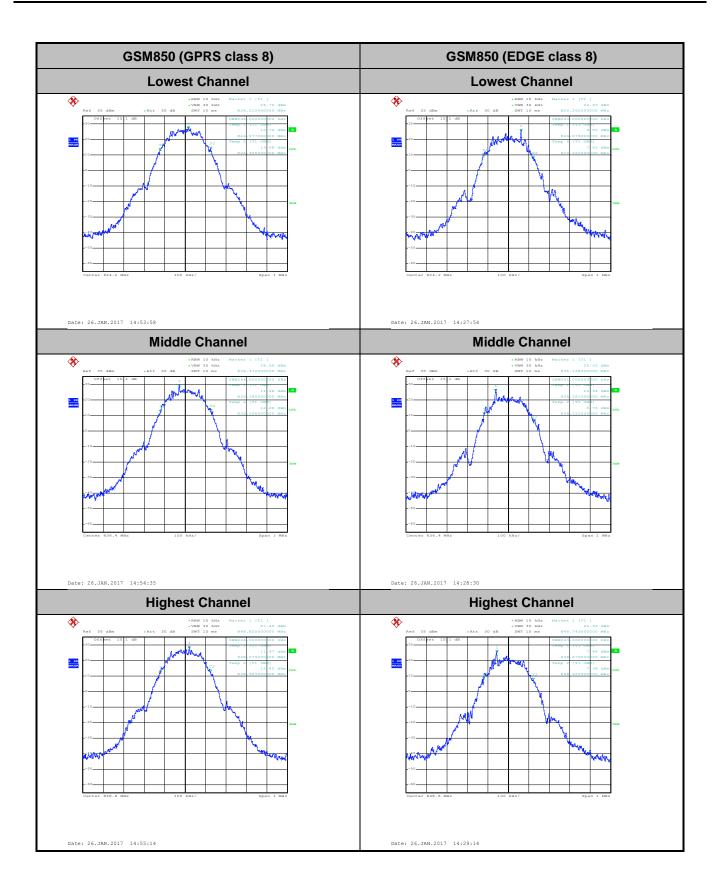

Report No.: FG662705-01A

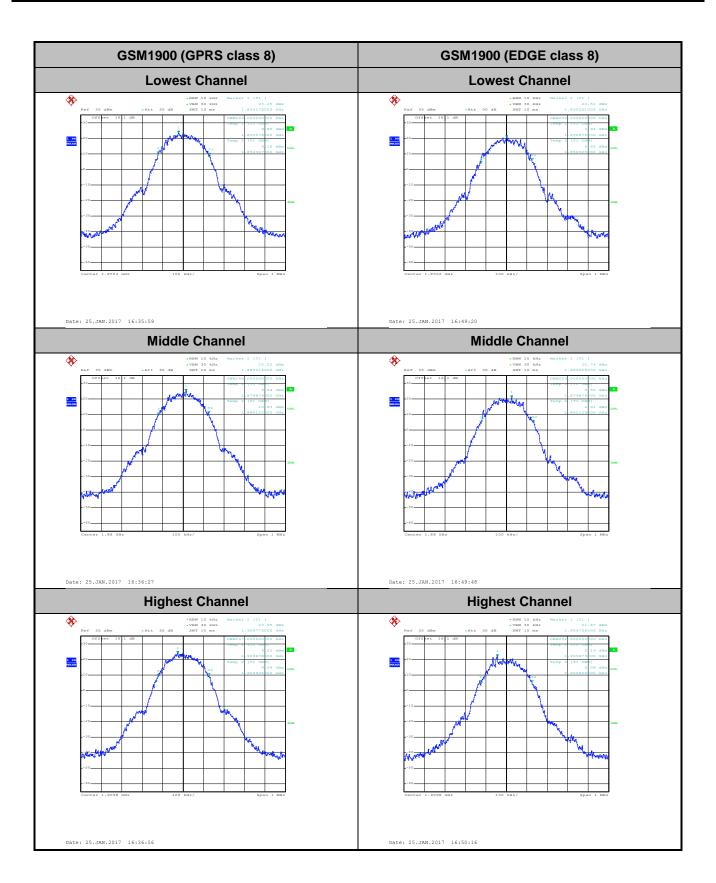


Conducted Band Edge

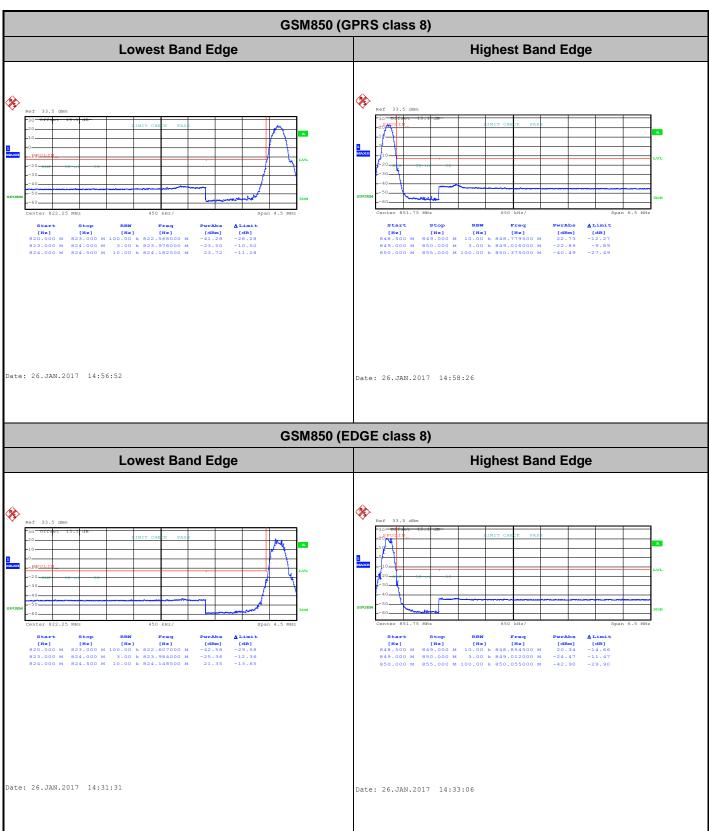

TEL: 886-3-327-3456 FAX: 886-3-328-4978


Report No.: FG662705-01A GSM1900 (GPRS class 8) **Lowest Band Edge Highest Band Edge** Date: 25.JAN.2017 16:38:25 Date: 25.JAN.2017 16:39:52 GSM1900 (EDGE class 8) **Lowest Band Edge Highest Band Edge %** Date: 25.JAN.2017 16:51:49 Date: 25.JAN.2017 16:53:16

Conducted Spurious Emission

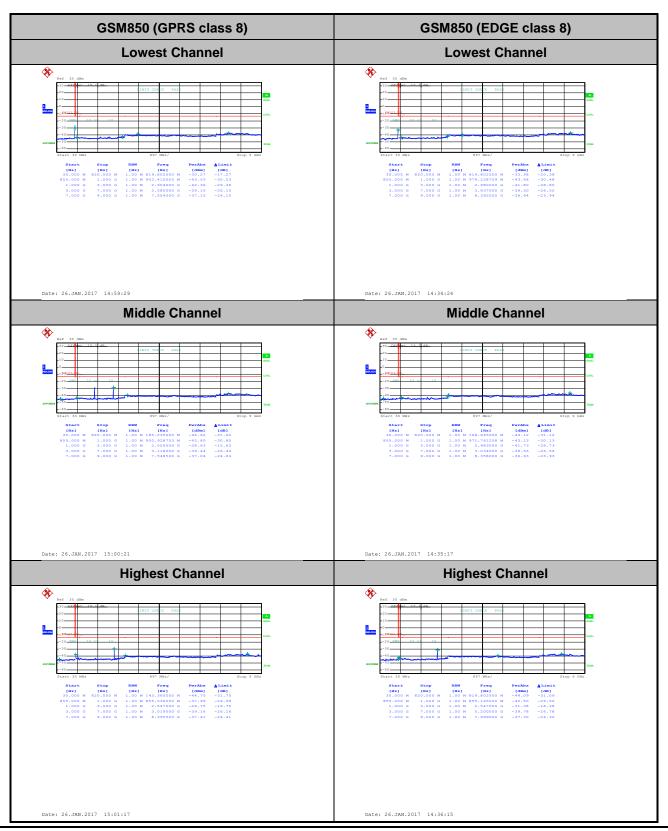

TEL: 886-3-327-3456 FAX: 886-3-328-4978



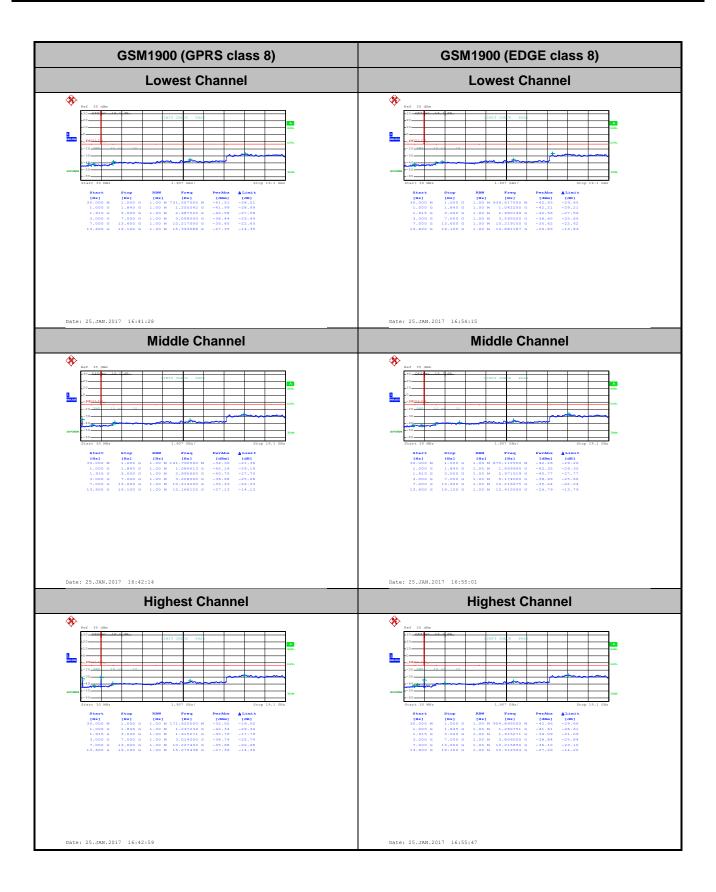

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviatio	n (ppm)	Result
50	Normal Voltage	0.0072	0.0096	
40	Normal Voltage	0.0024	0.0132	
30	Normal Voltage	0.0048	0.0048	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0442	0.0024	
0	Normal Voltage	0.0418	0.0060	
-10	Normal Voltage	0.0395	0.0012	PASS
-20	Normal Voltage	0.0347	0.0000	
-30	Normal Voltage	0.0359	0.0036	
20	Maximum Voltage	0.0060	0.0048	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0036	0.0036	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0027	0.0064	
40	Normal Voltage	0.0005	0.0053	
30	Normal Voltage	0.0037	0.0053	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0027	0.0027	
0	Normal Voltage	0.0309	0.0043	
-10	Normal Voltage	0.0330	0.0043	PASS
-20	Normal Voltage	0.0298	0.0048	
-30	Normal Voltage	0.0319	0.0032	
20	Maximum Voltage	0.0027	0.0027	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0032	0.0064	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A3-14 of 14

A4. WCDMA


<Ant. 2>

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.20	3.36	
Middle CH	3.16	2.96	PASS
Highest CH	3.24	2.60	

TEL: 886-3-327-3456 FAX: 886-3-328-4978




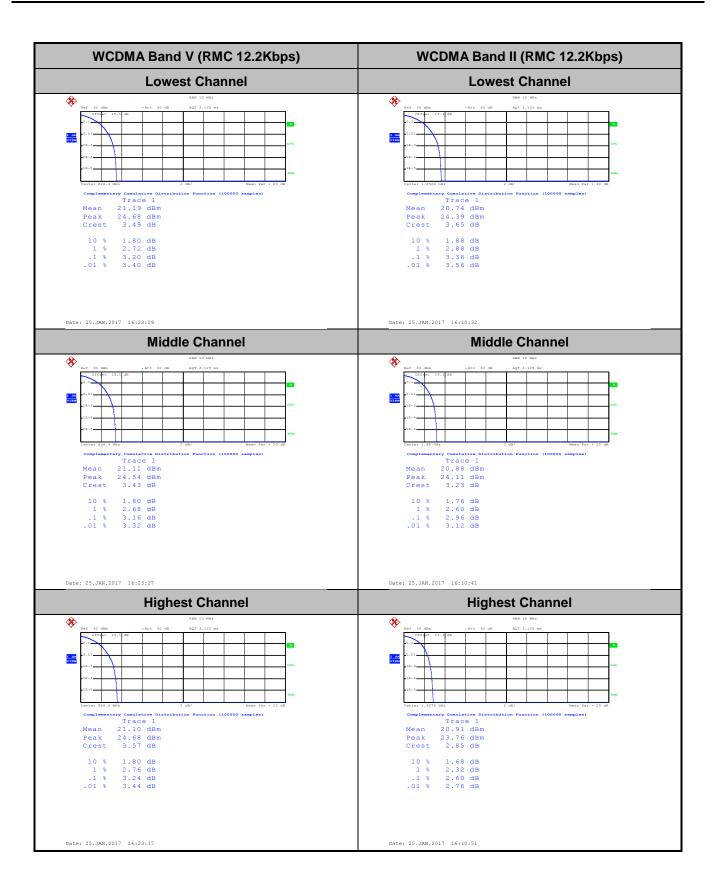


26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II	
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	
Lowest CH	4.63	4.61	
Middle CH	4.62	4.64	
Highest CH	4.63	4.65	

Report No. : FG662750-01A



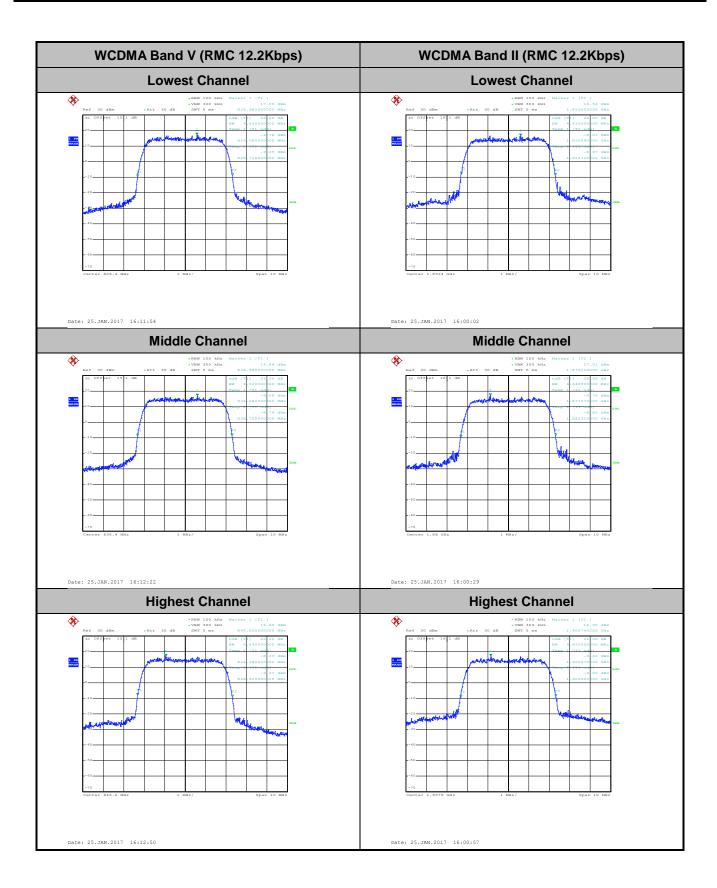


Occupied Bandwidth


Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps RMC 12.2	
Lowest CH	4.07	4.07
Middle CH	4.07	4.08
Highest CH	4.07	4.09

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report No.: FG662750-01A

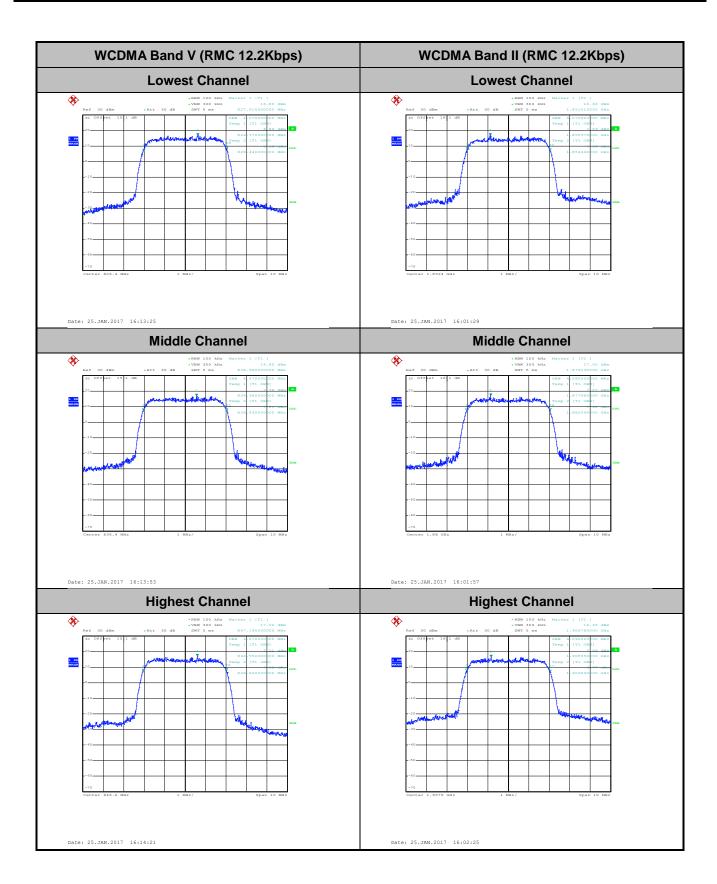


Conducted Band Edge

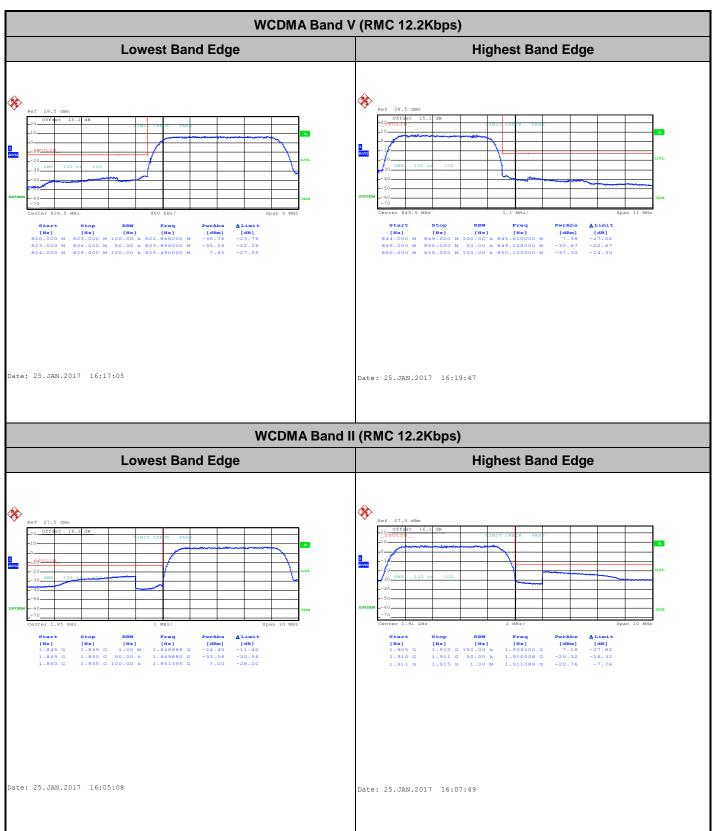

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Conducted Spurious Emission

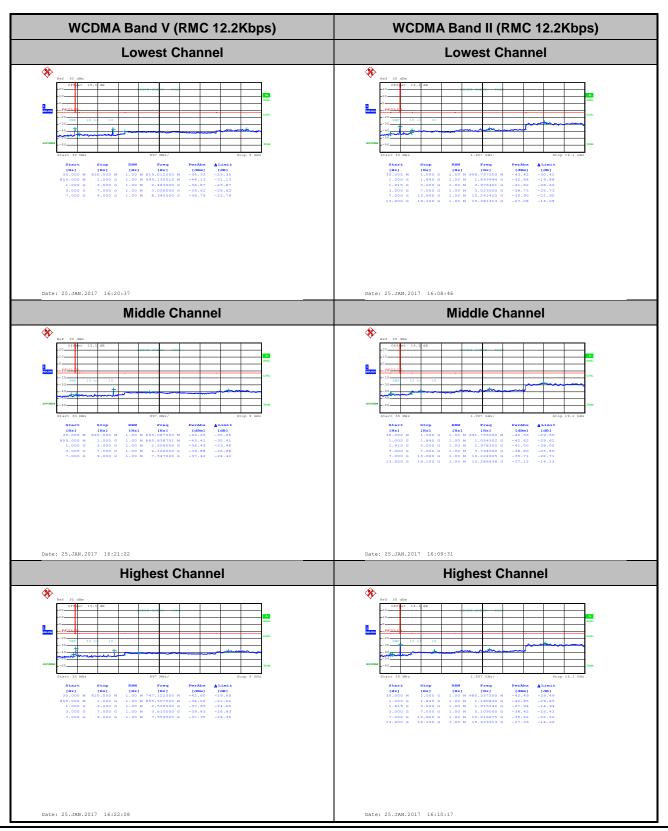

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0024	
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0096	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0143	
0	Normal Voltage	0.0036	
-10	Normal Voltage	0.0036	PASS
-20	Normal Voltage	0.0060	
-30	Normal Voltage	0.0084	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0036	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0027	
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0223	
0	Normal Voltage	0.0213	
-10	Normal Voltage	0.0245	PASS
-20	Normal Voltage	0.0250	
-30	Normal Voltage	0.0223	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0027	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A4-9 of 9



Appendix B. Test Results of Radiated Test

ERP/EIRP for Ant.1

Channel	Mode	Horiz	ontal	Vert	tical
Channel	Wode	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850	29.82	0.9594	29.44	0.8790
Middle	GPRS class 8	28.57	0.7194	29.35	0.8610
Highest	GFIX3 Class 0	29.74	0.9419	29.85	0.9661
Lowest	GSM850	23.63	0.2307	23.47	0.2223
Middle	EDGE class 8	22.12	0.1629	23.19	0.2084
Highest	EDGE Class o	23.09	0.2037	23.66	0.2323
Lowest	WCDMA Band V	19.54	0.0899	19.48	0.0887
Middle	RMC 12.2Kbps	19.01	0.0796	19.58	0.0908
Highest	NIVIO 12.2NDPS	20.23	0.1054	20.37	0.1089
Limit	ERP < 7W	Re	sult	PA	SS

Report No. :

FG662705-01A

Channel	Mode	Horiz	ontal	Ver	tical
Channel	lviode	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	30.54	1.1324	30.25	1.0593
Middle	GPRS class 8	31.13	1.2972	29.88	0.9727
Highest	GFN3 class o	30.85	1.2162	29.65	0.9226
Lowest	GSM1900	26.96	0.4966	26.36	0.4325
Middle	EDGE class 8	27.31	0.5383	25.59	0.3622
Highest	EDGE class o	27.14	0.5176	26.12	0.4093
Lowest	WCDMA Band II	24.06	0.2547	23.85	0.2427
Middle	RMC 12.2Kbps	24.87	0.3069	23.52	0.2249
Highest	1 KIVIC 12.2KDPS	24.94	0.3119	23.84	0.2421
Limit	EIRP < 2W	Re	sult	PA	SS



Appendix B. Test Results of Radiated Test

ERP/EIRP for Ant.2

Channel	Mode	Horiz	ontal	Vert	tical
Chamilei	Wode	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850	29.06	0.8054	29.03	0.7998
Middle	GPRS class 8	28.07	0.6412	28.92	0.7798
Highest	GFN3 Class 6	27.32	0.5395	28.43	0.6966
Lowest	GSM850	22.61	0.1824	22.16	0.1644
Middle	EDGE class 8	21.67	0.1469	22.25	0.1679
Highest	EDGE class o	20.43	0.1104	21.82	0.1521
Lowest	WCDMA Band V	18.74	0.0748	19.15	0.0822
Middle	RMC 12.2Kbps	17.95	0.0624	18.88	0.0773
Highest	NIVIC 12.2NDPS	17.35	0.0543	18.43	0.0697
Limit	ERP < 7W	Re	sult	PA	SS

Report No.:

FG662705-01A

Channel	Mode	Horiz	zontal	Ver	tical
Chamilei	Wiode	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	27.51	0.5636	27.37	0.5458
Middle	GPRS class 8	28.54	0.7145	27.01	0.5023
Highest	GFR3 class o	27.41	0.5508	26.98	0.4989
Lowest	GSM1900	22.96	0.1977	22.87	0.1936
Middle	EDGE class 8	24.06	0.2547	22.63	0.1832
Highest	EDGE Class o	22.95	0.1972	22.69	0.1858
Lowest	WCDMA Band II	20.93	0.1239	20.76	0.1191
Middle	RMC 12.2Kbps	22.07	0.1611	20.63	0.1156
Highest	TAINIC 12.2NDPS	21.14	0.1300	20.65	0.1161
Limit	EIRP < 2W	Re	sult	PA	SS

Radiated Spurious Emission

<Ant. 1>

				GSM850 (G	PRS class 8	3)			
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1672	-33.20	-13	-20.20	-46.77	-34.88	0.99	4.82	Н
	2512	-21.36	-13	-8.36	-38.16	-23.33	1.29	5.41	Н
Middle	4184	-55.63	-13	-42.63	-77.6	-60.25	1.87	8.64	Н
Middle	1672	-29.19	-13	-16.19	-42.76	-30.87	0.99	4.82	V
	2512	-24.90	-13	-11.90	-41.7	-26.87	1.29	5.41	V
	4184	-55.57	-13	-42.57	-77.54	-60.19	1.87	8.64	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-1 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	GSM850 (EDGE class 8)											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	1648	-42.68	-13	-29.68	-56.18	-44.44	0.98	4.89	Н			
	2472	-33.02	-13	-20.02	-49.65	-34.9	1.28	5.32	Н			
Louiset	3296	-59.38	-13	-46.38	-79.36	-62.79	1.54	7.10	Н			
Lowest	1648	-39.41	-13	-26.41	-52.91	-41.17	0.98	4.89	V			
	2472	-35.44	-13	-22.44	-52.07	-37.32	1.28	5.32	V			
	3296	-59.20	-13	-46.20	-79.18	-62.61	1.54	7.10	V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-2 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	GSM1900 (GPRS class 8)											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	3819	-46.00	-13	-33.00	-66.98	-52.68	1.70	8.38	Н			
	5730	-51.37	-13	-38.37	-78.85	-58.4	2.76	9.79	Н			
Llighoot	7641	-44.17	-13	-31.17	-78.99	-53.67	2.38	11.88	Н			
Highest	3819	-41.77	-13	-28.77	-62.75	-48.45	1.70	8.38	V			
	5730	-51.03	-13	-38.03	-78.51	-58.06	2.76	9.79	V			
	7641	-46.26	-13	-33.26	-80.18	-55.76	2.38	11.88	V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-3 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	GSM1900 (EDGE class 8)											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	3700	-56.97	-13	-43.97	-77.79	-63.54	1.67	8.24	Н			
	5550.6	-53.31	-13	-40.31	-80.28	-60.38	2.65	9.72	Н			
Lowest	7403	-47.21	-13	-34.21	-80.75	-56.36	2.46	11.61	Н			
Lowest	3700	-57.87	-13	-44.87	-78.69	-64.44	1.67	8.24	V			
	5550.6	-52.69	-13	-39.69	-79.66	-59.76	2.65	9.72	V			
	7403	-46.98	-13	-33.98	-80.52	-56.13	2.46	11.61	V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-4 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	WCDMA Band V (RMC 12.2Kbps)											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	1656	-61.99	-13	-48.99	-75.51	-63.72	0.98	4.86	Н			
	2480	-47.79	-13	-34.79	-64.42	-49.7	1.28	5.34	Н			
Lowest	3304	-58.49	-13	-45.49	-78.51	-61.93	1.54	7.14	Н			
Lowest	1656	-60.55	-13	-47.55	-74.07	-62.28	0.98	4.86	V			
	2480	-52.40	-13	-39.40	-69.03	-54.31	1.28	5.34	V			
	3304	-59.01	-13	-46.01	-79.03	-62.45	1.54	7.14	V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-5 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	WCDMA Band II (RMC 12.2Kbps)											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	3819	-52.84	-13	-39.84	-73.82	-59.52	1.70	8.38	Н			
	5723	-51.93	-13	-38.93	-79.41	-58.97	2.75	9.79	Н			
∐iah oot	7627	-46.40	-13	-33.40	-80.3	-55.89	2.39	11.88	Н			
Highest	3819	-56.44	-13	-43.44	-77.42	-63.12	1.70	8.38	V			
	5723	-51.68	-13	-38.68	-79.16	-58.72	2.75	9.79	V			
	7627	-46.26	-13	-33.26	-80.16	-55.75	2.39	11.88	V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-6 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

<Ant. 2>

				GSM850 (G	PRS class 8	3)			
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1672	-32.42	-13	-19.42	-45.99	-34.1	0.99	4.82	Н
	2512	-40.09	-13	-27.09	-56.89	-42.06	1.29	5.41	Н
	3344	-58.88	-13	-45.88	-78.99	-62.49	1.56	7.31	Н
Middle	4184	-55.84	-13	-42.84	-77.81	-60.46	1.87	8.64	Н
Middle	1672	-28.20	-13	-15.20	-41.77	-29.88	0.99	4.82	V
	2512	-43.59	-13	-30.59	-60.39	-45.56	1.29	5.41	V
	3344	-59.07	-13	-46.07	-79.18	-62.68	1.56	7.31	V
	4184	-56.79	-13	-43.79	-78.76	-61.41	1.87	8.64	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-7 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

	GSM850 (EDGE class 8)											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	1648	-43.00	-13	-30.00	-56.5	-44.76	0.98	4.89	Н			
	2472	-51.88	-13	-38.88	-68.51	-53.76	1.28	5.32	Н			
Lowest	3296	-59.53	-13	-46.53	-79.51	-62.94	1.54	7.10	Н			
Lowest	1648	-40.54	-13	-27.54	-54.04	-42.3	0.98	4.89	V			
	2472	-56.26	-13	-43.26	-72.89	-58.14	1.28	5.32	V			
	3296	-59.21	-13	-46.21	-79.19	-62.62	1.54	7.10	V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-8 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

GSM1900 (GPRS class 8)										
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
Highest	3819	-45.64	-13	-32.64	-66.62	-52.32	1.70	8.38	Н	
	5730	-51.27	-13	-38.27	-78.75	-58.3	2.76	9.79	Н	
	7641	-45.07	-13	-32.07	-78.99	-54.57	2.38	11.88	Н	
	9552	-40.50	-13	-27.50	-79.77	-50.37	2.60	12.47	Н	
	3819	-45.74	-13	-32.74	-66.72	-52.42	1.70	8.38	V	
	5730	-52.30	-13	-39.30	-79.78	-59.33	2.76	9.79	V	
	7641	-45.81	-13	-32.81	-79.73	-55.31	2.38	11.88	V	
	9552	-38.12	-13	-25.12	-77.39	-47.99	2.60	12.47	V	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-9 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

GSM1900 (EDGE class 8)										
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
Highest	3819	-56.37	-13	-43.37	-77.35	-63.05	1.70	8.38	Н	
	5730	-52.91	-13	-39.91	-80.39	-59.94	2.76	9.79	Н	
	7641	-46.35	-13	-33.35	-80.27	-55.85	2.38	11.88	Н	
	3819	-56.26	-13	-43.26	-77.24	-62.94	1.70	8.38	V	
	5730	-52.67	-13	-39.67	-80.15	-59.7	2.76	9.79	V	
	7641	-46.35	-13	-33.35	-80.27	-55.85	2.38	11.88	V	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-10 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

WCDMA Band V (RMC 12.2Kbps)										
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
Middle	1672	-61.62	-13	-48.62	-75.19	-63.3	0.99	4.82	Н	
	2512	-58.83	-13	-45.83	-75.63	-60.8	1.29	5.41	Н	
	3344	-59.32	-13	-46.32	-79.43	-62.93	1.56	7.31	Н	
	1672	-60.04	-13	-47.04	-73.61	-61.72	0.99	4.82	V	
	2512	-60.36	-13	-47.36	-77.16	-62.33	1.29	5.41	V	
	3344	-59.37	-13	-46.37	-79.48	-62.98	1.56	7.31	V	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-11 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2

WCDMA Band II (RMC 12.2Kbps)										
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
Highest	3819	-55.94	-13	-42.94	-76.92	-62.62	1.70	8.38	Н	
	5723	-52.15	-13	-39.15	-79.63	-59.19	2.75	9.79	Н	
	7630.4	-46.54	-13	-33.54	-80.44	-56.03	2.39	11.88	Н	
	3819	-52.91	-13	-39.91	-73.89	-59.59	1.70	8.38	V	
	5723	-52.15	-13	-39.15	-79.63	-59.19	2.75	9.79	V	
	7630.4	-46.47	-13	-33.47	-80.37	-55.96	2.39	11.88	V	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AHSB-7349 Page Number : B2-12 of 12
Report Issued Date : Mar. 10, 2017
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2