

RF EXPOSURE **EVALUATION REPORT**

APPLICANT

Lynxus Technology Corp

PRODUCT NAME

ZigBee RF Module

MODEL NAME

ZBM01

TRADE NAME

N/A

BRAND NAME

Lynxus

FCC ID

2HUTLYNXUSZBM01

47CFR 2.1093

STANDARD(S)

KDB 447498 D01 General RF Exposure

Guidance v06

ISSUE DATE

2016-06-27

SHENZHEN MORLAB NS TECHNOLOGY Co., Ltd.

oduced except in full without prior written permission of the NOTE: This document is issued by MORLAB, the test the specific tests carried out which is available on request for company. The test results apply only to the particular same validation and information confirmed at our website.





DIRECTORY

| TEST REPORT DECLARATION | 3 |
|---|--------|
| | |
| 1. TECHNICAL INFORMATION | 4 |
| | |
| 1.1. IDENTIFICATION OF APPLICANT | 4 |
| 1.2. IDENTIFICATION OF MANUFACTURER····· | 4 |
| 1.3. EQUIPMENT UNDER TEST (EUT) | 4 |
| 1.3.1. PHOTOGRAPHS OF THE EUT | 5 |
| 1.3.2. IDENTIFICATION OF ALL USED EUT···································· | 6 |
| 1.4. APPLIED REFERENCE DOCUMENTS | 6 |
| | |
| 2.DEVICE CATEGORY AND RF EXPOSURE LIMIT | 7 |
| | |
| 3.MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER | 8 |
| E RELATE HO. HE WE THAT HO. | 3 ILAB |
| 4. RF EXPOSURE EVALUATION ····· | 8 |
| | |
| ANNEX A GENERAL INFORMATION | 9 |

| | | Change History |
|-------|------------|-----------------------------|
| Issue | Date | Reason for change |
| 1.0 | 2015-06-30 | First edition |
| MORE | W.C. | 3 RLAE MORE ME AE RLAE MORE |



TEST REPORT DECLARATION

| Applicant | Lynxus Technology Corp |
|----------------------|--|
| Applicant Address | Nanshan District Tian Xia International Center B (Room1119-1120) |
| Manufacturer | Lynxus Technology Corp |
| Manufacturer Address | Nanshan District Tian Xia International Center B (Room1119-1120) |
| Product Name | ZigBee RF Module |
| Model Name | ZBM01 |
| Brand Name | Lynxus |
| HW Version | ZBM-02 |
| SW Version | ZBM-7.8 |
| Test Standards | 47CFR 2.1093; KDB 447498 D01 General RF Exposure Guidance v06 |
| Issue Date | 2016-06-27 |
| SAR Evaluation | Not Required |

| Tested by | | Chen Sheng kur | |
|-------------|-----|----------------|---|
| | 478 | Chen Shengkui | |
| Reviewed by | | Liu Jun | 9 |
| | | Liu Jun | |
| Approved by | | ZengDerin | |
| | | Zeng Dexin | |



1. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

1.1. Identification of Applicant

| Company Name: | Lynxus Technology Corp | AB SELAR |
|---------------|--|-------------------|
| Address: | Nanshan District Tian Xia International Center | B (Room1119-1120) |

1.2. Identification of Manufacturer

| Company Name: | Lynxus Technology Corp | LAB OFLA |
|---------------|--|-------------------|
| Address: | Nanshan District Tian Xia International Center | B (Room1119-1120) |

1.3. Equipment Under Test (EUT)

| Model Name: | ZBM01 |
|-------------------|---|
| Trade Name: | N/A |
| Brand Name: | Lynxus |
| Hardware Version: | ZBM-02 |
| Software Version: | ZBM-7.8 |
| Frequency Bands: | The frequency range used is 2405MHz - 2480MHz.; |
| Modulation Mode: | GFSK; |
| Antenna type: | Ceramic Antenna |
| Antenna Gain: | 1dBi |




1.3.1. Photographs of the EUT

1. EUT front view



2. EUT rear view

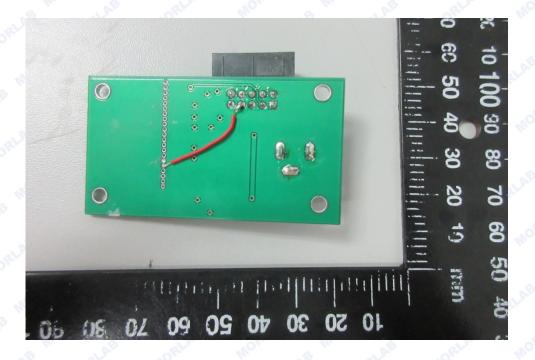



1.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

| EUT Identity | Hardware Version | Software Version |
|-----------------|------------------|------------------|
| 1# | ZBM-02 | ZBM-7.8 |

1.4. Applied Reference Documents

Leading reference documents for testing:

| No. | Identity | Document Title |
|------------|-------------------|--|
| 1 OPLAS | 47 CFR§2.1093 | Radiofrequency Radiation Exposure Evaluation: portable devices |
| 2 | KDB 447498 D01v06 | General RF Exposure Guidance |



2. DEVICE CATEGORY AND RF EXPOSURE LIMIT

Per user manual, Based on 47CFR 2.1093, this device belongs to portable device category with General Population/Uncontrolled exposure.

Portable Devices:

47CFR 2.1093(b)

For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

47CFR 2.1093(d) (2)

Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.





3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

1. Zigbee Average output power

| 61, | - | · Pr | |
|---------|---------|-----------------|----------------------|
| Band | Channel | Frequency (MHz) | Output Power(dBm) |
| 20.10 | | | GFSK |
| QLAB. | 11 | 2405 | -1.64 |
| GFSK | 20 | 2450 | -1.99 |
| LAB TOR | 26 | 2480 | -2.00 |

4. RF EXPOSURE EVALUATION

The device only incorporates a Zigbee transmitter, so standalone SAR evaluation is required for

Standalone transmission SAR evaluation

According to KDB 447498 section 4.3.1, the 1-g SAR test exclusion thresholds at test separation Distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(GHz)}$] ≤ 3.0

The maximum tune-up limit power is 1.0mW @ 2.405GHz

Use **5mm** as the most conservative minimum test separation distance,

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(GHz)}$] =**0.29** \leq 3.0

So SAR evaluation is not required for this device.



ANNEX A GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

| Company Name: | Shenzhen Morlab Communications Technology Co., Ltd. |
|-------------------------------|--|
| Department: | Morlab Laboratory |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| Responsible Test Lab Manager: | Mr. Su Feng |
| Telephone: | +86 755 36698555 |
| Facsimile: | +86 755 36698525 |

2. Identification of the Responsible Testing Location

| Name: | Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory |
|----------|---|
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang |
| | Road, Block 67, BaoAn District, ShenZhen, GuangDong |
| | Province, P. R. China |

***** FND OF REPORT *****

