

TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B

FOR:

Laser-Ammo Ltd.

Interactive Multi Target Training System

Model: i-MTTS

FCC ID:2AHUUIMTTS1

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Field strength of emissions	7
7.2	Occupied bandwidth test	30
7.3	Band edge emission	35
7.4	Antenna requirements	39
8	Emission tests according to 47CFR part 15 subpart B requirements	40
8.1	Radiated emission measurements	40
9	APPENDIX A Test equipment and ancillaries used for tests	45
10	APPENDIX B Measurement uncertainties	46
11	APPENDIX C Test laboratory description	47
12	APPENDIX D Specification references	47
13	APPENDIX E Test equipment correction factors	48
14	APPENDIX F Abbreviations and acronyms	61

1 Applicant information

Client name: Laser-Ammo Ltd.
Address: 7 Barshevski street, Rishon Le-Zion 7536374, Israel
Telephone: +972 3958 5525
E-mail: amitay@laser-ammo.com
Contact name: Mr. Amitay Kligman

2 Equipment under test attributes

Product name: Interactive Multi Target Training System (i-MTTS)
Product type: Transceiver
Model(s): i-MTTS
Serial number: 1-7
Hardware version: MPT03
Software release: Hermon_Test_Tx_0dBm_xxxxGHz, Hermon_Test_Rx_Only
Receipt date 13-Mar-16

3 Manufacturer information

Manufacturer name: Laser-Ammo Ltd.
Address: 7 Barshevski street, Rishon Le-Zion 7536374, Israel
Telephone: +972 3958 5525
E-Mail: amitay@laser-ammo.com
Contact name: Mr. Amitay Kligman

4 Test details




Project ID: 28141
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 13-Mar-16
Test completed: 24-Mar-16
Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; subpart B §15.109

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d), Field strength of emissions	Pass
Section 15.249(d), Band edge emissions	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Section 15.215(c), Occupied bandwidth	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.


	Name and Title	Date	Signature
Tested by:	Mrs.E. Pitt, test engineer	March 24, 2016	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	April 3, 2016	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	April 13, 2016	

6 EUT description

6.1 General information

The EUT, i-MTTS, is an electronic targeting system for firearms training using the Laser Ammo SureStrike™ cartridge. The i-MTTS may be used as a stand-alone target or up to five i-MTTS targets may be used in tandem to create a multi-target training system. The i-MTTS is useful in tactical / combat training for home defense and law enforcement, as well as developing target recognition speed, firing accuracy, and "shoot/no-shoot" skills, and transitional drills among others.

6.2 Test configuration

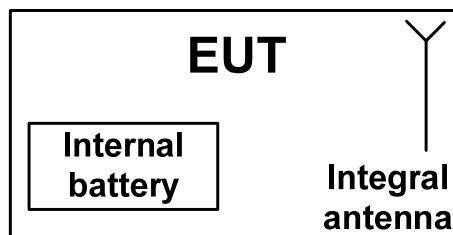

6.3 Changes made in EUT

No changes were performed in the EUT.

6.4 Transmitter characteristics

Type of equipment				
V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Assigned frequency range		2400 – 2483.5 MHz		
Operating frequency range		2410, 2442, 2473 MHz		
RF channel spacing		1-2 MHz		
Maximum field strength of carrier at 3 m distance		dBµV/m (peak), dBµV/m (average)		
Is transmitter output power variable?	V	No		
		Yes	continuous variable	
			stepped variable with stepsize dB	
			minimum RF power dBm	
			maximum RF power dBm	
Antenna connection				
unique coupling	standard connector	V	Integral	with temporary RF connector V without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer	Model number		Gain
Integral	Laser-Ammo	Printed		2 dBi
Transmitter aggregate data rate/s		1 Mbps		
Type of modulation		GFSK		
Modulating test signal (baseband)		PRBS		
Transmitter power source				
V	Battery	Nominal rated voltage	Battery type	3 x Battery 1.5V
	DC	Nominal rated voltage		
	AC mains	Nominal rated voltage	Frequency	Hz



Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Peak	Average	Quasi-Peak
2400 – 2483.5	114.0	94.0	NA

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
2400 – 2483.5	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			
	Peak	Quasi Peak	Average	Attenuation below carrier
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.2.3 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.


7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.1.3.3 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz

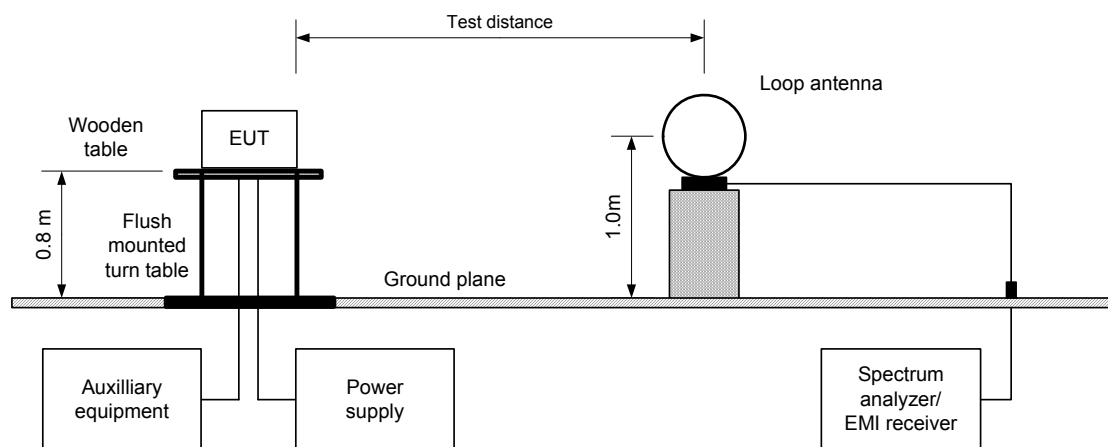

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

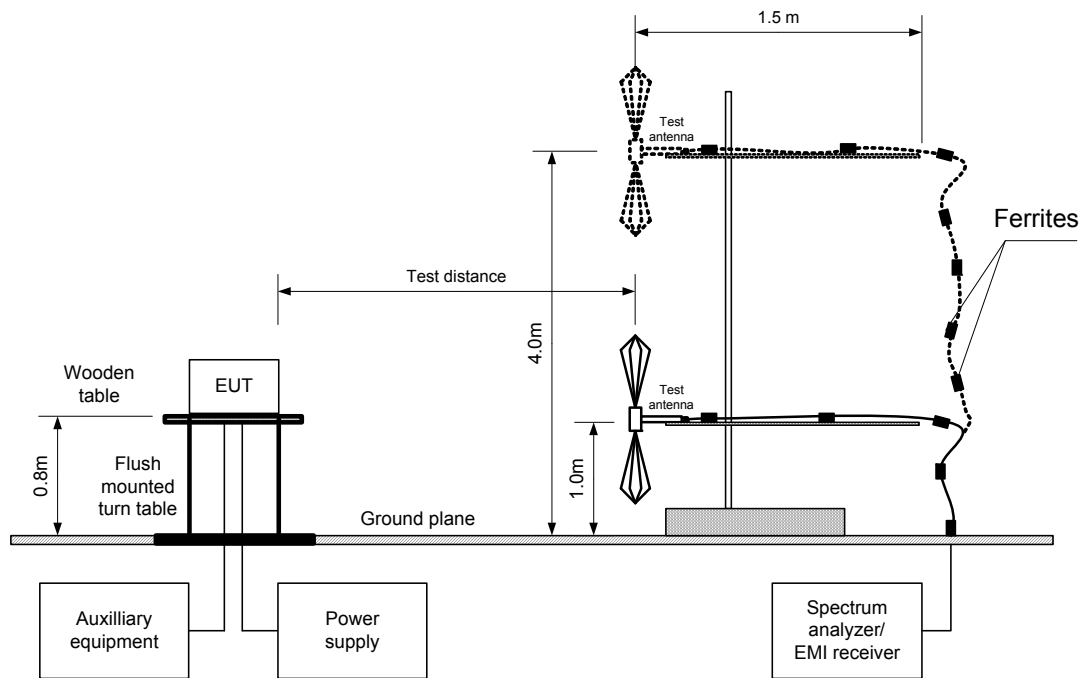

Test specification:	Section 15.249(a)(d), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	13-Mar-16 - 20-Mar-16		
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Horizontal)
MODULATION:	GFSK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 25000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Calculated dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
2410	H	1.5	60	96.43	114	-17.57	-23	73.43	94	-20.57	Pass
2442	H	1.5	30	94.18	114	-19.82	-23	71.18	94	-22.82	
2473	H	1.4	30	93.61	114	-20.39	-23	70.61	94	-23.39	
Spurious emissions											
1204.9	H	1.5	0	59.15	74	-14.85	-23	36.15	54	-17.85	Pass
1220.9	H	1.4	2	59.80	74	-14.20	-23	36.80	54	-17.20	
1236.5	H	1.5	25	58.91	74	-15.09	-23	35.91	54	-18.09	
4820.0	H	1.5	163	64.12	74	-9.88	-23	41.12	54	-12.88	
4884.0	H	1.5	160	64.63	74	-9.37	-23	41.63	54	-12.37	
4946.0	H	1.5	150	63.17	74	-10.83	-23	40.17	54	-13.83	
7230.0	H	1.4	205	62.32	74	-11.68	-23	39.32	54	-14.68	
7326.0	H	1.5	210	59.41	74	-14.59	-23	36.41	54	-17.59	
7419.0	H	1.5	216	59.52	74	-14.48	-23	36.52	54	-17.48	
9640.0	H	1.5	220	60.21	74	-13.79	-23	37.21	54	-16.79	
9768.0	H	1.5	236	62.07	74	-11.93	-23	39.07	54	-14.93	
9892.0	H	1.5	240	61.01	74	-12.99	-23	38.01	54	-15.99	

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m).

*** Max value was obtained in typical EUT position



HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Table 7.1.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Pulse period, ms	Duration, ms	Period, ms		
0.115	1.5	NA	NA	NA	-23

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0415	HL 0446	HL 0604	HL 1984	HL 3347	HL 3818	HL 3901	HL 4294
HL 4778	HL 4933	HL 4956					

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.249(a)(d), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	13-Mar-16 - 20-Mar-16		
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.1 Radiated emission measurements at low the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

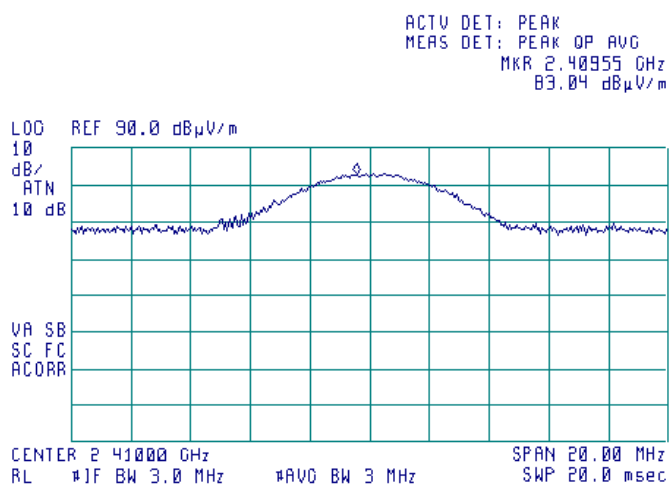

Plot 7.1.2 Radiated emission measurements at the low fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Horizontal)

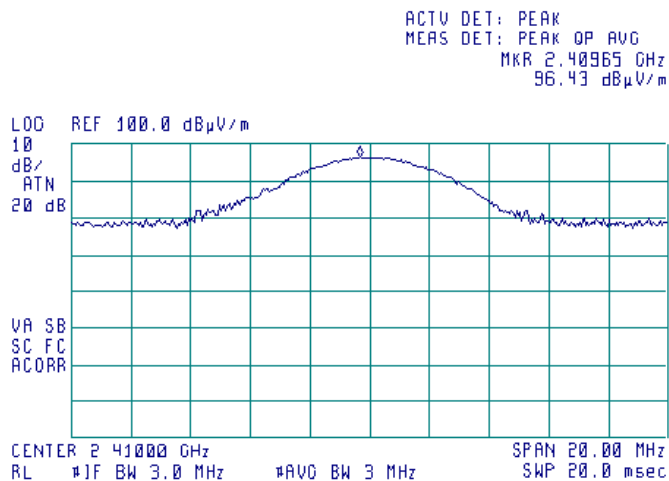




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.3 Radiated emission measurements at the mid fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

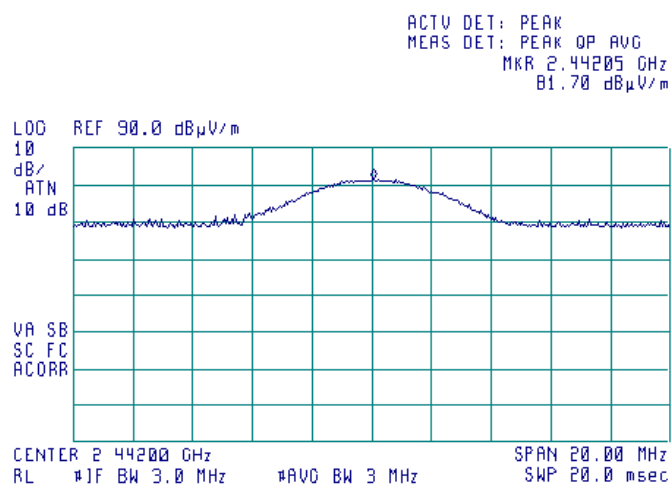

Plot 7.1.4 Radiated emission measurements at the mid fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Horizontal)

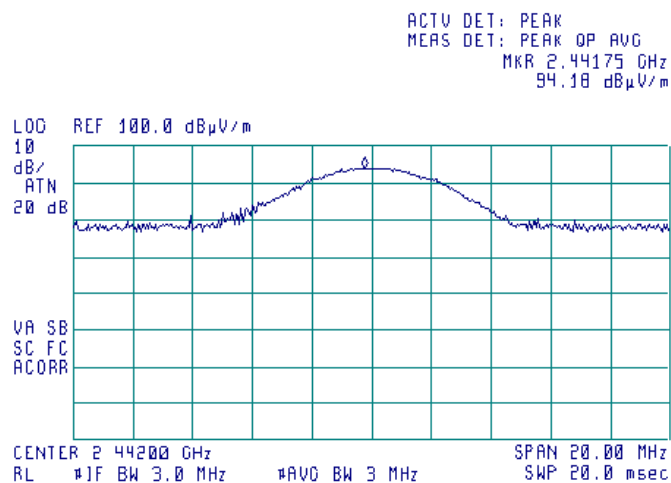




HERMON LABORATORIES

Report ID: LASRAD_FCC.28141.docx
Date of Issue: 13-Apr-16

Test specification:	Section 15.249(a)(d), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	13-Mar-16 - 20-Mar-16		
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.5 Radiated emission measurements at the high fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

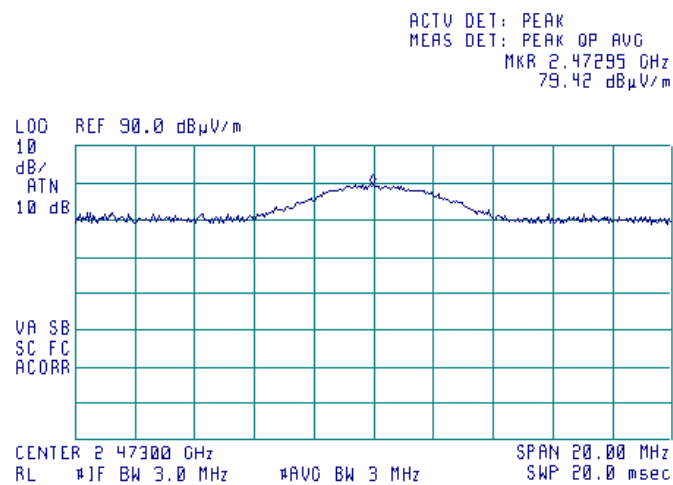

Plot 7.1.6 Radiated emission measurements at the high fundamental frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Horizontal)

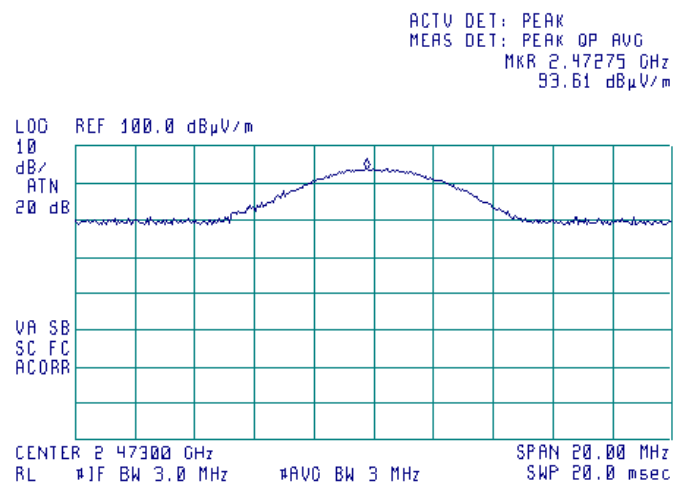

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.7 Radiated emission measurements from 9 to 150 kHz at low, mid, high frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

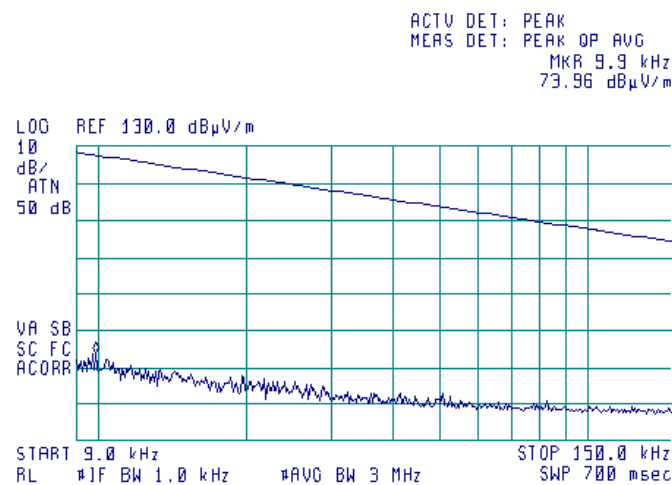

Plot 7.1.8 Radiated emission measurements from 0.15 to 30 MHz at low, mid, high frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

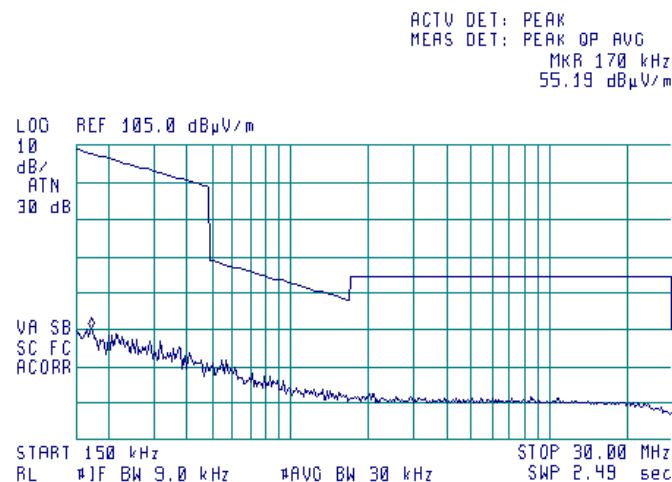



HERMON LABORATORIES

Report ID: LASRAD_FCC.28141.docx
Date of Issue: 13-Apr-16


Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.1.9 Radiated emission measurements from 30 to 1000 MHz at low, mid, high frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 990.5 MHz
33.73 dBμV/m

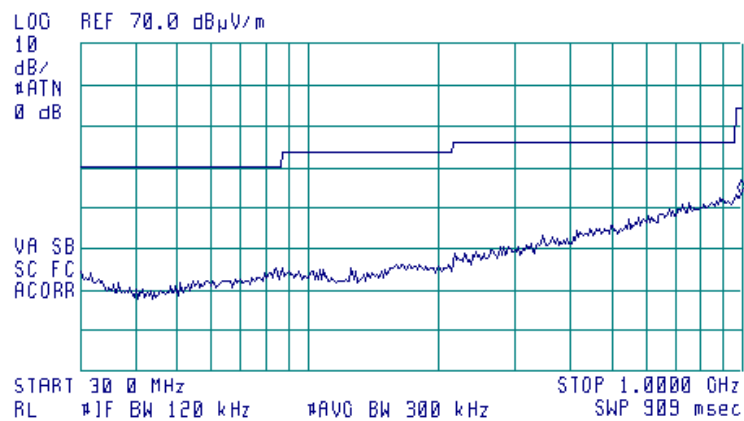





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.1.10 Radiated emission measurements from 1.0 to 2.9 MHz at low frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

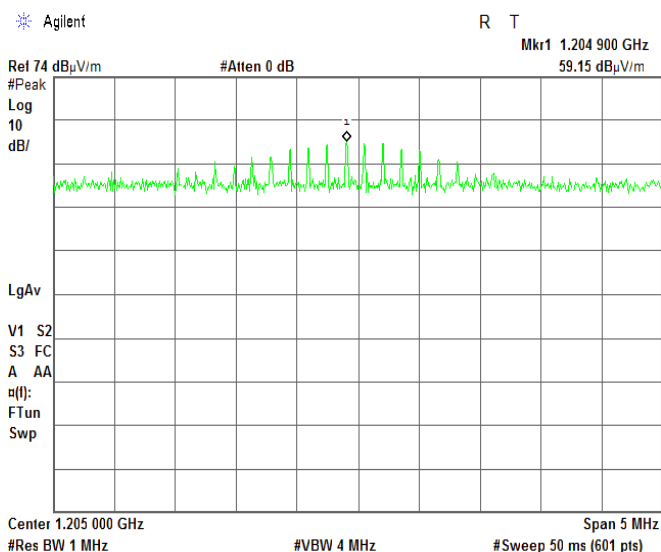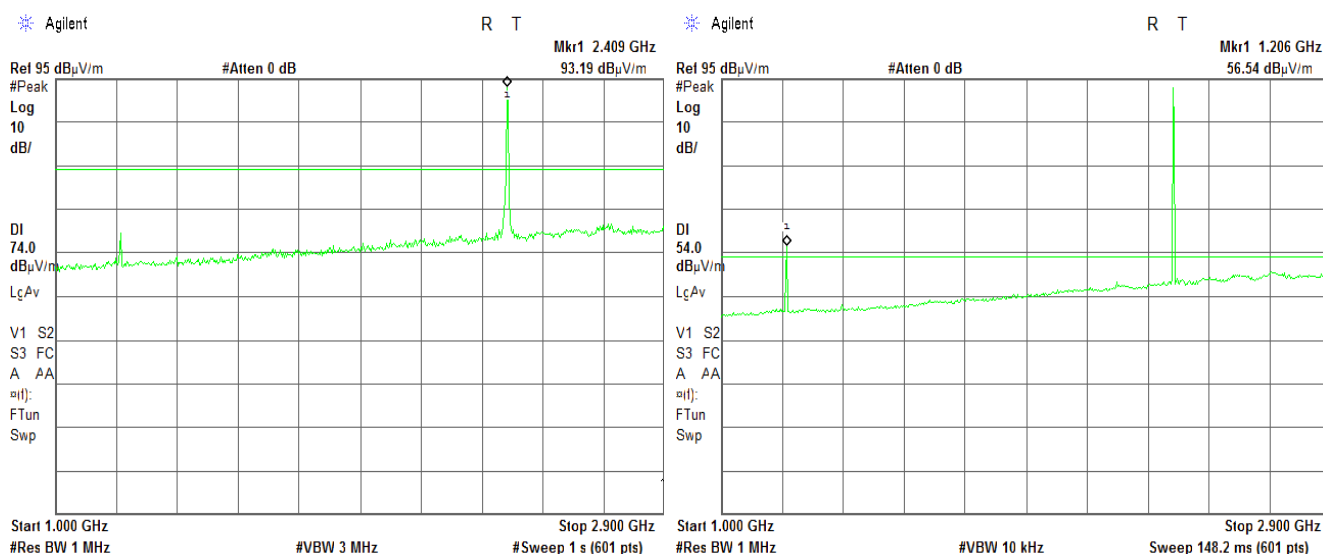

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.1.11 Radiated emission measurements from 1.0 to 2.9 MHz at mid frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

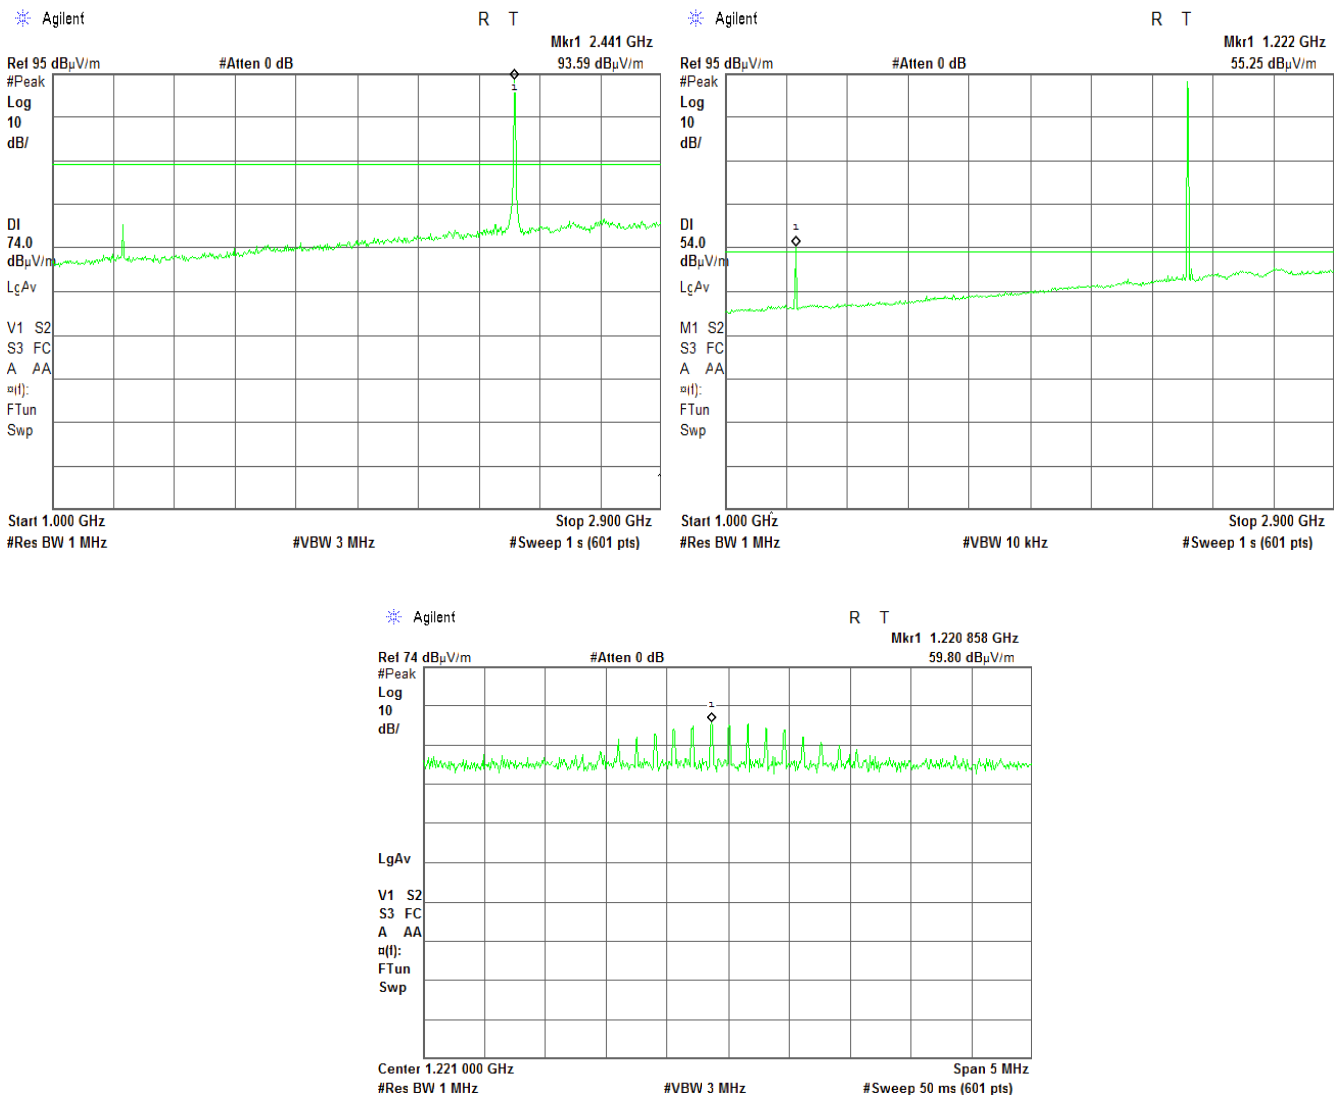

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.1.12 Radiated emission measurements from 1.0 to 2.9 MHz at high frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

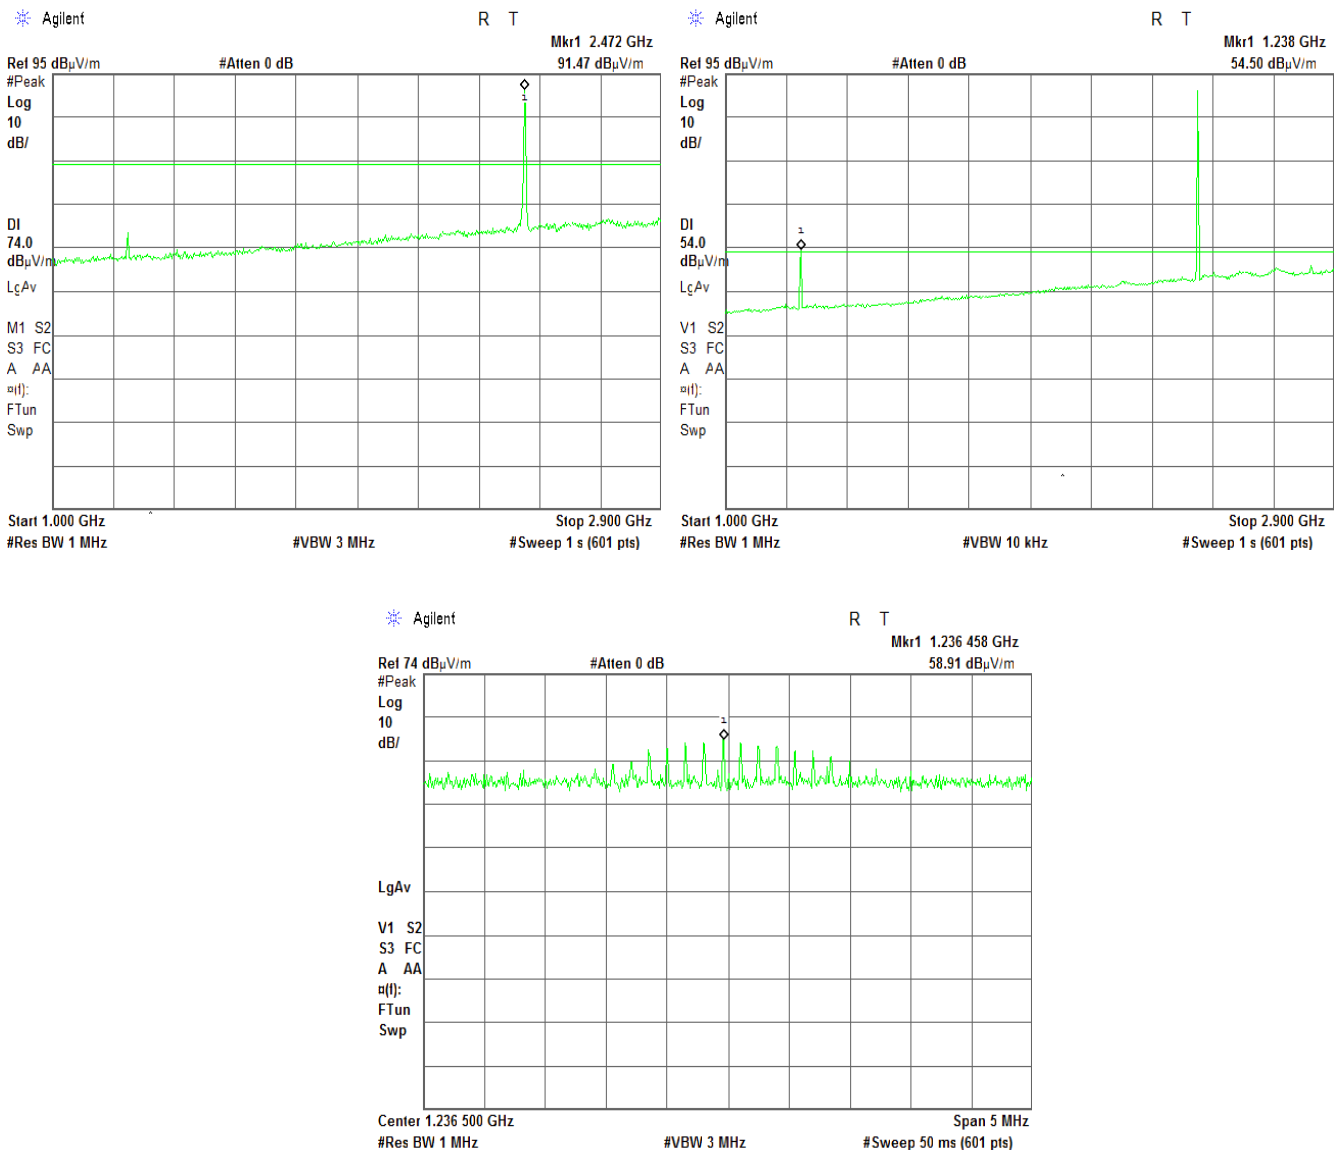

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.13 Radiated emission measurements from 2.9 to 6.0 MHz at low frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

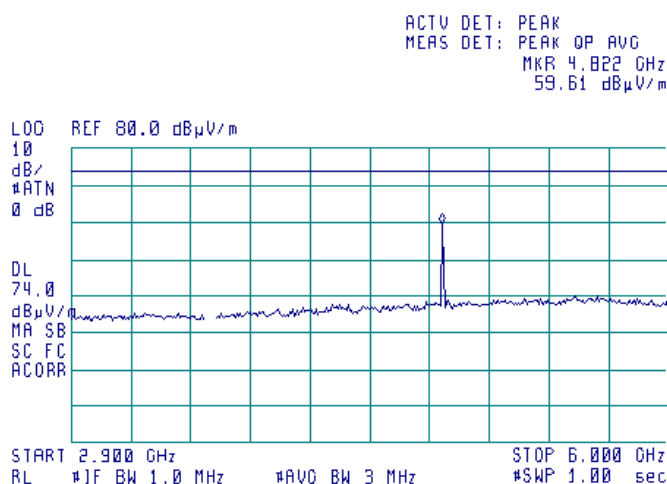

Plot 7.1.14 Radiated emission measurements from 2.9 to 6.0 MHz at mid frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

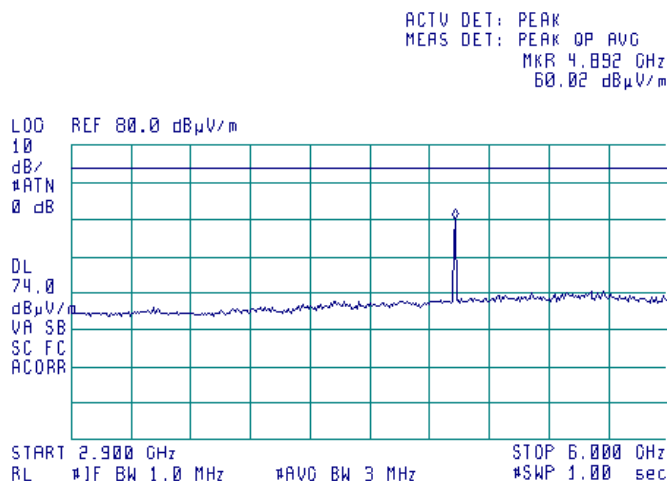

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.15 Radiated emission measurements from 2.9 to 6.0 MHz at high frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

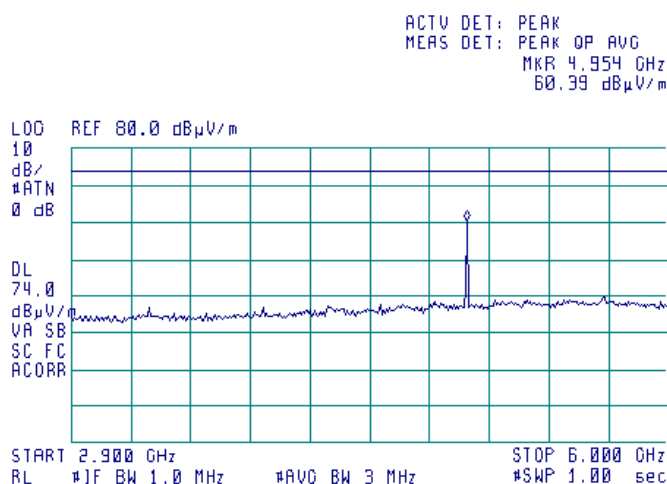

Plot 7.1.16 Radiated emission measurements from 6.0 to 10.0 GHz at low frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

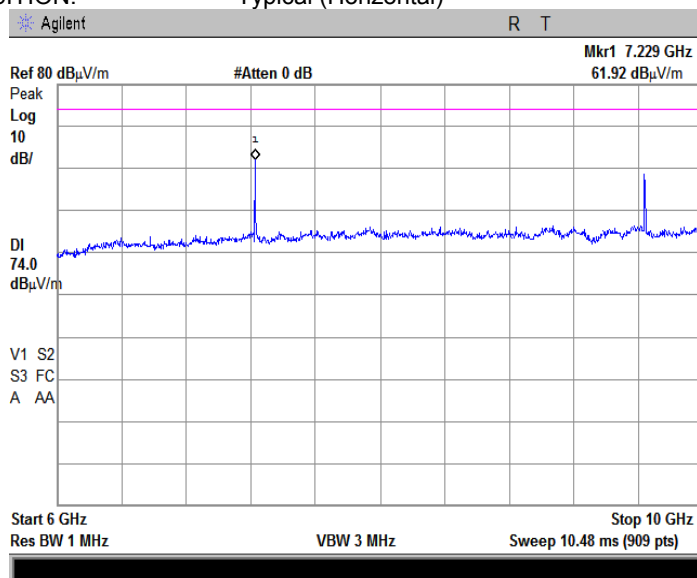

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.17 Radiated emission measurements from 6.0 to 10.0 GHz at mid frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

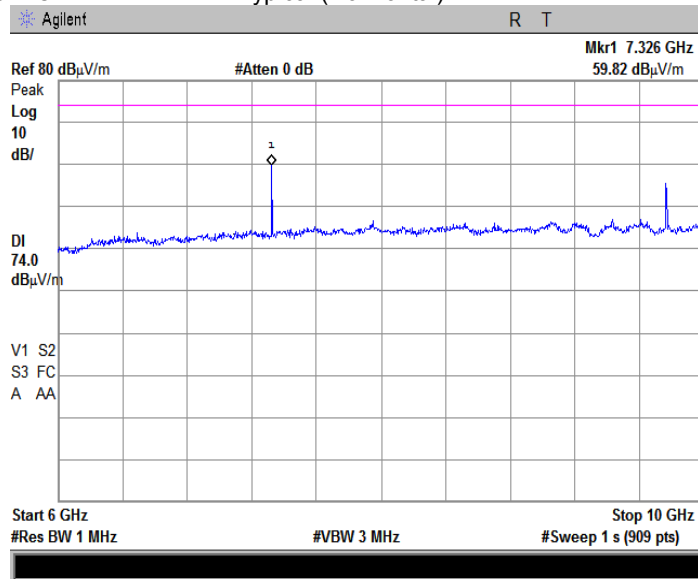

Plot 7.1.18 Radiated emission measurements from 6.0 to 10.0 GHz at high frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

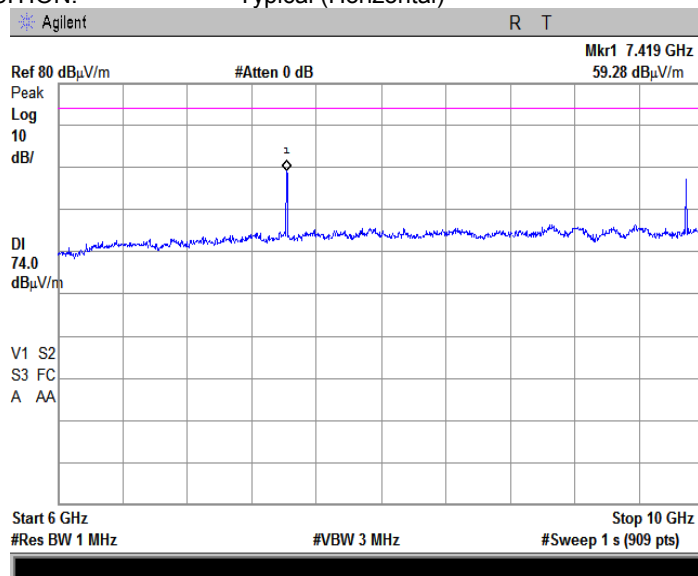

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.19 Radiated emission measurements from 10.0 to 18.0 GHz at low, mid, high frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

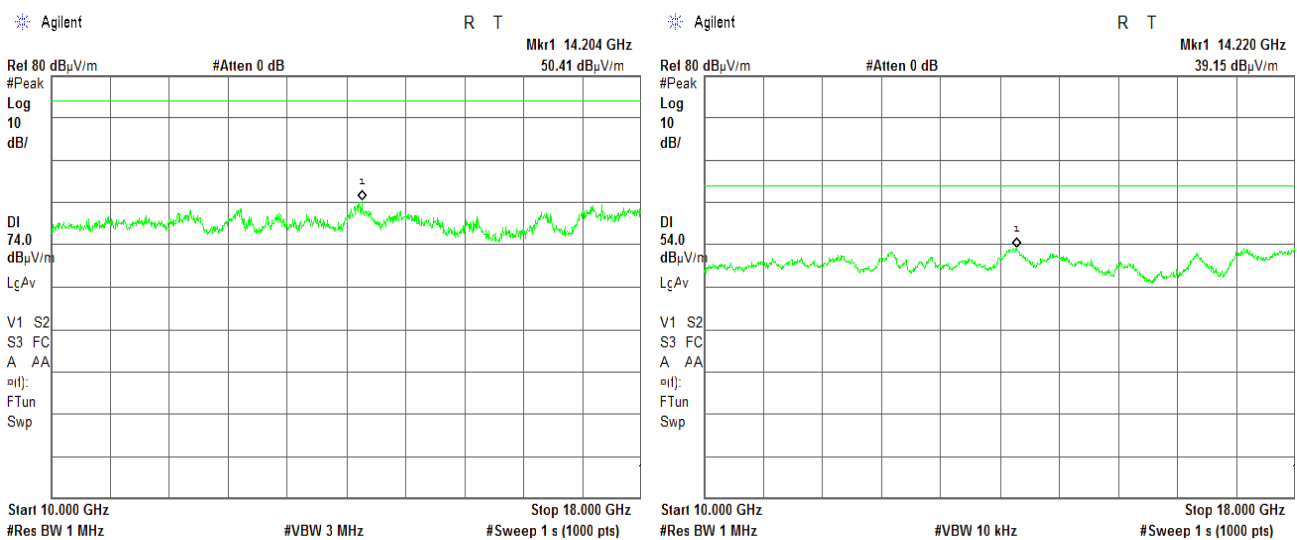

Plot 7.1.20 Radiated emission measurements from 18.0 to 25 GHz at low, mid, high frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

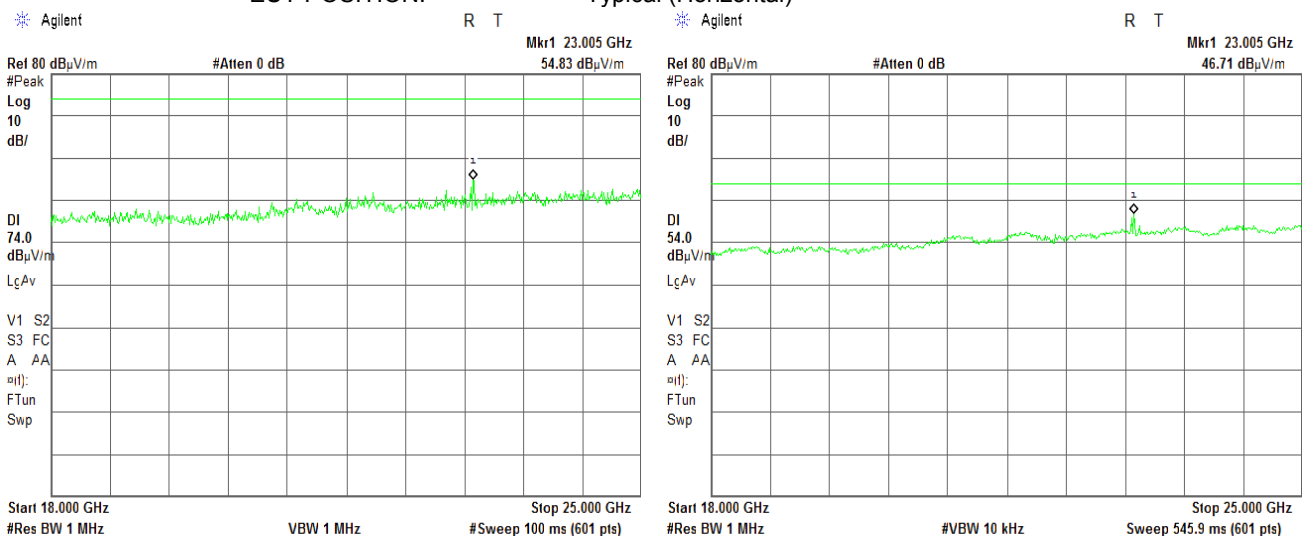


Note: 23 GHz is ambient

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.21 Radiated emission measurements at the second harmonic frequency at low frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

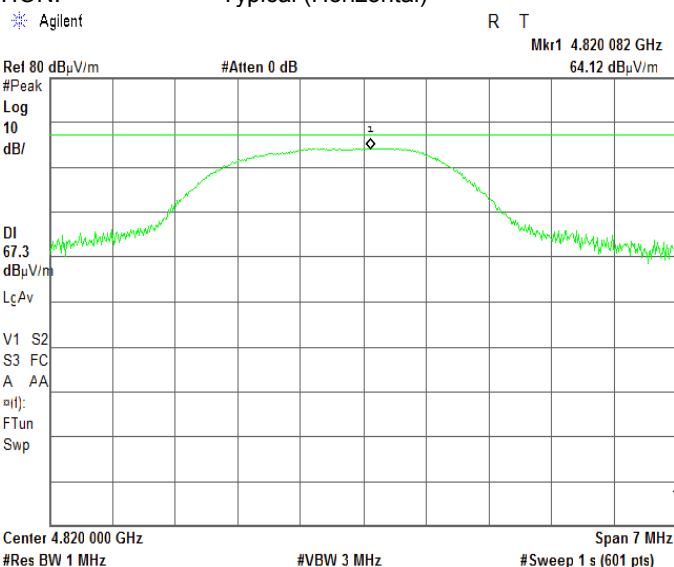

Plot 7.1.22 Radiated emission measurements at the second harmonic frequency at mid frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

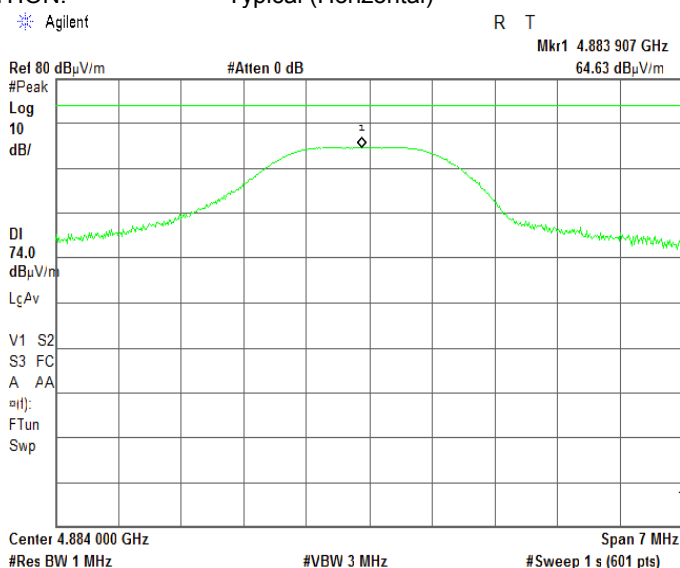




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.23 Radiated emission measurements at the second harmonic frequency at high frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

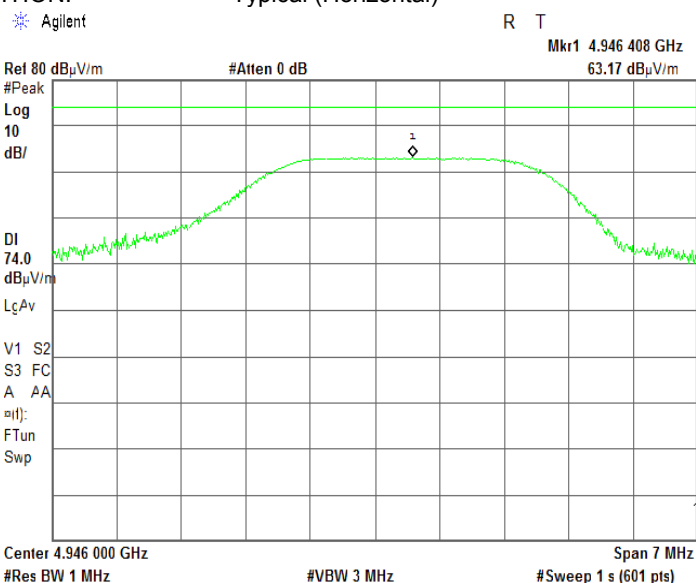

Plot 7.1.24 Radiated emission measurements at the third harmonic frequency at low frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

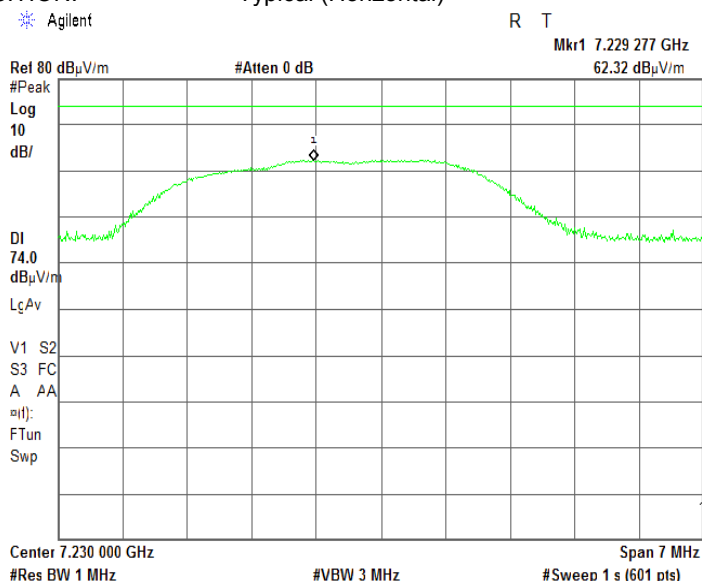




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.25 Radiated emission measurements at the third harmonic frequency at mid frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

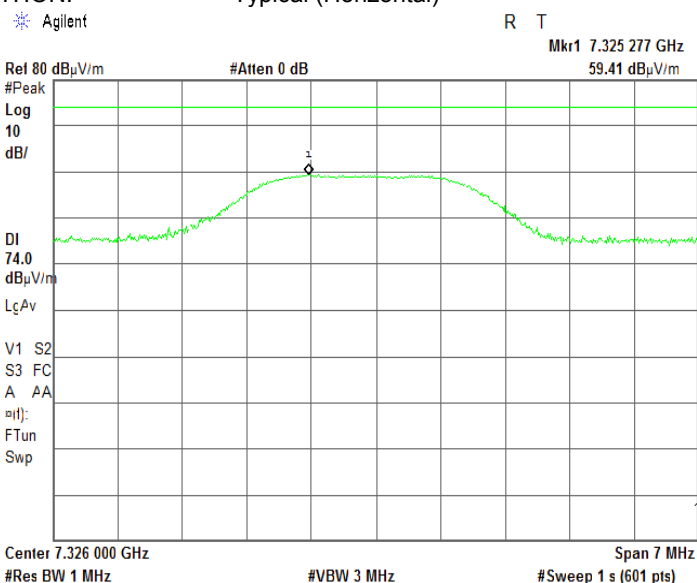

Plot 7.1.26 Radiated emission measurements at the third harmonic frequency at high frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

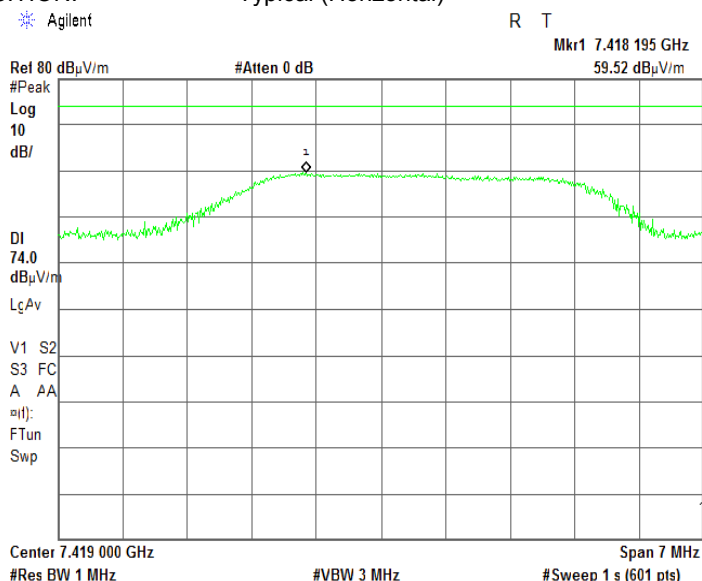

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.1.27 Radiated emission measurements at the fourth harmonic frequency at low frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

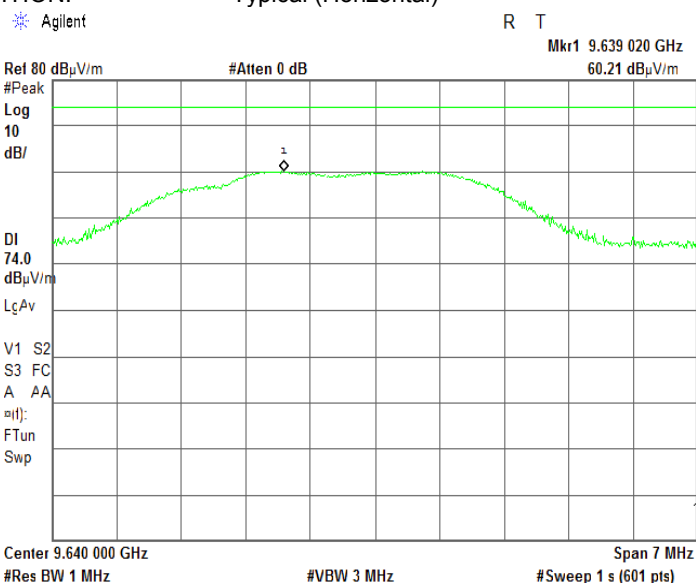

Plot 7.1.28 Radiated emission measurements at the fourth harmonic frequency at mid frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

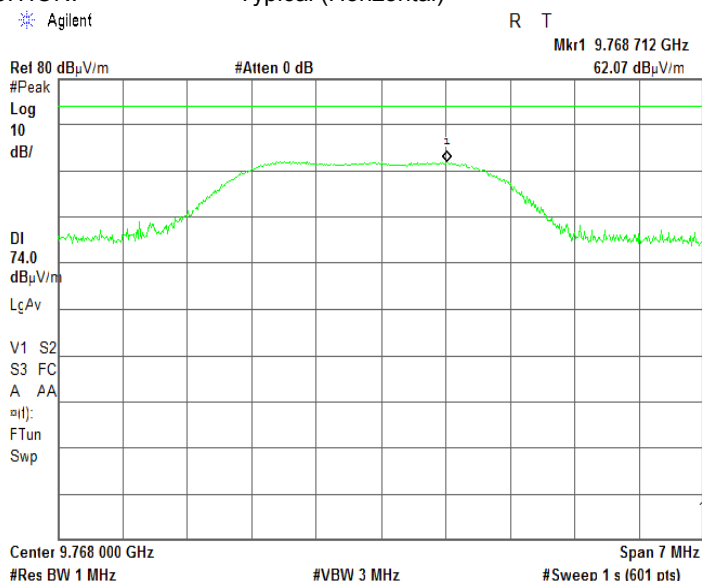




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.1.29 Radiated emission measurements at the fourth harmonic frequency at high frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT POSITION: Typical (Horizontal)

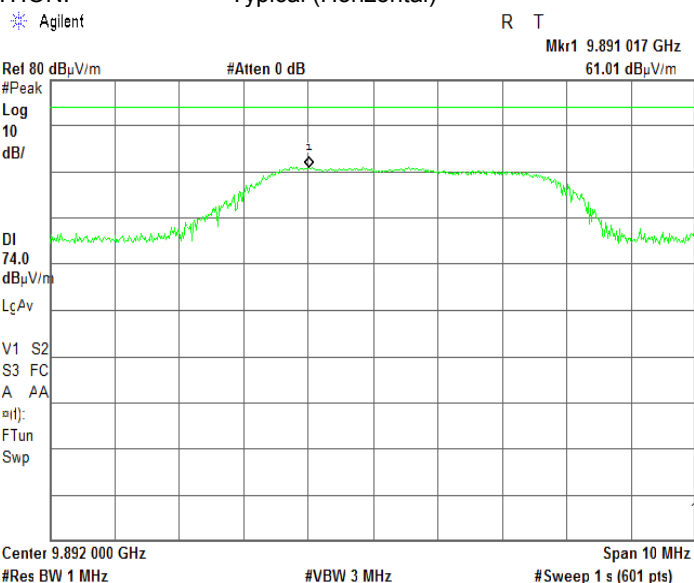





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.1.30 Transmission pulse period

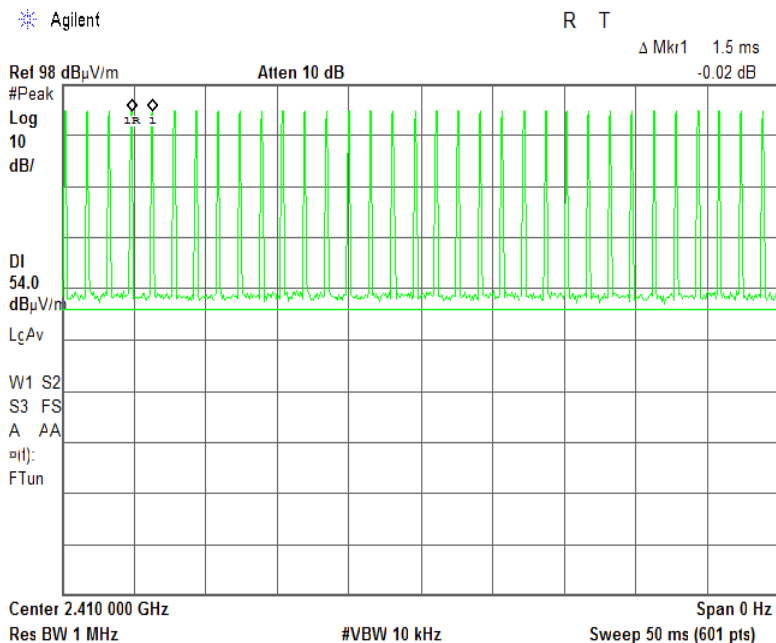

Plot 7.1.31 Transmission pulse duration

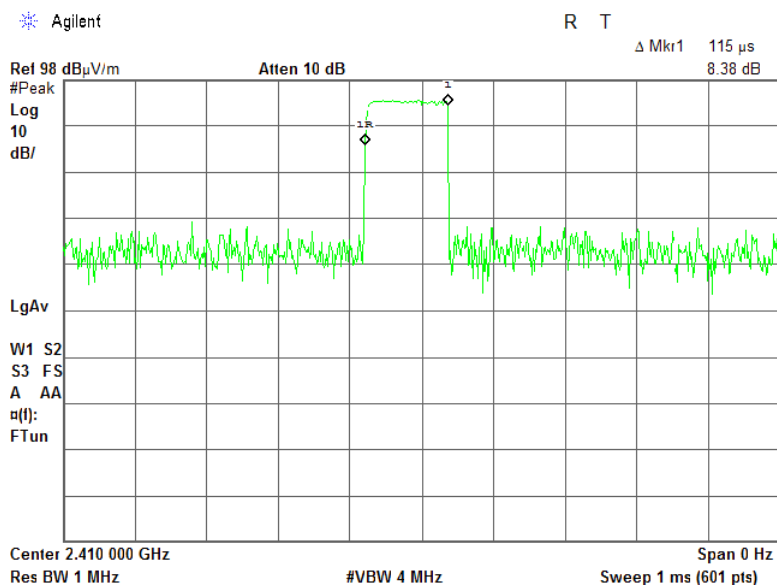

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		14-Mar-16	
Temperature: 23 °C	Air Pressure: 1008 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

7.2 Occupied bandwidth test

7.2.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0
2400 – 2483.5	
5725 – 5875	
24000 – 24250	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.2.2 and associated plot.

7.2.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.2.1 Occupied bandwidth test setup





HERMON LABORATORIES

Report ID: LASRAD_FCC.28141.docx

Date of Issue: 13-Apr-16

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		14-Mar-16	
Temperature: 23 °C	Air Pressure: 1008 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND 2400-2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION:

Band edge	Cross point frequency, MHz	Frequency drift, kHz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	2409.1975	NA	NA	2409.1975	2400.0	Pass
High	2473.8100	NA	NA	2473.8100	2483.5	Pass


Reference numbers of test equipment used

HL 2909								
---------	--	--	--	--	--	--	--	--


Full description is given in Appendix A.

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		14-Mar-16	
Temperature: 23 °C	Air Pressure: 1008 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Cross point frequency, low band edge

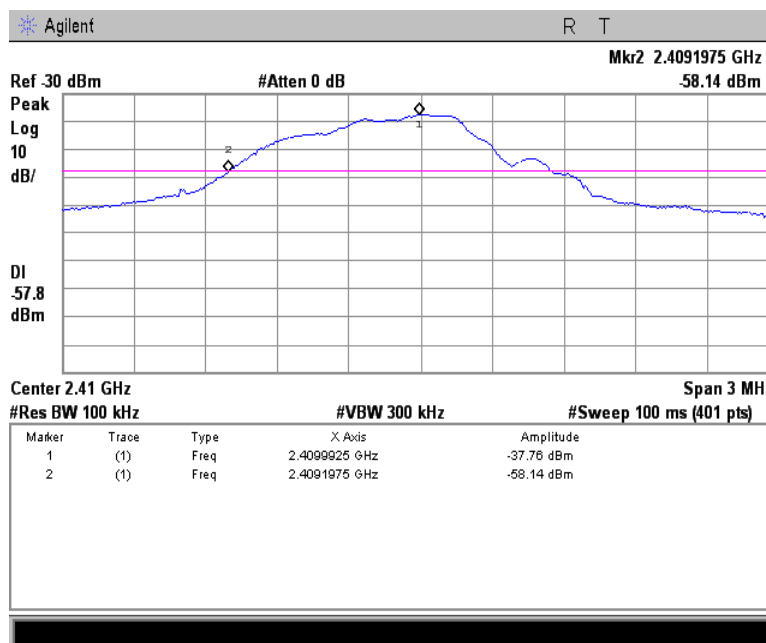


Plot 7.2.2 Cross point frequency, high band edge

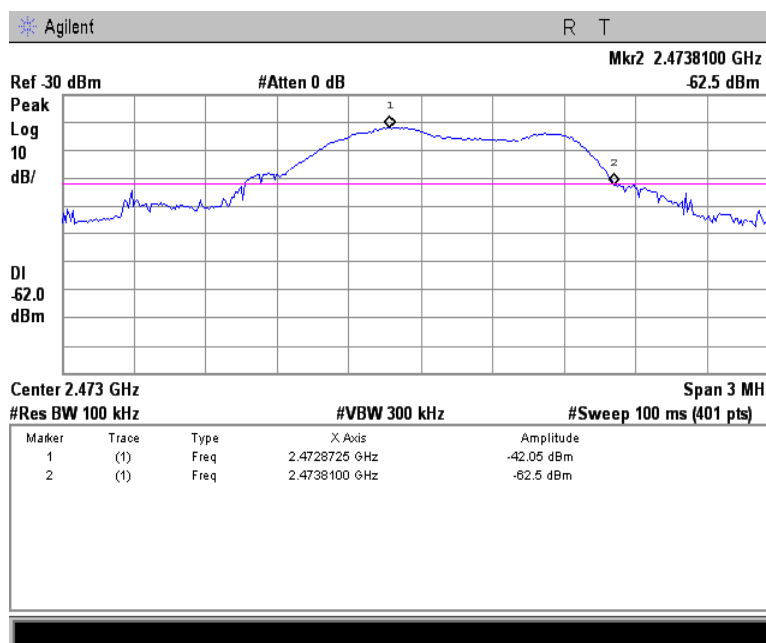


Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		14-Mar-16	
Temperature: 23 °C	Air Pressure: 1008 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.2.3 Occupied bandwidth test result at low frequency

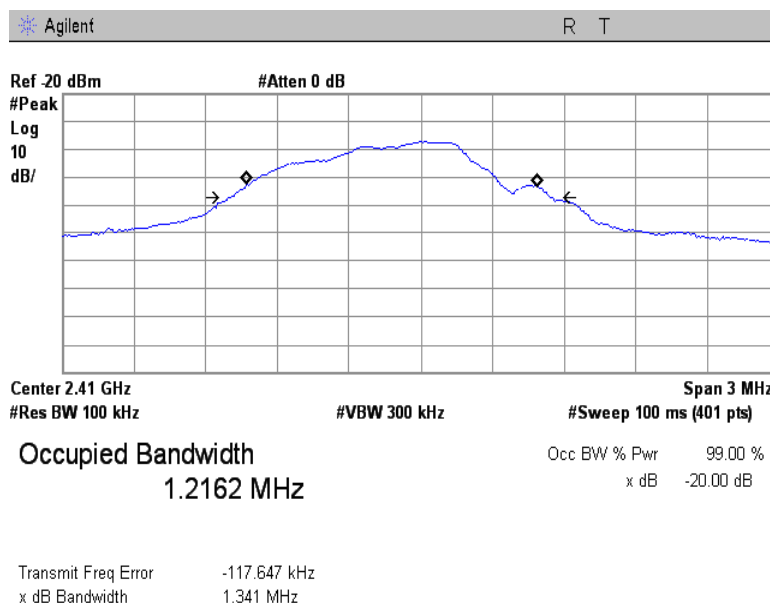

Plot 7.2.4 Occupied bandwidth test result at mid frequency

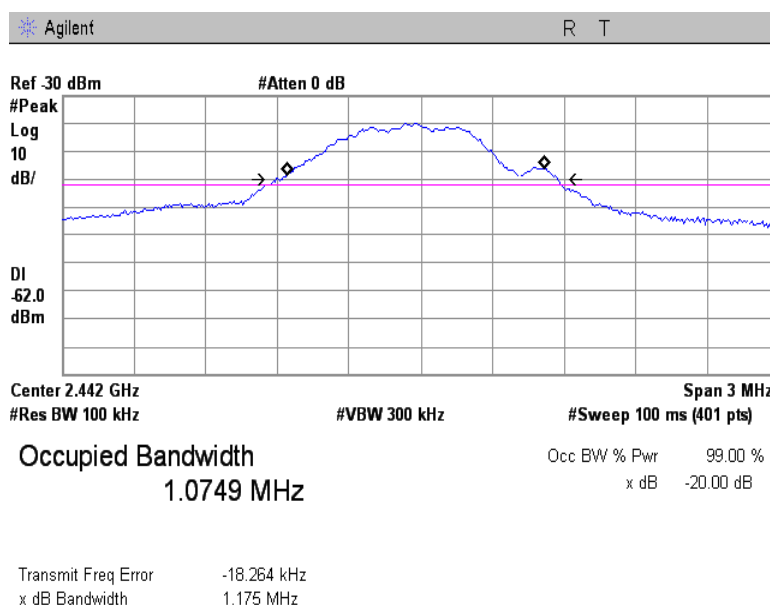




HERMON LABORATORIES

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		14-Mar-16	
Temperature: 23 °C	Air Pressure: 1008 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 7.2.5 Occupied bandwidth test result at high frequency

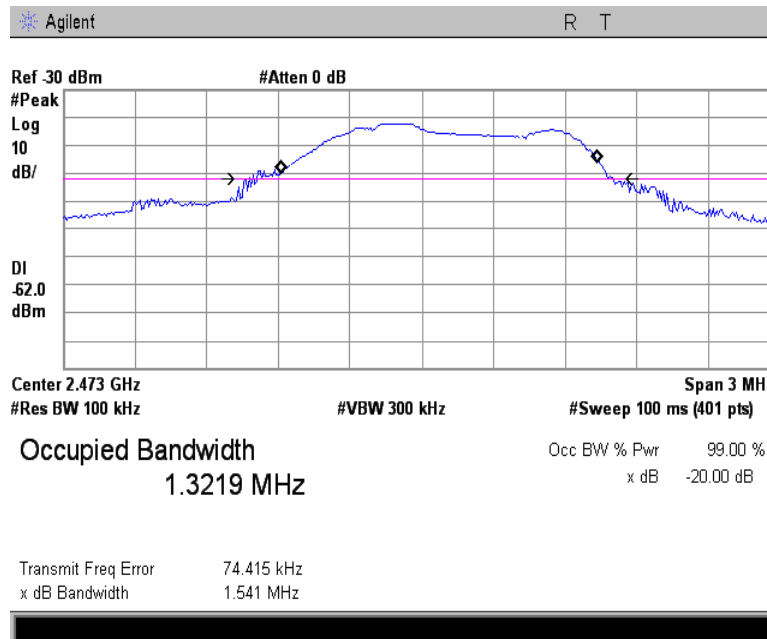



Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

7.3 Band edge emission

7.3.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dB μ V/m		Attenuation below carrier, dBc
	Peak	Average	
2400-2483.5	74.0	54.0	50

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.


7.3.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.3.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.3.2.4 The test results were recorded in Table 7.3.2 and shown in the associated plots.

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Figure 7.3.1 Band edge emission measurement set up

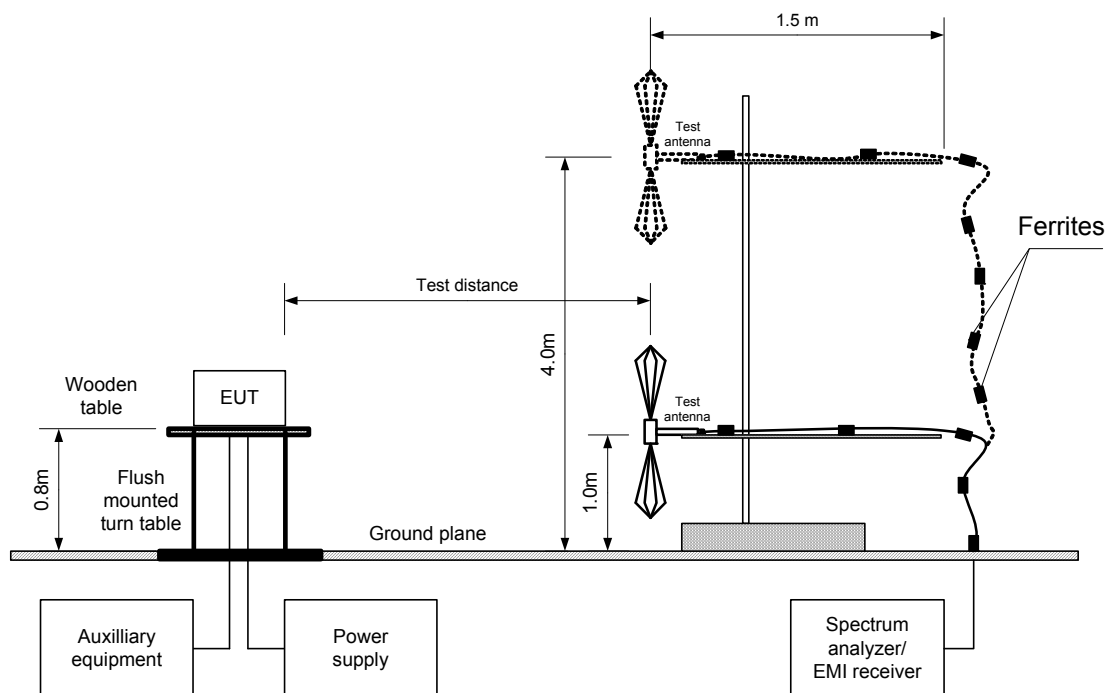



Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 2400-2483.5 MHz
 DETECTOR USED: Peak hold
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Modulation envelope		Measured peak emission, dBµV/m	Peak limit, dBµV/m	Measured average emission, dBµV/m	Average limit, dBµV/m	Margin, dB *	Verdict
Edge	Frequency, MHz						
Low	2400.0	62.85	74	47.45	54	-6.55	Pass
High	2483.5	61.94	74	47.58	54	-6.42	Pass

* - Margin = measured value– limit

Reference numbers of test equipment used


HL 2432	HL 3818	HL 4277	HL 4293				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Mar-16 - 20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			


Plot 7.3.1 Low band edge emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Horizontal

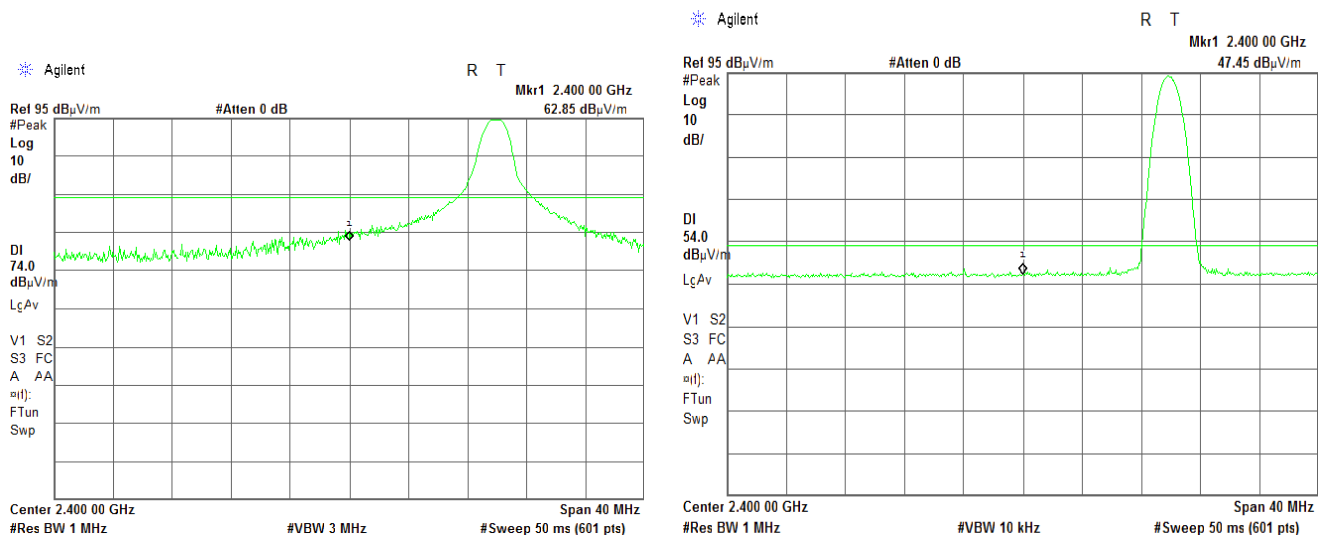

Plot 7.3.2 High band edge emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Horizontal

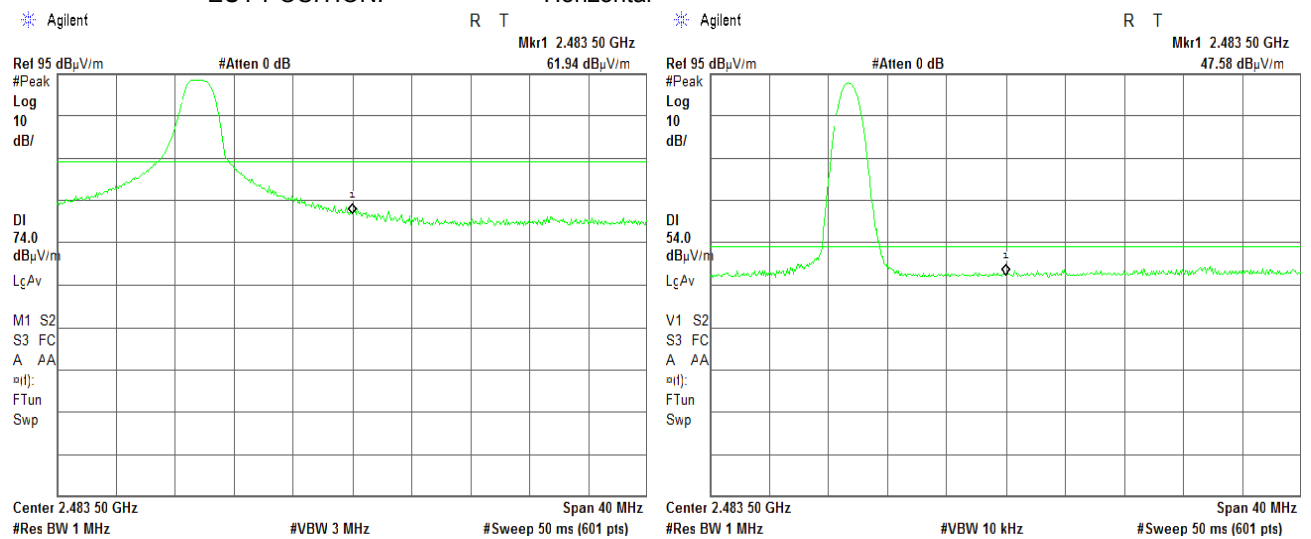

Test specification:		Section 15.203, Antenna requirement	
Test procedure:		Visual inspection / supplier declaration	
Test mode:		Compliance	Verdict: PASS
Date(s):		24-Mar-16	
Temperature: 22 °C	Air Pressure: 1017 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

7.4 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

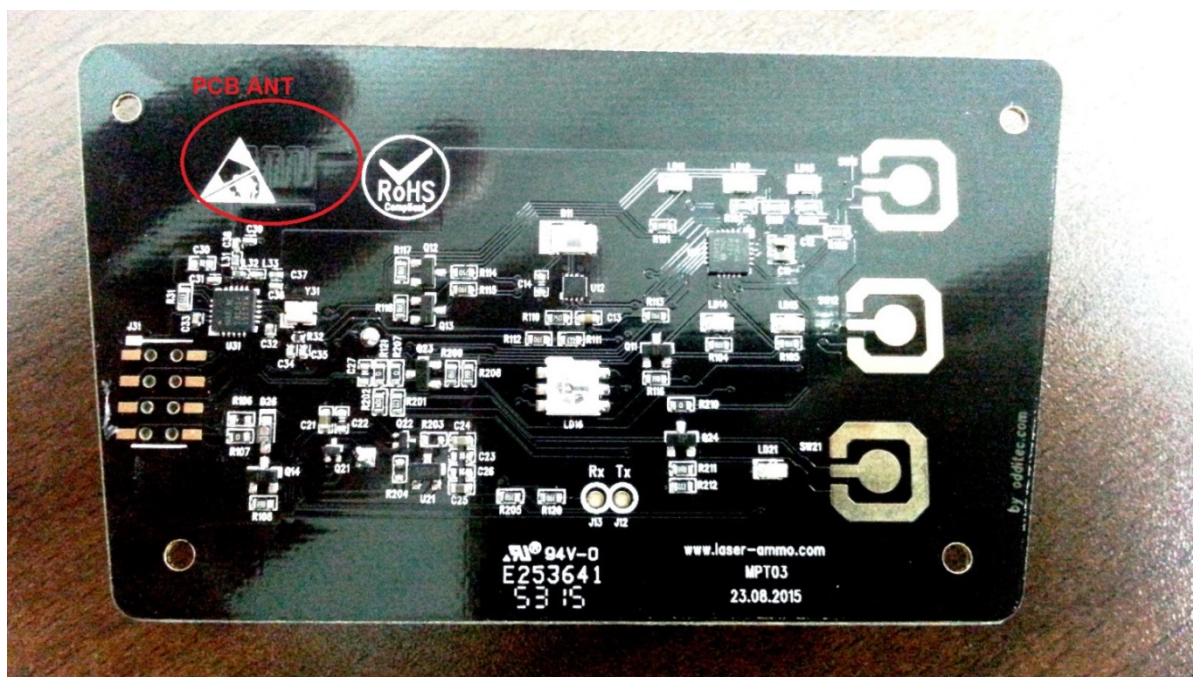

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure


8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

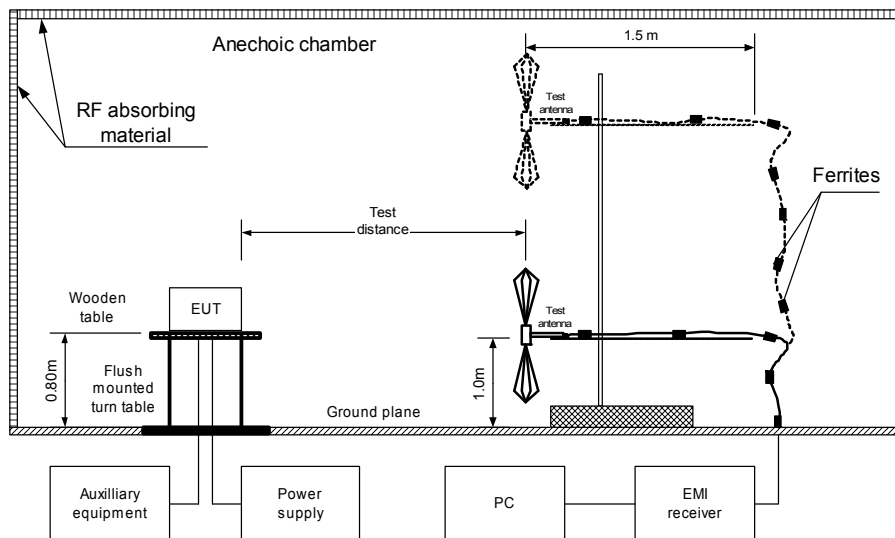

Photograph 8.1.1 Setup for radiated emission measurements





HERMON LABORATORIES

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

RESOLUTION BANDWIDTH: 120 KHz								
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No signals were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 13000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
1378.3	43.49	74	-30.51	38.16	54	-15.84	Horizontal	1.2	0	Pass
2756.6	49.56	74	-24.44	42.86	54	-11.14	Horizontal	1.2	30	
5513.2	45.70	74	-28.30	39.90	54	-14.10	Horizontal	1.1	160	

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0604	HL 1984	HL 3818	HL 4278	HL 4353	HL 4933		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.


Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical & horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by




ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 990.5 MHz
33.73 dBμV/m

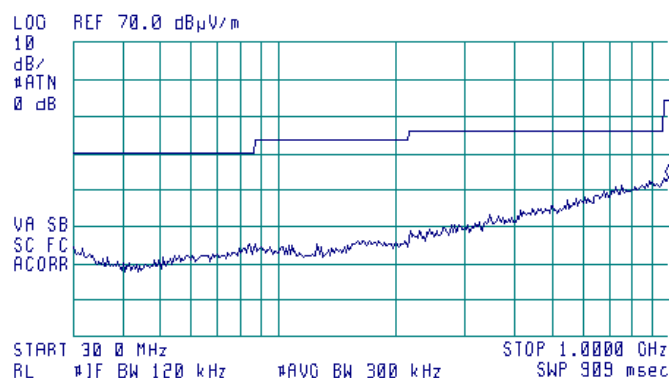

Plot 8.1.2 Radiated emission measurements in 1-2.9 GHz range, vertical & horizontal antenna polarization



TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

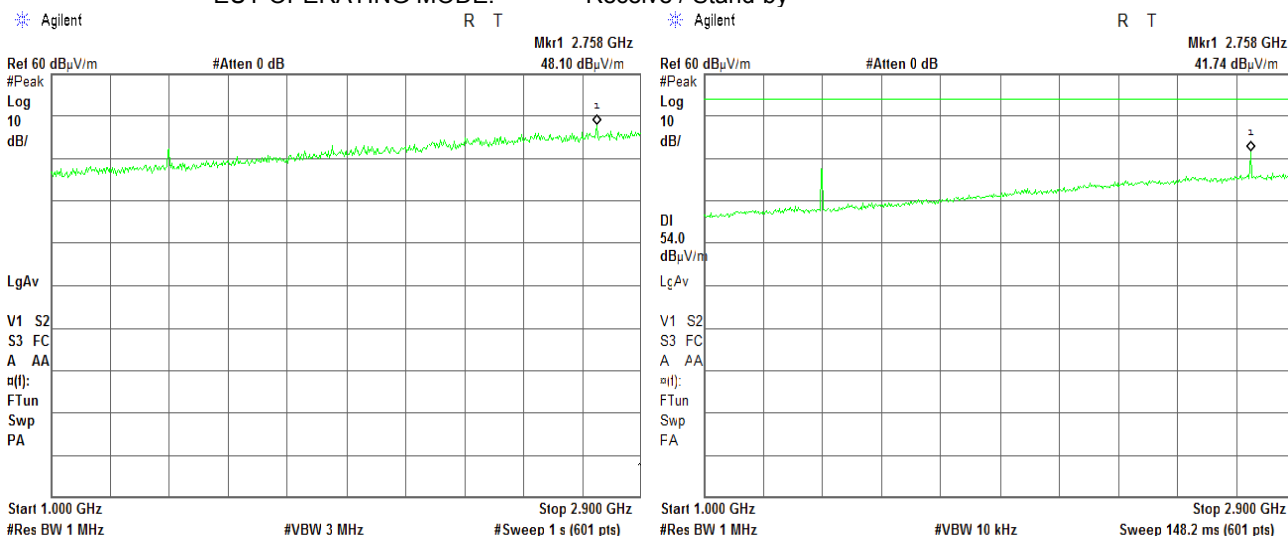

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		20-Mar-16	
Temperature: 22 °C	Air Pressure: 1011 hPa	Relative Humidity: 54 %	Power Supply: Battery
Remarks:			

Plot 8.1.3 Radiated emission measurements in 2.9-13 GHz range, vertical & horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

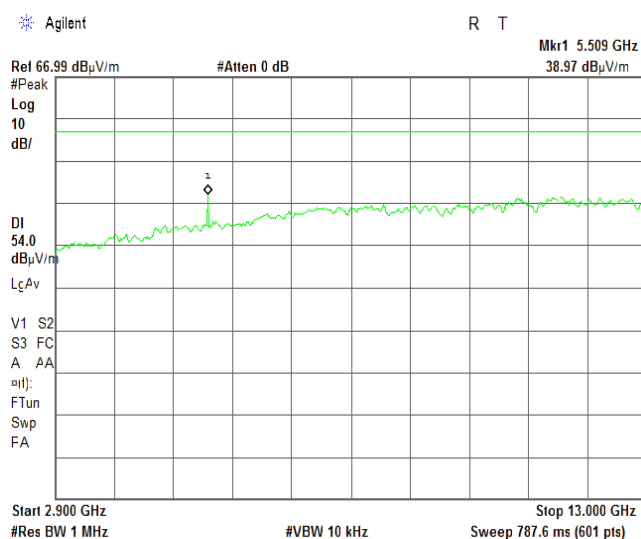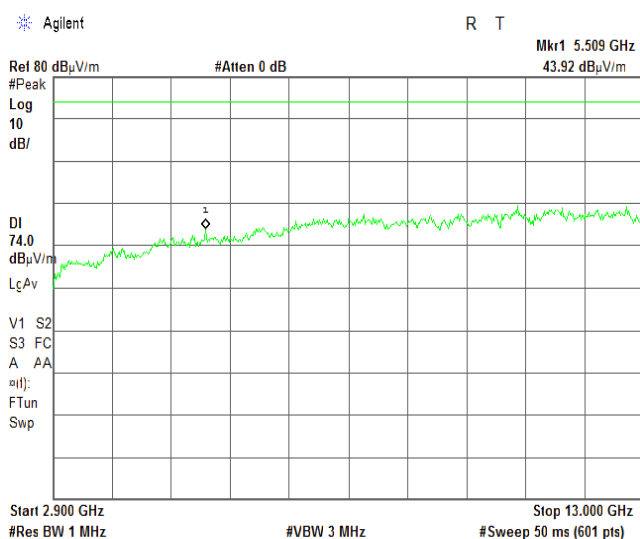

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0415	Cable, Coax, RF, RG-214, 12.3 m	Hermon Laboratories	CC-3	056	07-Dec-15	07-Dec-16
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	15-May-15	15-May-16
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	28-Mar-16	28-Mar-17
2432	Antenna, Double-Ridged Waveguide Horn 1 to 18 GHz	EMC Test Systems	3115	00027177	28-Mar-16	28-Mar-17
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY41444762	21-Feb-16	21-Feb-17
3347	High Pass Filter, 50 Ohm, 6000 to 11500 MHz	Mini-Circuits	VHF-5500+	NA	01-Oct-15	01-Oct-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY48250288	29-Apr-15	29-Apr-16
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1225/2A	15-Feb-16	15-Feb-17
4277	Test Cable , DC-18 GHz, 3.05 m, N/M - N/M	Mini-Circuits	APC-10FT-NMNM+	0748A	22-Nov-15	22-Nov-16
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	22-Nov-15	22-Nov-16
4293	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	01-Feb-16	01-Feb-17
4294	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	07-Dec-15	07-Dec-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101003	15-Mar-16	15-Mar-17
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00262, 3427A00123	05-Nov-15	05-Nov-16
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	04-Sep-15	04-Sep-16
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	09-Nov-15	09-Nov-16

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-118		
Serial Number:			701046		
Calibration Distance:			3 Meter		
Polarization:			Horizontal		
Calibration Date:			11/12/2014		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
Antenna Factor to be added to receiver reading: Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



HERMON LABORATORIES

Antenna factor, HL 4956

**Active Horn Antenna Factor Calibration**

18 GHz to 40 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-840		
Serial Number:			105004		
Calibration Distance:			3 meter		
Polarization:			Horizontal		
Calibration Date:			1/26/2015		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
<p>Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna)</p> <p>Corrected Reading (dBμV/m) = Meter Reading (dBμV) + AFE(dB/m)</p>					

Cable loss
Cable coax, RG-214, 12.3 m, s/n 056, HL 0415

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.23	±0.12
2	30	0.44	±0.12
3	50	0.60	±0.12
4	100	0.89	±0.12
5	150	1.11	±0.13
6	200	1.30	±0.13
7	250	1.45	±0.13
8	300	1.61	±0.13
9	400	1.94	±0.13
10	500	2.18	±0.13
11	600	2.45	±0.14
12	700	2.67	±0.14
13	800	2.94	±0.14
14	900	3.16	±0.14
15	1000	3.38	±0.14

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52

Cable loss
Test cable, Mini-Circuits, S/N 0748A, 18 GHz, 3.05 m, N/M - N/M
APC-10FT-NMNM+, HL 4277

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	4400	3.19	9000	4.82	13600	5.97
30	0.21	4500	3.24	9100	4.87	13700	6.01
50	0.28	4600	3.29	9200	4.90	13800	6.04
100	0.40	4700	3.34	9300	4.96	13900	6.09
200	0.59	4800	3.37	9400	4.99	14000	6.12
300	0.73	4900	3.41	9500	5.03	14100	6.16
400	0.86	5000	3.45	9600	5.07	14200	6.20
500	0.97	5100	3.48	9700	5.11	14300	6.22
600	1.07	5200	3.52	9800	5.13	14400	6.26
700	1.15	5300	3.56	9900	5.15	14500	6.29
800	1.23	5400	3.58	10000	5.17	14600	6.33
900	1.31	5500	3.62	10100	5.19	14700	6.33
1000	1.39	5600	3.65	10200	5.19	14800	6.35
1100	1.46	5700	3.69	10300	5.21	14900	6.38
1200	1.54	5800	3.72	10400	5.22	15000	6.38
1300	1.60	5900	3.76	10500	5.22	15100	6.40
1400	1.67	6000	3.80	10600	5.22	15200	6.42
1500	1.74	6100	3.84	10700	5.25	15300	6.46
1600	1.79	6200	3.89	10800	5.25	15400	6.51
1700	1.86	6300	3.92	10900	5.26	15500	6.55
1800	1.92	6400	3.96	11000	5.29	15600	6.56
1900	1.98	6500	4.00	11100	5.30	15700	6.59
2000	2.04	6600	4.04	11200	5.31	15800	6.60
2100	2.09	6700	4.07	11300	5.35	15900	6.64
2200	2.14	6800	4.11	11400	5.36	16000	6.65
2300	2.20	6900	4.14	11500	5.39	16100	6.65
2400	2.25	7000	4.17	11600	5.41	16200	6.67
2500	2.31	7100	4.21	11700	5.45	16300	6.69
2600	2.36	7200	4.23	11800	5.48	16400	6.71
2700	2.42	7300	4.27	11900	5.51	16500	6.72
2800	2.46	7400	4.30	12000	5.53	16600	6.73
2900	2.51	7500	4.34	12100	5.56	16700	6.75
3000	2.56	7600	4.37	12200	5.59	16800	6.80
3100	2.60	7700	4.40	12300	5.61	16900	6.82
3200	2.65	7800	4.44	12400	5.62	17000	6.85
3300	2.70	7900	4.47	12500	5.65	17100	6.90
3400	2.75	8000	4.49	12600	5.68	17200	6.96
3500	2.80	8100	4.53	12700	5.71	17300	7.02
3600	2.85	8200	4.57	12800	5.73	17400	7.07
3700	2.90	8300	4.60	12900	5.76	17500	7.06
3800	2.95	8400	4.63	13000	5.80	17600	7.06
3900	2.98	8500	4.67	13100	5.83	17700	7.08
4000	3.02	8600	4.69	13200	5.86	17800	7.09
4100	3.07	8700	4.73	13300	5.88	17900	7.07
4200	3.10	8800	4.76	13400	5.91	18000	7.08
4300	3.14	8900	4.79	13500	5.94		

Cable loss
Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4278

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		

Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner,
Sucoflex P103, HL 4293

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	4900	2.01	9800	2.94	14700	3.85
100	0.28	5000	2.03	9900	2.95	14800	3.87
200	0.39	5100	2.06	10000	2.98	14900	3.89
300	0.48	5200	2.08	10100	3.01	15000	3.94
400	0.55	5300	2.07	10200	3.04	15100	3.94
500	0.61	5400	2.12	10300	3.04	15200	3.91
600	0.68	5500	2.12	10400	3.04	15300	3.93
700	0.73	5600	2.16	10500	3.07	15400	3.94
800	0.78	5700	2.16	10600	3.10	15500	3.96
900	0.83	5800	2.22	10700	3.11	15600	3.96
1000	0.88	5900	2.24	10800	3.12	15700	3.97
1100	0.92	6000	2.28	10900	3.15	15800	4.00
1200	0.96	6100	2.31	11000	3.22	15900	4.01
1300	1.00	6200	2.32	11100	3.20	16000	4.03
1400	1.04	6300	2.34	11200	3.19	16100	4.02
1500	1.07	6400	2.37	11300	3.21	16200	4.05
1600	1.11	6500	2.38	11400	3.26	16300	4.06
1700	1.15	6600	2.38	11500	3.27	16400	4.08
1800	1.19	6700	2.40	11600	3.27	16500	4.07
1900	1.22	6800	2.42	11700	3.28	16600	4.10
2000	1.25	6900	2.43	11800	3.32	16700	4.14
2100	1.28	7000	2.44	11900	3.34	16800	4.12
2200	1.34	7100	2.48	12000	3.34	16900	4.13
2300	1.35	7200	2.46	12100	3.35	17000	4.13
2400	1.39	7300	2.51	12200	3.39	17100	4.19
2500	1.40	7400	2.53	12300	3.44	17200	4.22
2600	1.44	7500	2.50	12400	3.44	17300	4.20
2700	1.47	7600	2.53	12500	3.43	17400	4.21
2800	1.50	7700	2.63	12600	3.45	17500	4.19
2900	1.54	7800	2.62	12700	3.47	17600	4.22
3000	1.56	7900	2.58	12800	3.51	17700	4.24
3100	1.59	8000	2.64	12900	3.51	17800	4.23
3200	1.62	8100	2.66	13000	3.52	17900	4.26
3300	1.64	8200	2.67	13100	3.56	18000	4.27
3400	1.67	8300	2.63	13200	3.57		
3500	1.69	8400	2.64	13300	3.58		
3600	1.72	8500	2.65	13400	3.60		
3700	1.74	8600	2.68	13500	3.61		
3800	1.78	8700	2.72	13600	3.66		
3900	1.80	8800	2.73	13700	3.68		
4000	1.83	8900	2.74	13800	3.67		
4100	1.84	9000	2.77	13900	3.68		
4200	1.86	9100	2.79	14000	3.73		
4300	1.89	9200	2.82	14100	3.74		
4400	1.92	9300	2.81	14200	3.74		
4500	1.94	9400	2.85	14300	3.76		
4600	1.97	9500	2.89	14400	3.78		
4700	1.97	9600	2.90	14500	3.81		
4800	2.01	9700	2.92	14600	3.83		

Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner,
Sucoflex P103, HL 4294

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	4900	2.09	10000	2.90	15100	3.61
30	0.17	5000	2.10	10100	2.92	15200	3.67
50	0.22	5100	2.14	10200	2.95	15300	3.63
100	0.30	5200	2.16	10300	2.96	15400	3.64
200	0.42	5300	2.17	10400	2.99	15500	3.68
300	0.51	5400	2.19	10500	2.99	15600	3.71
400	0.59	5500	2.19	10600	3.03	15700	3.74
500	0.66	5600	2.22	10700	3.03	15800	3.71
600	0.72	5700	2.24	10800	3.04	15900	3.74
700	0.77	5800	2.23	10900	3.05	16000	3.71
800	0.82	5900	2.26	11000	3.09	16100	3.73
900	0.88	6000	2.27	11100	3.07	16200	3.76
1000	0.93	6100	2.26	11200	3.08	16300	3.82
1100	0.98	6200	2.29	11300	3.11	16400	3.90
1200	1.02	6300	2.30	11400	3.12	16500	3.81
1300	1.06	6400	2.34	11500	3.11	16600	3.88
1400	1.10	6500	2.34	11600	3.15	16700	3.87
1500	1.14	6600	2.36	11700	3.16	16800	3.89
1600	1.19	6700	2.36	11800	3.18	16900	3.95
1700	1.23	6800	2.39	11900	3.19	17000	4.02
1800	1.27	6900	2.39	12000	3.23	17100	4.04
1900	1.30	7000	2.44	12100	3.25	17200	3.99
2000	1.35	7100	2.46	12200	3.22	17300	4.03
2100	1.38	7200	2.44	12300	3.25	17400	4.03
2200	1.42	7300	2.48	12400	3.25	17500	4.06
2300	1.45	7400	2.47	12500	3.28	17600	4.05
2400	1.48	7500	2.48	12600	3.27	17700	4.12
2500	1.51	7600	2.50	12700	3.27	17800	4.14
2600	1.55	7700	2.53	12800	3.30	17900	4.18
2700	1.59	7800	2.56	12900	3.30	18000	4.14
2800	1.62	7900	2.55	13000	3.27		
2900	1.65	8000	2.56	13100	3.32		
3000	1.66	8100	2.56	13200	3.32		
3100	1.69	8200	2.57	13300	3.32		
3200	1.71	8300	2.59	13400	3.35		
3300	1.74	8400	2.62	13500	3.38		
3400	1.76	8500	2.67	13600	3.39		
3500	1.78	8600	2.65	13700	3.42		
3600	1.80	8700	2.68	13800	3.47		
3700	1.85	8800	2.68	13900	3.45		
3800	1.88	8900	2.68	14000	3.49		
3900	1.90	9000	2.74	14100	3.50		
4000	1.91	9100	2.74	14200	3.55		
4100	1.93	9200	2.76	14300	3.59		
4200	1.96	9300	2.78	14400	3.58		
4300	1.97	9400	2.79	14500	3.56		
4400	1.99	9500	2.80	14600	3.57		
4500	2.02	9600	2.83	14700	3.57		
4600	2.02	9700	2.84	14800	3.57		
4700	2.04	9800	2.86	14900	3.64		
4800	2.05	9900	2.92	15000	3.64		

**Cable loss**

**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT