



# FCC RF Test Report

APPLICANT : Dagabod LLC  
EQUIPMENT : Electronic Display Device  
MODEL NAME : CW24Wi  
FCC ID : 2AHXB-4396  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The testing was completed on Jan. 27, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2AHXB-4396

Page Number : 1 of 106

Report Issued Date : Mar. 10, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 1.1



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT .....	6
1.5 Testing Location .....	6
1.6 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Descriptions of Test Mode .....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system .....	11
2.6 EUT Operation Test Setup .....	11
2.7 Measurement Results Explanation Example.....	12
<b>3 TEST RESULT .....</b>	<b>13</b>
3.1 Number of Channel Measurement .....	13
3.2 Hopping Channel Separation Measurement .....	16
3.3 Dwell Time Measurement.....	29
3.4 20dB and 99% Bandwidth Measurement .....	32
3.5 Peak Output Power Measurement .....	57
3.6 Conducted Band Edges Measurement.....	60
3.7 Conducted Spurious Emission Measurement .....	73
3.8 Radiated Band Edges and Spurious Emission Measurement .....	92
3.9 AC Conducted Emission Measurement.....	100
3.10 Antenna Requirements.....	104
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>105</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>106</b>
<b>APPENDIX A. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX B. RADIATED SPURIOUS EMISSION PLOTS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR662707-01A	Rev. 01	Initial issue of report	Mar. 10, 2017

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass
3.4	-	99% Bandwidth	-	Pass
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass
3.9	15.207	AC Conducted Emission	15.207(a)	Pass
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass



# 1 General Description

## 1.1 Applicant

Dagabod LLC

1105 2nd Street South, Suite 100, Nampa, Idaho 83651

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Electronic Display Device
Model Name	CW24Wi
FCC ID	2AHXB-4396
EUT supports Radios application	WLAN 11b/g/n HT20 Bluetooth BR/EDR

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	<b>&lt;Ant. 1&gt;</b> Bluetooth BR(1Mbps) : 7.69 dBm (0.0059 W) Bluetooth EDR (2Mbps) : 6.82 dBm (0.0048 W) Bluetooth EDR (3Mbps) : 7.02 dBm (0.0050 W) <b>&lt;Ant. 2&gt;</b> Bluetooth BR(1Mbps) : 7.24 dBm (0.0053 W) Bluetooth EDR (2Mbps) : 7.04 dBm (0.0051 W) Bluetooth EDR (3Mbps) : 7.40 dBm (0.0055 W)
99% Occupied Bandwidth	<b>&lt;Ant. 1&gt;</b> Bluetooth BR(1Mbps) : 0.956MHz Bluetooth EDR (2Mbps) : 1.204MHz Bluetooth EDR (3Mbps) : 1.180MHz <b>&lt;Ant. 2&gt;</b> Bluetooth BR(1Mbps) : 0.956MHz Bluetooth EDR (2Mbps) : 1.204MHz Bluetooth EDR (3Mbps) : 1.180MHz
Antenna Type / Gain	<b>&lt;Ant. 1&gt;</b> Fixed Internal Antenna type with gain -0.30 dBi <b>&lt;Ant. 2&gt;</b> Fixed Internal Antenna type with gain -4.90 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH12-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

## 2.2 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

<Ant. 1>

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.56 dBm	6.81 dBm	6.91 dBm
Ch39	2441MHz	6.63 dBm	6.38 dBm	6.52 dBm
Ch78	2480MHz	7.69 dBm	6.82 dBm	7.02 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.

<Ant. 2>

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.80 dBm	7.04 dBm	7.40 dBm
Ch39	2441MHz	6.75 dBm	6.32 dBm	6.47 dBm
Ch78	2480MHz	7.24 dBm	6.80 dBm	6.91 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
  2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane for Ant. 1; Z Plane for Ant. 2 as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth (1Mbps for Ant. 1; 3Mbps for Ant. 2) mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.3 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi$ /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	EUT with Ant. 1		
	Bluetooth 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
	EUT with Ant. 2		
	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + USB Cable (Charging from Adapter)		
	Mode 2 Bluetooth Link + USB Cable (Charging from Adapter)		
Remark:			
1. For radiated test cases, the worst mode data rate (1Mbps for Ant. 1; 3Mbps for Ant. 2) was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than (1Mbps for Ant. 1; 3Mbps for Ant. 2), and no other significantly frequencies found in conducted spurious emission.			
2. The worst case of conducted emission is mode 2; only the test data of it was reported.			

## 2.4 Connection Diagram of Test System


### <Bluetooth Tx Mode>

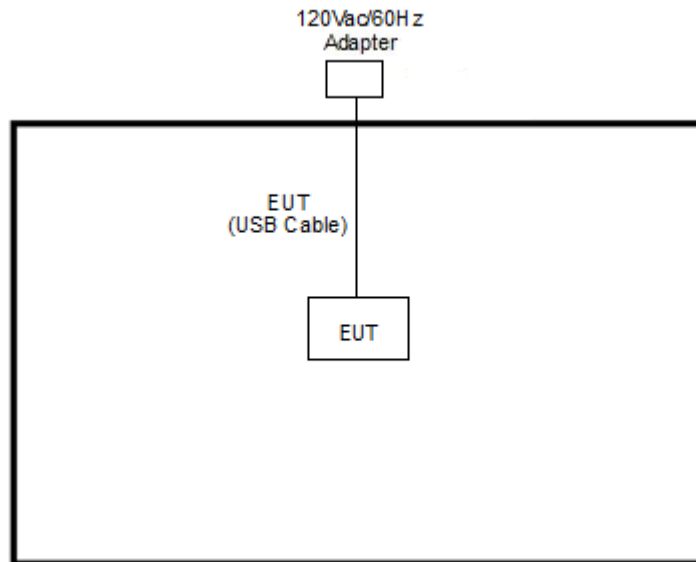

### <AC Conducted Emission Mode for WLAN Link>

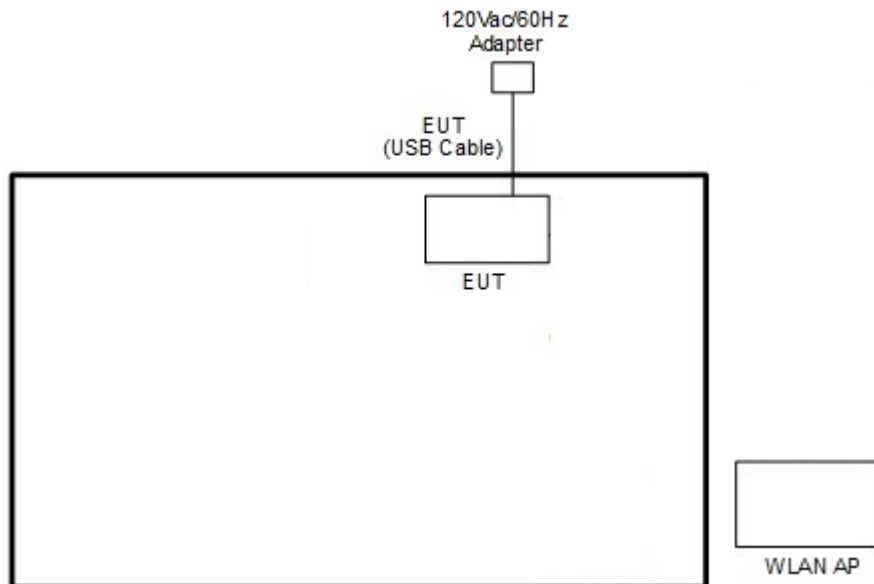

### <AC Conducted Emission Mode for Bluetooth Link>

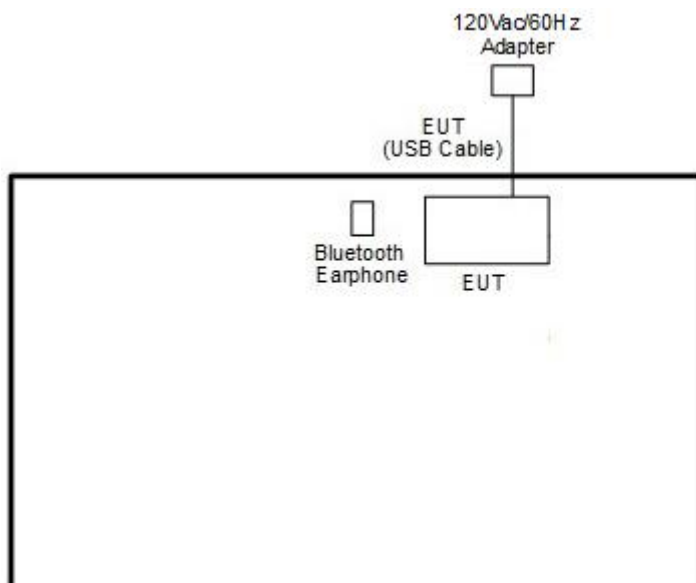

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Adapter	N/A	N/A	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

The RF test items, programmed RF utility, “ADB” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.



## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

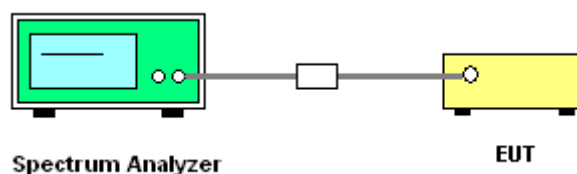

##### 3.1.5 Test Result of Number of Hopping Frequency

<Ant. 1>


<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

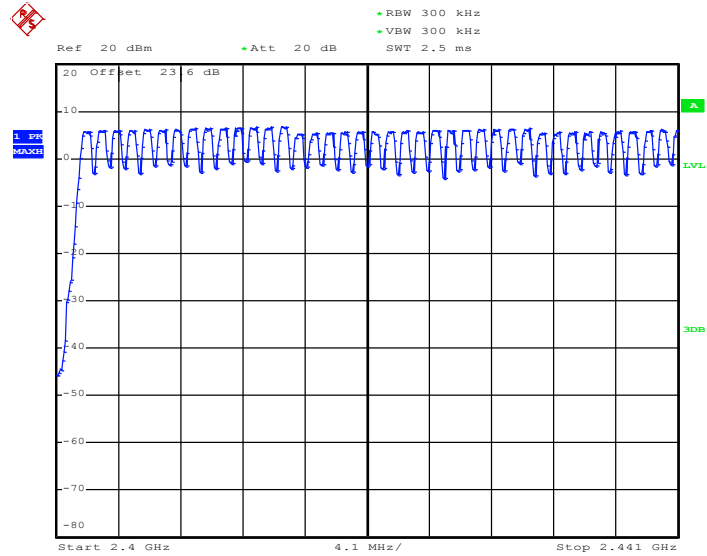

Date: 27.JAN.2017 01:32:05

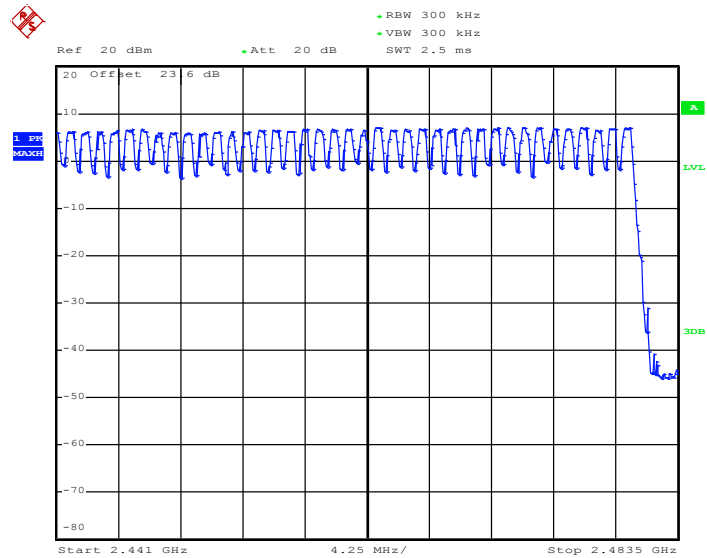


Date: 27.JAN.2017 01:32:34




&lt;Ant. 2&gt;

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

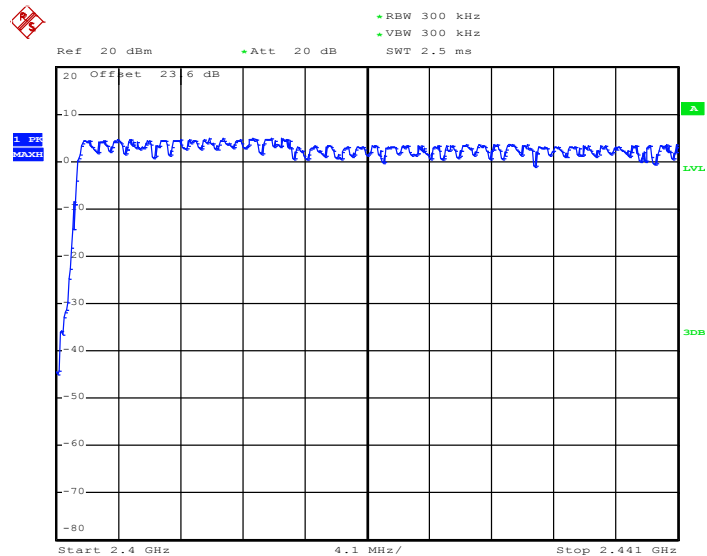**Number of Hopping Channel Plot on Channel 00 - 78**

Date: 27.JAN.2017 06:10:50

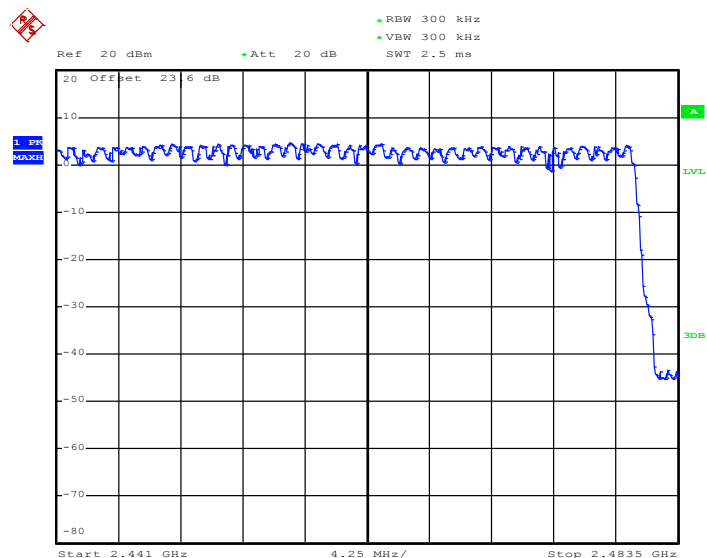

Date: 27.JAN.2017 06:11:52

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

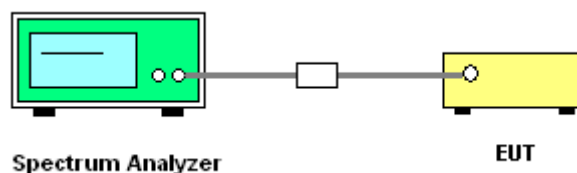






## 3.2.5 Test Result of Hopping Channel Separation

&lt;Ant. 1&gt;

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6907	Pass
39	2441	1.002	0.6853	Pass
78	2480	1.008	0.6880	Pass


Channel Separation Plot on Channel 00 - 01

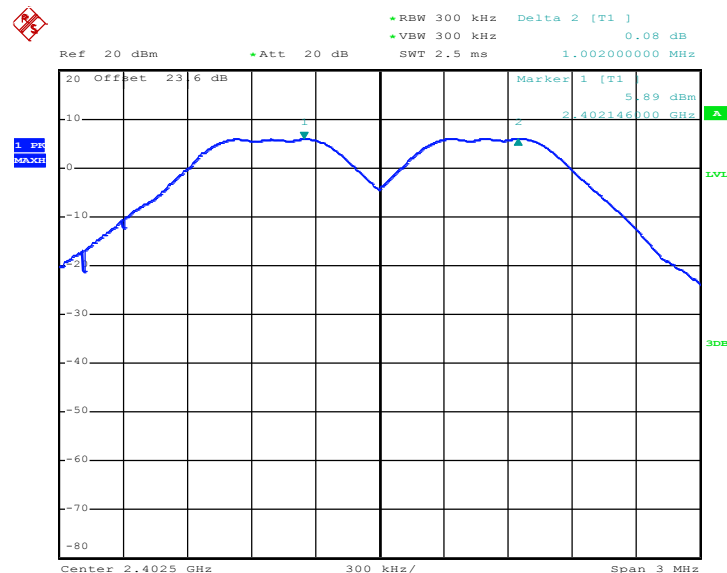

Date: 27.JAN.2017 02:02:06




Channel Separation Plot on Channel 39 - 40

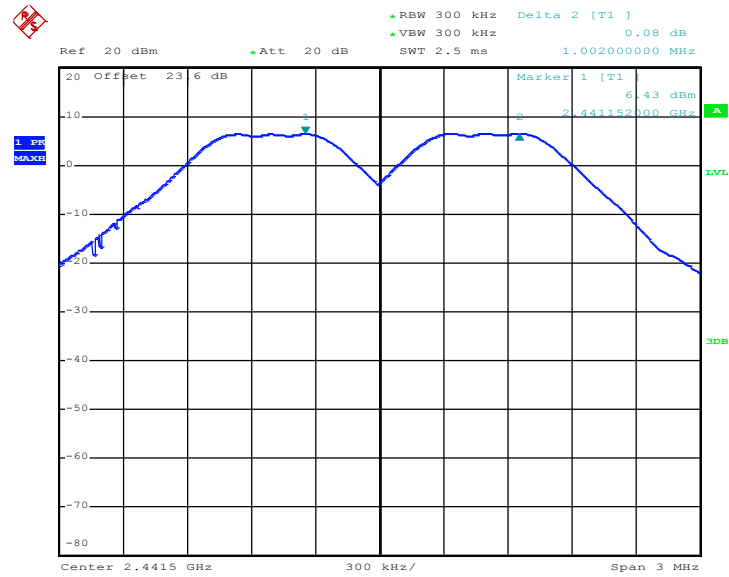

Date: 27.JAN.2017 02:11:27

Channel Separation Plot on Channel 77 - 78

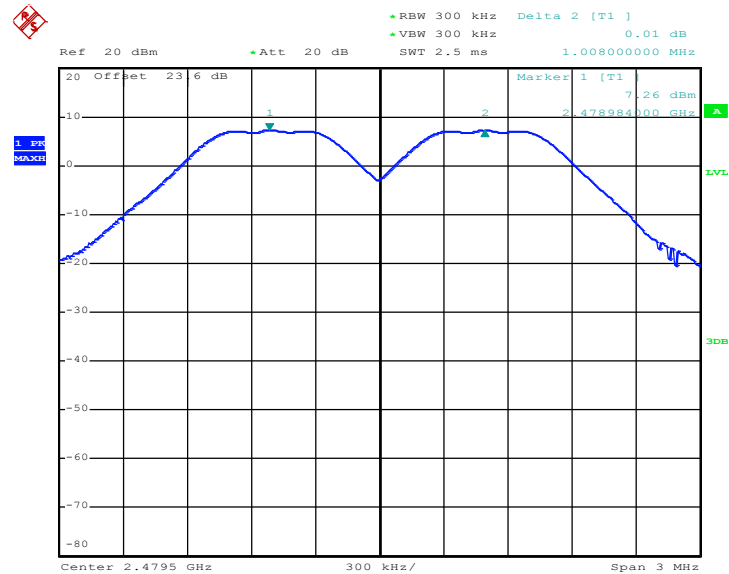


Date: 27.JAN.2017 02:44:25



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8760	Pass
39	2441	1.002	0.8800	Pass
78	2480	1.002	0.8760	Pass

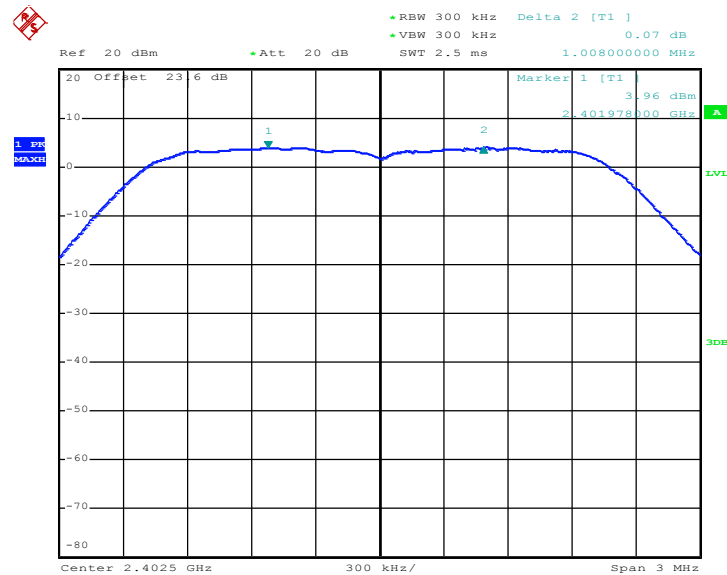**Channel Separation Plot on Channel 00 - 01**

Date: 27.JAN.2017 02:58:48




### Channel Separation Plot on Channel 39 - 40

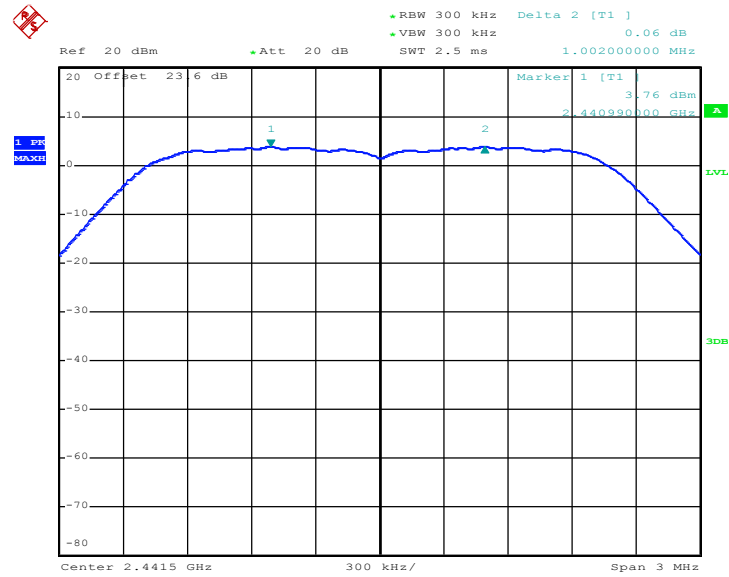

Date: 27.JAN.2017 03:15:58

### Channel Separation Plot on Channel 77 - 78

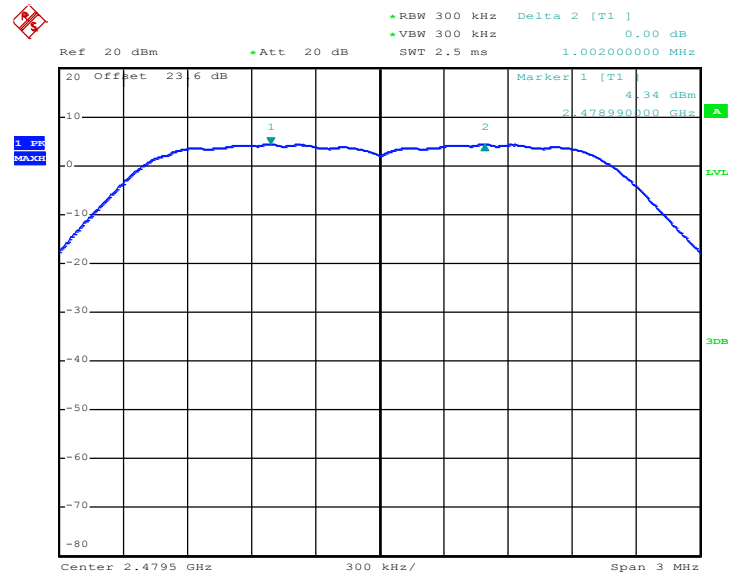


Date: 27.JAN.2017 03:29:23

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8440	Pass
39	2441	1.002	0.8560	Pass
78	2480	1.002	0.8400	Pass


### Channel Separation Plot on Channel 00 - 01

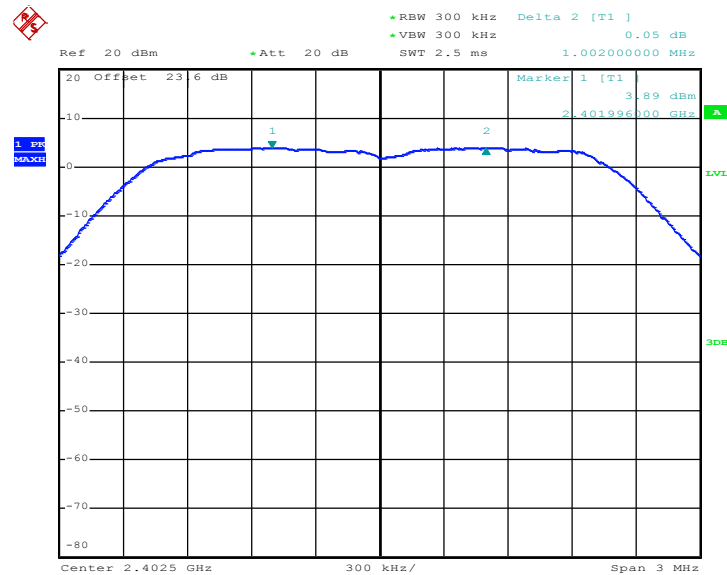

Date: 27.JAN.2017 03:37:32




### Channel Separation Plot on Channel 39 - 40

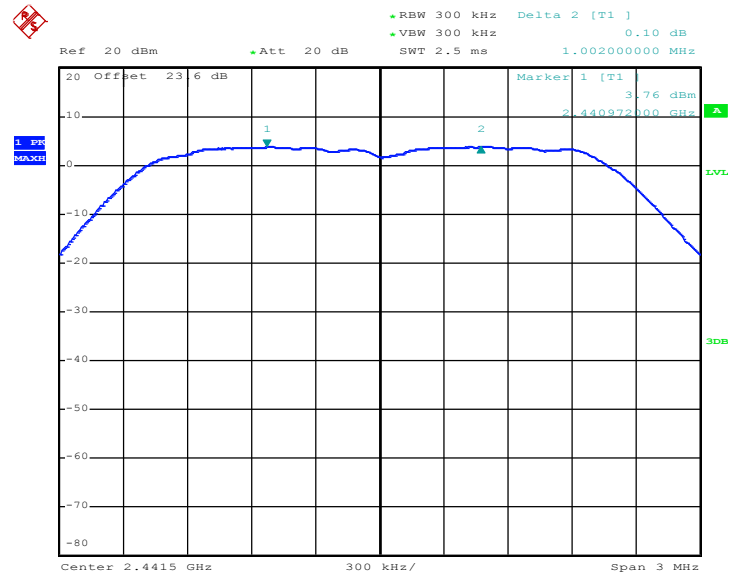

Date: 27.JAN.2017 03:48:17

### Channel Separation Plot on Channel 77 - 78

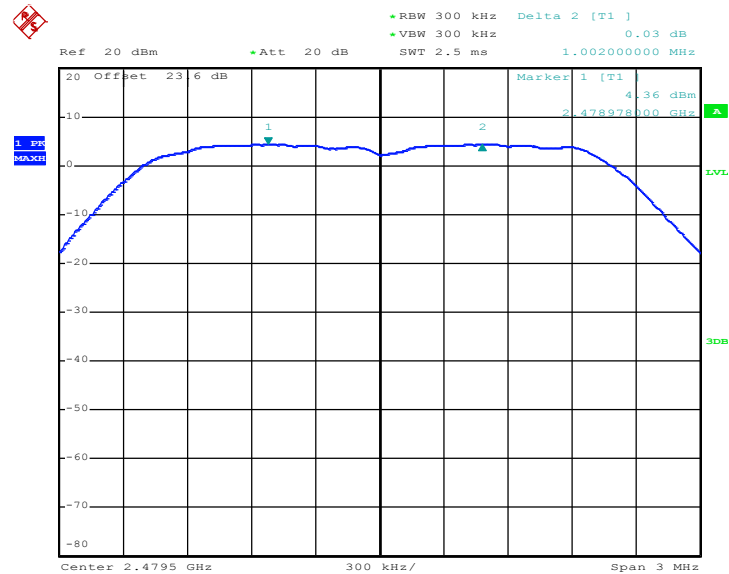


Date: 27.JAN.2017 03:56:24



&lt;Ant. 2&gt;

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6907	Pass
39	2441	1.002	0.6907	Pass
78	2480	1.002	0.6880	Pass

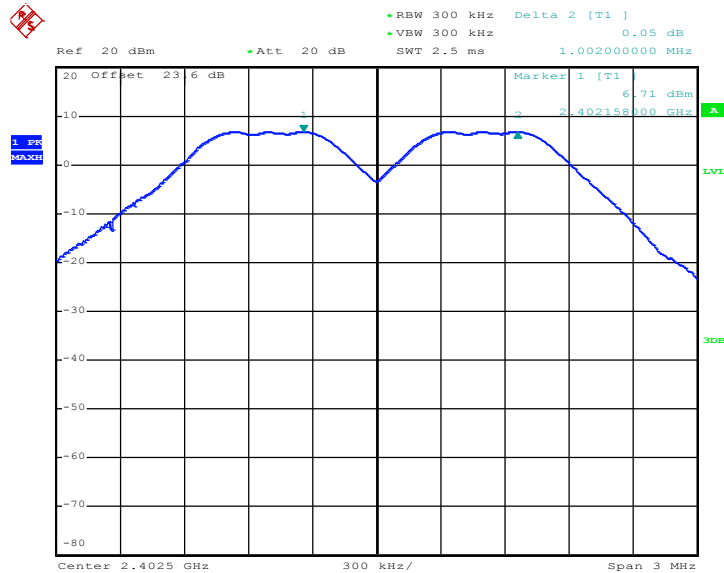**Channel Separation Plot on Channel 00 - 01**

Date: 27.JAN.2017 04:57:38




### Channel Separation Plot on Channel 39 - 40

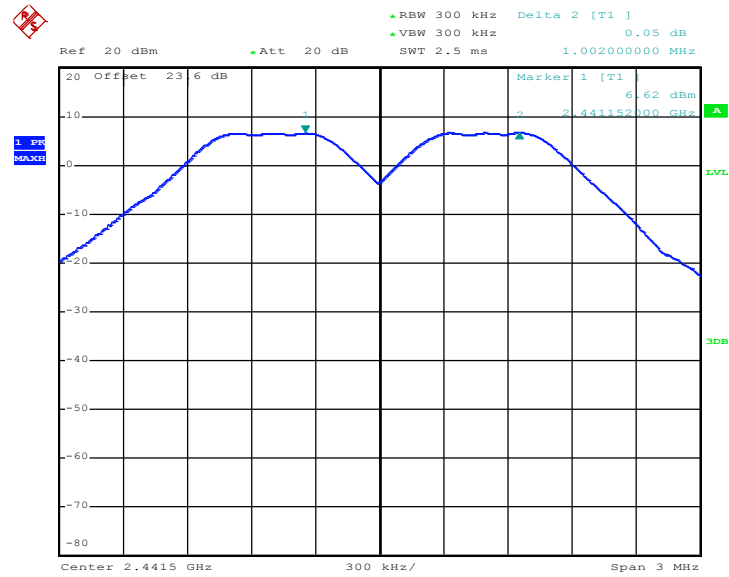

Date: 27.JAN.2017 05:05:23

### Channel Separation Plot on Channel 77 - 78

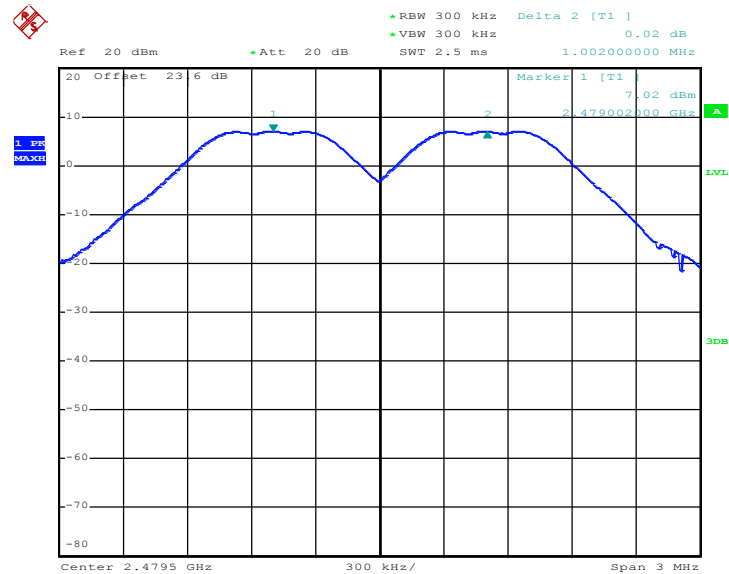


Date: 27.JAN.2017 05:14:40





Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8760	Pass
39	2441	1.002	0.8800	Pass
78	2480	1.002	0.8760	Pass

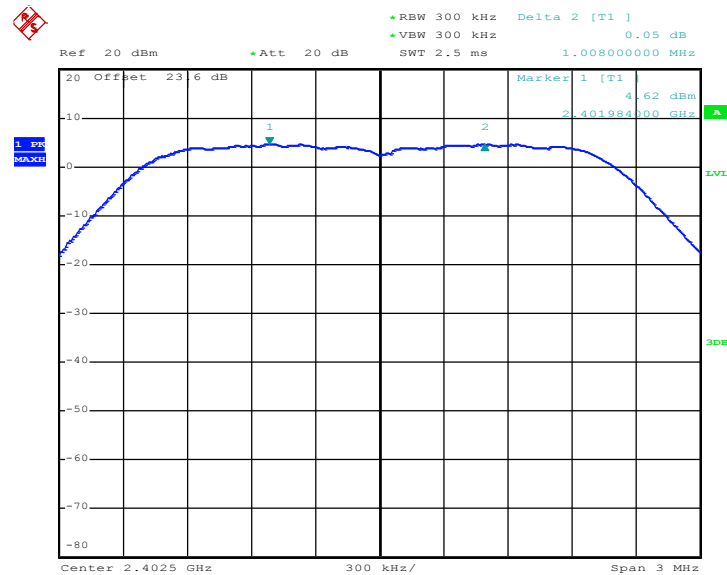**Channel Separation Plot on Channel 00 - 01**

Date: 27.JAN.2017 05:25:41




### Channel Separation Plot on Channel 39 - 40

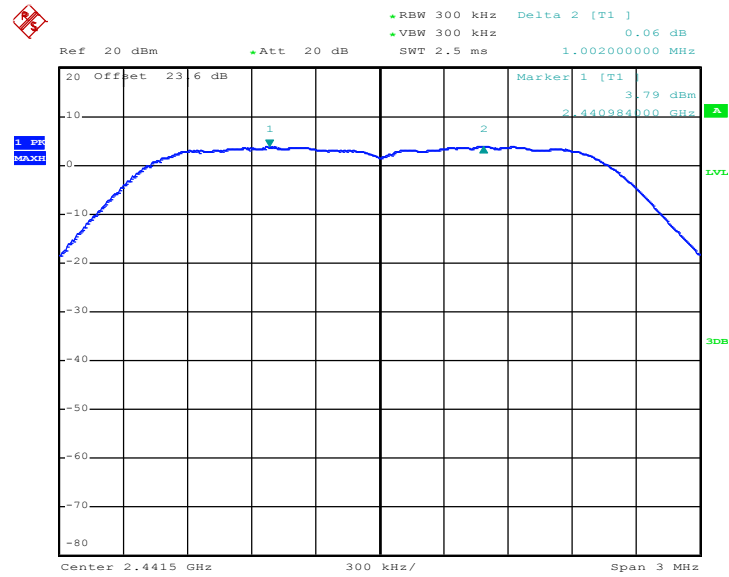

Date: 27.JAN.2017 05:32:11

### Channel Separation Plot on Channel 77 - 78

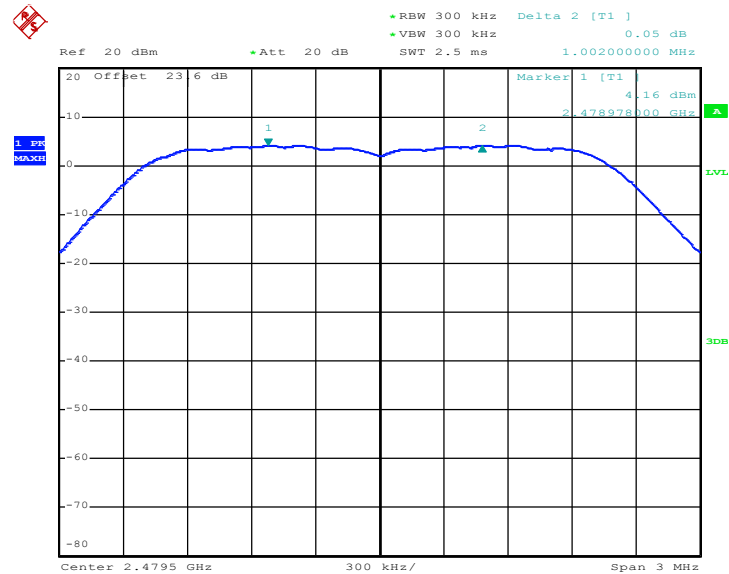


Date: 27.JAN.2017 05:38:24



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8440	Pass
39	2441	1.008	0.8440	Pass
78	2480	1.002	0.8480	Pass

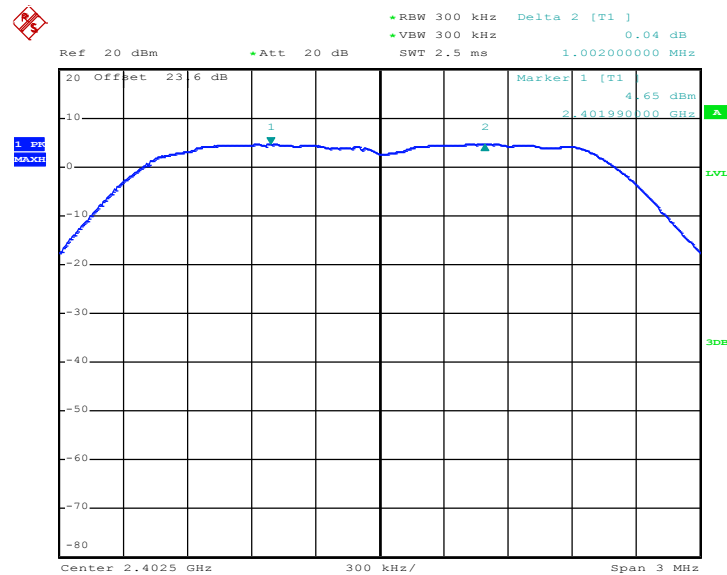**Channel Separation Plot on Channel 00 - 01**

Date: 27.JAN.2017 05:43:35




### Channel Separation Plot on Channel 39 - 40

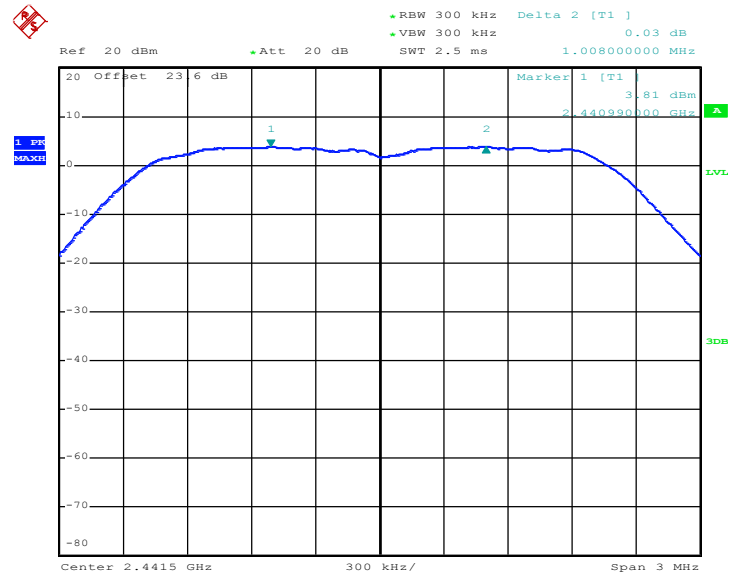

Date: 27.JAN.2017 05:50:44

### Channel Separation Plot on Channel 77 - 78

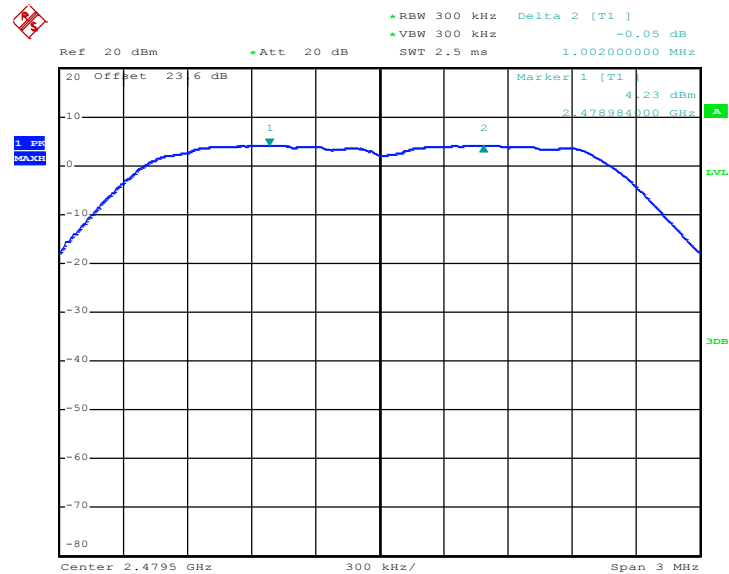

Date: 27.JAN.2017 06:04:00

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup



### 3.3.5 Test Result of Dwell Time

<Ant. 1>


Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

**Remark:**

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

**Package Transfer Time Plot**

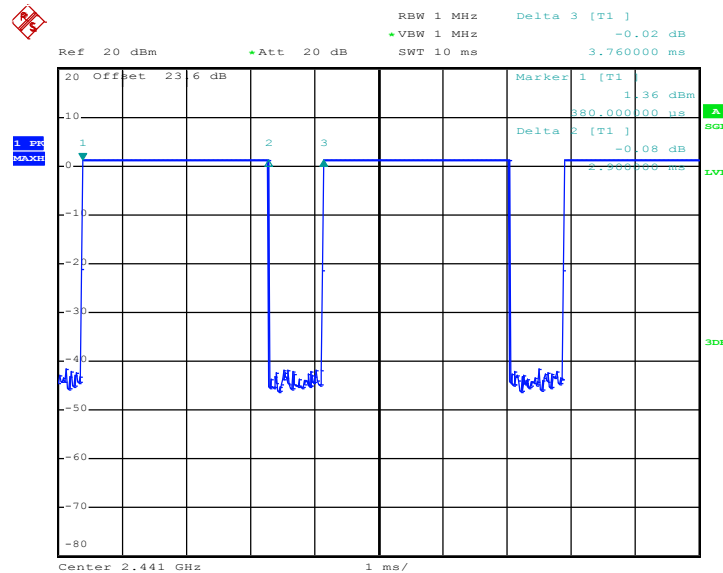

Date: 17.JAN.2017 18:36:43

<Ant. 2>


Test Mode :	DH5	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

**Remark:**

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

**Package Transfer Time Plot**

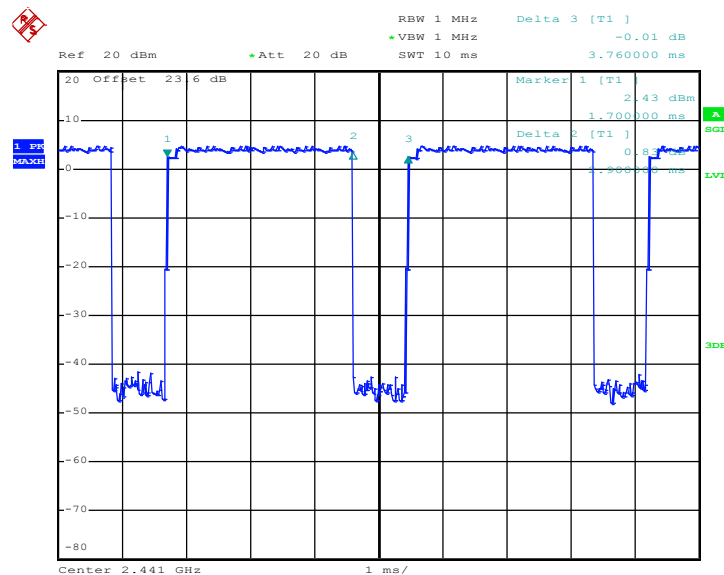

Date: 18.JAN.2017 17:08:28

### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup

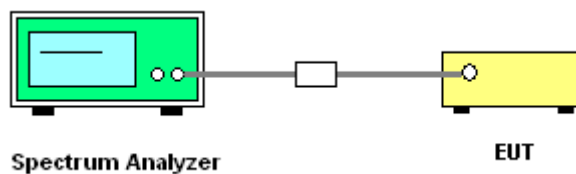






## 3.4.5 Test Result of 20dB Bandwidth

&lt;Ant. 1&gt;

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.036
39	2441	1.028
78	2480	1.032


20 dB Bandwidth Plot on Channel 00

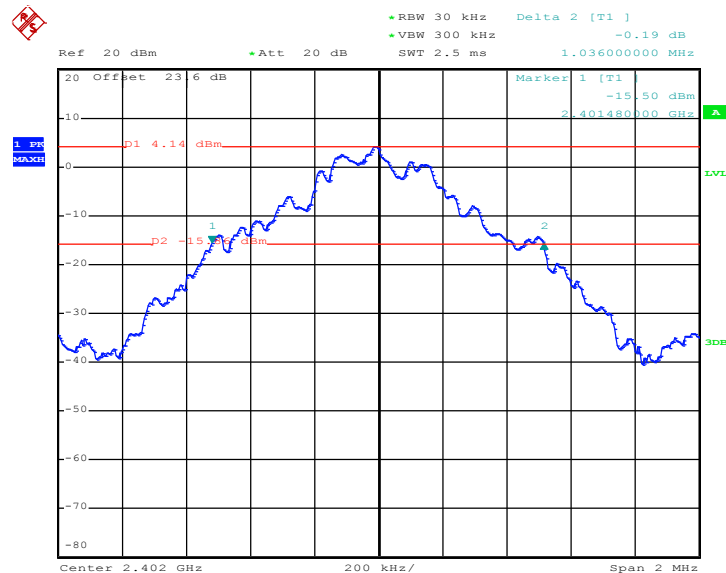

Date: 27.JAN.2017 02:15:38




### 20 dB Bandwidth Plot on Channel 39

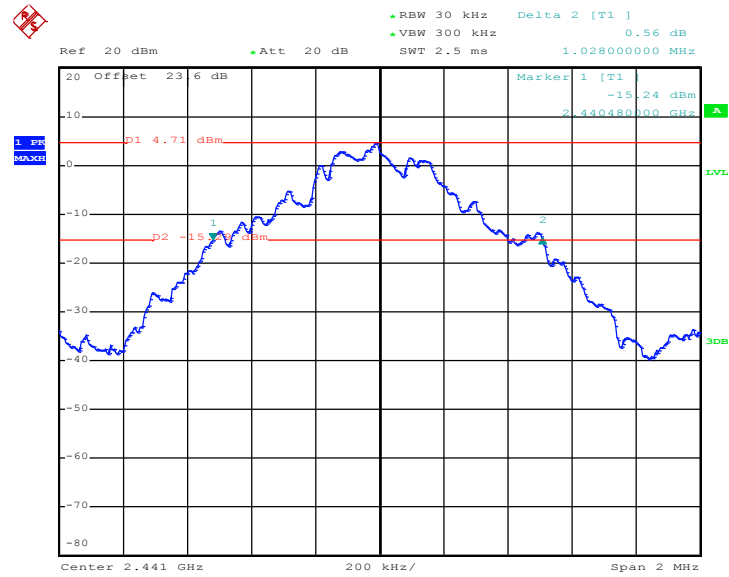

Date: 27.JAN.2017 02:03:52

### 20 dB Bandwidth Plot on Channel 78

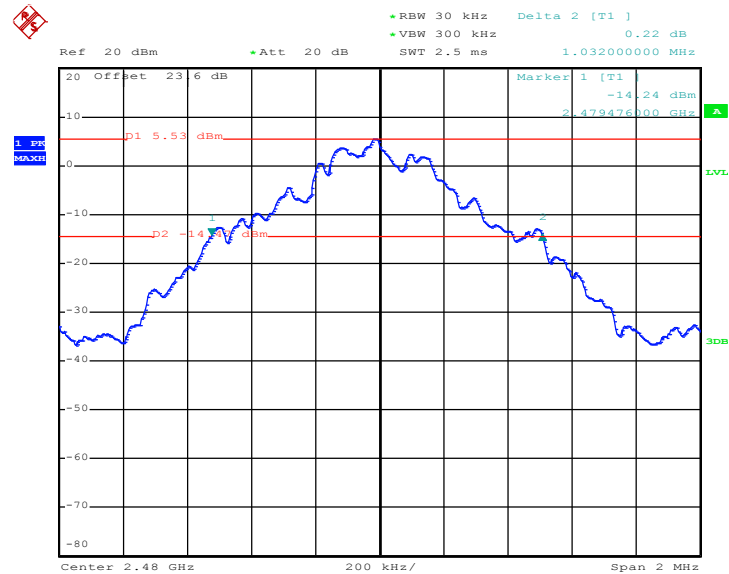


Date: 27.JAN.2017 02:13:08

<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.320
78	2480	1.314

### 20 dB Bandwidth Plot on Channel 00

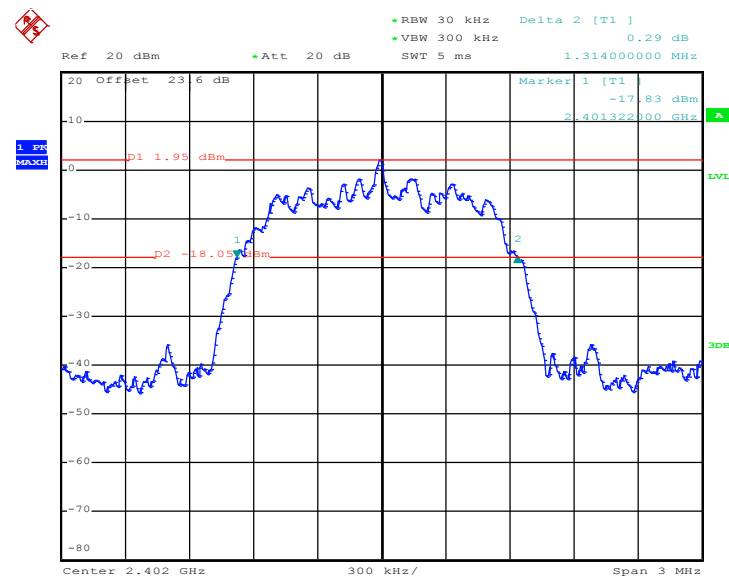


Date: 27.JAN.2017 02:47:58

### 20 dB Bandwidth Plot on Channel 39

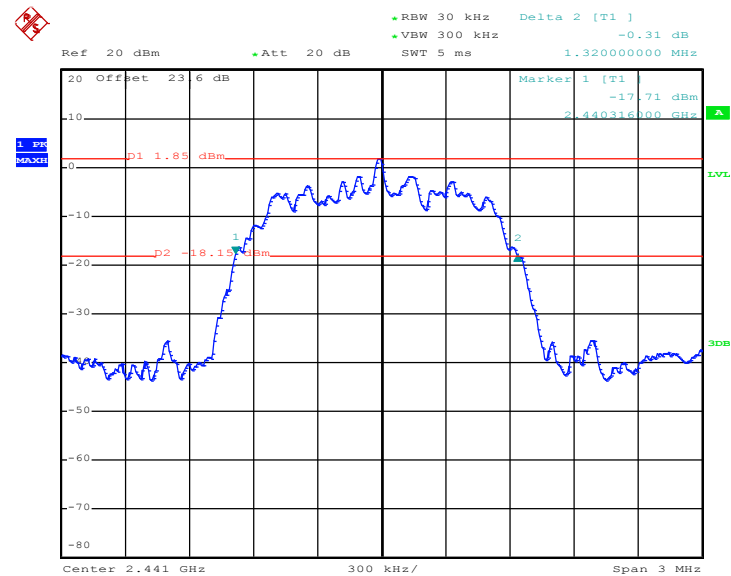

Date: 27.JAN.2017 03:00:22

### 20 dB Bandwidth Plot on Channel 78

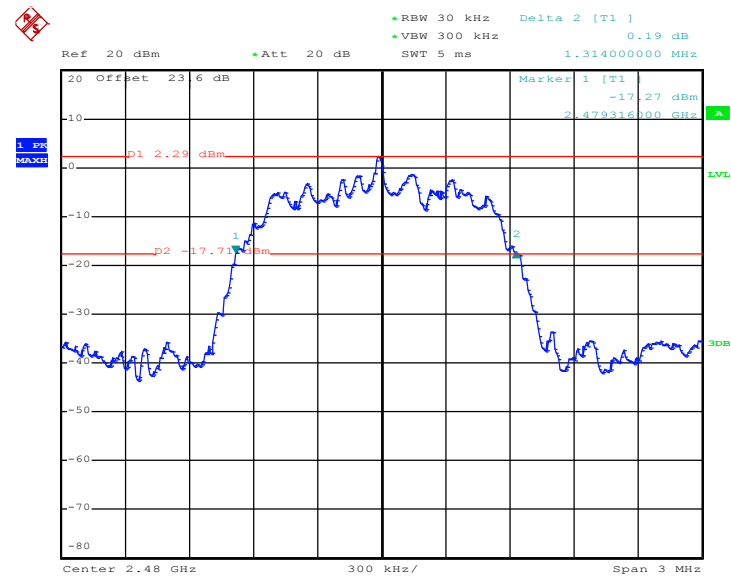


Date: 27.JAN.2017 03:17:46

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.266
39	2441	1.284
78	2480	1.260


### 20 dB Bandwidth Plot on Channel 00

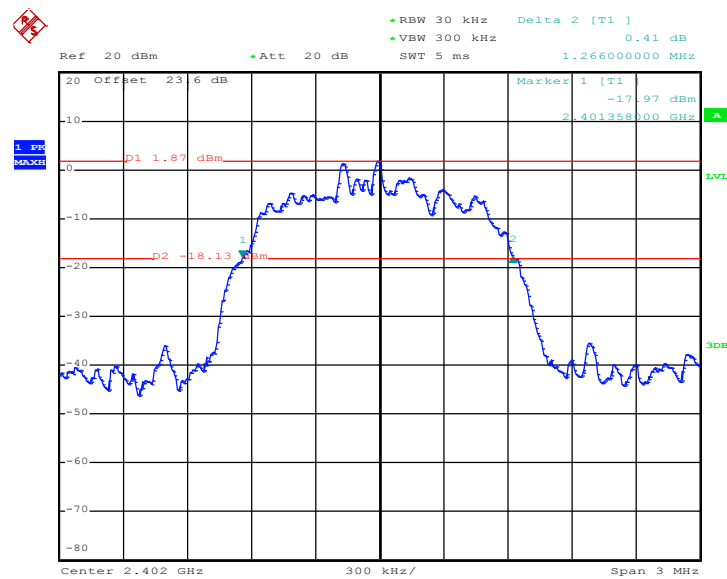

Date: 27.JAN.2017 03:30:52




### 20 dB Bandwidth Plot on Channel 39

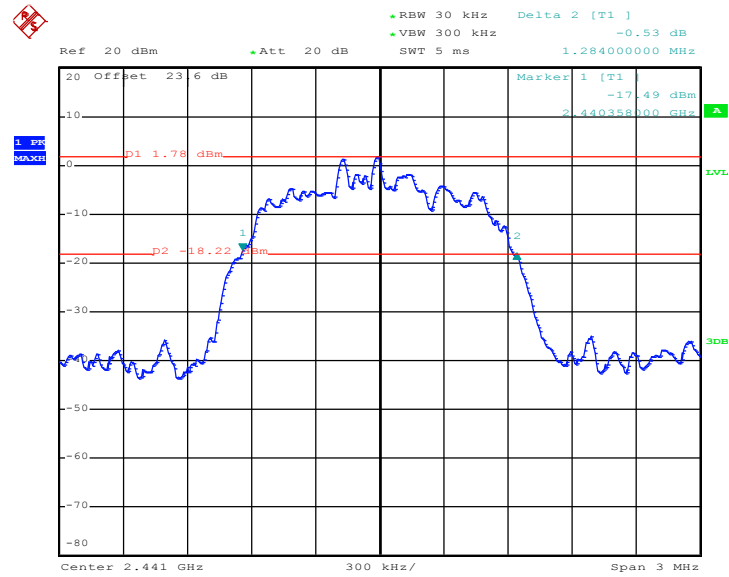

Date: 27.JAN.2017 03:40:32

### 20 dB Bandwidth Plot on Channel 78

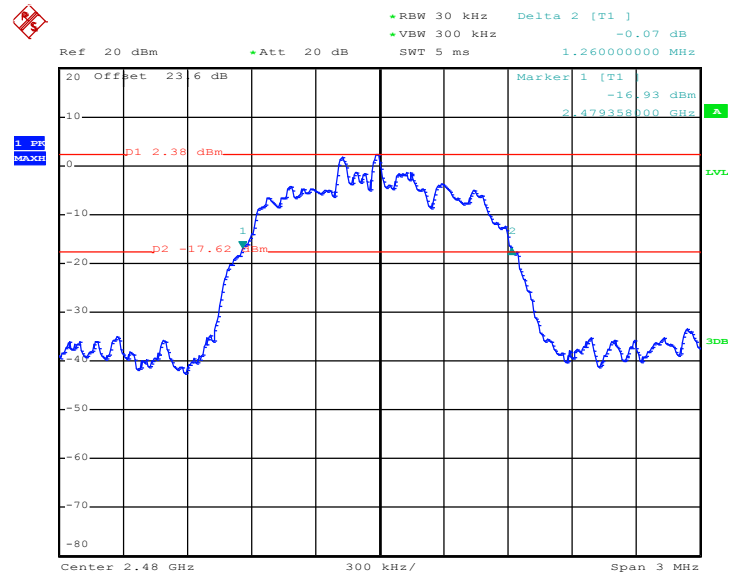


Date: 27.JAN.2017 03:51:32

**<Ant. 2>**

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Derek Hsu	<b>Relative Humidity :</b>	48~51%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.036
39	2441	1.036
78	2480	1.032

### 20 dB Bandwidth Plot on Channel 00

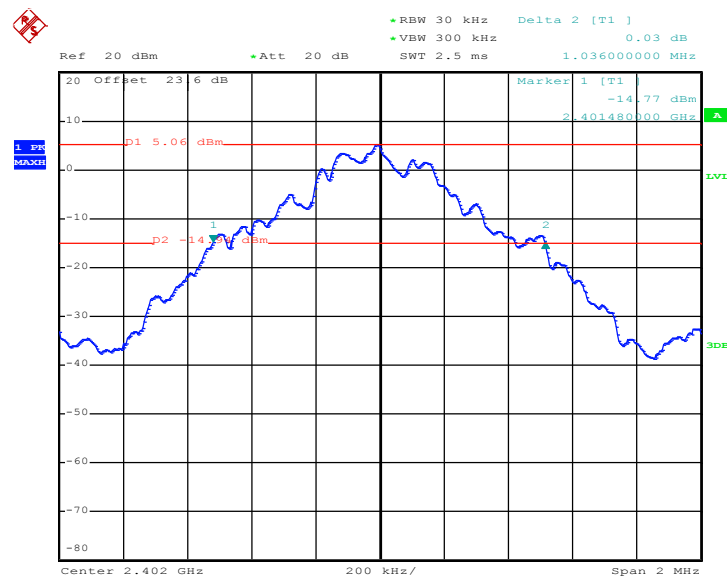


Date: 27.JAN.2017 04:32:40

### 20 dB Bandwidth Plot on Channel 39

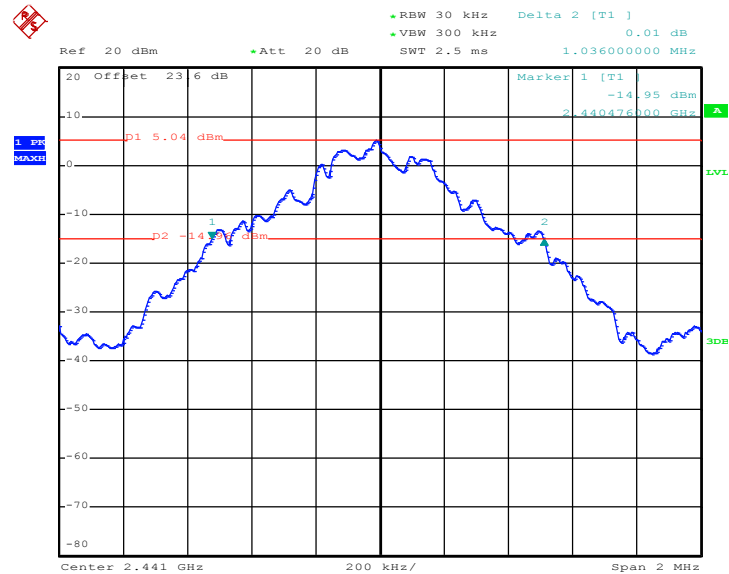

Date: 27.JAN.2017 05:00:13

### 20 dB Bandwidth Plot on Channel 78

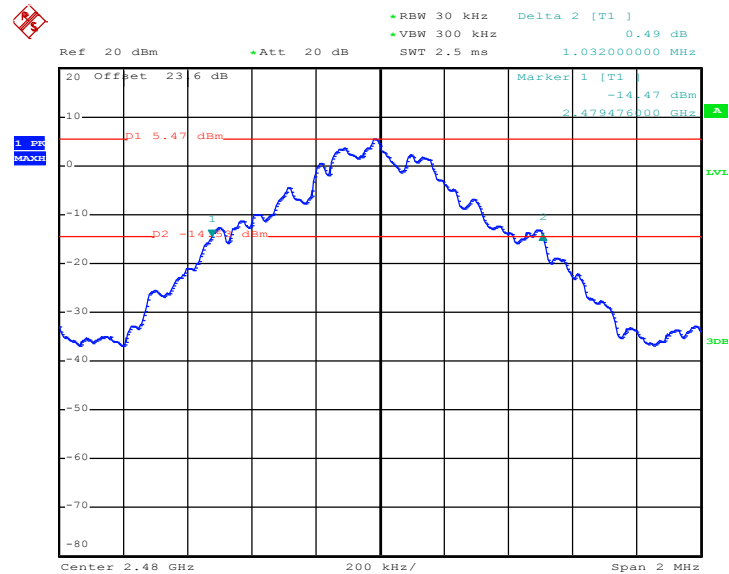


Date: 27.JAN.2017 05:07:12



<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.320
78	2480	1.314


### 20 dB Bandwidth Plot on Channel 00

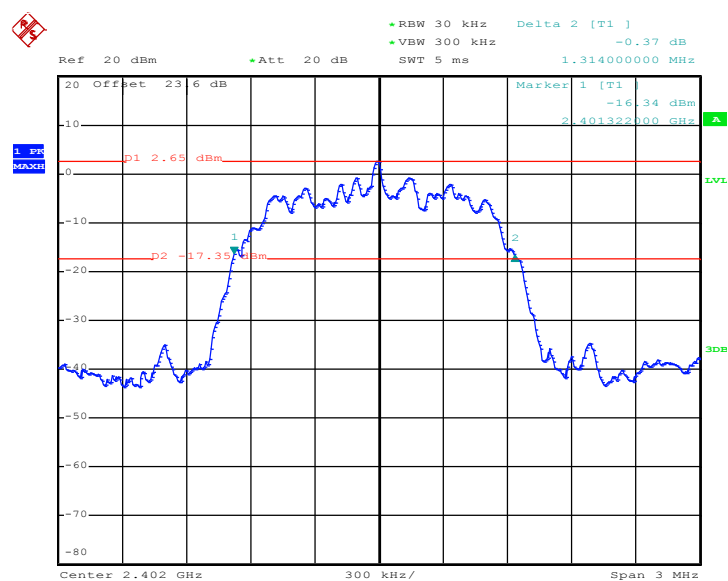

Date: 27.JAN.2017 05:16:55




### 20 dB Bandwidth Plot on Channel 39

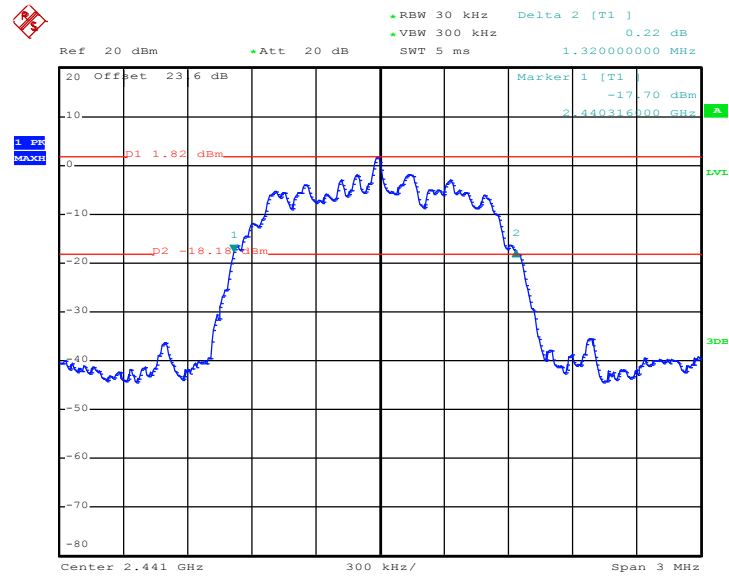

Date: 27.JAN.2017 05:27:40

### 20 dB Bandwidth Plot on Channel 78

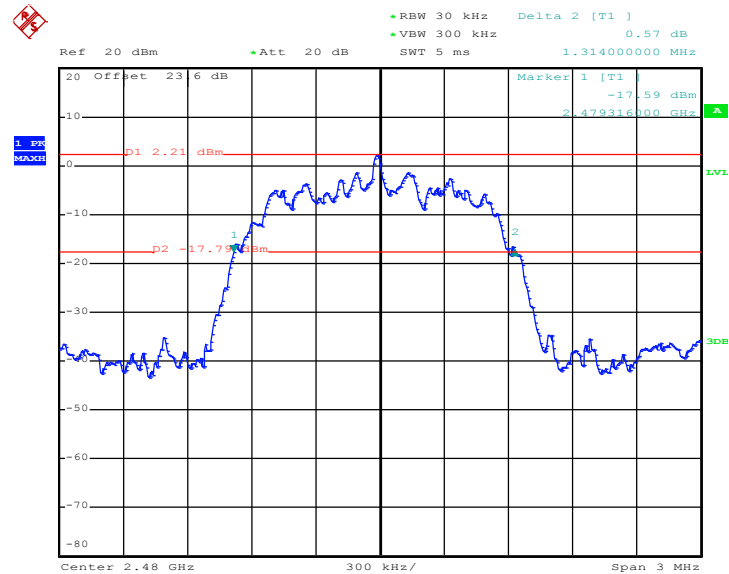


Date: 27.JAN.2017 05:33:09

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Derek Hsu	<b>Relative Humidity :</b>	48~51%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.266
39	2441	1.266
78	2480	1.272

### 20 dB Bandwidth Plot on Channel 00

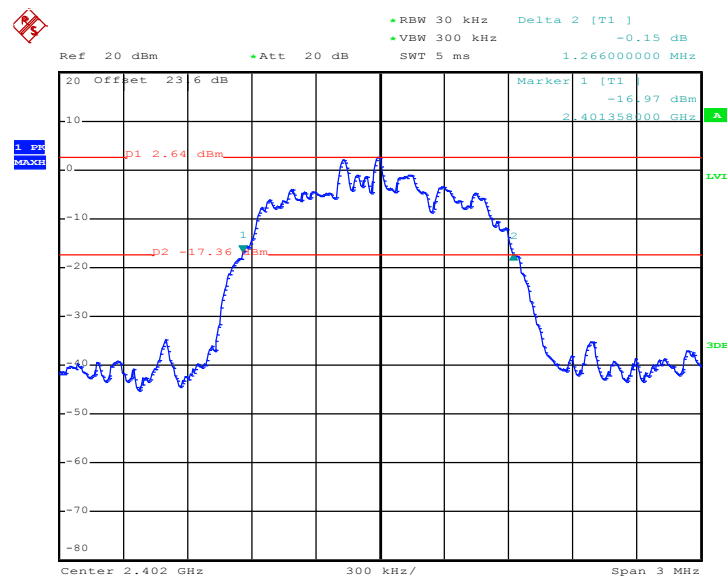


Date: 27.JAN.2017 05:40:13

### 20 dB Bandwidth Plot on Channel 39

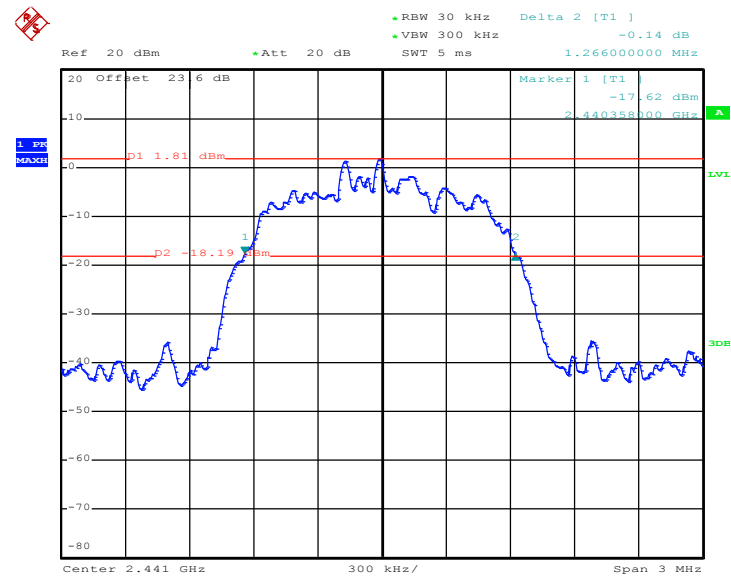

Date: 27.JAN.2017 05:44:53

### 20 dB Bandwidth Plot on Channel 78

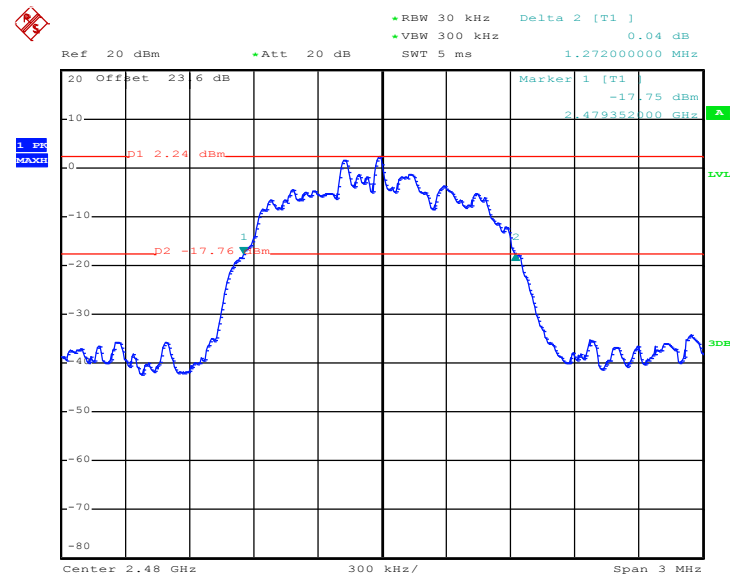

Date: 27.JAN.2017 05:54:36




## 3.4.6 Test Result of 99% Occupied Bandwidth

&lt;Ant. 1&gt;

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.956
39	2441	0.956
78	2480	0.956


99% Occupied Bandwidth Plot on Channel 00

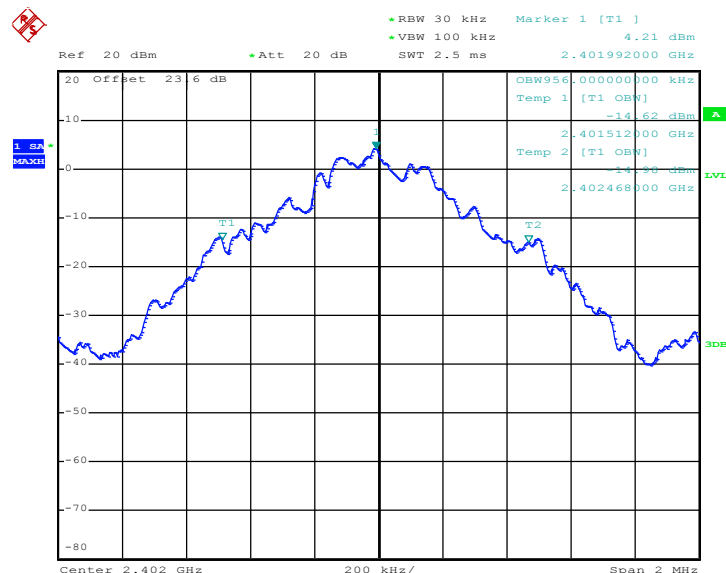

Date: 27.JAN.2017 01:59:31




99% Occupied Bandwidth Plot on Channel 39

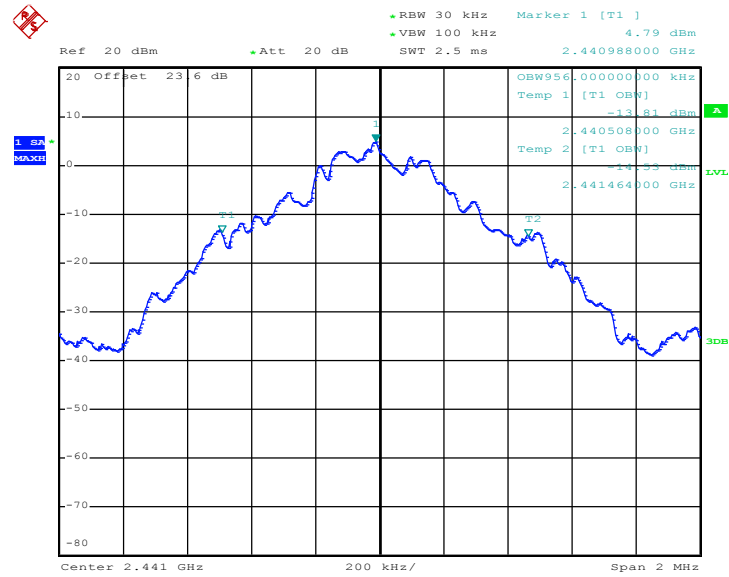

Date: 27.JAN.2017 02:06:12

99% Occupied Bandwidth Plot on Channel 78

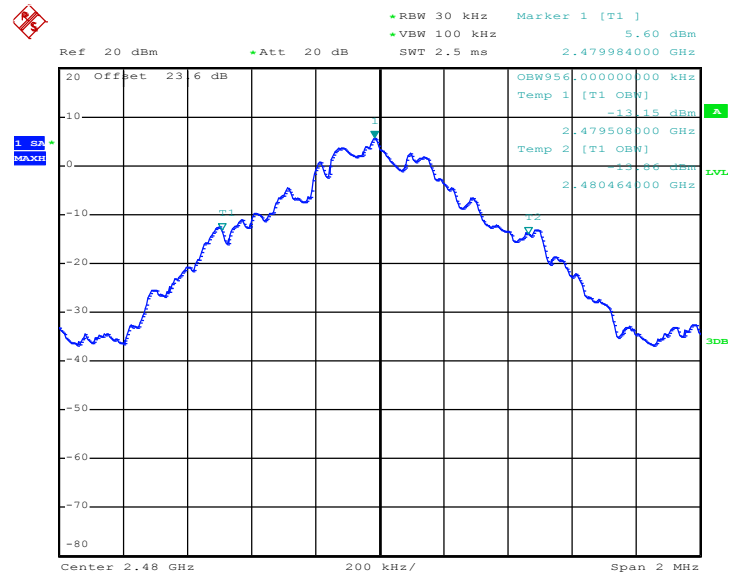


Date: 27.JAN.2017 02:38:46



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.204
39	2441	1.204
78	2480	1.204

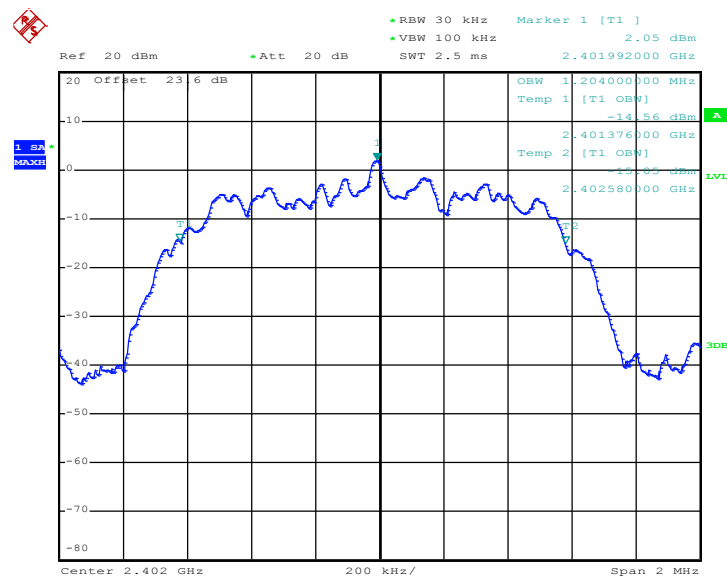**99% Occupied Bandwidth Plot on Channel 00**

Date: 27.JAN.2017 02:49:34




### 99% Occupied Bandwidth Plot on Channel 39

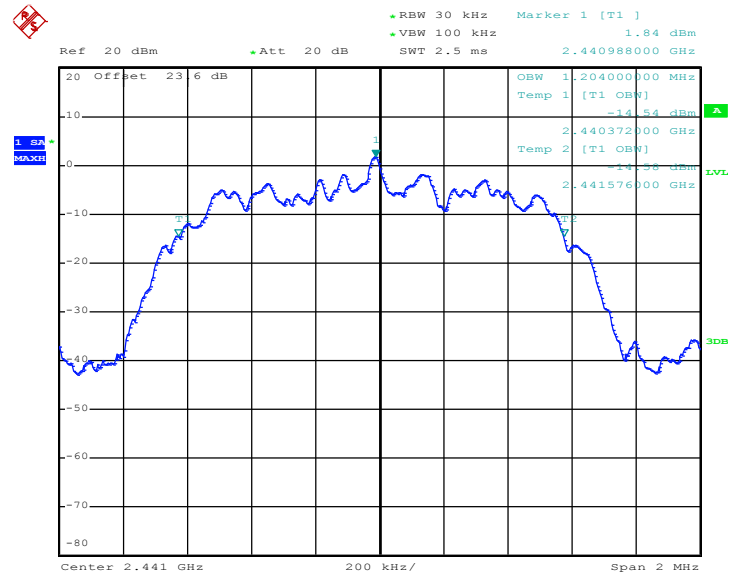

Date: 27.JAN.2017 03:02:01

### 99% Occupied Bandwidth Plot on Channel 78

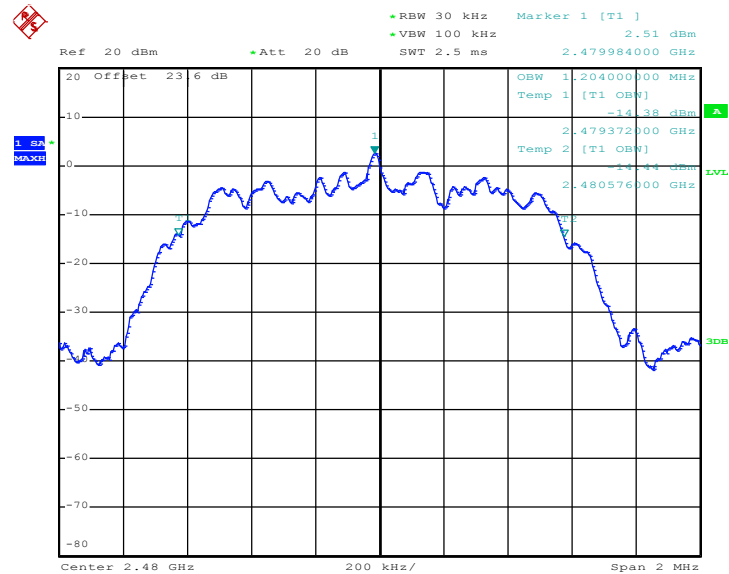


Date: 27.JAN.2017 03:19:38





Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.176
78	2480	1.180

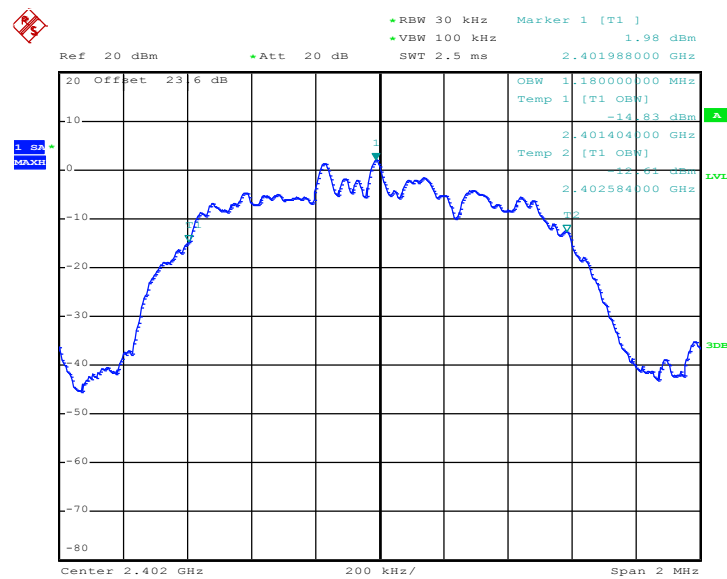**99% Occupied Bandwidth Plot on Channel 00**

Date: 27.JAN.2017 03:32:56




### 99% Occupied Bandwidth Plot on Channel 39

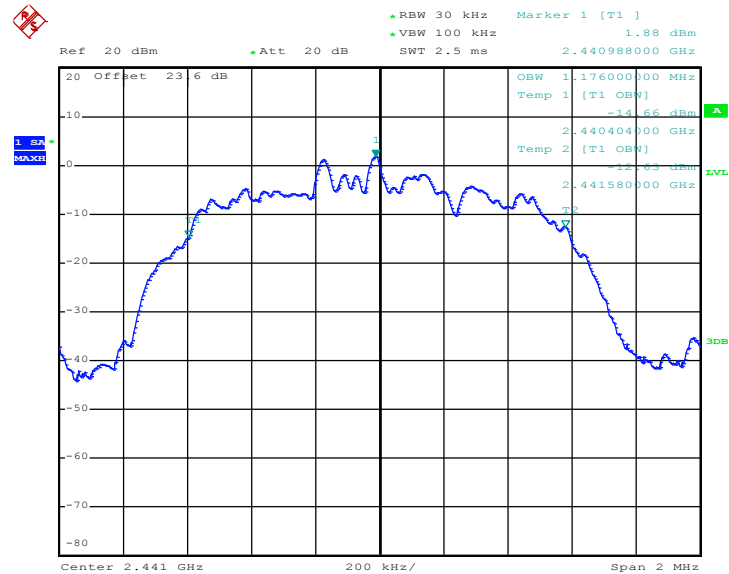

Date: 27.JAN.2017 03:42:19

### 99% Occupied Bandwidth Plot on Channel 78

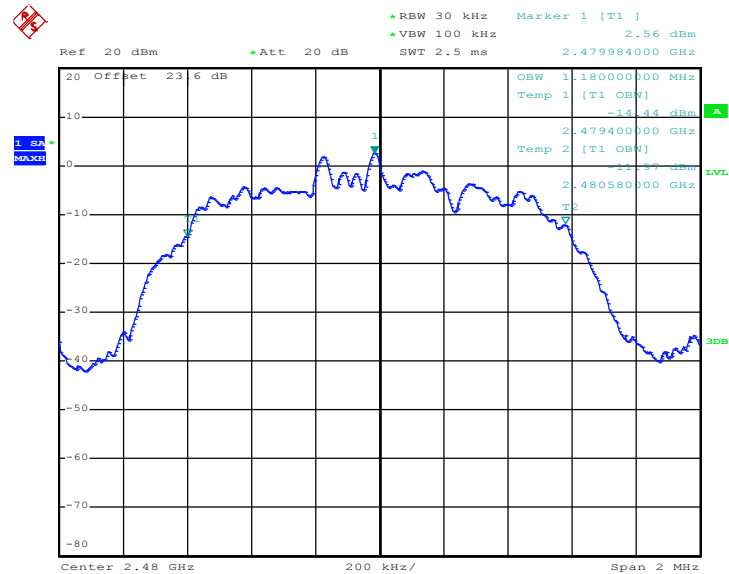

Date: 27.JAN.2017 03:53:29


Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



&lt;Ant. 2&gt;

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.952
39	2441	0.952
78	2480	0.956

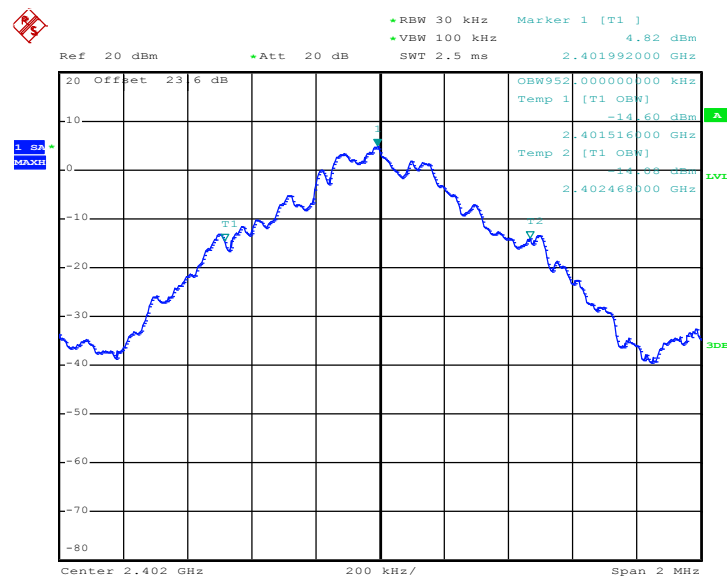**99% Occupied Bandwidth Plot on Channel 00**

Date: 27.JAN.2017 04:34:06




99% Occupied Bandwidth Plot on Channel 39

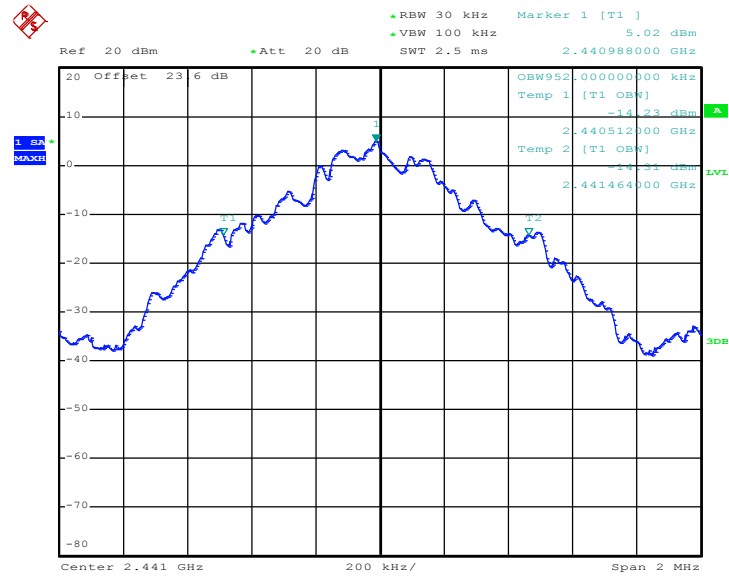

Date: 27.JAN.2017 05:01:34

99% Occupied Bandwidth Plot on Channel 78

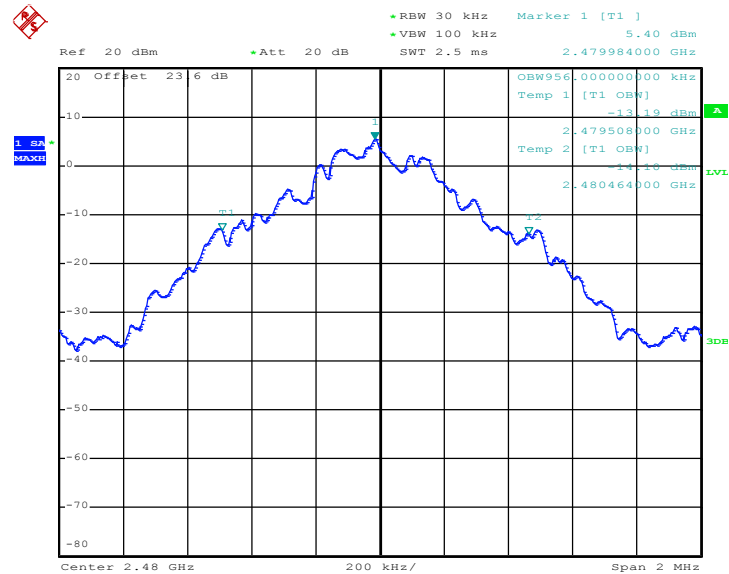


Date: 27.JAN.2017 05:09:05




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.204
39	2441	1.204
78	2480	1.204

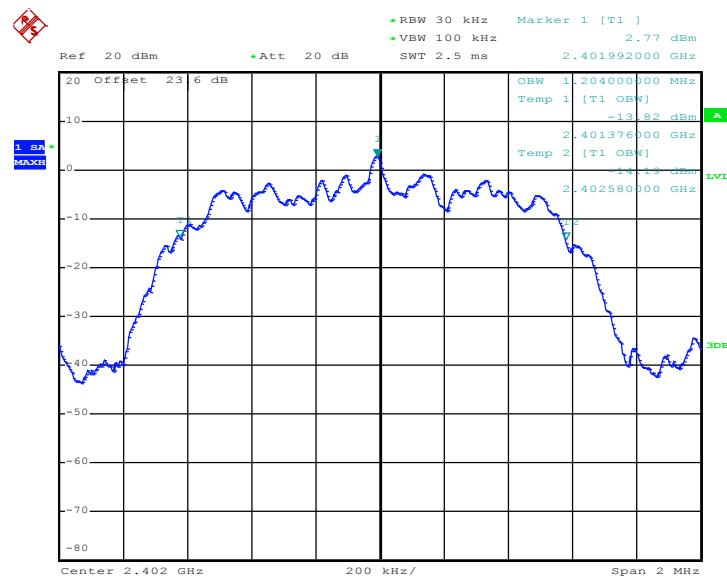**99% Occupied Bandwidth Plot on Channel 00**

Date: 27.JAN.2017 05:20:44

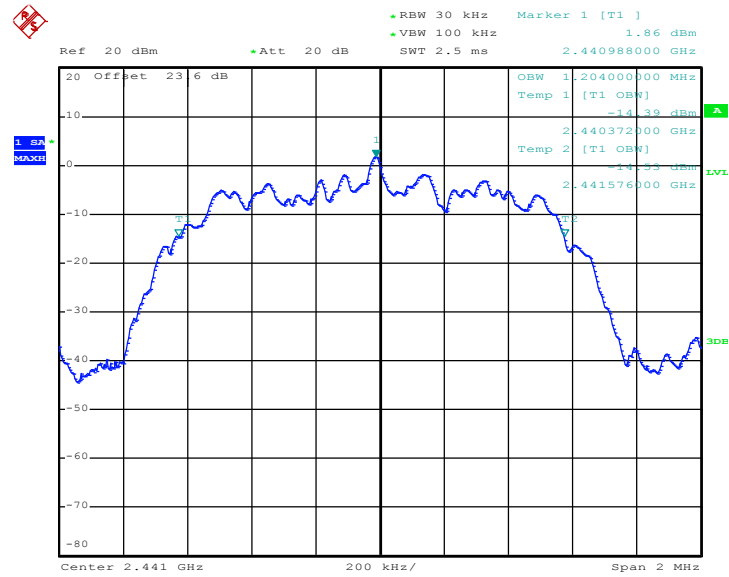**99% Occupied Bandwidth Plot on Channel 39**


Date: 27.JAN.2017 05:28:32

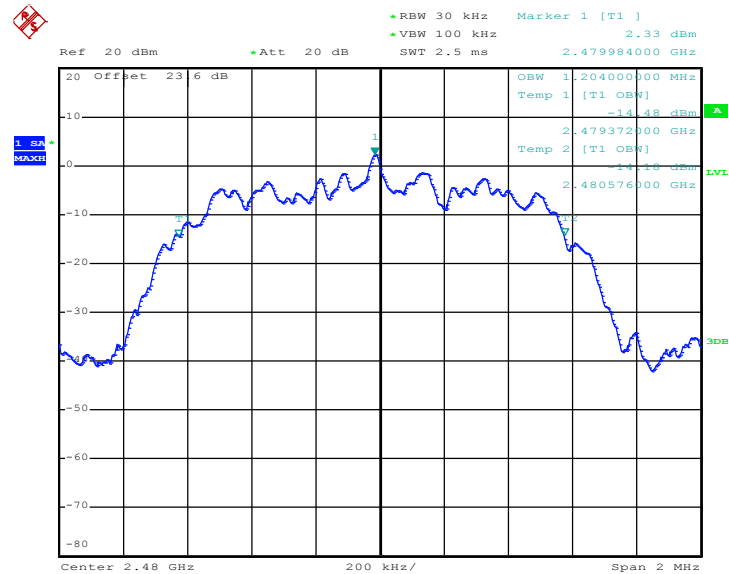
**99% Occupied Bandwidth Plot on Channel 78**


Date: 27.JAN.2017 05:34:18




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.176
78	2480	1.180

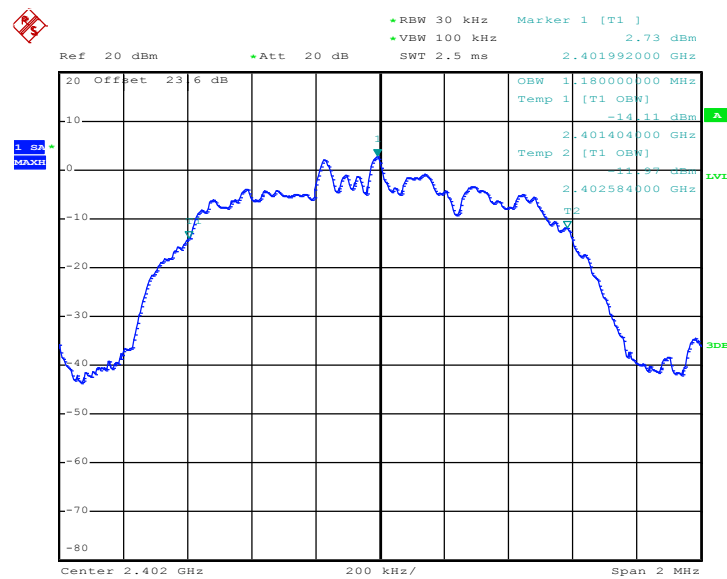**99% Occupied Bandwidth Plot on Channel 00**

Date: 27.JAN.2017 05:41:24

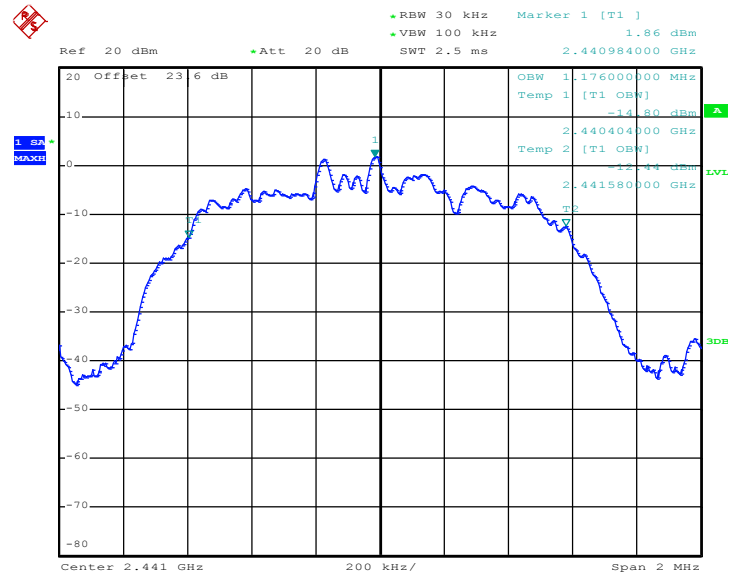**99% Occupied Bandwidth Plot on Channel 39**


Date: 27.JAN.2017 05:45:56

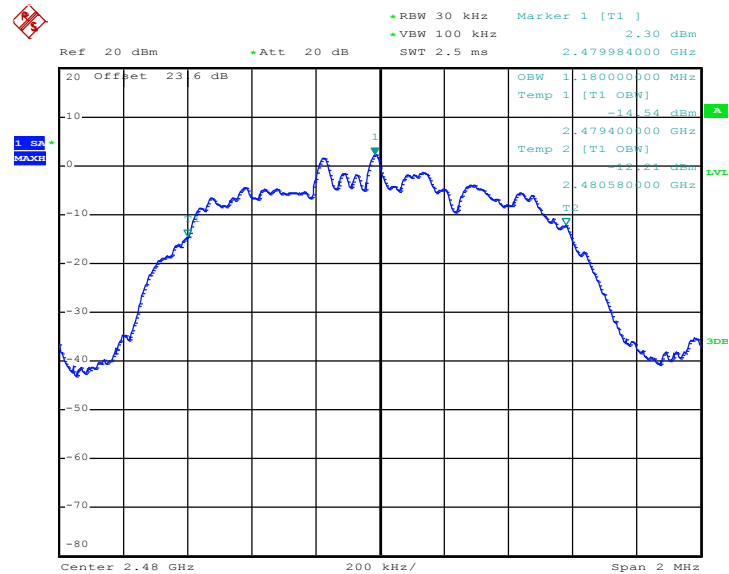**99% Occupied Bandwidth Plot on Channel 78**


Date: 27.JAN.2017 05:56:06

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### 3.5.4 Test Setup

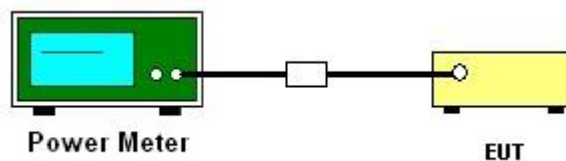

### 3.5.5 Test Result of Peak Output Power

<Ant. 1>

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.56	20.97	Pass
39	2441	6.63	20.97	Pass
78	2480	7.69	20.97	Pass

**Note:** For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.81	20.97	Pass
39	2441	6.38	20.97	Pass
78	2480	6.82	20.97	Pass

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	6.91	20.97	Pass
39	2441	6.52	20.97	Pass
78	2480	7.02	20.97	Pass

**<Ant. 2>**

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.80	20.97	Pass
39	2441	6.75	20.97	Pass
78	2480	7.24	20.97	Pass

**Note:** For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	7.04	20.97	Pass
39	2441	6.32	20.97	Pass
78	2480	6.80	20.97	Pass

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Derek Hsu	<b>Relative Humidity :</b>	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	7.40	20.97	Pass
39	2441	6.47	20.97	Pass
78	2480	6.91	20.97	Pass

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

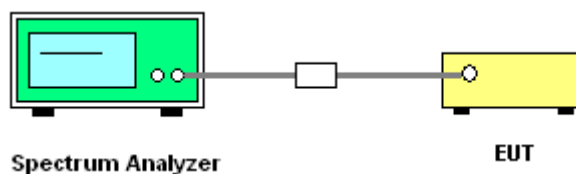


### 3.6.5 Test Result of Conducted Band Edges

<Ant. 1>


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

#### Low Band Edge Plot on Channel 00

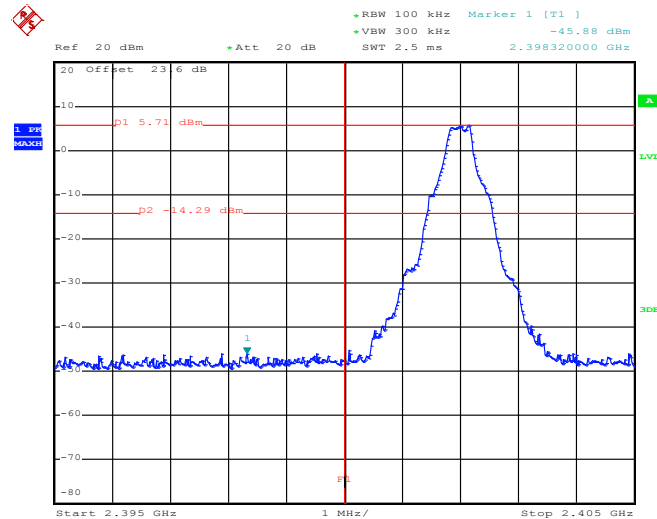

Date: 27.JAN.2017 01:58:56


#### High Band Edge Plot on Channel 78

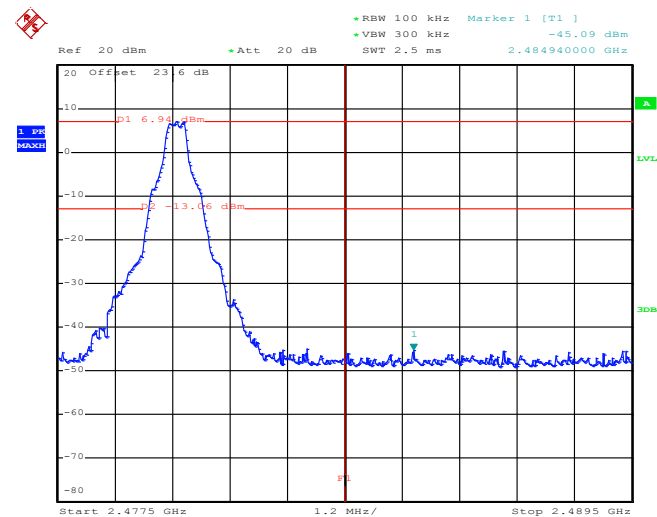


Date: 27.JAN.2017 02:38:08



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

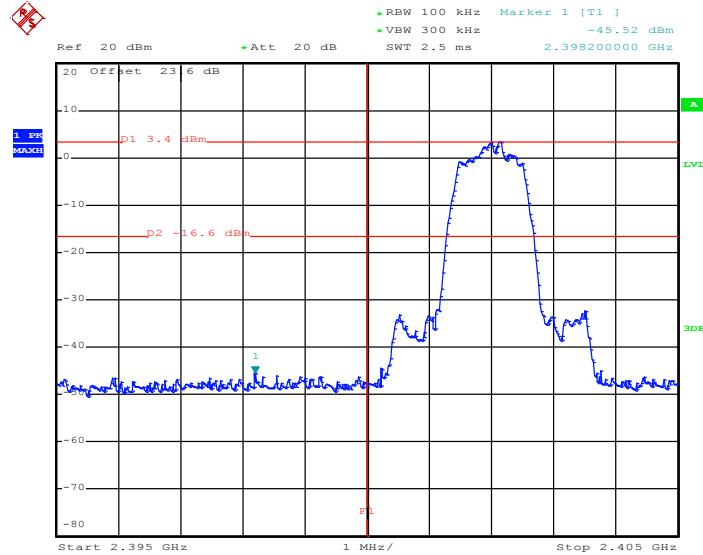**Low Band Edge Plot on Channel 00**


Date: 27.JAN.2017 02:48:54

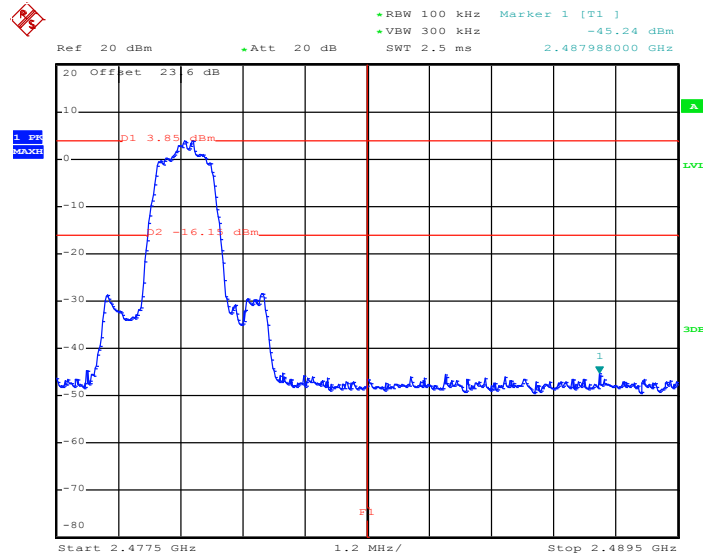**High Band Edge Plot on Channel 78**


Date: 27.JAN.2017 03:19:01



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

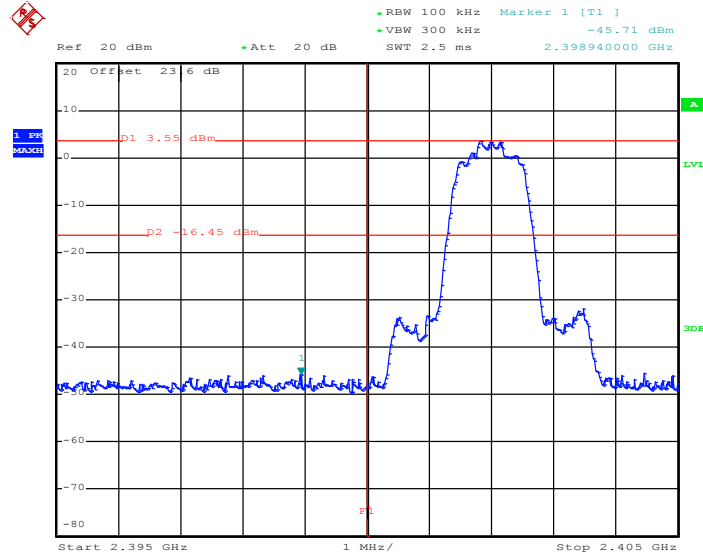**Low Band Edge Plot on Channel 00**

Date: 27.JAN.2017 03:32:15

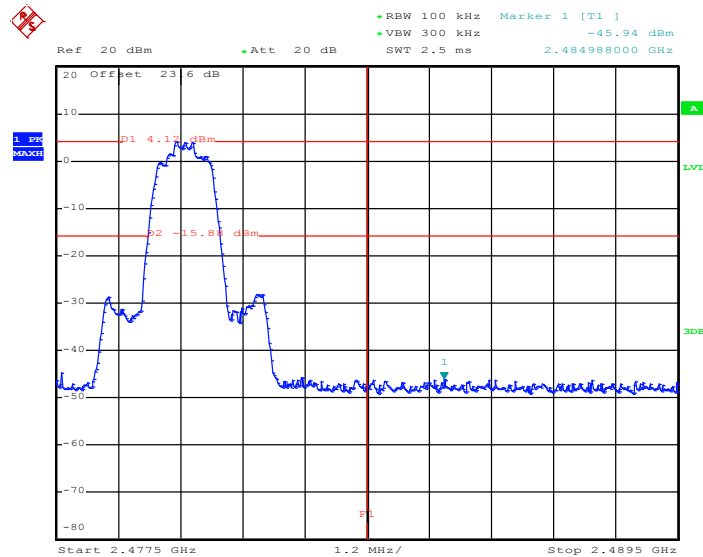
**High Band Edge Plot on Channel 78**

Date: 27.JAN.2017 03:52:42




&lt;Ant. 2&gt;

Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

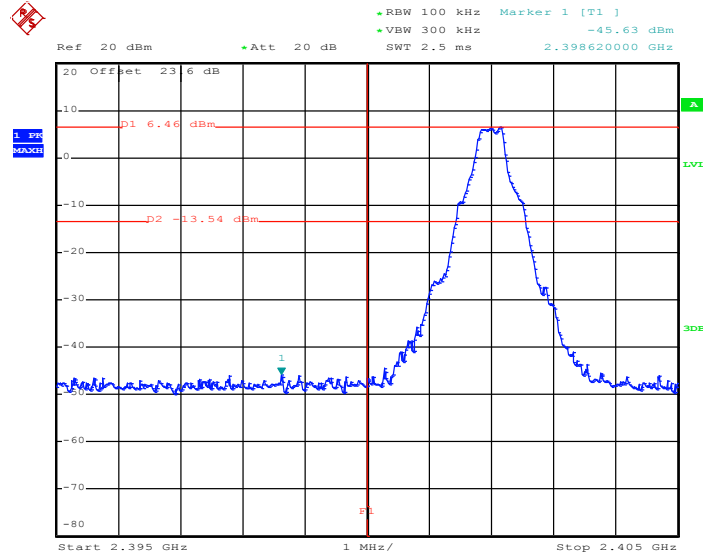**Low Band Edge Plot on Channel 00**

Date: 27.JAN.2017 04:33:29

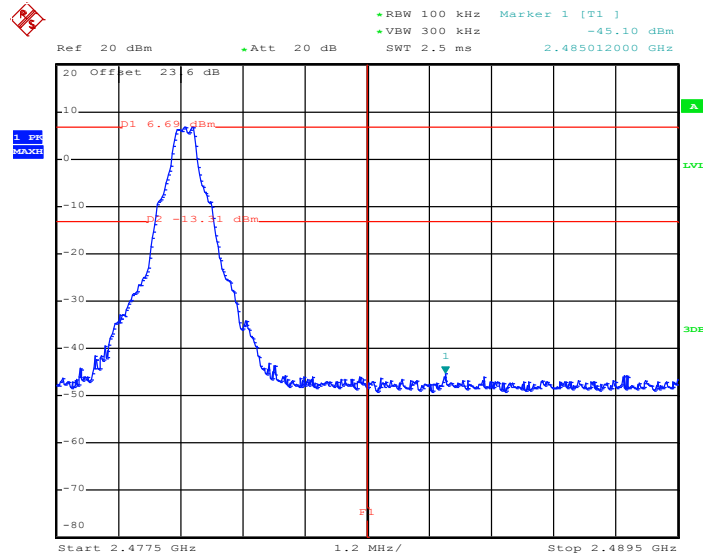
**High Band Edge Plot on Channel 78**

Date: 27.JAN.2017 05:08:20






Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

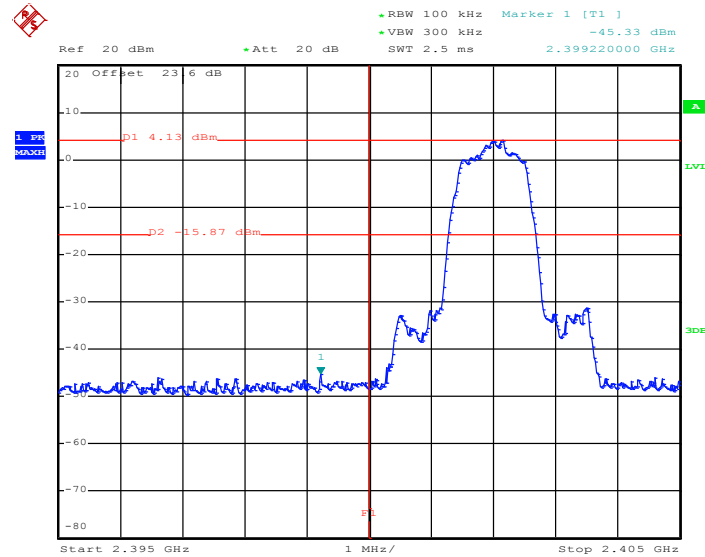**Low Band Edge Plot on Channel 00**


Date: 27.JAN.2017 05:19:58

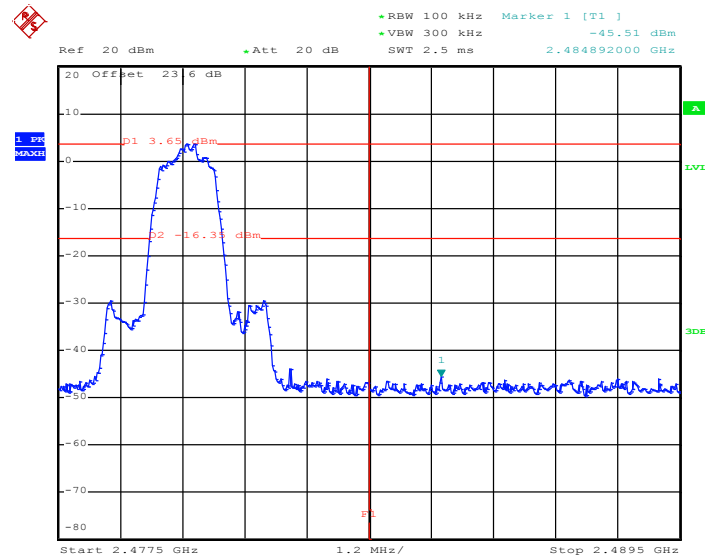**High Band Edge Plot on Channel 78**


Date: 27.JAN.2017 05:33:37



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

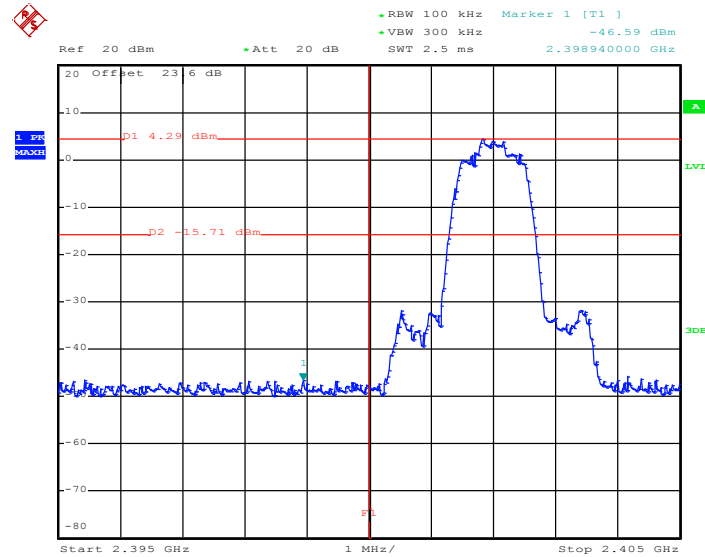**Low Band Edge Plot on Channel 00**

Date: 27.JAN.2017 05:40:46

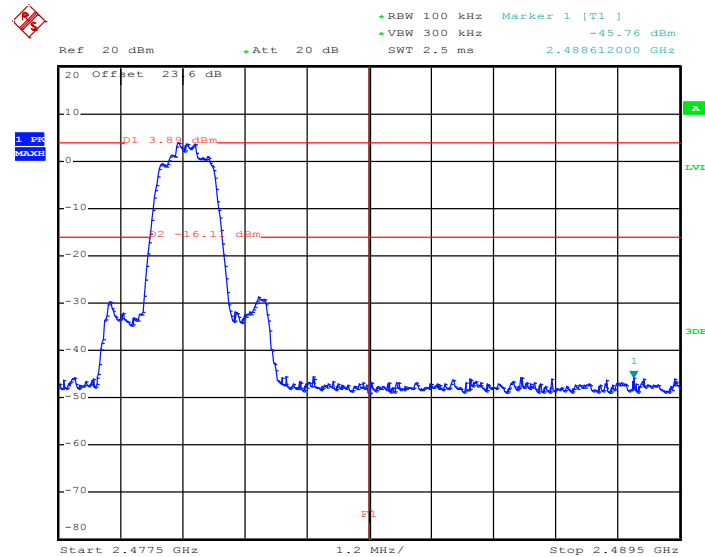**High Band Edge Plot on Channel 78**


Date: 27.JAN.2017 05:55:28

### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

<Ant. 1>


<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Tommy Lee and Derek Hsu	<b>Relative Humidity :</b>	48~51%

**1Mbps Hopping Mode Low Band Edge Plot**

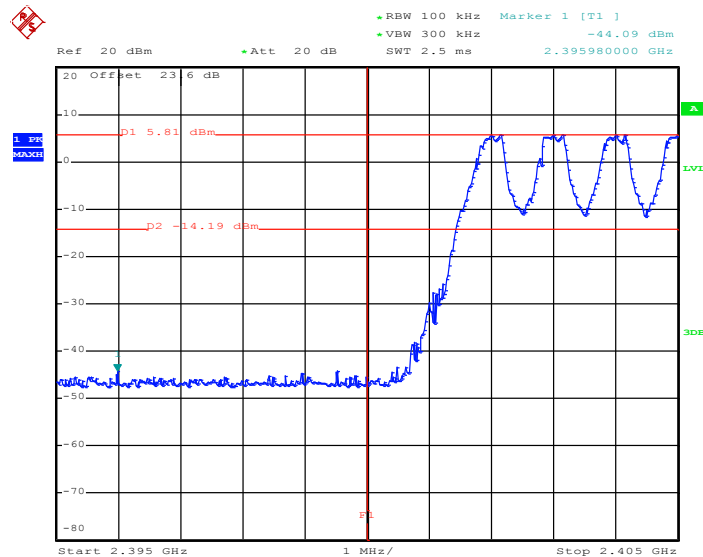

Date: 27.JAN.2017 01:37:52


**1Mbps Hopping Mode High Band Edge Plot**

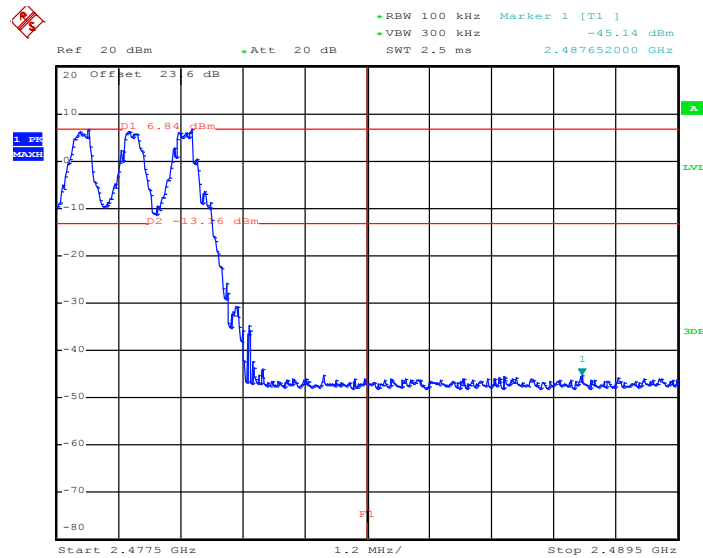


Date: 27.JAN.2017 01:38:57



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%

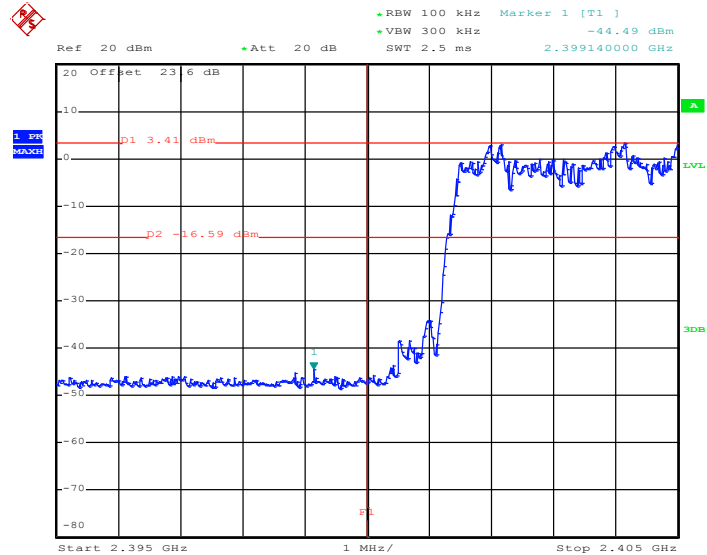**2Mbps Hopping Mode Low Band Edge Plot**


Date: 27.JAN.2017 01:43:51

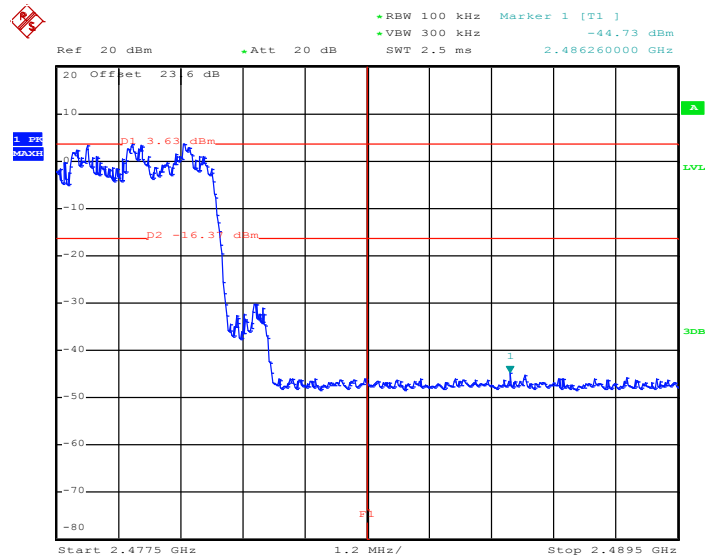**2Mbps Hopping Mode High Band Edge Plot**


Date: 27.JAN.2017 01:44:54



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Tommy Lee and Derek Hsu	Relative Humidity :	48~51%

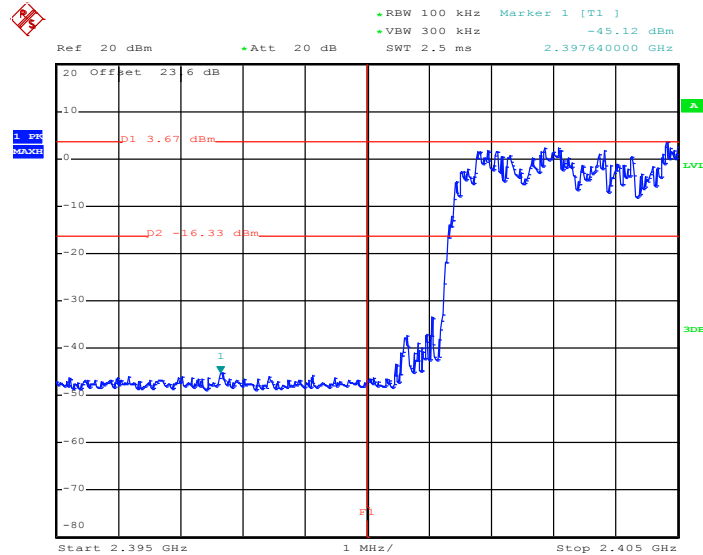**3Mbps Hopping Mode Low Band Edge Plot**

Date: 27.JAN.2017 01:49:28

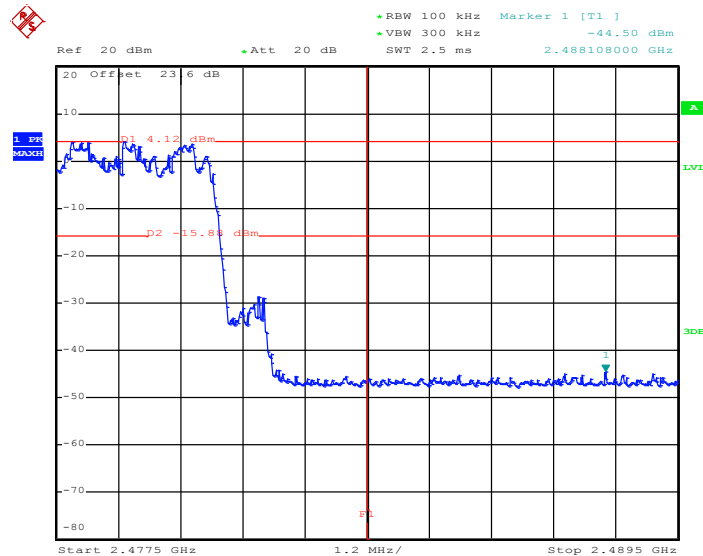
**3Mbps Hopping Mode High Band Edge Plot**

Date: 27.JAN.2017 01:52:07




&lt;Ant. 2&gt;

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%

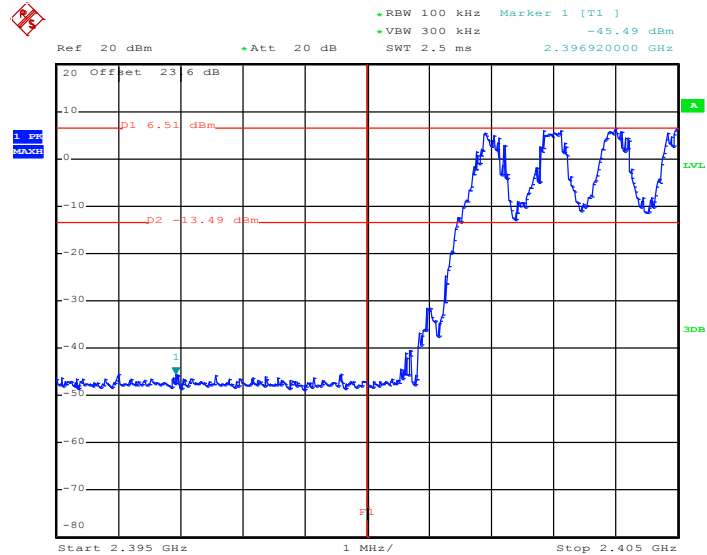**1Mbps Hopping Mode Low Band Edge Plot**


Date: 27.JAN.2017 04:25:06

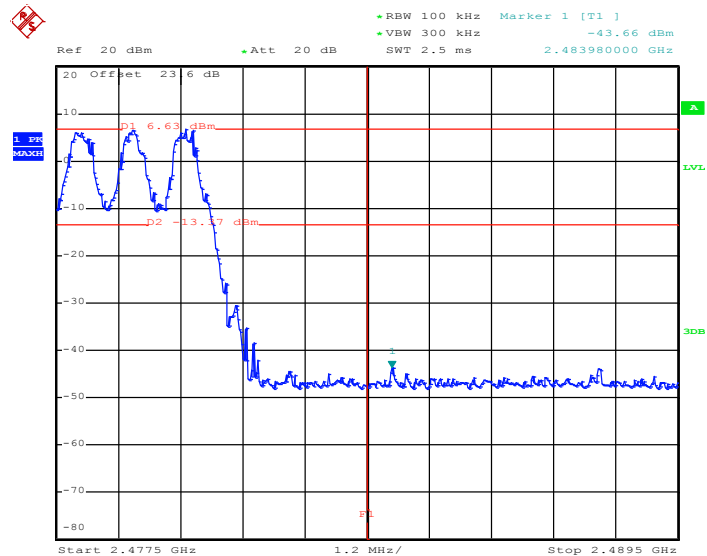**1Mbps Hopping Mode High Band Edge Plot**


Date: 27.JAN.2017 04:26:12



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%

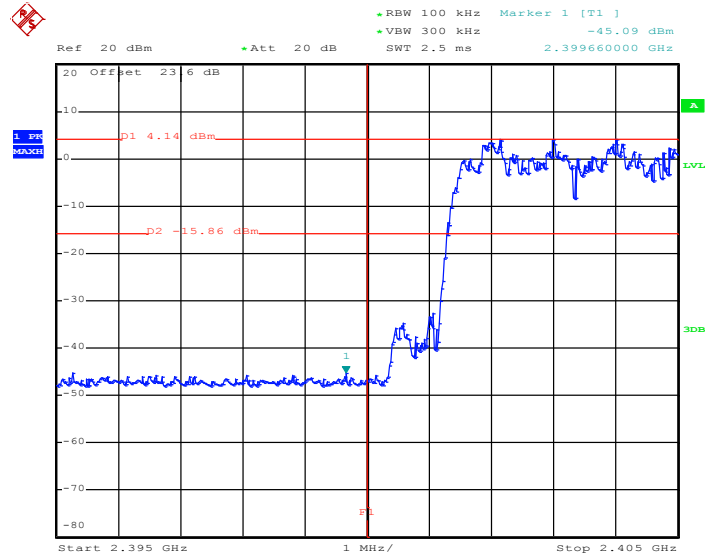**2Mbps Hopping Mode Low Band Edge Plot**


Date: 27.JAN.2017 04:28:21

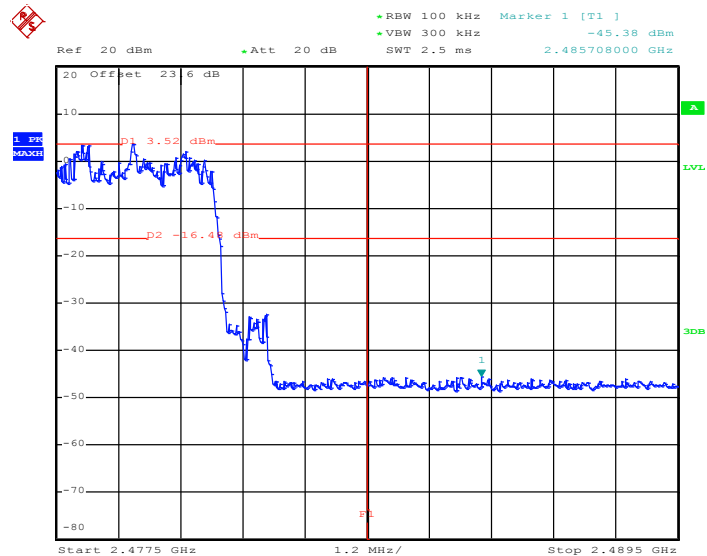**2Mbps Hopping Mode High Band Edge Plot**


Date: 27.JAN.2017 05:19:25



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu	Relative Humidity :	48~51%

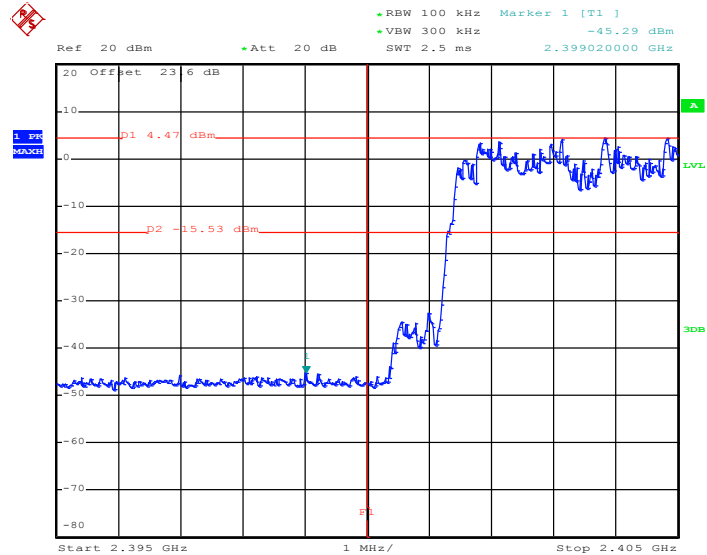**3Mbps Hopping Mode Low Band Edge Plot**

Date: 27.JAN.2017 04:22:29

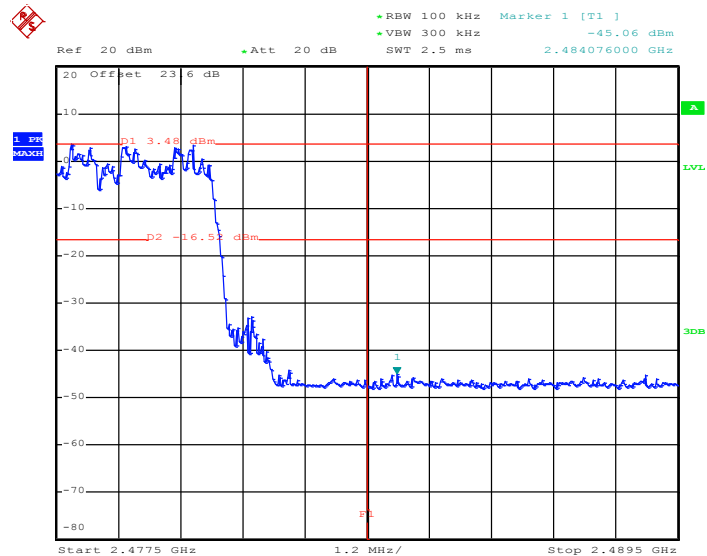**3Mbps Hopping Mode High Band Edge Plot**

Date: 27.JAN.2017 04:23:40



## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

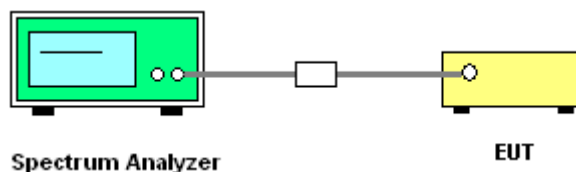


### 3.7.5 Test Result of Conducted Spurious Emission

<Ant. 1>


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

#### 1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

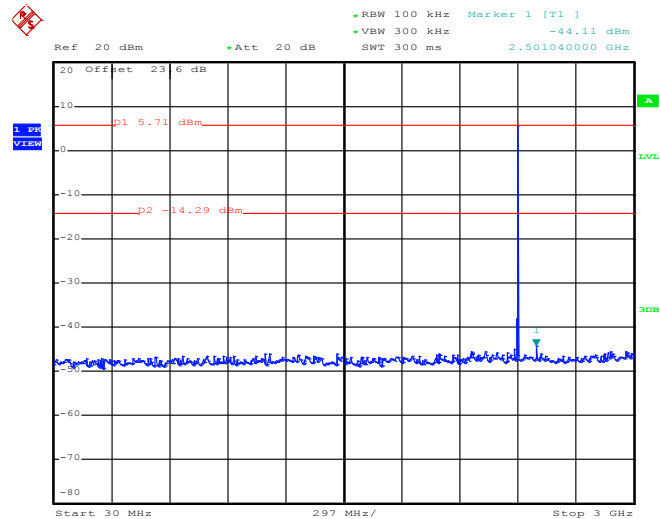

Date: 27.JAN.2017 01:59:54


#### 1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

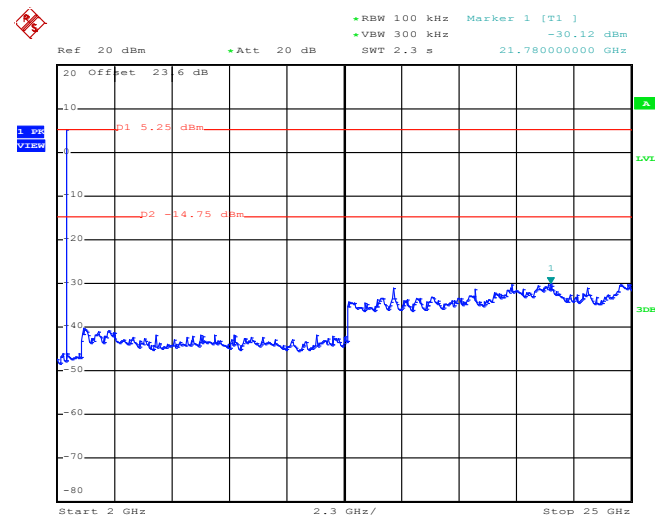


Date: 27.JAN.2017 02:00:15



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

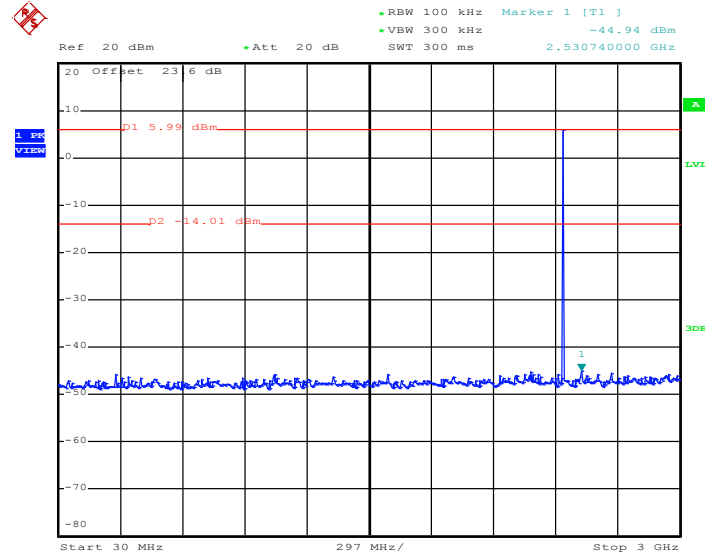**1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 02:07:37

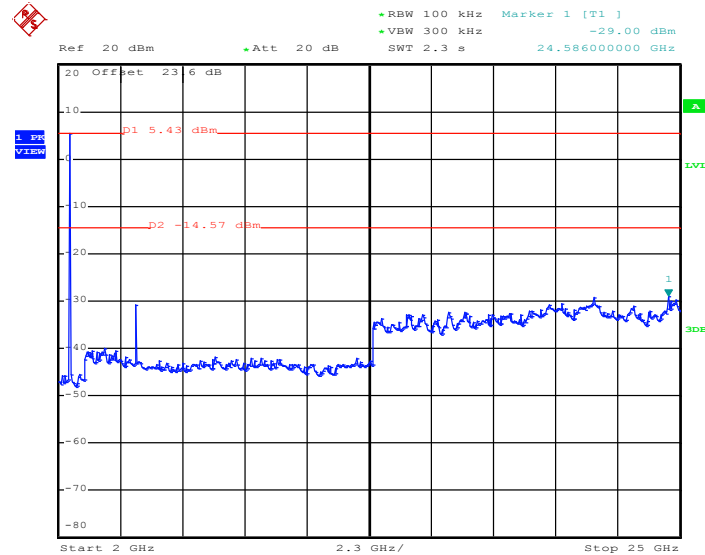**1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 02:07:59



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

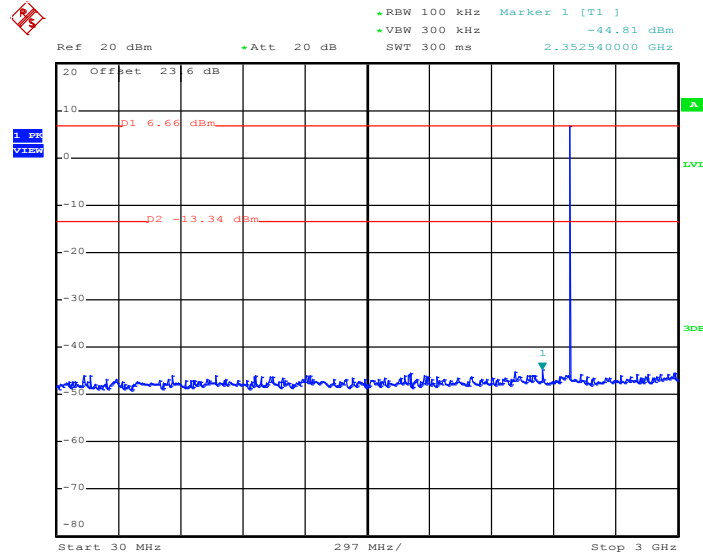**1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 02:41:57

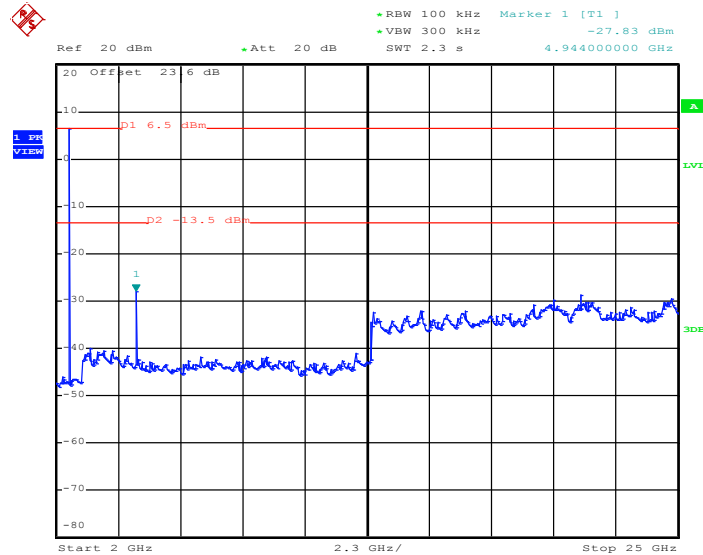**1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 02:42:18



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

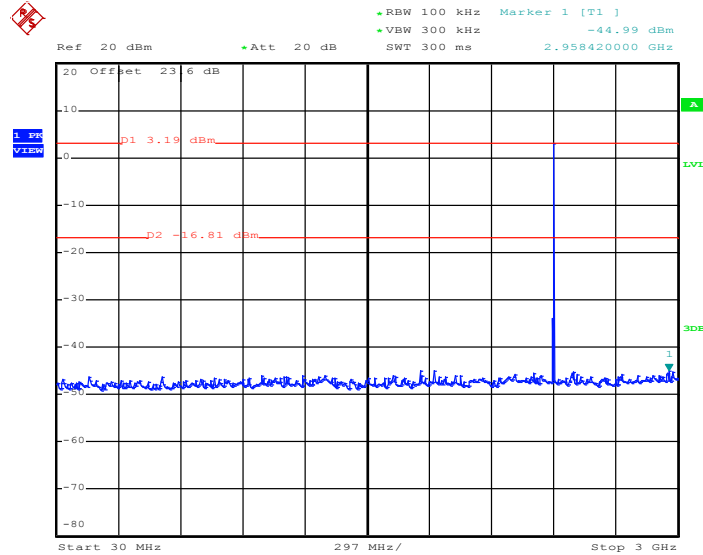**2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 02:53:25

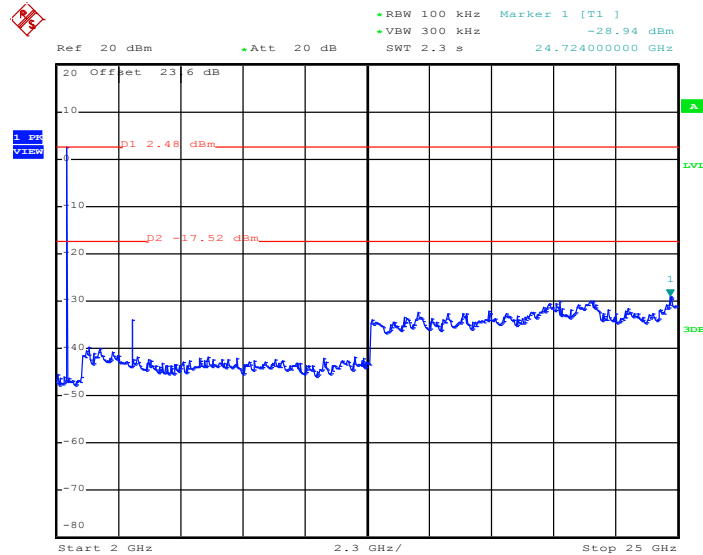**2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 02:53:47



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

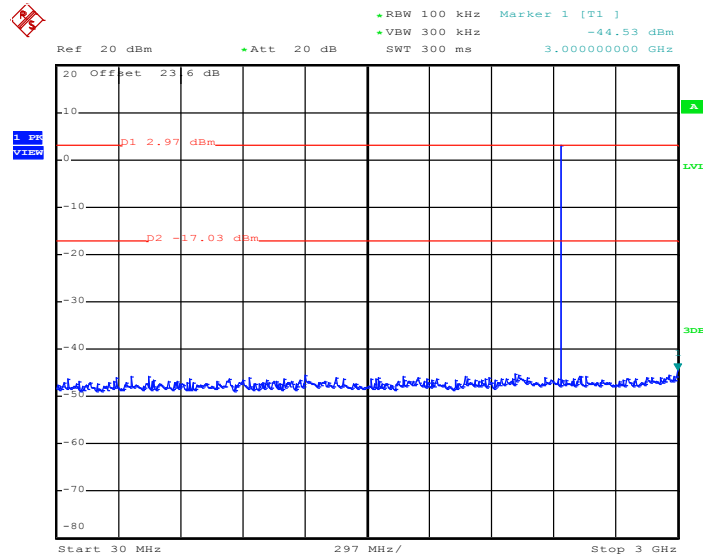**2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 03:08:38

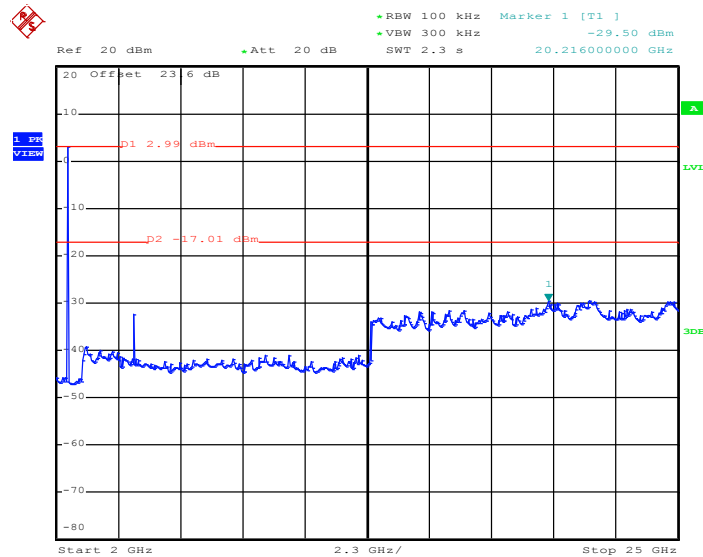**2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 03:07:00



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

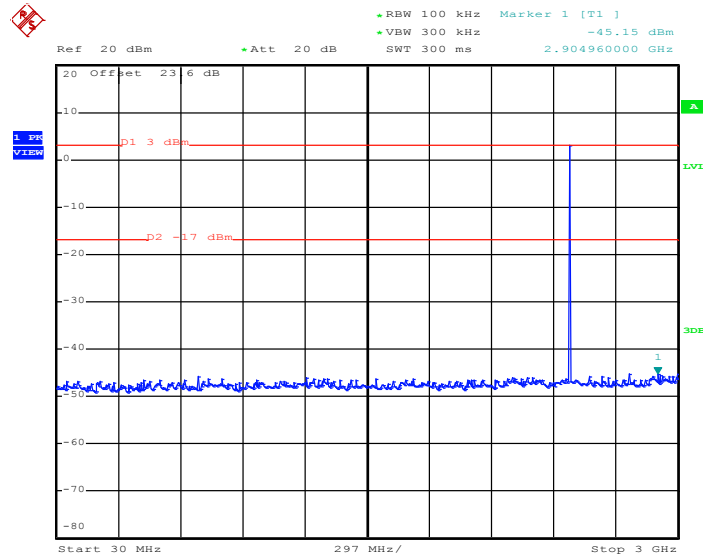**2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 03:20:54

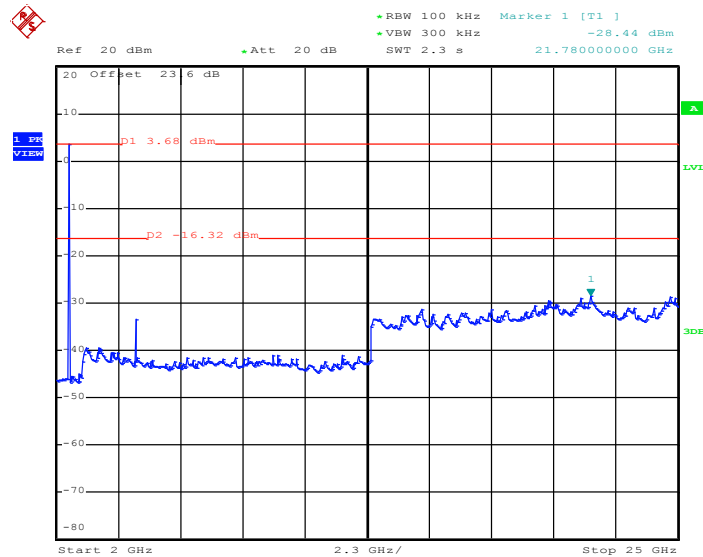**2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 03:24:05



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

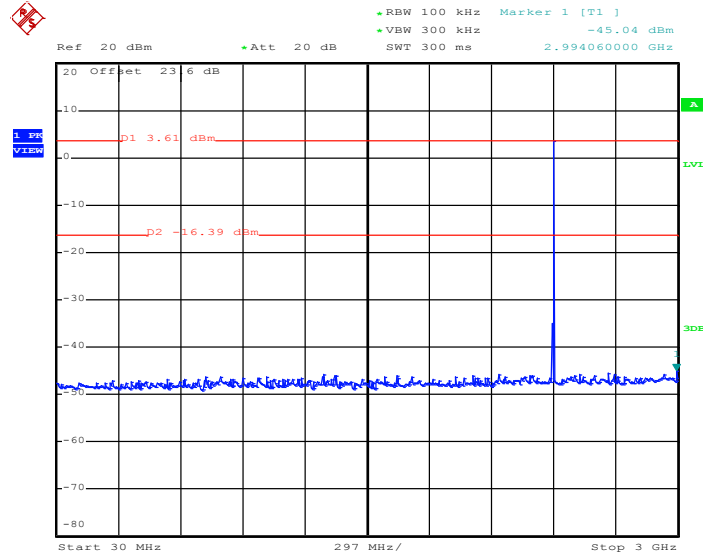**3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz**

Date: 27.JAN.2017 03:33:30

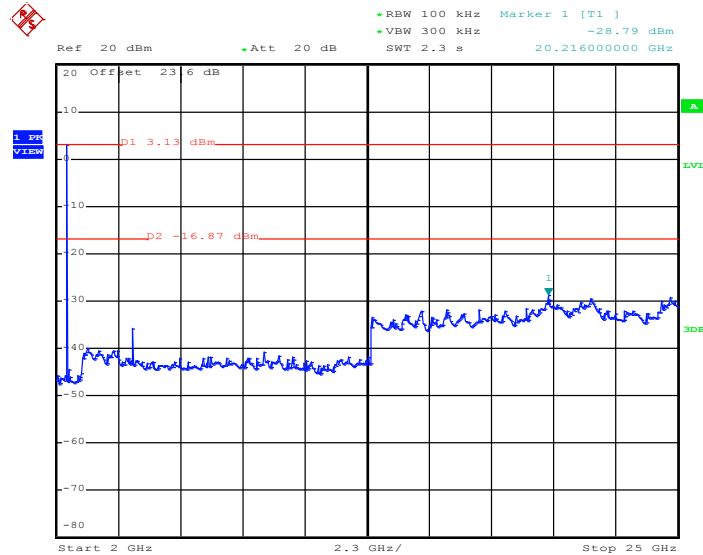
**3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz**

Date: 27.JAN.2017 03:34:59






Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

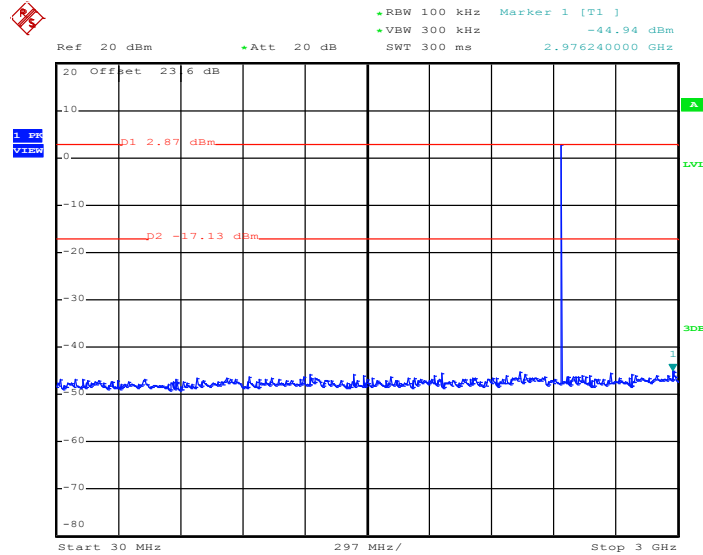**3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 03:42:48

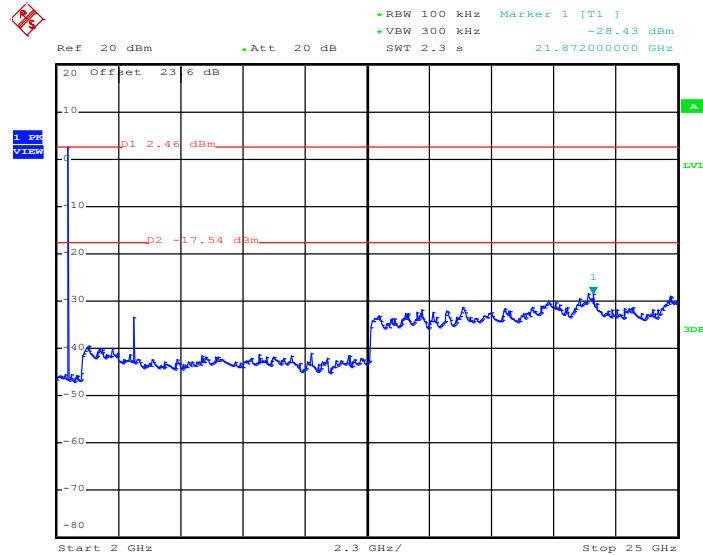**3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 03:45:05



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Tommy Lee and Derek Hsu

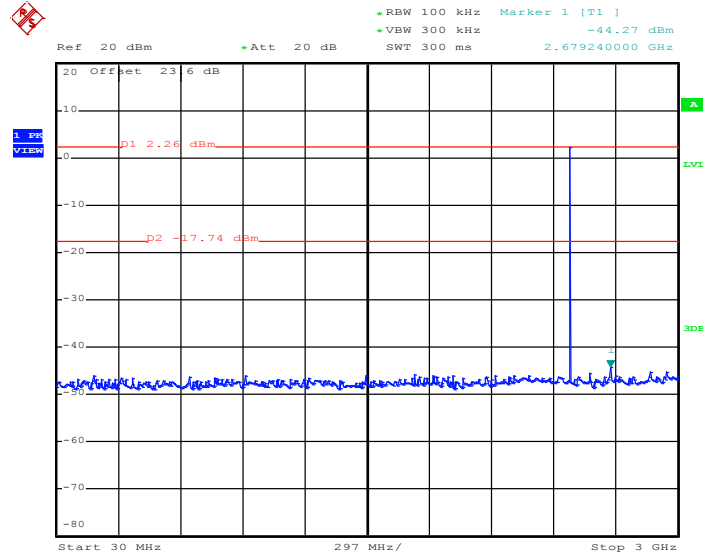**3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 27.JAN.2017 03:53:57

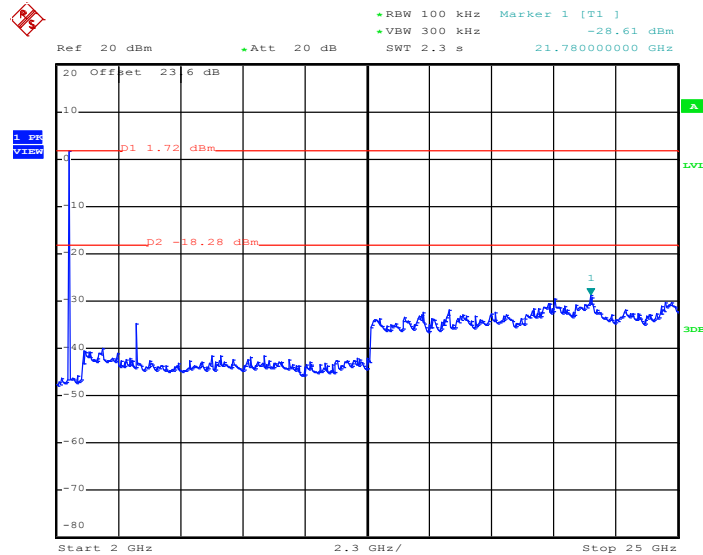
**3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**

Date: 27.JAN.2017 03:54:18




&lt;Ant. 2&gt;

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

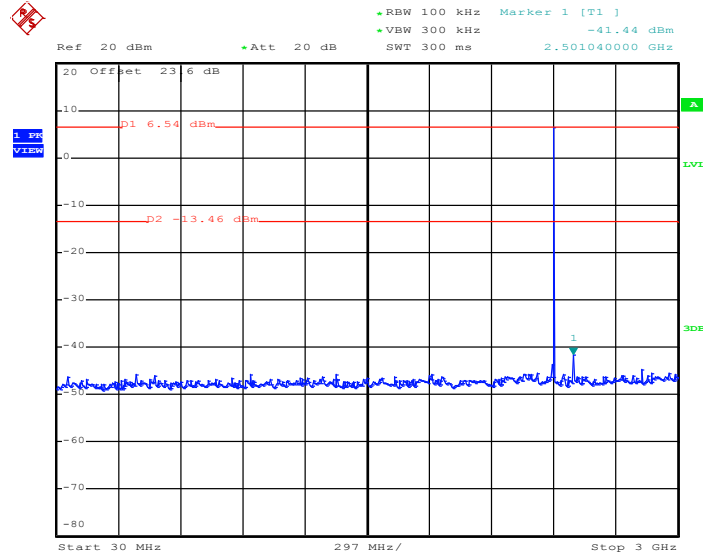**1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 06:06:48

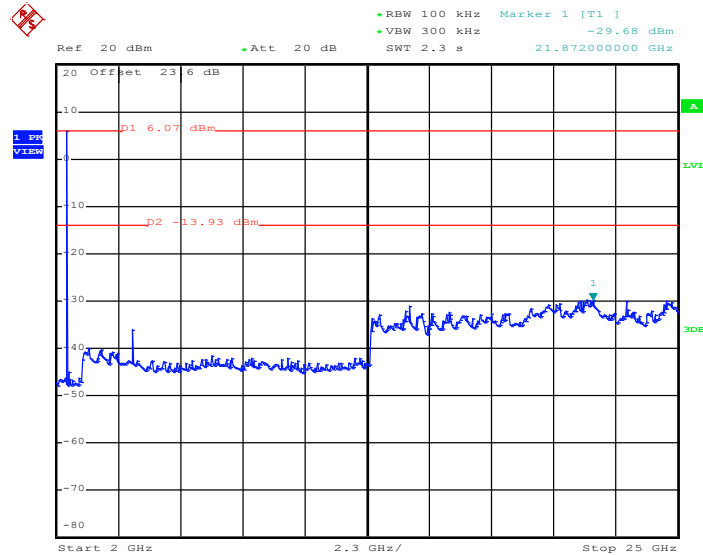**1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 06:07:10



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

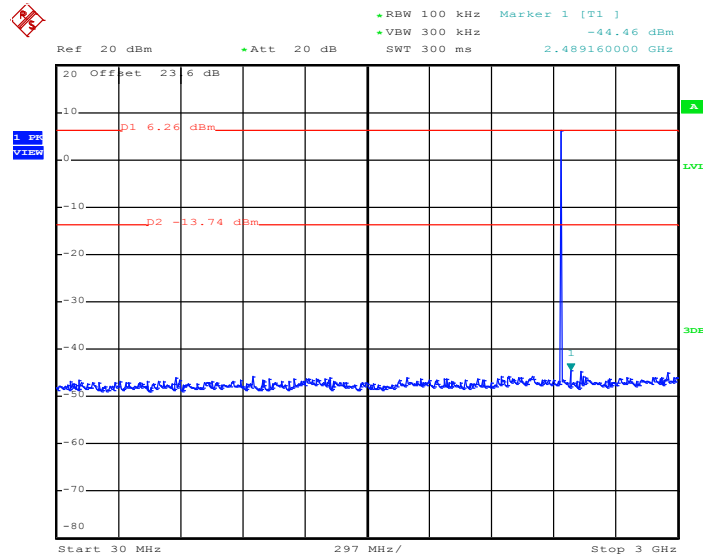**1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 05:03:41

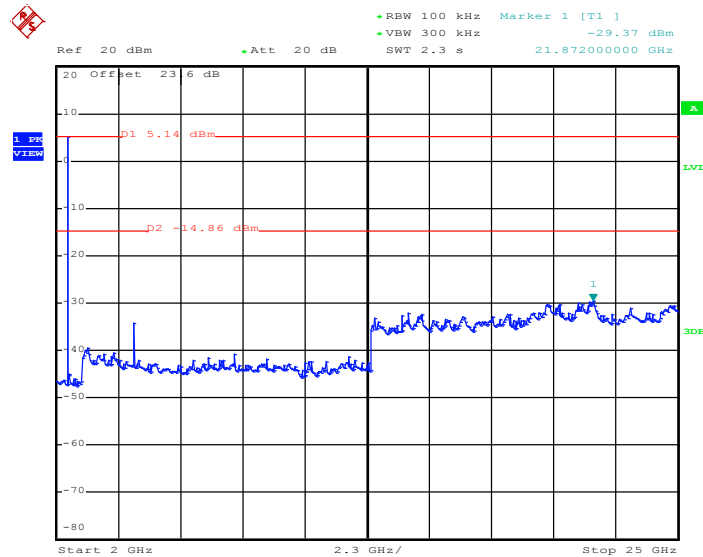**1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 05:04:03



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

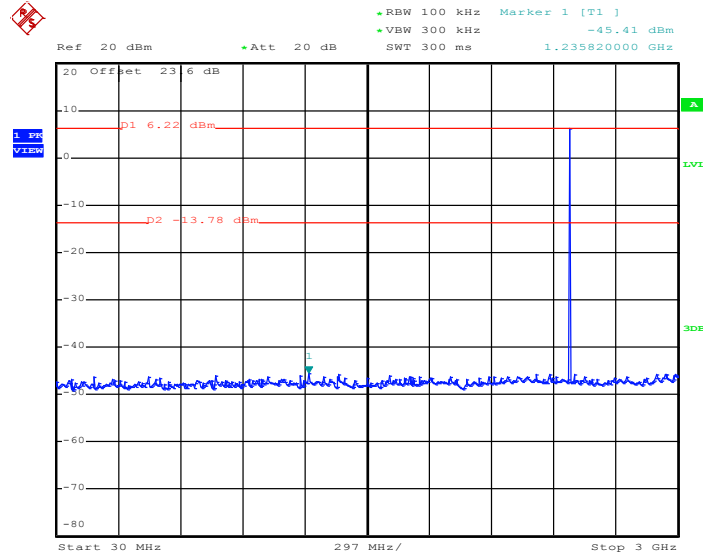**1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 05:11:04

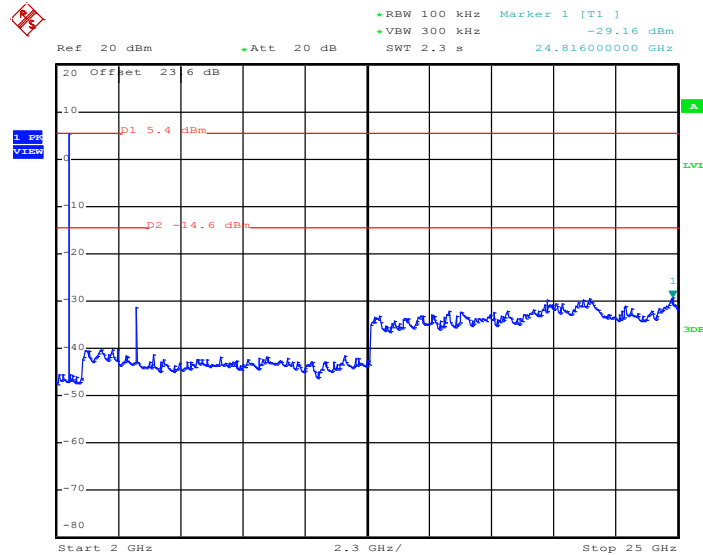**1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 05:12:28



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

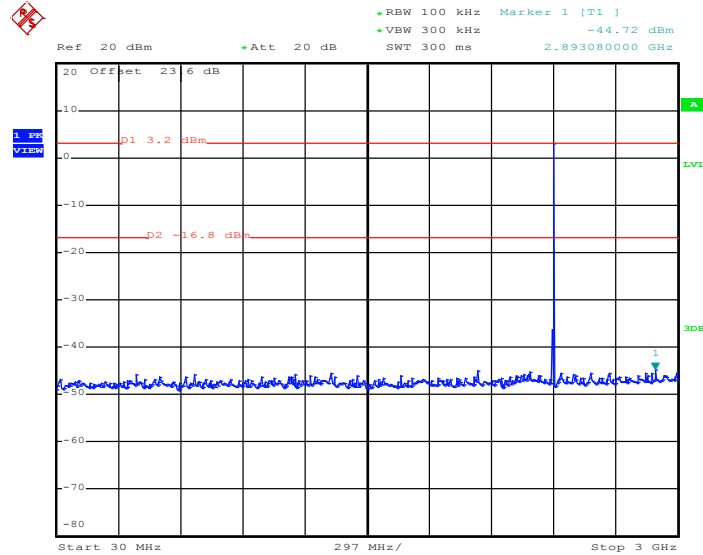**2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 05:24:27

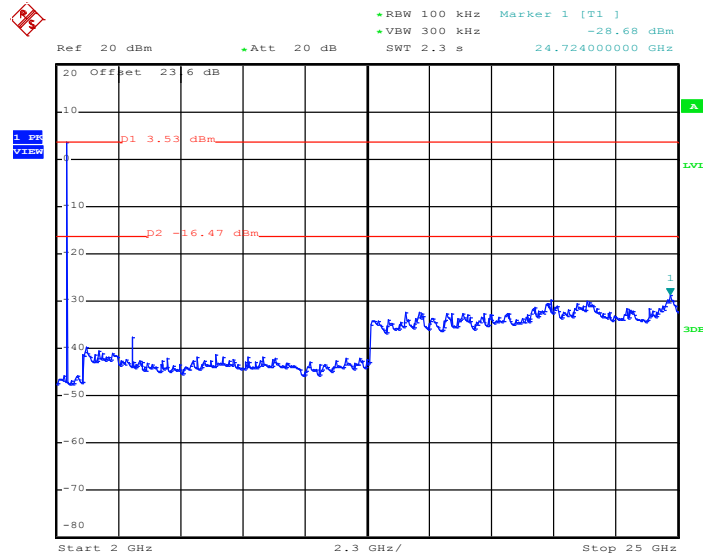**2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 05:24:49



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

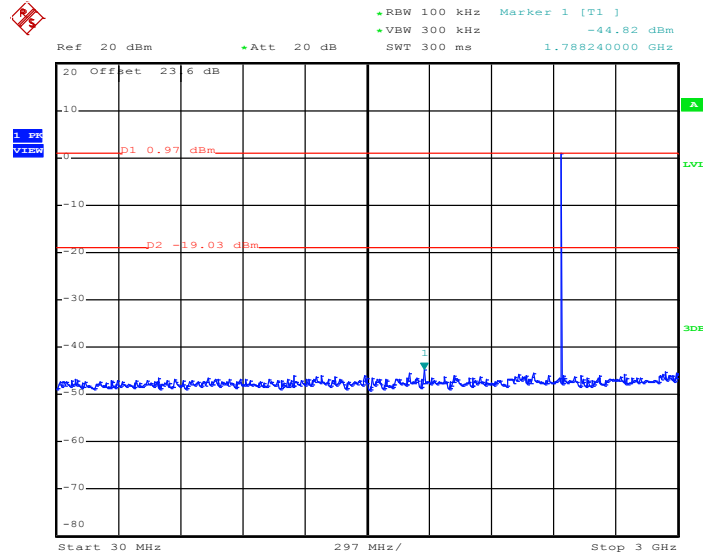**2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 05:29:47

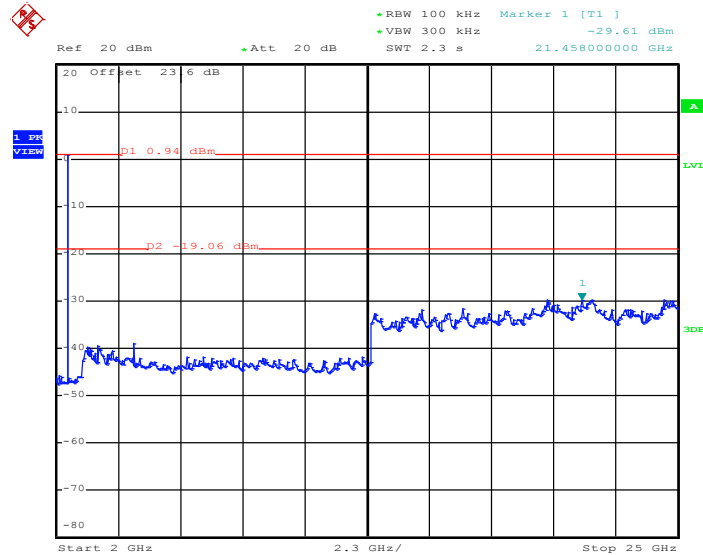**2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 05:31:02



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

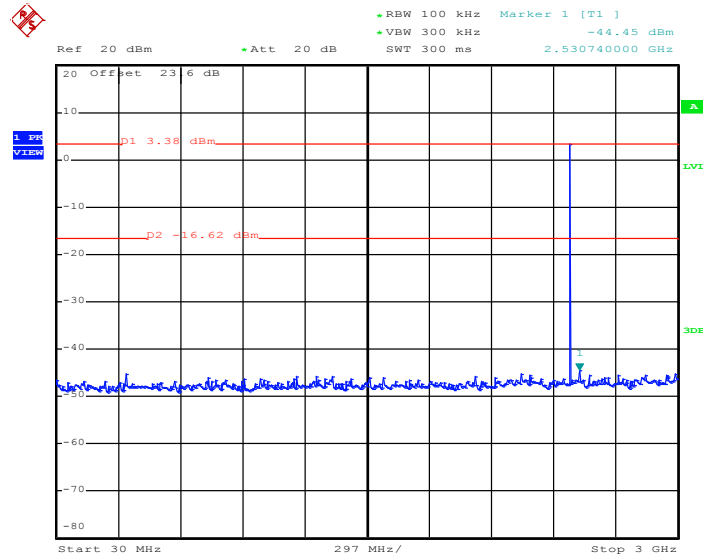**2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 27.JAN.2017 05:34:47

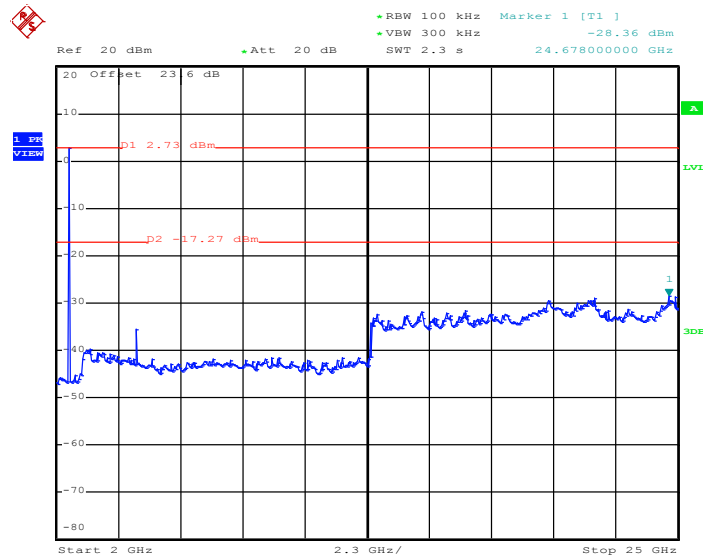
**2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**

Date: 27.JAN.2017 05:37:05






Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

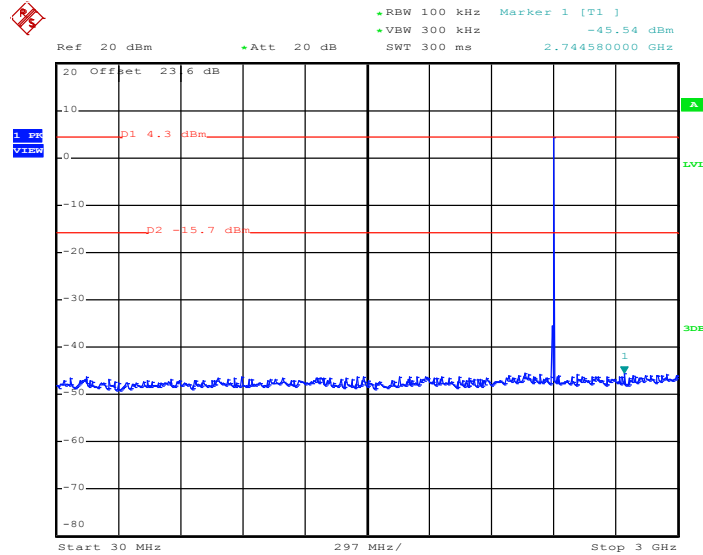**3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 05:41:52

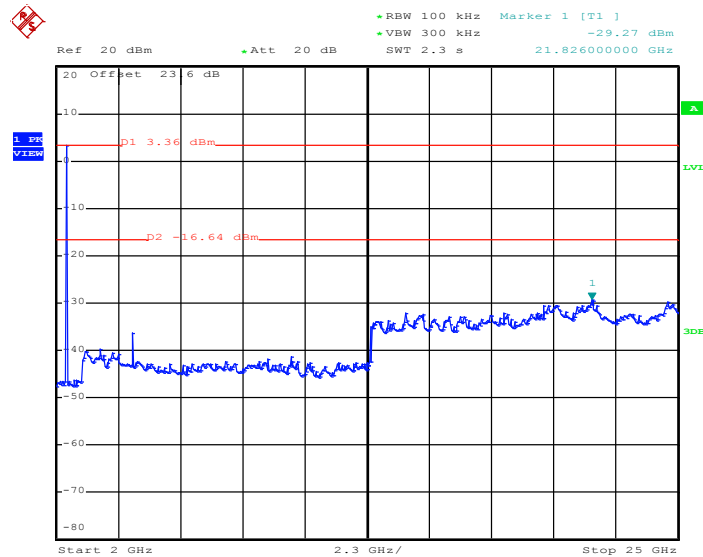**3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 05:42:14



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

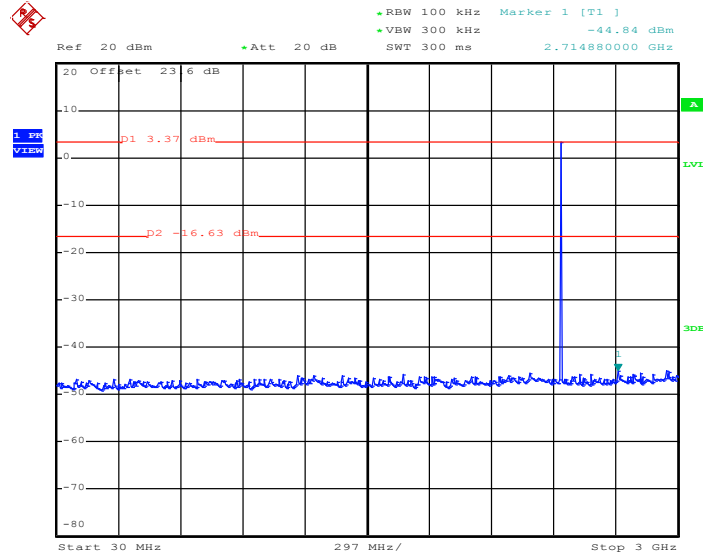**3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 27.JAN.2017 05:47:21

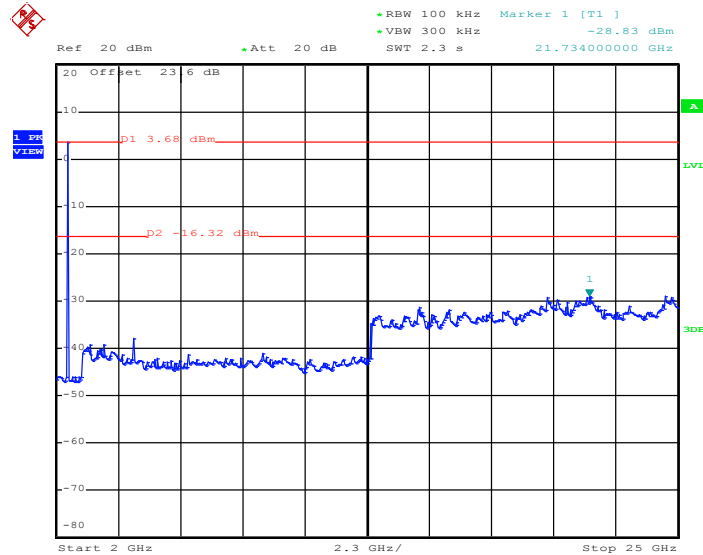**3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**


Date: 27.JAN.2017 05:49:22



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Derek Hsu

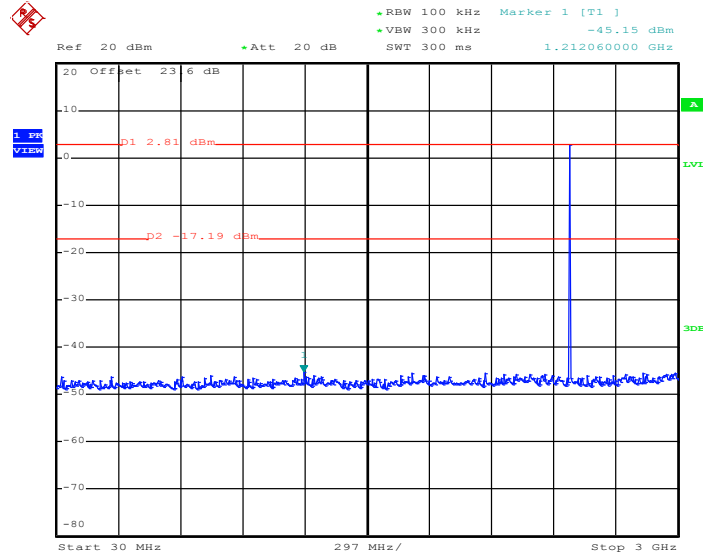**3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 27.JAN.2017 05:57:25

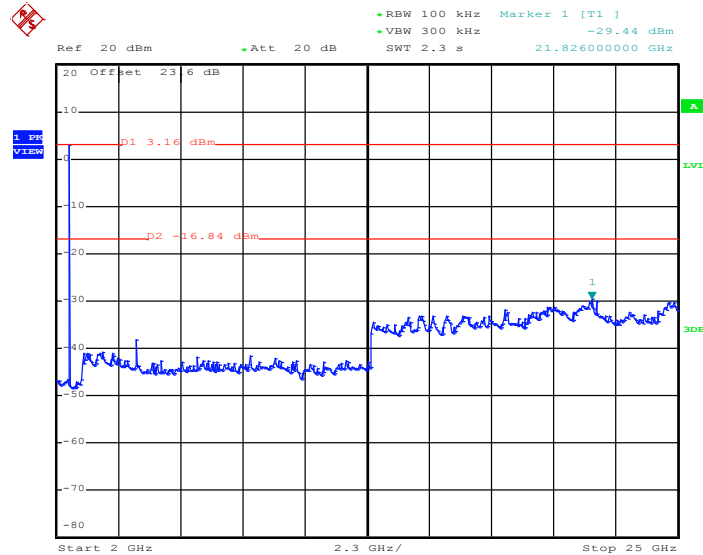**3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**

Date: 27.JAN.2017 05:59:08

## 3.8 Radiated Band Edges and Spurious Emission Measurement

### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1 \text{ GHz}$ ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

#### <Ant. 1>


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.74dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

#### <Ant. 2>


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.83dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

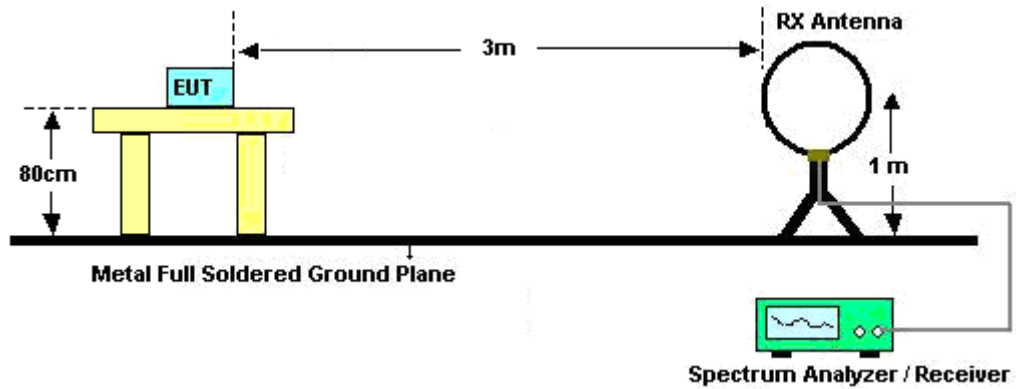

For radiated emissions from 30MHz to 1GHz

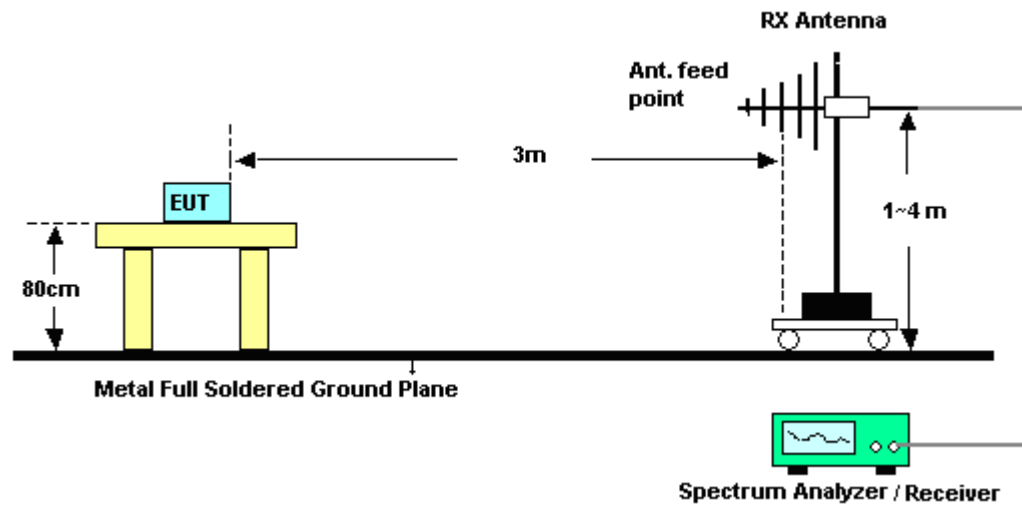

For radiated emissions above 1GHz

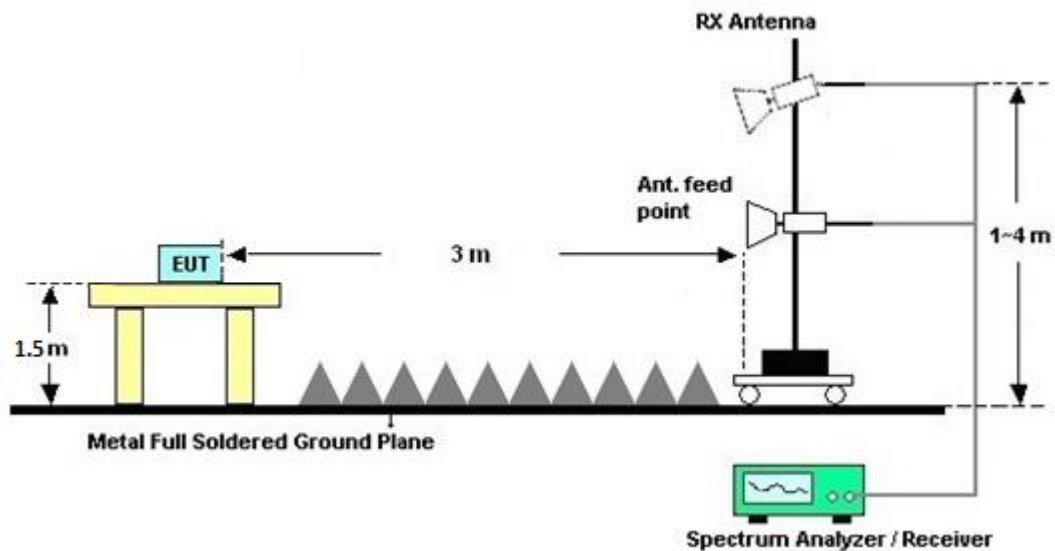


### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.8.6 Duty cycle correction factor for average measurement


<Ant. 1>

#### DH5 on time (One Pulse) Plot on Channel 39

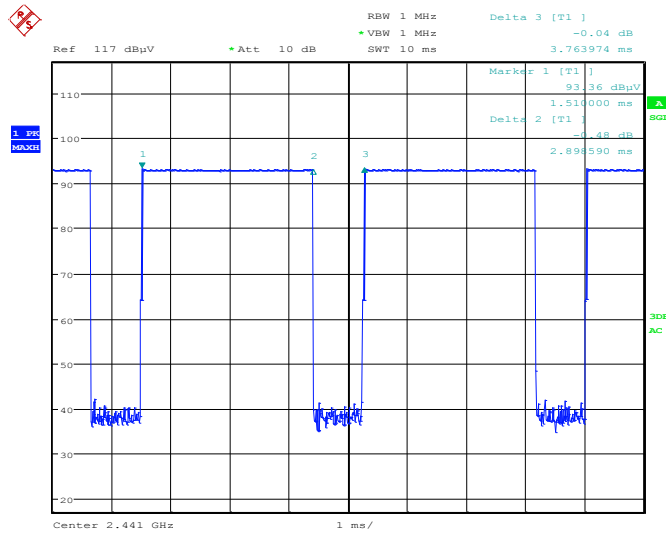

Date: 23.JAN.2017 22:22:42

#### DH5 on time (Count Pulses) Plot on Channel 39

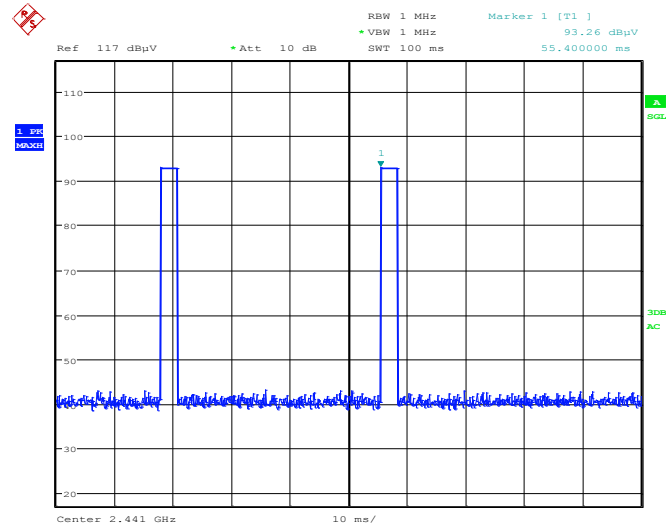

Date: 23.JAN.2017 22:26:56

#### Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.90 / 100 = 5.80 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.74 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.90 \text{ ms} \times 20 \text{ channels} = 58.0 \text{ ms}$$


There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:


$$2.90\text{ms} \times 2 = 5.80 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.80 \text{ ms}/100\text{ms}) = -24.74 \text{ dB}$$

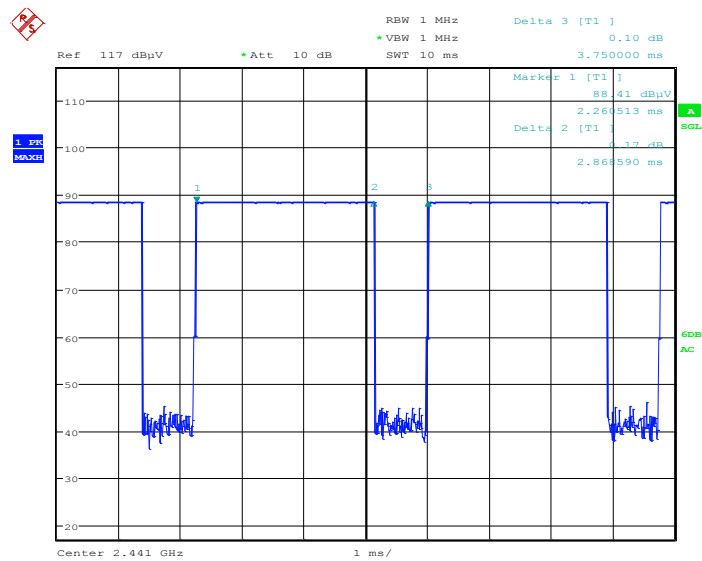**<Ant. 2>****DH5 on time (One Pulse) Plot on Channel 39**

Date: 23.JAN.2017 23:51:25

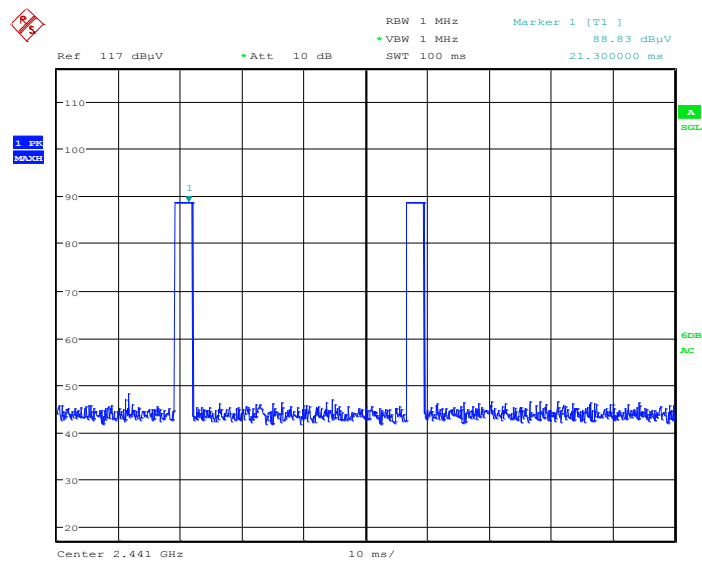**DH5 on time (Count Pulses) Plot on Channel 39**

Date: 23.JAN.2017 23:54:37

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.87 / 100 = 5.74 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.83 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.87\text{ ms} \times 20\text{ channels} = 57.4\text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2\text{ hops}$

Thus, the maximum possible ON time:

$$2.87\text{ms} \times 2 = 5.74\text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.74\text{ ms}/100\text{ms}) = -24.83\text{ dB}$$

**3.8.7 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A and B.

**3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix A and B.

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

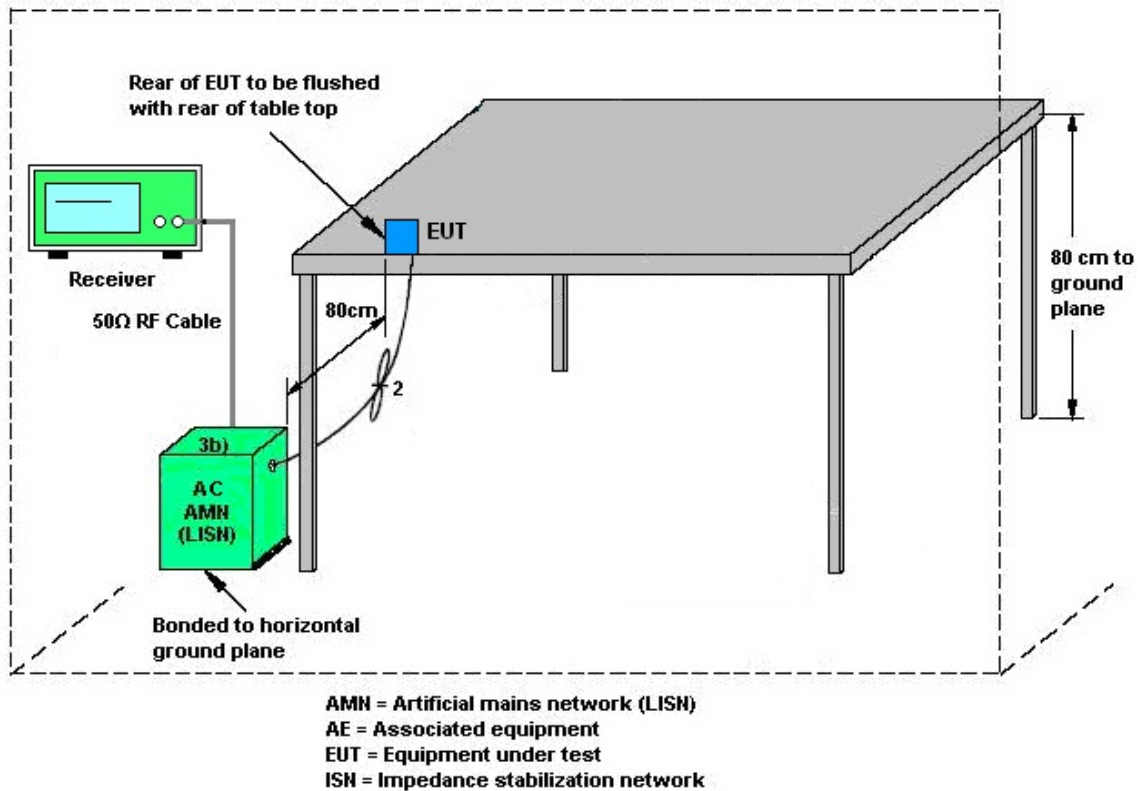

### 3.9.5 Test Result of AC Conducted Emission

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~23℃
<b>Test Engineer :</b>	Kai-Chun Chu	<b>Relative Humidity :</b>	49~50%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	Bluetooth Link + USB Cable (Charging from Adapter)		

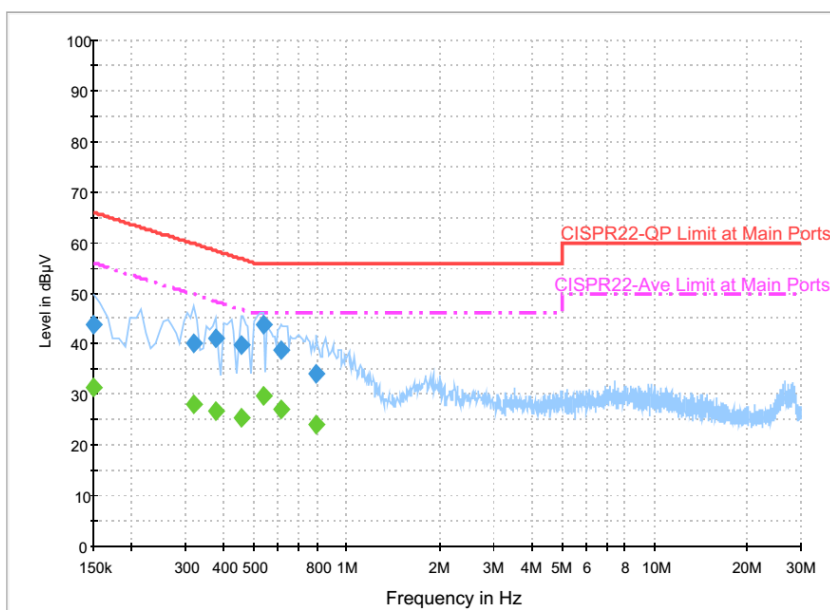


#### Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	43.9	Off	L1	19.6	22.1	66.0
0.318000	40.1	Off	L1	19.6	19.7	59.8
0.374000	41.2	Off	L1	19.6	17.2	58.4
0.454000	39.8	Off	L1	19.6	17.0	56.8
0.534000	43.7	Off	L1	19.6	12.3	56.0
0.614000	38.8	Off	L1	19.6	17.2	56.0
0.798000	34.2	Off	L1	19.6	21.8	56.0

#### Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	31.6	Off	L1	19.6	24.4	56.0
0.318000	28.0	Off	L1	19.6	21.8	49.8
0.374000	26.7	Off	L1	19.6	21.7	48.4
0.454000	25.3	Off	L1	19.6	21.5	46.8
0.534000	29.6	Off	L1	19.6	16.4	46.0
0.614000	27.2	Off	L1	19.6	18.8	46.0
0.798000	24.1	Off	L1	19.6	21.9	46.0

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~23°C
<b>Test Engineer :</b>	Kai-Chun Chu	<b>Relative Humidity :</b>	49~50%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	Bluetooth Link + USB Cable (Charging from Adapter)		

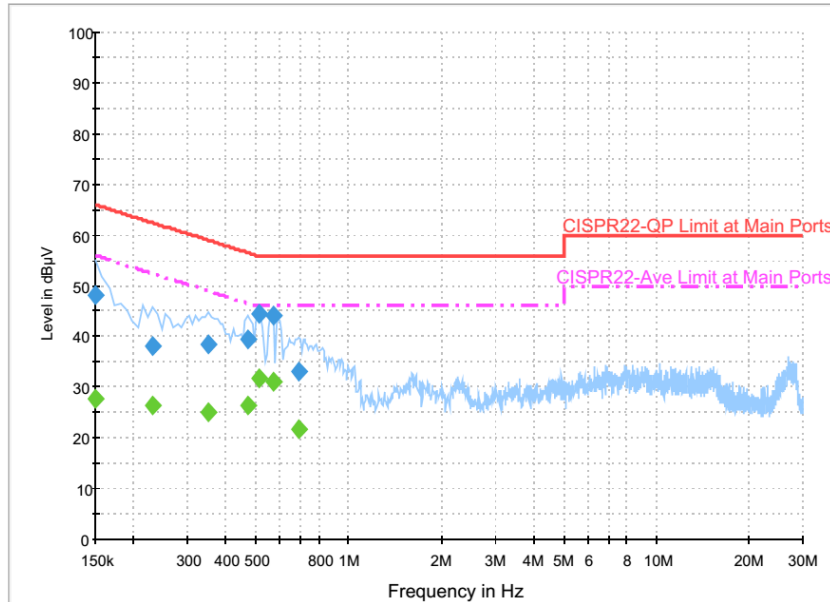
**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	48.1	Off	N	19.6	17.9	66.0
0.230000	38.0	Off	N	19.6	24.4	62.4
0.350000	38.3	Off	N	19.6	20.7	59.0
0.470000	39.4	Off	N	19.6	17.1	56.5
0.510000	44.6	Off	N	19.6	11.4	56.0
0.566000	44.3	Off	N	19.6	11.7	56.0
0.686000	33.0	Off	N	19.6	23.0	56.0

**Final Result : Average**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	27.7	Off	N	19.6	28.3	56.0
0.230000	26.3	Off	N	19.6	26.1	52.4
0.350000	25.1	Off	N	19.6	23.9	49.0
0.470000	26.5	Off	N	19.6	20.0	46.5
0.510000	31.8	Off	N	19.6	14.2	46.0
0.566000	31.2	Off	N	19.6	14.8	46.0
0.686000	21.9	Off	N	19.6	24.1	46.0



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Dec. 26, 2016	Jan. 17, 2017 ~ Jan. 27, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Dec. 26, 2016	Jan. 17, 2017 ~ Jan. 27, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jul. 17, 2016	Jan. 17, 2017 ~ Jan. 27, 2017	Jul. 16, 2017	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jan. 19, 2017 ~ Jan. 25, 2017	Sep. 01, 2017	Radiation (03CH12-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jan. 19, 2017 ~ Jan. 25, 2017	Nov. 09, 2017	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 15, 2016	Jan. 19, 2017 ~ Jan. 25, 2017	Oct. 14, 2017	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 23, 2016	Jan. 19, 2017 ~ Jan. 25, 2017	Dec. 22, 2017	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 25, 2016	Jan. 19, 2017 ~ Jan. 25, 2017	Oct. 24, 2017	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 01, 2016	Jan. 19, 2017 ~ Jan. 25, 2017	Nov. 30, 2017	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 12, 2017	Jan. 19, 2017 ~ Jan. 25, 2017	Jan. 11, 2018	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jan. 19, 2017 ~ Jan. 25, 2017	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jan. 19, 2017 ~ Jan. 25, 2017	N/A	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 15, 2016	Jan. 19, 2017 ~ Jan. 25, 2017	Apr. 14, 2017	Radiation (03CH12-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 27, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jan. 27, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jan. 27, 2017	Nov. 28, 2017	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7
---	-----



## Appendix A. Radiated Spurious Emission

Test Engineer :	Karl Hou, Nick Yu, and Peter Chiu	Temperature :	22~25°C
		Relative Humidity :	54~46%

&lt;EUT with Ant. 1&gt;

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH00 2402MHz		2362.185	51.54	-22.46	74	48.68	26.99	7.37	31.5	335	131	P	H
		2362.185	26.8	-27.2	54	-	-	-	-	-	-	A	H
	*	2402	97.15	-	-	94.08	27.11	7.45	31.49	335	131	P	H
	*	2402	72.41	-	-	-	-	-	-	-	-	A	H
													H
													H
		2366.49	50.94	-23.06	74	48.06	27	7.37	31.49	318	41	P	V
		2366.49	26.2	-27.8	54	-	-	-	-	-	-	A	V
	*	2402	95.09	-	-	92.02	27.11	7.45	31.49	318	41	P	V
	*	2402	70.35	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2329.18	50.41	-23.59	74	47.73	26.89	7.3	31.51	327	132	P	H
		2329.18	25.67	-28.33	54	-	-	-	-	-	-	A	H
	*	2441	100.08	-	-	96.84	27.22	7.49	31.47	327	132	P	H
	*	2441	75.34	-	-	-	-	-	-	-	-	A	H
		2493.42	50.87	-23.13	74	47.42	27.38	7.53	31.46	327	132	P	H
		2493.42	26.13	-27.87	54	-	-	-	-	-	-	A	H
		2367.4	50.2	-23.8	74	47.32	27	7.37	31.49	248	37	P	V
		2367.4	25.46	-28.54	54	-	-	-	-	-	-	A	V
	*	2441	96.75	-	-	93.51	27.22	7.49	31.47	248	37	P	V
	*	2441	72.01	-	-	-	-	-	-	-	-	A	V
		2489.15	52.65	-21.35	74	49.22	27.37	7.53	31.47	248	37	P	V
		2489.15	27.91	-26.09	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	98.73	-	-	95.33	27.34	7.53	31.47	395	140	P	H
	*	2480	73.99	-	-	-	-	-	-	-	-	A	H
		2487.48	52.56	-21.44	74	49.14	27.36	7.53	31.47	395	140	P	H
		2487.48	27.82	-26.18	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	95.46	-	-	92.06	27.34	7.53	31.47	305	39	P	V
	*	2480	70.72	-	-	-	-	-	-	-	-	A	V
		2492.28	51.43	-22.57	74	47.98	27.38	7.53	31.46	305	39	P	V
		2492.28	26.69	-27.31	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	65.66	-8.34	74	81.07	32.15	10.59	58.15	100	0	P	H
		4804	40.92	-13.08	54	-	-	-	-	-	-	A	H
													H
													H
		4804	57.38	-16.62	74	72.79	32.15	10.59	58.15	100	0	P	V
		4804	32.64	-21.36	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	67.64	-6.36	74	82.56	32.29	10.89	58.1	100	0	P	H
		4882	42.9	-11.1	54	-	-	-	-	-	-	A	H
		7323	42.86	-31.14	74	50.78	37	14.18	59.1	100	0	P	H
		7323	18.12	-35.88	54	-	-	-	-	-	-	A	H
		4882	58.53	-15.47	74	73.45	32.29	10.89	58.1	100	0	P	V
		4882	33.79	-20.21	54	-	-	-	-	-	-	A	V
		7323	42.6	-31.4	74	50.52	37	14.18	59.1	100	0	P	V
		7323	17.86	-36.14	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	69.25	-4.75	74	83.66	32.43	11.19	58.03	100	0	P	H
		4960	44.51	-9.49	54	-	-	-	-	-	-	A	H
		7440	44.03	-29.97	74	51.55	37.33	14.32	59.17	100	0	P	H
		7440	19.29	-34.71	54	-	-	-	-	-	-	A	H
		4960	61.48	-12.52	74	75.89	32.43	11.19	58.03	100	0	P	V
		4960	36.74	-17.26	54	-	-	-	-	-	-	A	V
		7440	43.65	-30.35	74	51.17	37.33	14.32	59.17	100	0	P	V
		7440	18.91	-35.09	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

### Emission below 1GHz

## 2.4GHz BT (LF)



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**





&lt;EUT with Ant. 2&gt;

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH00 2402MHz		2331.525	50.97	-23.03	74	48.29	26.89	7.3	31.51	345	138	P	H
		2331.525	26.14	-27.86	54	-	-	-	-	-	-	A	H
	*	2402	91.09	-	-	88.02	27.11	7.45	31.49	345	138	P	H
	*	2402	66.26	-	-	-	-	-	-	-	-	A	H
													H
													H
		2313.78	50.08	-23.92	74	47.45	26.84	7.3	31.51	100	148	P	V
		2313.78	25.25	-28.75	54	-	-	-	-	-	-	A	V
	*	2402	88.99	-	-	85.92	27.11	7.45	31.49	100	148	P	V
	*	2402	64.16	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2365.58	50.04	-23.96	74	47.16	27	7.37	31.49	329	135	P	H
		2365.58	25.21	-28.79	54	-	-	-	-	-	-	A	H
	*	2441	95.21	-	-	91.97	27.22	7.49	31.47	329	135	P	H
	*	2441	70.38	-	-	-	-	-	-	-	-	A	H
		2485.58	51.09	-22.91	74	47.67	27.36	7.53	31.47	329	135	P	H
		2485.58	26.26	-27.74	54	-	-	-	-	-	-	A	H
		2312.52	50.72	-23.28	74	48.1	26.84	7.3	31.52	100	128	P	V
		2312.52	25.89	-28.11	54	-	-	-	-	-	-	A	V
	*	2441	92.27	-	-	89.03	27.22	7.49	31.47	100	128	P	V
	*	2441	67.44	-	-	-	-	-	-	-	-	A	V
		2489.22	51.83	-22.17	74	48.4	27.37	7.53	31.47	100	128	P	V
		2489.22	27	-27	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	92.35	-	-	88.95	27.34	7.53	31.47	355	136	P	H
	*	2480	67.52	-	-	-	-	-	-	-	-	A	H
		2484.68	50.95	-23.05	74	47.54	27.35	7.53	31.47	355	136	P	H
		2480	26.12	-27.88	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	89.26	-	-	85.86	27.34	7.53	31.47	100	124	P	V
	*	2480	64.43	-	-	-	-	-	-	-	-	A	V
		2496.72	52.95	-21.05	74	49.49	27.39	7.53	31.46	100	124	P	V
		2496.72	28.12	-25.88	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	45.72	-28.28	74	61.13	32.15	10.59	58.15	100	0	P	H
		4804	20.89	-33.11	54	-	-	-	-	-	-	A	H
													H
													H
		4804	51.43	-22.57	74	66.84	32.15	10.59	58.15	100	0	P	V
		4804	26.6	-27.4	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	50.94	-23.06	74	65.86	32.29	10.89	58.1	100	0	P	H
		4882	26.11	-27.89	54	-	-	-	-	-	-	A	H
		7323	43	-31	74	50.92	37	14.18	59.1	100	0	P	H
		7323	18.17	-35.83	54	-	-	-	-	-	-	A	H
		4882	45.54	-28.46	74	60.46	32.29	10.89	58.1	100	0	P	V
		4882	20.71	-33.29	54	-	-	-	-	-	-	A	V
		7323	42.56	-31.44	74	50.48	37	14.18	59.1	100	0	P	V
		7323	17.73	-36.27	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	49.92	-24.08	74	64.33	32.43	11.19	58.03	100	0	P	H
		4960	25.09	-28.91	54	-	-	-	-	-	-	A	H
		7440	44.14	-29.86	74	51.66	37.33	14.32	59.17	100	0	P	H
		7440	19.31	-34.69	54	-	-	-	-	-	-	A	H
		4960	47.02	-26.98	74	61.43	32.43	11.19	58.03	100	0	P	V
		4960	22.19	-31.81	54	-	-	-	-	-	-	A	V
		7440	43.35	-30.65	74	50.87	37.33	14.32	59.17	100	0	P	V
		7440	18.52	-35.48	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix B. Radiated Spurious Emission Plots

Test Engineer :	Karl Hou, Nick Yu, and Peter Chiu	Temperature :	22~25°C
		Relative Humidity :	54~46%



### Note symbol

-L	Low channel location
-R	High channel location



<EUT with Ant. 1>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

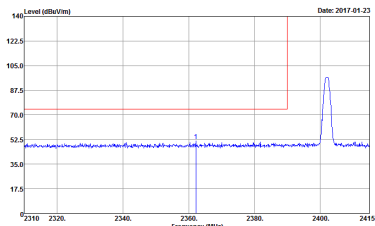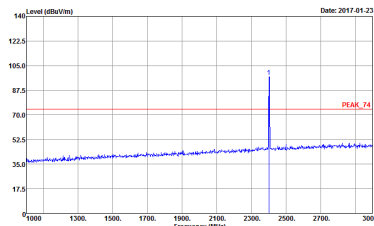BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1320 HORIZONTAL Detector : BW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 662707-01 Mode : 1</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1320 HORIZONTAL Detector : BW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 662707-01 Mode : 1</p>

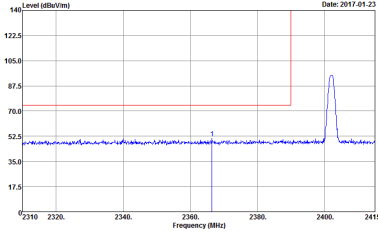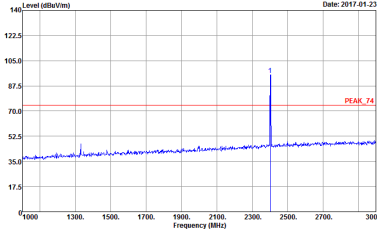

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_RE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-23</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-23</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 2</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 2</p>
	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 2</p>	Left blank





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 2</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 2</p>
	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 2</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 3</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 3</p></div>

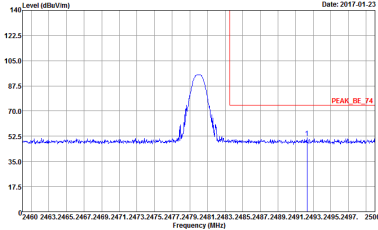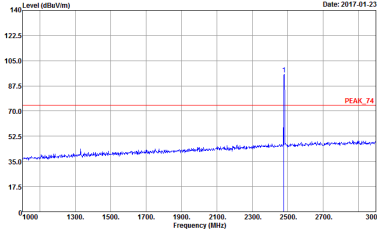

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 3</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 3</p></div>





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 1</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 662707-01 Mode : 1</p>

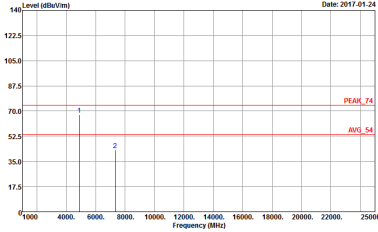
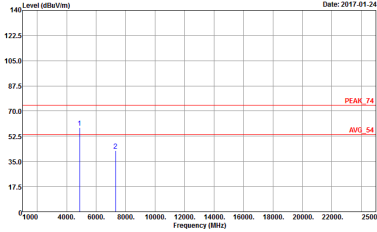


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 2</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 662707-01 Mode : 2</p>



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 3</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 662707-01 Mode : 3</p>

**Emission below 1GHz**
**2.4GHz BT (LF)**

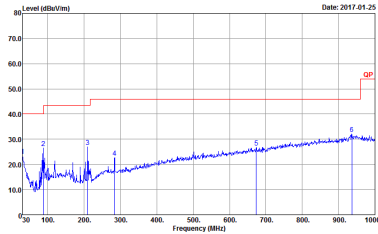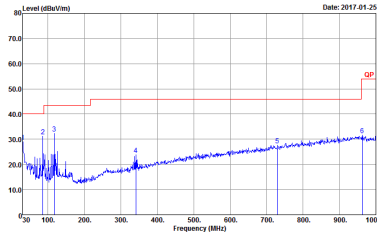BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
<b>QP / Peak</b>	 <p>Site : 03CH12-HY Condition : QP 3m BILOG_6111D_37059 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 37</p>	 <p>Site : 03CH12-HY Condition : QP 3m BILOG_6111D_37059 VERTICAL Detector : Peak Project : 662707-01 Mode : 37</p>









&lt;EUT with Ant. 2&gt;

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

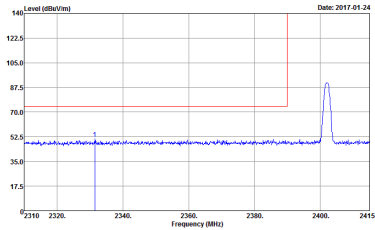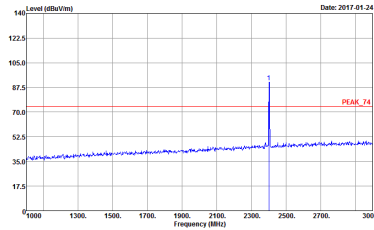BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 19</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 19</p>

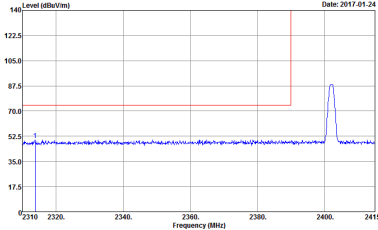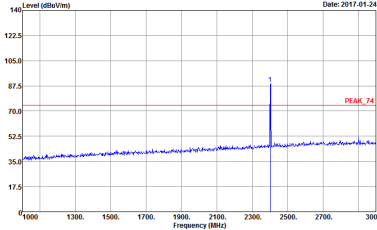

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_RE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 19</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 19</p>

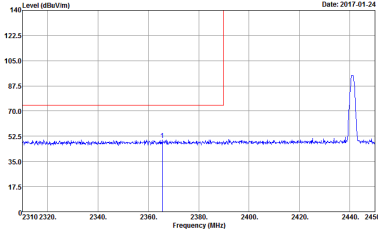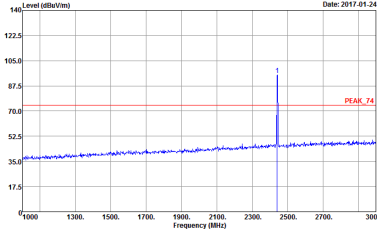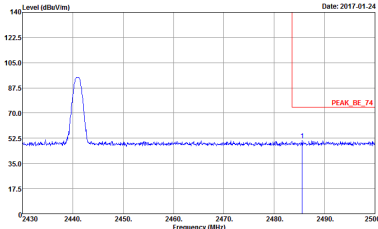

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 20</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 20</p>
	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 : 20</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-24</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-24</p>
	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-24</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-24</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 Date: 2017-01-24</p></div>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 21</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz YBW:3000.000KHz SWT:Auto Project : Peak Mode : 662707-01 21</p>





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

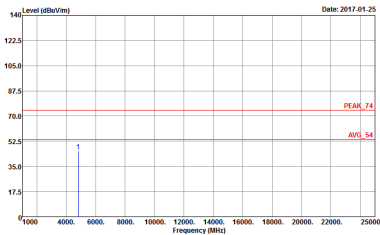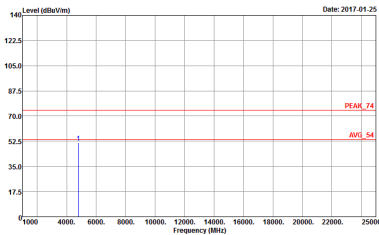BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK 74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 19</p>	 <p>Site : 03CH12-HY Condition : PEAK 74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 662707-01 Mode : 19</p>

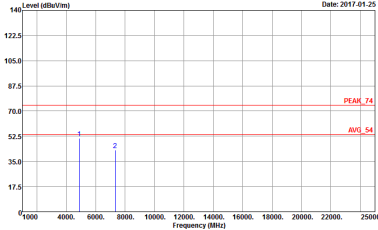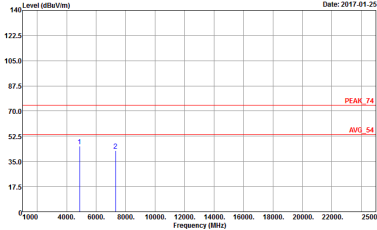

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 20</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 662707-01 Mode : 20</p>







BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 662707-01 Mode : 21</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 662707-01 Mode : 21</p>



Emission below 1GHz

2.4GHz BT (LF)

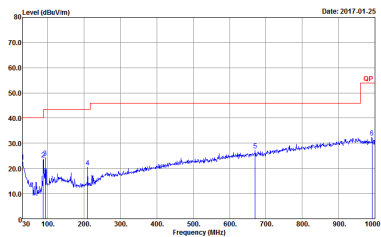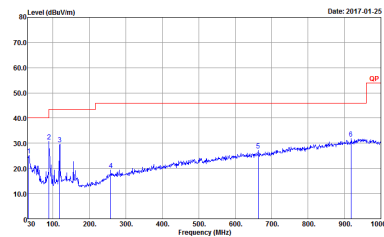BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
2	Horizontal	Vertical
QP / Peak	 <p>Site: 03CH12-HY Condition: QP-3m BILOG, 6111D_37059 HORIZONTAL Detector: Peak Project: 662707-01 Mode: 39 Date: 2017-01-25</p>	 <p>Site: 03CH12-HY Condition: QP-3m BILOG, 6111D_37059 VERTICAL Detector: Peak Project: 662707-01 Mode: 39 Date: 2017-01-25</p>