

S

T

S

L

A

B



## FCC TEST REPORT

Report No: STS1712117W01

Issued for

ShenZhen JinliTong Technology Co.,Ltd

Kangmai Industrial Zone,B building,F/3,Fuming village,  
Guanlan town,longhua,Shenzhen, China

<b>Product Name:</b>	2.4GHz Digital video Baby Monitor
<b>Brand Name:</b>	JLT
<b>Model Name:</b>	JLT-8036 RX
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	2AHYXJLT-8036RX
<b>Test Standard:</b>	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.  
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION**

**Applicant's name :** ShenZhen JinliTong Technology Co.,Ltd

**Address :** Kangmai Industrial Zone,B building,F/3,Fuming village, Guanlan town,longhua,Shenzhen, China

**Manufacture's Name :** ShenZhen JinliTong Technology Co.,Ltd

**Address :** Kangmai Industrial Zone,B building,F/3,Fuming village, Guanlan town,longhua,Shenzhen, China

**Product description**

**Product Name .....** 2.4GHz Digital video Baby Monitor

**Brand Name .....** JLT

**Model Name .....** JLT-8036 RX

**Series Model .....** N/A

**Test Standards.....** FCC Part15.249

**Test procedure :** ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test :**

**Date of performance of tests :** 14 Dec. 2017 ~25 Dec. 2017

**Date of Issue :** 26 Dec. 2017

**Test Result :** **Pass**

**Testing Engineer :**

*Sean She*

(Sean she)

**Technical Manager :**

*Hakim. Hou*

(Hakim.hou)

**Authorized Signatory :**

*Vita Li*

(Vita Li)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3. EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
<b>4. BANDWIDTH TEST</b>	<b>29</b>
4.2 TEST SETUP	29
4.3 EUT OPERATION CONDITIONS	29
4.4 TEST RESULTS	30
<b>5. ANTENNA REQUIREMENT</b>	<b>32</b>
5.1 STANDARD REQUIREMENT	32
5.2 EUT ANTENNA	32
<b>APPENDIX- PHOTOS OF TEST SETUP</b>	<b>33</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	26 Dec. 2017	STS1712117W01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Psss	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.205	Radiated Band Edge Emission	Pass	
15.249	20dB Bandwidth	Pass	

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013



## 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.71\text{dB}$
4	Spurious emissions,conducted	$\pm 0.63\text{dB}$
5	All emissions,radiated (9KHz-30MHz)	$\pm 3.02\text{dB}$
6	All emissions,radiated (30MHz-200MHz)	$\pm 3.80\text{dB}$
7	All emissions,radiated (200MHz-1000MHz)	$\pm 3.97\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name	2.4GHz Digital video Baby Monitor	
Trade Name	JLT	
Model Name	JLT-8036 RX	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a 2.4GHz Digital video Baby Monitor	
	Operation Frequency:	2410.875-2471.625MHz
	Modulation Type:	FSK
	Antenna Designation:	External antenna
	Antenna Gain(Peak):	1.0 dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Adapter	Input: AC100-240V, 0.2A, 50-60 Hz Output: DC 5V, 1A	
Battery	Rated Voltage: 3.7V Charge Limit:4.2V capacity :900mAh	
Hardware version number	1.0	
Software version number	1.0	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2410.875	11	2444.625
02	2414.250	12	2448.000
03	2417.625	13	2451.375
04	2421.000	14	2454.750
05	2424.375	15	2458.125
06	2427.750	16	2461.500
07	2431.125	17	2464.875
08	2434.500	18	2468.250
09	2437.875	19	2471.625
10	2441.250	--	--

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	JLT	JLT-8036 RX	External antenna	N/A	1.0	Antenna







## 2.2 DESCRIPTION OF TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data/Modulation
Mode 1	TX CH01	1 MHz/FSK
Mode 2	TX CH10	1 MHz/FSK
Mode 3	TX CH19	1 MHz/FSK

Note:

(1) All above mode have been measurement, only worst data was reported.

(2) We have be tested for all avaialbe U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V,50/60Hz is shown in the report


For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX


### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

#### Radiated Spurious Emission Test



#### Conducted Emission Test

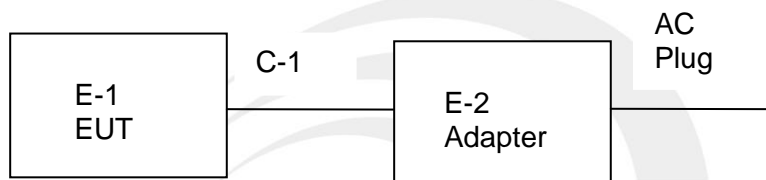



## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Adapter	N/A	LY006SPS-050100UH	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	DC Power Cable	N/A	120cm	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESW	101535	2017.06.01	2018.05.31
Bilog Antenna	TESEQ	CBL6111D	34678	2017.03.24	2018.03.23
Horn Antenna	Schwarzbeck	BBHA 9120D (1201)	9120D-1343	2017.03.06	2018.03.05
Operational Manual Passive Loop (9K--30MHz)	ETS	6512	00165355	2017.03.06	2018.03.05
Pre-mpifier (0.1M-3GHz)	EM	EM330	60538	2017.03.12	2018.03.11
PreAmplifier	Agilent	8449B	60538	2017.10.15	2018.10.14
USB RF power sensor	DARE	RPR3006W	15I00041SNO0 3	2017.10.15	2018.10.14
Semi-anechoic chamber	Changling	966	N/A	2017.10.15	2018.10.14

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
conduction Cable	EM	C01	N/A	2017.03.12	2018.03.11
Temperature & Humidity	Mieo	HH660	N/A	2017.10.15	2018.10.14



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

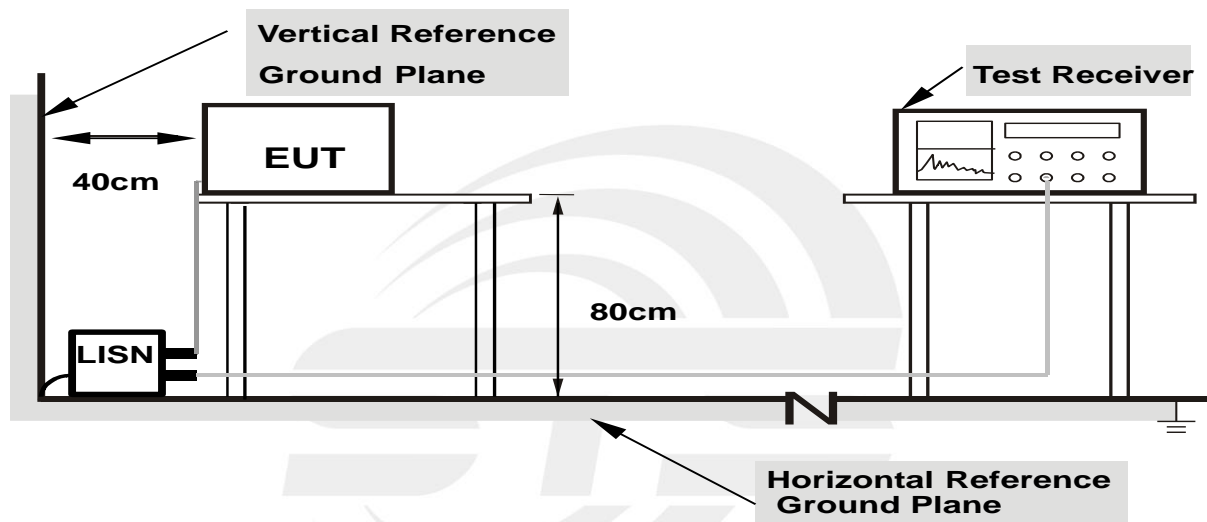

**Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 3.1.5 TEST RESULTS


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1500	35.74	9.79	45.53	66.00	-20.47	QP
0.1500	3.75	9.79	13.54	56.00	-42.46	AVG
0.2020	32.30	9.79	42.09	63.53	-21.44	QP
0.2020	1.29	9.79	11.08	53.53	-42.45	AVG
0.6060	24.73	9.93	34.66	56.00	-21.34	QP
0.6060	-0.32	9.93	9.61	46.00	-36.39	AVG
0.9980	19.48	9.80	29.28	56.00	-26.72	QP
0.9980	-1.77	9.80	8.03	46.00	-37.97	AVG
3.4380	13.49	9.82	23.31	56.00	-32.69	QP
3.4380	-3.01	9.82	6.81	46.00	-39.19	AVG
16.0260	20.79	10.28	31.07	60.00	-28.93	QP
16.0260	-1.36	10.28	8.92	50.00	-41.08	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

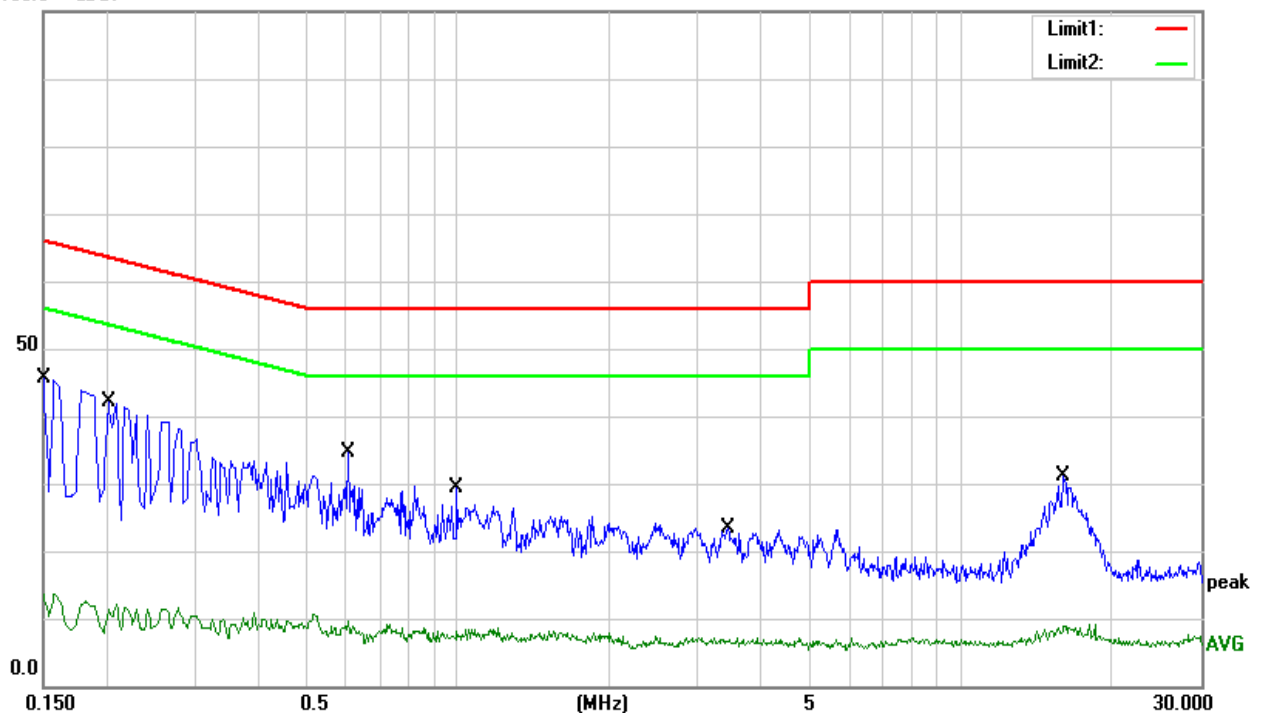




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1580	35.39	9.77	45.16	65.57	-20.41	QP
0.1580	3.72	9.77	13.49	55.57	-42.08	AVG
0.2300	30.45	9.99	40.44	62.45	-22.01	QP
0.2300	0.85	9.99	10.84	52.45	-41.61	AVG
0.4060	25.18	10.06	35.24	57.73	-22.49	QP
0.4060	1.35	10.06	11.41	47.73	-36.32	AVG
0.8620	20.51	9.83	30.34	56.00	-25.66	QP
0.8620	-0.96	9.83	8.87	46.00	-37.13	AVG
2.3020	12.83	9.89	22.72	56.00	-33.28	QP
2.3020	-4.19	9.89	5.70	46.00	-40.30	AVG
16.0380	22.07	10.15	32.22	60.00	-27.78	QP
16.0380	-2.33	10.15	7.82	50.00	-42.18	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

100.0 dBuV

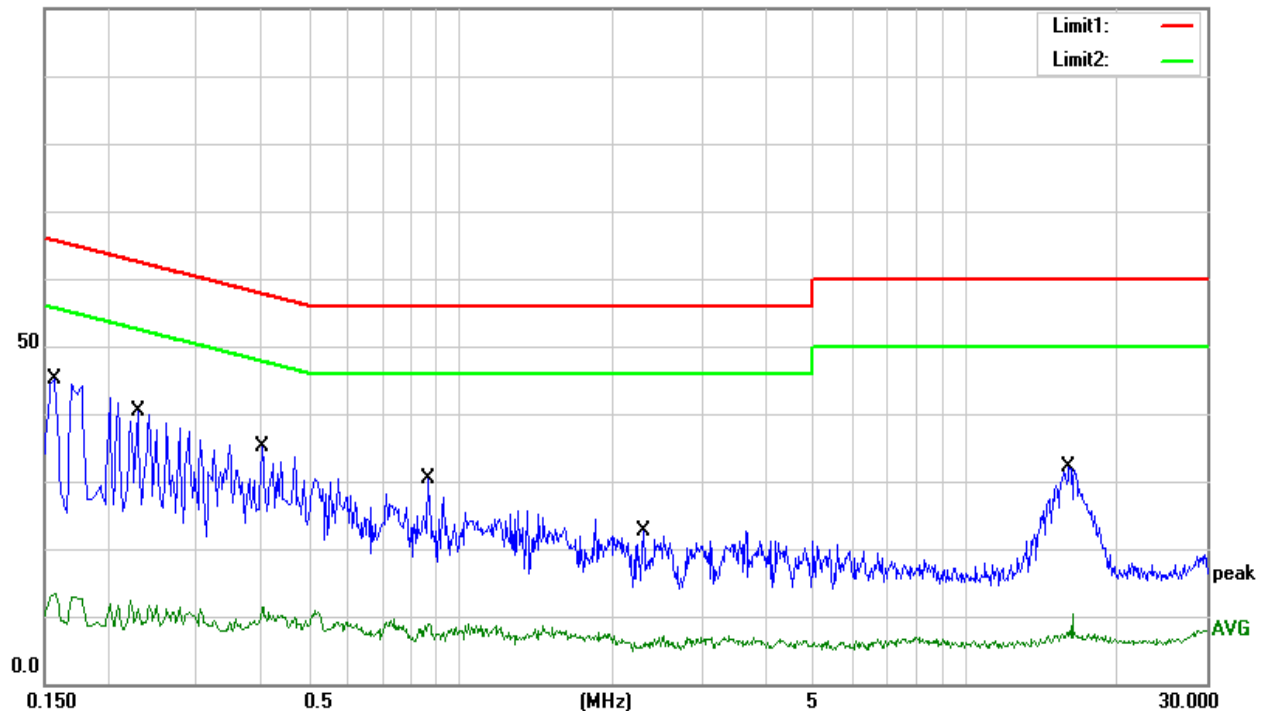





### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE


- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
  - The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
  - The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
  - The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
  - All readings are peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading complies with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
  - All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value complies with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axes. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

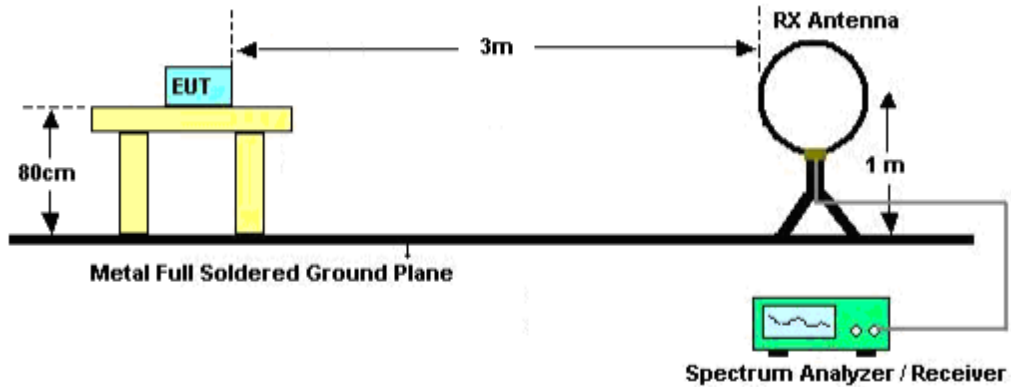

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

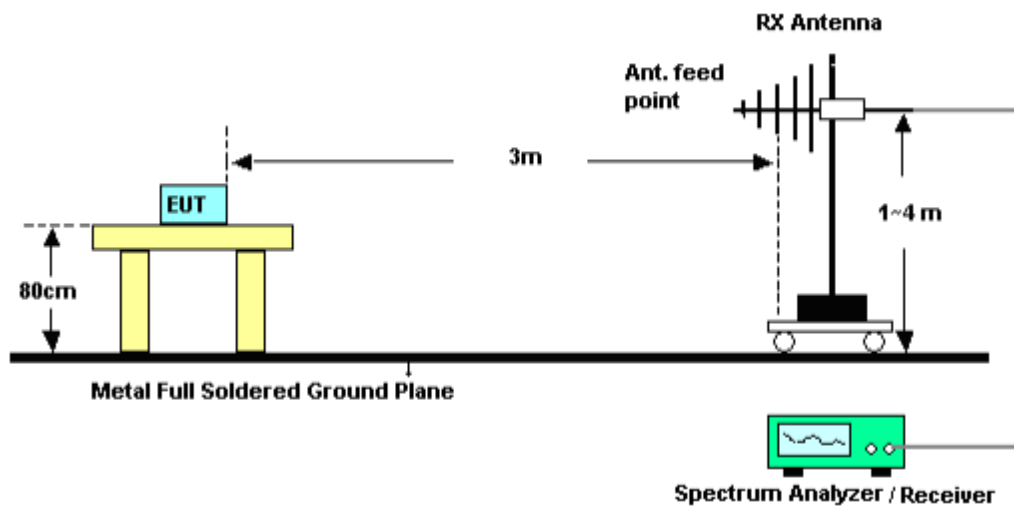

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

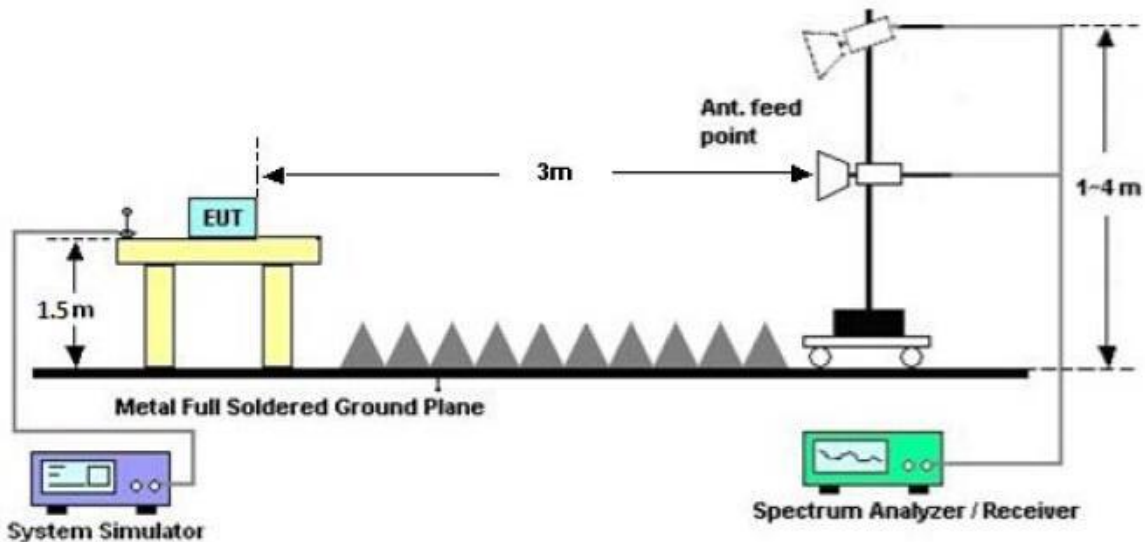



### 3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$





### 3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23 °C	Relative Humidity:	50%
Test Voltage:	DC 3.7V	Polarization:	---
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



## Between 30MHz – 1000 MHz Radiation Spurious


Temperature:	26 °C	Relative Humidity:	54%
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
51.1210	41.02	-21.80	19.22	40.00	-20.78	QP
68.8721	39.23	-24.13	15.10	40.00	-24.90	QP
119.8556	36.61	-17.70	18.91	43.50	-24.59	QP
135.9822	36.88	-17.52	19.36	43.50	-24.14	QP
216.0240	42.54	-19.37	23.17	46.00	-22.83	QP
576.6443	40.83	-6.69	34.14	46.00	-11.86	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor )–Limit

80.0 dBuV/m

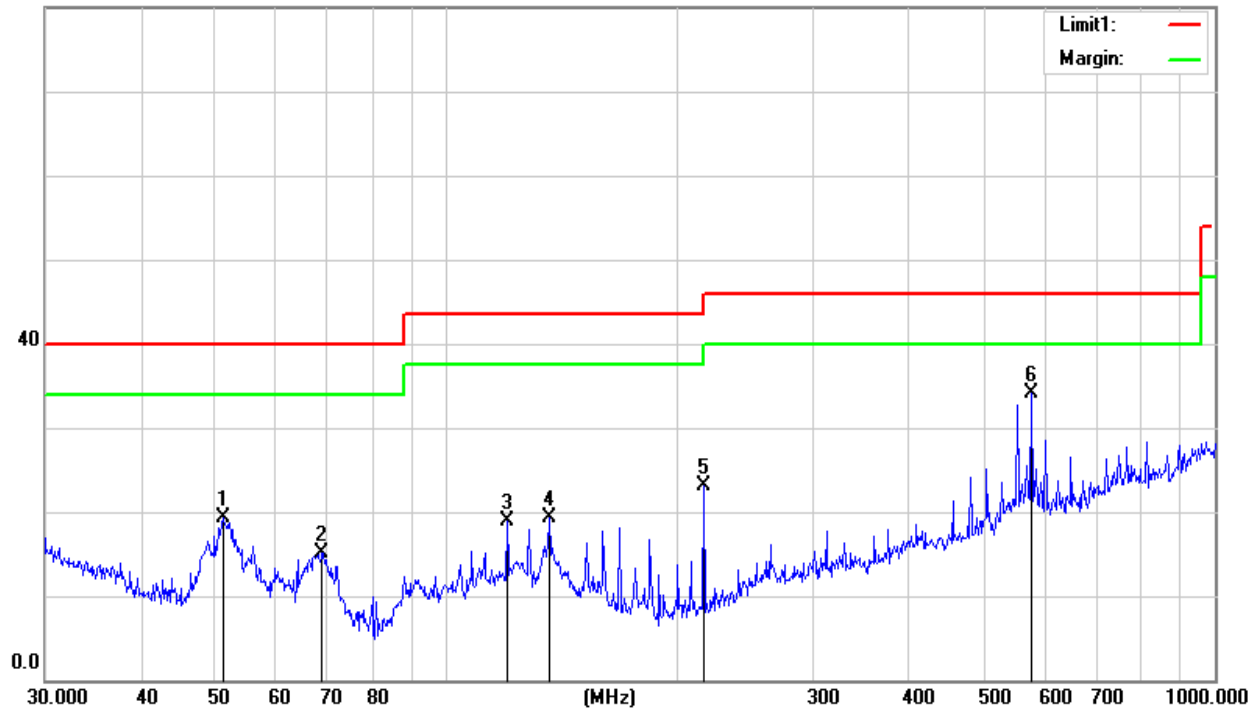




Temperature:	26 °C	Relative Humidity:	54%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Model 1 worst)		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
49.3594	42.38	-21.15	21.23	40.00	-18.77	QP
80.9275	51.12	-22.47	28.65	40.00	-11.35	QP
167.8243	48.34	-19.15	29.19	43.50	-14.31	QP
216.0240	46.80	-19.37	27.43	46.00	-18.57	QP
576.6443	35.17	-6.69	28.48	46.00	-17.52	QP
900.1473	36.84	-2.26	34.58	46.00	-11.42	QP

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result =Reading + Factor )–Limit

80.0 dBuV/m

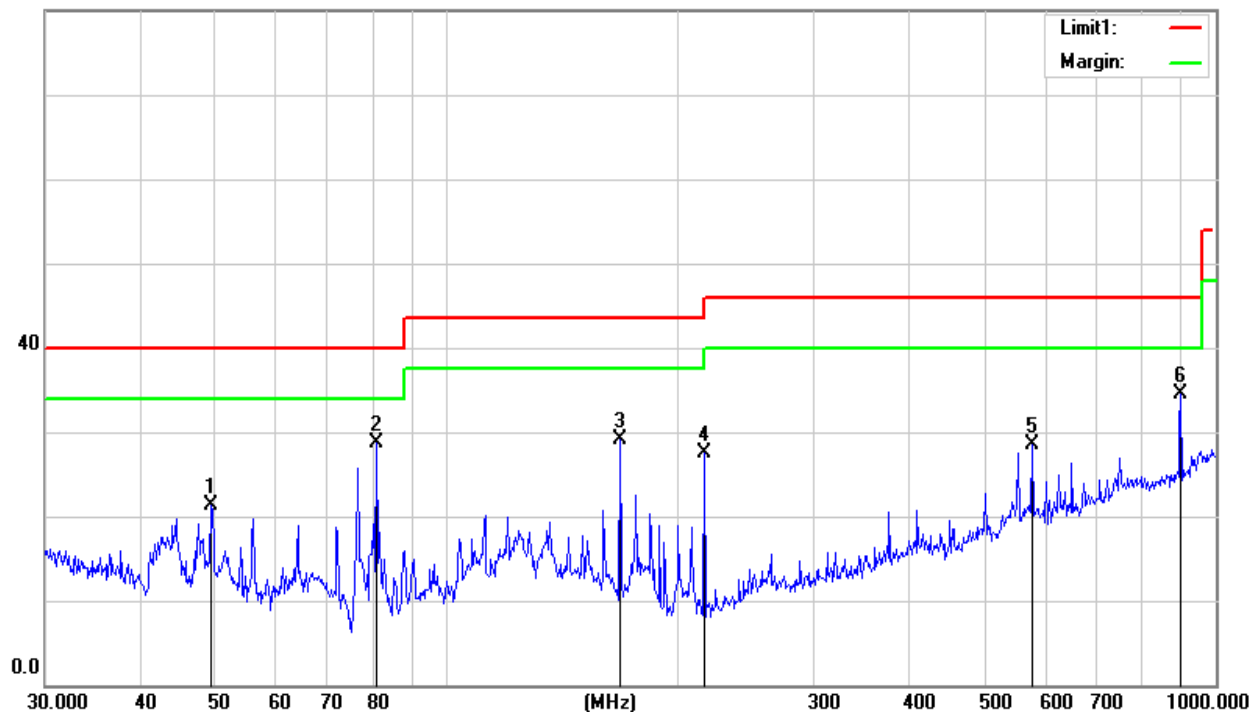



Fundamental frequency:

PK

Frequency (MHz)	Reading (dBμV/m)	Amplifier	Loss	Antenna Factor	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin(dB)	Polarization
	PEAK	(dB)	(dB)	(dB/m)		PEAK	PEAK	PEAK	
2410.875	93.056	44.40	6.03	27.60	-10.77	82.29	114	-31.71	Vertical
2410.875	92.782	44.40	6.03	27.60	-10.77	82.02	114	-31.98	Horizontal
2441.25	92.218	44.40	6.04	27.63	-10.73	81.49	114	-32.51	Vertical
2441.25	91.997	44.40	6.04	27.63	-10.73	81.27	114	-32.73	Horizontal
2471.625	91.730	44.40	6.06	27.66	-10.68	81.05	114	-32.95	Vertical
2471.625	90.315	44.40	6.06	27.66	-10.68	79.64	114	-34.36	Horizontal

AV

Frequency (MHz)	Reading (dBμV/m)	Amplifier	Loss	Antenna Factor	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin(dB)	Polarization
	AV	(dB)	(dB)	(dB/m)		AV	PEAK	PEAK	
2410.875	75.036	44.40	6.03	27.60	-10.77	64.27	94	-29.73	Vertical
2410.875	74.692	44.40	6.03	27.60	-10.77	63.93	94	-30.07	Horizontal
2441.25	74.160	44.40	6.04	27.63	-10.73	63.43	94	-30.57	Vertical
2441.25	73.955	44.40	6.04	27.63	-10.73	63.23	94	-30.77	Horizontal
2471.625	73.377	44.40	6.06	27.66	-10.68	62.70	94	-31.30	Vertical
2471.625	72.242	44.40	6.06	27.66	-10.68	61.57	94	-32.43	Horizontal

Note: RBW>20BW; VBW=3xRBW





## Above 1G Radiation Spurious

Frequency	Reading	Amplifier	Loss	Antenna	Corrected	Emission	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	Factor	Factor	Level	(dBμV/m)	(dB)	Type	
Low Channel (2410.875 MHz)										
3264.76	49.02	44.70	6.70	28.20	-9.80	39.22	74.00	-34.78	PK	Vertical
3264.76	39.00	44.70	6.70	28.20	-9.80	29.20	54.00	-24.80	AV	Vertical
3264.74	48.16	44.70	6.70	28.20	-9.80	38.36	74.00	-35.64	PK	Horizontal
3264.74	38.69	44.70	6.70	28.20	-9.80	28.89	54.00	-25.11	AV	Horizontal
4821.35	59.53	44.20	9.04	31.60	-3.56	55.97	74.00	-18.03	PK	Vertical
4821.35	39.38	44.20	9.04	31.60	-3.56	35.82	54.00	-18.18	AV	Vertical
4821.43	59.55	44.20	9.04	31.60	-3.56	55.99	74.00	-18.01	PK	Horizontal
4821.43	39.36	44.20	9.04	31.60	-3.56	35.80	54.00	-18.20	AV	Horizontal
5359.60	46.28	44.20	9.86	32.00	-2.34	43.94	74.00	-30.06	PK	Vertical
5359.60	37.35	44.20	9.86	32.00	-2.34	35.01	54.00	-18.99	AV	Vertical
5359.71	46.34	44.20	9.86	32.00	-2.34	44.00	74.00	-30.00	PK	Horizontal
5359.71	37.55	44.20	9.86	32.00	-2.34	35.21	54.00	-18.79	AV	Horizontal
7232.94	51.69	43.50	11.40	35.50	3.40	55.09	74.00	-18.91	PK	Vertical
7232.94	32.71	43.50	11.40	35.50	3.40	36.11	54.00	-17.89	AV	Vertical
7232.76	50.91	43.50	11.40	35.50	3.40	54.31	74.00	-19.69	PK	Horizontal
7232.76	33.51	43.50	11.40	35.50	3.40	36.91	54.00	-17.09	AV	Horizontal
9743.78	40.07	43.60	14.30	39.50	10.20	50.27	74.00	-23.73	PK	Vertical
9743.78	30.45	43.60	14.30	39.50	10.20	40.65	54.00	-13.35	AV	Vertical
9743.15	40.18	43.60	14.30	39.50	10.20	50.38	74.00	-23.62	PK	Horizontal
9743.15	30.93	43.60	14.30	39.50	10.20	41.13	54.00	-12.87	AV	Horizontal



Frequency	Reading	Amplifier	Loss	Antenna	Corrected	Emission	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	Factor	Factor	Level	(dBμV/m)	(dB)	Type	
Middle Channel (2441.25 MHz)										
3264.85	48.35	44.70	6.70	28.20	-9.80	38.55	74.00	-35.45	PK	Vertical
3264.85	38.28	44.70	6.70	28.20	-9.80	28.48	54.00	-25.52	AV	Vertical
3264.69	48.97	44.70	6.70	28.20	-9.80	39.17	74.00	-34.83	PK	Horizontal
3264.69	38.29	44.70	6.70	28.20	-9.80	28.49	54.00	-25.51	AV	Horizontal
4882.39	59.51	44.20	9.04	31.60	-3.56	55.95	74.00	-18.05	PK	Vertical
4882.39	38.26	44.20	9.04	31.60	-3.56	34.70	54.00	-19.30	AV	Vertical
4882.51	59.12	44.20	9.04	31.60	-3.56	55.56	74.00	-18.44	PK	Horizontal
4882.51	38.98	44.20	9.04	31.60	-3.56	35.42	54.00	-18.58	AV	Horizontal
5359.78	45.37	44.20	9.86	32.00	-2.34	43.03	74.00	-30.97	PK	Vertical
5359.78	37.20	44.20	9.86	32.00	-2.34	34.86	54.00	-19.14	AV	Vertical
5359.78	46.13	44.20	9.86	32.00	-2.34	43.79	74.00	-30.21	PK	Horizontal
5359.78	38.46	44.20	9.86	32.00	-2.34	36.12	54.00	-17.88	AV	Horizontal
7323.89	51.70	43.50	11.40	35.50	3.40	55.10	74.00	-18.90	PK	Vertical
7323.89	33.97	43.50	11.40	35.50	3.40	37.37	54.00	-16.63	AV	Vertical
7323.79	51.64	43.50	11.40	35.50	3.40	55.04	74.00	-18.96	PK	Horizontal
7323.79	32.93	43.50	11.40	35.50	3.40	36.33	54.00	-17.67	AV	Horizontal
9765.84	40.63	43.60	14.30	39.50	10.20	50.83	74.00	-23.17	PK	Vertical
9765.84	30.36	43.60	14.30	39.50	10.20	40.56	54.00	-13.44	AV	Vertical
9765.18	40.06	43.60	14.30	39.50	10.20	50.26	74.00	-23.74	PK	Horizontal
9765.18	29.84	43.60	14.30	39.50	10.20	40.04	54.00	-13.96	AV	Horizontal



Frequency	Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
High Channel (2471.625 MHz)										
3264.67	48.93	44.70	6.70	28.20	-9.80	39.13	74.00	-34.87	PK	Vertical
3264.67	38.47	44.70	6.70	28.20	-9.80	28.67	54.00	-25.33	AV	Vertical
3264.76	48.79	44.70	6.70	28.20	-9.80	38.99	74.00	-35.01	PK	Horizontal
3264.76	37.92	44.70	6.70	28.20	-9.80	28.12	54.00	-25.88	AV	Horizontal
4943.55	58.57	44.20	9.04	31.60	-3.56	55.01	74.00	-18.99	PK	Vertical
4943.55	38.74	44.20	9.04	31.60	-3.56	35.18	54.00	-18.82	AV	Vertical
4943.43	58.45	44.20	9.04	31.60	-3.56	54.89	74.00	-19.11	PK	Horizontal
4943.43	38.36	44.20	9.04	31.60	-3.56	34.80	54.00	-19.20	AV	Horizontal
5359.66	46.32	44.20	9.86	32.00	-2.34	43.98	74.00	-30.02	PK	Vertical
5359.66	37.45	44.20	9.86	32.00	-2.34	35.11	54.00	-18.89	AV	Vertical
5359.62	45.66	44.20	9.86	32.00	-2.34	43.32	74.00	-30.68	PK	Horizontal
5359.62	37.07	44.20	9.86	32.00	-2.34	34.73	54.00	-19.27	AV	Horizontal
7414.70	51.39	43.50	11.40	35.50	3.40	54.79	74.00	-19.21	PK	Vertical
7414.70	33.48	43.50	11.40	35.50	3.40	36.88	54.00	-17.12	AV	Vertical
7414.71	51.25	43.50	11.40	35.50	3.40	54.65	74.00	-19.35	PK	Horizontal
7414.71	33.66	43.50	11.40	35.50	3.40	37.06	54.00	-16.94	AV	Horizontal
9886.90	39.79	43.60	14.30	39.50	10.20	49.99	74.00	-24.01	PK	Vertical
9886.90	30.04	43.60	14.30	39.50	10.20	40.24	54.00	-13.76	AV	Vertical
9886.04	40.41	43.60	14.30	39.50	10.20	50.61	74.00	-23.39	PK	Horizontal
9886.04	29.94	43.60	14.30	39.50	10.20	40.14	54.00	-13.86	AV	Horizontal

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



(Radiation Band edge)

Frequency	Reading	Amplifier	Loss	Antenna	Corrected	Emission	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	Factor	Factor	Level	(dBμV/m)	(dB)	Type	
FSK										
2400.00	67.85	43.80	4.91	25.90	-12.99	54.86	74	-19.14	PK	Vertical
2400.00	54.14	43.80	4.91	25.90	-12.99	41.15	54	-12.85	AV	Vertical
2400.00	69.15	43.80	4.91	25.90	-12.99	56.16	74	-17.84	PK	Horizontal
2400.00	52.42	43.80	4.91	25.90	-12.99	39.43	54	-14.57	AV	Horizontal
2483.50	70.23	43.80	5.12	25.90	-12.78	57.45	74	-16.55	PK	Vertical
2483.50	53.23	43.80	5.12	25.90	-12.78	40.45	54	-13.55	AV	Vertical
2483.50	70.28	43.80	5.12	25.90	-12.78	57.50	74	-16.50	PK	Horizontal
2483.50	52.70	43.80	5.12	25.90	-12.78	39.92	54	-14.08	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz, high measurement frequencies is range from 2483.5 to 2500 MHz.

Only show the worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.



#### 4. BANDWIDTH TEST

##### 4.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW  $\geq$  RBW, Sweep time = Auto.

##### 4.2 TEST SETUP



##### 4.3 EUT OPERATION CONDITIONS

TX mode.






## 4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC 3.7V		


Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	99% Bandwidth (MHz)
CH01	2410.875	3.707	3.4275
CH10	2441.25	3.764	3.4534
CH19	2471.625	3.710	3.4273

## The Lowest Channel:2410.875MHz

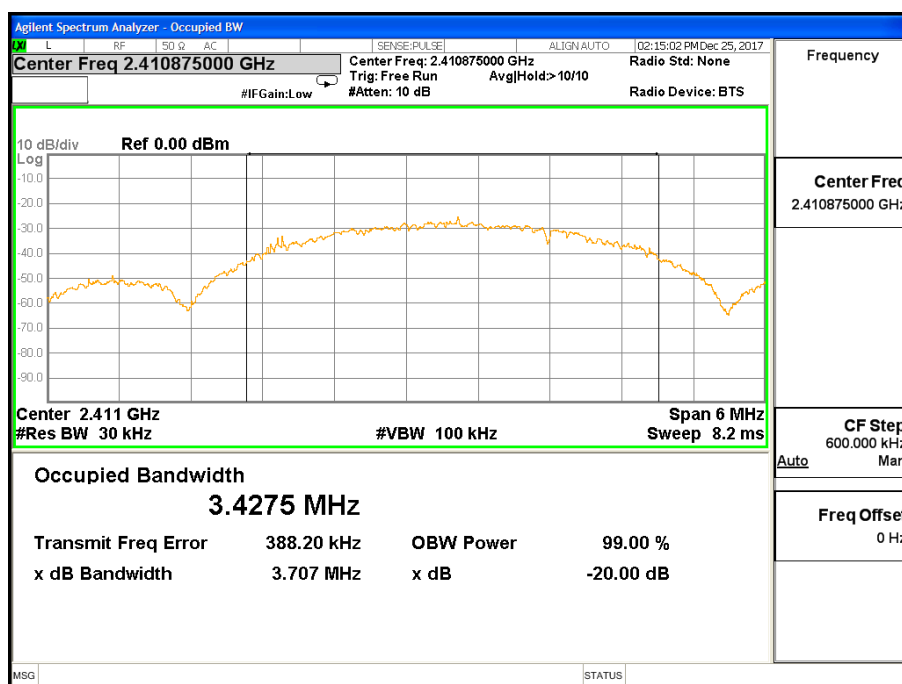




## The Middle Channel: 2441.25MHz

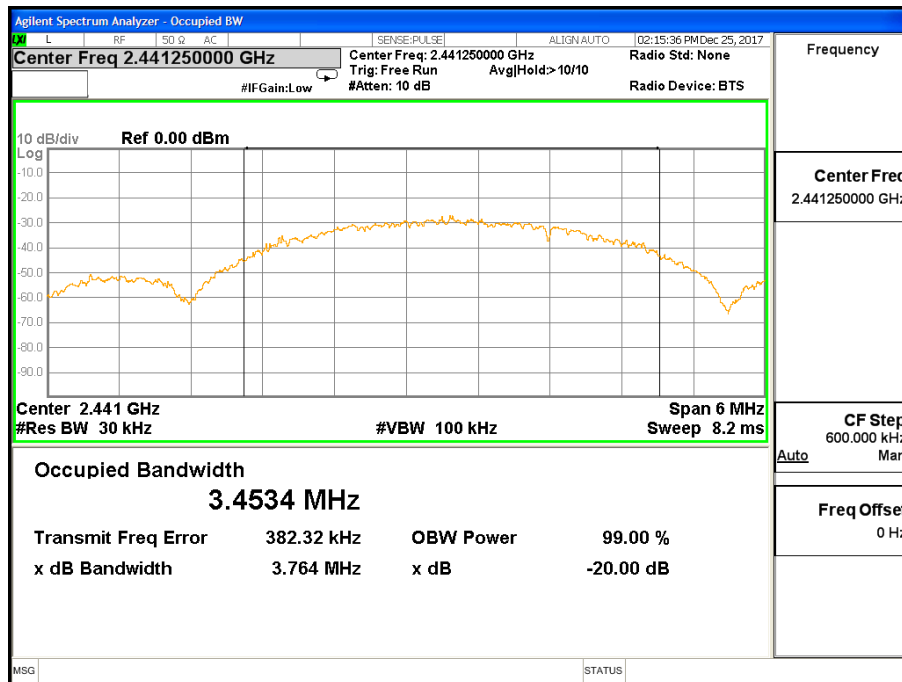

## The High Channel: 2471.625MHz

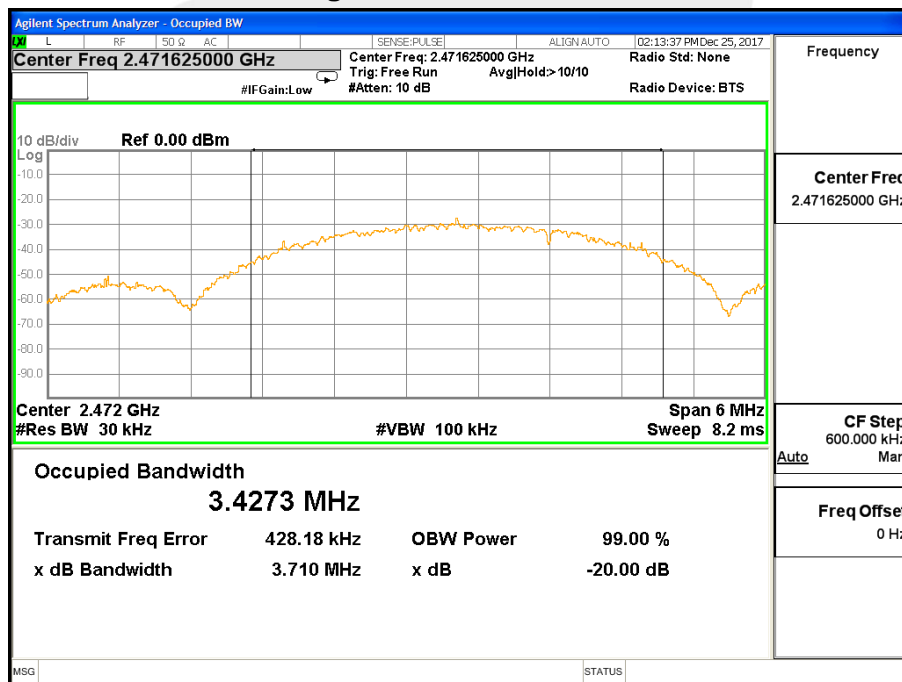



## 5. ANTENNA REQUIREMENT

### 5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 5.2 EUT ANTENNA


The EUT antenna is External Antenna. It conforms to the standard requirements.





## APPENDIX- PHOTOS OF TEST SETUP

### Radiated Measurement Photos

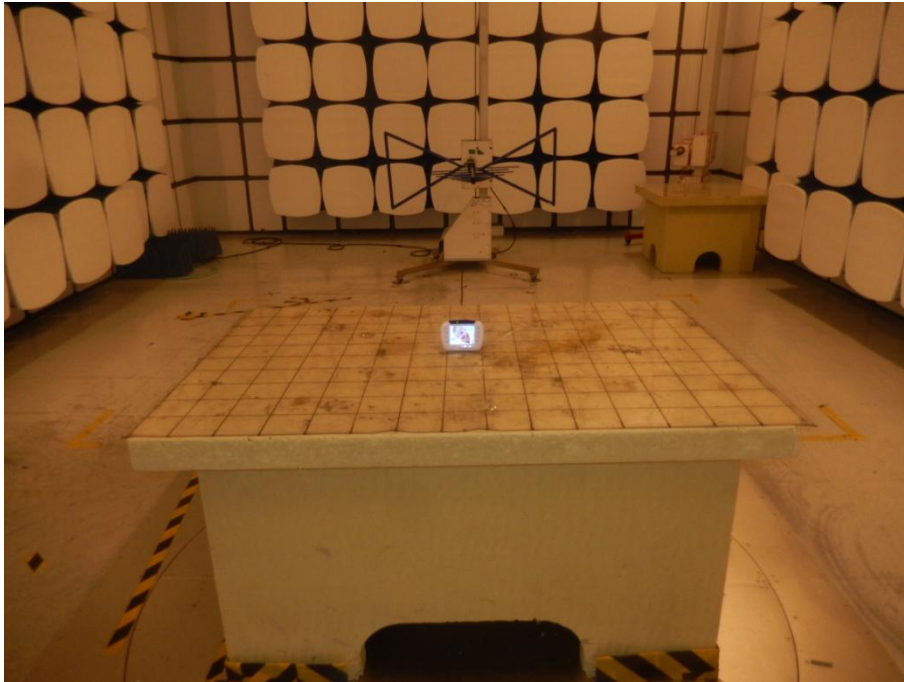

### Conducted Measurement Photos



\*\*\*\*\*END OF THE REPORT\*\*\*\*\*