

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological

Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555 Report No.: GZEM181100255701

Fax: +86 (0) 20 82075059 Page: 1 of 103

Email: ee.guangzhou@sgs.com

TEST REPORT

Application No.: GZEM1811002557CR

Applicant: Guangzhou Taiji Electronic Co.,Ltd

Address of Applicant: Floor 25, Everbright Bank Building, 689 Tianhe North, Guangzhou,

Guangdong China

Manufacturer:The same as ApplicantAddress of Manufacturer:The same as ApplicantFactory:The same as ApplicantAddress of Factory:The same as Applicant

Equipment Under Test (EUT):

EUT Name: Mobile Nail Printer

Model No.: FM-NP1801V, FM-NP1802X ¤

Please refer to section 2 of this report which indicates which model was

actually tested and which were electrically identical.

Trade Mark: O'2NAILS, Nailla, STYLEMATE, FULLMATE, ARTPRO NAIL

Standard(s): 47 CFR Part 15, Subpart C 15.247

Date of Receipt: 2018-11-06

Date of Test: 2018-11-12 to 2018-11-28

Date of Issue: 2018-12-13

Test Result: Pass*



Kobe Jian Lab Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If any. The Company's sole responsibility is to its Client and this document does not expense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:*To check the authenticity of testing inspection report & certificate, page contact us at telephone: 88-759 8307 1443.

**Attention:*To check the authenticity of testing inspection report & certificate, page contact us at telephone: 88-759 8307 1443.

| No.18/Nathu Rask Sciented Park, Gureghto Euromic & Technology Devisioner District, Garagetro, Chine 510663 1 (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 1 (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: GZEM181100255701

Page: 2 of 103

Revision Record								
Version Chapter Date Modifier Remark								
01		2018-12-13		Original				

Authorized for issue by:			
Tested By	Curry Wu	2018-11-12 to 2018-11-28	
	Curry_Wu /Project Engineer	Date	
Checked By	Ridge Lin	2018-12-13	
	Ricky_Liu /Reviewer	Date	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.

In the Company of the Company of the Company of the Company of the Terms-and-Conditions and Terms-and-Conditions.

In the Company of the Company of the Company of the Terms-and-Conditions.

In the Company of the Company of the Company of the Terms-and-Conditions.

In the Company of the Compan

or email: CN: Occheck@sa_com (N: 18 Kartu Rod, Somitch Pad, Gampton Commit & Technology Development Dethicl, Gampton, Chine 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075068 sgs.china@sgs.com



Report No.: GZEM181100255701

3 of 103 Page:

Test Summary 2

Radio Spectrum Technical Requirement							
Item	Standard	Method	Requirement	Result			
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass			

Radio Spectrum Matt	Radio Spectrum Matter Part								
Item	Standard	Method	Requirement	Result					
Conducted Emissions at AC Power Line (150kHz- 30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass					
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass					
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass					
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass					
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass					
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass					
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass①					
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass					

①: The EUT passed the Radiated Emissions which fall in the restricted bands test after modification.

¤ Declaration of EUT Family Grouping:

Model No.: FM-NP1801V, FM-NP1802X

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on the material of shell.

Therefore only one model FM-NP1802X was tested in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:*To check the authorities for testing inspection report **Certificate, please contact us at telephone (86-75) 8307 **243**.

No.136 Kedru Road, Sciented Park, Guergahou Economic & Technology Development District, Guergahou, China 510,6663 t (86–20) 82155555 f (88–20) 82075058 www.sgsgroup.com.cn

中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 1 (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 4 of 103

3 Contents

	Cove	au Dawa	Page
1	Cove	er Page	,1
2	Test	Summary	3
3	Cont	tents	
	0		
4		eral Information	
		Details of E.U.T.	
		Description of Support Units	
		Measurement Uncertainty	
		Test Location Test Facility	
		Deviation from Standards	
		Abnormalities from Standard Conditions	
_			
5	Equi	ipment List	10
6	Radi [,]	io Spectrum Technical Requirement	14
-			
	6.1 6.1.1	Antenna Requirement Test Requirement:	
	6.1.2	·	
_	-		
7		io Spectrum Matter Test Results	
		Conducted Emissions at AC Power Line (150kHz-30MHz)	
	7.1.1	·	
	7.1.2		
	7.1.3		
		Minimum 6dB Bandwidth	
	7.2.1 7.2.2		
	7.2.2	1 0	
		Conducted Peak Output Power	
	7.3.1	·	
	7.3.2	·	
	7.3.3		
	7.4	Power Spectrum Density	23
	7.4.1	·	
	7.4.2		
	7.4.3		
		Conducted Band Edges Measurement	
	7.5.1	·	
	7.5.2 7.5.3		
		Measurement Procedure and Data	
	1.0	Constitution Openious Enlissions	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not except experts to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alreation, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone (86-755) 8307-443.



Report No.: GZEM181100255701

Page: 5 of 103

	7.6.1	E.U.T. Operation	27
	7.6.2	Test Setup Diagram	27
	7.6.3	Measurement Procedure and Data	27
	7.7 F	Radiated Emissions which fall in the restricted bands	28
	7.7.1	E.U.T. Operation	29
	7.7.2	Test Setup Diagram	29
	7.7.3	Measurement Procedure and Data	30
	7.8 F	Radiated Spurious Emissions	39
	7.8.1	E.U.T. Operation	40
	7.8.2	Test Setup Diagram	40
	7.8.3	Measurement Procedure and Data	4
8	Apper	ndix	58
	8.1 A	Appendix 15.247	58
	-	11	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-and



Report No.: GZEM181100255701

Page: 6 of 103

4 General Information

4.1 Details of E.U.T.

Power Supply: DC 5V 2A

Test Voltage: AC 120V 60Hz (Adaptor supply by SGS)
Cable: about 0.5m unscreened USB cable

Antenna Gain 0dBi

Antenna Type PCB Antenna

Channel Spacing 5MHz

Modulation Type 802.11b: DSSS (CCK, DQPSK, DBPSK)

802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Number of Channels 802.11b/g/n(HT20):11

802.11n(HT40):7

Operation Frequency 802.11b/g/n(HT20): 2412MHz to 2462MHz

802.11n(HT40): 2422MHz to 2452MHz

4.2 Description of Support Units

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

RF

No.	Item	Measurement Uncertainty
1	Radio Frequency	±5.5 x 10 ⁻⁸
2	Duty cycle	±0.57%
3	Occupied Bandwidth	±3%
4	RF Conducted power	±0.68dB
5	RF Power Density	±1.50dB
6	Conducted Spurious Emissions	±1.04dB
7	RF Radiated Power	±4.5dB (below 1GHz)
'	RF Radiated Power	±4.8dB (above 1GHz)
8	Redicted Spurious Emission Test	±4.5dB (30MHz-1GHz)
0	Radiated Spurious Emission Test	±4.8dB (1GHz-18GHz)
9	Temperature	±0.4°C
10	Humidity	±1.3%
11	Supply Voltages	±1.5%
12	Time	±3%



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx.and-Conditions.ferms-en-Documents.subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.ferms-en-Document.appx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed a particular to the transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30-days only.

|No.189 Karbu Pool, Sciented Park, Garagethou Economic & Technology Development District, Garagethou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 7 of 103

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory, 198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-o-Occument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authorities of testing inspection report & certificate, please contact us at tolephone: 88-753)83071443



Report No.: GZEM181100255701

Page: 8 of 103

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● NVLAP (Lab Code: 200611-0)

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● CNAS (Lab Code: L0167)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

● FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

◆FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

● Industry Canada (Registration No.: 4620B-1)

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

● VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction is used defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-lest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307-1443,

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307-1443,

No.18 Kezhu Razt, Sointech Part, Gampthou Extremic & Technology Development Detrict, Gampthou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075068 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 9 of 103

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

The EUT passed the Radiated Emissions which fall in the restricted bands test after modification.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-o-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authoriticity of testing inspection report Accorditicate, please contact us at telephone: (86-755) 8307 2443.



Report No.: GZEM181100255701

Page: 10 of 103

Equipment List 5

Conducted Emissions at AC Power Line (150kHz-30MHz)							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
Shielding Room	Zhong Yu	8m x 3m x 3.8m	EMC0306	N/A	N/A		
Two-Line V-Netwok	R&S	ENV216	EMC0118	2018-01-19	2019-01-18		
LISN	R&S	ENV216	EMC2135	2018-09-21	2019-09-20		
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2018-11-19	2019-11-18		
Coaxial Cable	HangTianXing	2m	EMC0107	2017-07-23	2019-07-22		
Voltage Probe	SGS	N/A	EMC0106	2018-04-04	2020-04-03		
Conical Metal Housing	SGS-EMC	N/A	EMC0167	2018-04-19	2020-04-18		
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A		

Minimum 6dB Bandwidth							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2018-11-19	2019-11-18		
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03		
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A		

Conducted Peak Output Power							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2018-11-19	2019-11-18		
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03		
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A		

Power Spectrum Density							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2018-11-19	2019-11-18		
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03		
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307:443, **Attention:**To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307:443,

No. 196 Kedru Road, Solented Park, Gungdhou Economic & Technology Development District, Gungdhou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn

中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 1 (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 11 of 103

Conducted Band Edges Measurement							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
MXA Signal Analyzer	AgilentTechnologies	N9020A	SEM004-10	2018-03-10	2019-03-09		
ESG Vector Signal Generator	Keysight	E4438C	SEM006-03	2018-04-10	2019-04-10		
EXG Analog Signal Generator	AgilentTechnologies	N5171B	SEM006-04	2017-07-26	2020-07-25		
Power Meter	AgilentTechnologies	U2021XA_Ch2	SEM009-02	2018-09-20	2019-09-19		
Power Meter	AgilentTechnologies	U2021XA_Ch3	SEM009-03	2018-09-20	2019-09-19		
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2018-11-19	2019-11-18		
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03		
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A		

Conducted Spurious Emissions									
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date				
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2018-11-19	2019-11-18				
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03				
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the suthenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 *443,

No. 196 Kedru Road, Solented Park, Gungdhou Economic & Technology Development District, Gungdhou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号

Member of the SGS Group (SGS SA)



Report No.: GZEM181100255701

Page: 12 of 103

Radiated Emissions which fall in the restricted bands									
Equipment	ment Manufacturer		Inventory No	Cal Date	Cal Due Date				
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18				
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18				
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30				
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07				
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07				
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03				
Horn Antenna 1GHz- 18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08				
1GHz-26.5 GHz Pre- Amplifier	Agilent	8449B EMC0521		2018-01-08	2019-01-07				
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31				
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2018-11-19	2019-11-18				
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23				
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18				
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07				
10m Semi-Anechoic Chamber	I FIS		EMC0530	2017-06-18	2019-06-18				
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28				
MXE EMI Receiver	Keysight	N9038A	EMC2139	2018-11-19	2019-11-18				
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2018-11-19	2019-11-18				
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9168	SEM003-18	2016-06-29	2019-06-28				
Test Software E3 Audix		Ver.6.120110a	GZE100-61	N/A	N/A				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the suthenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 *443,

or armail: CN, Docchieck@sgs,com
No.18 Kedu Rad, Sciented Part, Gangdrou Economic & Technology Development Distric, Gangdrou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgs:group.com.cn



Report No.: GZEM181100255701

Page: 13 of 103

Radiated Spurious Emissions									
Equipment	Equipment Manufacturer		Inventory No	Cal Date	Cal Due Date				
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18				
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18				
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30				
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07				
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07				
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03				
Horn Antenna 1GHz- 18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08				
1GHz-26.5 GHz Pre- Amplifier	Adilent		EMC0521	2018-01-08	2019-01-07				
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31				
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2018-11-19	2019-11-18				
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23				
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18				
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07				
10m Semi-Anechoic Chamber	I FIS		EMC0530	2017-06-18	2019-06-18				
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28				
MXE EMI Receiver	Keysight	N9038A	EMC2139	2018-11-19	2019-11-18				
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2018-11-19	2019-11-18				
Trilog Broadband Antenna 30MHz-1GHz	Trilog Broadband SCHWARZBECKME		SEM003-18	2016-06-29	2019-06-28				
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A				

General used equipment									
Equipment	Equipment Manufacturer		Inventory No	Cal Date	Cal Due Date				
DMM	Fluke	73	EMC0006	2018-07-20	2019-07-19				
DMM	Fluke	73	EMC0007	2018-07-19	2019-07-18				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the suthenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 *443,

No. 196 Kedru Road, Solented Park, Gungdhou Economic & Technology Development District, Gungdhou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 14 of 103

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthribrized alteration, forgety or fabsification of the content of appearance of this document is unsimilar under offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report **Sertification report **Certificate, please contact us at tolephone: (86-755)8307-44.



Report No.: GZEM181100255701

Page: 15 of 103

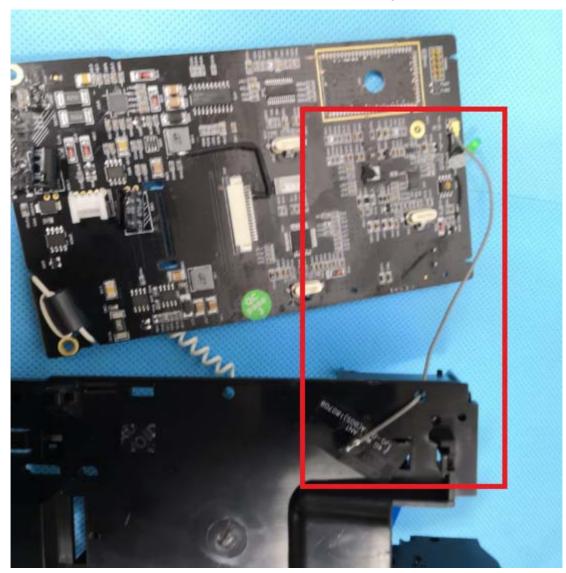

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Conditions/Terms-and-Conditions/Conditions/Terms-and-Conditions/Co

No.198 Kadu Road, Sointed Park, Gangdrou Extreme & Technology Development District, Gangdrou, Crise 510663 t (86–20) 82155555 f (88–20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 t (86–20) 82155555 f (88–20) 82075068 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 16 of 103

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Francisco (AALL-)	Conducted	d limit(dBµV)				
Frequency of emission(MHz)	Quasi-peak	Average				
0.15-0.5	66 to 56*	56 to 46*				
0.5-5	56	46				
5-30	60	50				
*Decreases with the logarithm of the frequency.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terma-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-o-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authoriticity of testing inspection report Accordinate, please contact us at telephone: (86-755) 8307 1443.

|No.189 Kadu Road, Sointed Park, Camptou Economic & Technology Development District, Gampthou, Crise 510663 t (86-20) 82155555 f (88-20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (88-20) 82075068 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 17 of 103

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.3 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data


rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst

case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

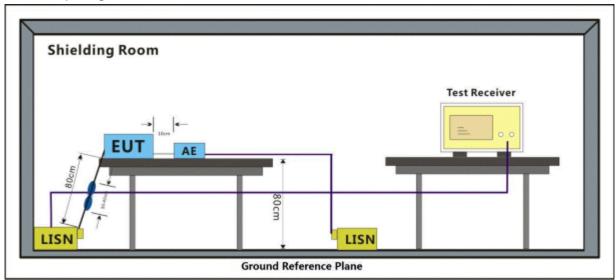

7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction is used therein. Any holder of this document, aspx: advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excensive particle particles of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report -4 certificate, please contact us at telephone: (86-755) 8307:443.


Attention:To check the authenticity of testing inspection report -4 certificate, please contact us at telephone: (86-755) 8307:443.



Report No.: GZEM181100255701

Page: 18 of 103

Mode:a; Line:Live Line

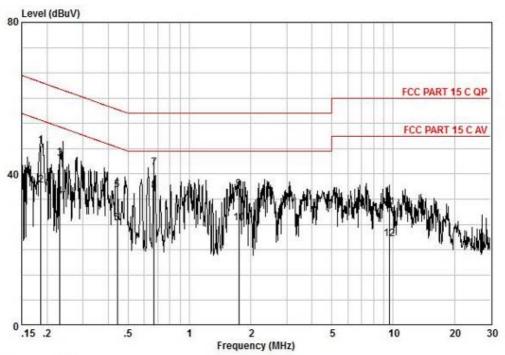

Pol	LIVE
No	
Model	

Frequency MHz 0,19	read level dBuV 37,76	Cable Loss dB 0,10	LISN Factor dB 9,58	Measured level dBuV 47,44	Limit Line dBuV 64,20	Over limit dB -16,75	Remark QP
0,19	27,31	0,10	9,58	36,99	54,20	-17,20	AVERAGE
0,23	34.21	0.12	9,62	43,95	62,39	-18,44	QP
0,23	24,35	0,12	9,62	34,09	52,39	-18,30	AVERAGE
0,44	25,91	0,19	9,65	35,74	57,02	-21,28	QP
0,44	17,16	0,19	9,65	26,99	47,02	-20,03	AVERAGE
0.67	31.74	0,24	9,61	41,60	56,00	-14,40	QP
0,67	25,75	0,24	9,61	35,61	46,00	-10,39	AVERAGE
1,74	25,96	0,35	9,61	35,93	56,00	-20,07	QP
1.74	17.05	0,35	9,61	27,02	46,00	-18,98	AVERAGE
9,60	21,00	0,61	9,64	31,24	60,00	-28,76	QP
9,60	12,55	0,61	9,64	22,79	50,00	-27,21	AVERAGE



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions/Interms-and-Conditions-and-Conditions/Interms-and-Conditions-and-Condi


|No.138 Nachu Nout, Sciented Part, Garagetou Extremic & Technology Development District, Garagetou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 19 of 103

Mode:a; Line:Neutral Line

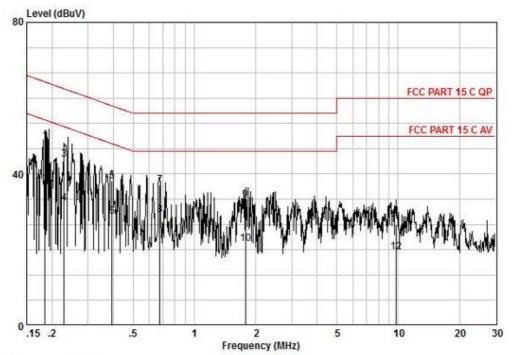

Po1	: NEUTRAL
No	3
Model	

Frequency MHz 0,18	read level dBuV 38,99	Cable Loss dB 0,10	LISN Factor dB 9,53	Measured level dBuV 48,62	Limit Line dBuV 64,28	Over limit dB -15,66	Remark QP
0,18	27,36	0,10	9,53	36,99	54,28	-17,29	AVERAGE
0.23	34,17	0,12	9,58	43,87	62,48	-18,61	QP
0,23	22,46	0,12	9,58	32,16	52,48	-20,32	AVERAGE
0.39	28,50	0,17	9,56	38,23	57,99	-19,76	QP
0.39	19,00	0,17	9,56	28,73	47,99	-19,26	AVERAGE
0.68	27,28	0,24	9,59	37,11	56,00	-18,89	QP
0,68	19,34	0,24	9,59	29,17	46,00	-16,83	AVERAGE
1.78	23,18	0,36	9,53	33,07	56,00	-22,93	QP
1.78	11.71	0,36	9,53	21,60	46,00	-24,40	AVERAGE
9,76	16,30	0,60	9,64	26,54	60,00	-33,46	QP
9,76	9,11	0,60	9,64	19,35	50,00	-30,65	AVERAGE



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions/Indi



Report No.: GZEM181100255701

Page: 20 of 103

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥500 kHz

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 61.1 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst

case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.2.2 Test Setup Diagram

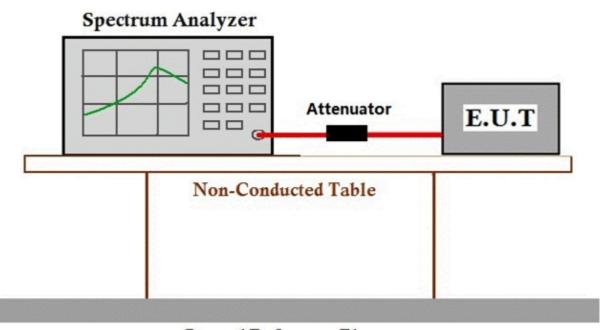

Ground Reference Plane

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions-for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditi



Report No.: GZEM181100255701

Page: 21 of 103

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
	1 for ≥50 hopping channels
902-928	0.25 for 25≤ hopping channels <50
	1 for digital modulation
	1 for ≥75 non-overlapping hopping channels
2400-2483.5	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-o-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not expense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & correlitates, please contact us at telephone (86-755) 8307 2443.



Report No.: GZEM181100255701

Page: 22 of 103

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 61.1 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst

case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

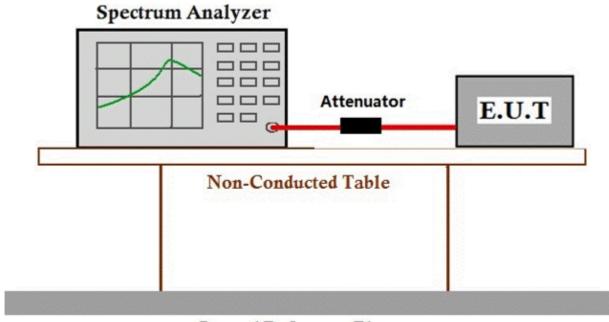

Ground Reference Plane

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:*To check the authorities for testing inspection report **Certificate, please contact us at telephone (86-75) 8307 **243**.



Report No.: GZEM181100255701

Page: 23 of 103

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit: ≤8dBm in any 3 kHz band during any time interval of continuous

transmission

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 61.1 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst

case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

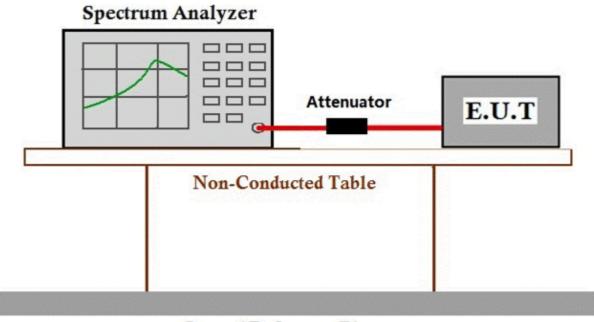

Ground Reference Plane

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-for-lectronic format documents.subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Condit



Report No.: GZEM181100255701

Page: 24 of 103

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attentions.aspx.attention



Report No.: GZEM181100255701

25 of 103 Page:

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 61.1 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data


rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst

case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

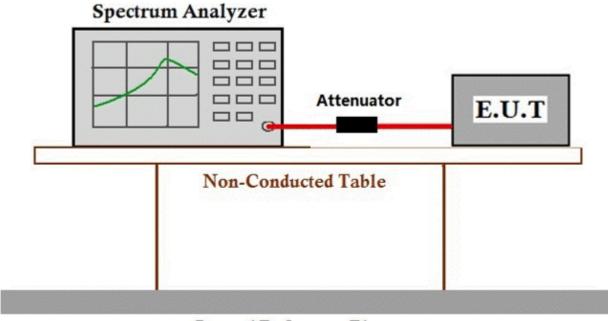

Ground Reference Plane

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:*To check the authorities for testing inspection report **Certificate, please contact us at telephone (86-75) 8307 **243**.

No. 198 Keatru Road, Sciented Park, Guangstrou Economic & Technology Development District, Guangstrou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号

邮编: 510663 1 (86-20) 82155555 1 (86-20) 82075068 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 26 of 103

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In ar

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format document subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemarification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document control experted parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgety or falsification of the content appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated it results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authoriticity of testing inspection report ** certificate, please contact us at telephone: (86-755) 8307-444.

Attention: To check the authoriticity of testing inspection report ** certificate, please contact us at telephone: (86-755) 8307-444.



Report No.: GZEM181100255701

27 of 103 Page:

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 61.1 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst

case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.6.2 Test Setup Diagram

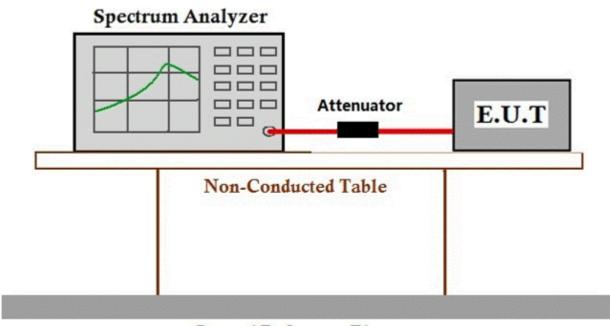

Ground Reference Plane

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:*To check the authorities for testing inspection report **Certificate, please contact us at telephone (86-75) 8307 **243**.

No. 198 Keatru Road, Sciented Park, Guangstrou Economic & Technology Development District, Guangstrou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn

中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 1 (86-20) 82155555 1 (86-20) 82075068 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 28 of 103

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's socie responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attentions: To check the authorities of the string inspection report **Corrificate, please contact us at tolephone: 88-753)8307:443



Report No.: GZEM181100255701

Page: 29 of 103

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.9 °C Humidity: 60 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst


case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.7.2 Test Setup Diagram

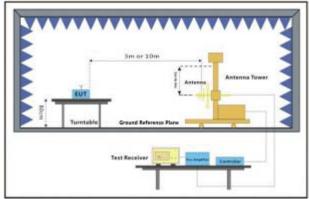

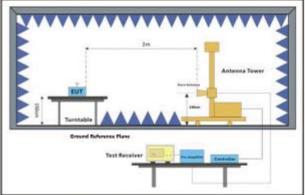

30MHz-1GHz

Above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authoritiesty of testing inspection report & certificate, please contact us at telephone (86-75) 8307 2443.



Report No.: GZEM181100255701

Page: 30 of 103

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's socie responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attentions: To check the authorities of the string inspection report **Corrificate, please contact us at tolephone: 88-753)8307:443



Report No.: GZEM181100255701

Page: 31 of 103

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:Low

		ReadA	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	34.64	26.25	5.03	37.44	28.48	54.00	-25.52	HORIZONTAL	Average
2	2310.000	47.54	26.25	5.03	37.44	41.38	74.00	-32.62	HORIZONTAL	Peak
3	2390.000	40.33	26.43	4.88	37.42	34.22	54.00	-19.78	HORIZONTAL	Average
4	2390.000	55.23	26.43	4.88	37.42	49.12	74.00	-24.88	HORIZONTAL	Peak
5	2483.500	33.55	26.58	5.23	37.40	27.96	54.00	-26.04	HORIZONTAL	Average
6	2483.500	49.66	26.58	5.23	37.40	44.07	74.00	-29.93	HORIZONTAL	Peak
7	2500.000	30.01	26.60	4.95	37.39	24.17	54.00	-29.83	HORIZONTAL	Average
8	2500.000	47.45	26.60	4.95	37.39	41.61	74.00	-32.39	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:Low

	Freq	Level	Antenna Factor				Limit Line		Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	-	
1	2310.000	35.81	26.25	5.03	37.44	29.65	54.00	-24.35	VERTICAL	Average
2	2310.000	49.91	26.25	5.03	37.44	43.75	74.00	-30.25	VERTICAL	Peak
3	2390.000	37.35	26.43	4.88	37.42	31.24	54.00	-22.76	VERTICAL	Average
4	2390.000	51.51	26.43	4.88	37.42	45.40	74.00	-28.60	VERTICAL	Peak
5	2483.500	33.13	26.58	5.23	37.40	27.54	54.00	-26.46	VERTICAL	Average
6	2483.500	49.60	26.58	5.23	37.40	44.01	74.00	-29.99	VERTICAL	Peak
7	2500.000	34.91	26.60	4.95	37.39	29.07	54.00	-24.93	VERTICAL	Average
8	2500.000	48.89	26.60	4.95	37.39	43.05	74.00	-30.95	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C



Report No.: GZEM181100255701

Page: 32 of 103

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:High

		ReadA	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		•
1	2310.000	38.51	26.25	5.03	37.44	32.35	54.00	-21.65	HORIZONTAL	Average
2	2310.000	49.72	26.25	5.03	37.44	43.56	74.00	-30.44	HORIZONTAL	Peak
3	2390.000	37.16	26.43	4.88	37.42	31.05	54.00	-22.95	HORIZONTAL	Average
4	2390.000	53.85	26.43	4.88	37.42	47.74	74.00	-26.26	HORIZONTAL	Peak
5	2483.500	39.48	26.58	5.23	37.40	33.89	54.00	-20.11	HORIZONTAL	Average
6	2483.500	53.63	26.58	5.23	37.40	48.04	74.00	-25.96	HORIZONTAL	Peak
7	2500.000	38.60	26.60	4.95	37.39	32.76	54.00	-21.24	HORIZONTAL	Average
8	2500.000	52.75	26.60	4.95	37.39	46.91	74.00	-27.09	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:High

		Read/	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	35.11	26.25	5.03	37.44	28.95	54.00	-25.05	VERTICAL	Average
2	2310.000	47.44	26.25	5.03	37.44	41.28	74.00	-32.72	VERTICAL	Peak
3	2390.000	37.01	26.43	4.88	37.42	30.90	54.00	-23.10	VERTICAL	Average
4	2390.000	51.64	26.43	4.88	37.42	45.53	74.00	-28.47	VERTICAL	Peak
5	2483.500	37.83	26.58	5.23	37.40	32.24	54.00	-21.76	VERTICAL	Average
6	2483.500	52.48	26.58	5.23	37.40	46.89	74.00	-27.11	VERTICAL	Peak
7	2500.000	36.23	26.60	4.95	37.39	30.39	54.00	-23.61	VERTICAL	Average
8	2500.000	53.24	26.60	4.95	37.39	47.40	74.00	-26.60	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C



Report No.: GZEM181100255701

Page: 33 of 103

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	36.63	26.25	5.03	37.44	30.47	54.00	-23.53	HORIZONTAL	Average
2	2310.000	52.08	26.25	5.03	37.44	45.92	74.00	-28.08	HORIZONTAL	Peak
3	2390.000	47.62	26.43	4.88	37.42	41.51	54.00	-12.49	HORIZONTAL	Average
4	2390.000	65.90	26.43	4.88	37.42	59.79	74.00	-14.21	HORIZONTAL	Peak
5	2483.500	39.56	26.58	5.23	37.40	33.97	54.00	-20.03	HORIZONTAL	Average
6	2483.500	54.61	26.58	5.23	37.40	49.02	74.00	-24.98	HORIZONTAL	Peak
7	2500.000	39.01	26.60	4.95	37.39	33.17	54.00	-20.83	HORIZONTAL	Average
8	2500.000	51.15	26.60	4.95	37.39	45.31	74.00	-28.69	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:Low

					Cable Preamp		Limit Over			20 20
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	30.40	26.25	5.03	37.44	24.24	54.00	-29.76	VERTICAL	Average
2	2310.000	45.94	26.25	5.03	37.44	39.78	74.00	-34.22	VERTICAL	Peak
3	2390.000	44.38	26.43	4.88	37.42	38.27	54.00	-15.73	VERTICAL	Average
4	2390.000	55.90	26.43	4.88	37.42	49.79	74.00	-24.21	VERTICAL	Peak
5	2483.500	31.98	26.58	5.23	37.40	26.39	54.00	-27.61	VERTICAL	Average
6	2483.500	49.34	26.58	5.23	37.40	43.75	74.00	-30.25	VERTICAL	Peak
7	2500.000	31.78	26.60	4.95	37.39	25.94	54.00	-28.06	VERTICAL	Average
8	2500.000	45.33	26.60	4.95	37.39	39.49	74.00	-34.51	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sg.com/en/Terms-and-Conditions.spp and for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sg.com/en/Terms-and-Conditions/



Report No.: GZEM181100255701

Page: 34 of 103

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:High

		ReadA	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	34.49	26.25	5.03	37.44	28.33	54.00	-25.67	HORIZONTAL	Average
2	2310.000	47.42	26.25	5.03	37.44	41.26	74.00	-32.74	HORIZONTAL	Peak
3	2390.000	40.45	26.43	4.88	37.42	34.34	54.00	-19.66	HORIZONTAL	Average
4	2390.000	54.85	26.43	4.88	37.42	48.74	74.00	-25.26	HORIZONTAL	Peak
5	2483.500	50.58	26.58	5.23	37.40	44.99	54.00	-9.01	HORIZONTAL	Average
6	2483.500	62.48	26.58	5.23	37.40	56.89	74.00	-17.11	HORIZONTAL	Peak
7	2500.000	39.74	26.60	4.95	37.39	33.90	54.00	-20.10	HORIZONTAL	Average
8	2500.000	53.61	26.60	4.95	37.39	47.77	74.00	-26.23	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:High

				Cable Preamp						20 20
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	31.04	26.25	5.03	37.44	24.88	54.00	-29.12	VERTICAL	Average
2	2310.000	46.13	26.25	5.03	37.44	39.97	74.00	-34.03	VERTICAL	Peak
3	2390.000	35.70	26.43	4.88	37.42	29.59	54.00	-24.41	VERTICAL	Average
4	2390.000	49.86	26.43	4.88	37.42	43.75	74.00	-30.25	VERTICAL	Peak
5	2483.500	45.55	26.58	5.23	37.40	39.96	54.00	-14.04	VERTICAL	Average
6	2483.500	60.32	26.58	5.23	37.40	54.73	74.00	-19.27	VERTICAL	Peak
7	2500.000	39.31	26.60	4.95	37.39	33.47	54.00	-20.53	VERTICAL	Average
8	2500.000	52.83	26.60	4.95	37.39	46.99	74.00	-27.01	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C



Report No.: GZEM181100255701

Page: 35 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

		ReadAntenn Freq Level Facto			The state of the s		Limit			D
	rreq	rever	ractor	LOSS	ractor	revel	Line	Limit	POI/Phase	Kemark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	34.60	26.25	5.03	37.44	28.44	54.00	-25.56	HORIZONTAL	Average
2	2310.000	48.89	26.25	5.03	37.44	42.73	74.00	-31.27	HORIZONTAL	Peak
3	2390.000	48.87	26.43	4.88	37.42	42.76	54.00	-11.24	HORIZONTAL	Average
4	2390.000	67.75	26.43	4.88	37.42	61.64	74.00	-12.36	HORIZONTAL	Peak
5	2483.500	36.54	26.58	5.23	37.40	30.95	54.00	-23.05	HORIZONTAL	Average
6	2483.500	53.32	26.58	5.23	37.40	47.73	74.00	-26.27	HORIZONTAL	Peak
7	2500.000	35.12	26.60	4.95	37.39	29.28	54.00	-24.72	HORIZONTAL	Average
8	2500.000	50.43	26.60	4.95	37.39	44.59	74.00	-29.41	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

				Cable Preamp			Limit			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	32.76	26.25	5.03	37.44	26.60	54.00	-27.40	VERTICAL	Average
2	2310.000	47.94	26.25	5.03	37.44	41.78	74.00	-32.22	VERTICAL	Peak
3	2390.000	44.24	26.43	4.88	37.42	38.13	54.00	-15.87	VERTICAL	Average
4	2390.000	61.99	26.43	4.88	37.42	55.88	74.00	-18.12	VERTICAL	Peak
5	2483.500	36.52	26.58	5.23	37.40	30.93	54.00	-23.07	VERTICAL	Average
6	2483.500	53.30	26.58	5.23	37.40	47.71	74.00	-26.29	VERTICAL	Peak
7	2500.000	34.20	26.60	4.95	37.39	28.36	54.00	-25.64	VERTICAL	Average
8	2500.000	48.62	26.60	4.95	37.39	42.78	74.00	-31.22	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C



Report No.: GZEM181100255701

Page: 36 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

	Freq		Antenna Factor		A CONTRACT OF THE PARTY OF THE				Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	33.47	26.25	5.03	37.44	27.31	54.00	-26.69	HORIZONTAL	Average
2	2310.000	47.82	26.25	5.03	37.44	41.66	74.00	-32.34	HORIZONTAL	Peak
3	2390.000	38.85	26.43	4.88	37.42	32.74	54.00	-21.26	HORIZONTAL	Average
4	2390.000	55.48	26.43	4.88	37.42	49.37	74.00	-24.63	HORIZONTAL	Peak
5	2483.500	51.45	26.58	5.23	37.40	45.86	54.00	-8.14	HORIZONTAL	Average
6	2483.500	64.49	26.58	5.23	37.40	58.90	74.00	-15.10	HORIZONTAL	Peak
7	2500.000	38.79	26.60	4.95	37.39	32.95	54.00	-21.05	HORIZONTAL	Average
8	2500.000	53.16	26.60		37.39				HORIZONTAL	

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

		ReadAntenna					Limit Over			<u> </u>
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	-	
1	2310.000	31.14	26.25	5.03	37.44	24.98	54.00	-29.02	VERTICAL	Average
2	2310.000	47.04	26.25	5.03	37.44	40.88	74.00	-33.12	VERTICAL	Peak
3	2390.000	36.54	26.43	4.88	37.42	30.43	54.00	-23.57	VERTICAL	Average
4	2390.000	50.79	26.43	4.88	37.42	44.68	74.00	-29.32	VERTICAL	Peak
5	2483.500	50.25	26.58	5.23	37.40	44.66	54.00	-9.34	VERTICAL	Average
6	2483.500	62.48	26.58	5.23	37.40	56.89	74.00	-17.11	VERTICAL	Peak
7	2500.000	37.63	26.60	4.95	37.39	31.79	54.00	-22.21	VERTICAL	Average
8	2500.000	52.71	26.60	4.95	37.39	46.87	74.00	-27.13	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C



Report No.: GZEM181100255701

Page: 37 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

		Read/	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	33.25	26.25	5.03	37.44	27.09	54.00	-26.91	HORIZONTAL	Average
2	2310.000	48.97	26.25	5.03	37.44	42.81	74.00	-31.19	HORIZONTAL	Peak
3	2390.000	43.14	26.43	4.88	37.42	37.03	54.00	-16.97	HORIZONTAL	Average
4	2390.000	57.74	26.43	4.88	37.42	51.63	74.00	-22.37	HORIZONTAL	Peak
5	2483.500	37.95	26.58	5.23	37.40	32.36	54.00	-21.64	HORIZONTAL	Average
6	2483.500	53.00	26.58	5.23					HORIZONTAL	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
7	2500.000	37.77	26.60	4.95	37.39	31.93	54.00	-22.07	HORIZONTAL	Average
8	2500.000	50.59	26.60		37.39				HORIZONTAL	- 1 1 1 1 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq	Freq Level		ReadAntenna Level Factor					Limit Line			Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB				
1	2310.000	34.46	26.25	5.03	37.44	28.30	54.00	-25.70	VERTICAL	Average		
2	2310.000	48.23	26.25	5.03	37.44	42.07	74.00	-31.93	VERTICAL	Peak		
3	2390.000	41.33	26.43	4.88	37.42	35.22	54.00	-18.78	VERTICAL	Average		
4	2390.000	52.79	26.43	4.88	37.42	46.68	74.00	-27.32	VERTICAL	Peak		
5	2483.500	35.29	26.58	5.23	37.40	29.70	54.00	-24.30	VERTICAL	Average		
6	2483.500	52.93	26.58	5.23	37.40	47.34	74.00	-26.66	VERTICAL	Peak		
7	2500.000	34.66	26.60	4.95	37.39	28.82	54.00	-25.18	VERTICAL	Average		
8	2500.000	49.48	26.60	4.95	37.39	43.64	74.00	-30.36	VERTICAL	Peak		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents as a <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions/Terms-and-Conditions-And-C

or amail: CN. Docchack@sqs.com No.1% Kedu Road, Sointed Park, Gargetou Economic & Technology Development District, Gargetou, Crise 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 38 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

		ReadA	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dв	dB	dBuV/m	dBuV/m	dB		-
1	2310.000	33.66	26.25	5.03	37.44	27.50	54.00	-26.50	HORIZONTAL	Average
2	2310.000	47.74	26.25	5.03	37.44	41.58	74.00	-32.42	HORIZONTAL	Peak
3	2390.000	41.12	26.43	4.88	37.42	35.01	54.00	-18.99	HORIZONTAL	Average
4	2390.000	54.50	26.43	4.88	37.42	48.39	74.00	-25.61	HORIZONTAL	Peak
5	2483.500	41.65	26.58	5.23	37.40	36.06	54.00	-17.94	HORIZONTAL	Average
6	2483.500	57.20	26.58	5.23	37.40	51.61	74.00	-22.39	HORIZONTAL	Peak
7	2500.000	37.12	26.60	4.95	37.39	31.28	54.00	-22.72	HORIZONTAL	Average
8	2500.000	53.52	26.60	4.95	37.39	47.68	74.00	-26.32	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

		ReadAntenna					Limit			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	32.65	26.25	5.03	37.44	26.49	54.00	-27.51	VERTICAL	Average
2	2310.000	46.05	26.25	5.03	37.44	39.89	74.00	-34.11	VERTICAL	Peak
3	2390.000	37.32	26.43	4.88	37.42	31.21	54.00	-22.79	VERTICAL	Average
4	2390.000	51.08	26.43	4.88	37.42	44.97	74.00	-29.03	VERTICAL	Peak
5	2483.500	40.32	26.58	5.23	37.40	34.73	54.00	-19.27	VERTICAL	Average
6	2483.500	54.98	26.58	5.23	37.40	49.39	74.00	-24.61	VERTICAL	Peak
7	2500.000	37.72	26.60	4.95	37.39	31.88	54.00	-22.12	VERTICAL	Average
8	2500.000	52.16	26.60	4.95	37.39	46.32	74.00	-27.68	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or email: CN. Doccheck@sqs.com No.1% Kedu Road, Sointed Part, Guraghou Euromic & Technology Development District, Guraghou, China 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学域科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 39 of 103

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthribrized alteration, forgety or fabsification of the content of appearance of this document is unsimilar under offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testion report **Certificate, please contact use totelephone: (86-755)8307-44.

Attention: To check the authenticity of testion report **Certificate, please contact use totelephone: (86-755)8307-44.

or email: CN. Doccheck@sqs.com No.1% Kedu Road, Sointed Part, Guraghou Euromic & Technology Development District, Guraghou, China 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学域科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

40 of 103 Page:

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.9 °C Humidity: 60 % RH Atmospheric Pressure: 1020

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst


case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE


802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40).

Only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram

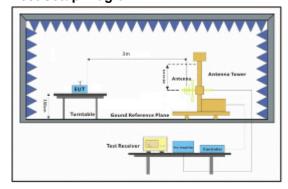

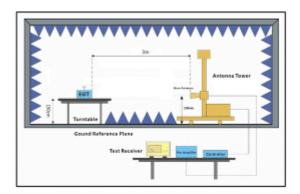

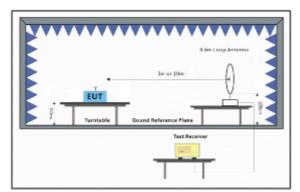



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authoritiesty of testing inspection report **Certificate, please contact us at telephone (86-75) 8307 ***443**.

No. 198 Keatru Road, Sciented Park, Guangstrou Economic & Technology Development District, Guangstrou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 41 of 103

7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:*To check the authoritiesty of testing inspection report **Certificate, please contact us at telephone: (86-755) 8307 **243**.

or email: CN_00cCheck(3:sa_com)
(No 18 Katu Max, Samitab Pan, Gampton Comonic & Technology Development District, Gampton, China 5 10,663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 42 of 103

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	32.864	22.76	12.29	0.16	22.26	12.95	40.00	-27.05	HORIZONTAL	QP
2	46.178	23.25	12.89	0.69	24.55	12.28	40.00	-27.72	HORIZONTAL	QP
3	180.649	29.23	12.67	1.34	28.09	15.15	43.50	-28.35	HORIZONTAL	QP
4	586.844	28.39	20.43	1.95	29.28	21.49	46.00	-24.51	HORIZONTAL	QP
5	810.265	28.12	22.80	2.76	28.62	25.06	46.00	-20.94	HORIZONTAL	QP
6	919.287	27.28	24.16	3.74	28.43	26.75	46.00	-19.25	HORIZONTAL	QP

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:Low

	ReadAntenna						Limit			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3801.333	29.46	29.01	7.89	36.92	29.44	54.00	-24.56	HORIZONTAL	Average
2	3801.333	45.31	29.01	7.89	36.92	45.29	74.00	-28.71	HORIZONTAL	Peak
3	4824.030	50.76	30.82	6.01	36.94	50.65	54.00	-3.35	HORIZONTAL	Average
4	4824.030	56.85	30.82	6.01	36.94	56.74	74.00	-17.26	HORIZONTAL	Peak
5	7236.122	29.96	35.55	7.35	36.93	35.93	54.00	-18.07	HORIZONTAL	Average
6	7236.122	44.18	35.55	7.35	36.93	50.15	74.00	-23.85	HORIZONTAL	Peak
7	8688.480	23.94	36.25	7.94	36.96	31.17	54.00	-22.83	HORIZONTAL	Average
8	8688.480	43.92	36.25	7.94	36.96	51.15	74.00	-22.85	HORIZONTAL	Peak
9	9648.257	29.87	37.54	8.18	37.08	38.51	54.00	-15.49	HORIZONTAL	Average
10	9648.257	45.53	37.54	8.18	37.08	54.17	74.00	-19.83	HORIZONTAL	Peak
11	12060.270	26.14	39.46	10.71	37.17	39.14	54.00	-14.86	HORIZONTAL	Average
12	12060.270	42.33	39.46	10.71	37.17	55.33	74.00	-18.67	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or email: CN. Doccheck包sas.com No.18 Kazbu Road, Sciented Park, Gungdhou Extremic & Technology Development Datrict, Gungdhou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学域科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 43 of 103

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	47.492	27.11	12.94	0.65	24.67	16.03	40.00	-23.97	VERTICAL	QP
2	101.644	28.70	9.71	0.85	27.19	12.07	43.50	-31.43	VERTICAL	QP
3	163.755	27.27	13.29	1.28	28.09	13.75	43.50	-29.75	VERTICAL	QP
4	543.274	30.38	19.23	2.17	29.70	22.08	46.00	-23.92	VERTICAL	QP
5	684.745	29.05	21.33	2.22	28.86	23.74	46.00	-22.26	VERTICAL	QP
6	890.728	29.07	23.92	2.87	28.01	27.85	46.00	-18.15	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:Low

	ReadA		Antenna	Cable	Preamp		Limit			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	-	
1	3141.145	33.12	27.90	5.65	37.02	29.65	54.00	-24.35	VERTICAL	Average
2	4823.910	50.19	30.82	6.01	36.94	50.08	54.00	-3.92	VERTICAL	Average
3	4823.910	56.00	30.82	6.01	36.94	55.89	74.00	-18.11	VERTICAL	Peak
4	6213.441	28.63	33.09	6.93	36.99	31.66	54.00	-22.34	VERTICAL	Average
5	6213.441	44.23	33.09	6.93	36.99	47.26	74.00	-26.74	VERTICAL	Peak
6	7236.038	32.42	35.55	7.35	36.93	38.39	54.00	-15.61	VERTICAL	Average
7	7236.038	45.23	35.55	7.35	36.93	51.20	74.00	-22.80	VERTICAL	Peak
8	9648.257	43.90	37.54	8.18	37.08	52.54	54.00	-1.46	VERTICAL	Average
9	9648.257	48.82	37.54	8.18	37.08	57.46	74.00	-16.54	VERTICAL	Peak
10	12060.610	28.04	39.46	10.71	37.17	41.04	54.00	-12.96	VERTICAL	Average
11	12060.610	41.37	39.46	10.71	37.17	54.37	74.00	-19.63	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or email: CN. Doccheck@sqs.com No.1% Kedu Road, Sointed Part, Guraghou Euromic & Technology Development District, Guraghou, China 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学域科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 44 of 103

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		-
1	3790.361	30.52	28.97	7.83	36.92	30.40	54.00	-23.60	HORIZONTAL	Average
2	3790.361	44.53	28.97	7.83	36.92	44.41	74.00	-29.59	HORIZONTAL	Peak
3	4884.043	49.86	30.95	6.86	36.95	50.72	54.00	-3.28	HORIZONTAL	Average
4	4884.043	54.20	30.95	6.86	36.95	55.06	74.00	-18.94	HORIZONTAL	Peak
5	5934.778	32.25	32.26	7.32	37.00	34.83	54.00	-19.17	HORIZONTAL	Average
6	5934.778	46.48	32.26	7.32	37.00	49.06	74.00	-24.94	HORIZONTAL	Peak
7	7326.945	31.92	35.74	7.39	36.92	38.13	54.00	-15.87	HORIZONTAL	Average
8	7326.945	43.37	35.74	7.39	36.92	49.58	74.00	-24.42	HORIZONTAL	Peak
9	9768.450	30.66	37.74	8.37	37.09	39.68	54.00	-14.32	HORIZONTAL	Average
10	9768.450	43.26	37.74	8.37	37.09	52.28	74.00	-21.72	HORIZONTAL	Peak
11	12210.250	26.79	39.21	10.98	37.06	39.92	54.00	-14.08	HORIZONTAL	Average
12	12210.250	41.06	39.21	10.98	37.06	54.19	74.00	-19.81	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:middle

		Read/	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	el Factor	or Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3801.333	31.85	29.01	7.89	36.92	31.83	54.00	-22.17	VERTICAL	Average
2	3801.333	45.38	29.01	7.89	36.92	45.36	74.00	-28.64	VERTICAL	Peak
3	4884.040	50.07	30.95	6.86	36.95	50.93	54.00	-3.07	VERTICAL	Average
4	4884.040	55.44	30.95	6.86	36.95	56.30	74.00	-17.70	VERTICAL	Peak
5	7326.806	28.21	35.74	7.39	36.92	34.42	54.00	-19.58	VERTICAL	Average
6	7326.806	44.41	35.74	7.39	36.92	50.62	74.00	-23.38	VERTICAL	Peak
7	8440.945	28.91	36.13	8.06	36.93	36.17	54.00	-17.83	VERTICAL	Average
8	8440.945	44.51	36.13	8.06	36.93	51.77	74.00	-22.23	VERTICAL	Peak
9	9768.603	27.35	37.74	8.37	37.09	36.37	54.00	-17.63	VERTICAL	Average
10	9768.603	44.79	37.74	8.37	37.09	53.81	74.00	-20.19	VERTICAL	Peak
11	12210.540	27.44	39.21	10.98	37.06	40.57	54.00	-13.43	VERTICAL	Average
12	12210.540	41.02	39.21	10.98	37.06	54.15	74.00	-19.85	VERTICAL	Peak



No. 196 Kedru Road, Solveted Park, Gungdhou Economic & Technology Development District, Gungdhou, China 51,0663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 45 of 103

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:High

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		-
1	3823.371	31.15	29.08	7.83	36.91	31.15	54.00	-22.85	HORIZONTAL	Average
2	3823.371	45.12	29.08	7.83	36.91	45.12	74.00	-28.88	HORIZONTAL	Peak
3	4924.721	49.22	31.01	7.49	36.95	50.77	54.00	-3.23	HORIZONTAL	Average
4	4924.721	51.50	31.01	7.49	36.95	53.05	74.00	-20.95	HORIZONTAL	Peak
5	7386.516	30.36	35.85	7.42	36.92	36.71	54.00	-17.29	HORIZONTAL	Average
6	7386.516	43.92	35.85	7.42	36.92	50.27	74.00	-23.73	HORIZONTAL	Peak
7	8738.852	28.22	36.30	7.98	36.96	35.54	54.00	-18.46	HORIZONTAL	Average
8	8738.852	44.26	36.30	7.98	36.96	51.58	74.00	-22.42	HORIZONTAL	Peak
9	9848.420	29.48	37.82	8.46	37.09	38.67	54.00	-15.33	HORIZONTAL	Average
10	9848.420	43.68	37.82	8.46	37.09	52.87	74.00	-21.13	HORIZONTAL	Peak
11	12310.850	25.84	39.03	11.10	36.97	39.00	54.00	-15.00	HORIZONTAL	Average
12	12310.850	40.13	39.03	11.10	36.97	53.29	74.00	-20.71	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:High

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3834.438	31.89	29.12	7.80	36.91	31.90	54.00	-22.10	VERTICAL	Average
2	3834.438	44.98	29.12	7.80	36.91	44.99	74.00	-29.01	VERTICAL	Peak
3	4924.721	49.43	31.01	7.49	36.95	50.98	54.00	-3.02	VERTICAL	Average
4	4924.721	54.32	31.01	7.49	36.95	55.87	74.00	-18.13	VERTICAL	Peak
5	7386.914	31.09	35.85	7.42	36.92	37.44	54.00	-16.56	VERTICAL	Average
6	7386.914	44.16	35.85	7.42	36.92	50.51	74.00	-23.49	VERTICAL	Peak
7	9047.272	30.67	36.57	8.29	37.02	38.51	54.00	-15.49	VERTICAL	Average
8	9047.272	44.30	36.57	8.29	37.02	52.14	74.00	-21.86	VERTICAL	Peak
9	9848.312	29.71	37.82	8.46	37.09	38.90	54.00	-15.10	VERTICAL	Average
10	9848.312	44.33	37.82	8.46	37.09	53.52	74.00	-20.48	VERTICAL	Peak
11	12310.220	27.29	39.03	11.10	36.97	40.45	54.00	-13.55	VERTICAL	Average
12	12310.220	41.15	39.03	11.10	36.97	54.31	74.00	-19.69	VERTICAL	Peak



No. 196 Kedru Road, Solveted Park, Gungdhou Economic & Technology Development District, Gungdhou, China 51,0663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 46 of 103

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	40.702	22.80	12.62	0.62	23.76	12.28	40.00	-27.72	HORIZONTAL	QP
2	65.803	24.88	11.30	0.67	25.42	11.43	40.00	-28.57	HORIZONTAL	QP
3	179.386	28.52	12.71	1.34	28.08	14.49	43.50	-29.01	HORIZONTAL	QP
4	541.373	28.87	19.15	2.19	29.73	20.48	46.00	-25.52	HORIZONTAL	QP
5	658.836	29.01	21.14	2.12	28.84	23.43	46.00	-22.57	HORIZONTAL	QP
6	893.857	29.23	23.95	2.86	27.97	28.07	46.00	-17.93	HORIZONTAL	QP

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:Low

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3495.691	32.90	27.90	5.93	36.95	29.78	54.00	-24.22	HORIZONTAL	Average
2	3495.691	46.63	27.90	5.93	36.95	43.51	74.00	-30.49	HORIZONTAL	Peak
3	4824.962	45.77	30.82	6.01	36.94	45.66	54.00	-8.34	HORIZONTAL	Average
4	4824.962	50.50	30.82	6.01	36.94	50.39	74.00	-23.61	HORIZONTAL	Peak
5	7236.474	32.65	35.55	7.35	36.93	38.62	54.00	-15.38	HORIZONTAL	Average
6	7236.474	44.31	35.55	7.35	36.93	50.28	74.00	-23.72	HORIZONTAL	Peak
7	8319.836	31.09	36.22	8.15	36.92	38.54	54.00	-15.46	HORIZONTAL	Average
8	8319.836	44.36	36.22	8.15	36.92	51.81	74.00	-22.19	HORIZONTAL	Peak
9	9648.916	31.06	37.54	8.18	37.08	39.70	54.00	-14.30	HORIZONTAL	Average
10	9648.916	45.64	37.54	8.18	37.08	54.28	74.00	-19.72	HORIZONTAL	Peak
11	12060.850	27.79	39.46	10.71	37.17	40.79	54.00	-13.21	HORIZONTAL	Average
12	12060.850	42.09	39.46	10.71	37.17	55.09	74.00	-18.91	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or amail: CN. Docchack@sgs.com No.1% Kadu Rod, Sointed Part, Gungdrou Euromic & Technology Development District, Gungdrou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学域科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 47 of 103

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
-5	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	30.000	23.73	12.20	0.05	21.45	14.53	40.00	-25.47	VERTICAL	QP
2	46.503	23.59	12.90	0.68	24.57	12.60	40.00	-27.40	VERTICAL	QP
3	163.755	28.14	13.29	1.28	28.09	14.62	43.50	-28.88	VERTICAL	QP
4	568.613	29.97	20.10	1.95	29.30	22.72	46.00	-23.28	VERTICAL	QP
5	724.261	29.33	21.66	3.56	29.53	25.02	46.00	-20.98	VERTICAL	QP
6	890.728	28.71	23.92	2.87	28.01	27.49	46.00	-18.51	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:Low

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3924.135	29.39	29.35	7.47	36.91	29.30	54.00	-24.70	VERTICAL	Average
2	3924.135	44.86	29.35	7.47	36.91	44.77	74.00	-29.23	VERTICAL	Peak
3	4824.962	45.53	30.82	6.01	36.94	45.42	54.00	-8.58	VERTICAL	Average
4	4824.962	49.39	30.82	6.01	36.94	49.28	74.00	-24.72	VERTICAL	Peak
5	7236.527	28.42	35.55	7.35	36.93	34.39	54.00	-19.61	VERTICAL	Average
6	7236.527	43.98	35.55	7.35	36.93	49.95	74.00	-24.05	VERTICAL	Peak
7	8416.584	28.94	36.15	8.07	36.93	36.23	54.00	-17.77	VERTICAL	Average
8	8416.584	44.44	36.15	8.07	36.93	51.73	74.00	-22.27	VERTICAL	Peak
9	9648.018	28.80	37.54	8.18	37.08	37.44	54.00	-16.56	VERTICAL	Average
10	9648.018	43.93	37.54	8.18	37.08	52.57	74.00	-21.43	VERTICAL	Peak
11	12060.240	27.59	39.46	10.71	37.17	40.59	54.00	-13.41	VERTICAL	Average
12	12060.240	41.87	39.46	10.71	37.17	54.87	74.00	-19.13	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents as a <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions/Terms-and-Conditions-And-C

or amail: CN. Docchack@sgs.com No.1% Kadu Rod, Sointed Part, Gungdrou Euromic & Technology Development District, Gungdrou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 - 广州 - 经济技术开发区科学域科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 48 of 103

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3823.371	29.97	29.08	7.83	36.91	29.97	54.00	-24.03	HORIZONTAL	Average
2	3823.371	44.45	29.08	7.83	36.91	44.45	74.00	-29.55	HORIZONTAL	Peak
3	4884.151	47.44	30.95	6.86	36.95	48.30	54.00	-5.70	HORIZONTAL	Average
4	4884.151	51.41	30.95	6.86	36.95	52.27	74.00	-21.73	HORIZONTAL	Peak
5	7326.527	29.92	35.74	7.39	36.92	36.13	54.00	-17.87	HORIZONTAL	Average
6	7326.527	43.64	35.74	7.39	36.92	49.85	74.00	-24.15	HORIZONTAL	Peak
7	8943.274	27.95	36.47	8.18	37.00	35.60	54.00	-18.40	HORIZONTAL	Average
8	8943.274	43.51	36.47	8.18	37.00	51.16	74.00	-22.84	HORIZONTAL	Peak
9	9768.916	31.40	37.74	8.37	37.09	40.42	54.00	-13.58	HORIZONTAL	Average
10	9768.916	45.47	37.74	8.37	37.09	54.49	74.00	-19.51	HORIZONTAL	Peak
11	12210.350	28.27	39.21	10.98	37.06	41.40	54.00	-12.60	HORIZONTAL	Average
12	12210.350	40.99	39.21	10.98	37.06	54.12	74.00	-19.88	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3890.255	31.98	29.27	7.61	36.91	31.95	54.00	-22.05	VERTICAL	Average
2	3890.255	44.70	29.27	7.61	36.91	44.67	74.00	-29.33	VERTICAL	Peak
3	4884.151	35.20	30.95	6.86	36.95	36.06	54.00	-17.94	VERTICAL	Average
4	4884.151	48.71	30.95	6.86	36.95	49.57	74.00	-24.43	VERTICAL	Peak
5	7326.092	28.82	35.74	7.39	36.92	35.03	54.00	-18.97	VERTICAL	Average
6	7326.092	43.40	35.74	7.39	36.92	49.61	74.00	-24.39	VERTICAL	Peak
7	8489.882	26.03	36.10	8.03	36.94	33.22	54.00	-20.78	VERTICAL	Average
8	8489.882	44.58	36.10	8.03	36.94	51.77	74.00	-22.23	VERTICAL	Peak
9	9768.916	29.43	37.74	8.37	37.09	38.45	54.00	-15.55	VERTICAL	Average
10	9768.916	44.89	37.74	8.37	37.09	53.91	74.00	-20.09	VERTICAL	Peak
11	12210.100	27.79	39.21	10.98	37.06	40.92	54.00	-13.08	VERTICAL	Average
12	12210.100	41.29	39.21	10.98	37.06	54.42	74.00	-19.58	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or email: CN. Docchisck包sas.com No.19 Kadu Road, Sointed Park, Gungdhou Ecromic & Technology Dwelopment Datrict, Gungdhou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 49 of 103

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:High

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		-
1	3958.309	28.99	29.42	7.35	36.90	28.86	54.00	-25.14	HORIZONTAL	Average
2	3958.309	44.88	29.42	7.35	36.90	44.75	74.00	-29.25	HORIZONTAL	Peak
3	4924.721	32.13	31.01	7.49	36.95	33.68	54.00	-20.32	HORIZONTAL	Average
4	4924.721	47.87	31.01	7.49	36.95	49.42	74.00	-24.58	HORIZONTAL	Peak
5	7386.516	27.13	35.85	7.42	36.92	33.48	54.00	-20.52	HORIZONTAL	Average
6	7386.516	42.75	35.85	7.42	36.92	49.10	74.00	-24.90	HORIZONTAL	Peak
7	8764.146	26.79	36.33	8.00	36.97	34.15	54.00	-19.85	HORIZONTAL	Average
8	8764.146	43.55	36.33	8.00	36.97	50.91	74.00	-23.09	HORIZONTAL	Peak
9	9848.221	26.67	37.82	8.46	37.09	35.86	54.00	-18.14	HORIZONTAL	Average
10	9848.221	42.83	37.82	8.46	37.09	52.02	74.00	-21.98	HORIZONTAL	Peak
11	12310.580	26.87	39.03	11.10	36.97	40.03	54.00	-13.97	HORIZONTAL	Average
12	12310.580	40.91	39.03	11.10	36.97	54.07	74.00	-19.93	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:High

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3790.361	31.14	28.97	7.83	36.92	31.02	54.00	-22.98	VERTICAL	Average
2	3790.361	45.41	28.97	7.83	36.92	45.29	74.00	-28.71	VERTICAL	Peak
3	4924.721	35.50	31.01	7.49	36.95	37.05	54.00	-16.95	VERTICAL	Average
4	4924.721	48.39	31.01	7.49	36.95	49.94	74.00	-24.06	VERTICAL	Peak
5	7386.015	30.10	35.85	7.42	36.92	36.45	54.00	-17.55	VERTICAL	Average
6	7386.015	43.85	35.85	7.42	36.92	50.20	74.00	-23.80	VERTICAL	Peak
7	8995.123	29.27	36.50	8.24	37.01	37.00	54.00	-17.00	VERTICAL	Average
8	8995.123	44.49	36.50	8.24	37.01	52.22	74.00	-21.78	VERTICAL	Peak
9	9848.221	29.03	37.82	8.46	37.09	38.22	54.00	-15.78	VERTICAL	Average
10	9848.221	43.88	37.82	8.46	37.09	53.07	74.00	-20.93	VERTICAL	Peak
11	12310.740	28.15	39.03	11.10	36.97	41.31	54.00	-12.69	VERTICAL	Average
12	12310.740	41.03	39.03	11.10	36.97	54.19	74.00	-19.81	VERTICAL	Peak



No. 196 Kedru Road, Solveted Park, Gungdhou Economic & Technology Development District, Gungdhou, China 51,0663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 50 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	39.715	22.35	12.60	0.60	23.65	11.90	40.00	-28.10	HORIZONTAL	QP
2	53.318	24.52	12.78	0.59	24.97	12.92	40.00	-27.08	HORIZONTAL	QP
3	132.685	27.55	12.66	0.98	28.17	13.02	43.50	-30.48	HORIZONTAL	QP
4	180.649	29.30	12.67	1.34	28.09	15.22	43.50	-28.28	HORIZONTAL	QP
5	622.890	29.11	20.74	2.10	29.21	22.74	46.00	-23.26	HORIZONTAL	QP
6	887.610	29.43	23.90	2.88	28.06	28.15	46.00	-17.85	HORIZONTAL	QP

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	3856.668	30.86	29.19	7.73	36.91	30.87	54.00	-23.13	HORIZONTAL	Average
2	3856.668	45.31	29.19	7.73	36.91	45.32	74.00	-28.68	HORIZONTAL	Peak
3	4824.962	31.50	30.82	6.01	36.94	31.39	54.00	-22.61	HORIZONTAL	Average
4	4824.962	47.78	30.82	6.01	36.94	47.67	74.00	-26.33	HORIZONTAL	Peak
5	6737.207	28.89	34.70	7.18	36.97	33.80	54.00	-20.20	HORIZONTAL	Average
6	6737.207	43.42	34.70	7.18	36.97	48.33	74.00	-25.67	HORIZONTAL	Peak
7	7236.102	29.82	35.55	7.35	36.93	35.79	54.00	-18.21	HORIZONTAL	Average
8	7236.102	45.10	35.55	7.35	36.93	51.07	74.00	-22.93	HORIZONTAL	Peak
9	9648.925	27.65	37.54	8.18	37.08	36.29	54.00	-17.71	HORIZONTAL	Average
10	9648.925	43.79	37.54	8.18	37.08	52.43	74.00	-21.57	HORIZONTAL	Peak
11	12060.350	26.29	39.46	10.71	37.17	39.29	54.00	-14.71	HORIZONTAL	Average
12	12060.350	42.68	39.46	10.71	37.17	55.68	74.00	-18.32	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excensive parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) bested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report** & certificate, please contact us at tolephone: (86-755) 8307-443.

Attention:To check the authenticity of testing inspection report** & certificate, please contact us at tolephone: (86-755) 8307-443.

or email: CN. Doccheck包sas.com No.1% Kathu Road, Sointed Park, Gungdhou Ecromic & Technology Development District, Gungdhou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 51 of 103

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
-5	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	46.503	25.44	12.90	0.68	24.57	14.45	40.00	-25.55	VERTICAL	QP
2	60.069	24.03	12.20	0.58	25.23	11.58	40.00	-28.42	VERTICAL	QP
3	180.649	30.02	12.67	1.34	28.09	15.94	43.50	-27.56	VERTICAL	QP
4	582.743	29.68	20.36	1.91	29.22	22.73	46.00	-23.27	VERTICAL	QP
5	729.358	30.51	21.73	3.47	29.46	26.25	46.00	-19.75	VERTICAL	QP
6	938.833	29.43	24.39	3.62	28.22	29.22	46.00	-16.78	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

		Read/	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	4824.962	44.22	30.82	6.01	36.94	44.11	54.00	-9.89	VERTICAL	Average
2	4824.962	49.26	30.82	6.01	36.94	49.15	74.00	-24.85	VERTICAL	Peak
3	5813.812	30.11	32.17	7.46	37.00	32.74	54.00	-21.26	VERTICAL	Average
4	5813.812	44.11	32.17	7.46	37.00	46.74	74.00	-27.26	VERTICAL	Peak
5	7236.172	29.19	35.55	7.35	36.93	35.16	54.00	-18.84	VERTICAL	Average
6	7236.172	43.97	35.55	7.35	36.93	49.94	74.00	-24.06	VERTICAL	Peak
7	8440.945	28.27	36.13	8.06	36.93	35.53	54.00	-18.47	VERTICAL	Average
8	8440.945	44.69	36.13	8.06	36.93	51.95	74.00	-22.05	VERTICAL	Peak
9	9648.221	28.77	37.54	8.18	37.08	37.41	54.00	-16.59	VERTICAL	Average
10	9648.221	44.81	37.54	8.18	37.08	53.45	74.00	-20.55	VERTICAL	Peak
11	12060.270	26.95	39.46	10.71	37.17	39.95	54.00	-14.05	VERTICAL	Average
12	12060.270	41.09	39.46	10.71	37.17	54.09	74.00	-19.91	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents as a <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions/Terms-and-Conditions-And-C

or amail: CN. Docchack@sqs.com No.1% Kedu Road, Sointed Park, Gargetou Economic & Technology Development District, Gargetou, Crise 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 52 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3823.371	33.51	29.08	7.83	36.91	33.51	54.00	-20.49	HORIZONTAL	Average
2	3823.371	44.52	29.08	7.83	36.91	44.52	74.00	-29.48	HORIZONTAL	Peak
3	4884.043	41.57	30.95	6.86	36.95	42.43	54.00	-11.57	HORIZONTAL	Average
4	4884.043	47.18	30.95	6.86	36.95	48.04	74.00	-25.96	HORIZONTAL	Peak
5	6835.278	30.72	34.89	7.21	36.96	35.86	54.00	-18.14	HORIZONTAL	Average
6	6835.278	43.87	34.89	7.21	36.96	49.01	74.00	-24.99	HORIZONTAL	Peak
7	7326.463	31.15	35.74	7.39	36.92	37.36	54.00	-16.64	HORIZONTAL	Average
8	7326.463	43.67	35.74	7.39	36.92	49.88	74.00	-24.12	HORIZONTAL	Peak
9	9768.689	30.53	37.74	8.37	37.09	39.55	54.00	-14.45	HORIZONTAL	Average
10	9768.689	44.33	37.74	8.37	37.09	53.35	74.00	-20.65	HORIZONTAL	Peak
11	12210.760	26.14	39.21	10.98	37.06	39.27	54.00	-14.73	HORIZONTAL	Average
12	12210.760	40.61	39.21	10.98	37.06	53.74	74.00	-20.26	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	-	
1	4133.699	30.63	29.62	6.79	36.90	30.14	54.00	-23.86	VERTICAL	Average
2	4133.699	45.93	29.62	6.79	36.90	45.44	74.00	-28.56	VERTICAL	Peak
3	4884.043	44.77	30.95	6.86	36.95	45.63	54.00	-8.37	VERTICAL	Average
4	4884.043	48.85	30.95	6.86	36.95	49.71	74.00	-24.29	VERTICAL	Peak
5	7326.122	30.13	35.74	7.39	36.92	36.34	54.00	-17.66	VERTICAL	Average
6	7326.122	43.91	35.74	7.39	36.92	50.12	74.00	-23.88	VERTICAL	Peak
7	9648.399	28.00	37.54	8.18	37.08	36.64	54.00	-17.36	VERTICAL	Average
8	9648.399	42.92	37.54	8.18	37.08	51.56	74.00	-22.44	VERTICAL	Peak
9	10545.010	26.76	39.05	9.58	37.12	38.27	54.00	-15.73	VERTICAL	Average
10	10545.010	40.24	39.05	9.58	37.12	51.75	74.00	-22.25	VERTICAL	Peak
11	12210.220	28.24	39.21	10.98	37.06	41.37	54.00	-12.63	VERTICAL	Average
12	12210.220	41.61	39.21	10.98	37.06	54.74	74.00	-19.26	VERTICAL	Peak



No.198 Kedu Road, Sointed Park, Gungdhou Economic & Technology Development District, Gungdhou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 53 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

	Read	Antenna	Cable	Preamp		Limit	0ver		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		***
4098.010	30.91	29.58	6.92	36.90	30.51	54.00	-23.49	HORIZONTAL	Average
4098.010	45.33	29.58	6.92	36.90	44.93	74.00	-29.07	HORIZONTAL	Peak
4924.721	32.59	31.01	7.49	36.95	34.14	54.00	-19.86	HORIZONTAL	Average
4924.721	46.39	31.01	7.49	36.95	47.94	74.00	-26.06	HORIZONTAL	Peak
6974.982	32.53	35.08	7.27	36.94	37.94	54.00	-16.06	HORIZONTAL	Average
6974.982	44.28	35.08	7.27	36.94	49.69	74.00	-24.31	HORIZONTAL	Peak
7386.882	30.10	35.85	7.42	36.92	36.45	54.00	-17.55	HORIZONTAL	Average
7386.882	43.57	35.85	7.42	36.92	49.92	74.00	-24.08	HORIZONTAL	Peak
9848.789	30.60	37.82	8.46	37.09	39.79	54.00	-14.21	HORIZONTAL	Average
9848.789	43.42	37.82	8.46	37.09	52.61	74.00	-21.39	HORIZONTAL	Peak
12310.220	27.09	39.03	11.10	36.97	40.25	54.00	-13.75	HORIZONTAL	Average
12310.220	42.60	39.03	11.10	36.97	55.76	74.00	-18.24	HORIZONTAL	Peak
	MHz 4098.010 4098.010 4924.721 4924.721 6974.982 6974.982 7386.882 7386.882 9848.789 9848.789 12310.220	MHz dBuV 4098.010 30.91 4098.010 45.33 4924.721 32.59 4924.721 46.39 6974.982 32.53 6974.982 44.28 7386.882 30.10 7386.882 43.57 9848.789 30.60 9848.789 43.42 12310.220 27.09	Freq Level Factor MHz dBuV dB/m 4098.010 30.91 29.58 4098.010 45.33 29.58 4924.721 32.59 31.01 4924.721 46.39 31.01 6974.982 32.53 35.08 6974.982 44.28 35.08 7386.882 30.10 35.85 7386.882 43.57 35.85 9848.789 30.60 37.82 9848.789 43.42 37.82 12310.220 27.09 39.03	MHz dBuV dB/m dB 4098.010 30.91 29.58 6.92 4098.010 45.33 29.58 6.92 4924.721 32.59 31.01 7.49 4924.721 46.39 31.01 7.49 6974.982 32.53 35.08 7.27 7386.882 30.10 35.85 7.42 7386.882 43.57 35.85 7.42 9848.789 30.60 37.82 8.46 9848.789 43.42 37.82 8.46 12310.220 27.09 39.03 11.10	MHz dBuV dB/m dB dB 4098.010 30.91 29.58 6.92 36.90 4098.010 45.33 29.58 6.92 36.90 4924.721 32.59 31.01 7.49 36.95 4924.721 46.39 31.01 7.49 36.95 6974.982 32.53 35.08 7.27 36.94 6974.982 44.28 35.08 7.27 36.94 7386.882 30.10 35.85 7.42 36.92 7386.882 43.57 35.85 7.42 36.92 9848.789 30.60 37.82 8.46 37.09 9848.789 43.42 37.82 8.46 37.09 12310.220 27.09 39.03 11.10 36.97	MHz dBuV dB/m dB dB dBuV/m 4098.010 30.91 29.58 6.92 36.90 30.51 4098.010 45.33 29.58 6.92 36.90 44.93 4924.721 32.59 31.01 7.49 36.95 34.14 4924.721 46.39 31.01 7.49 36.95 47.94 6974.982 32.53 35.08 7.27 36.94 37.94 6974.982 44.28 35.08 7.27 36.94 49.69 7386.882 30.10 35.85 7.42 36.92 36.45 7386.882 43.57 35.85 7.42 36.92 49.92 9848.789 30.60 37.82 8.46 37.09 39.79 9848.789 43.42 37.82 8.46 37.09 52.61 12310.220 27.09 39.03 11.10 36.97 40.25	Freq Level Factor Loss Factor Level Line MHz dBuV dB/m dB dB dBuV/m dBuV/m dBuV/m 4098.010 30.91 29.58 6.92 36.90 30.51 54.00 4098.010 45.33 29.58 6.92 36.90 44.93 74.00 4924.721 32.59 31.01 7.49 36.95 34.14 54.00 4924.721 46.39 31.01 7.49 36.95 47.94 74.00 6974.982 32.53 35.08 7.27 36.94 37.94 54.00 7386.882 30.10 35.85 7.42 36.92 36.45 54.00 7386.882 43.57 35.85 7.42 36.92 49.92 74.00 9848.789 30.60 37.82 8.46 37.09 39.79 54.00 12310.220 27.09 39.03 11.10 36.97 40.25 54.00	Freq Level Factor Loss Factor Level Line Limit MHz dBuV dB/m dB dB dBuV/m dBuV/m dB 4098.010 30.91 29.58 6.92 36.90 30.51 54.00 -23.49 4098.010 45.33 29.58 6.92 36.90 44.93 74.00 -29.07 4924.721 32.59 31.01 7.49 36.95 34.14 54.00 -19.86 4924.721 46.39 31.01 7.49 36.95 47.94 74.00 -26.06 6974.982 32.53 35.08 7.27 36.94 37.94 54.00 -16.06 6974.982 44.28 35.08 7.27 36.94 49.69 74.00 -24.31 7386.882 30.10 35.85 7.42 36.92 36.45 54.00 -17.55 7386.882 43.57 35.85 7.42 36.92 49.92 74.00 -24.08 <t< td=""><td>Freq Level Factor Level Line Limit Pol/Phase MHz dBuV dB/m dB dB dBuV/m dBuV/m dB 4098.010 30.91 29.58 6.92 36.90 30.51 54.00 -23.49 HORIZONTAL 4098.010 45.33 29.58 6.92 36.90 44.93 74.00 -29.07 HORIZONTAL 4924.721 32.59 31.01 7.49 36.95 34.14 54.00 -19.86 HORIZONTAL 4924.721 46.39 31.01 7.49 36.95 34.14 54.00 -26.06 HORIZONTAL 6974.982 32.53 35.08 7.27 36.94 37.94 54.00 -16.06 HORIZONTAL 6974.982 44.28 35.08 7.27 36.94 49.69 74.00 -24.31 HORIZONTAL 7386.882 30.10 35.85 7.42 36.92 36.45 54.00 -17.55 HORIZONTAL 9848.789 3</td></t<>	Freq Level Factor Level Line Limit Pol/Phase MHz dBuV dB/m dB dB dBuV/m dBuV/m dB 4098.010 30.91 29.58 6.92 36.90 30.51 54.00 -23.49 HORIZONTAL 4098.010 45.33 29.58 6.92 36.90 44.93 74.00 -29.07 HORIZONTAL 4924.721 32.59 31.01 7.49 36.95 34.14 54.00 -19.86 HORIZONTAL 4924.721 46.39 31.01 7.49 36.95 34.14 54.00 -26.06 HORIZONTAL 6974.982 32.53 35.08 7.27 36.94 37.94 54.00 -16.06 HORIZONTAL 6974.982 44.28 35.08 7.27 36.94 49.69 74.00 -24.31 HORIZONTAL 7386.882 30.10 35.85 7.42 36.92 36.45 54.00 -17.55 HORIZONTAL 9848.789 3

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

		Read/	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3790.361	29.99	28.97	7.83	36.92	29.87	54.00	-24.13	VERTICAL	Average
2	3790.361	44.82	28.97	7.83	36.92	44.70	74.00	-29.30	VERTICAL	Peak
3	4924.721	32.26	31.01	7.49	36.95	33.81	54.00	-20.19	VERTICAL	Average
4	4924.721	47.72	31.01	7.49	36.95	49.27	74.00	-24.73	VERTICAL	Peak
5	6835.278	28.93	34.89	7.21	36.96	34.07	54.00	-19.93	VERTICAL	Average
6	6835.278	43.47	34.89	7.21	36.96	48.61	74.00	-25.39	VERTICAL	Peak
7	7386.020	30.03	35.85	7.42	36.92	36.38	54.00	-17.62	VERTICAL	Average
8	7386.020	42.63	35.85	7.42	36.92	48.98	74.00	-25.02	VERTICAL	Peak
9	9848.724	28.65	37.82	8.46	37.09	37.84	54.00	-16.16	VERTICAL	Average
10	9848.724	43.23	37.82	8.46	37.09	52.42	74.00	-21.58	VERTICAL	Peak
11	12310.380	25.87	39.03	11.10	36.97	39.03	54.00	-14.97	VERTICAL	Average
12	12310.380	40.31	39.03	11.10	36.97	53.47	74.00	-20.53	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents as a <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions/Terms-and-Conditions-And-C

or email: CN. Docchisck包sas.com No.19 Kadu Road, Sointed Park, Gungdhou Ecromic & Technology Dwelopment Datrict, Gungdhou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 54 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	39.715	21.98	12.60	0.60	23.65	11.53	40.00	-28.47	HORIZONTAL	QP
2	50.057	23.68	13.00	0.60	24.87	12.41	40.00	-27.59	HORIZONTAL	QP
3	153.200	27.97	13.32	1.22	28.11	14.40	43.50	-29.10	HORIZONTAL	QP
4	180.649	29.40	12.67	1.34	28.09	15.32	43.50	-28.18	HORIZONTAL	QP
5	661.151	29.02	21.16	2.13	28.85	23.46	46.00	-22.54	HORIZONTAL	QP
6	922.516	29.16	24.20	3.72	28.40	28.68	46.00	-17.32	HORIZONTAL	QP

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3901.516	29.75	29.30	7.56	36.91	29.70	54.00	-24.30	HORIZONTAL	Average
2	3901.516	44.61	29.30	7.56	36.91	44.56	74.00	-29.44	HORIZONTAL	Peak
3	4844.975	31.72	30.88	6.31	36.94	31.97	54.00	-22.03	HORIZONTAL	Average
4	4844.975	45.95	30.88	6.31	36.94	46.20	74.00	-27.80	HORIZONTAL	Peak
5	7266.144	26.43	35.60	7.36	36.92	32.47	54.00	-21.53	HORIZONTAL	Average
6	7266.144	42.97	35.60	7.36	36.92	49.01	74.00	-24.99	HORIZONTAL	Peak
7	8343.918	28.76	36.20	8.13	36.92	36.17	54.00	-17.83	HORIZONTAL	Average
8	8343.918	44.06	36.20	8.13	36.92	51.47	74.00	-22.53	HORIZONTAL	Peak
9	9648.717	28.63	37.54	8.18	37.08	37.27	54.00	-16.73	HORIZONTAL	Average
10	9648.717	43.34	37.54	8.18	37.08	51.98	74.00	-22.02	HORIZONTAL	Peak
11	12110.220	26.45	39.37	10.82	37.15	39.49	54.00	-14.51	HORIZONTAL	Average
12	12110.220	40.51	39.37	10.82	37.15	53.55	74.00	-20.45	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or email: CN. Docchisck包sas.com No.19 Kadu Road, Sointed Park, Gungdhou Ecromic & Technology Dwelopment Datrict, Gungdhou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 55 of 103

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq		Antenna Factor						Pol/Phase	Remark
-5	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	46.503	24.96	12.90	0.68	24.57	13.97	40.00	-26.03	VERTICAL	QP
2	64.887	27.44	11.50	0.65	25.38	14.21	40.00	-25.79	VERTICAL	QP
3	151.067	28.32	13.29	1.19	28.12	14.68	43.50	-28.82	VERTICAL	QP
4	462.346	29.39	17.73	2.00	29.47	19.65	46.00	-26.35	VERTICAL	QP
5	694.417	29.96	21.38	2.25	28.87	24.72	46.00	-21.28	VERTICAL	QP
6	916.069	29.36	24.13	3.60	28.35	28.74	46.00	-17.26	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

		Read/	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	-	
1	4133.699	30.78	29.62	6.79	36.90	30.29	54.00	-23.71	VERTICAL	Average
2	4133.699	45.75	29.62	6.79	36.90	45.26	74.00	-28.74	VERTICAL	Peak
3	4844.993	31.83	30.88	6.31	36.94	32.08	54.00	-21.92	VERTICAL	Average
4	4844.993	44.32	30.88	6.31	36.94	44.57	74.00	-29.43	VERTICAL	Peak
5	7266.806	26.88	35.60	7.36	36.92	32.92	54.00	-21.08	VERTICAL	Average
6	7266.806	43.15	35.60	7.36	36.92	49.19	74.00	-24.81	VERTICAL	Peak
7	8200.463	27.58	36.35	8.25	36.91	35.27	54.00	-18.73	VERTICAL	Average
8	8200.463	43.53	36.35	8.25	36.91	51.22	74.00	-22.78	VERTICAL	Peak
9	9688.430	28.86	37.61	8.25	37.08	37.64	54.00	-16.36	VERTICAL	Average
10	9688.430	44.89	37.61	8.25	37.08	53.67	74.00	-20.33	VERTICAL	Peak
11	12110.850	26.69	39.37	10.82	37.12	39.76	54.00	-14.24	VERTICAL	Average
12	12110.850	41.07	39.37	10.82	37.12	54.14	74.00	-19.86	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appy.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C

or amail: CN. Docch ack 25 as. com
No.19 Kazhu Road, Sointed Park, Gangdhou Ecromic & Technology Development Datrict, Gangdhou, China 510,663 t (86–20) 82155555 f (86–20) 82075058 www.sgsgroup.com.cn
中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510,663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 56 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	3757.637	32.29	28.82	7.65	36.92	31.84	54.00	-22.16	HORIZONTAL	Average
2	3757.637	45.32	28.82	7.65	36.92	44.87	74.00	-29.13	HORIZONTAL	Peak
3	4884.721	30.94	30.95	6.86	36.95	31.80	54.00	-22.20	HORIZONTAL	Average
4	4884.721	46.17	30.95	6.86	36.95	47.03	74.00	-26.97	HORIZONTAL	Peak
5	6717.762	28.08	34.65	7.18	36.97	32.94	54.00	-21.06	HORIZONTAL	Average
6	6717.762	44.17	34.65	7.18	36.97	49.03	74.00	-24.97	HORIZONTAL	Peak
7	7326.102	29.78	35.74	7.39	36.92	35.99	54.00	-18.01	HORIZONTAL	Average
8	7326.102	43.72	35.74	7.39	36.92	49.93	74.00	-24.07	HORIZONTAL	Peak
9	9768.991	29.83	37.74	8.37	37.09	38.85	54.00	-15.15	HORIZONTAL	Average
10	9768.991	44.28	37.74	8.37	37.09	53.30	74.00	-20.70	HORIZONTAL	Peak
11	12210.420	26.21	39.21	10.98	37.06	39.34	54.00	-14.66	HORIZONTAL	Average
12	12210.420	40.42	39.21	10.98	37.06	53.55	74.00	-20.45	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:middle

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3890.255	32.35	29.27	7.61	36.91	32.32	54.00	-21.68	VERTICAL	Average
2	3890.255	44.61	29.27	7.61	36.91	44.58	74.00	-29.42	VERTICAL	Peak
3	4884.982	34.07	30.95	6.86	36.95	34.93	54.00	-19.07	VERTICAL	Average
4	4884.982	47.66	30.95	6.86	36.95	48.52	74.00	-25.48	VERTICAL	Peak
5	7386.461	29.12	35.85	7.42	36.92	35.47	54.00	-18.53	VERTICAL	Average
6	7386.461	43.87	35.85	7.42	36.92	50.22	74.00	-23.78	VERTICAL	Peak
7	8738.852	28.82	36.30	7.98	36.96	36.14	54.00	-17.86	VERTICAL	Average
8	8738.852	44.50	36.30	7.98	36.96	51.82	74.00	-22.18	VERTICAL	Peak
9	9768.800	29.97	37.74	8.37	37.09	38.99	54.00	-15.01	VERTICAL	Average
10	9768.800	43.61	37.74	8.37	37.09	52.63	74.00	-21.37	VERTICAL	Peak
11	12210.350	26.93	39.21	10.98	37.06	40.06	54.00	-13.94	VERTICAL	Average
12	12210.350	40.73	39.21	10.98	37.06	53.86	74.00	-20.14	VERTICAL	Peak



No.198 Kedu Road, Sointed Park, Gungdhou Economic & Technology Development District, Gungdhou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 57 of 103

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

		Read	Antenna	Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		-
1	4904.977	33.66	30.97	7.07	36.95	34.75	54.00	-19.25	HORIZONTAL	Average
2	4904.977	45.88	30.97	7.07	36.95	46.97	74.00	-27.03	HORIZONTAL	Peak
3	6231.427	27.08	33.19	6.93	36.99	30.21	54.00	-23.79	HORIZONTAL	Average
4	6231.427	44.07	33.19	6.93	36.99	47.20	74.00	-26.80	HORIZONTAL	Peak
5	7356.788	27.66	35.78	7.40	36.92	33.92	54.00	-20.08	HORIZONTAL	Average
6	7356.788	43.96	35.78	7.40	36.92	50.22	74.00	-23.78	HORIZONTAL	Peak
7	8416.584	28.05	36.15	8.07	36.93	35.34	54.00	-18.66	HORIZONTAL	Average
8	8416.584	43.54	36.15	8.07	36.93	50.83	74.00	-23.17	HORIZONTAL	Peak
9	9808.916	28.34	37.79	8.41	37.09	37.45	54.00	-16.55	HORIZONTAL	Average
10	9808.916	44.94	37.79	8.41	37.09	54.05	74.00	-19.95	HORIZONTAL	Peak
11	12260.270	26.53	39.15	11.02	37.03	39.67	54.00	-14.33	HORIZONTAL	Average
12	12260.270	41.59	39.15	11.02	37.03	54.73	74.00	-19.27	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

		ReadAntenna		Cable	Preamp		Limit	0ver		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dВ	dB	dBuV/m	dBuV/m	dB		
1	3801.333	32.87	29.01	7.89	36.92	32.85	54.00	-21.15	VERTICAL	Average
2	3801.333	45.59	29.01	7.89	36.92	45.57	74.00	-28.43	VERTICAL	Peak
3	4904.151	32.73	30.97	7.07	36.95	33.82	54.00	-20.18	VERTICAL	Average
4	4904.151	46.38	30.97	7.07	36.95	47.47	74.00	-26.53	VERTICAL	Peak
5	7356.516	29.75	35.78	7.40	36.92	36.01	54.00	-17.99	VERTICAL	Average
6	7356.516	43.58	35.78	7.40	36.92	49.84	74.00	-24.16	VERTICAL	Peak
7	8319.836	29.99	36.22	8.15	36.92	37.44	54.00	-16.56	VERTICAL	Average
8	8319.836	44.41	36.22	8.15	36.92	51.86	74.00	-22.14	VERTICAL	Peak
9	9808.257	29.48	37.79	8.41	37.09	38.59	54.00	-15.41	VERTICAL	Average
10	9808.257	41.70	37.79	8.41	37.09	50.81	74.00	-23.19	VERTICAL	Peak
11	12260.700	27.09	39.15	11.02	37.03	40.23	54.00	-13.77	VERTICAL	Average
12	12260.700	40.08	39.15	11.02	37.03	53.22	74.00	-20.78	VERTICAL	Peak



No.198 Kedu Road, Sointed Park, Gungdhou Economic & Technology Development District, Gungdhou, China 510,663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn



Report No.: GZEM181100255701

Page: 58 of 103

8 Appendix

8.1 Appendix 15.247

1.6dB Bandwidth

Test Mode	Test Channel	Ant OBW[MHz]		EBW[MHz]	Limit	Verdict
11B	2412	Ant1	15.688	8.341	0.5	PASS
11B	2442	Ant1	15.574	8.339	0.5	PASS
11B	2462	Ant1	15.603	8.366	0.5	PASS
11G	2412	Ant1	16.475	15.11	0.5	PASS
11G	2442	Ant1	16.436	15.11	0.5	PASS
11G	2462	Ant1	16.450	15.12	0.5	PASS
11N20SISO	2412	Ant1	17.461	15.09	0.5	PASS
11N20SISO	2442	Ant1	17.656	15.99	0.5	PASS
11N20SISO	2462	Ant1	17.657	15.12	0.5	PASS
11N40SISO	2422	Ant1	35.784	35.08	0.5	PASS
11N40SISO	2442	Ant1	35.875	35.10	0.5	PASS
11N40SISO	2452	Ant1	35.912	35.10	0.5	PASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not except experts to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alreation, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone (86-755) 8307-443.

or amail: CN. Docchack@sqs.com No.1% Kedu Road, Sointed Park, Gargetou Economic & Technology Development District, Gargetou, Crise 510663 t (86–20) 82155555 f (86–20) 82075058 www.sgs.group.com.cn 中国 -广州 -经济技术开发区科学城科珠路198号 邮编: 510663 t (86–20) 82155555 f (86–20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 59 of 103

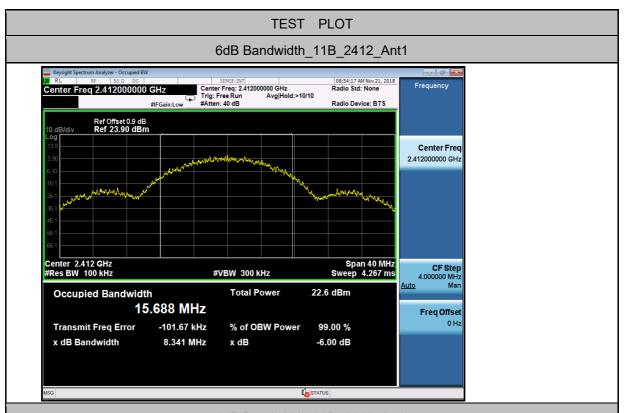

6dB Bandwidth_11B_2442_Ant1





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excertate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307-1443,

No.198 Keatru Road, Someted Park, Guargatiou Economic & Technology Development District, Guargatiou, Crise 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



Report No.: GZEM181100255701

Page: 60 of 103



6dB Bandwidth_11G_2412_Ant1





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excertate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307-1443,

No.198 Keatru Road, Someted Park, Guargatiou Economic & Technology Development District, Guargatiou, Crise 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.group.com.cn 中国 - 广州 - 经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com