# **Appendix C**

# **RF Test Data for 5.2G WLAN (Conducted Measurement)**


**Product Name: Lapbook Trade Mark: Fusion5** Test Model: T90B+ Pro

### **Environmental Conditions**

Temperature:	24.6 ° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Tom.Liu
Supervised by:	Jayden.Zhuo

## **C.1 Duty Cycle**

Test Mode	Test Frequency (MHz)	Duty Cycle (%)	10log(1/x) Factor (dB)	1/B Minimum VBW (KHz)
11A	5200	100	0.00	0.01
11N20 SISO	5200	100	0.00	0.01
11N40 SISO	5190	100	0.00	0.01
11AC20 SISO	5200	100	0.00	0.01
11AC40 SISO	5190	100	0.00	0.01
11AC80 SISO	5210	100	0.00	0.01

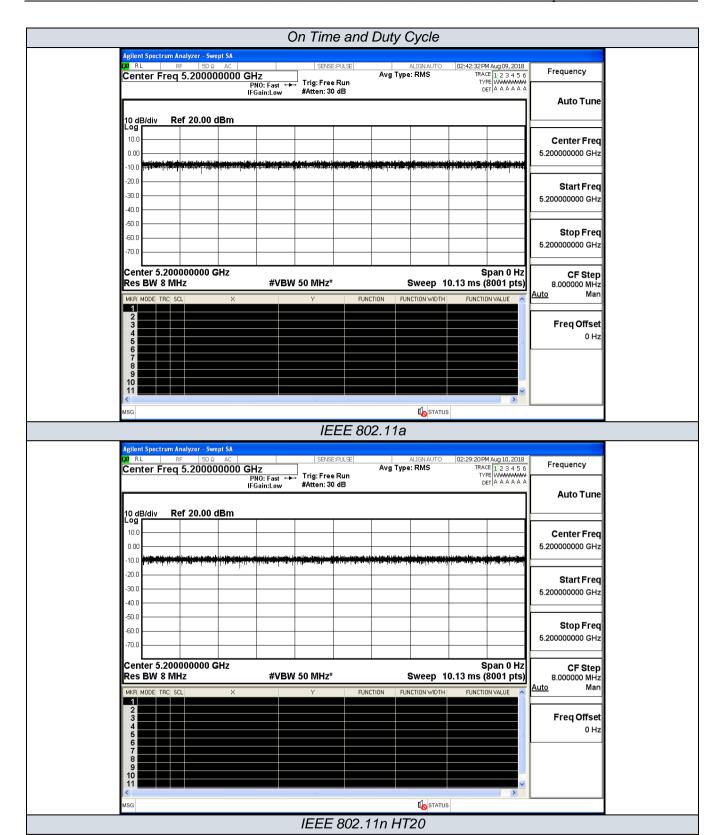



# **C.2 Maximum Conduct Output Power**

Test Mode	Channel	Frequency	AVG Conducted	Duty Cycle	Report Conducted	Limit
1 est Mode		(MHz)	Power (dBm)	Factor (dB)	Power (dBm)	(dBm)
	36	5180	11.15	0	11.15	
11A	40	5200	11.28	0	11.28	24
	48	5240	11.09	0	11.09	
	36	5180	11.21	0	11.21	
11N20 SISO	40	5200	11.36	0	11.36	24
	48	5240	11.10	0	11.10	
11N40 SISO	38	5190	12.51	0	12.51	24
111140 3130	46	5230	12.26	0	12.26	24
	36	5180	11.04	0	11.04	
11AC20 SISO	40	5200	11.24	0	11.24	24
	48	5240	11.34	0	11.34	
11AC40 SISO	38	5190	11.97	0	11.97	24
	46	5230	12.65	0	12.65	
11AC80 SISO	42	5210	12.48	0	12.48	24


## **C.3 Power Spectral Density**

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Cycle Factor(dB)	Report Power Density (dBm/MHz)	Limit (dBm/MHz)
	36	5180	-2.902	0	-2.902	
11A	40	5200	-1.226	0	-1.226	11
	48	5240	-2.136	0	-2.136	
	36	5180	-5.086	0	-5.086	
11N20 SISO	SISO 40	5200	-2.933	0	-2.933	11
	48	5240	-1.822	0	-1.822	
11N40 SISO	38	5190	-7.392	0	-7.392	11
111140 3130	46	5230	-4.888	0	-4.888	11
	36	5180	-5.011	0	-5.011	
11AC20 SISO	40	5200	-2.690	0	-2.690	11
	48	5240	-1.725	0	-1.725	
11AC40 SISO	38	5190	-6.695	0	-6.695	11
	46	5230	-4.245	0	-4.245	]
11AC80 SISO	42	5210	-7.669	0	-7.669	11

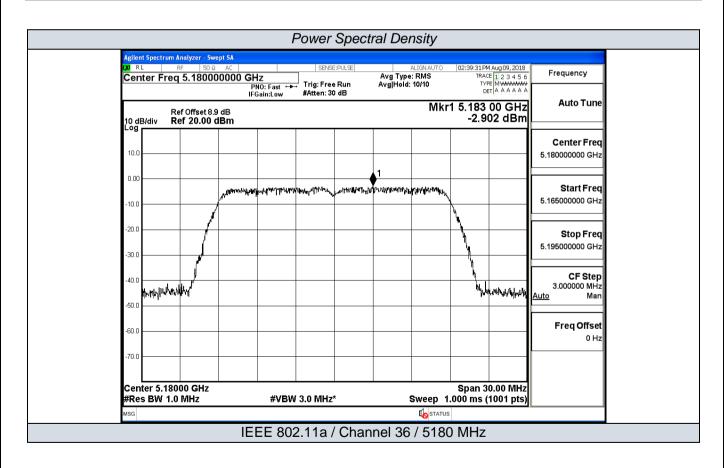


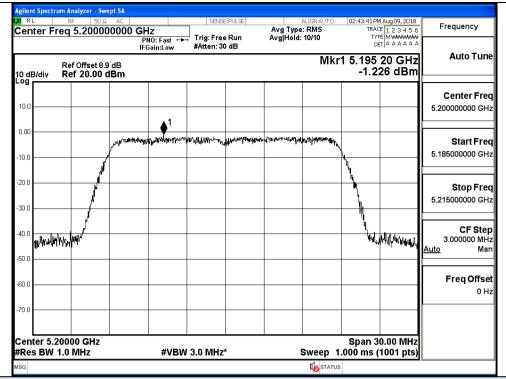



#### IEEE 802.11a / Channel 40 / 5200 MHz

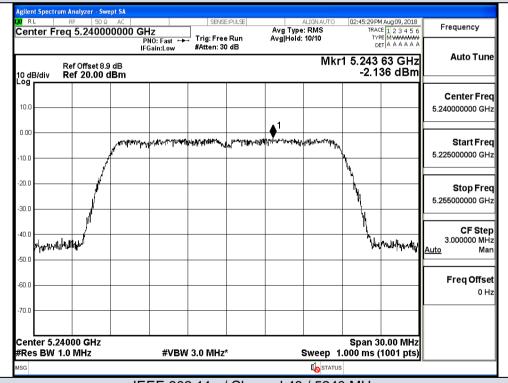



IEEE 802.11a / Channel 48 / 5240 MHz

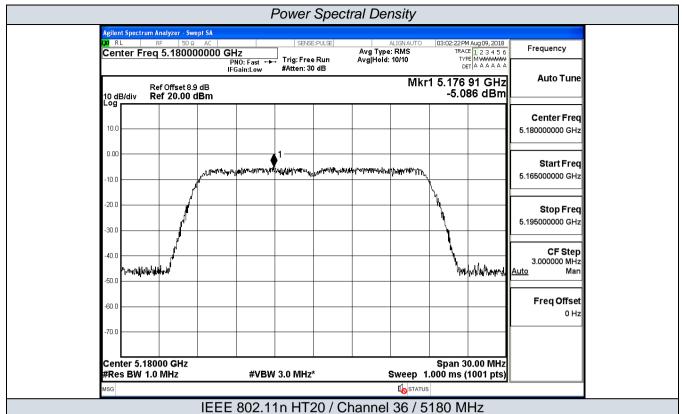

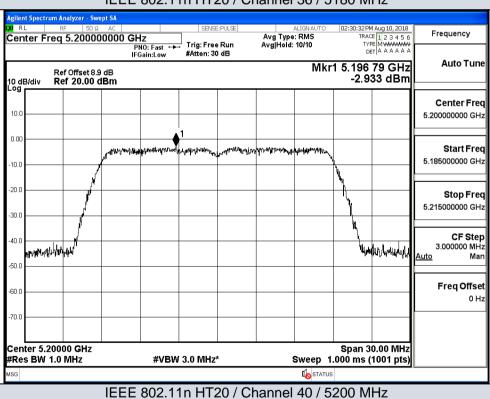


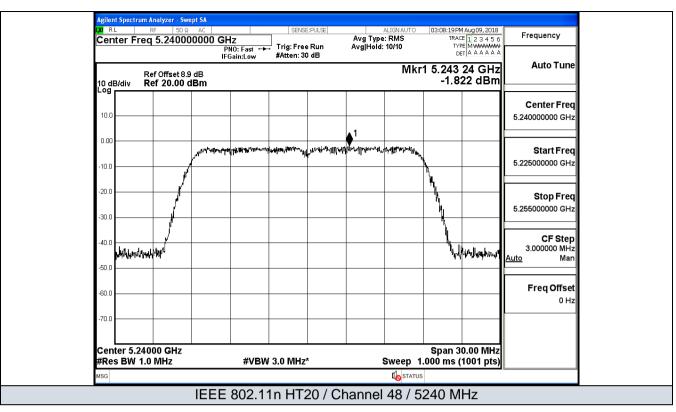

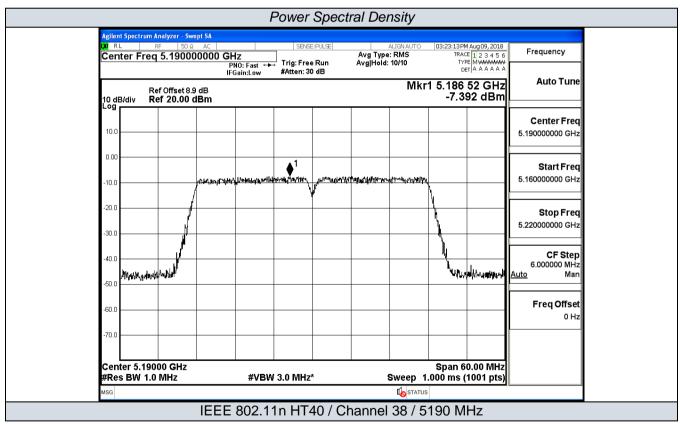


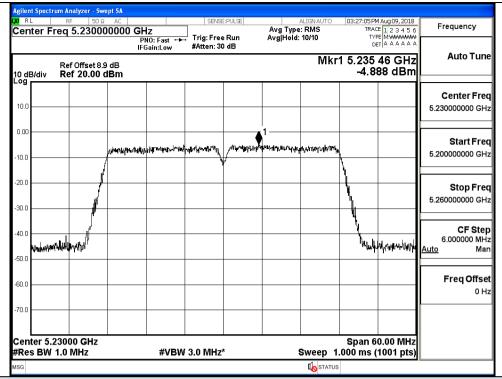


#### IEEE 802.11n HT40 / Channel 46 / 5230 MHz

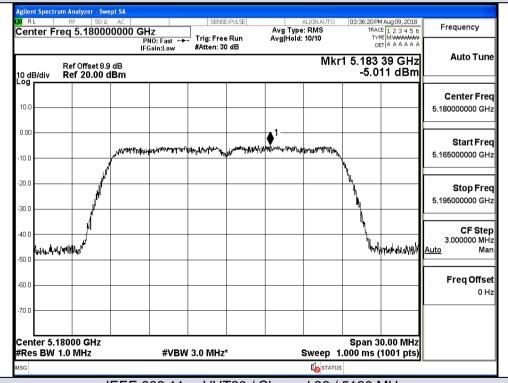


IEEE 802.11ac VHT20 / Channel 36 / 5180 MHz

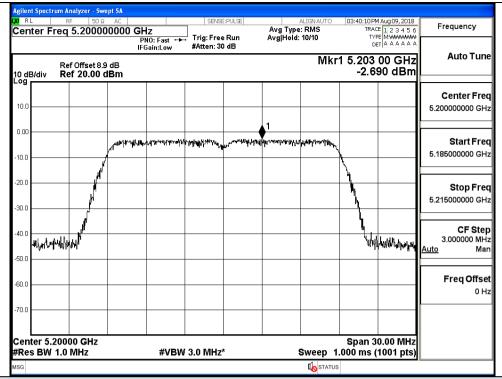


## IEEE 802.11ac VHT20 / Channel 40 / 5200 MHz

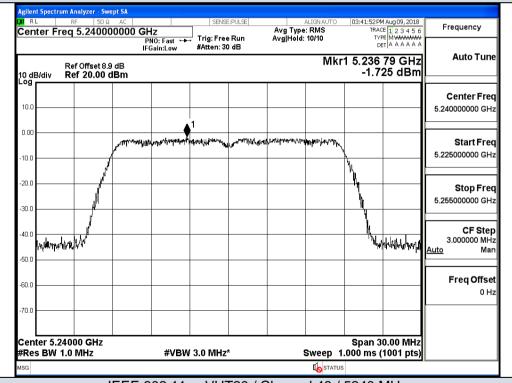


IEEE 802.11ac VHT20 / Channel 48 / 5240 MHz

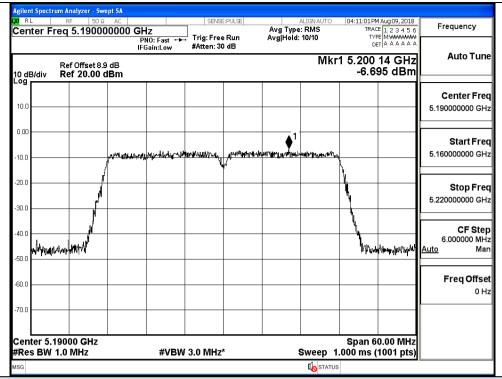

## IEEE 802.11ac VHT40 / Channel 38 / 5190 MHz

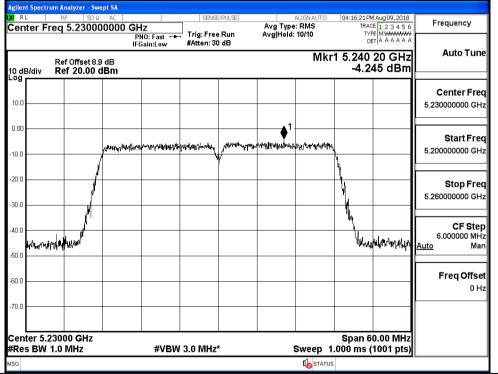


IEEE 802.11ac VHT40 / Channel 46 / 5230 MHz

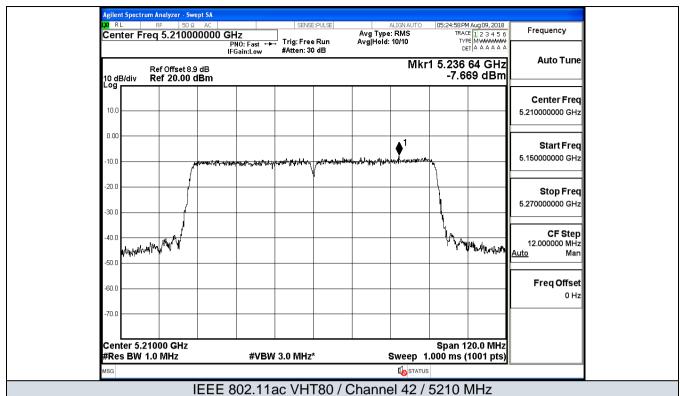

### C.4 Emission Bandwidth

Test Mode	Channel	Frequency (MHz)	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
	36	5180	17.726	19.78		
11A	40	5200	17.741	19.94	No Limit	
	48	5240	17.737	19.87		
	36	5180	17.736	19.94		
11N20 SISO	40	5200	17.740	19.99	No Limit	
	48	5240	17.736	19.83		
11N40 SISO	38	5190	36.190	39.87	No Limit	
111140 3130	46	5230	36.196	40.02	NO LIMIT	
	36	5180	17.744	19.88		
11AC20 SISO	40	5200	17.756	19.94	No Limit	
	48	5240	17.733	19.89		
11AC40 SISO	38	5190	36.204	40.12	No Limit	
	46	5230	36.174	39.81	INO LIIIIII	
11AC80 SISO	42	5210	75.562	81.23	No Limit	

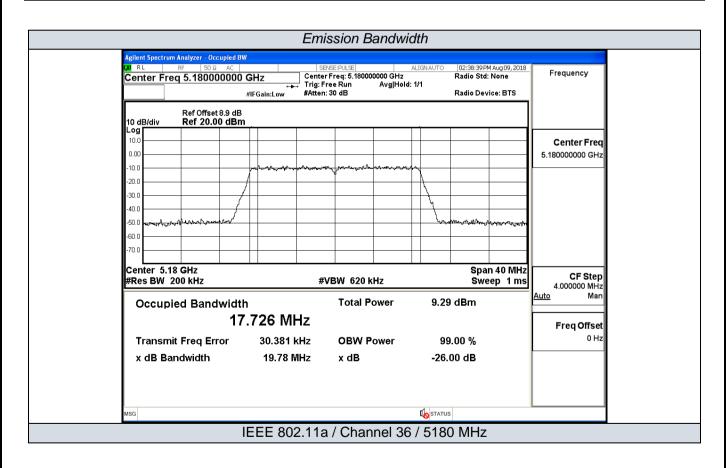

**OBW Power** 

x dB

99.00 %

-26.00 dB

STATUS


37.845 kHz

19.87 MHz

Transmit Freq Error


x dB Bandwidth


0 Hz

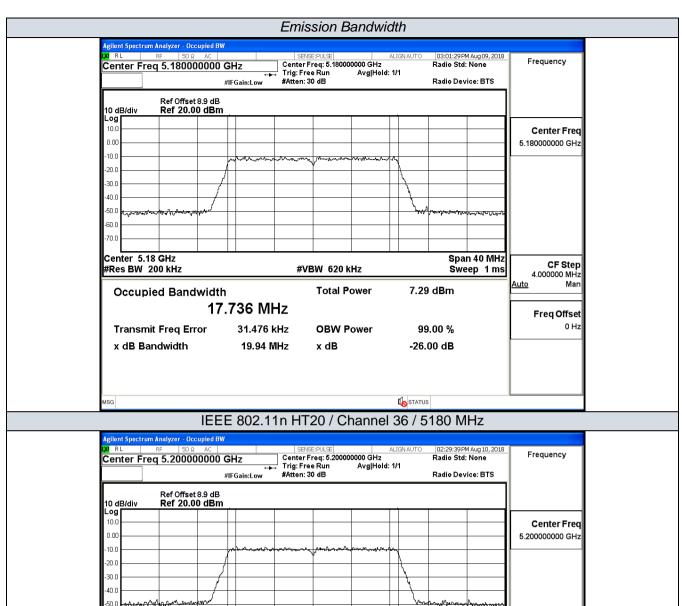


-60.0 Center 5.2 GHz Span 40 MHz CF Step #Res BW 200 kHz #VBW 620 kHz Sweep 1 ms 4.000000 MHz <u>Auto</u> Occupied Bandwidth **Total Power** 9.49 dBm 17.740 MHz Freq Offset 0 Hz Transmit Freq Error 27.936 kHz **OBW Power** 99.00 % x dB Bandwidth 19.99 MHz x dB -26.00 dB STATUS


IEEE 802.11n HT20 / Channel 40 / 5200 MHz

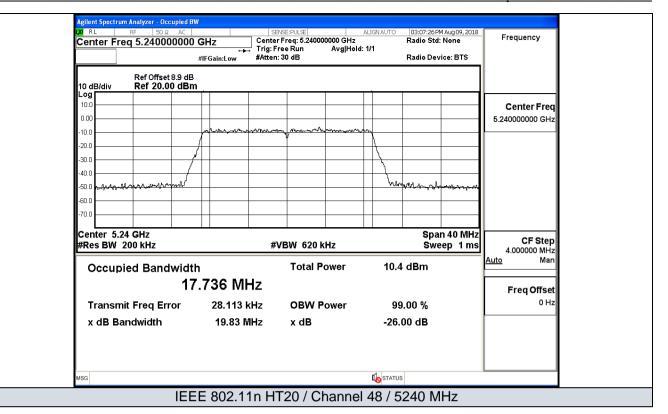

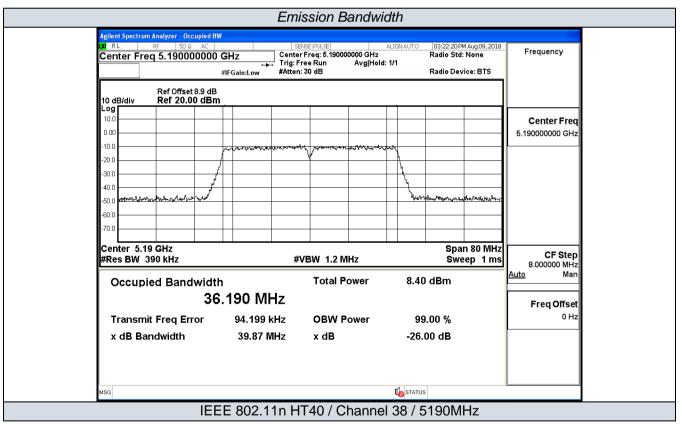


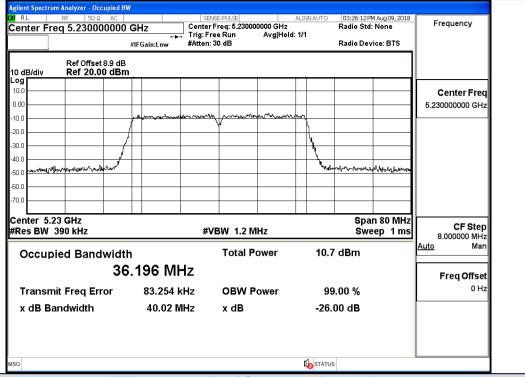


#### IEEE 802.11n HT40 / Channel 46 / 5230 MHz

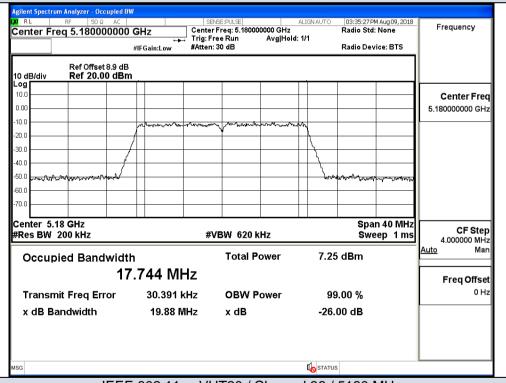


IEEE 802.11ac VHT20 / Channel 36 / 5180 MHz

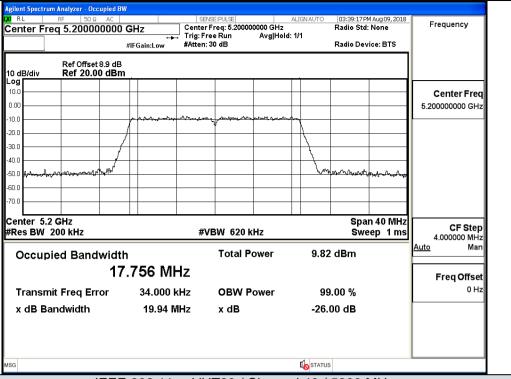


#### IEEE 802.11ac VHT20 / Channel 40 / 5200 MHz

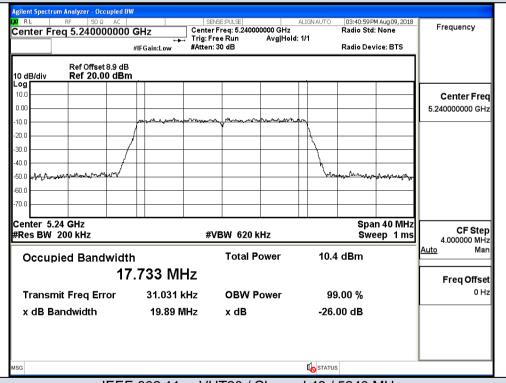

IEEE 802.11ac VHT20 / Channel 48 / 5240 MHz

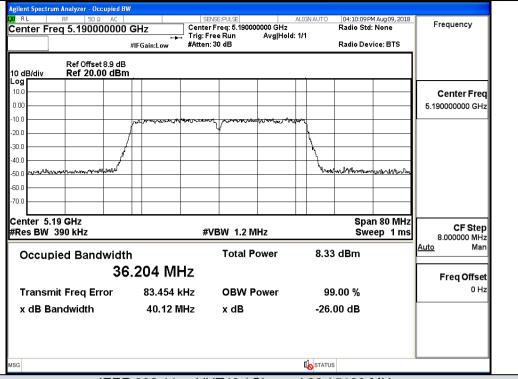

### IEEE 802.11ac VHT40 / Channel 38 / 5190 MHz

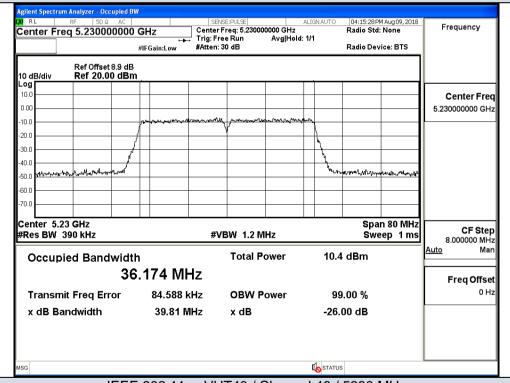

IEEE 802.11ac VHT40 / Channel 46 / 5230 MHz

IEEE 802.11ac VHT80 / Channel 42 / 5210 MHz


STATUS


## **C.5 Undesirable Emissions Measurement**


Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)
		4500.0	-50.605	3.000	0	47.623	Peak	68.20
	00	4500.0	-60.148	3.000	0	38.080	Average	54.00
	36	5150.0	-47.138	3.000	0	51.090	Peak	68.20
111		5150.0	-57.065	3.000	0	41.163	Average	54.00
11A		5350.0	-49.234	3.000	0	48.994	Peak	68.20
	40	5350.0	-59.517	3.000	0	38.711	Average	54.00
	48	5460.0	-49.675	3.000	0	48.553	Peak	68.20
	1	5460.0	-60.247	3.000	0	37.981	Average	54.00
		4500.0	-50.241	3.000	0	47.987	Peak	68.20
	26	4500.0	-60.139	3.000	0	38.089	Average	54.00
	36	5150.0	-47.736	3.000	0	50.492	Peak	68.20
11N20	1	5150.0	-57.589	3.000	0	40.639	Average	54.00
SISO		5350.0	-49.344	3.000	0	48.884	Peak	68.20
	10	5350.0	-59.527	3.000	0	38.701	Average	54.00
	48	5460.0	-48.814	3.000	0	49.414	Peak	68.20
	1	5460.0	-60.280	3.000	0	37.948	Average	54.00
	1	4500.0	-50.096	3.000	0	48.132	Peak	68.20
	00	4500.0	-60.143	3.000	0	38.085	Average	54.00
	38	5150.0	-46.840	3.000	0	51.388	Peak	68.20
11N40	1	5150.0	-57.225	3.000	0	41.003	Average	54.00
SISO		5350.0	-48.268	3.000	0	49.960	Peak	68.20
	100	5350.0	-59.328	3.000	0	38.900	Average	54.00
	46	5460.0	-48.666	3.000	0	49.562	Peak	68.20
	1	5460.0	-59.971	3.000	0	38.257	Average	54.00
		4500.0	-50.460	3.000	0	47.768	Peak	68.20
	000	4500.0	-60.167	3.000	0	38.061	Average	54.00
	36	5150.0	-48.183	3.000	0	50.045	Peak	68.20
11AC20	1	5150.0	-57.622	3.000	0	40.606	Average	54.00
SISO		4500.0	-49.971	3.000	0	48.257	Peak	68.20
	40	4500.0	-59.479	3.000	0	38.749	Average	54.00
	48	5150.0	-50.681	3.000	0	47.547	Peak	68.20
	1	5150.0	-60.243	3.000	0	37.985	Average	54.00
		4500.0	-50.719	3.000	0	47.509	Peak	68.20
	20	4500.0	-60.164	3.000	0	38.064	Average	54.00
	38	5150.0	-47.456	3.000	0	50.772	Peak	68.20
11AC40	1	5150.0	-57.235	3.000	0	40.993	Average	54.00
SISO		5350.0	-48.472	3.000	0	49.756	Peak	68.20
	10	5350.0	-59.306	3.000	0	38.922	Average	54.00
	46	5460.0	-50.171	3.000	0	48.057	Peak	68.20
	1	5460.0	-59.961	3.000	0	38.267	Average	54.00
		4500.0	-49.981	3.000	0	48.247	Peak	68.20
11AC80	42	5150.0	-60.160	3.000	0	38.068	Average	54.00
SISO	72	4500.0	-44.458	3.000	0	53.770	Peak	68.20
		5150.0	-53.656	3.000	0	44.572	Average	54.00


Page 22 of 35


SHENZHEN LCS COMP	LIANCE TESTINO	<u>G LABORATORY I</u>	LTD. FC	C ID: 2AIKX-T90	BPRO Repo	ort No.: LCS180	630056AEC
	5350.0	-49.649	3.000	0	48.579	Peak	68.20
	5460.0	-58.297	3.000	0	39.931	Average	54.00
	5350.0	-50.145	3.000	0	48.083	Peak	68.20
	5460.0	-58.981	3.000	0	39.247	Average	54.00

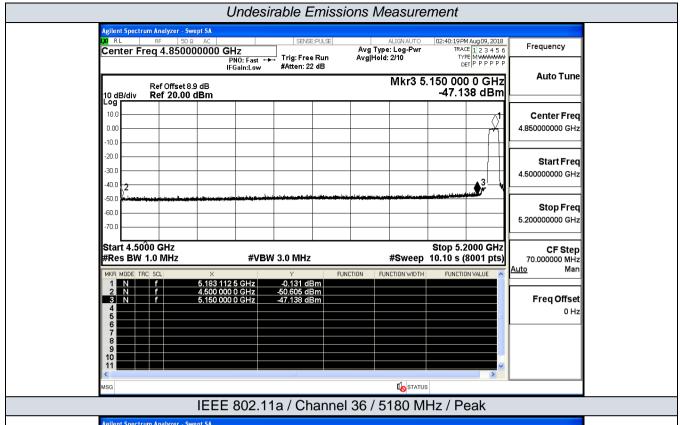


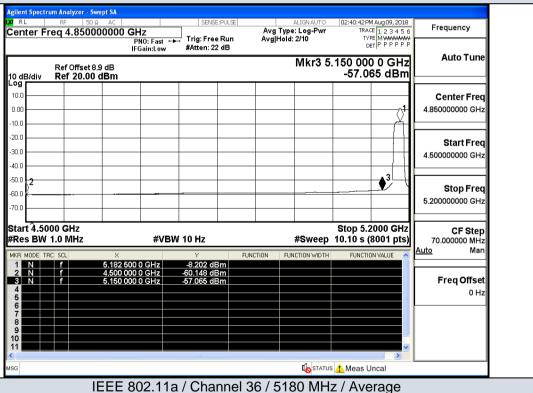

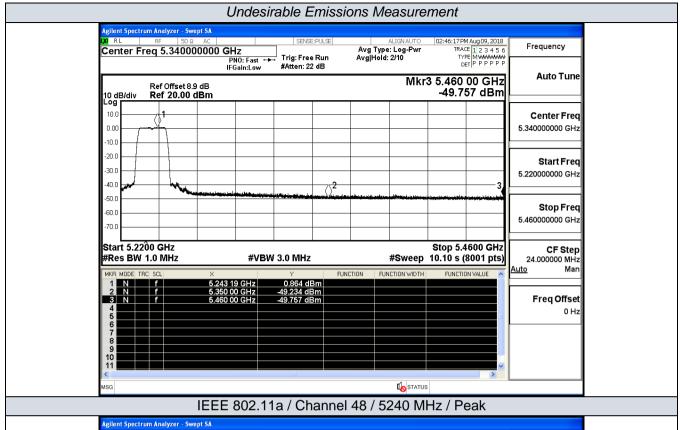


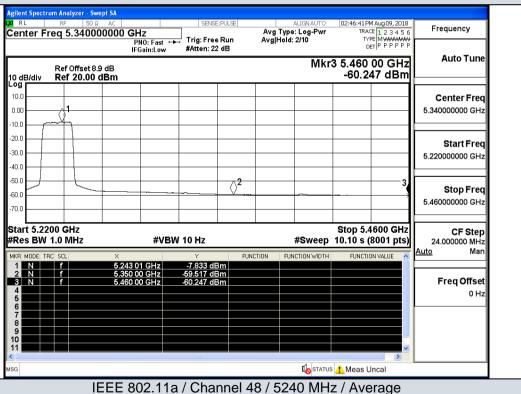


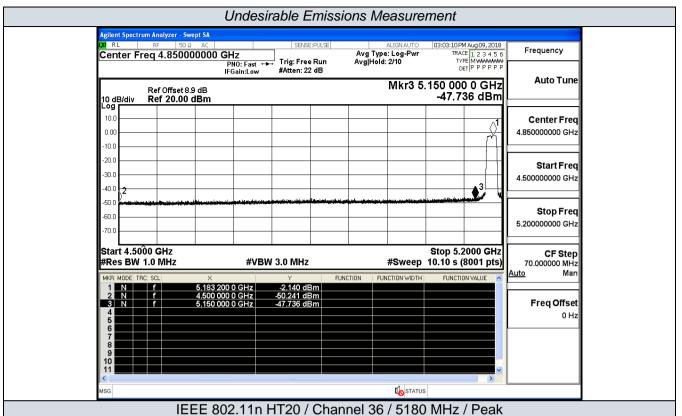


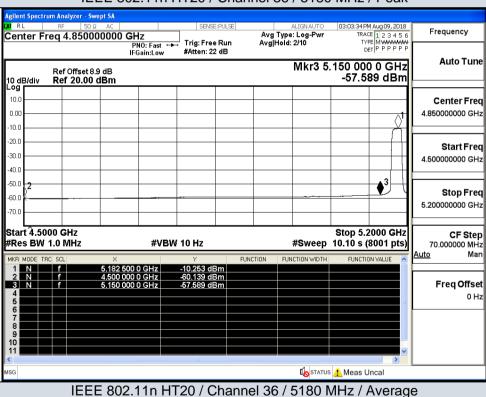


Page 26 of 35

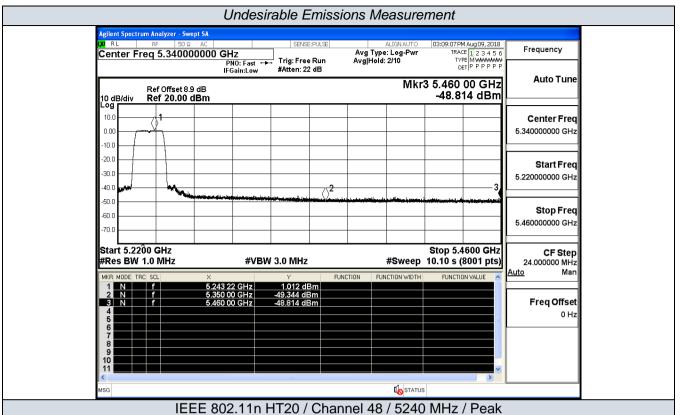


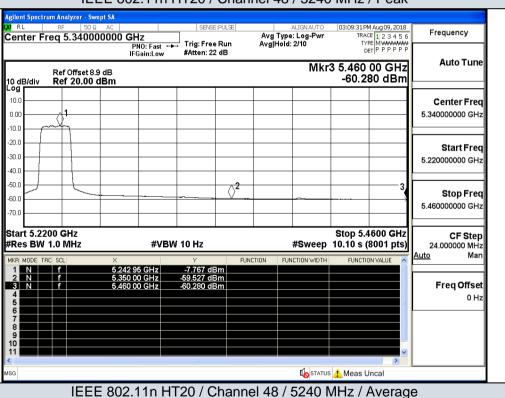


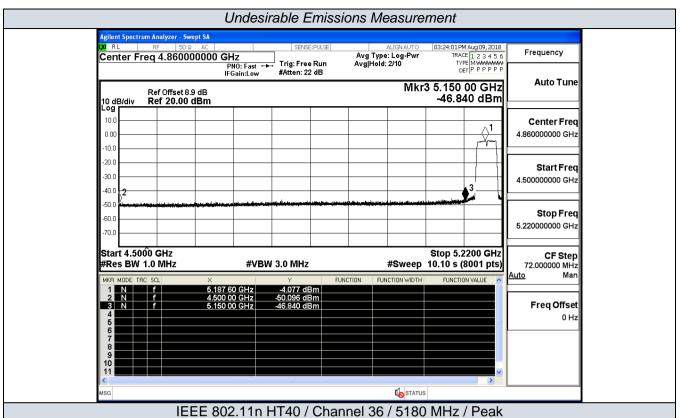


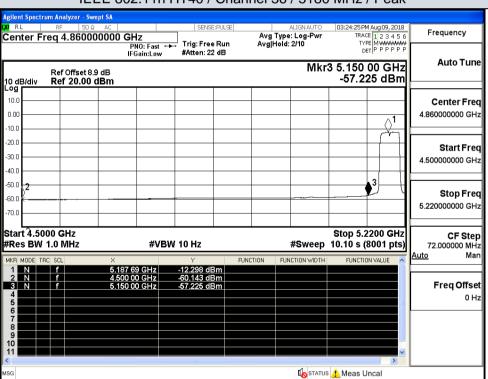


IEEE 802.11n HT40 / Channel 36 / 518 0MHz / Average

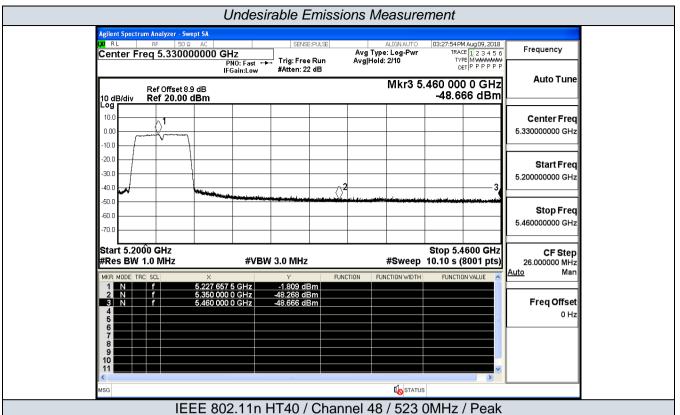

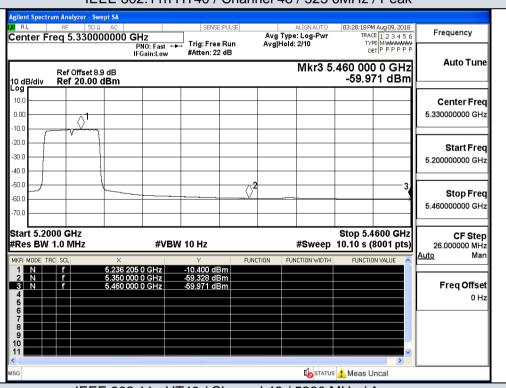


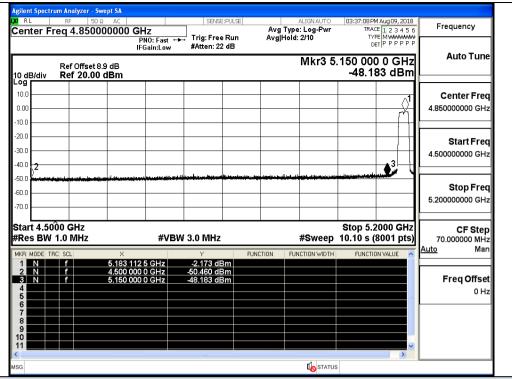


IEEE 802.11ac VHT20 / Channel 36 / 5180 MHz / Peak

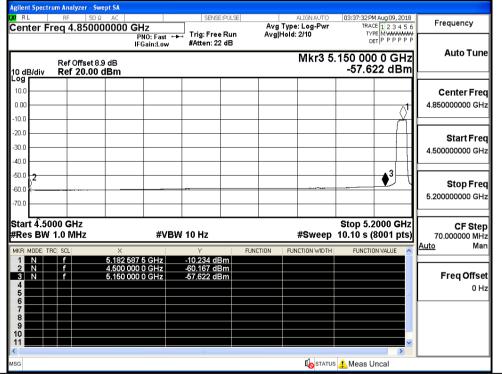


IEEE 802.11ac VHT20 / Channel 36 / 5180 MHz / Average

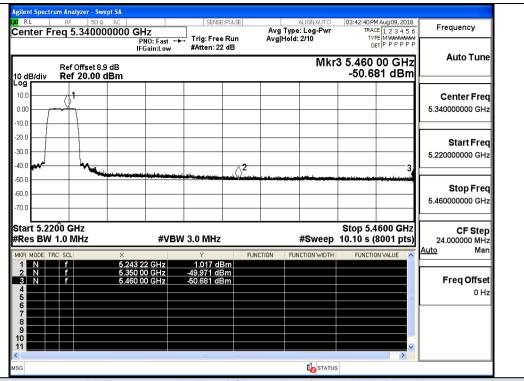


IEEE 802.11ac VHT20 / Channel 48 / 5240 MHz / Peak

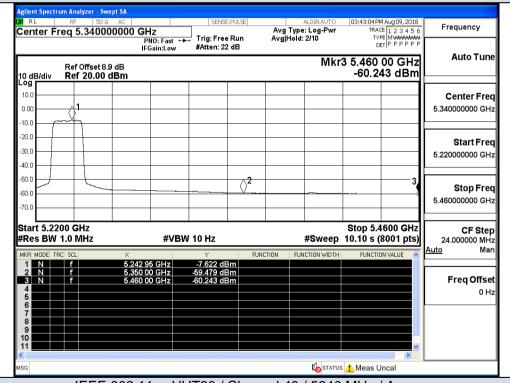


IEEE 802.11ac VHT20 / Channel 48 / 5240 MHz / Average

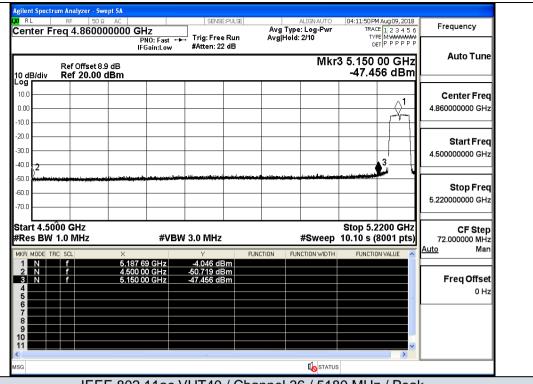


IEEE 802.11ac VHT40 / Channel 36 / 5180 MHz / Peak

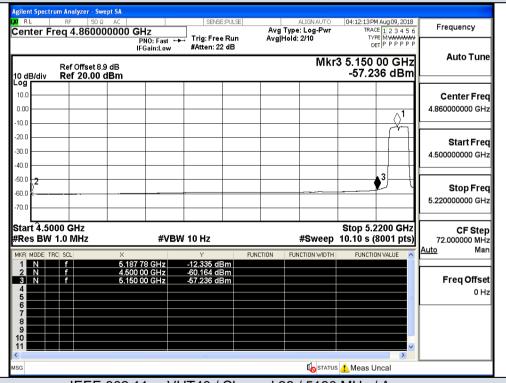


IEEE 802.11ac VHT40 / Channel 36 / 5180 MHz / Average

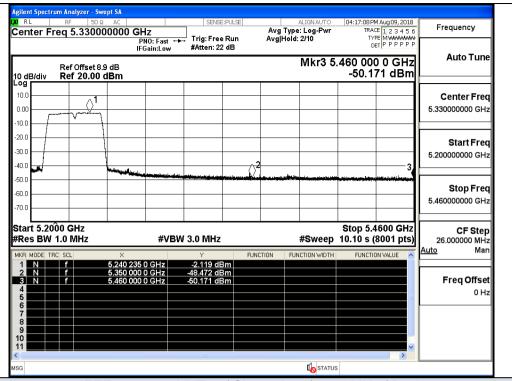



IEEE 802.11ac VHT40 / Channel 48 / 5230 MHz / Peak

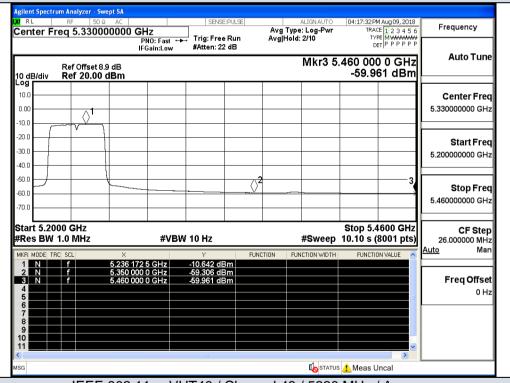


IEEE 802.11ac VHT40 / Channel 48 / 5230 MHz / Average

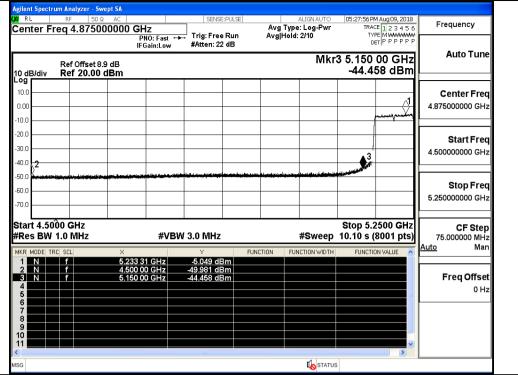




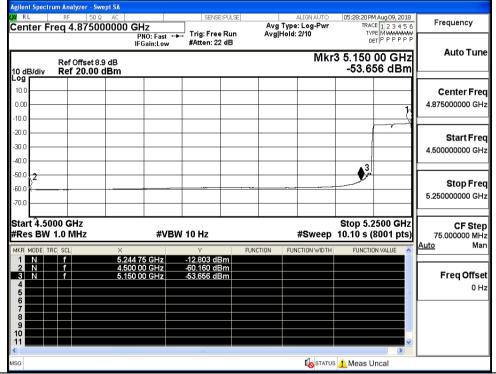

IEEE 802.11ac VHT80 / Channel 42 / 5210 MHz / Average

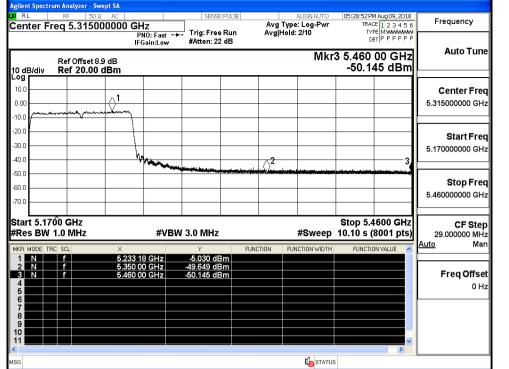

IEEE 802.11ac VHT80 / Channel 42/ 5210 MHz / Peak

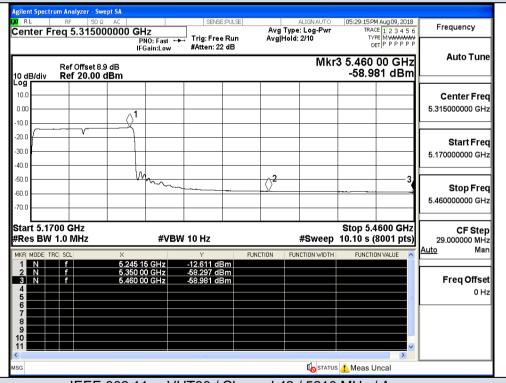

IEEE 802.11ac VHT80 / Channel 42 / 5210 MHz / Average