

---

# FCC Test Report

---

Report No.: AGC08073191001FE06

**FCC ID** : 2AIL4-BH269A  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : FM Transmitter  
**BRAND NAME** : victsing  
**MODEL NAME** : BH269A, BH269B, BH269C  
**APPLICANT** : VTIN TECHNOLOGY CO.,LIMITED  
**DATE OF ISSUE** : Nov. 29, 2019  
**STANDARD(S)** : FCC Part 15.239  
**REPORT VERSION** : V1.0

Attestation of *Global Compliance*(Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 29, 2019	Valid	Initial Release



## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION .....	5
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>5</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>5</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
5.1. EQUIPMENT USED IN EUT SYSTEM.....	7
5.2. SUMMARY OF TEST RESULTS .....	7
<b>6. TEST FACILITY .....</b>	<b>8</b>
<b>7. RADIATED EMISSION .....</b>	<b>9</b>
7.1. MEASUREMENT PROCEDURE .....	9
7.2. TEST SETUP .....	10
7.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL.....	11
7.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION.....	11
7.5. TEST RESULT FOR SPURIOUS EMISSION.....	12
<b>8. BANDWIDTH .....</b>	<b>14</b>
8.1. MEASUREMENT PROCEDURE .....	14
8.2. TEST SETUP .....	14
8.3. TEST RESULT .....	15
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>17</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>18</b>

## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	VTIN TECHNOLOGY CO., LIMITED
<b>Address</b>	UNIT D 16/F ONE CAPITAL PLACE 21 LUARD ROAD WAN CHAI HK
<b>Manufacturer</b>	VTIN TECHNOLOGY CO., LIMITED
<b>Address</b>	UNIT D 16/F ONE CAPITAL PLACE 21 LUARD ROAD WAN CHAI HK
<b>Factory</b>	SHENZHEN LEADINWAY TECHNOLOGY CO., LTD
<b>Address</b>	Block 29, Baotian Industrial Zone, Chentian, Xixiang Town, Baoan District, Shenzhen China
<b>Product Designation</b>	FM Transmitter
<b>Brand Name</b>	victsing
<b>Test Model</b>	BH269A
<b>Series Model</b>	BH269B, BH269C
<b>Difference description</b>	All the same except for the model name
<b>Date of test</b>	Oct.21, 2019 to Nov.29, 2019
<b>Condition of Test Sample</b>	Normal
<b>Test Result</b>	Pass
<b>Report Template</b>	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.239.

Prepared By



John Zeng  
Project Engineer

Nov. 29, 2019

Reviewed By



Max Zhang  
Reviewer

Nov. 29, 2019

Approved By



Forrest Lei  
Authorized Officer

Nov. 29, 2019



## 2. GENERAL INFORMATION

### 2.1.PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	88.1MHz-107.9MHz
Field Strength(3m)	44.87dBuV/m(average)@3m
Modulation	FM
Number of channels	199(Channel spacing 100kHz)
Hardware Version	BC51T_POWER_20190808_V1.2
Software Version	2819_YHW_BC51_20190712_V2.6_LY
Antenna Designation	Internal Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 12V to 24V

**NOTE:** About the EUT, please refer to User's Manual.

## 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 3.18dB

Radiated measurement: +/- 3.91dB

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Sim TX BT Low channel GFSK + FM Low channel
2	Sim TX BT Middle channel GFSK+ FM Low channel
3	Sim TX BT High channel GFSK+ FM Low channel
4	Sim TX BT Low channel $\pi/4$ -DQPSK+ FM Low channel
5	Sim TX BT Middle channel $\pi/4$ -DQPSK+ FM Low channel
6	Sim TX BT High channel $\pi/4$ -DQPSK+ FM Low channel
7	Sim TX BT Low channel 8DPSK + FM Low channel
8	Sim TX BT Middle channel 8DPSK + FM Low channel
9	Sim TX BT High channel 8DPSK + FM Low channel
10	Sim TX BT Low channel GFSK + FM Middle channel
11	Sim TX BT Middle channel GFSK+ FM Middle channel
12	Sim TX BT High channel GFSK+ FM Middle channel
13	Sim TX BT Low channel $\pi/4$ -DQPSK+ FM Middle channel

14	Sim TX BT Middle channel $\pi/4$ -DQPSK+ FM Middle channel
15	Sim TX BT High channel $\pi/4$ -DQPSK+ FM Middle channel
16	Sim TX BT Low channel 8DPSK + FM Middle channel
17	Sim TX BT Middle channel 8DPSK + FM Middle channel
18	Sim TX BT High channel 8DPSK + FM Middle channel
19	Sim TX BT Low channel GFSK + FM High channel
20	Sim TX BT Middle channel GFSK+ FM High channel
21	Sim TX BT High channel GFSK+ FM High channel
22	Sim TX BT Low channel $\pi/4$ -DQPSK+ FM High channel
23	Sim TX BT Middle channel $\pi/4$ -DQPSK+ FM High channel
24	Sim TX BT High channel $\pi/4$ -DQPSK+ FM High channel
25	Sim TX BT Low channel 8DPSK + FM High channel
26	Sim TX BT Middle channel 8DPSK + FM High channel
27	Sim TX BT High channel 8DPSK + FM High channel
<p>Note: 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.</p> <p>2. All the requirements have been tested by modulating the transmitter with a 2.5 kHz tone at a fixed level which set to the manufacturer's maximum rated input to the modulator.</p> <p>3. Only the result of the worst case was recorded in the report, if no other cases.</p> <p>4. Tuning-Range confirmed 88.1 ~ 107.9 MHz</p>	



## 5. SYSTEM TEST CONFIGURATION

### 5.1. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	FM Transmitter	BH269A	2AIL4-BH269A	EUT
2	Car battery	N/A	12V 60Ah	AE
3	Car battery	N/A	12V 60Ah	AE
4	Load	N/A	2ohm	AE
5	Load	N/A	4ohm	AE
6	Control Box	N/A	USB-TTL	AE

### 5.2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.239	Field Strength of Fundamental and Spurious Emission	Compliant
15.215	Bandwidth	Compliant
15.209	Line Conducted Emission	N/A

Note: N/A means it's not applicable to this item.



## 6. TEST FACILITY

<b>TestSite</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd
<b>Location</b>	1-2/F,Building19,JunfengIndustrialPark,ChongqingRoad,HepingCommunity,Fuhai Street,Bao'anDistrict,Shenzhen,Guangdong,China
<b>Designation Number</b>	CN1259
<b>FCC Test Firm Registration Number</b>	975832
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Attenuator	ZHINAN	E-002	N/A	Sep. 09, 2019	Sep. 08, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 13, 2018	Jun. 12, 2020
ANTENNA	SCHWARZBECK	VULB9168	494	Sep. 20, 2019	Sep. 19, 2021
Test software	FARA	EZ EMC( Ver. RA-03A)	N/A	N/A	N/A





## 7. RADIATED EMISSION

### 7.1. MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground and opposite the horn antenna. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
8. Only the worst case is reported.

The following table is the setting of spectrum analyzer and receiver.


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

## 7.2.TEST SETUP

### Radiated Emission Test-Setup Frequency Below 30MHz

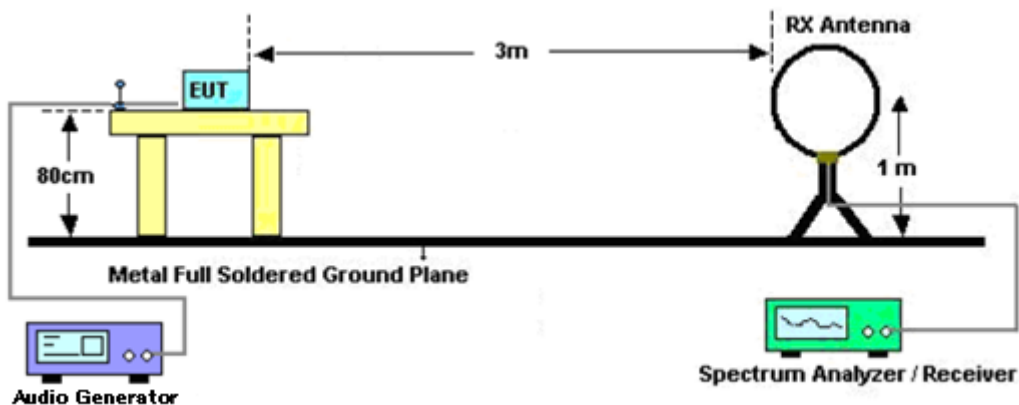

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

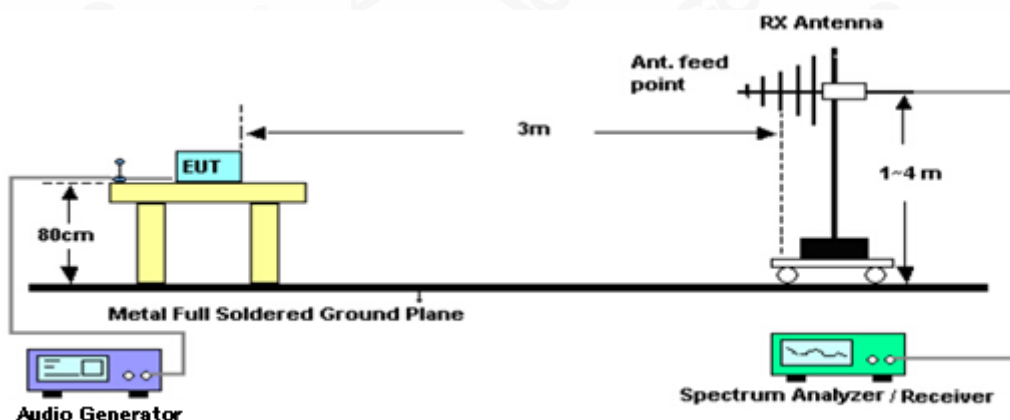

### 7.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL

Frequency MHz	Polarization	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail	Detector
88.100	H	46.15	67.96	21.81	Pass	PK
88.100	V	43.34	67.96	24.62	Pass	PK
98.000	H	45.67	67.96	22.29	Pass	PK
98.000	V	42.71	67.96	25.25	Pass	PK
107.900	H	45.62	67.96	22.34	Pass	PK
107.900	V	42.66	67.96	25.30	Pass	PK
Frequency MHz	Polarization	Level dB(uV/m) AV	Limit dB(uV/m) AV	Margin dB	Pass/Fail	Detector
88.100	H	44.53	47.96	3.43	Pass	AV
88.100	V	42.85	47.96	5.11	Pass	AV
98.000	H	44.87	47.96	3.09	Pass	AV
98.000	V	41.92	47.96	6.04	Pass	AV
107.900	H	44.67	47.96	3.29	Pass	AV
107.900	V	43.53	47.96	4.43	Pass	AV

### 8.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION

Frequency MHz	Polarization	Level dB(uV/m) QP	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Detector
88.000	H	34.43	40	5.57	Pass	QP
88.000	V	32.85	40	7.15	Pass	QP
108.000	H	35.18	43.5	8.32	Pass	QP
108.000	V	30.31	43.5	13.19	Pass	QP


Note: The above two frequencies are the worst case for the band edge emission test.

## 7.5. TEST RESULT FOR SPURIOUS EMISSION

### RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

### RADIATED EMISSION BELOW 1GHZ-Horizontal

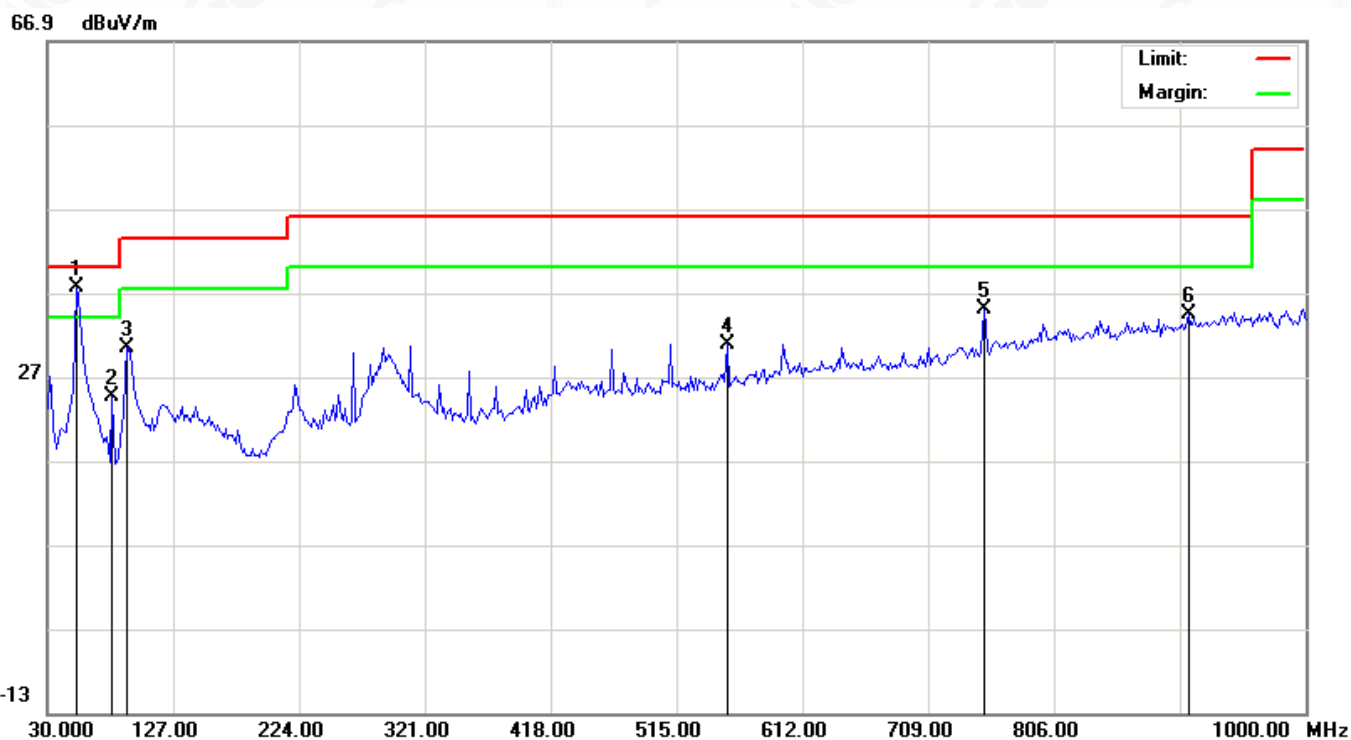


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6333	18.11	19.50	37.61	40.00	-2.39	peak			
2		80.1167	9.60	14.94	24.54	40.00	-15.46	peak			
3		91.4333	15.37	15.13	30.50	43.50	-13.00	peak			
4		553.8000	4.84	26.04	30.88	46.00	-15.12	peak			
5		752.6500	5.64	29.34	34.98	46.00	-11.02	peak			
6		909.4667	2.71	31.78	34.49	46.00	-11.51	peak			

RESULT: PASS



### RADIATED EMISSION BELOW 1GHZ-Vertical

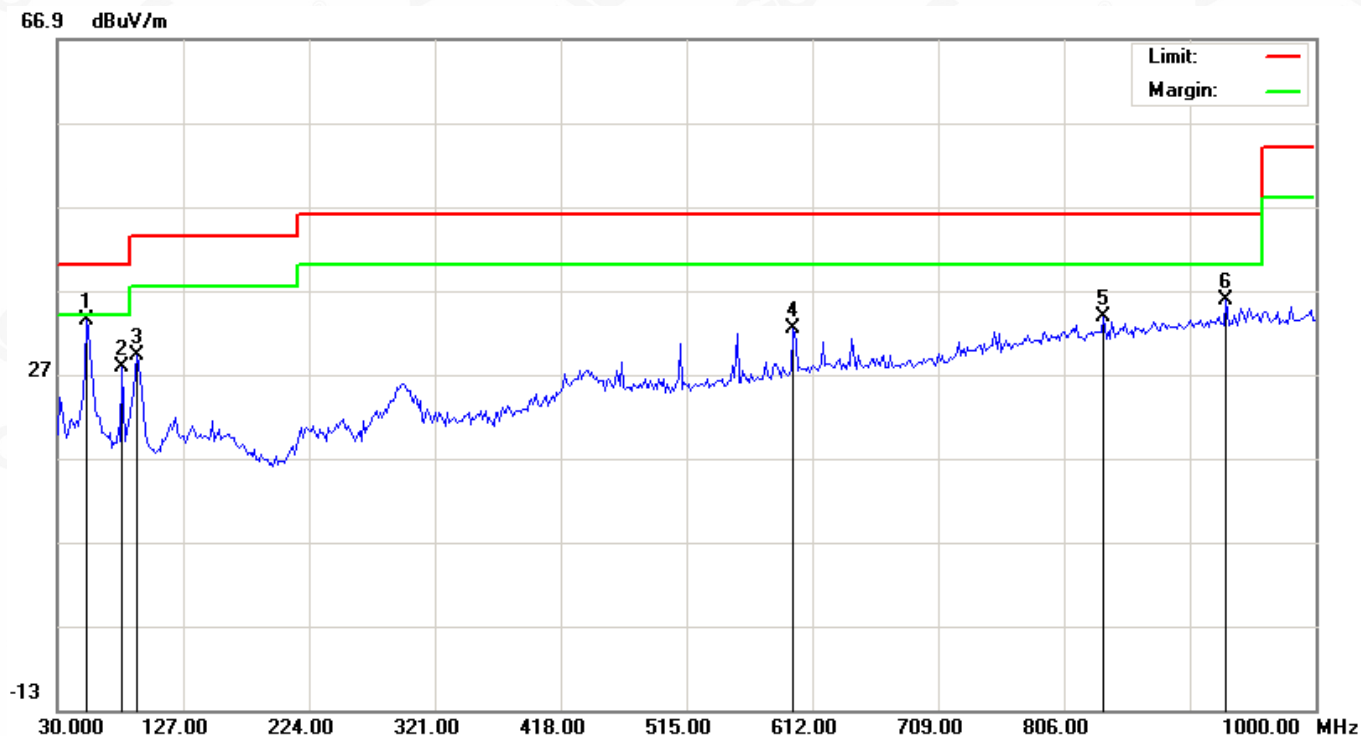

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6333	13.95	19.50	33.45	40.00	-6.55	peak			
2		80.1167	12.83	14.94	27.77	40.00	-12.23	peak			
3		91.4333	14.01	15.13	29.14	43.50	-14.36	peak			
4		597.4500	5.58	26.90	32.48	46.00	-13.52	peak			
5		836.7167	2.92	30.88	33.80	46.00	-12.20	peak			
6		930.4833	3.83	31.96	35.79	46.00	-10.21	peak			

### RESULT: PASS

**Note:** 1. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All test modes had been tested. The mode 9 is the worst case and recorded in the report.

## 8. BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centrefrequency = Operation Frequency

RBW=3KHz

VBW=10KHz

Span: 300kHz

Sweep time: Auto

For the occupied bandwidth measurements, the input signal shall be a 2.5 kHz tone.


☐ The level of the tone shall be 16 dB higher than that required to produce a frequency deviation of 75 kHz, or 50% of the manufacturer's rated deviation, whichever is less.

☒ Alternatively, in the event that a 16 dB increase cannot be achieved, the level of the tone shall be set to the manufacturer's maximum rated input to the modulator.

2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.

3. Record the plots and Reported.


### 8.2. TEST SETUP

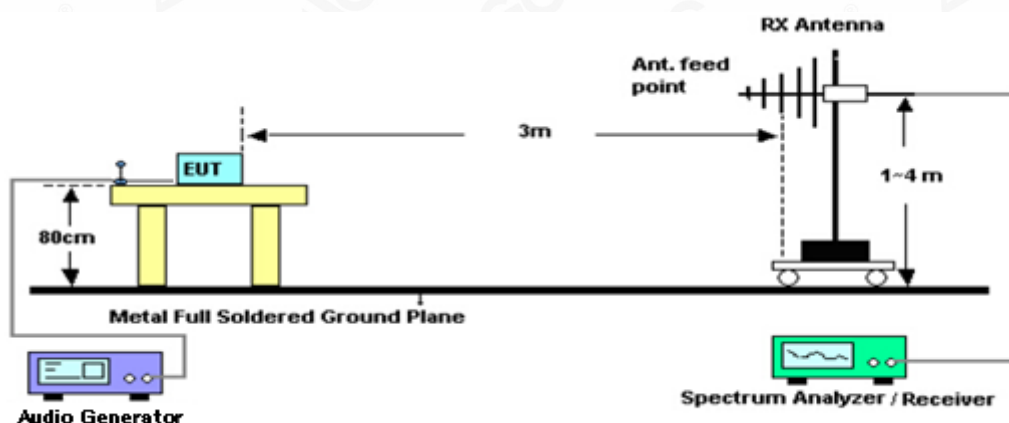


### 8.3. TEST RESULT

Channel	Channel Frequency(MHz)	-20dB bandwidth (kHz)	Limit(kHz)
Low	88.1	173.2	200
Middle	98.0	159.7	200
High	107.9	159.2	200


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

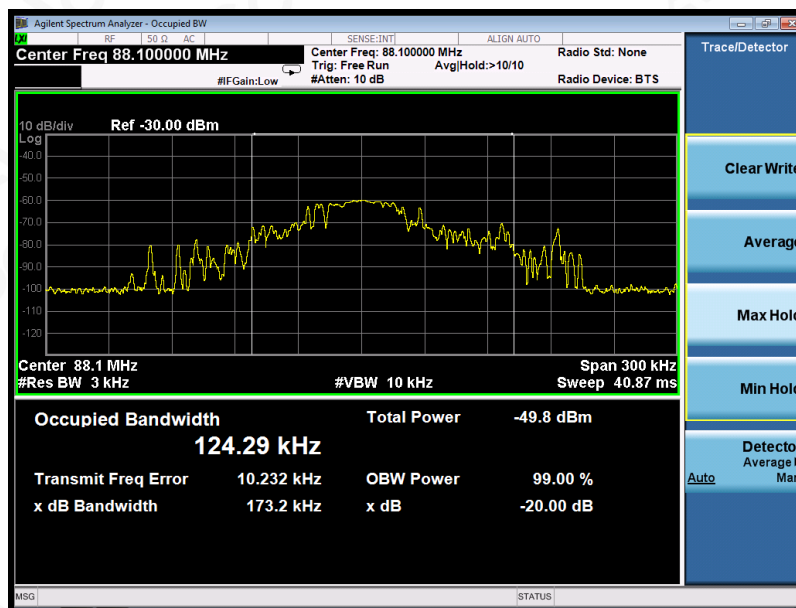

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

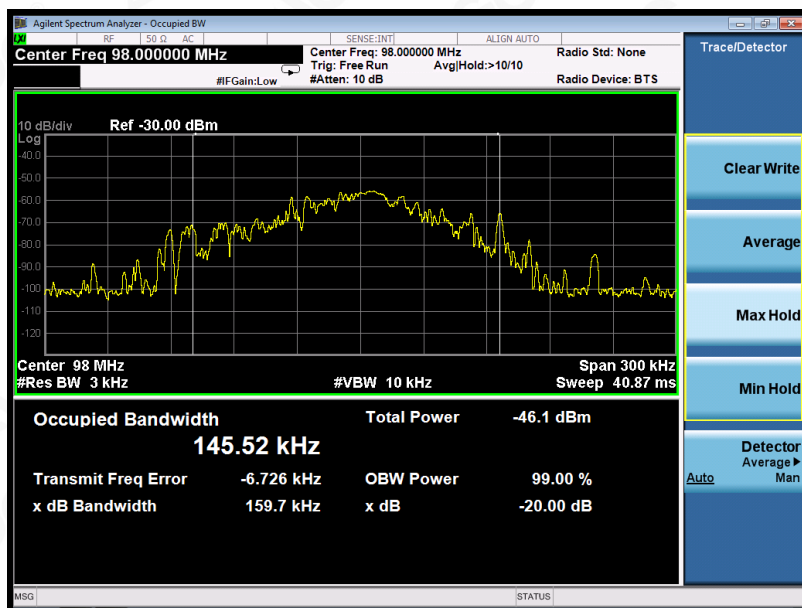

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

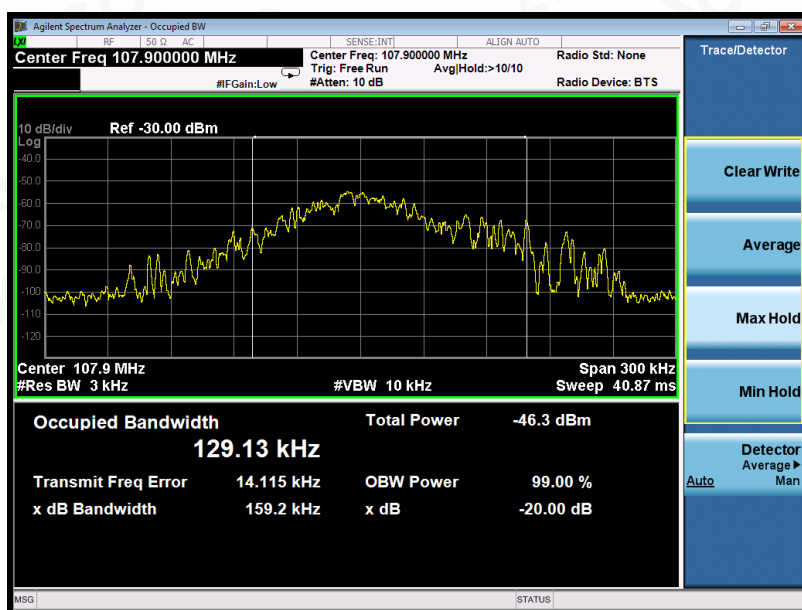




## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### RADIATED EMISSION TEST SETUP BELOW 1G




RADIATED EMISSION TEST SETUP Above 1G

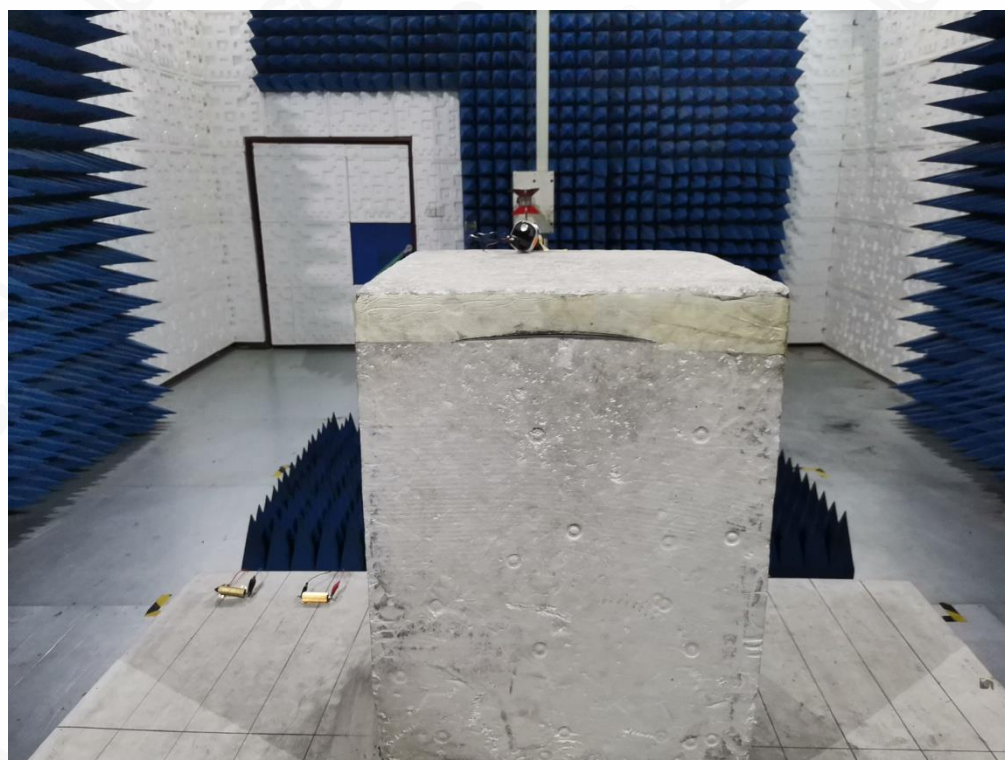



## APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

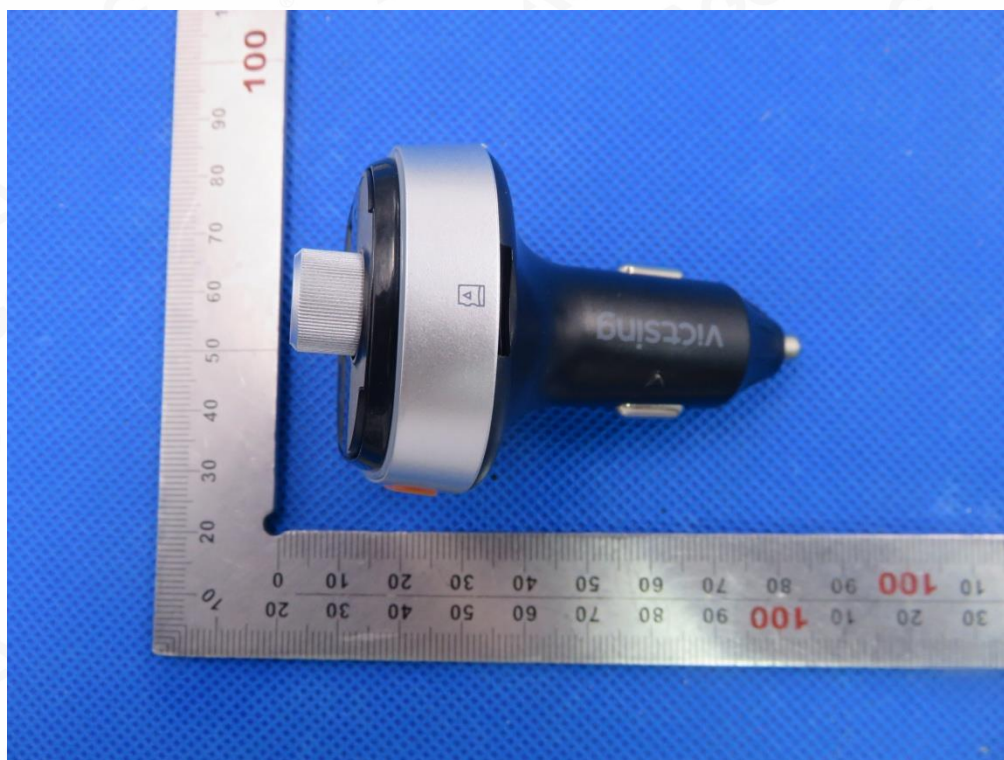

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT






LEFT VIEW OF EUT

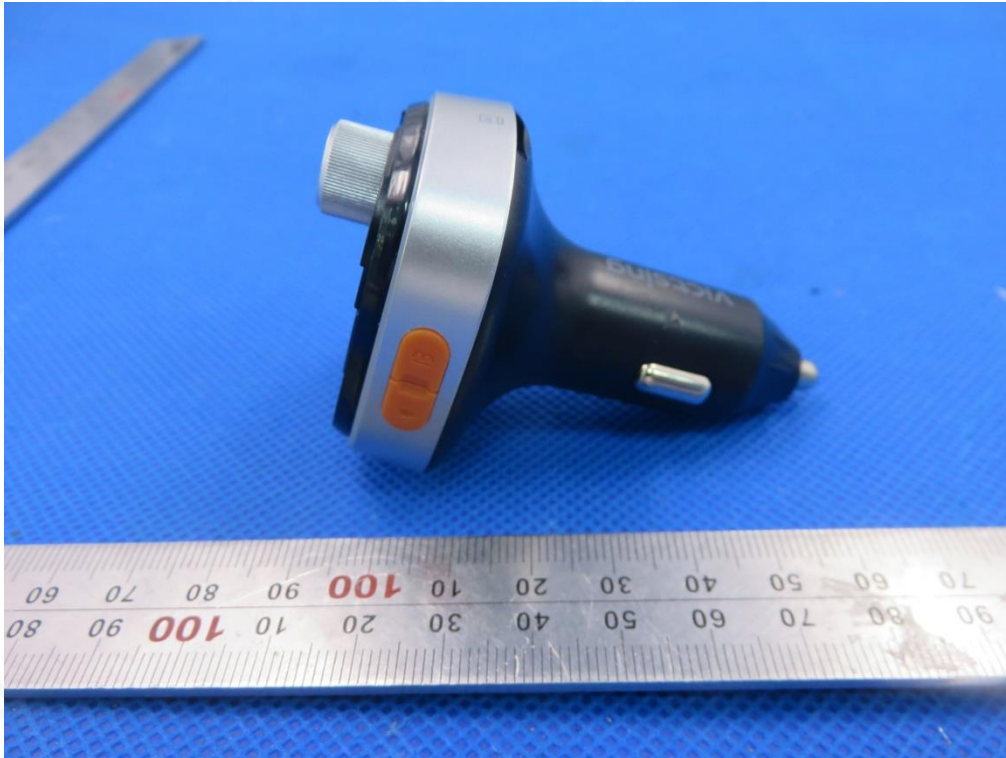

RIGHT VIEW OF EUT

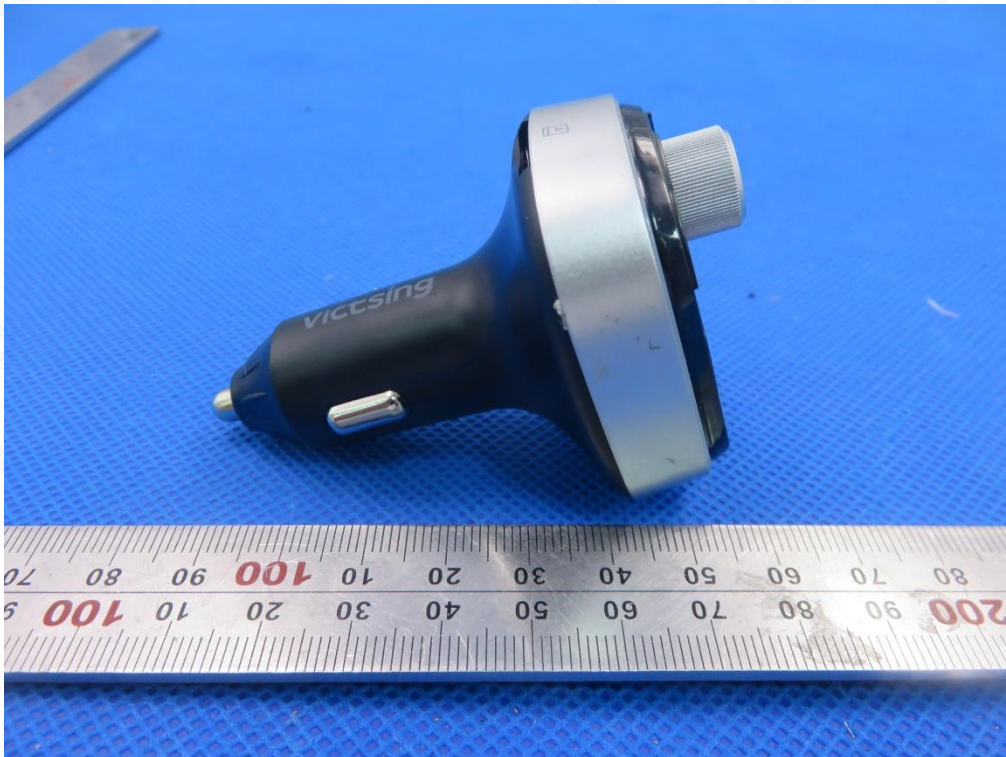




VIEW OF EUT(PORT)-1




VIEW OF EUT(PORT)-2



OPEN VIEW OF EUT

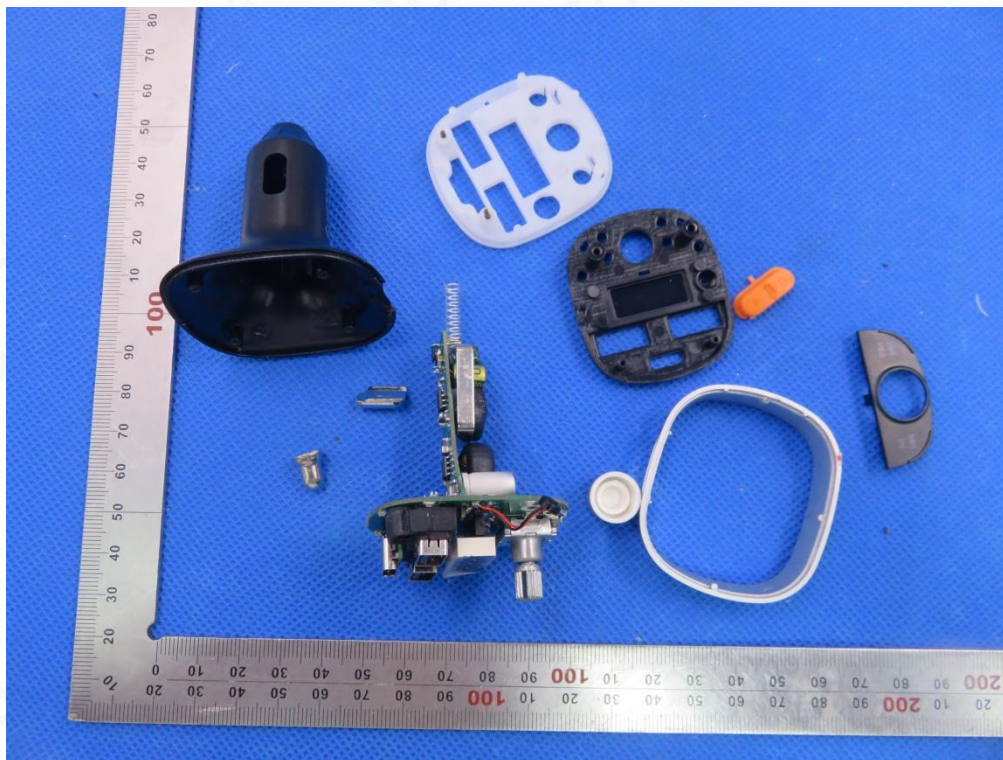


INTERNAL VIEW OF EUT-1

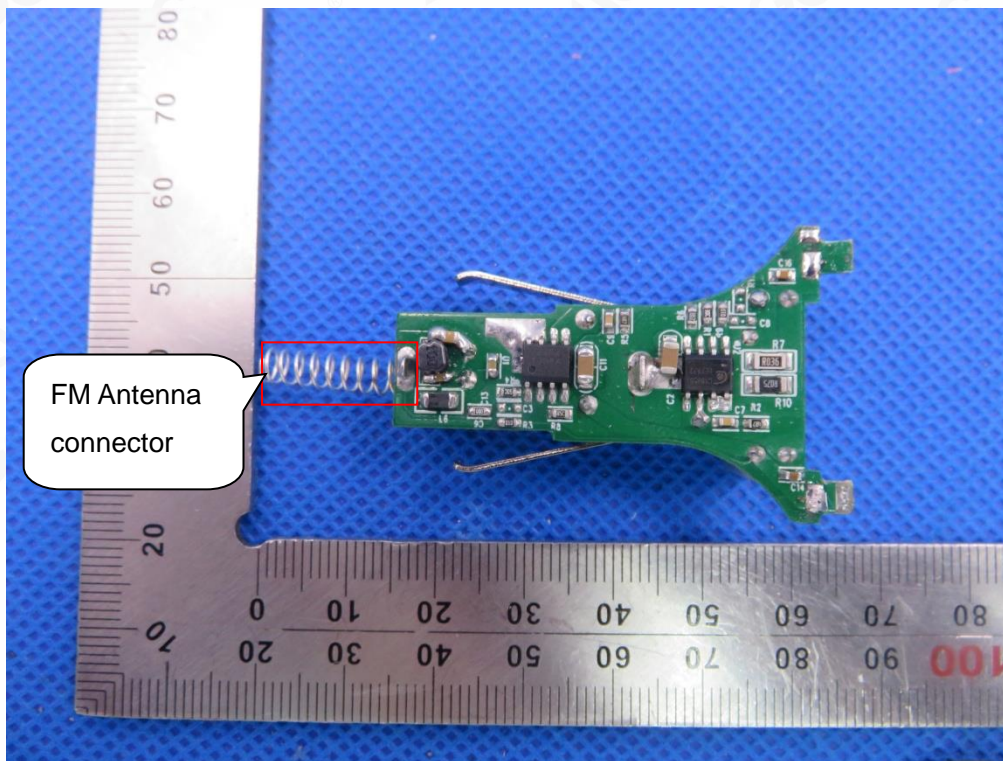




INTERNAL VIEW OF EUT-2

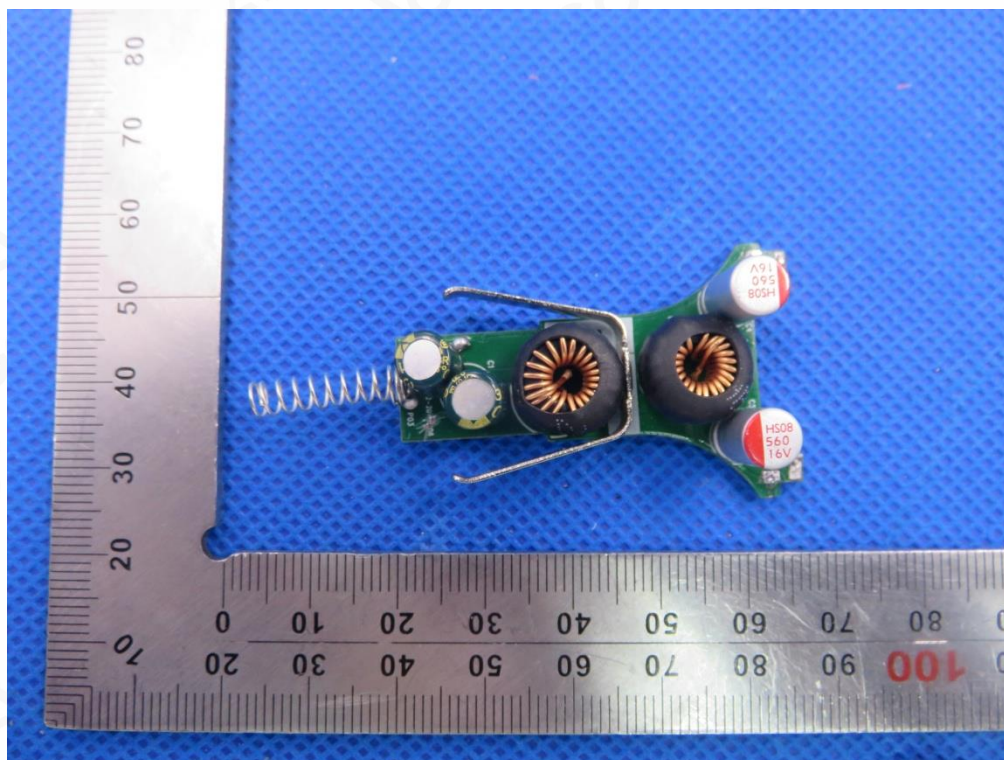


INTERNAL VIEW OF EUT-3

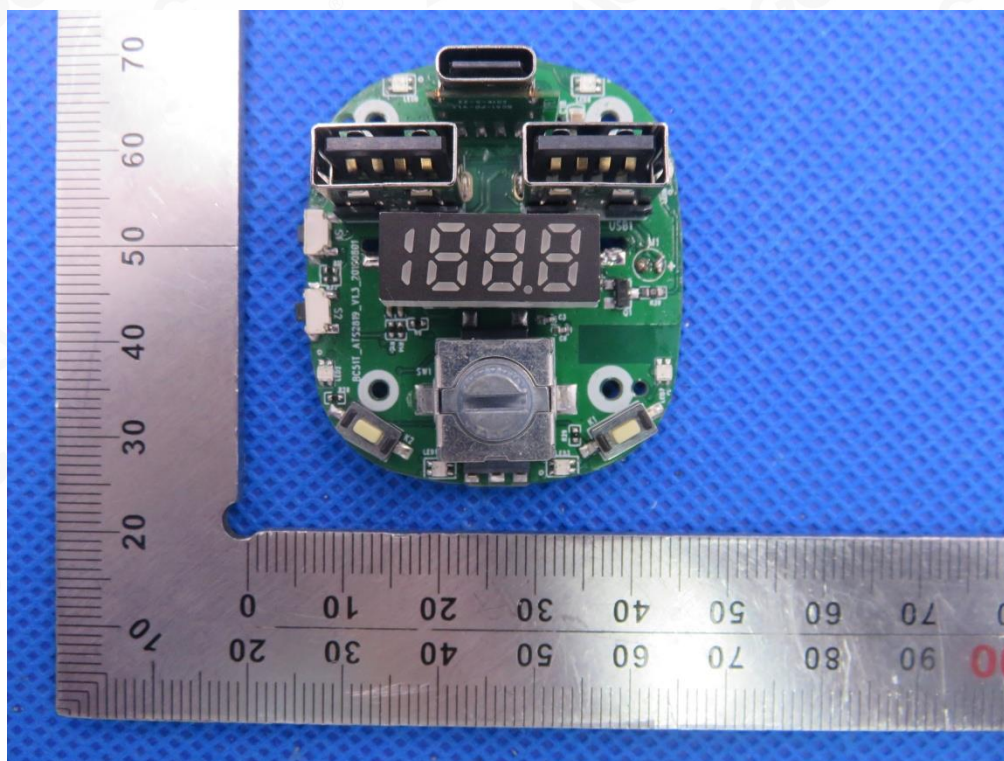




INTERNAL VIEW OF EUT-4

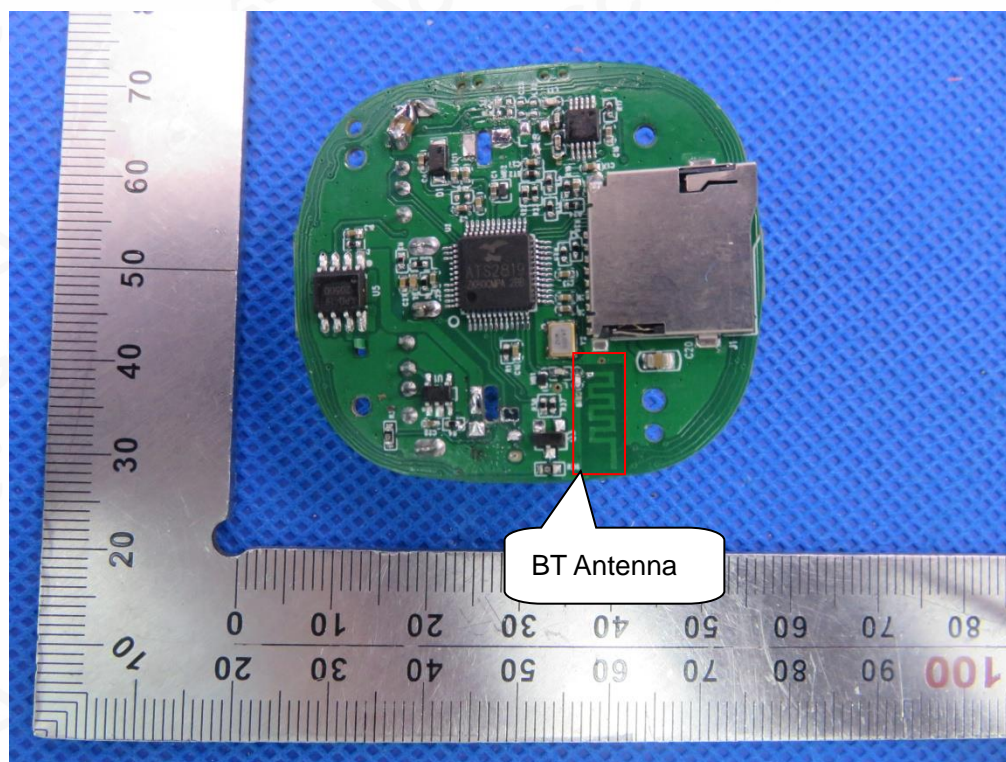

INTERNAL VIEW OF EUT-5

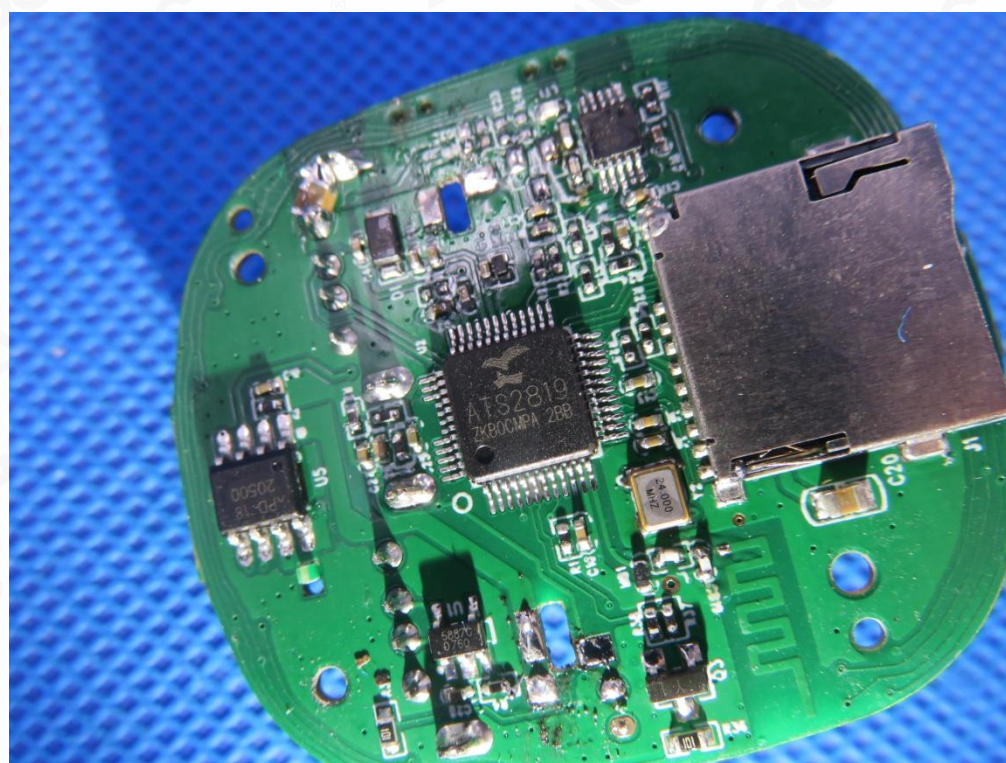

----END OF REPORT----