



Report No: FCC 1609149
File reference No: 2016-10-10

Applicant: Guangdong Samzuk Technology & Development Co.,Ltd

Product: 20 Channel Intercom

Model No: FTAN20AA,FTAN20AB, FTAN20AC,FTAN20AD

Trademark: **SAMCOM** 

Test Standards: FCC Part 95, Subpart B and Subpart E;

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 95, Subpart B and Subpart E; regulations for the evaluation of electromagnetic

compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Oct 10, 2016

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1609149 Page 2 of 54

Date: 2016-10-10



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

# **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

# IC-Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 54

Report No.: FCC1609149

Date: 2016-10-10



# **Test Report Conclusion**

# Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
6.0	Frequency Tolerance.	12
7.0	EMISSION BANDWIDTH and Mask	15
8.0	UNWANTED RADIATION	24
9.0	Modulation Characteristics.	27
10.0	MAXIMUM TRANSMITTER POWER	31
11.0	Radiated Emission on Receiving Mode.	31
12.0	FCC ID Label.	33
13.0	Photo of testing	35

Report No.: FCC1609149 Page 4 of 54

Date: 2016-10-10



#### **General Details** 1.0

#### 1.1 Test Lab Details

SHENZHEN TIMEWAY TESTING LABORATORIES. Name:

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

### 1.2 Applicant Details

Applicant: Guangdong Samzuk Technology Development Co,Ltd Address: High-Tech Zone Xinggong Avenue East Heyuan City

Telephone: 0762-3116133 Fax: 0762-3116833

# 1.3 Description of EUT

20 channel intercom Product:

Manufacturer: Guangdong Samzuk Technology Development Co,Ltd Address: High-Tech Zone Xinggong Avenue East Heyuan City

**Brand Name:** SAMCOM

Additional Brand Name: N/A

Model Number: FTAN20AA

Additional Model Number: FTAN20AB, FTAN20AC,FTAN20AD

Type of Modulation FM Report No.: FCC1609149 Page 5 of 54

Date: 2016-10-10



Frequency List: Note: CH0 to CH13 are FRS and CH14 to CH19 are GMRS

СНО	462.6625MHz	CH1	467.7125MHz	CH2	467.6875MHz	СНЗ	467.6625MHz
CH4	467.6375MHz	CH5	467.6125MHz	СН6	467.5875MHz	CH7	467.5625MHz
CH8	462.7125MHz	СН9	462.6875MHz	CH10	462.6375MHz	CH11	462.6125MHz
CH12	462.5875MHz	CH13	462.5625MHz	CH14	462.7250MHz	CH15	462.7000MHz
CH16	462.6750MHz	CH17	462.6500MHz	CH18	462.6250MHz	CH19	462.6000MHz

Antenna: Integral antenna with Gain 2.0 dBi

Rating: Input: DC5V, 1.0A Model No.: R1018 Power Supply:

Input: 100-240V, 50/60Hz, 0.3A Max; Output: 5V, 1000mA

Submitted Sample: 2 Samples

1.5 Test Duration

2016-09-26 to 2016-10-09

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Report No.: FCC1609149 Page 6 of 54

Date: 2016-10-10



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
TWO	R&S	EZH3-Z5	100294	2016-08-20	2017-08-29
Line-V-NETW		EZH3-Z3	100294	2010-08-20	2017-08-29
TWO	R&S	EZH3-Z5	100253	2016-08-20	2017-08-19
Line-V-NETW		LZ113-Z3	100233	2010-00-20	2017-00-17
	R&S				
Ultra Broadband		HL562	100157	2016-08-24	2017-08-23
ANT					
	R&S	ESDV	100008	2016-08-22	2017-08-21
ESDV Test Receiver		Lob v	100000	2010 00 22	2017 00 21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-19	2017-08-20
System Controller	CT	SC100	-		
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-19	2017-08-20
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-19	2017-08-18
Power sensor	Anritsu	MA2491A	32263	2016-08-19	2017-08-18
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-24	2017-08-23
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-19	2017-08-20
Modulation Analyser	HP	8901B	3104A03367	2016-06-10	2017-06-09

Report No.: FCC1609149 Page 7 of 54

Date: 2016-10-10



#### 3.0 **Technical Details**

#### 3.1 Summary of test results

The EUT has been tested according to the following specifications:							
Standard	Test Type	Result	Notes				
FCC Part 15.207	Conducted Emission	Pass	Complies				
FCC Part 95.639	Maximum Transmitter Power	Pass	Complies				
FCC Part 95.637	Modulation Characteristic	Pass	Complies				
FCC Part 95.633	Occupied Bandwidth	Pass	Complies				
FCC Part 95.633	Emission Mask	Pass	Complies				
FCC Part 95.621 and 95.626	Frequency Tolerance	Pass	Complies				
FCC Part 95.635	Spurious Radiated Emissions	Pass	Complies				

#### 3.2 **Test Standards**

FCC Part 95, ANSI C63.10:2013

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: FCC1609149

Date: 2016-10-10



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

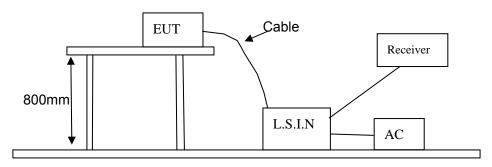

### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID
20 channel intercom	Guangdong Samzuk Technology	FTAN20AA,	2AIOQ-FTAN20AA
	Development Co,Ltd	FTAN20AB,	
		FTAN20AC,	
		FTAN20AD	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1609149 Page 9 of 54

Date: 2016-10-10



#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

#### C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

#### 5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013

- Setup the EUT and simulators as shown on follow Α
- В Enable AF signal and confirm EUT active to normal condition

#### 5.5 Power line conducted Emission Limit according to Paragraph 15.207

		Class A Li	mits (dBµV)	Class B Limits (dBµV)		
Frequency(MHz)		Quasi-peak Average Level		Quasi-peak Level	Average Level	
		Level				
	$0.15\sim0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
	0.50 ~ 5.00	73.0	60.0	56.0	46.0	
	5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1609149

Date: 2016-10-10




# Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

**EUT set Condition: Keep Transmitting** 

Results: **Pass** 

Please refer to following diagram for individual

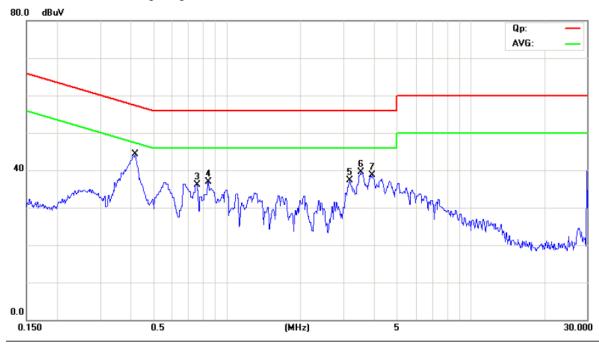

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.4206	28.50	11.29	39.79	57.44	-17.65	QP	
2	0.4206	18.10	11.29	29.39	47.44	-18.05	AVG	
3	0.7475	24.54	11.63	36.17	56.00	-19.83	peak	
4	0.8375	25.09	11.73	36.82	56.00	-19.18	peak	
5	3.1775	24.45	12.77	37.22	56.00	-18.78	peak	
6 *	3.5487	26.58	12.92	39.50	56.00	-16.50	peak	
7	3.9312	25.69	13.07	38.76	56.00	-17.24	peak	

Report No.: FCC1609149

Date: 2016-10-10




# B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

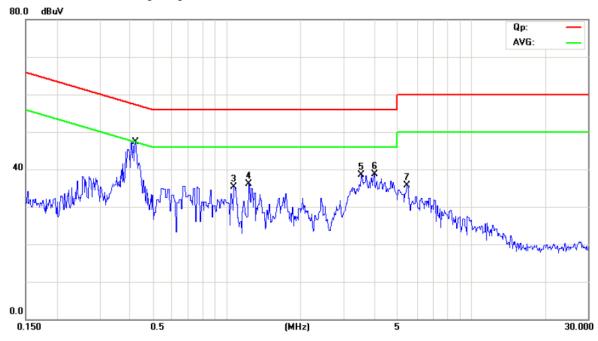

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.4241	24.70	11.29	35.99	57.37	-21.38	QP	
2	0.4241	18.00	11.29	29.29	47.37	-18.08	AVG	
3	1.0737	23.34	11.93	35.27	56.00	-20.73	peak	
4	1.2312	24.13	11.99	36.12	56.00	-19.88	peak	
5	3.5487	25.53	12.92	38.45	56.00	-17.55	peak	
6 *	3.9875	25.52	13.10	38.62	56.00	-17.38	peak	
7	5.5000	22.44	13.29	35.73	60.00	-24.27	peak	

Report No.: FCC1609149 Page 12 of 54

Date: 2016-10-10



# 6. Frequency Tolerance

# 6.1 Applicable standard

According to FCC §2.1055(a) (1), the frequency stability shall be measured with variation of ambient temperature from –30 °C to +50 °C, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.621(b), Each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005%. Each GMRS transmitter for base station (except small base), mobile relay station or fixed station operation must be maintained within a frequency tolerance of 0.00025%.

According to FCC §95.626(b), Each FRS Unit must be maintained within a frequency tolerance of 0.00025 %( 2.5 ppm).

#### 6.2 Measurement Procedure

### 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

# 6.2.2 Frequency stability versus input voltage

- 1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15 ℃ to 25 ℃. Otherwise, an environment chamber set for a temperature of 20 ℃ shall be used.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Report No.: FCC1609149 Page 13 of 54

Date: 2016-10-10



### **6.3 TEST SETUP BLOCK DIAGRAM**

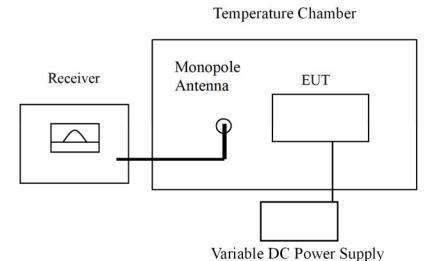


Figure 1

### **6.5 TEST RESULT**

(1) Frequency stability versus input voltage (The end point voltage is 4.3V)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit (ppm)
CH4	4.3V	467.636962	-1.15	467.6375MHz	±2.5
CH10	4.3V	462.636808	-1.50	462.6375MHz	±2.5
CH17	4.3V	462.649351	-1.40	462.6500MHz	±5.0

Report No.: FCC1609149 Page 14 of 54

Date: 2016-10-10



# (2)Frequency stability versus ambient temperature

# **Test Results**

#### CH4

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(pp m)
50	5.0	467.636857	-1.37	467.6375MHz	±2.5
40	5.0	467.636873	-1.34	467.6375MHz	±2.5
30	5.0	467.636982	-1.11	467.6375MHz	±2.5
20	5.0	467.636835	-1.42	467.6375MHz	±2.5
10	5.0	467.636946	-1.18	467.6375MHz	±2.5
0	5.0	467.637014	-1.04	467.6375MHz	±2.5
-10	5.0	467.637058	-0.95	467.6375MHz	±2.5
-20	5.0	467.636952	-1.17	467.6375MHz	±2.5
-30	5.0	467.636816	-1.46	467.6375MHz	±2.5

# **CH10**

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(pp m)
50	5.0	462.636976	-1.13	462.6375MHz	±2.5
40	5.0	462.636892	-1.31	462.6375MHz	±2.5
30	5.0	462.636925	-1.24	462.6375MHz	±2.5
20	5.0	462.636940	-1.21	462.6375MHz	±2.5
10	5.0	462.636857	-1.39	462.6375MHz	±2.5
0	5.0	462.636994	-1.09	462.6375MHz	±2.5
-10	5.0	462.637012	-1.05	462.6375MHz	±2.5
-20	5.0	462.637058	-0.96	462.6375MHz	±2.5
-30	5.0	462.637103	-0.86	462.6375MHz	±2.5

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies within may be consensated.

any other remedies which may be appropriate.

Page 15 of 54 Report No.: FCC1609149

Date: 2016-10-10



#### **CH17**

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(pp m)
50	5.0	462.649672	-0.71	462.6500MHz	±5.0
40	5.0	462.649584	-0.90	462.6500MHz	±5.0
30	5.0	462.649515	-1.05	462.6500MHz	±5.0
20	5.0	462.649613	-0.84	462.6500MHz	±5.0
10	5.0	462.649389	-1.32	462.6500MHz	±5.0
0	5.0	462.649457	-1.17	462.6500MHz	±5.0
-10	5.0	462.649493	-1.10	462.6500MHz	±5.0
-20	5.0	462.649525	-1.02	462.6500MHz	±5.0
-30	5.0	462.649594	-0.88	462.6500MHz	±5.0

Report No.: FCC1609149

Date: 2016-10-10



#### 7. EMISSION BANDWIDTH and Mask

### 7.1 PROVISIONS APPLICABLE

Per FCC §2.1049 and FCC §95.633(a), The *authorized bandwidth* (maximum permissible bandwidth of a transmission) for emission type H1D, J1D, R1D, H3E, J3E or R3E is 4 kHz. The authorized bandwidth for emission type A1D or A3E is 8 kHz. The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20 kHz


Per FCC §2.1049 and FCC §95.633(a) (c), the authorized bandwidth for emission type F3E or F2D transmitted by an FRS Unit is 12.5 kHz.

- (1)At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- (3) At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- (7) At least 43 + 10 log10 (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

### 7.2 MEASUREMENT PROCEDURE

TIA-603-C, section 2.2.11

### 7.3 Test Setup Block Diagram

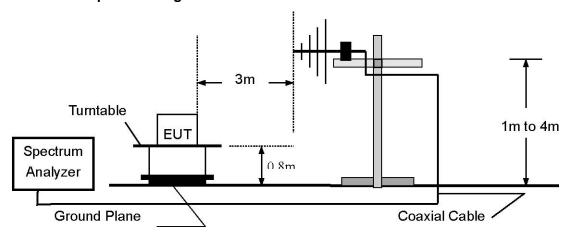

#### 7.4 Measurement Result:

Bandwidth					
Operating Frequency Test Data Limits Result					
467.6375MHz	10.62kHz	12.5kHz	Pass		
462.6375MHz	10.62kHz	12.5kHz	Pass		
462.6500MHz	10.62kHz	20kHz	Pass		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 17 of 54

Report No.: FCC1609149

Date: 2016-10-10



**Emission Designator:** 

Bn=2M + 2DK


Where M = 3 KHz, D = 2.5 KHz, K = 1

Bn =2\*3 + 2\*2.5 = 11KHz

Type of emission: 11K0F3E

### 7.5 Test Plots:

### For Channel 04 467.6375MHz

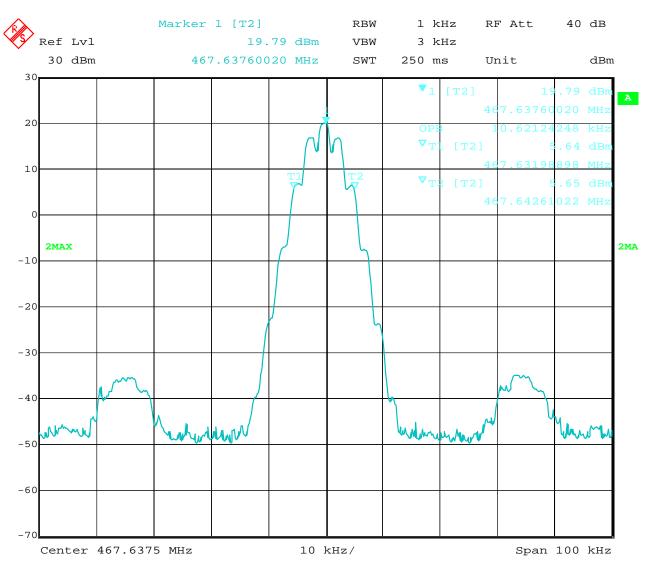


Date: 8.OCT.2016 12:54:30

Page 18 of 54

Report No.: FCC1609149

Date: 2016-10-10



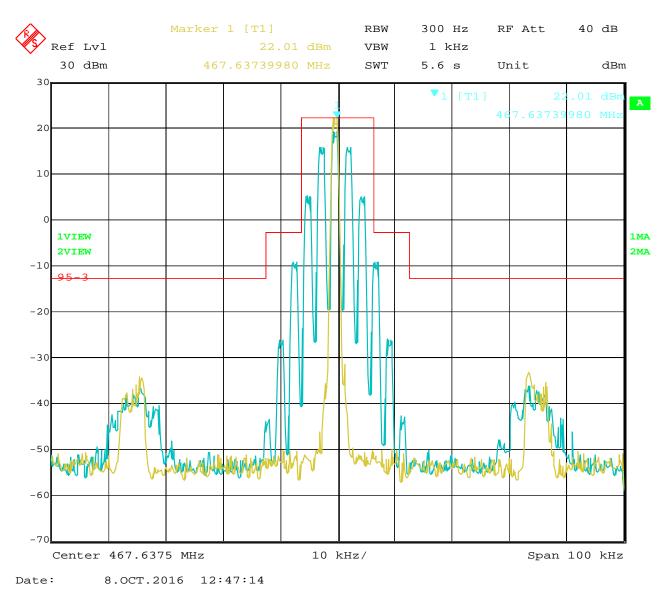


Report No.: FCC1609149 Page 19 of 54

Date: 2016-10-10




#### For Channel 10 462.6375MHz

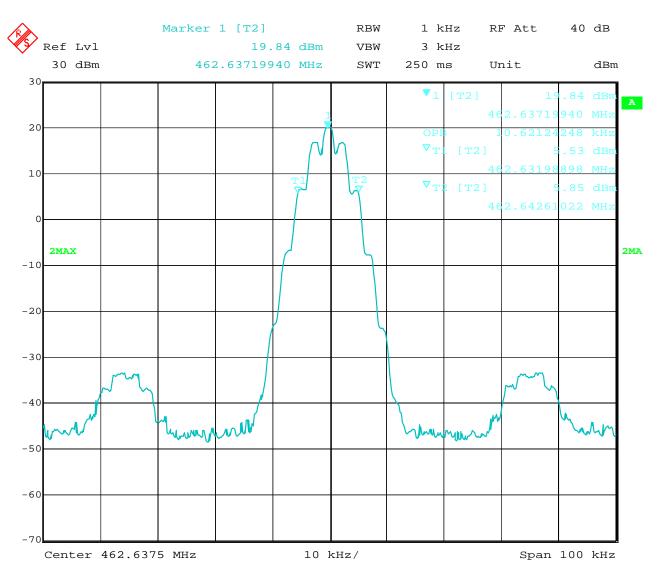

Date: 8.OCT.2016 15:13:01 Report No.: FCC1609149 Page 20 of 54

Date: 2016-10-10



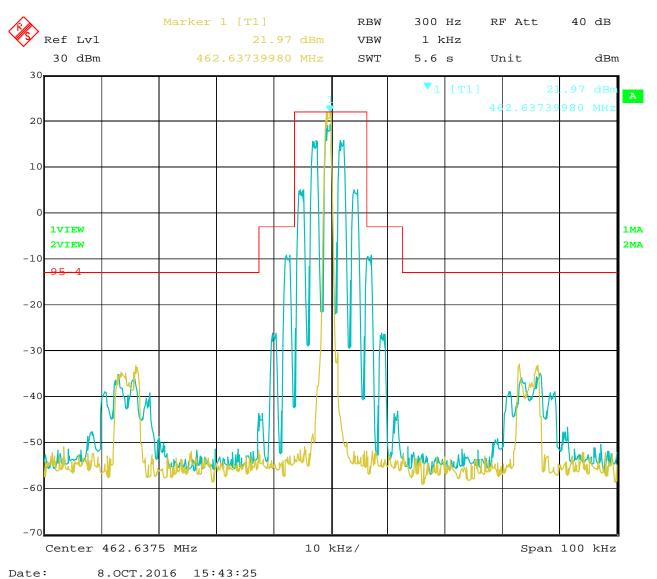


Report No.: FCC1609149 Page 21 of 54

Date: 2016-10-10



#### For Channel 17 462.6500MHz

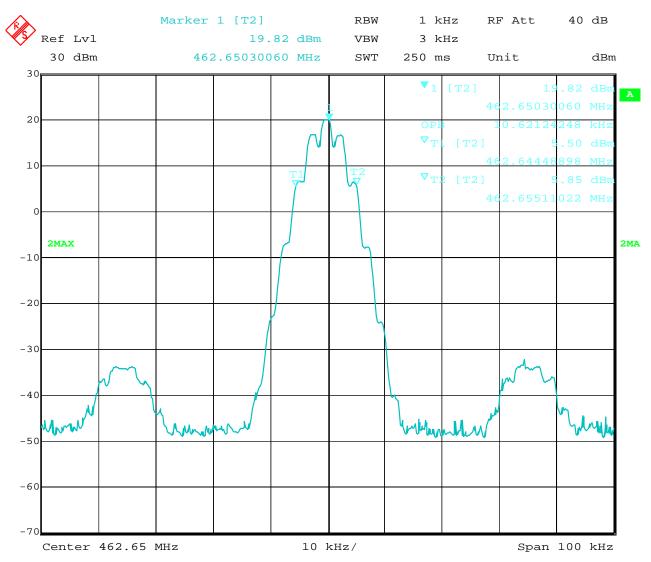


8.OCT.2016 15:33:58 Date:

Report No.: FCC1609149 Page 22 of 54

Date: 2016-10-10



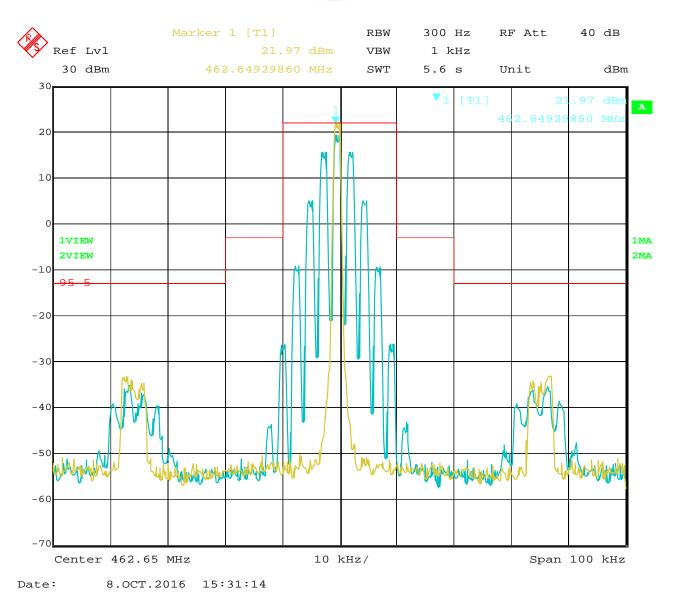


Report No.: FCC1609149 Page 23 of 54

Date: 2016-10-10



### Channel 04 467.6375MHz

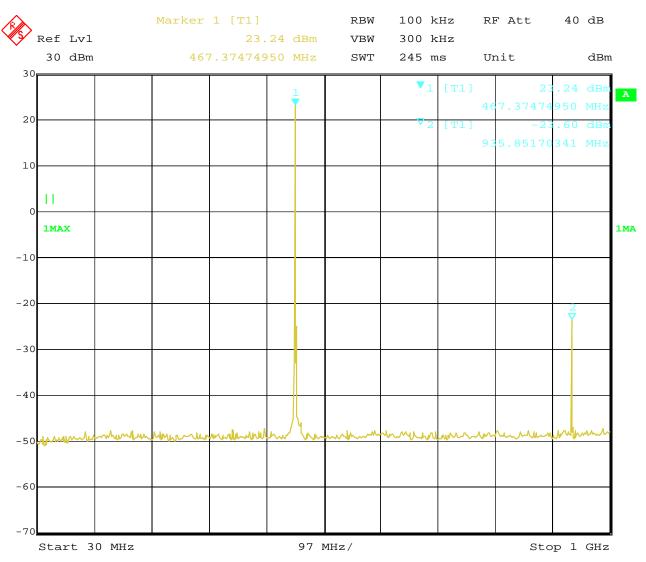


8.OCT.2016 11:03:38 Date:

Report No.: FCC1609149 Page 24 of 54

Date: 2016-10-10



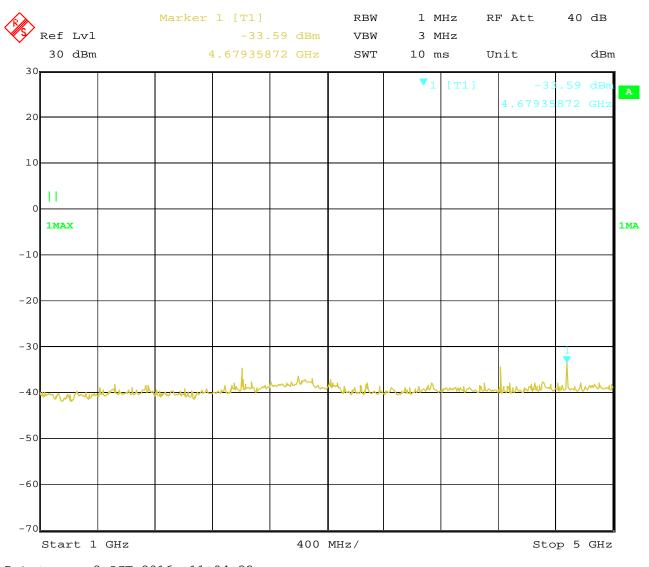


Date: 8.OCT.2016 11:04:22 Report No.: FCC1609149 Page 25 of 54

Date: 2016-10-10



### Channel 10 462.6375MHz

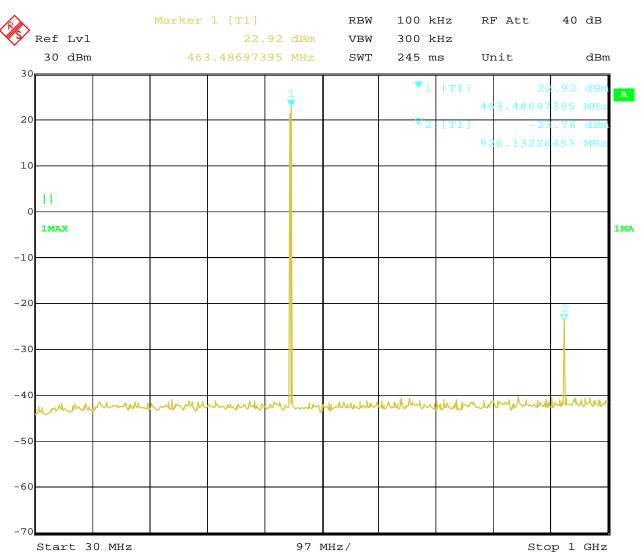

8.OCT.2016 11:02:56 Date:

Report No.: FCC1609149 Page 26 of 54

Date: 2016-10-10



Ref Lvl	Marker 1 [T1] -31.	95 dBm			MHz R	F Att	40 dB	
30 dBm	4.631262	53 GHz	SWT	10 1	ns U	nit	dBm	n
30				<b>▼</b> 1	[m1.]	-31	.95 dBm	1
				, 1	[T1]		253 GHz	A
20						1.03120	233 0112	
10								
11								
0 1MAX								1MA
-10								
-20								-
-30							1	
							Ĭ	
and the substitute of the subs	a Manh	what	M		الديد سر	ally 100 allows	Ll summ	
-40 -timping-co-bi-saldadha	ANCHINA PARTITION	Ť	SAMUEL.	Fir-America Art.	The same of the sa	V/10-010		
-50								
-60								
-70								
Start 1 GHz		400	MHz/			Sto	p 5 GHz	


8.OCT.2016 11:01:59 Date:

Report No.: FCC1609149 Page 27 of 54

Date: 2016-10-10



### Channel 17 462.6500MHz

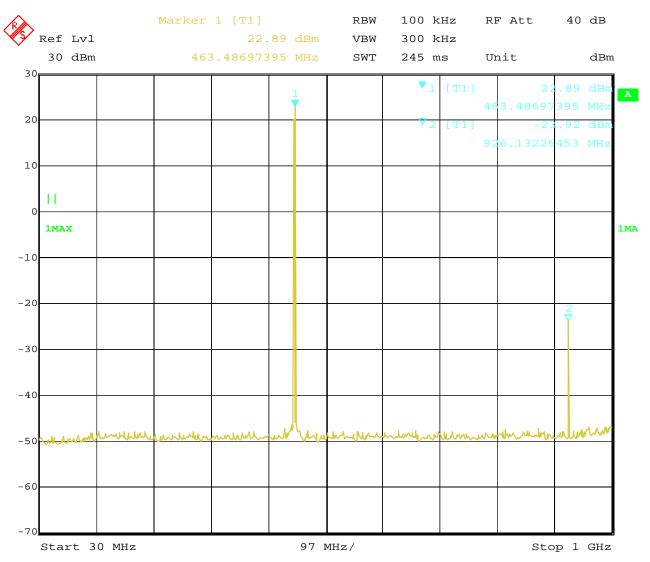


8.OCT.2016 11:05:36 Date:

Report No.: FCC1609149 Page 28 of 54

Date: 2016-10-10



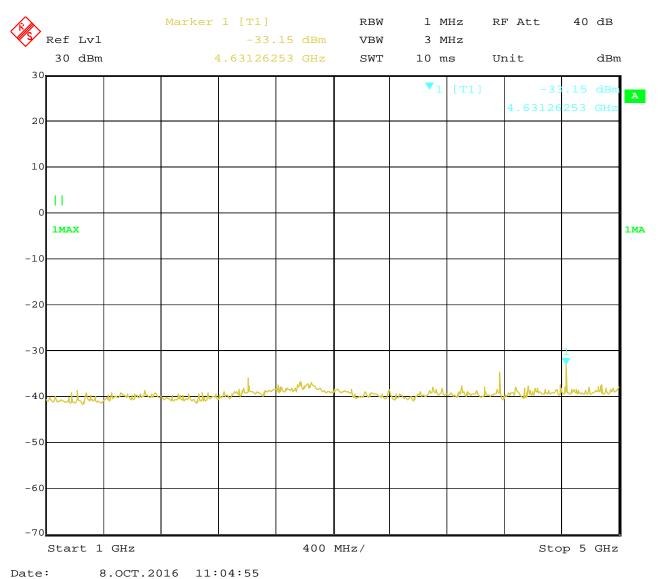

Report No.: FCC1609149

Date: 2016-10-10



Page 29 of 54

#### 8. UNWANTED RADIATION

#### **8.1 PROVISIONS APPLICABLE**

FCC §2.1053 and §95.635

# 8.2 MEASUREMENT PROCEDURE (Radiated Emissions)

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.
- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Page 30 of 54

Report No.: FCC1609149


Date: 2016-10-10



# 8.3 Substitution Method: (Radiated Emissions)

#### **Radiated Below 1GHz**

### Ground Plane

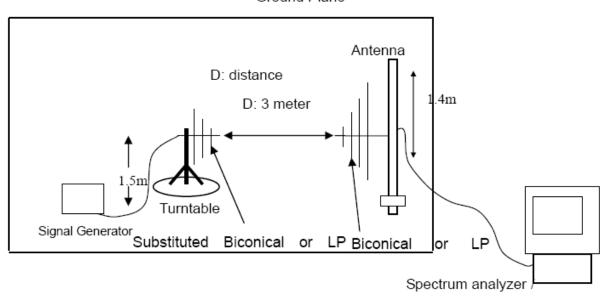

#### Radiated Above 1 GHz

# Ground plane Antenna mast 4 meter D: distance 1.5mHorn Turn antenna table Signal Generator

Spectrum

analyzer/pre-amp

The report refers only to the sample tested and does not apply to the bulk.

Substituted Horn

antenna

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt

any other remedies which may be appropriate.

Report No.: FCC1609149

Date: 2016-10-10



Page 31 of 54

#### **8.4 MEASUREMENT RESULTS:**

Calculation: Limit (dBm)= EL-43-10log10 (T)=-13dBm

Notes: EL is the emission level of the Output Power expressed in dBm, in this application, the EL is 27

dBm

### Channel 04 467.6375MHz

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
935.275	Vertical	-36.55	-13
1402.913	Vertical	-42.19	-13
1870.55	Vertical	-46.62	-13
935.275	Horizontal	-40.38	-13
1402.913	Horizontal	-47.25	-13

#### Channel 10 462.6375MHz

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
925.275	Vertical	-36.31	-13
1387.913	Vertical	-42.70	-13
1850.55	Vertical	-47.08	-13
925.275	Horizontal	-40.59	-13
1387.913	Horizontal	-47.67	-13

Page 32 of 54 Report No.: FCC1609149

Date: 2016-10-10



# Channel 17 462.6500MHz

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
925.30	Vertical	-36.61	-13
1387.95	Vertical	-42.53	-13
1850.60	Vertical	-46.83	-13
925.30	Horizontal	-40.13	-13
1387.95	Horizontal	-47.56	-13

Note: ERP was recorded.

Report No.: FCC1609149

Date: 2016-10-10



Page 33 of 54

#### 9. Modulation Characteristics

### 9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Part95.637: A GMRS transmitter that transmits emission types F1D, G1D, or G3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz

#### 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

# 9.2.2 Audio Frequency Response

- (1). The EUT and test equipment were set up as shown in figure 2.
- (2). Adjust the Modulation Analyzer for the following setting:

a) High-pass filter: offb) Low-pass filter: 15 kHzc) Detector: positive peak

c) Detector . positive pear

d) Function: FM

- (3). The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- (4). With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 5 kHz.
- (5). The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.

Report No.: FCC1609149 Page 34 of 54

Date: 2016-10-10



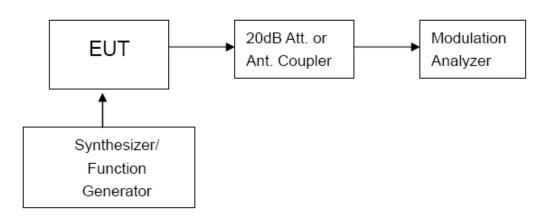


Figure 1: Modulation characteristic measurement configuration

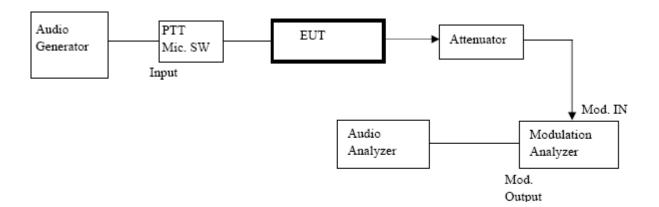


Figure 2: Audio Frequency Response Measurement Configure

Page 35 of 54

Report No.: FCC1609149

Date: 2016-10-10




### 9.4 MEASUREMENT RESULT

# (a). Modulation Limit:

# CH4 (467.6375MHz)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.11	0.36	0.39	0.21
-15	0.15	0.59	0.65	0.38
-10	0.29	0.75	0.82	0.58
-5	0.38	1.15	1.04	0.82
0	0.52	1.5	1.22	1.31
5	0.76	1.77	1.51	1.56
10	0.89	1.96	1.73	1.78
15	1.16	2.03	1.89	1.82
20	1.38	2.05	1.92	1.81

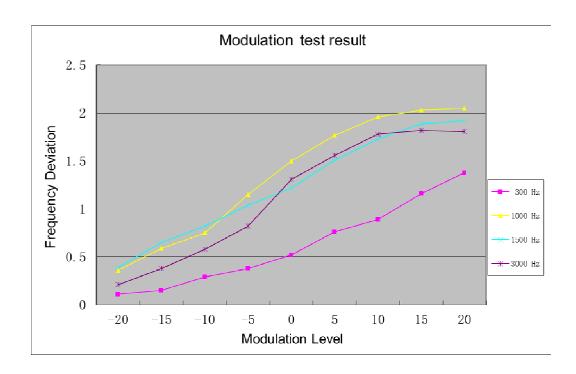


Report No.: FCC1609149 Page 36 of 54

Date: 2016-10-10



# (b). Audio Frequency Response:

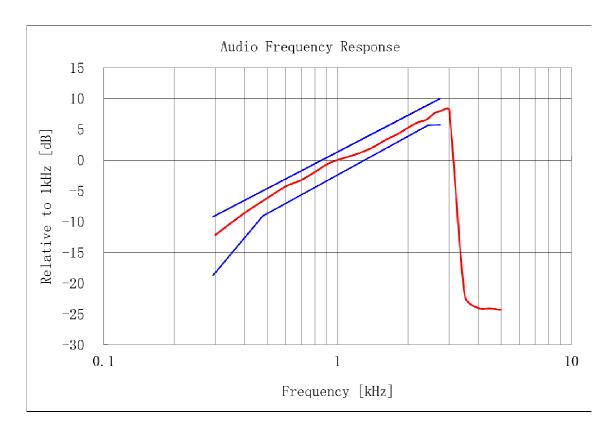


Report No.: FCC1609149 Page 37 of 54

Date: 2016-10-10



# CH17 (462.6500MHz)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.19	0.32	0.46	0.3
-15	0.26	0.45	0.73	0.52
-10	0.5	0.69	0.92	0.67
-5	0.67	1.05	1.18	0.99
0	0.79	1.5	1.39	1.22
5	0.86	1.83	1.69	1.73
10	0.97	2.06	1.93	1.9
15	1.28	2.21	2.16	2.08
20	1.33	2.25	2.19	2.11

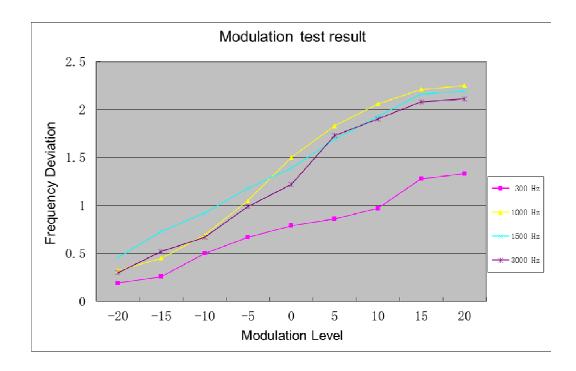


Report No.: FCC1609149 Page 38 of 54

Date: 2016-10-10



# (b). Audio Frequency Response:

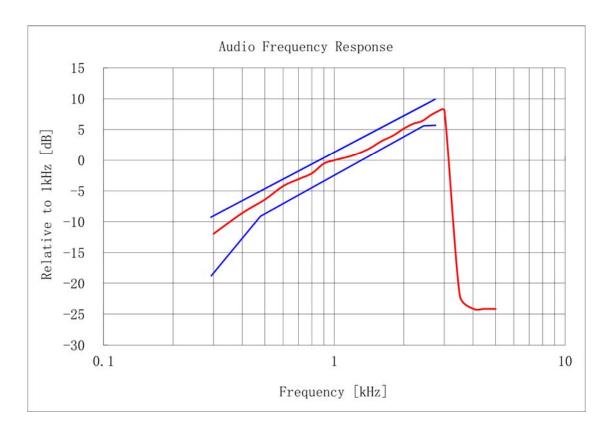

Report No.: FCC1609149 Page 39 of 54

Date: 2016-10-10



# 10. MAXIMUM TRANSMITTER POWER 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §95.639 (a) No GMRS transmitter, under any condition of modulation, shall exceed: (1) 50 W *Carrier power* (average TP during one unmodulated RF cycle) when transmitting emission type A1D, F1D, G1D, A3E, F3E or G3E.

Per FCC §2.1046 and §95.639(d), No FRS Unit, under any condition of modulation, shall exceed a 0.5 W effective radiated power (ERP).

#### **10.2 TEST PROCEDURE**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT .The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

#### **10.3 TEST RESULT**

Power Measurement Results				
Channel	Measurement Result (dBm)			
Channel 04 (467.6375MHz)	23.68			
Channel 10 (462.6375MHz)	23.52			
Channel 17 (462.6500MHz)	23.55			

Note: ERP was recorded.

Date: 2016-10-10



Page 40 of 54

11. Radiated Emission on Receiving Mode

# 11.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

## 11.2 TEST METHOD

ANSI C 63.4: 2014

# 11.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)


Date: 2016-10-10



#### Radiated Disturbance In Vertical (30MHz----1000MHz) Α

**EUT set Condition:** Receiving Class B Level: Results: **PASS** 

Please refer to following diagram for individual

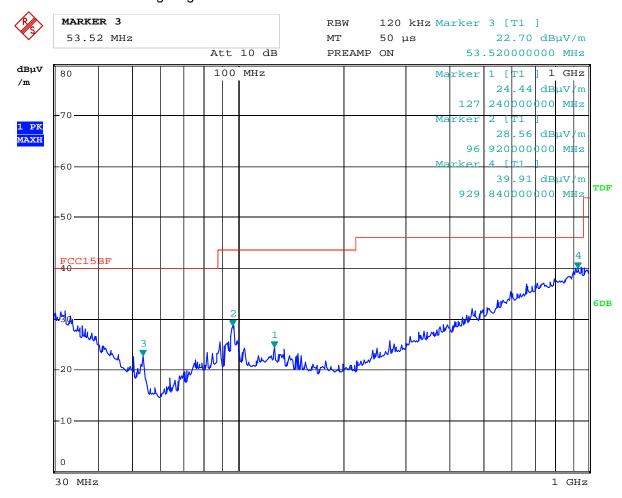

Date: 26.SEP.2016 18:16:31

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
(IVIFIZ)			
53.52	22.70	V	40.00
127.24	24.44	V	40.00
96.92	28.56	V	40.00
929.84	39.91	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt


Date: 2016-10-10



# Radiated Disturbance In Horizontal (30MHz----1000MHz)

**EUT set Condition:** Receiving Class B Level: Results: **PASS** 

Please refer to following diagram for individual

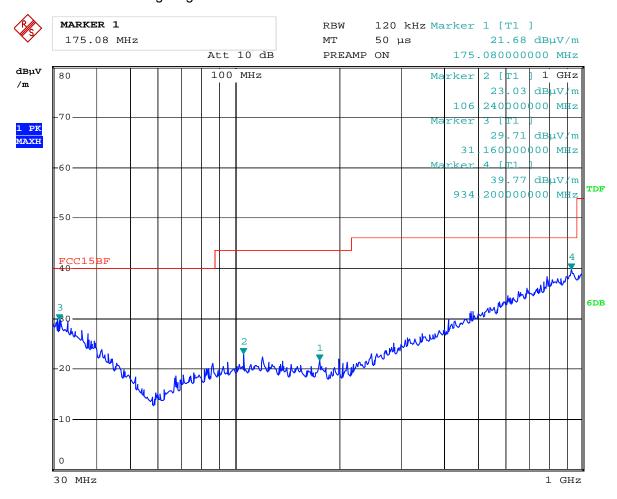

Date: 26.SEP.2016 18:17:47

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
175.08	21.68	Н	40.00
106.24	23.03	Н	40.00
31.16	29.71	Н	40.00
934.20	39.77	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt

Report No.: FCC1609149 Page 43 of 54

Date: 2016-10-10




## 12.0 FCC ID Label

# FCC ID: 2AIOQ-FTAN20AA

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

## **Mark Location:**



Report No.: FCC1609149 Page 44 of 54

Date: 2016-10-10



#### 13.0 Photo of testing


#### 13.1 Conducted test View--




Date: 2016-10-10



#### 13.2 Radiated emission test view

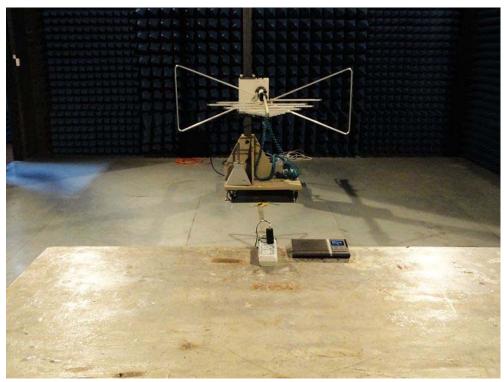

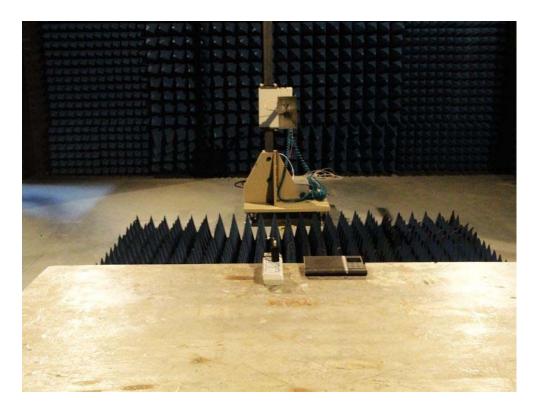

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 46 of 54

Report No.: FCC1609149

Date: 2016-10-10



# Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 47 of 54

Report No.: FCC1609149

Date: 2016-10-10



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1609149 Page 48 of 54

Date: 2016-10-10



## **Outside View**



Page 49 of 54

Report No.: FCC1609149

Date: 2016-10-10



**Power Supply** 





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 50 of 54

Report No.: FCC1609149

Date: 2016-10-10



**Power Supply** 





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 51 of 54


Report No.: FCC1609149

Date: 2016-10-10



## Interior View



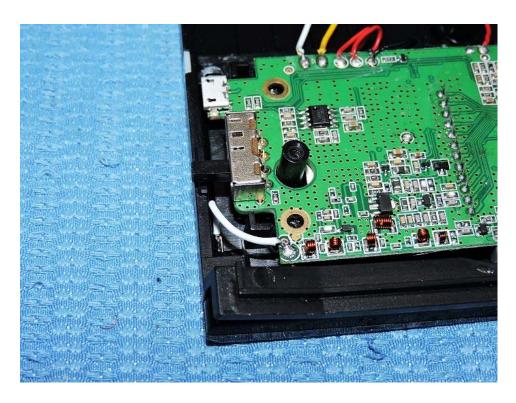

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 52 of 54


Report No.: FCC1609149

Date: 2016-10-10



Interior View

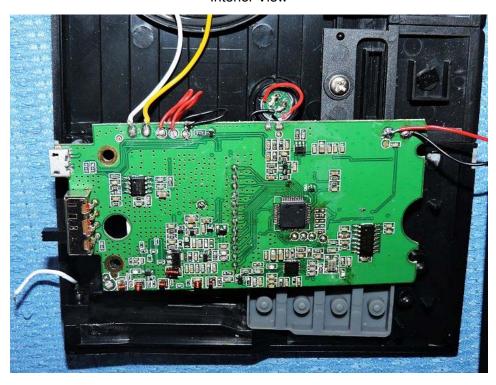

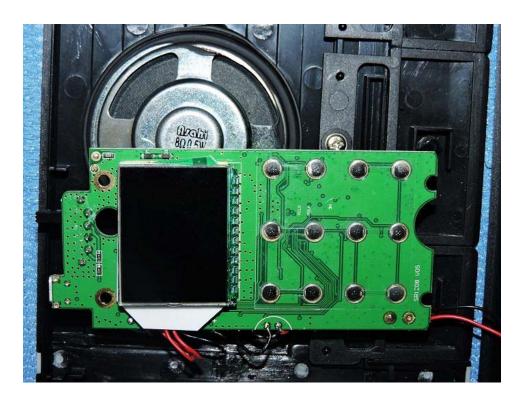

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 53 of 54

Report No.: FCC1609149

Date: 2016-10-10



Interior View

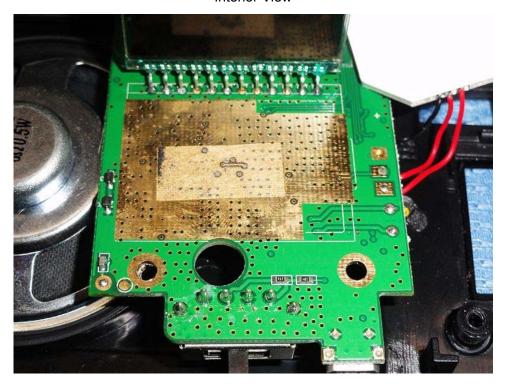



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2016-10-10



Interior View





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.