



Report No: FCC1605013 File reference No: 2016-06-20

Applicant: SHENZHEN XINANTAI VIDEO TECHNOLOGY CO., LTD

Product: Transmitter

Model No: TM25

Brand Name: FOXEER

Test Standards: FCC Part 15.249

Test result: It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249

regulations for the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 20, 2016

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No.: FCC1605013 Page 2 of 34

Date: 2016-06-20



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

Date: 2016-06-20



Test Report Conclusion

	Content	
1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
6.5	Test Result.	14
7.0	Band Edge.	22
7.1	Test Method and Test Procedure.	22
7.2	Radiated Test Setup.	22
7.3	Configuration of the EUT.	22
7.4	EUT Operating Condition.	22
7.5	Band Edge Limit.	22
7.6	Band Edge Test Result.	23
8.0	Antenna Requirement.	24
9.0	20dB bandwidth measurement.	25
10.0	FCC Label	28
11.0	Photo of Test Setup and EUT View.	29

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1605013 Page 4 of 34

Date: 2016-06-20



1.0 General Details

1.1 Test Lab Details

Name: Global United Technology Service Co., Ltd

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Shenzhen, China

Telephone: (755) 27798480 Fax: (755) 2779 8960

Site on File with the Federal Communications Commission – United Sates

Registration Number: 600491 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 9079A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: SHENZHEN XINANTAI VIDEO TECHNOLOGY CO., LTD

Address: Floor 2, Building D, LongJing industrial park, No.335, BuLong RD, Longgang, ShenZhen

Telephone: 0755 28225105 Fax: 0755 28225105

1.3 Description of EUT

Product: Transmitter

Manufacturer: SHENZHEN XINANTAI VIDEO TECHNOLOGY CO., LTD

Address: Floor 2, Building D, LongJing industrial park, No.335, BuLong RD, Longgang,

ShenZhen

Brand Name: FOXEER
Model Number: TM25
Additional Model Name N/A
Input Voltage: DC7-24V

Modulation Type: FM

Operation Frequency 5740-5860MHz

Antenna Designation Dipole antenna with reverse polarity antenna connector. The maximum antenna gain

is 3.0dBi

1.4 Submitted Sample

3 Sample

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1605013 Page 5 of 34

Date: 2016-06-20



1.5 Test Duration 2016-05-03 to 2016-06-18

1.6 Test UncertaintyConducted Emissions Uncertainty =3.6dBRadiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 34 Report No.: FCC1605013

Date: 2016-06-20



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2015-08-22	2016-08-21
TWO	R&S	F7112 75	100204	2015 00 22	2016 00 21
Line-V-NETW		EZH3-Z5	100294	2015-08-22	2016-08-21
TWO	R&S	E7112 75	100252	2015 00 22	2016 09 21
Line-V-NETW		EZH3-Z5	100253	2015-08-22	2016-08-21
ESDV Test Receiver	R&S	ESDV	100008	2015-08-22	2016-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2015-08-22	2016-08-21
System Controller	CT	SC100	-		
Loop Antenna	EMCO	6502	00042960	2015-08-23	2016-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2015-08-22	2016-08-21
3m Anechoic	Zhana Wa Elaatuan	9.2(L)*6.2(W		2015-08-23	2016-08-22
Chamber	ZhongYu Electron)* 6.4(H)		2013-08-23	2010-08-22
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2015-08-24	2016-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2015-08-24	2016-08-23
Power meter	Anritsu	ML2487A	6K00003613	2015-08-22	2016-08-21
Power sensor	Anritsu	MA2491A	32263	2015-08-22	2016-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2015-08-23	2016-08-21
9*6*6 Anechoic			N/A	2015-08-24	2016-08-23
EMI Test Receiver	RS	ESCS30	100139	2015-08-22	2016-08-21
RF Cable	SCHWARZBECK			2015-08-23	2016-08-22
Pre-Amplifier	HP	8447D	2727A05017	2015-08-05	2016-08-04
Pre-Amplifier	EM	EM30265		2015-08-05	2016-08-04

Report No.: FCC1605013 Page 7 of 34

Date: 2016-06-20



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2016-06-20



5. Power Line Conducted Emission Test

5.1 Schematics of the test

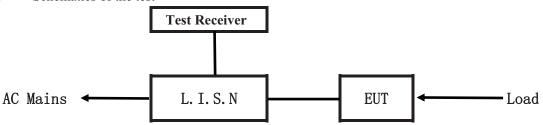


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Block diagram of Test setup

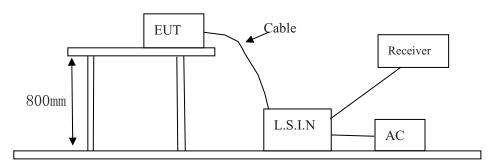

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID	
Tuonamittan	SHENZHEN XINANTAI VIDEO	TM25	2AITU-TM25	
Transmitter	TECHNOLOGY CO., LTD	TM25	2A11U-1W123	

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1605013 Page 9 of 34

Date: 2016-06-20



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Rated
DC Regulated	RJE	QJ3005	VOC	Output: DC0-50V; 0-5A
Power Supply				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107 and 15.207

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB µ V)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results N/A

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2016-06-20



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa


EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

80.0 dBuV

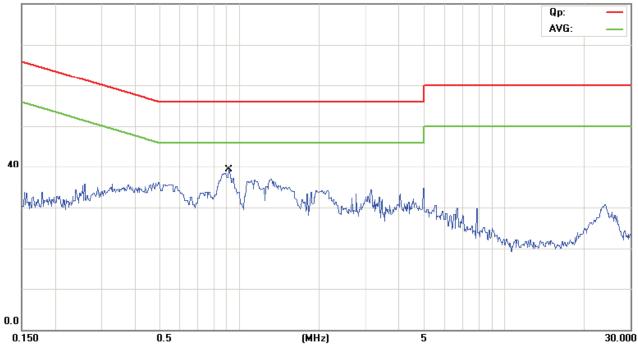

No. Mk.	Freq.	_		Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.9127	20.50	11.81	32.31	56.00	-23.69	QP	
2	0.9127	7.00	11.81	18.81	46.00	-27.19	AVG	

Report No.: FCC1605013 Page 11 of 34

Date: 2016-06-20



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

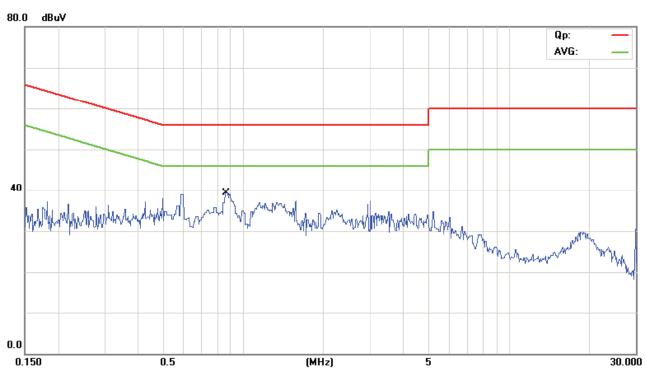

No. Mk.	Freq.			Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.8622	22.20	11.75	33.95	56.00	-22.05	QP	
2	0.8622	8.10	11.75	19.85	46.00	-26.15	AVG	

Report No.: FCC1605013 Page 12 of 34


Date: 2016-06-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

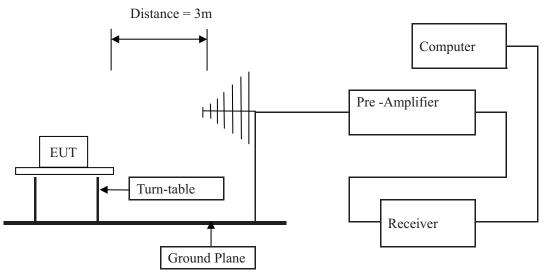

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC1605013 Page 13 of 34

Date: 2016-06-20



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ield Strength of Fundamental (3m)			trength of Harmo	nics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed Point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average Detector.

В. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4 All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-40G, the final emission level got using PK. For fundamental measurement, PK detector used.

Report No.: FCC1605013 Page 14 of 34

Date: 2016-06-20



6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Product:	Transmitter	Test Mode:	Keep transmitting-Low Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	DC24V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
5740	100.2(PK)/85.6(AV)	Н	114/94	-13.8/-8.4
5740	103.6(PK)/88.3(AV)	V	114/94	-10.4/-5.7
11480		Н	74/54	
11480		V	74/54	
17220		Н	74/54	
17220		V	74/54	
22960		Н	74/54	
22960		V	74/54	
28700		H/V	74/54	
34440		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) RBW 10MHz VBW 10MHz Peak detector is for PK value, RMS detector is for AV value

Report No.: FCC1605013 Page 15 of 34

Date: 2016-06-20



Product:	Transmitter	Test Mode:	Keep transmitting-Middle Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	DC24V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
5800	101.30(PK)/86.5(AV)	Н	114/94	-12.7/-7.5
5800	105.90(PK)/90.3(AV)	V	114/94	-8.1/-3.7
11600		Н	74/54	
11600		V	74/54	
17400		Н	74/54	
17400		V	74/54	
23200		Н	74/54	
23200		V	74/54	
29000		H/V	74/54	
34800		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) RBW 10MHz VBW 10MHz Peak detector is for PK value, RMS detector is for AV value

Report No.: FCC1605013 Page 16 of 34

Date: 2016-06-20



Product:	Transmitter	Test Mode:	Keep transmitting-High Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	DC24V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
5860	101.20(PK)/86.3(AV)	Н	114/94	-12.8/-7.7
5860	106.20(PK)/91.0(AV)	V	114/94	-7.8/-3.0
11720		Н	74/54	
11720		V	74/54	
17580		Н	74/54	
17580		V	74/54	
23440		Н	74/54	
23440		V	74/54	
29300		H/V	74/54	
35160		H/V	74/54	

Note: (1) PK= Peak, AV= Average


- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For radiated emissions above 18G, it was only noise.
- (6) RBW 10MHz VBW 10MHz Peak detector is for PK value, RMS detector is for AV value

Date: 2016-06-20




Please refer to the following test plots for details: Low Channel

Horizontal

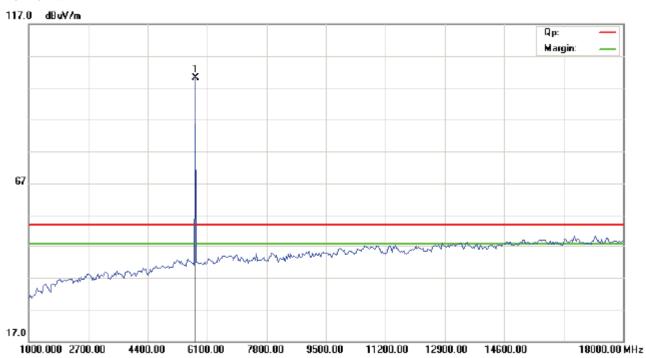

Vertical

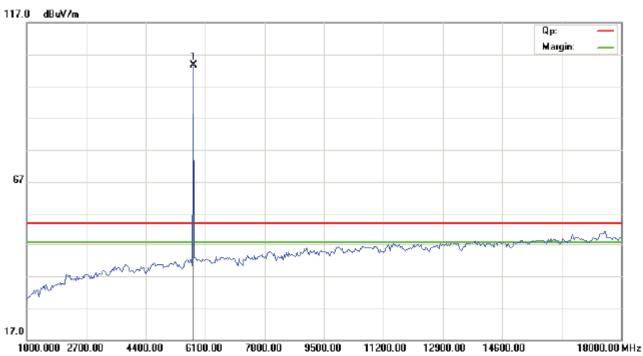

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

18000.00 MHz


Report No.: FCC1605013

Date: 2016-06-20



Please refer to the following test plots for details: Middle Channel

Horizontal

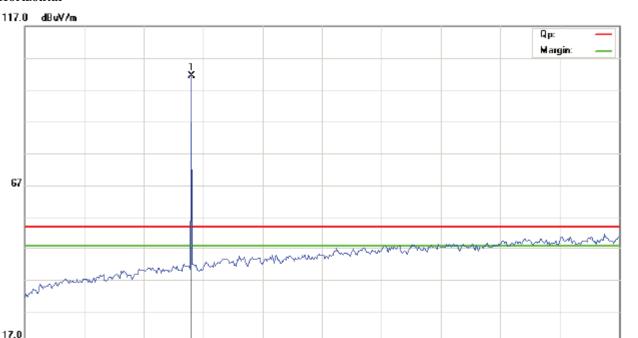

9500.00

11200.00

12900.00

14600.00


Vertical

1000.000 2700.00

4400.00

6100.00

7800.00

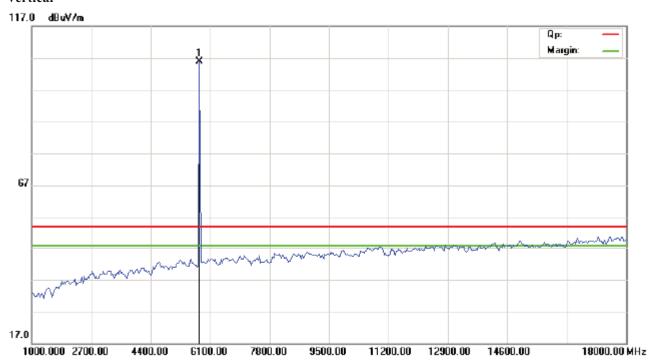

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-06-20



Please refer to the following test plots for details: High Channel

Horizontal

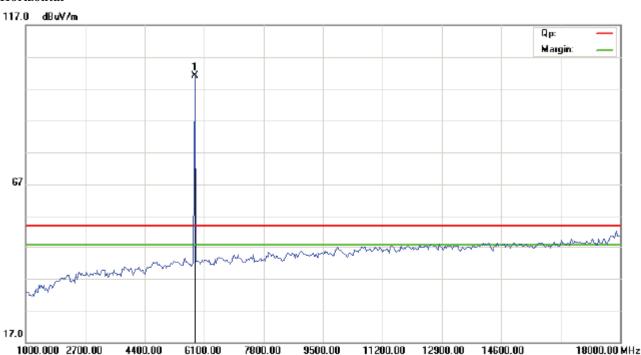

9500.00

7800.00

11200.00

12900.00


14600.00

Vertical

1000.000 2700.00

4400.00

6100.00

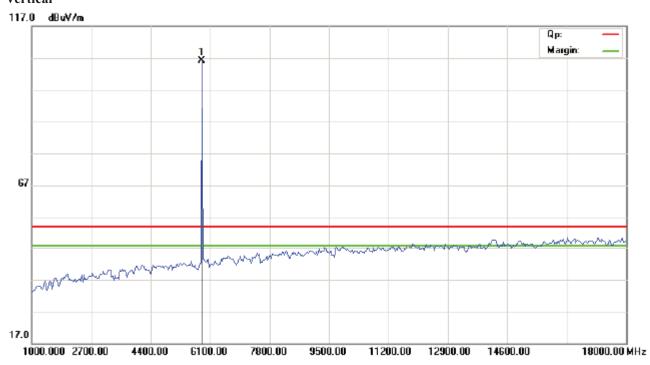

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 20 of 34

Report No.: FCC1605013

Date: 2016-06-20




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

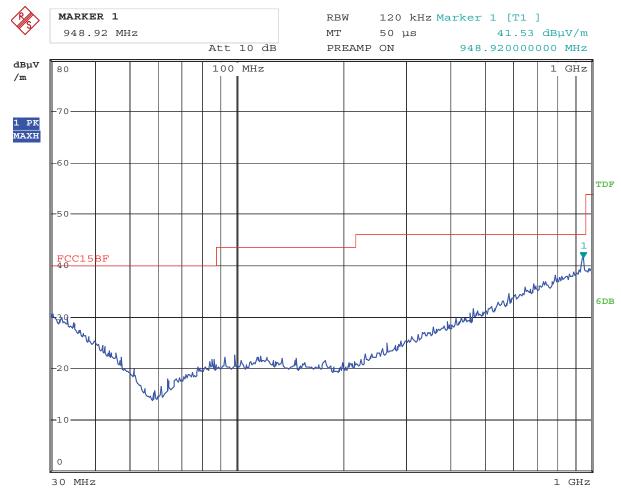

Date: 11.MAY.2016 16:48:43

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
948.920	41.53	Н	46.00

Report No.: FCC1605013 Page 21 of 34

Date: 2016-06-20




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

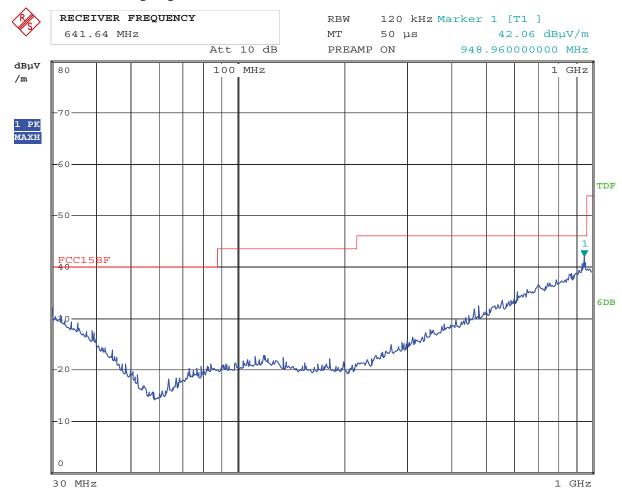

Date: 11.MAY.2016 16:53:17

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \text{V/m} \)
948.960	42.06	V	46.00

Page 22 of 34

Date: 2016-06-20

Report No.: FCC1605013




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 899988
- (2) Set Spectrum as RBW=1MHz,VBW=3MHz and Peak detector used for PK, RMS detector used for AV
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

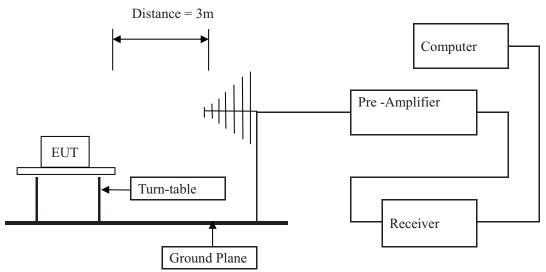

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1605013 Page 23 of 34

Date: 2016-06-20



7.6 Test Result

Product:	Tr	ransmitter	Polarity	Horizontal
Mode	Keepin	g Transmitting	Test Voltage	DC24V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:		Pass		1
5725MHz	PK (dBμV/m)	55.3	Limit	$74 \; dB \mu V/m$
5725MHz	AV (dBμV/m)	34.1	Limit	54 dBμV/m

Product:	Transmitter		Detector	Vertical		
Mode	Transmitter Keeping Transmitting 24 deg. C, Pass PK (dBμV/m) 59.6		Keeping Transmitting		Test Voltage	DC24V
Temperature	24	4 deg. C,	Humidity	56% RH		
Test Result:		Pass				
5725MHz	PK (dBμV/m)	59.6	Limit	$74~dB\mu V/m$		
5725MHz	AV (dBμV/m)	38.8	Limit	54 dBμV/m		

Product:	Transmitter Keeping Transmitting 24 deg. C, Pass		Polarity	Horizontal
Mode	Keeping Transmitting		Test Voltage	DC24V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		24 deg. C, Pass		
5875MHz	PK (dBμV/m)	56.3	Limit	$74~dB\mu V/m$
5875MHz	AV (dBμV/m)	35.2	Limit	54 dBμV/m

Product:	Transmitter		Detector	Vertical
Mode	Keepin	g Transmitting	Test Voltage	DC24V
Temperature	2	4 deg. C,	Humidity	56% RH
Test Result:		Pass		
5875MHz	PK (dBμV/m)	60.1	Limit	74 dBμV/m
5875MHz	AV (dBμV/m)	39.7	Limit	54 dBμV/m

Report No.: FCC1605013 Page 24 of 34

Date: 2016-06-20



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a dipole antenna with reverse polarity antenna connector. The antenna gain is 3.0dBi Max. It fulfills the requirement of this section.

Test Result: Pass

Page 25 of 34

Report No.: FCC1605013

Date: 2016-06-20



Product:	Transmitter			Test 1	Mode:	de: Keep transmitting			
Mode	Keepin	g Transmitting		Test V	/oltage	DC24V			
Геmperature		4 deg. C,		Humidity		56% RH			
Test Result:		Pass		Det	ector		P	K	
OdB Bandwidth 8.5		.82MHz					-	-	
<u> </u>	Marker	l [T1 ndB]	R	BW	1 MH	z RF	' Att	30 dB	
Ref Lvl	ndB	20.00 dB	V	BW	3 MH	Z			
20 dBm	BW 8	.81763527 MHz	S	WT	5 ms	Un	it.	dBm	ı
20					V ₁	[T1]	9	3.01 dBm	1
			1				5.74045	090 GHz	
10			nunn		ndB		20	0.00 dB	
			1 \		BW		8.81763		
0		- 	1	\ 	∇_{T1}	[T1]	-11		
				\	$ abla_{\mathrm{T2}}$			188 GHz	
10		T/L		T2	* 172	[T1]		1.51 dBm	
1MAX				W.	J.		J. 74475	932 GHZ	1
20									
30	 								
40	~~~					Lang.			
mandenhan						٧	humm	- Vanna	
50									
60									
70									
Center 5.74	4 GHz	5 1	MHz/				Snar	1 50 MHz	

Page 26 of 34

Report No.: FCC1605013 Date: 2016-06-20



Product: Transmitter		Te	est Mode:	Keep transmitting			
Mode Keeping Transmitting Temperature 24 deg. C, Test Result: Pass		Te	st Voltage	DC24V			
		4 deg. C,	Н	Iumidity	56% RH PK 		
		Pass	I	Detector			
20dB Bandwidth	th 8.02MHz						
	Marker	1 [T1 ndB]	RBW	1 MH:	z RF Att	30 dB	
Ref Lvl	ndB	20.00 dB	VBW	3 MH:			
20 dBm	BW 8	.01603206 MH	z SWT	5 ms	Unit	dBm	
20				V ₁	[T1] 1	0.23 dBm	A
			1		5.8006	5130 GHz	
10		/	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ndB	2		1
			4	BW		3206 MHz	1
0		- 		$ abla_{\mathrm{T}}$	[T1] -	9.11 dBm 4208 GHz	ı
		T	77.2	$oldsymbol{ abla}_{\mathrm{T2}}$		0.00 dBm	1
-10		4 4 40	7	1 4 A B		5812 GHz	1
1MAX			V				1M
-20				N.			ı
-30				4.			ì
	muny			1	May .		Ī
-40					- www	white war	I
-50						-	1
							1
-60							1
							1
-70							1
							ì
-80							
Center 5.8 G	Hz	5	MHz/		Spa	n 50 MHz	

Page 27 of 34

Report No.: FCC1605013

Date: 2016-06-20



Product:	Transmitter			Mode:	Keep transmitting DC24V		
Mode	Mode Keeping Transmitting		Test Voltage				
Temperature 24 deg. C, Test Result: Pass		ı	Hun	nidity	56% RH		
			Det	ector	P)	PK	
20dB Bandwidth	8.32MHz					-	
r	Marker 1 [T1	ndB]	RBW	1 MHz	RF Att	30 dB	
Ref Lvl		.00 dB	VBW	3 MHz			
20 dBm	BW 8.31663	327 MHz	SWT	5 ms	Unit	dBm	
20				▼ ₁ [T1]	10	.25 dBm	
		1			5.85784	569 GHz	
10		/\/\	Tay	ndB	20	.00 dB	
			\	BW	8.31663	327 MHz	
0				▼ _{T1} [T1]		.90 dBm	
		Th	T C	∇ _{T2} [T1]	5.85604		
-10	11 .00.0	7	▼	▼ _{T2} [T1]	5.86435	.37 dBm	
1MAX	\mu\n\.	V		My	3.00433	1	
-20				4			
				\			
-30				<u> </u>			
				W.			
-40	/ -			40.	V .		
was the same of th	\mathcal{J}				Lulanh	my	
-50							
-60							
-70							
-80 Garata a 5 0.6					G .	F.O. 1/11	
Center 5.86	Gnz	5 MH	4/		Span	50 MHz	

Report No.: FCC1605013 Page 28 of 34

Date: 2016-06-20




10.0 FCC ID Label

FCC ID: 2AITU-TM25

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

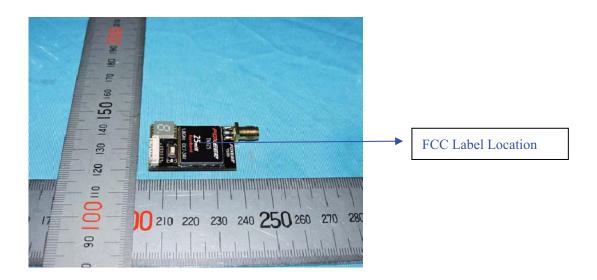

Page 29 of 34

Report No.: FCC1605013

Date: 2016-06-20



11.0 **Photo of testing**


11.1 Conducted test View--




Date: 2016-06-20



11.2 Radiated emission test view

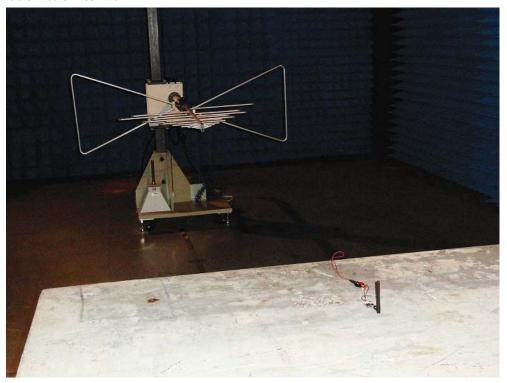

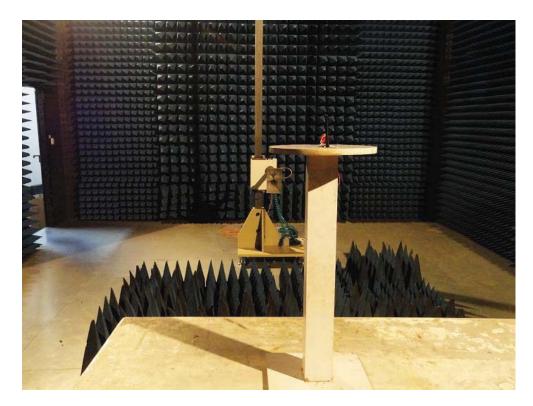

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-06-20



11.3 Photographs - EUT



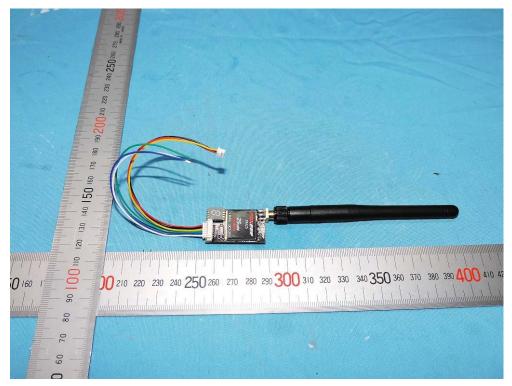



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-06-20



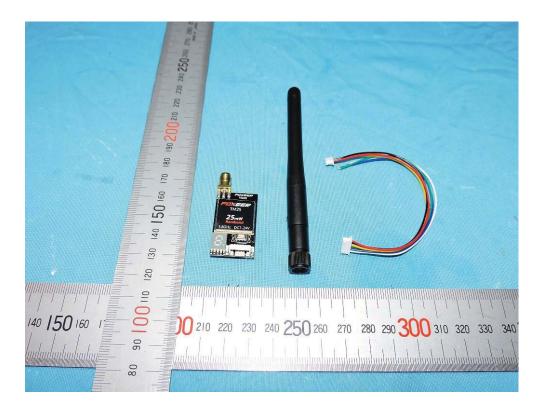

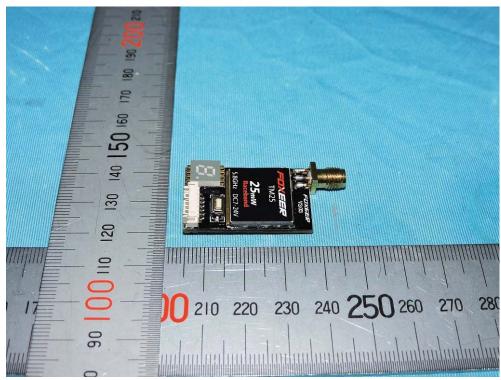


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-06-20





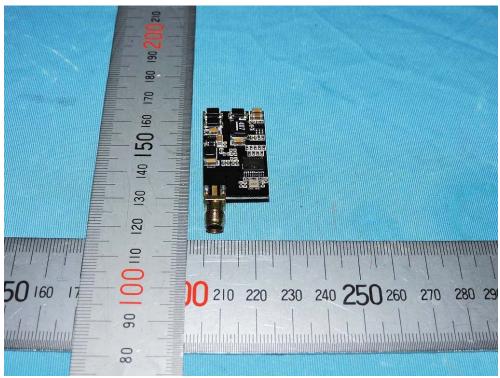

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-06-20



Inside view



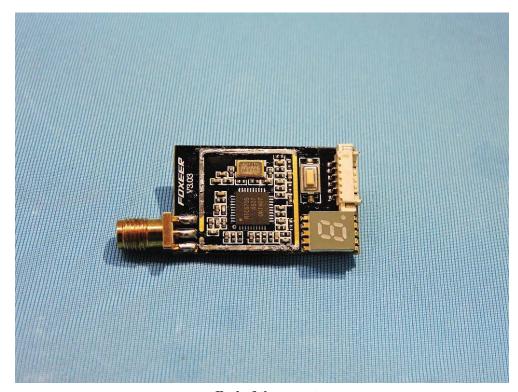

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.