

Test of: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 Pt 15.247 (DTS) & ISSED RSS-247
Report No.: UDIS01-U6 Rev A Addendum

ADDENDUM TEST REPORT





Test of: Nanit N151 Smart Baby Monitor

To: FCC CFR 47 Pt 15.247 (DTS) & ISSED RSS-247

Test Report Serial No.: UDIS01-U6 Rev A Addendum

This report supersedes: NONE

This is an Addendum Report to show compliance for modifications made to the Nanit N151. MiCOM Labs Test Report UDIS01-U6 Rev A is the original complete test report.

Applicant: UdiSense Inc. (DBA: Nanit)
244 Fifth Avenue
Suite # 2702,
New York, NY 10001
USA

Product Function: Wireless Video Baby Monitor

Issue Date: 8th October 2018

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 3 of 30

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION.....	4
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE.....	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	11
5.1. Technical Details	11
5.2. Scope of Test Program.....	12
5.3. Equipment Model(s) and Serial Number(s)	14
5.4. Antenna Details	14
5.5. Cabling and I/O Ports	14
5.6. Test Configurations.....	14
5.7. Equipment Modifications	15
5.8. Deviations from the Test Standard	15
6. TEST SUMMARY	16
7. TEST EQUIPMENT CONFIGURATION(S)	17
7.1. Radiated Emissions - 3m Chamber.....	17
8. MEASUREMENT AND PRESENTATION OF TEST DATA	19
9. TEST RESULTS	20
9.1.1. Radiated Emissions	20
9.1.1.1. TX Spurious & Restricted Band Emissions	23
A. APPENDIX - GRAPHICAL IMAGES	26
A.1. Emissions	27
A.1.1. Radiated Emissions	27
A.1.1.1. TX Spurious & Restricted Band Emissions.....	27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 5 of 30

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 7 of 30

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	8 th August 2018	Draft report for client review.
Rev A	13 th August 2018	Initial release.
Addendum Rev A Draft	19 th September 2018	Updated testing to show compliance after customer modifications to the radio circuitry.
Addendum Rev A	8 th October 2018	Initial Addendum release

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 8 of 30

3. TEST RESULT CERTIFICATE

Manufacturer: UdiSense Inc. (DBA: Nanit) 244 Fifth Avenue Suite # 2702, New York, NY 10001 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: N151	Telephone: +1 925 462 0304
Type Of Equipment: 802.11 b/g/n	Fax: +1 925 462 0306
S/N's: N151AWZ18367NQ	
Test Date(s): 11-12 th Sept. 2018	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & ISED RSS-247	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:





Graeme Grieve
Quality Manager MiCOM Labs, Inc.



Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 558074 D01 v04	5th April 2017	Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.
III	A2LA	August 2017	R105 - Requirement's When Making Reference to A2LA Accreditation Status
IV	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
V	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VI	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
VII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VIII	FCC 47 CFR Part 15.247	2016	Radio Frequency Devices; Subpart C – Intentional Radiators
IX	ICES-003	Issue 6 Jan 2016; Updated April 2017	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
X	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XII	RSS-Gen Issue 5	April 2018	General Requirements for Compliance of Radio Apparatus
XIII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.
XIV	KDB 789033 D02 V02r01	14th December, 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 10 of 30

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 11 of 30

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Nanit N151 to FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & ISSED RSS-247.
Applicant:	UdiSense Inc. (DBA: Nanit) 244 Fifth Avenue Suite # 2702, New York, NY 10001 USA
Manufacturer:	Same as applicant.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	UDIS01-U6 Rev A Addendum
Date EUT received:	10 th September 2018
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & ISSED RSS-247
Dates of test (from - to):	11-12 th Sept. 2018
No of Units Tested:	1
Product Family Name:	Nanit Smart Baby Monitor
Model(s):	N151
Location for use:	Indoors
Declared Frequency Range(s):	2400 - 2483.5 MHz
Type of Modulation:	CCK, OFDM
EUT Modes of Operation:	2400 - 2483.5 MHz: b; g; n: HT-20, HT-40;
Declared Nominal Output Power:	17dBm
Transmit/Receive Operation:	Duplex
Rated Input Voltage and Current:	5V _{DC} , 2A
Operating Temperature Range:	10 to 40 °C
ITU Emission Designator:	802.11b: 12M0G1D 802.11g: 16M6D1D 802.11n HT-20: 17M6D1D 802.11n HT-40: 36M0D1D
Equipment Dimensions:	3 1/8 x 3 1/8 x 1 1/2 inch
Weight:	4 oz.
Hardware Rev:	MP
Software Rev:	1.1.4.4.2

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 12 of 30

5.2. Scope of Test Program

Nanit N151

The scope of the test program was to test the Nanit N151 Smart Baby Monitor 802.11 configurations after manufacturer modifications to the RF circuitry in the frequency range 2400 - 2483.5 MHz; for compliance against the following specifications;

FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators.

ISSED RSS-247

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

The following Product description was provided by the manufacturer:

Nanit smart video baby monitor is a wireless camera that is mounted above a crib and uses machine learning and computer vision algorithms to analyze the baby's sleep, providing parents actionable insights to help them extend and improve the baby's sleep.

This is an Addendum Report to show compliance as a result of manufacturing modifications made- Radiated Transmitter Spurious Testing was performed, for complete test report see MiCOM Labs Test Report UDIS-U6 Rev A.

For a list of manufacture's changes see section 5.7

Nanit N151





Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 14 of 30

5.3. Equipment Model(s) and Serial Number(s)

Type	Description	Manufacturer	Model	Serial no.	Delivery Date
EUT	Wireless Video Baby Monitor	Nanit	N151	N151AWZ18367NQ	10 th Sept. 2018

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Pulse	SZ0845W	Dipole	5.42	-	360	-	2400 - 2483.5
integral	Pulse	SZ0845W	Dipole	4.69	-	360	-	5150 - 5250
integral	Pulse	SZ0845W	Dipole	4.69	-	360	-	5250 - 5350
integral	Pulse	SZ0845W	Dipole	4.69	-	360	-	5470 - 5725
integral	Pulse	SZ0845W	Dipole	4.69	-	360	-	5725 - 5850

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Environment
USB	10-30m	1	Shielded	USB-C	Digital	End-User Indoors

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
2400 - 2483.5 MHz				
11b	1	2,412.00	2,437.00	2,462.00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.7. Equipment Modifications

The following modifications were made by the manufacturer as part of sustainability:

1. Change in the dimensions of the ferrite absorbent sheet on the Main board:
 - Original dimensions were 40x35mm.
 - New dimensions are 40x28mm.
2. Change in the FPC cable connecting the Main and IR board:
 - Original cable had ferrite absorbent sheet covering it.
 - New cable is shielded and does not have the sheet covering it.
3. Replaced zero Ohm resistor (ref R208) on the Main board with 1.6pF \pm 0.05pF capacitor.

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 16 of 30

6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
Emissions	Complies	-
(1) Radiated Emissions	Complies	View Data
(i) TX Spurious & Restricted Band Emissions	Complies	View Data


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)


7.1. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below.

Radiated Emissions Below 1GHz Test Setup

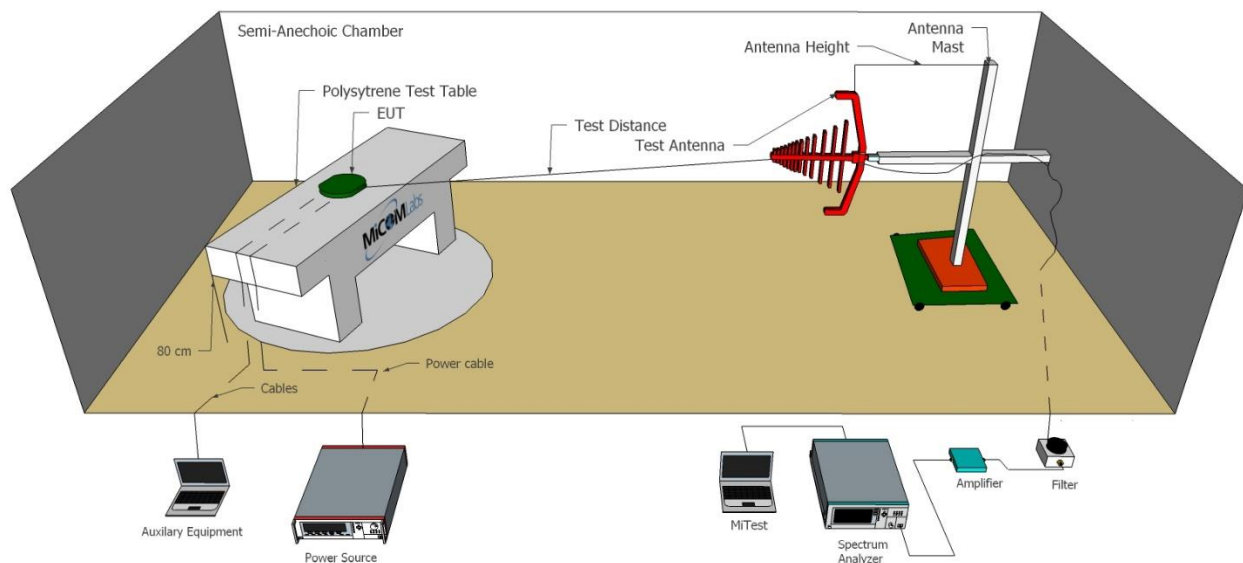

Radiated Emissions Above 1GHz Test Setup

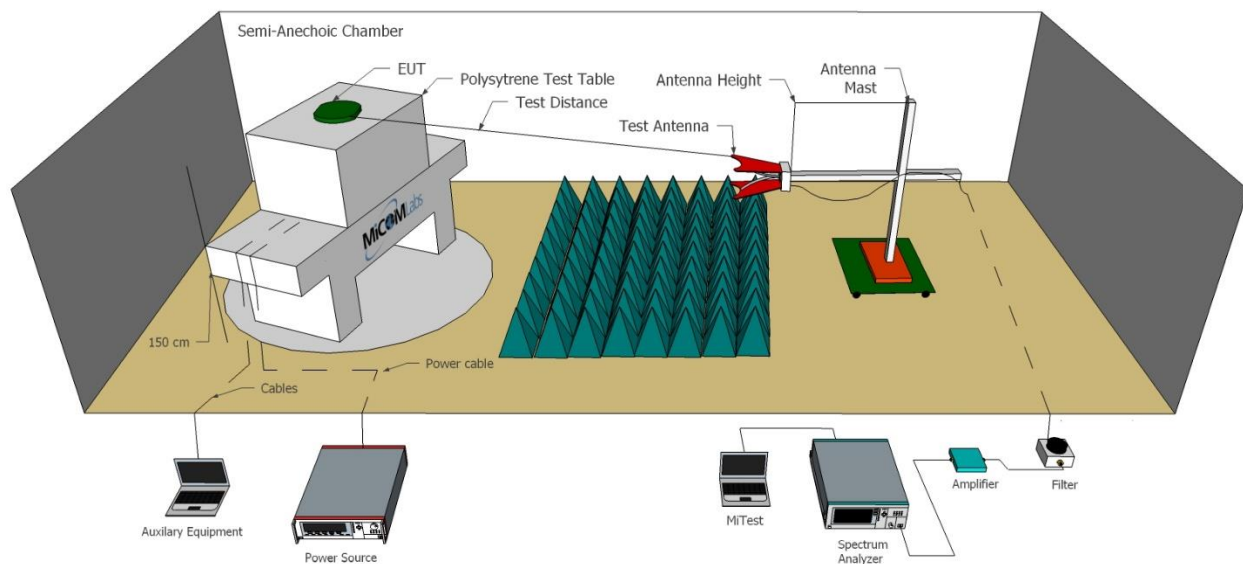

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 18 of 30

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	21 Jan 2019
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	6 Nov 2018
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2018
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	6 Nov 2018
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Oct 2018
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	12 Oct 2018
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Nov 2018
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Nov 2018
482	Cable - Amp to Antenna	SRC Haverhill	157-3051574	482	6 Nov 2018
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 20 of 30

9. TEST RESULTS

9.1.1. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47: Part 15.205 ISED RSS-GEN:8.9, 8.10	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10: 6.3, 6.5 & 6.6, 6.10 KDB 558074 D01 Measurement Guidance V04	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions ([Restricted Bands](#))

Testing 30 – 10,000 MHz was performed in an anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR Compliant receiver. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Only the highest emissions relative to the limit are listed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 21 of 30

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 22 of 30

- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 23 of 30

9.1.1.1. TX Spurious & Restricted Band Emissions

Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	Pulse SZ0845W	Variant:	802.11b
Antenna Gain (dBi):	5.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.00	Data Rate:	1 MBit/s
Power Setting:	19	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2411.58	51.73	-1.76	-12.32	37.65	Fundamental	Vertical	159	0	--	--	
#2	4823.90	67.84	-2.52	-12.43	52.89	Max Peak	Vertical	163	289	74.0	-21.1	Pass
#3	4823.90	63.55	-2.52	-12.43	48.60	Max Avg	Vertical	163	289	54.0	-5.4	Pass

Test Notes: EUT connected to and powered by laptop. 2.4G notch in front of amp to prevent overload.

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 24 of 30

Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	Pulse SZ0845W	Variant:	802.11b
Antenna Gain (dBi):	5.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2437.00	Data Rate:	1 MBit/s
Power Setting:	19	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2437.97	57.36	-1.78	-12.10	43.48	Fundamental	Vertical	151	0	--	--	
#2	4873.99	67.90	-2.51	-12.61	52.78	Max Peak	Vertical	176	317	74.0	-21.2	Pass
#3	4873.99	64.14	-2.51	-12.61	49.02	Max Avg	Vertical	176	317	54.0	-5.0	Pass

Test Notes: EUT connected to and powered by laptop. 2.4G notch in front of amp to prevent overload.

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISSED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 25 of 30

Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	Pulse SZ0845W	Variant:	802.11b
Antenna Gain (dBi):	5.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.00	Data Rate:	1 MBit/s
Power Setting:	19	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2461.46	58.09	-1.79	-11.95	44.35	Fundamental	Vertical	151	0	--	--	
#2	4924.05	66.30	-2.56	-12.35	51.39	Max Peak	Vertical	178	291	74.0	-22.6	Pass
#3	4924.05	61.98	-2.56	-12.35	47.07	Max Avg	Vertical	178	291	54.0	-6.9	Pass

Test Notes: EUT connected to and powered by laptop.

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 26 of 30

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Nanit N151 Smart Baby Monitor
To: FCC CFR 47 15.247 (DTS) & ISED RSS-247
Serial #: UDIS01-U6 Rev A Addendum
Issue Date: 8th October 2018
Page: 27 of 30


A.1. Emissions

A.1.1. Radiated Emissions

A.1.1.1. TX Spurious & Restricted Band Emissions



Variant: 802.11b, Test Freq: 2412.00 MHz, Power Setting: 19, Duty Cycle (%): 99

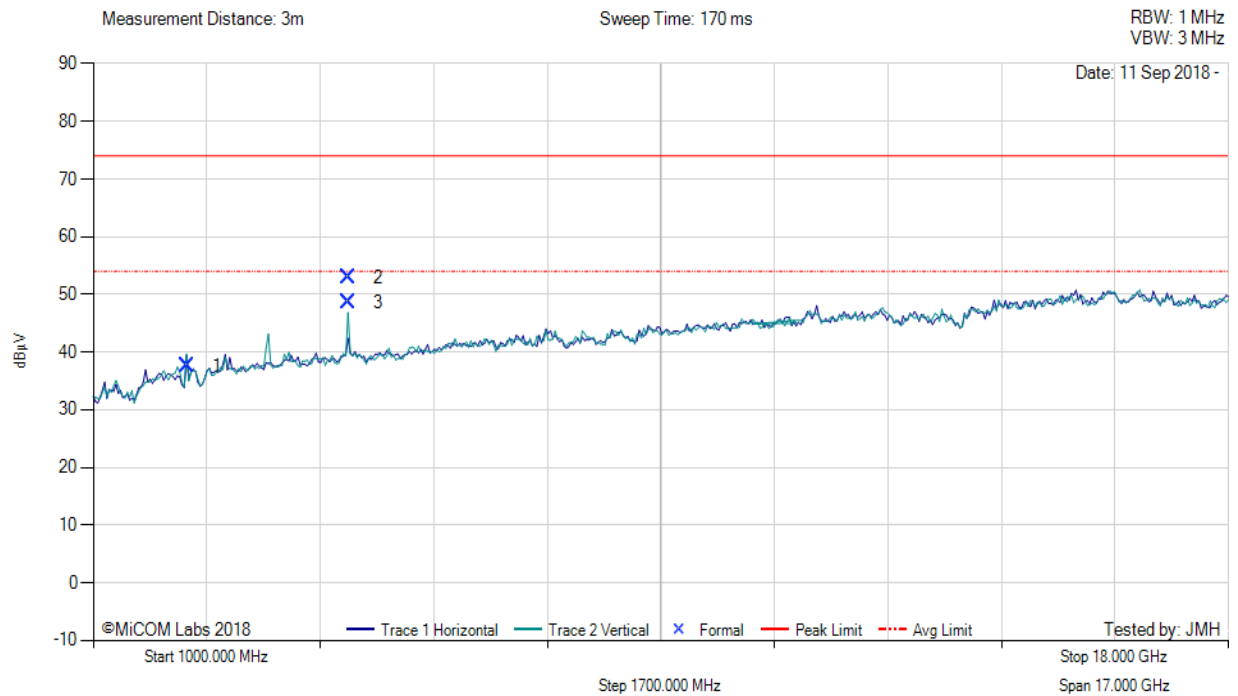


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2411.58	51.73	-1.76	-12.32	37.65	Fundamental	Vertical	159	0	--	--	
2	4823.90	67.84	-2.52	-12.43	52.89	Max Peak	Vertical	163	289	74.0	-21.1	Pass
3	4823.90	63.55	-2.52	-12.43	48.60	Max Avg	Vertical	163	289	54.0	-5.4	Pass

Test Notes: EUT connected to and powered by laptop. 2.4G notch in front of amp to prevent overload.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Variant: 802.11b, Test Freq: 2437.00 MHz, Power Setting: 19, Duty Cycle (%): 99

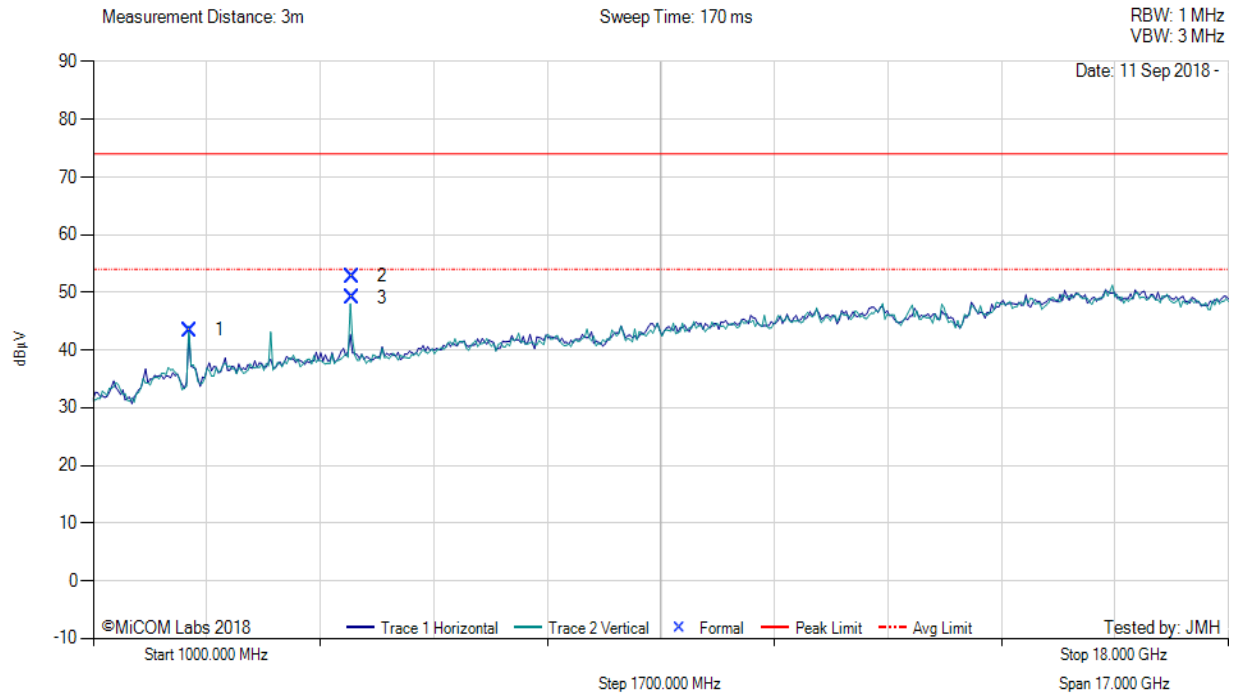


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2437.97	57.36	-1.78	-12.10	43.48	Fundamental	Vertical	151	0	--	--	
2	4873.99	67.90	-2.51	-12.61	52.78	Max Peak	Vertical	176	317	74.0	-21.2	Pass
3	4873.99	64.14	-2.51	-12.61	49.02	Max Avg	Vertical	176	317	54.0	-5.0	Pass

Test Notes: EUT connected to and powered by laptop.

[back to matrix](#)

Variant: 802.11b, Test Freq: 2462.00 MHz, Power Setting: 19, Duty Cycle (%): 99

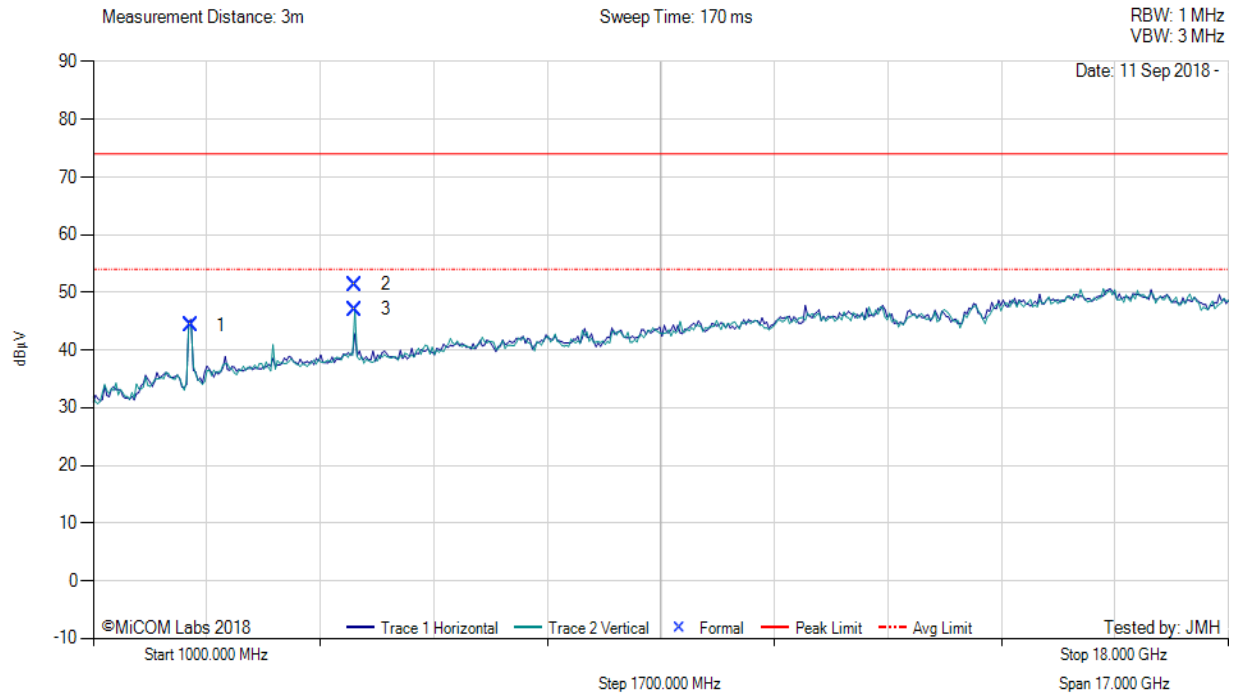

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2461.46	58.09	-1.79	-11.95	44.35	Fundamental	Vertical	151	0	--	--	
2	4924.05	66.30	-2.56	-12.35	51.39	Max Peak	Vertical	178	291	74.0	-22.6	Pass
3	4924.05	61.98	-2.56	-12.35	47.07	Max Avg	Vertical	178	291	54.0	-6.9	Pass

Test Notes: EUT connected to and powered by laptop.

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com