

# FCC TEST REPORT

## FCC ID: 2AIXDDP30A

Product : Portable Projector

Model Name : DP30A

Brand : Focalmax

Report No. : PTC800999160612E-FC01

### Prepared for

SHENZHEN D-light Technology Limited  
2201F, Block A, Wisdom Building, Qiaoxiang Road,Shahe Street,  
Nanshan District, Shenzhen, China

### Prepared by

DongGuan Precise Testing Service Co.,Ltd.  
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community  
Dongcheng District, Dongguan, Guangdong, China

## TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN D-light Technolgy Limited

Address : 2201F, Block A, Wisdom Building, Qiaoxiang Road,Shahe Street,Nanshan District, Shenzhen, China

Manufacture's name : SHENZHEN D-light Technolgy Limited

Address : 2201F, Block A, Wisdom Building, Qiaoxiang Road,Shahe Street,Nanshan District, Shenzhen, China

Product name : Portable Projector

Model name : DP30A

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05

Test Date : Jun.13. 2016 ~ Jul.15. 2016

Date of Issue : Jul.18. 2016

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer




August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du



## Contents

	Page
<b>2 TEST SUMMARY.....</b>	<b>5</b>
<b>3 GENERAL INFORMATION.....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST .....	7
3.3 TEST MODE.....	7
3.4 TEST SITE .....	7
<b>4 EQUIPMENT DURING TEST.....</b>	<b>8</b>
4.1 EQUIPMENTS LIST.....	8
4.2 MEASUREMENT UNCERTAINTY .....	9
<b>5 CONDUCTED EMISSION.....</b>	<b>10</b>
5.1 E.U.T. OPERATION.....	10
5.2 EUT SETUP .....	10
5.3 MEASUREMENT DESCRIPTION.....	11
5.4 CONDUCTED EMISSION TEST RESULT .....	11
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>13</b>
6.1 EUT OPERATION .....	13
6.2 TEST SETUP.....	14
6.3 SPECTRUM ANALYZER SETUP.....	15
6.4 TEST PROCEDURE .....	16
6.5 SUMMARY OF TEST RESULTS.....	17
<b>7 CONDUCTED SPURIOUS EMISSION.....</b>	<b>32</b>
7.1 TEST PROCEDURE .....	32
7.2 TEST RESULT.....	32
<b>8 BAND EDGE MEASUREMENT .....</b>	<b>36</b>
8.1 TEST PROCEDURE .....	36
8.2 TEST RESULT.....	37
<b>9 6DB BANDWIDTH MEASUREMENT.....</b>	<b>41</b>
9.1 TEST PROCEDURE .....	41
9.2 TEST RESULT.....	41
<b>10 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>48</b>
10.1 TEST PROCEDURE.....	48
10.2 TEST RESULT .....	49



<b>11</b>	<b>POWER SPECTRAL DENSITY.....</b>	<b>52</b>
11.1	TEST PROCEDURE.....	52
11.2	TEST RESULT .....	52
<b>12</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>59</b>
<b>13</b>	<b>TEST SETUP.....</b>	<b>60</b>
<b>14</b>	<b>EUT PHOTOS.....</b>	<b>62</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		

### 3 General Information

#### 3.1 GeneralDescription of E.U.T.

Product Name	:	Portable Projector
Model Name	:	DP30A
Model Description	:	N/A
Bluetooth Version	:	V4.0(BLE Only)
Operating frequency	:	For BLE: 2402-2480MHz,40 channels For WIFI 2412-2462MHz, 11channels
Antenna installation:	:	PCB printed antenna
Antenna Gain:	:	WiFi: 0dBi BLE: 0dBi
The lowest oscillator:	:	26MHz
Type of Modulation	:	For BLE: GFSK For WIFI: IEEE 802.11b CCK/QPSK/BPSK IEEE 802.11g BPSK/QPSK/16QAM/64QAM IEEE 802.11n-HT20 BPSK/QPSK/16QAM/64QAM
Power supply	:	DC 3.8V 2200mAh power by battery, DC 5V 2.5A charging by AC adapter
Adapter	:	Input: AC 100-240V 50/60Hz 0.5A max Output: DC 5V 2.5A

### 3.2 Channel List

WIFI							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/
BLE							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
802.11b/g/n-HT20	Transmitting	2412MHz	2437MHz	2462MHz
GFSK(BLE)	Transmitting	2402MHz	2440MHz	2480MHz
Tests Carried Out Under FCC part 15.207				
Test Item		Test Mode		
Conduction Emission 0.15MHz to 30MHz		BT Communication		

### 3.4 Test Site

Dongguan Precise Testing Service Co., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China, Dongguan, 523129

China

FCC Registration Number: 371540

IC Registration Number: 12191A-1

## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2015	Aug.03, 2016	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
4	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	July 15, 2015	July 14, 2016	1 year
5	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2015	July 14, 2016	1 year
6	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2015	July 14, 2016	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year
3	Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year





#### 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions(150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$

## 5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207  
 Test Method: : ANSI C63.4:2014  
 Test Result: : PASS  
 Frequency Range: : 150kHz to 30MHz  
 Class/Severity: : Class B  
 Limit: : 66-56 dB $\mu$ V between 0.15MHz & 0.5MHz  
               : 56 dB $\mu$ V between 0.5MHz & 5MHz  
               : 60 dB $\mu$ V between 5MHz & 30MHz  
 Detector: : Peak for pre-scan(9kHz Resolution Bandwidth)


### 5.1 E.U.T. Operation

Operating Environment:

Temperature: : 25.5 °C  
 Humidity: : 51 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation: : Refer to section 3.3

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

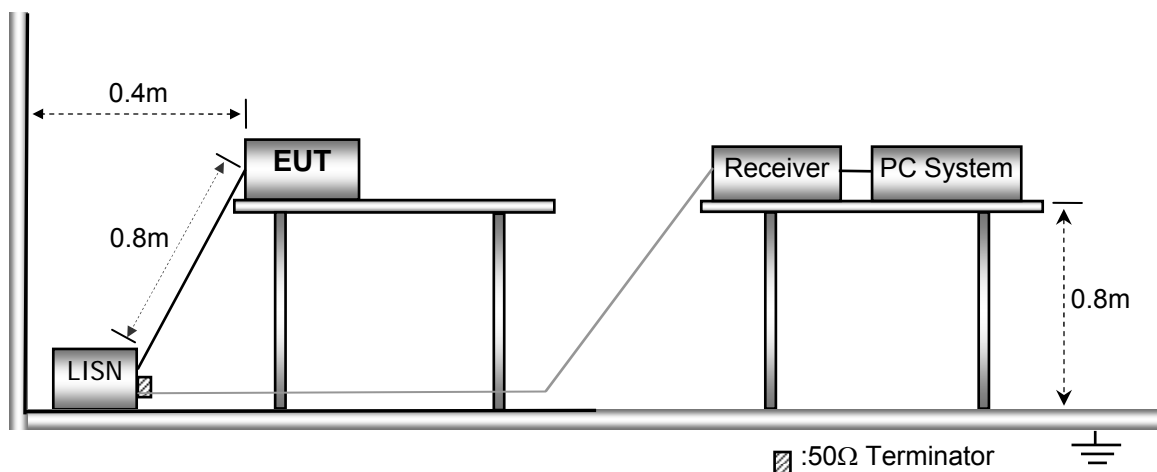


### 5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 5.4 Conducted Emission Test Result

Live line:

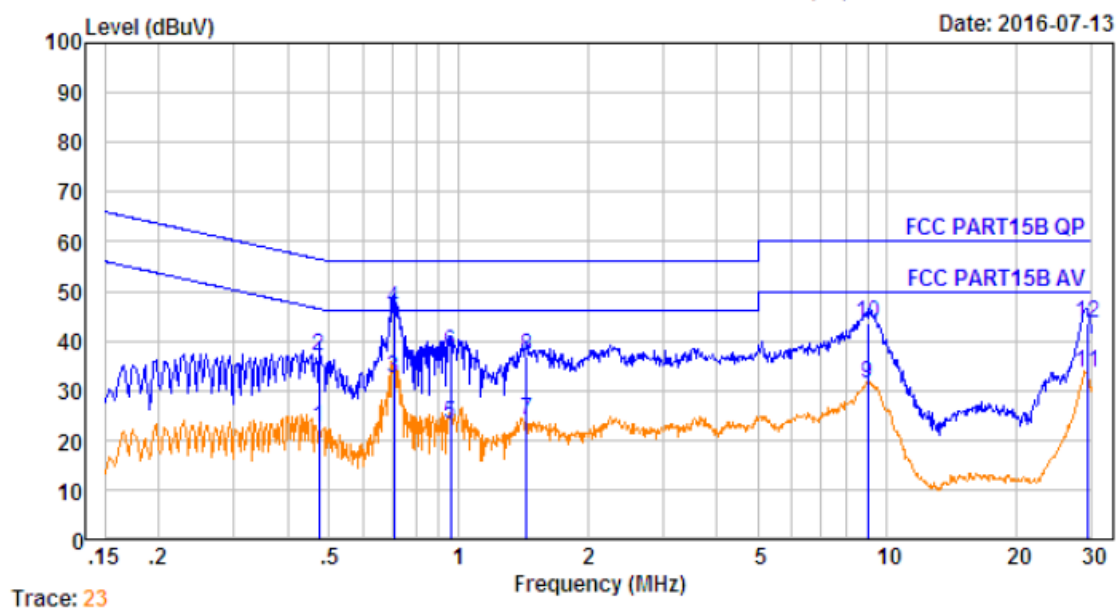


Trace: 23

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.474	10.64	0.60	11.39	22.63	46.45	-23.82	Average
2.	0.474	10.64	0.60	25.59	36.83	56.45	-19.62	QP
3.	0.708	10.66	0.60	21.25	32.51	46.00	-13.49	Average
4.	0.708	10.66	0.60	35.35	46.61	56.00	-9.39	QP
5.	0.958	10.67	0.60	12.03	23.30	46.00	-22.70	Average
6.	0.958	10.67	0.60	26.33	37.60	56.00	-18.40	QP
7.	1.441	10.68	0.60	12.53	23.81	46.00	-22.19	Average
8.	1.441	10.68	0.60	25.63	36.91	56.00	-19.09	QP
9.	9.011	10.75	0.60	20.00	31.35	50.00	-18.65	Average
10.	9.011	10.75	0.60	32.10	43.45	60.00	-16.55	QP
11.	29.216	10.80	0.60	22.03	33.43	50.00	-16.57	Average
12.	29.216	10.80	0.60	32.23	43.63	60.00	-16.37	QP

Remark: Emission Level = Reading + Cable Loss + AMN Factor



Neutral line:

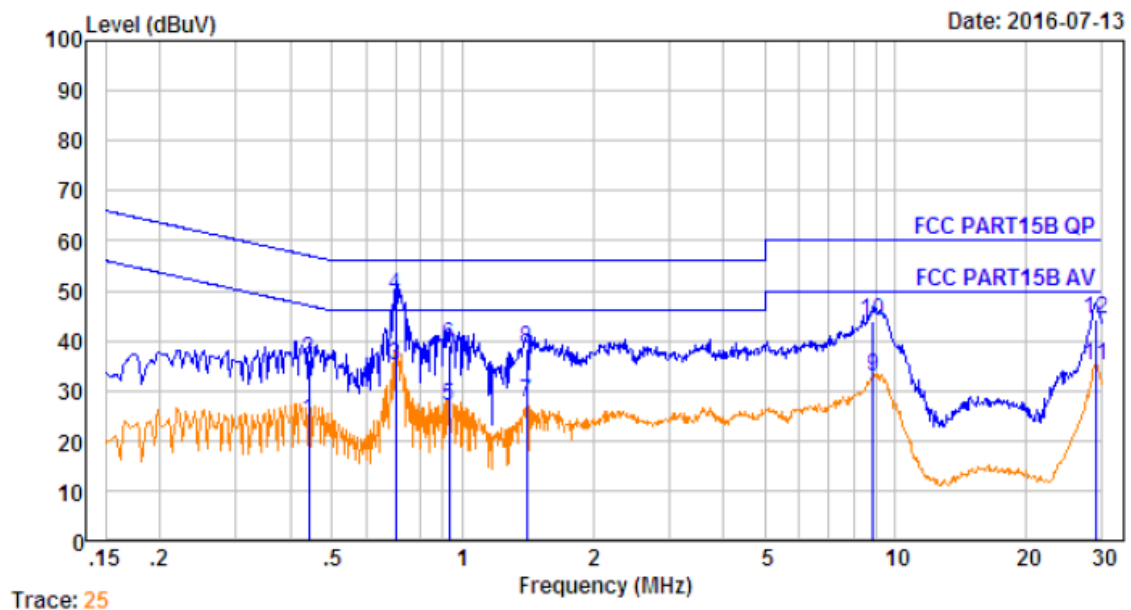

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.442	10.64	0.60	12.89	24.13	47.02	-22.89	Average
2.	0.442	10.64	0.60	25.09	36.33	57.02	-20.69	QP
3.	0.701	10.66	0.60	23.86	35.12	46.00	-10.88	Average
4.	0.701	10.66	0.60	37.76	49.02	56.00	-6.98	QP
5.	0.933	10.67	0.60	15.61	26.88	46.00	-19.12	Average
6.	0.933	10.67	0.60	27.71	38.98	56.00	-17.02	QP
7.	1.411	10.68	0.60	16.28	27.56	46.00	-18.44	Average
8.	1.411	10.68	0.60	27.08	38.36	56.00	-17.64	QP
9.	8.869	10.75	0.60	21.59	32.94	50.00	-17.06	Average
10.	8.869	10.75	0.60	32.59	43.94	60.00	-16.06	QP
11.	29.061	10.80	0.60	23.82	35.22	50.00	-14.78	Average
12.	29.061	10.80	0.60	33.02	44.42	60.00	-15.58	QP

Remark: Emission Level = Reading + Cable Loss + AMN Factor

## 6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber testsite


The test setup for emission measurement below 30MHz

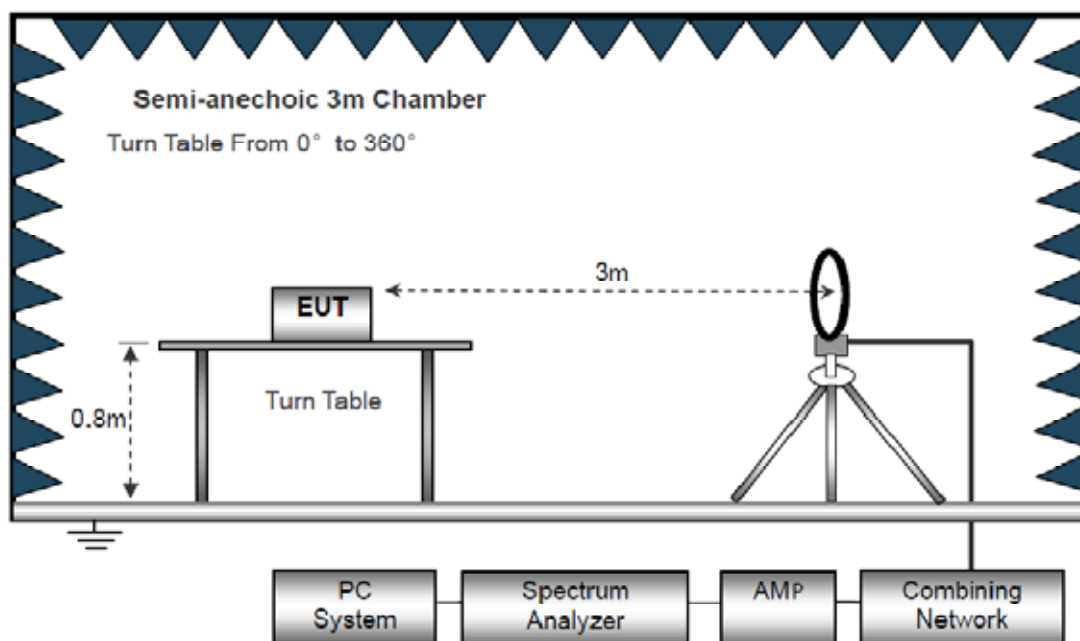

The test setup for emission measurement from 30 MHz to 1 GHz.

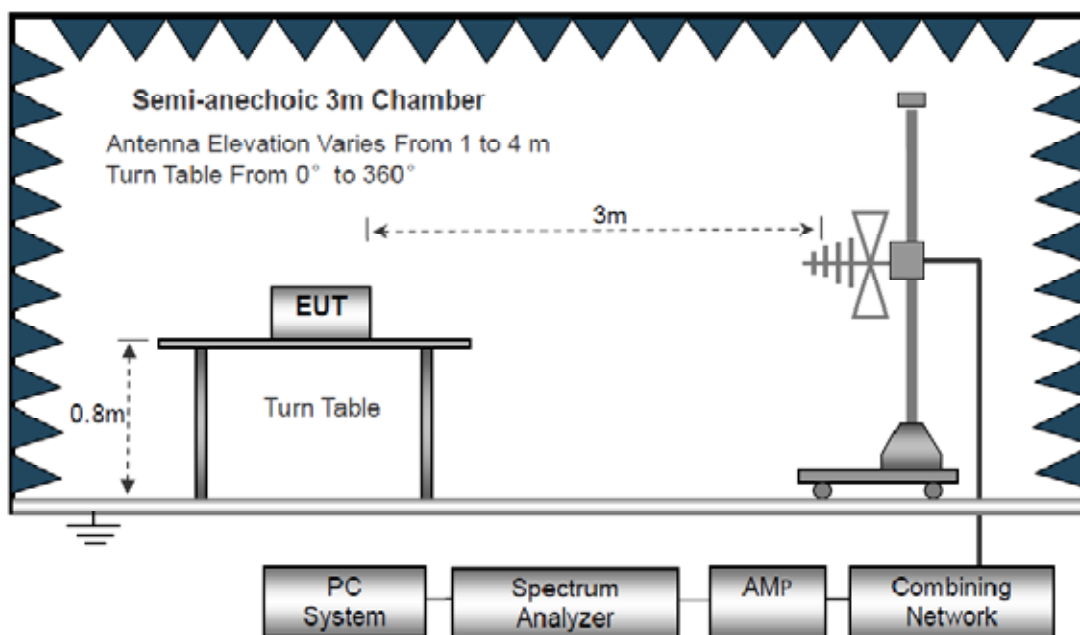

The test setup for emission measurement above 1 GHz

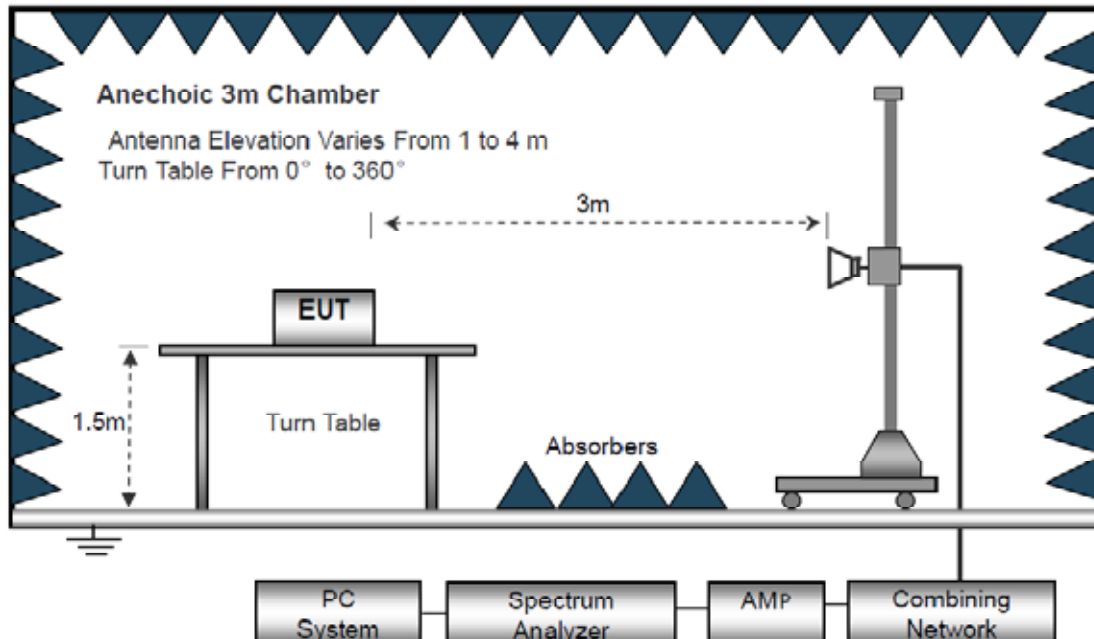

### 6.3 Spectrum Analyzer Setup

Below 30MHz

IF Bandwidth	10kHz
Resolution Bandwidth	10kHz
Video Bandwidth	10kHz

30MHz ~ 1GHz

Detector	: PK
Resolution Bandwidth	: 100kHz
Video Bandwidth	: 300kHz
Detector	: QP
Resolution Bandwidth	: 120kHz
Video Bandwidth	: 300kHz

Above 1GHz

Detector	: PK
Resolution Bandwidth	: 1MHz
Video Bandwidth	: 3MHz
Detector	: AV
Resolution Bandwidth	: 1MHz
Video Bandwidth	: 10Hz

## **6.4 Test Procedure**

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room





## 6.5 Summary of Test Results


### Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 1GHz

All applicable test modes have been tested and only the worst case (802.11b TX in middle channel) is recorded.

Antenna Polarization: Horizontal

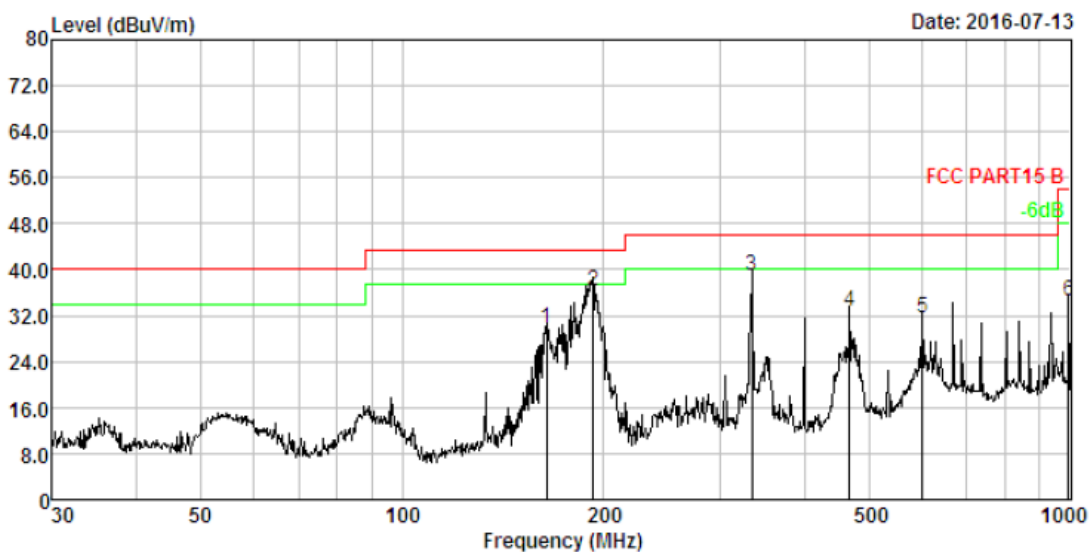


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	164.330	2.59	13.64	44.05	30.56	29.72	43.50	-13.78	QP
2.	193.095	2.74	10.87	53.41	30.62	36.40	43.50	-7.10	QP
3.	333.687	3.24	13.95	52.47	30.81	38.85	46.00	-7.15	QP
4.	467.235	3.54	16.65	43.38	30.93	32.64	46.00	-13.36	QP
5.	601.427	3.77	19.16	39.72	31.01	31.64	46.00	-14.36	QP
6.	993.011	4.22	23.44	38.17	31.19	34.64	54.00	-19.36	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical

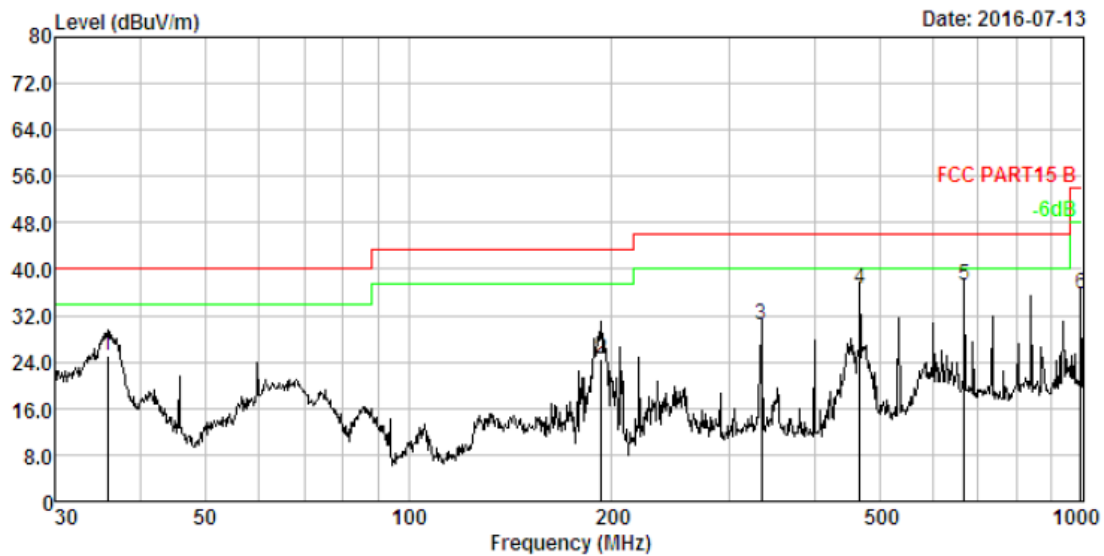

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	35.749	1.21	13.43	40.51	30.03	25.12	40.00	-14.88	QP
2.	193.095	2.74	10.87	41.41	30.62	24.40	43.50	-19.10	QP
3.	333.687	3.24	13.95	43.90	30.81	30.28	46.00	-15.72	QP
4.	467.235	3.54	16.65	47.42	30.93	36.68	46.00	-9.32	QP
5.	668.142	3.86	19.76	44.70	31.05	37.27	46.00	-8.73	QP
6.	993.011	4.22	23.44	39.31	31.19	35.78	54.00	-18.22	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**Test Frequency: 1GHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE)Low Channel						
Harmonic& Spurious Emission						
1184.32	44.41	PK	-18.92	25.49	74.00	-48.51
1184.32	40.35	Ave	-18.92	21.43	54.00	-32.57
4804.00	47.99	PK	-1.06	46.93	74.00	-27.07
4804.00	43.27	Ave	-1.06	42.21	54.00	-11.79
7206.00	49.66	PK	1.33	50.99	74.00	-23.01
7206.00	42.74	Ave	1.33	44.07	54.00	-9.93
Restricted bands Emission						
2337.11	45.02	PK	-13.19	31.83	74.00	-42.17
2337.11	39.30	Ave	-13.19	26.11	54.00	-27.89
2369.69	42.91	PK	-13.14	29.77	74.00	-44.23
2369.69	38.12	Ave	-13.14	24.98	54.00	-29.02
2491.59	42.47	PK	-13.08	29.39	74.00	-44.61
2491.59	40.29	Ave	-13.08	27.21	54.00	-26.79
Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) Middle Channel						
Harmonic& Spurious Emission						
1184.32	43.69	PK	-18.92	24.77	74.00	-49.23
1184.32	40.67	Ave	-18.92	21.75	54.00	-32.25
4880.00	48.42	PK	-0.93	47.49	74.00	-26.51
4880.00	43.92	Ave	-0.93	42.99	54.00	-11.01
7320.00	50.16	PK	1.67	51.83	74.00	-22.17
7320.00	42.66	Ave	1.67	44.33	54.00	-9.67
Restricted bands Emission						
2323.20	44.36	PK	-13.19	31.17	74.00	-42.83
2323.20	39.90	Ave	-13.19	26.71	54.00	-27.29
2374.92	43.60	PK	-13.14	30.46	74.00	-43.54
2374.92	37.77	Ave	-13.14	24.63	54.00	-29.37
2488.48	42.91	PK	-13.08	29.83	74.00	-44.17
2488.48	39.52	Ave	-13.08	26.44	54.00	-27.56
Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) High Channel						
Harmonic& Spurious Emission						
1184.32	43.22	PK	-18.92	24.30	74.00	-49.70
1184.32	41.43	Ave	-18.92	22.51	54.00	-31.49
4960.00	48.63	PK	-0.87	47.76	74.00	-26.24
4960.00	44.26	Ave	-0.87	43.39	54.00	-10.61
7440.00	50.79	PK	1.84	52.63	74.00	-21.37
7440.00	43.45	Ave	1.84	45.29	54.00	-8.71
Restricted bands Emission						
2331.20	45.00	PK	-13.19	31.81	74.00	-42.19
2331.20	40.08	Ave	-13.19	26.89	54.00	-27.11
2358.45	43.18	PK	-13.14	30.04	74.00	-43.96
2358.45	37.18	Ave	-13.14	24.04	54.00	-29.96
2488.26	42.96	PK	-13.08	29.88	74.00	-44.12
2488.26	39.57	Ave	-13.08	26.49	54.00	-27.51
Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11bLow Channel						
Harmonic& Spurious Emission						
1349.82	43.48	PK	-17.57	25.91	74.00	-48.09
1349.82	46.05	Ave	-17.57	28.48	54.00	-25.52
4824.00	48.08	PK	-1.06	47.02	74.00	-26.98
4824.00	46.15	Ave	-1.06	45.09	54.00	-8.91
7236.00	50.09	PK	1.33	51.42	74.00	-22.58
7236.00	45.03	Ave	1.33	46.36	54.00	-7.64
Restricted bands Emission						
2313.80	45.02	PK	-13.19	31.83	74.00	-42.17
2313.80	39.30	Ave	-13.19	26.11	54.00	-27.89
2352.36	42.91	PK	-13.14	29.77	74.00	-44.23
2352.36	38.12	Ave	-13.14	24.98	54.00	-29.02
2498.77	42.47	PK	-13.08	29.39	74.00	-44.61
2498.77	40.29	Ave	-13.08	27.21	54.00	-26.79
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11bMiddle Channel						
Harmonic& Spurious Emission						
1349.82	42.81	PK	-17.57	25.24	74.00	-48.76
1349.82	46.56	Ave	-17.57	28.99	54.00	-25.01
4874.00	48.77	PK	-0.93	47.84	74.00	-26.16
4874.00	46.76	Ave	-0.93	45.83	54.00	-8.17
7311.00	51.04	PK	1.67	52.71	74.00	-21.29
7311.00	45.20	Ave	1.67	46.87	54.00	-7.13
Restricted bands Emission						
2327.72	44.88	PK	-13.19	31.69	74.00	-42.31
2327.72	40.12	Ave	-13.19	26.93	54.00	-27.07
2388.86	42.45	PK	-13.14	29.31	74.00	-44.69
2388.86	37.90	Ave	-13.14	24.76	54.00	-29.24
2490.51	41.73	PK	-13.08	28.65	74.00	-45.35
2490.51	40.68	Ave	-13.08	27.60	54.00	-26.40
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11bHigh Channel						
Harmonic& Spurious Emission						
1349.82	41.81	PK	-17.57	24.24	74.00	-49.76
1349.82	46.57	Ave	-17.57	29.00	54.00	-25.00
4924.00	48.69	PK	-0.87	47.82	74.00	-26.18
4924.00	46.63	Ave	-0.87	45.76	54.00	-8.24
7386.00	50.14	PK	1.84	51.98	74.00	-22.02
7386.00	45.20	Ave	1.84	47.04	54.00	-6.96
Restricted bands Emission						
2316.94	44.05	PK	-13.19	30.86	74.00	-43.14
2316.94	39.72	Ave	-13.19	26.53	54.00	-27.47
2370.57	42.31	PK	-13.14	29.17	74.00	-44.83
2370.57	38.70	Ave	-13.14	25.56	54.00	-28.44
2485.33	42.26	PK	-13.08	29.18	74.00	-44.82
2485.33	41.39	Ave	-13.08	28.31	54.00	-25.69
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						





Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11gLow Channel						
Harmonic& Spurious Emission						
1349.82	42.51	PK	-17.57	24.94	74.00	-49.06
1349.82	46.12	Ave	-17.57	28.55	54.00	-25.45
4824.00	48.64	PK	-1.06	47.58	74.00	-26.42
4824.00	46.73	Ave	-1.06	45.67	54.00	-8.33
7236.00	50.56	PK	1.33	51.89	74.00	-22.11
7236.00	44.05	Ave	1.33	45.38	54.00	-8.62
Restricted bands Emission						
2345.64	45.02	PK	-13.19	31.83	74.00	-42.17
2345.64	39.30	Ave	-13.19	26.11	54.00	-27.89
2370.46	42.91	PK	-13.14	29.77	74.00	-44.23
2370.46	38.12	Ave	-13.14	24.98	54.00	-29.02
2491.59	42.47	PK	-13.08	29.39	74.00	-44.61
2491.59	40.29	Ave	-13.08	27.21	54.00	-26.79
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11gMiddle Channel						
Harmonic& Spurious Emission						
1349.82	41.57	PK	-17.57	24.00	74.00	-50.00
1349.82	46.30	Ave	-17.57	28.73	54.00	-25.27
4874.00	49.40	PK	-0.93	48.47	74.00	-25.53
4874.00	46.79	Ave	-0.93	45.86	54.00	-8.14
7311.00	50.79	PK	1.67	52.46	74.00	-21.54
7311.00	44.19	Ave	1.67	45.86	54.00	-8.14
Restricted bands Emission						
2341.32	45.91	PK	-13.19	32.72	74.00	-41.28
2341.32	39.54	Ave	-13.19	26.35	54.00	-27.65
2359.37	42.34	PK	-13.14	29.20	74.00	-44.80
2359.37	37.46	Ave	-13.14	24.32	54.00	-29.68
2485.85	42.59	PK	-13.08	29.51	74.00	-44.49
2485.85	39.99	Ave	-13.08	26.91	54.00	-27.09
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11gHigh Channel						
Harmonic& Spurious Emission						
1349.82	42.29	PK	-17.57	24.72	74.00	-49.28
1349.82	46.76	Ave	-17.57	29.19	54.00	-24.81
4924.00	49.23	PK	-0.87	48.36	74.00	-25.64
4924.00	45.84	Ave	-0.87	44.97	54.00	-9.03
7386.00	50.81	PK	1.84	52.65	74.00	-21.35
7386.00	44.40	Ave	1.84	46.24	54.00	-7.76
Restricted bands Emission						
2319.91	46.57	PK	-13.19	33.38	74.00	-40.62
2319.91	38.64	Ave	-13.19	25.45	54.00	-28.55
2363.38	42.99	PK	-13.14	29.85	74.00	-44.15
2363.38	38.41	Ave	-13.14	25.27	54.00	-28.73
2490.57	42.04	PK	-13.08	28.96	74.00	-45.04
2490.57	40.16	Ave	-13.08	27.08	54.00	-26.92
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20Low Channel						
Harmonic& Spurious Emission						
1349.82	42.50	PK	-17.57	24.93	74.00	-49.07
1349.82	45.27	Ave	-17.57	27.70	54.00	-26.30
4824.00	48.13	PK	-1.06	47.07	74.00	-26.93
4824.00	47.52	Ave	-1.06	46.46	54.00	-7.54
7236.00	50.71	PK	1.33	52.04	74.00	-21.96
7236.00	43.50	Ave	1.33	44.83	54.00	-9.17
Restricted bands Emission						
2334.69	45.02	PK	-13.19	31.83	74.00	-42.17
2334.69	39.30	Ave	-13.19	26.11	54.00	-27.89
2374.75	42.91	PK	-13.14	29.77	74.00	-44.23
2374.75	38.12	Ave	-13.14	24.98	54.00	-29.02
2497.12	42.47	PK	-13.08	29.39	74.00	-44.61
2497.12	40.29	Ave	-13.08	27.21	54.00	-26.79
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20Middle Channel						
Harmonic& Spurious Emission						
1349.82	42.80	PK	-17.57	25.23	74.00	-48.77
1349.82	44.61	Ave	-17.57	27.04	54.00	-26.96
4874.00	47.78	PK	-0.93	46.85	74.00	-27.15
4874.00	48.00	Ave	-0.93	47.07	54.00	-6.93
7311.00	50.03	PK	1.67	51.70	74.00	-22.30
7311.00	42.77	Ave	1.67	44.44	54.00	-9.56
Restricted bands Emission						
2331.37	46.01	PK	-13.19	32.82	74.00	-41.18
2331.37	39.75	Ave	-13.19	26.56	54.00	-27.44
2380.17	42.67	PK	-13.14	29.53	74.00	-44.47
2380.17	38.98	Ave	-13.14	25.84	54.00	-28.16
2488.60	41.88	PK	-13.08	28.80	74.00	-45.20
2488.60	39.75	Ave	-13.08	26.67	54.00	-27.33
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20High Channel						
Harmonic& Spurious Emission						
1349.82	42.41	PK	-17.57	24.84	74.00	-49.16
1349.82	44.01	Ave	-17.57	26.44	54.00	-27.56
4924.00	47.71	PK	-0.87	46.84	74.00	-27.16
4924.00	48.71	Ave	-0.87	47.84	54.00	-6.16
7386.00	49.95	PK	1.84	51.79	74.00	-22.21
7386.00	42.74	Ave	1.84	44.58	54.00	-9.42
Restricted bands Emission						
2315.65	45.22	PK	-13.19	32.03	74.00	-41.97
2315.65	39.92	Ave	-13.19	26.73	54.00	-27.27
2382.62	43.22	PK	-13.14	30.08	74.00	-43.92
2382.62	38.54	Ave	-13.14	25.40	54.00	-28.60
2485.18	42.50	PK	-13.08	29.42	74.00	-44.58
2485.18	40.06	Ave	-13.08	26.98	54.00	-27.02
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

**Radiated band edge:**

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE)						
2400.00	47.90	PK	-13.12	34.78	74.00	-39.22
2400.00	40.56	PK	-13.12	27.44	74.00	-46.56
2483.50	47.23	PK	-13.06	34.17	74.00	-39.83
2483.50	42.24	PK	-13.06	29.18	74.00	-44.82
802.11b						
2400.00	48.30	PK	-13.12	35.18	74.00	-38.82
2400.00	41.19	PK	-13.12	28.07	74.00	-45.93
2483.50	48.42	PK	-13.06	35.36	74.00	-38.64
2483.50	42.56	PK	-13.06	29.50	74.00	-44.50
802.11g						
2400.00	48.74	PK	-13.12	35.62	74.00	-38.38
2400.00	40.74	PK	-13.12	27.62	74.00	-46.38
2483.50	48.12	PK	-13.06	35.06	74.00	-38.94
2483.50	41.25	PK	-13.06	28.19	74.00	-45.81
802.11n HT20						
2400.00	47.44	PK	-13.12	34.32	74.00	-39.68
2400.00	40.83	PK	-13.12	27.71	74.00	-46.29
2483.50	47.41	PK	-13.06	34.35	74.00	-39.65
2483.50	40.85	PK	-13.06	27.79	74.00	-46.21

**Test Frequency :Above 18GHz**

The measurements were more than 20 dB below the limit and not reported

Remark1.The testing has been conformed to  $10 \times 2480 = 24800\text{MHz}$ .

2.All other emissions more than 30dB below the limit.

## 7 Conducted Spurious Emission

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R05
Test Limit	: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	: Refer to section 3.3

### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 7.2 Test Result

BLE Low Channel







BLE Middle Channel



BLE High Channel





802.11b Low Channel



802.11b Middle Channel



### 802.11b High Channel



Remark: Scan with 802.11b/g/n HT20/n HT40, The worst case(802.11b mode) was recorded.

## 8 Band Edge Measurement


Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	: Refer to section 3.3

### 8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

## 8.2 Test Result


GFSK(BLE) Band edge-left side

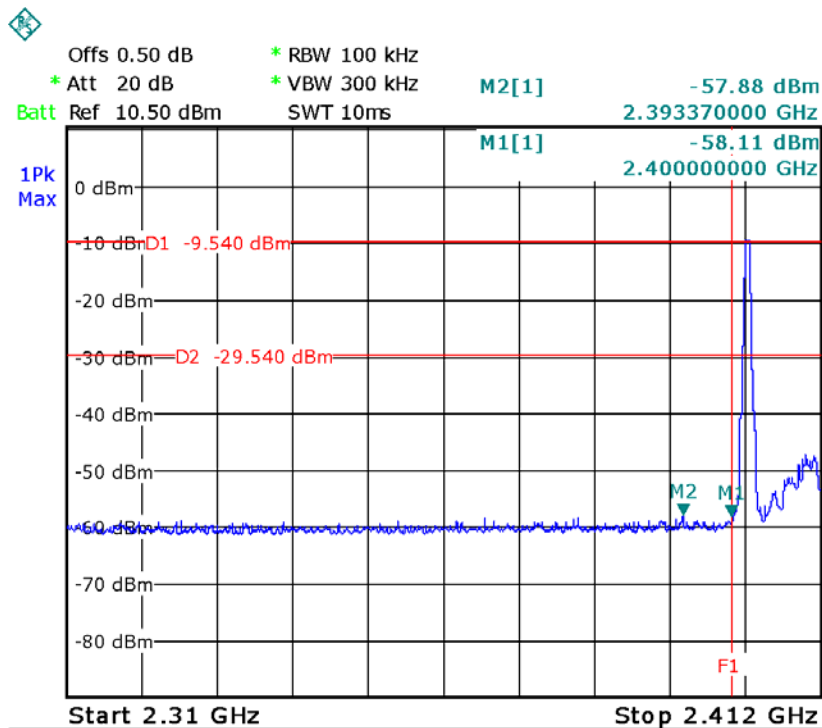


GFSK(BLE) Band edge-right side

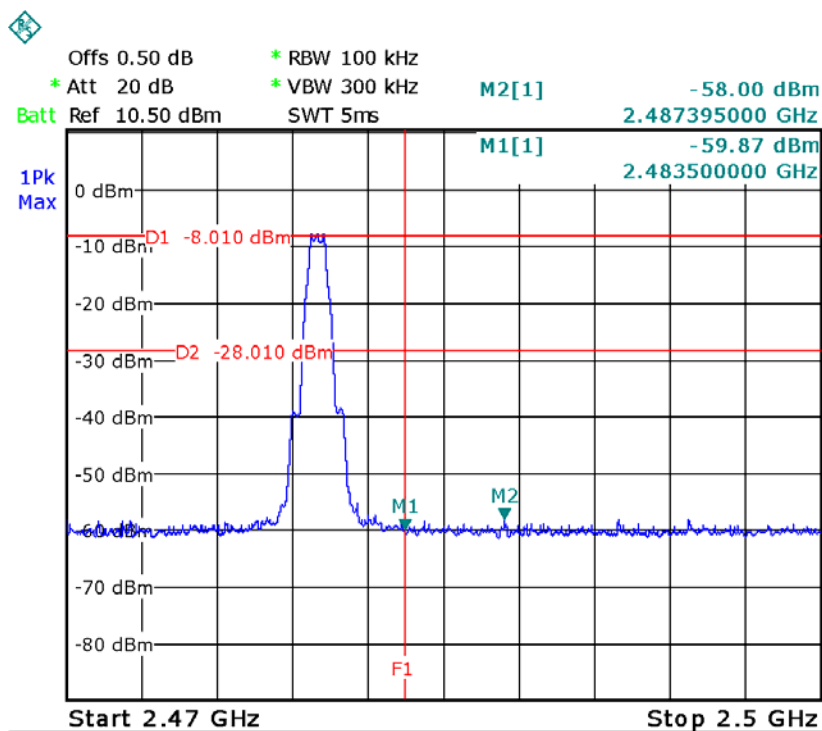


802.11b Band edge-left side

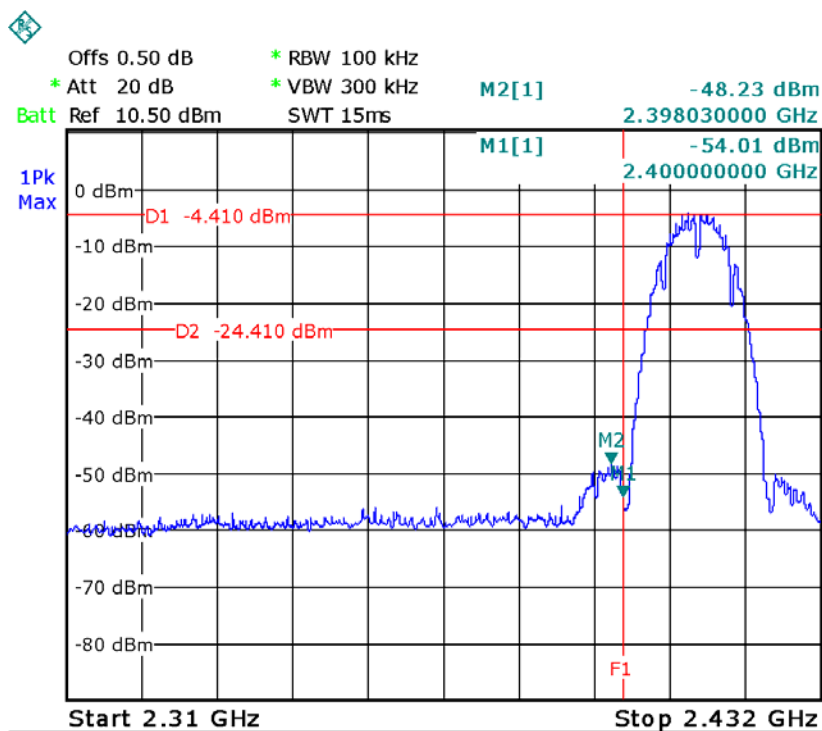


802.11b Band edge-right side

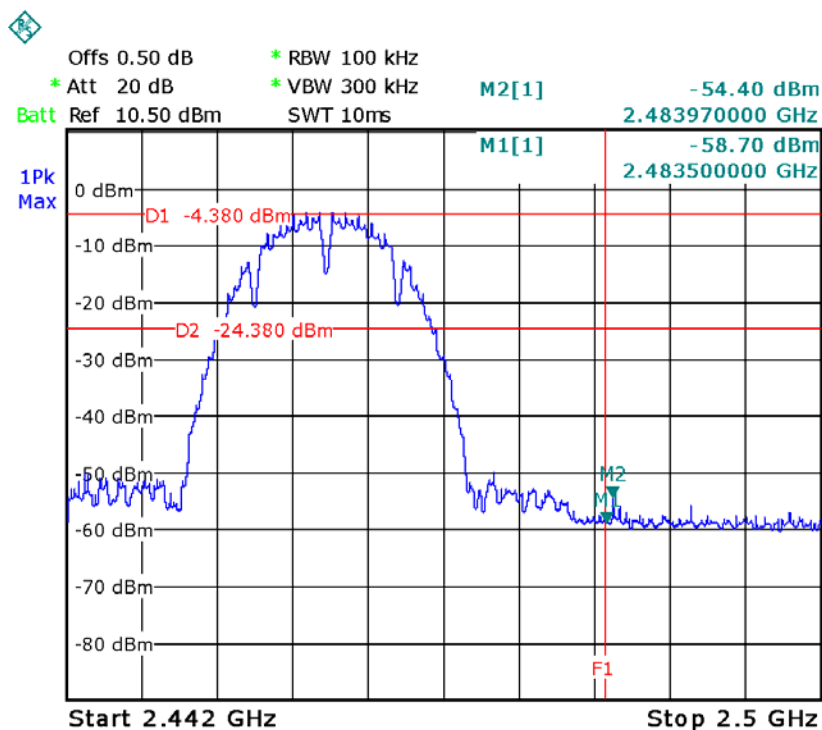


802.11g Band edge-left side

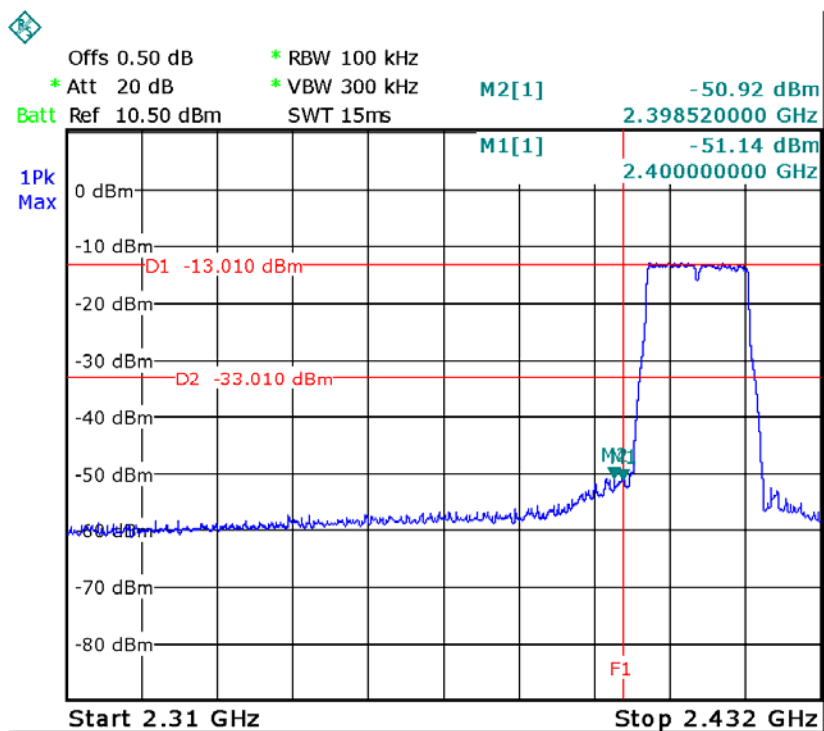


802.11g Band edge-right side

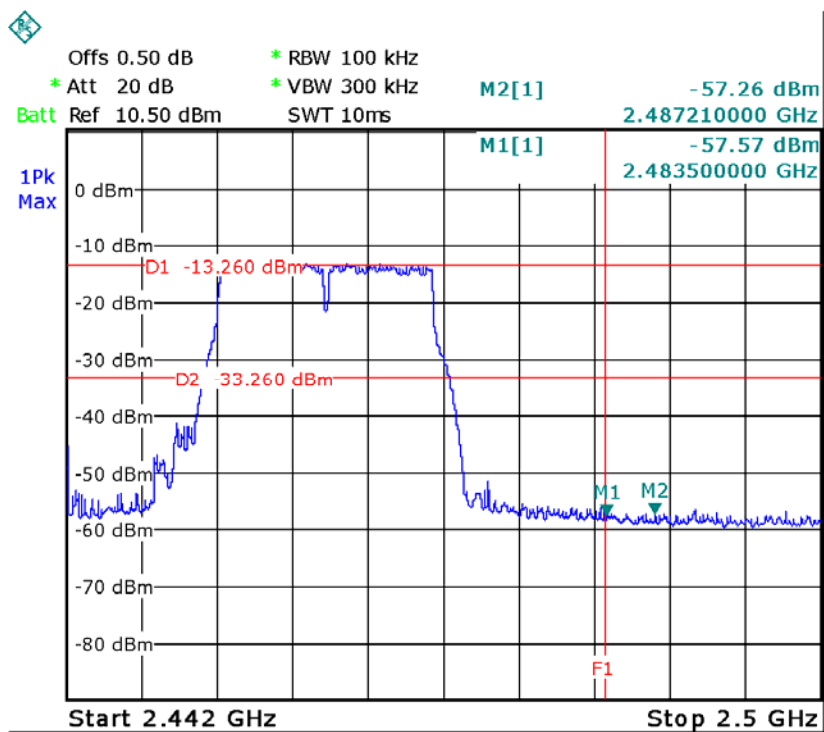

802.11n-HT20 Band edge-left side

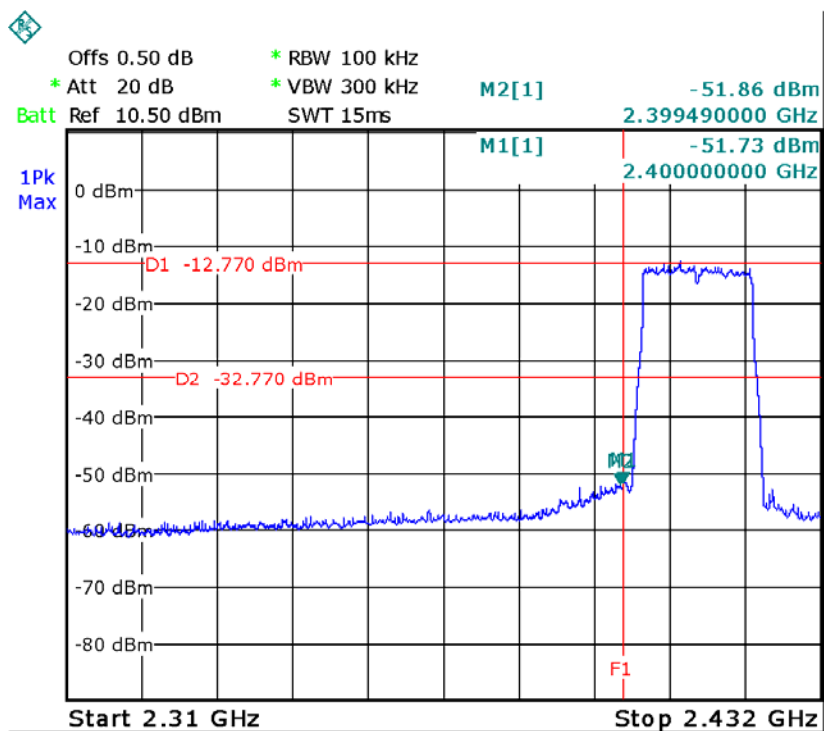

802.11n-HT20 Band edge-right side

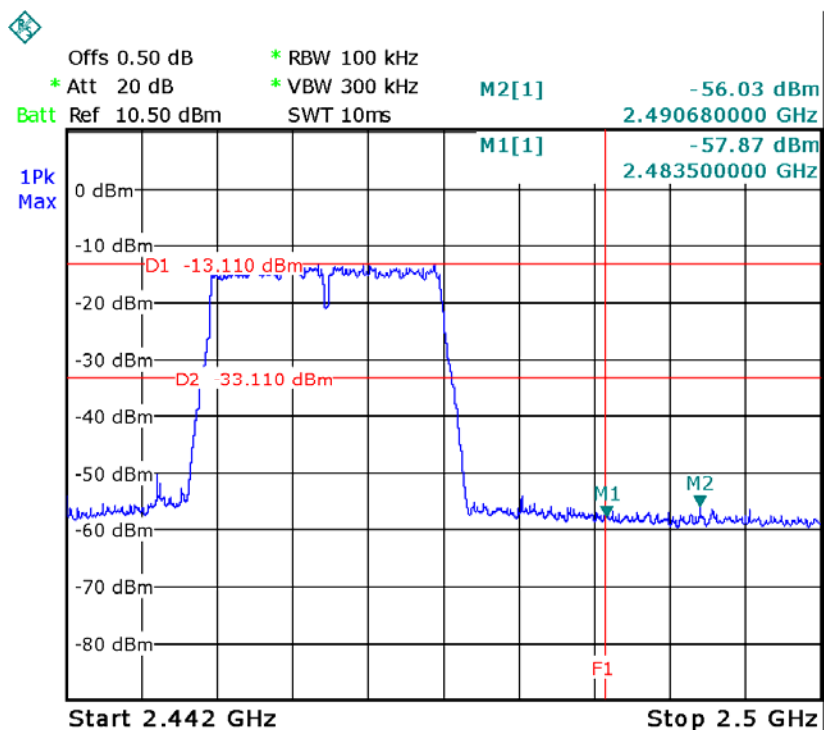



## 9 6dB Bandwidth Measurement

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode	: Refer to section 3.3


### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: For BLE, RBW = 100 kHz, VBW = 300kHz, For WIFI, RBW = 100kHz, VBW = 300kHz


### 9.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	0.659	0.659	0.659	≥500kHz
802.11b	10.060	10.060	10.060	≥500kHz
802.11g	16.617	16.617	16.617	≥500kHz
802.11n-HT20	17.838	17.838	17.838	≥500kHz


### GFSK(BLE) Low Channel

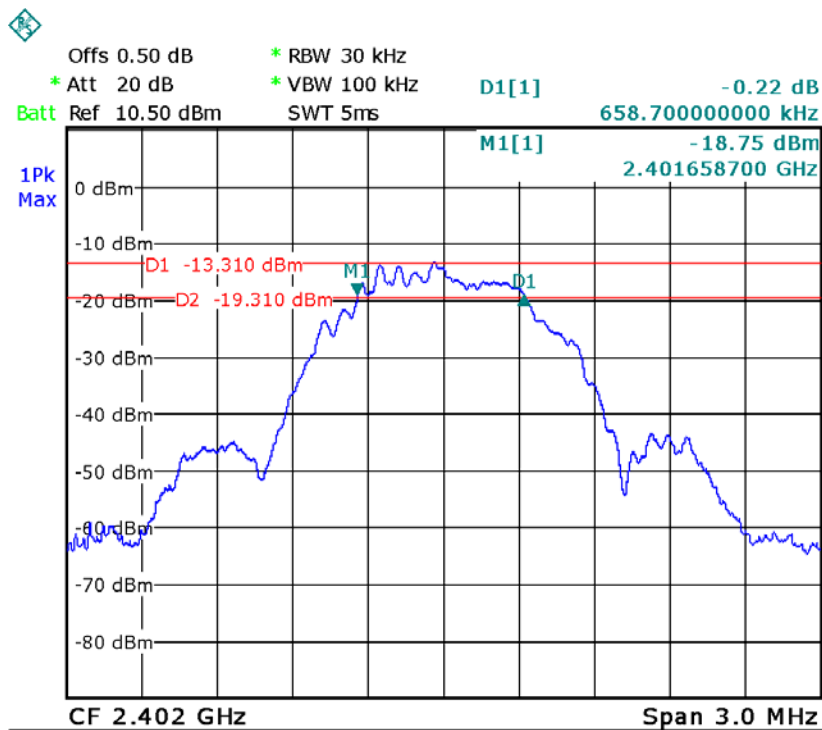


### GFSK(BLE) Middle Channel

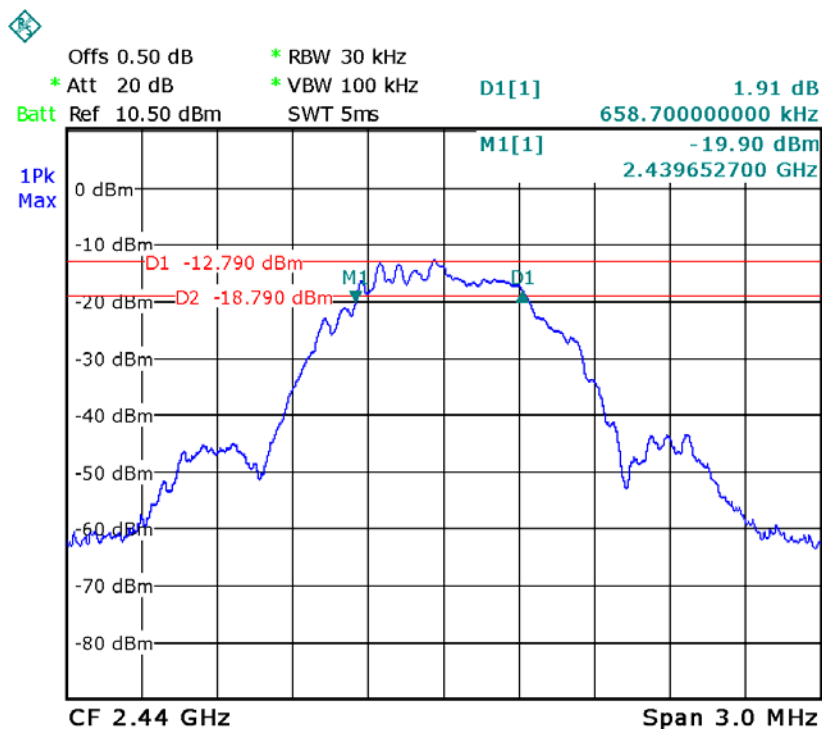


### GFSK(BLE)High Channel

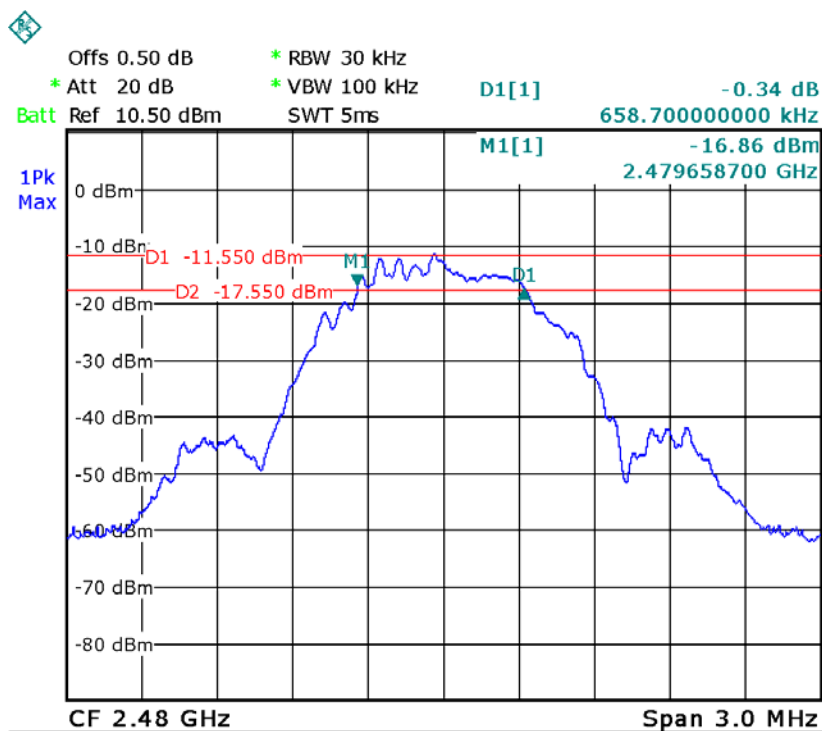


### 802.11b LowChannel

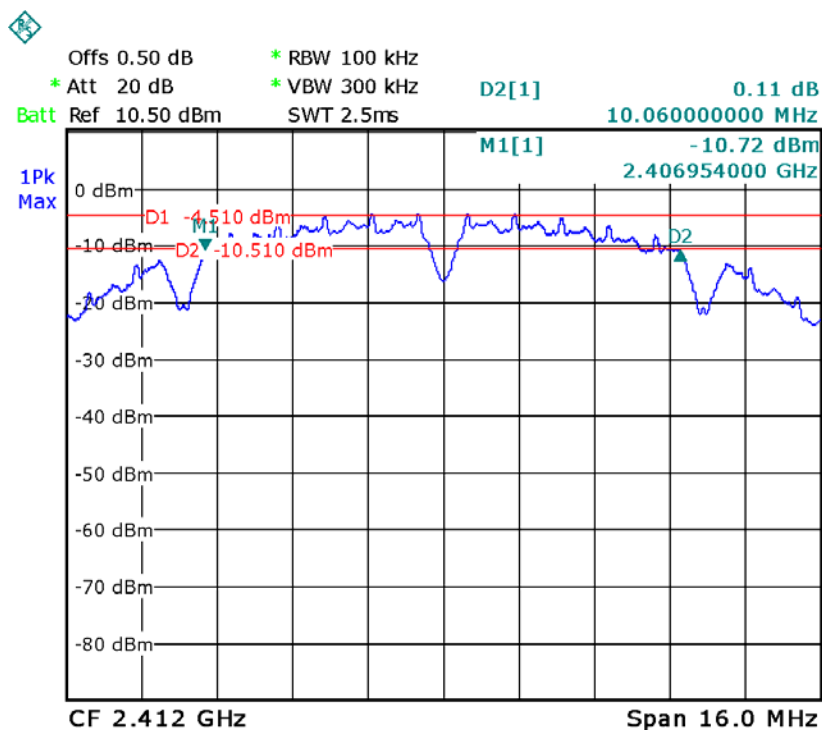


### 802.11b Middle Channel

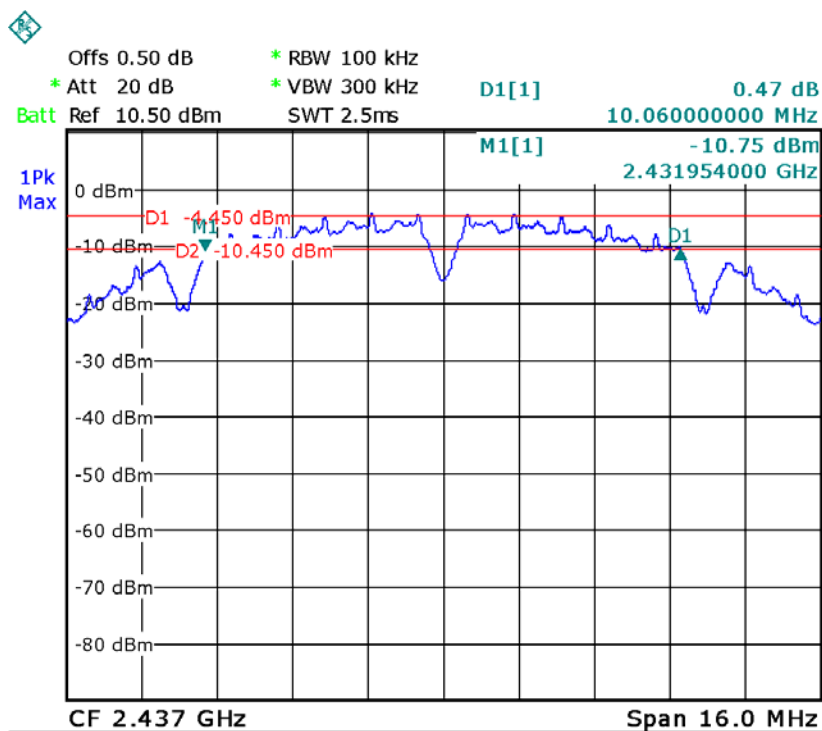


### 802.11b High Channel

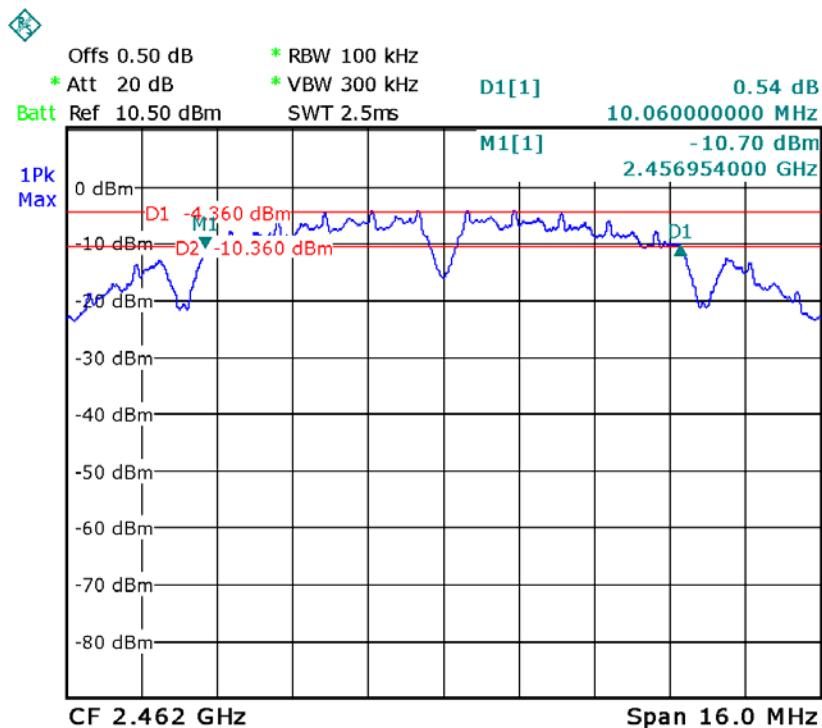


### 802.11g Low Channel

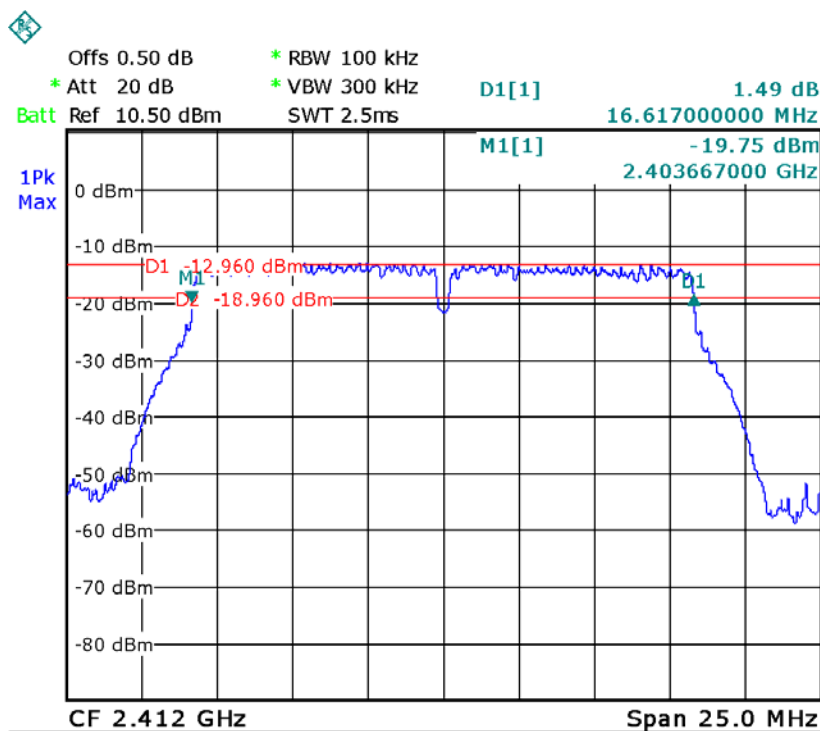


### 802.11g Middle Channel

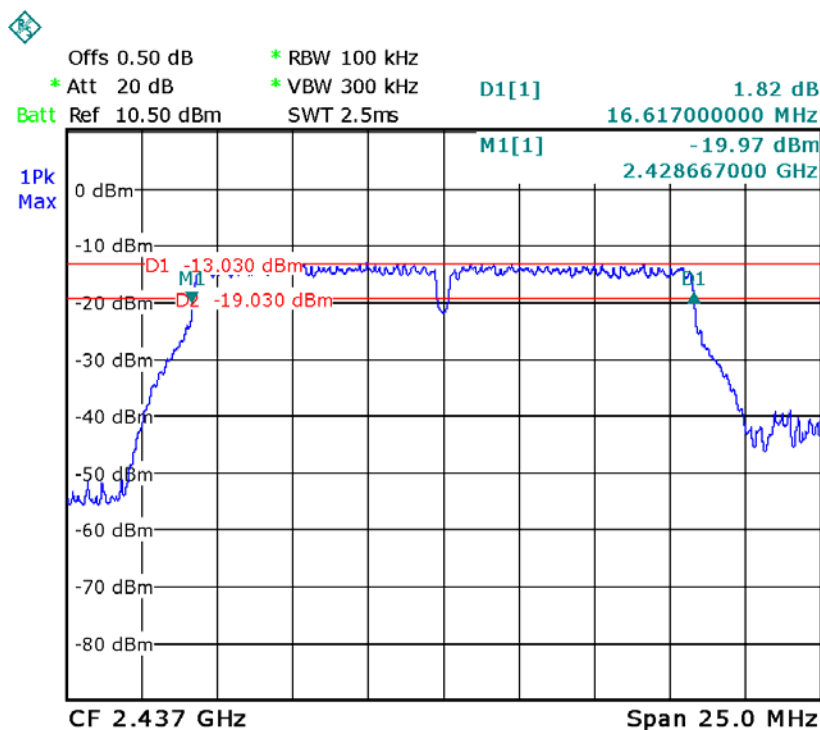


### 802.11g High Channel

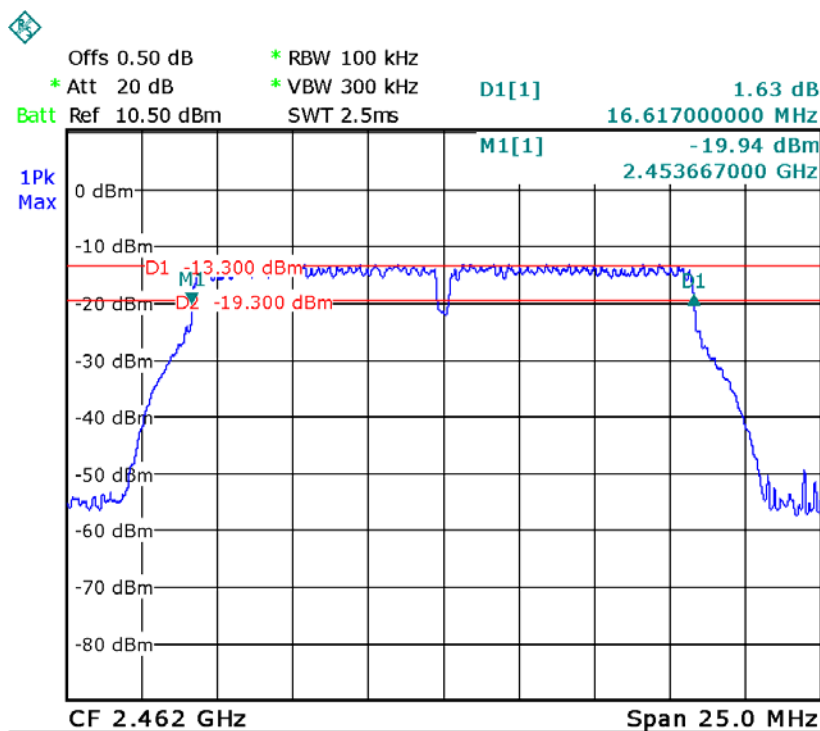


### 802.11n-HT20 Low Channel

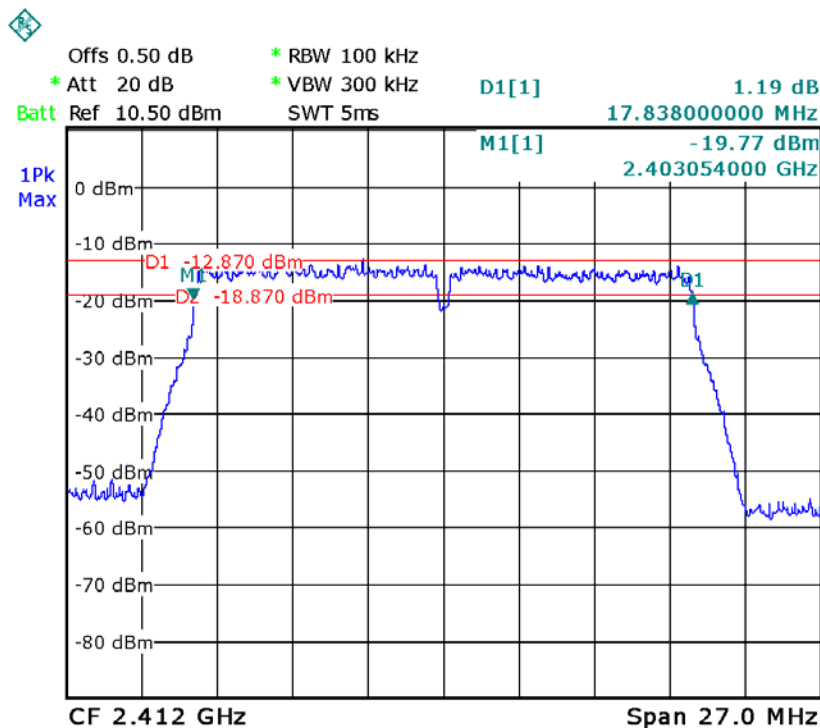

802.11n-HT20Middle Channel

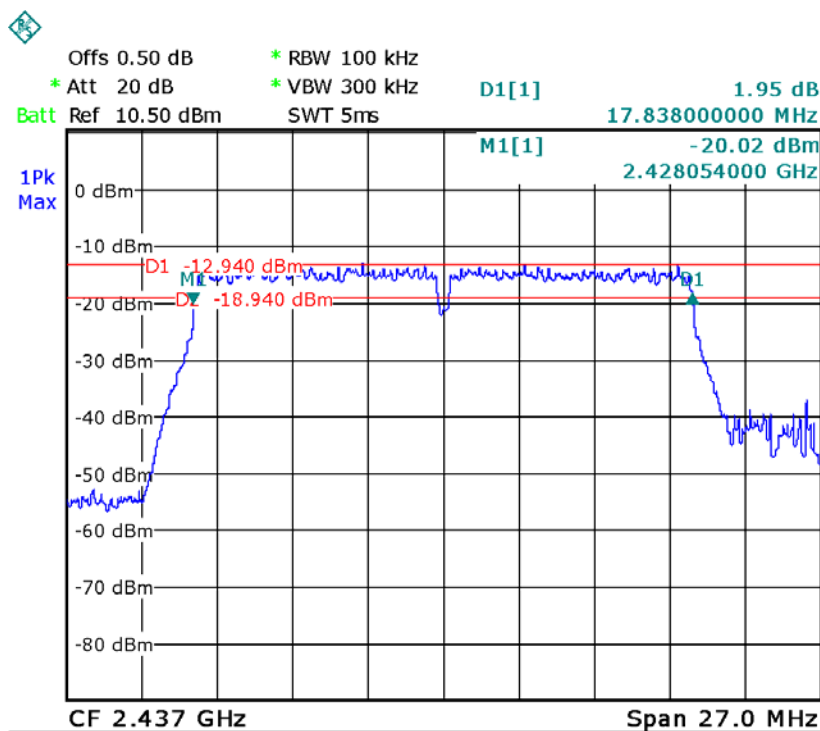

802.11n-HT20High Channel

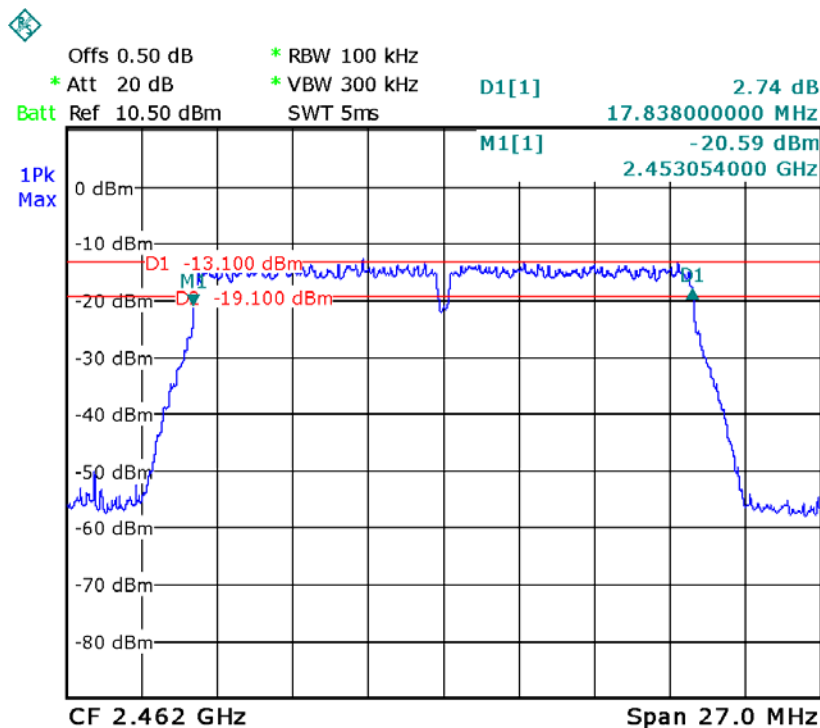

## 10 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
Test Mode	: Refer to section 3.3

### 10.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r03

section 9.1.1(For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a)Set the RBW    DTS bandwidth.
- b)Set VBW    3 RBW.
- c)Set span    3 x RBW
- d)Sweep time = auto couple.
- e)Detector = peak.
- f)Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.







## 10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-8.57	-7.95	-6.95	1W(30dBm)
802.11b	9.22	9.19	9.24	1W(30dBm)
802.11g	9.22	9.07	9.11	1W(30dBm)
802.11n-HT20	9.10	9.21	9.18	1W(30dBm)


### GFSK(BLE) Low Channel

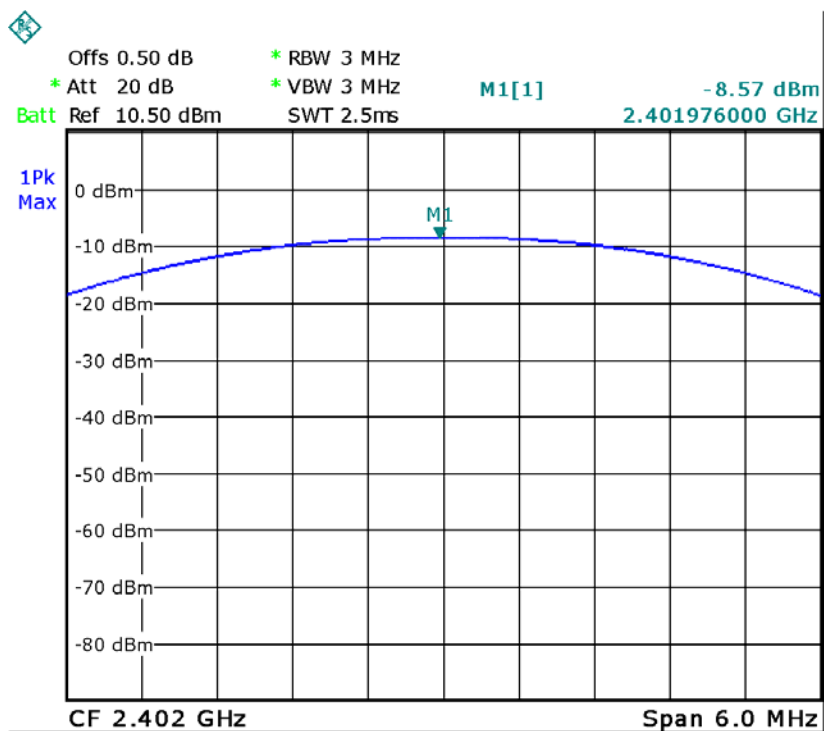

### GFSK(BLE) Middle Channel

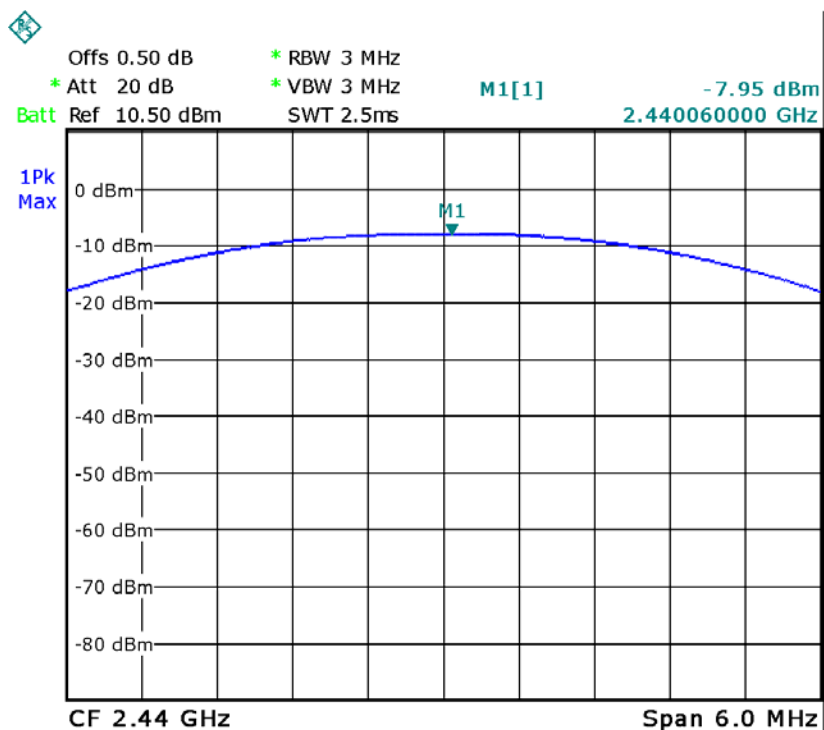

GFSK(BLE)High Channel

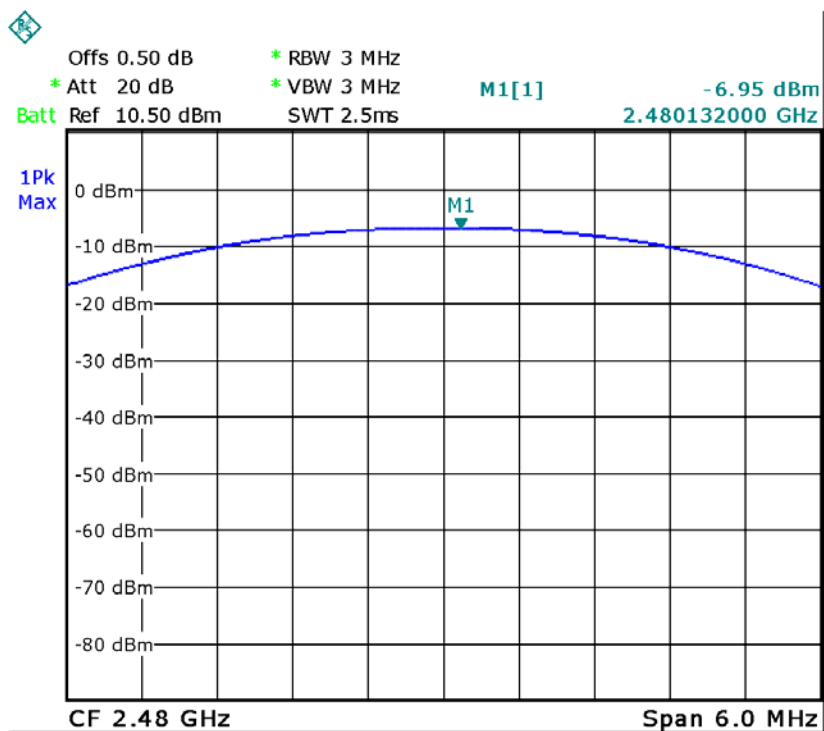

## 11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	: Regulation 15.247(f)The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode	: Refer to section 3.3

### 11.1 Test Procedure


KDB 558074 D01 DTS Meas Guidance V03R05

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### 11.2 Test Result

Modulation	Power Spectral density ( dBm/3kHz )			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-24.09	-23.72	-22.58	8dBm/3kHz
802.11b	-22.56	-22.75	-22.57	8dBm/3kHz
802.11g	-26.76	-27.29	-27.21	8dBm/3kHz
802.11n-HT20	-27.56	-26.77	-26.48	8dBm/3kHz


### GFSK(BLE) Low Channel

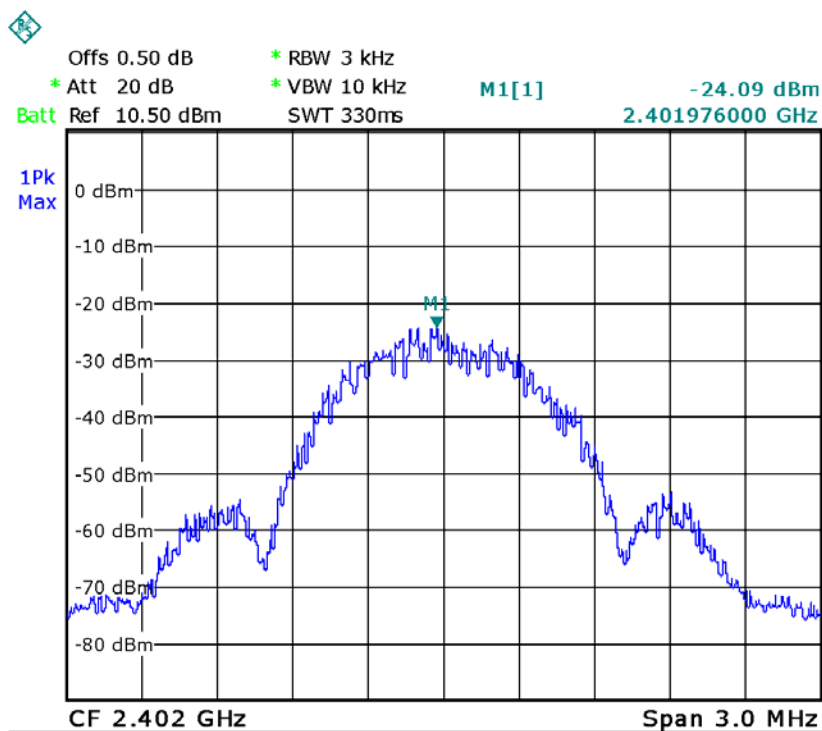


### GFSK(BLE) Middle Channel

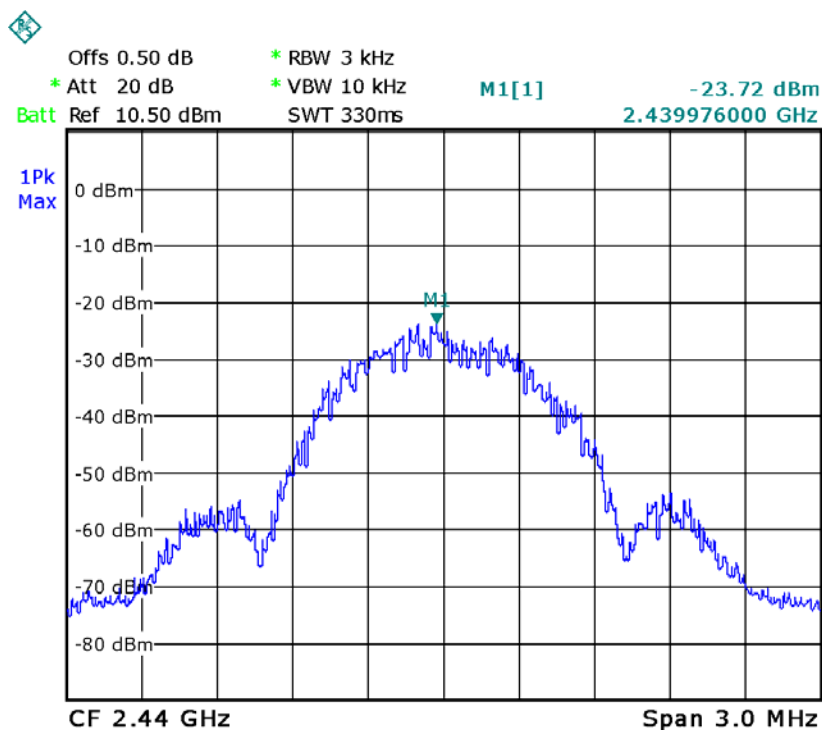


### GFSK(BLE)High Channel

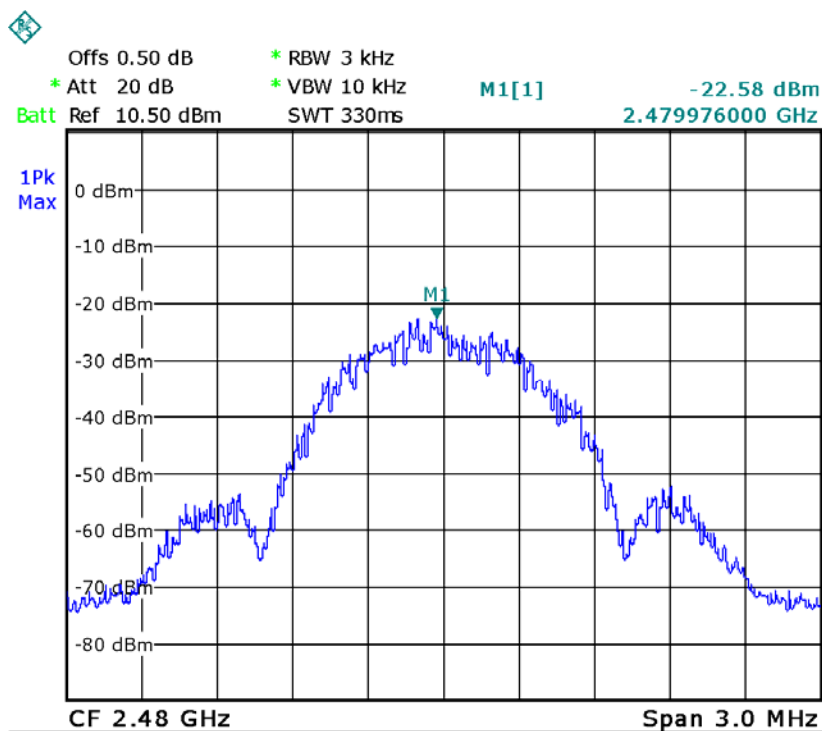


### 802.11b LowChannel

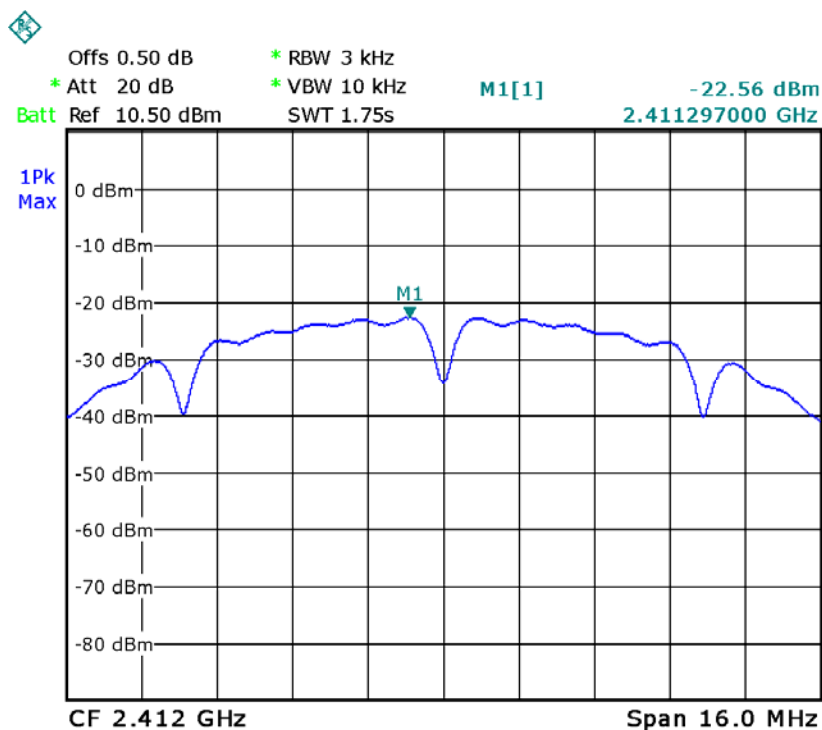


### 802.11b Middle Channel

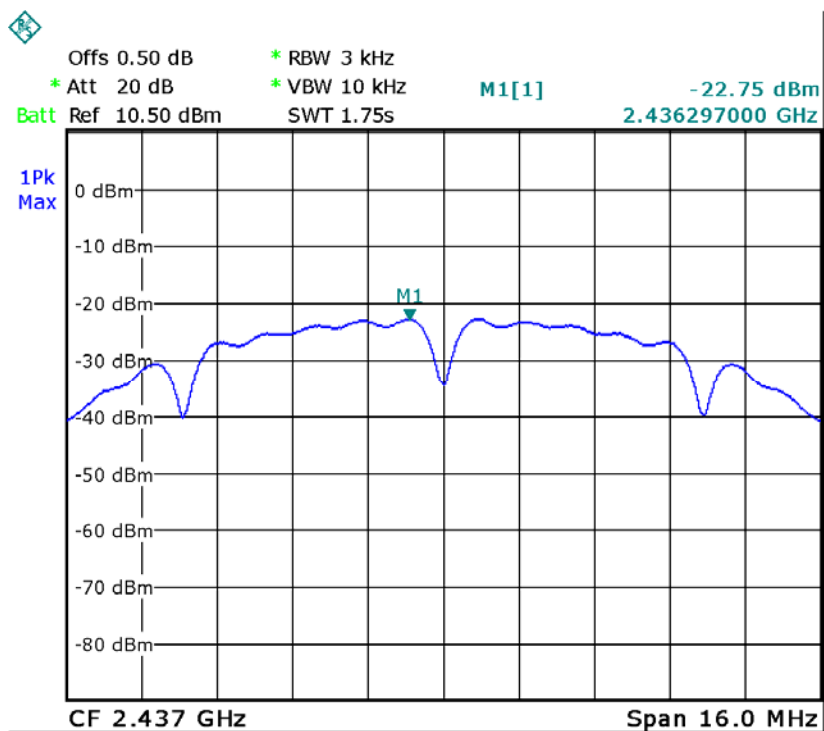


### 802.11b High Channel

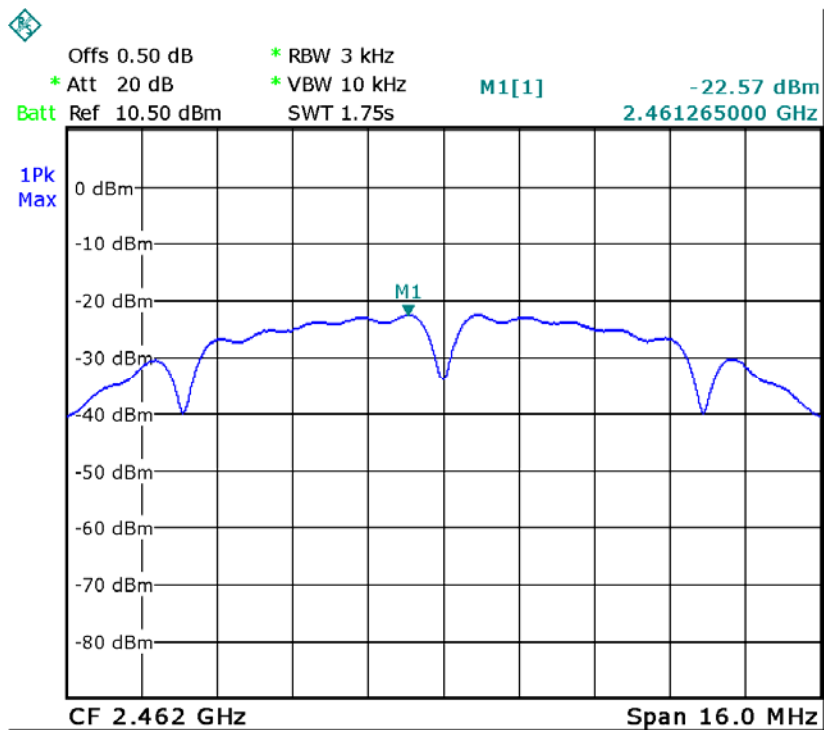

### 802.11g Low Channel

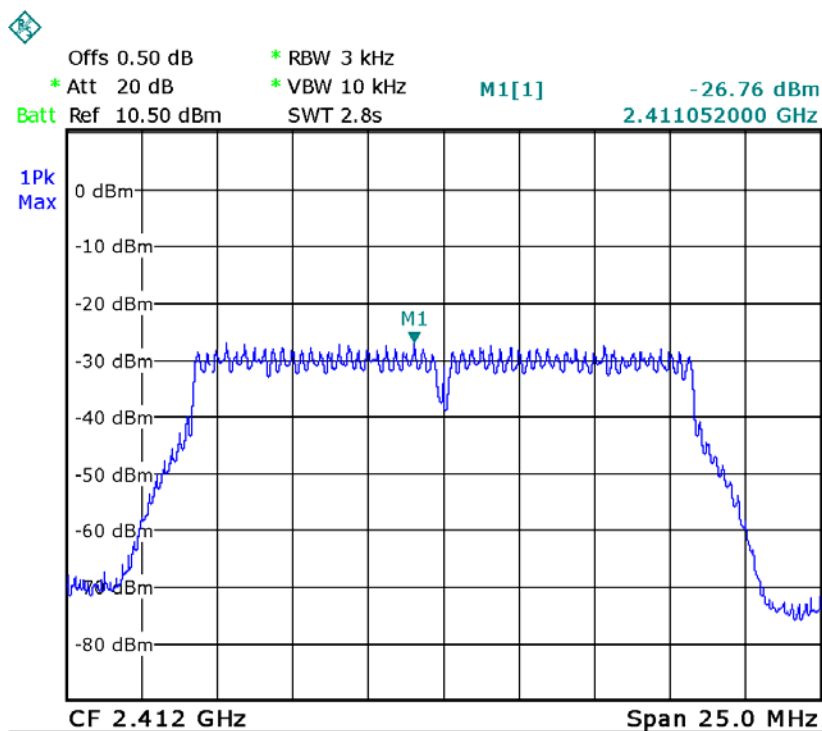


### 802.11g Middle Channel

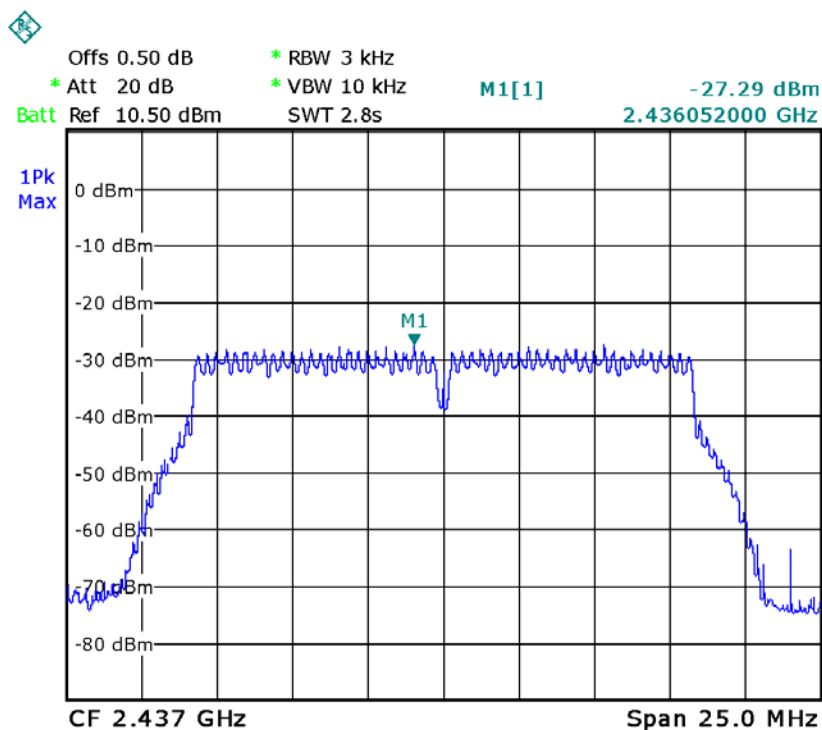





### 802.11g High Channel

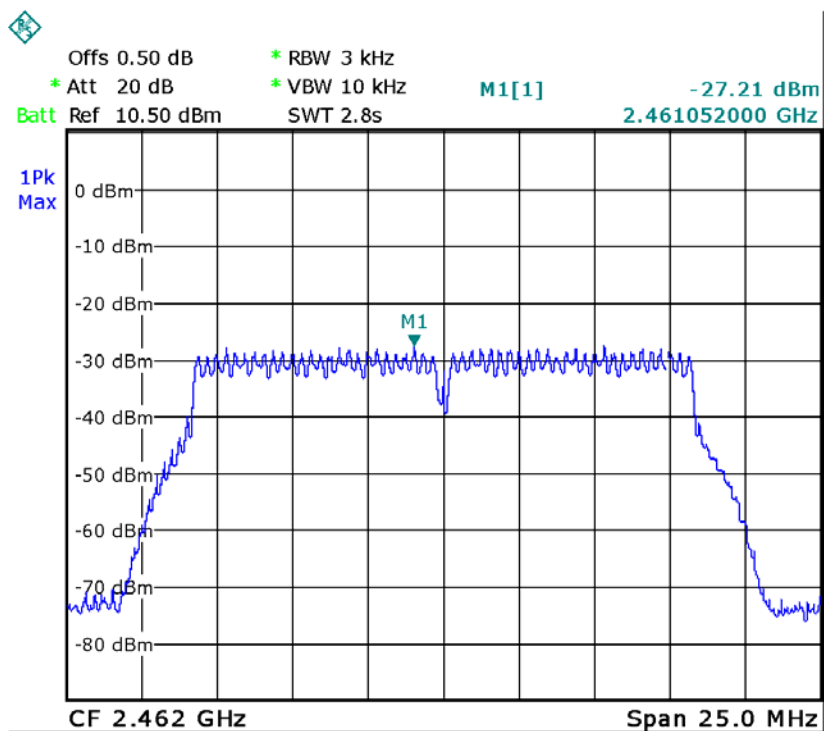


### 802.11n-HT20 Low Channel

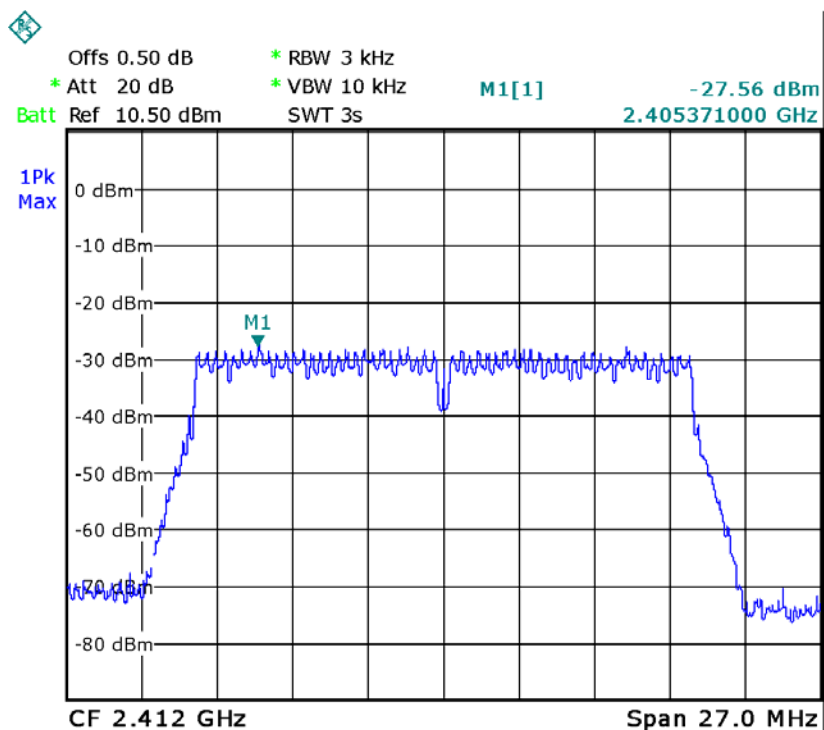

802.11n-HT20Middle Channel

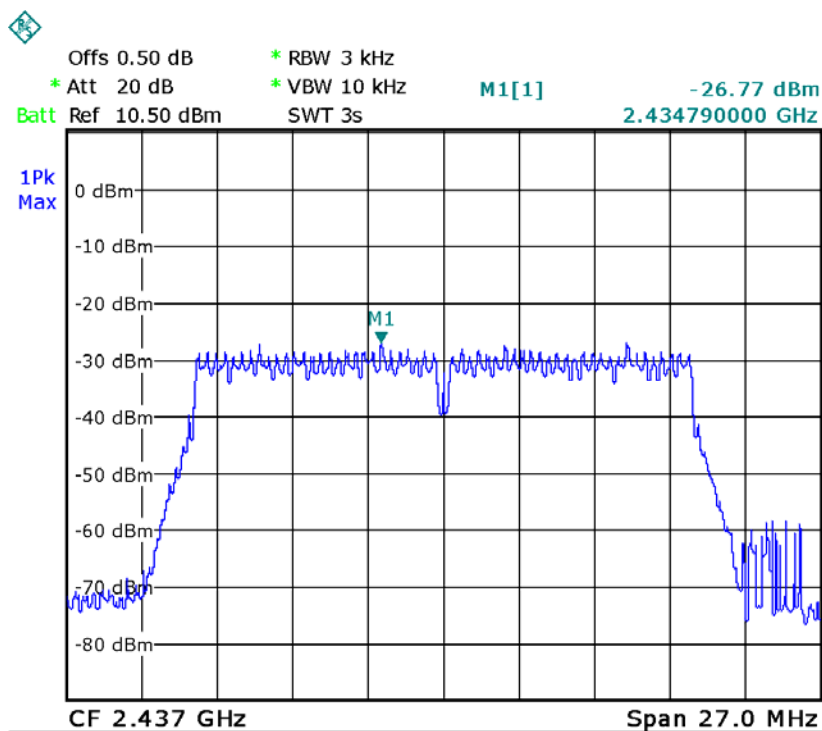

802.11n-HT20High Channel

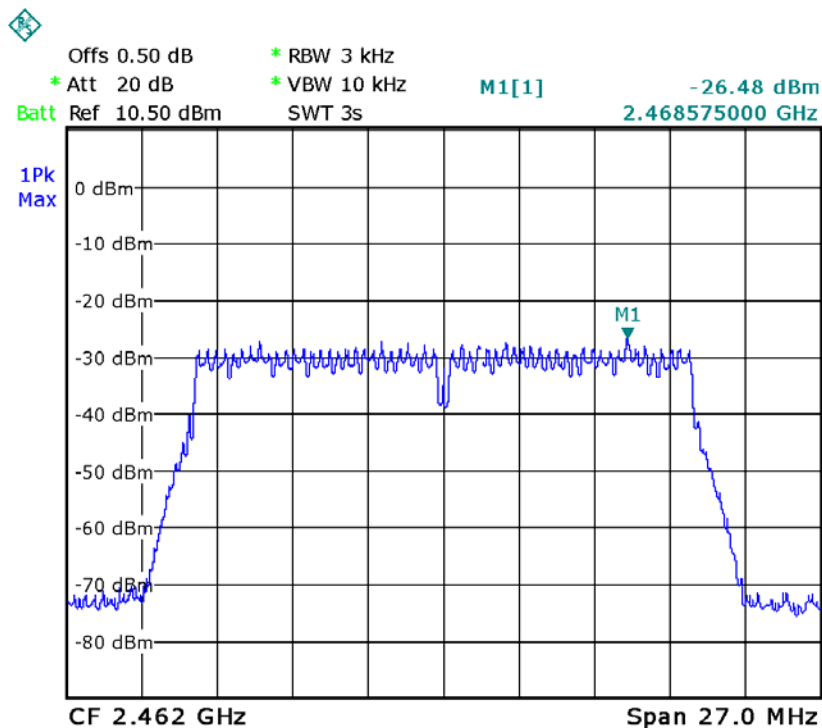




## 12 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has anPCB printed antenna, it meet the requirement of this section.

## 13 Test Setup

Radiated Spurious Emissions  
From 30MHz-1000MHz

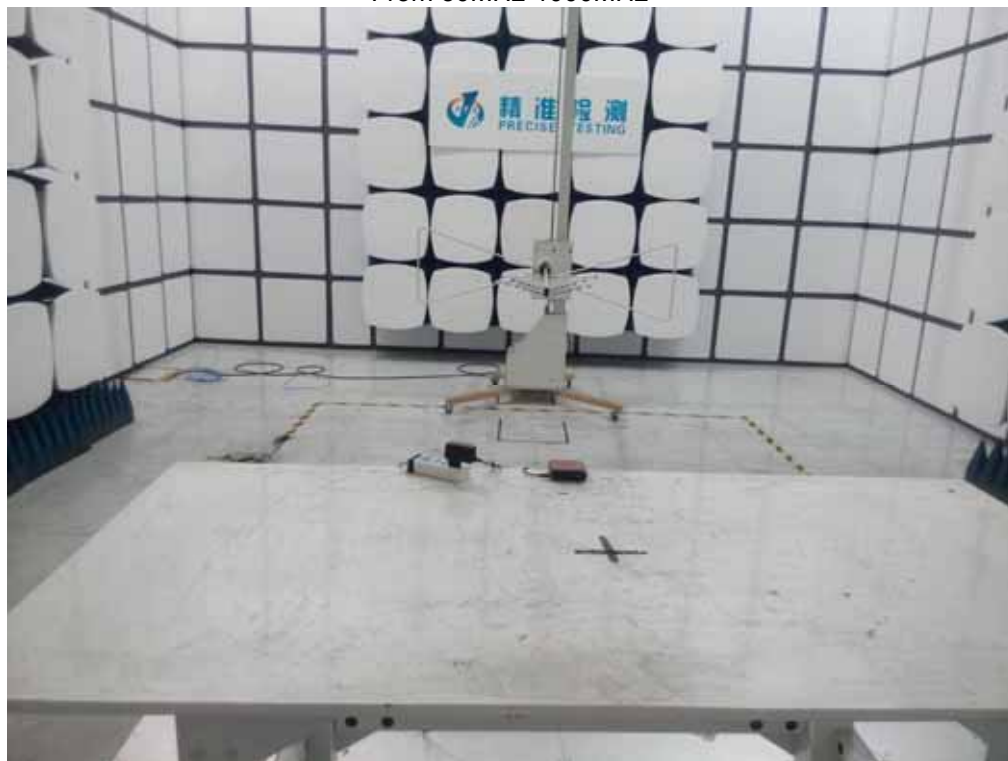

Above 1GHz



### Conducted Emissions



## 14 EUT Photos

### External Photos

















Internal Photos





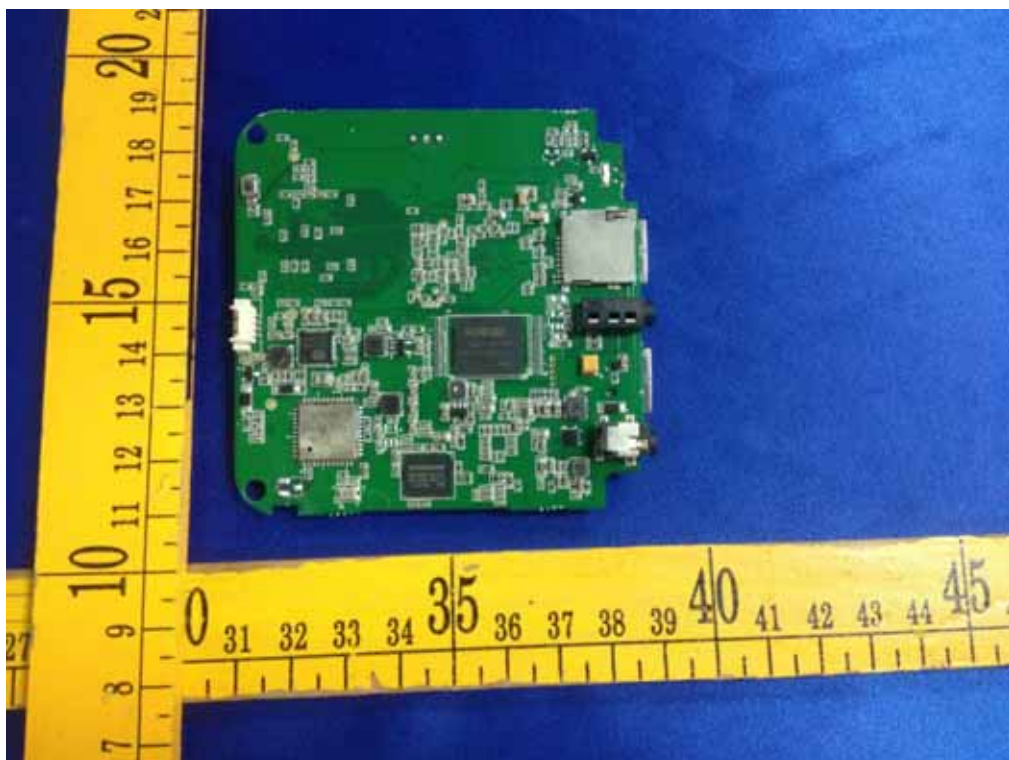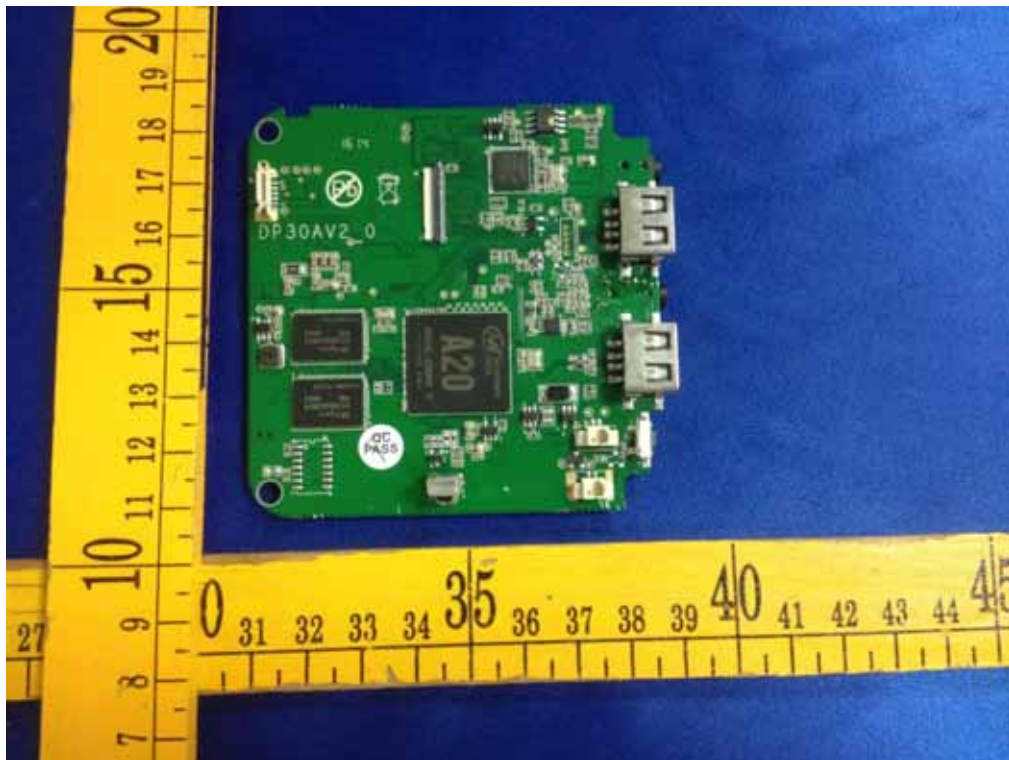



\*\*\*\*\*THE END REPORT\*\*\*\*\*