

FCC TEST REPORT

FCC ID: 2AIXD-DR55Q37

Product : Mobile virtual reality headset

Model Name : DR55Q-37,DR55Q-96A,DR55Q-96M

Brand : Focalmax

Report No. : PT802580160910E-FC01

Prepared for

SHENZHEN D-light Technolgy Limited

*2201F, Block A, Wisdom Building ,Qiao xiang Road, Shahe Street, Nanshan District,
Shenzhen ,China*

Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2,
Dongcheng District, Dongguan, Guangdong, China, 523129

TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN D-light Technolgy Limited

Address : *2201F, Block A, Wisdom Building ,Qiao xiang Road, Shahe Street, Nanshan District, Shenzhen ,China*

Manufacture's name : SHENZHEN D-light Technolgy Limited

Address : *2201F, Block A, Wisdom Building ,Qiao xiang Road, Shahe Street, Nanshan District, Shenzhen ,China*

Product name : Mobile virtual reality headset

Model name : DR55Q-37,DR55Q-96A,DR55Q-96M

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2013, DA 00-705

Test Date : Sep.20, 2016 ~ Sep.25, 2016

Date of Issue : Sep.26, 2016


Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu

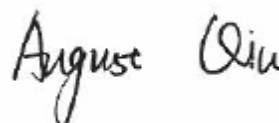

Authorized Signatory

Chris Du



Contents

	Page
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST MODE	7
3.4 TEST SITE	7
4 EQUIPMENT DURING TEST	8
4.1 EQUIPMENTS LIST	8
4.2 DESCRIPTION OF SUPPORT UNITS.....	10
4.3 MEASUREMENT UNCERTAINTY	10
5 CONDUCTED EMISSION.....	11
5.1 E.U.T. OPERATION	11
5.2 EUT SETUP	11
5.3 MEASUREMENT DESCRIPTION	12
5.4 CONDUCTED EMISSION TEST RESULT.....	12
6 RADIATED SPURIOUS EMISSIONS	14
6.1 EUT OPERATION.....	14
6.2 TEST SETUP	15
6.3 SPECTRUM ANALYZER SETUP	16
6.4 TEST PROCEDURE.....	17
6.5 SUMMARY OF TEST RESULTS	18
7 BAND EDGE MEASUREMENT	25
7.1 TEST PROCEDURE.....	25
7.2 TEST RESULT	25
8 20 DB BANDWIDTH MEASUREMENT	32
8.1 TEST PROCEDURE.....	32
8.2 TEST RESULT	33
9 MAXIMUM PEAK OUTPUT POWER	38
9.1 TEST PROCEDURE.....	38
9.2 TEST RESULT	39
10 HOPPING CHANNEL SEPARATION	40
10.1 TEST PROCEDURE.....	40



10.2	TEST RESULT	40
11	NUMBER OF HOPPING FREQUENCY	46
11.1	TEST PROCEDURE.....	46
11.2	TEST RESULT	46
12	DWELL TIME.....	47
12.1	TEST PROCEDURE.....	47
12.2	TEST RESULT	47
13	ANTENNA REQUIREMENT.....	54
14	TEST SETUP	55



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable

3 General Information

3.1 General Description of E.U.T.

Product Name	: Mobile virtual reality headset
Model Name	: DR55Q-37,DR55Q-96A,DR55Q-96M
Model Description	: Only different in models name
Bluetooth Version	: 3.0
Operating frequency	: 2402-2480MHz,79channels
Antenna installation:	: Integrated Antenna
Antenna Gain:	: 0dBi
The lowest oscillator:	: 19.2MHz
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Power supply	: DC 3.8V 2900mAh Power by battery, DC 5V charging by USB port

3.2 Channel List

BT							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz
Hopping	2402-2480MHz		
Tests Carried Out Under FCC part 15.207			
Test Item	Test Mode		
Conduction Emission, 0.15MHz to 30MHz	BT Communication		

3.4 Test Site

DongGuan Precise Testing Service Co.,Ltd.

Add.: Building D,Baoding Technology Park,Guangming Road2, Dongcheng District, Dongguan, Guangdong, China, 523129

FCC Registration No.: 371540; IC Registration No.: 12191A

4 Equipment During Test

4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
2	EXA Signal Analyzer	Agilent	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2016	Aug.03, 2017	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
4	Humidity Chamber	GF	GTH-225-40-1P	IAA061225	July 15, 2016	July 14, 2017	1 year
5	Temporary Antenna Connector	Murrata	MXHS83Q E3000	201938	July 15, 2016	July 14, 2017	1 year
6	USB RF power sensor	DARE	RPR3006W	15I00041SN 001	July 15, 2016	July 14, 2017	1 year
7	Attenuator	Huber&Suhner	6810.18.B	757941	July 15, 2016	July 14, 2017	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year
4	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	July 15, 2016	July 14, 2017	1 year
5	Horn Antenna	Schwarzbeck	BBHA 9170	9170-0741	July 15, 2016	July 14, 2017	1 year
6	Loop Antenna	SCHWARZBECK	FMZB1516	9130D-1243	July 15, 2016	July 14, 2017	1 year



7	3m Anechoic Chamber	CHENGYU	966	PTC-002	June 6, 2016	June 5, 2017	1 year
8	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2016	July 14, 2017	1 year
9	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2016	July 14, 2017	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZ BECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year



4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Note Book	Sony	PCG-51111T	X16-96081
AC Adapter	Sony	NSW24063	SNPA-1900-11SY
AC power line(1.0m)	Cold come	JYD-20	C-2201

4.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Frequency Range: : 150kHz to 30MHz
 Class/Severity: : Class B
 Limit:
 : 66-56 dB μ V between 0.15MHz & 0.5MHz
 : 56 dB μ V between 0.5MHz & 5MHz
 : 60 dB μ V between 5MHz & 30MHz
 Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :

Temperature: : 25.5 °C
 Humidity: : 51 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

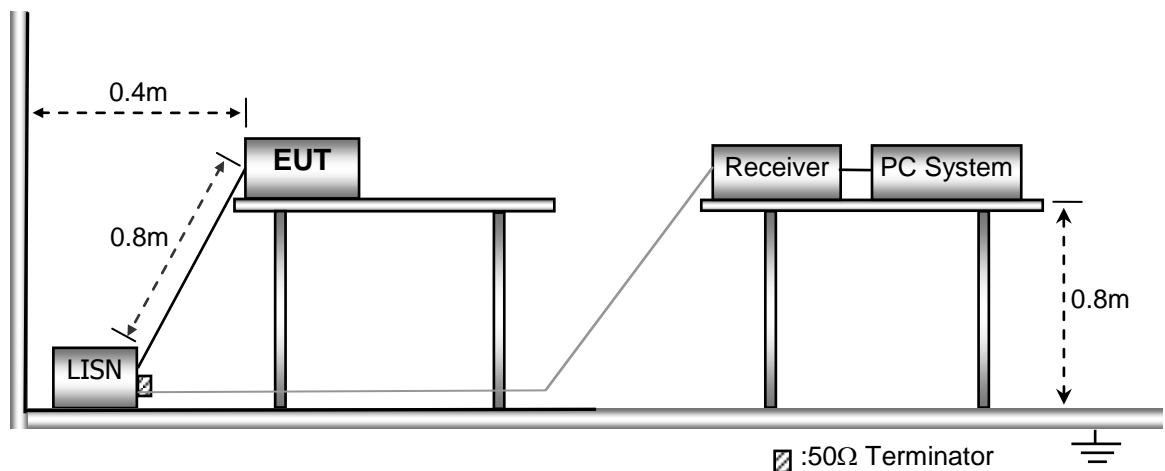

5.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Remark: emission level= AMN factor+ Cable Loss +Receiver reading

5.4 Conducted Emission Test Result

Only show worst data(GFSK/Low CH)


Live line:

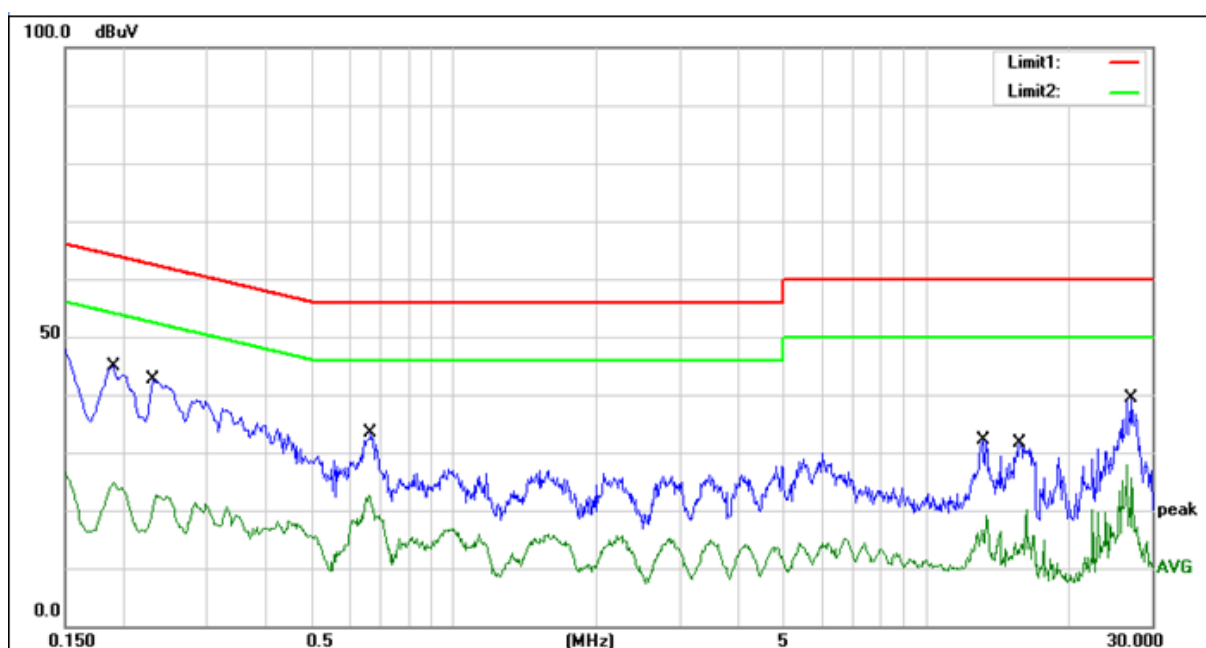

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1900	34.88	10.00	44.88	64.04	-19.16	QP
2	0.1900	14.98	10.00	24.98	54.04	-29.06	AVG
3	0.2300	32.56	9.97	42.53	62.45	-19.92	QP
4	0.2300	12.57	9.97	22.54	52.45	-29.91	AVG
5	0.6660	23.33	9.98	33.31	56.00	-22.69	QP
6	0.6660	12.71	9.98	22.69	46.00	-23.31	AVG
7	13.1580	21.74	10.34	32.08	60.00	-27.92	QP
8	13.1580	8.78	10.34	19.12	50.00	-30.88	AVG
9	15.7980	21.20	10.38	31.58	60.00	-28.42	QP
10	15.7980	9.72	10.38	20.10	50.00	-29.90	AVG
11	27.1580	28.78	10.53	39.31	60.00	-20.69	QP
12	27.1580	17.47	10.53	28.00	50.00	-22.00	AVG



Neutral line:

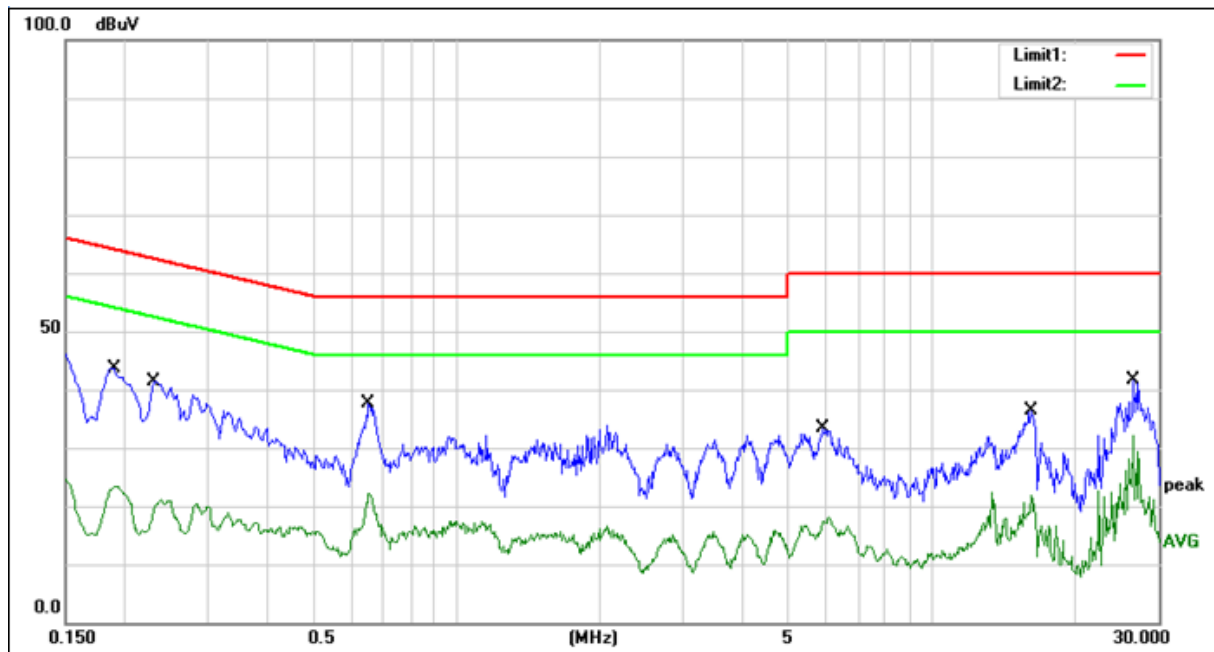

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1900	33.73	10.00	43.73	64.04	-20.31	QP
2	0.1900	13.39	10.00	23.39	54.04	-30.65	AVG
3	0.2300	31.45	9.97	41.42	62.45	-21.03	QP
4	0.2300	11.21	9.97	21.18	52.45	-31.27	AVG
5	0.6540	27.59	9.98	37.57	56.00	-18.43	QP
6	0.6540	12.22	9.98	22.20	46.00	-23.80	AVG
7	5.9140	23.13	10.20	33.33	60.00	-26.67	QP
8	5.9140	7.89	10.20	18.09	50.00	-31.91	AVG
9	16.1660	25.88	10.37	36.25	60.00	-23.75	QP
10	16.1660	11.61	10.37	21.98	50.00	-28.02	AVG
11	26.6100	30.90	10.71	41.61	60.00	-18.39	QP
12	26.6100	21.53	10.71	32.24	50.00	-17.76	AVG

6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: : ANSI C63.10:2013, DA 00-705
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

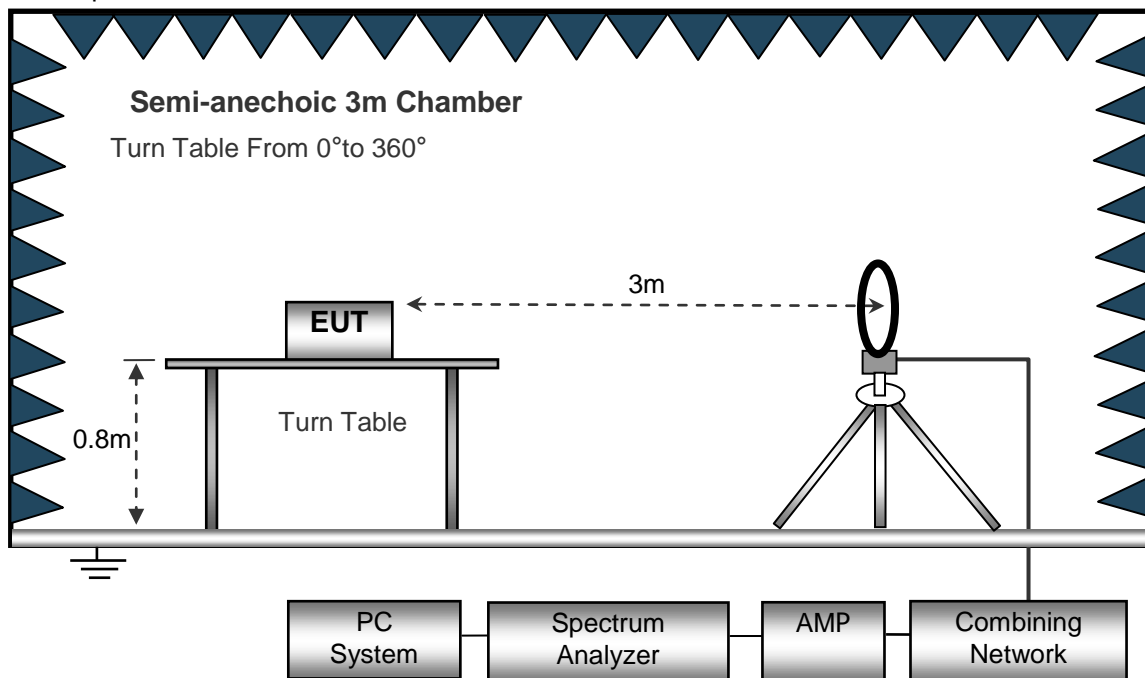

The test setup for emission measurement from 30 MHz to 1 GHz.

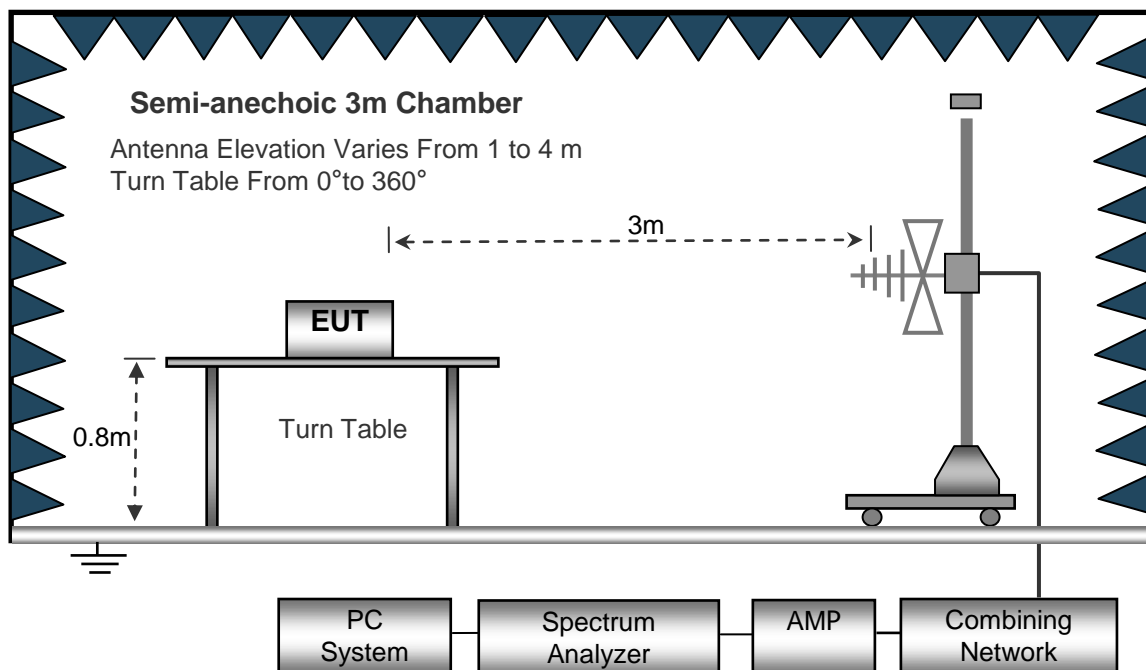

The test setup for emission measurement above 1 GHz.

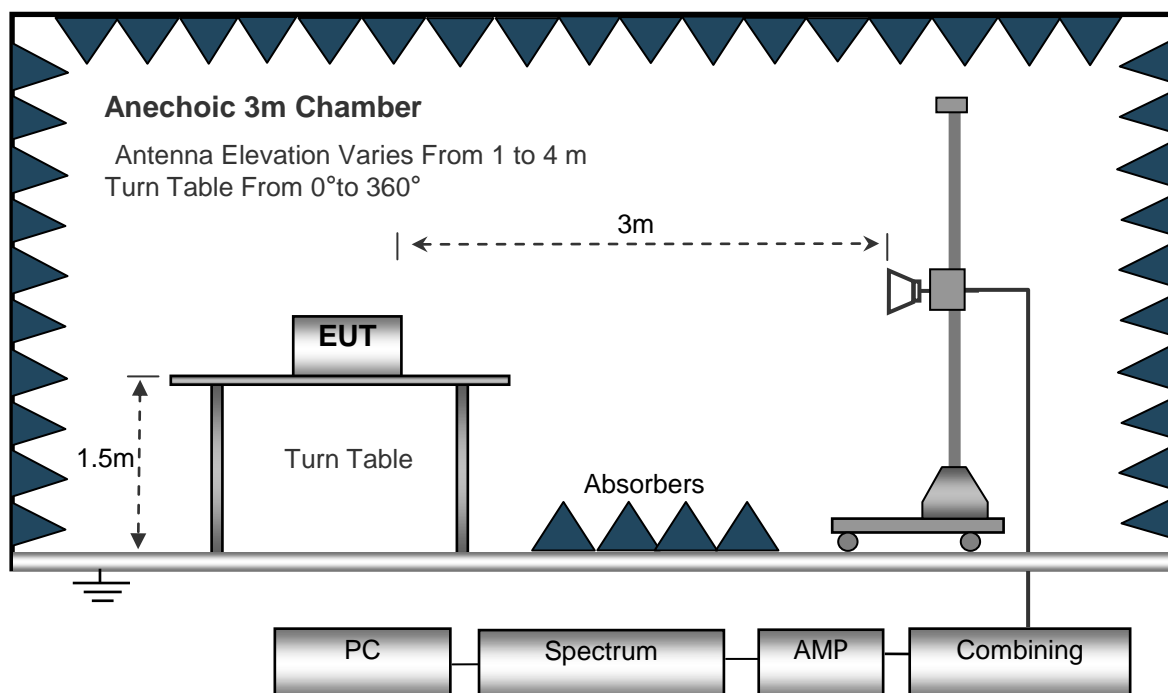

6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth 10kHz
Video Bandwidth 10kHz
Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth 100kHz
Video Bandwidth 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth 1MHz
Video Bandwidth 3MHz
Detector Ave.
Resolution Bandwidth 1MHz
Video Bandwidth 10Hz

6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results

Only show worst data(GFSK/Low CH)

Emission level = Receiver reading + ANT factor + cable loss – Preamp factor

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.


Test Frequency: 30MHz ~ 1GHz

Antenna Polarization: Horizontal

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
34.7601	10.90	16.25	27.15	40.00	-12.85	QP
47.9940	12.19	9.16	21.35	40.00	-18.65	QP
77.3212	7.15	7.56	14.71	40.00	-25.29	QP
114.9168	6.13	11.38	17.51	43.50	-25.99	QP
261.9753	4.60	14.96	19.56	46.00	-26.44	QP
689.5643	10.04	23.36	33.40	46.00	-12.60	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

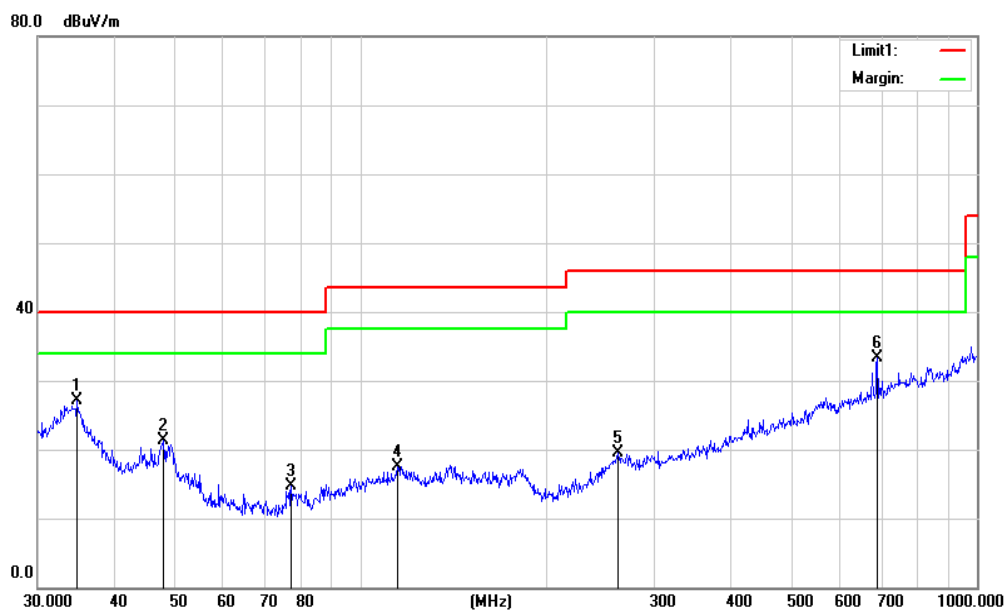


Antenna Polarization: Vertical

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
33.7790	20.16	16.79	36.95	40.00	-3.05	QP
43.9658	20.81	11.29	32.10	40.00	-7.90	QP
60.7043	20.39	5.37	25.76	40.00	-14.24	QP
67.4381	20.73	5.91	26.64	40.00	-13.36	QP
75.9772	16.62	7.41	24.03	40.00	-15.97	QP
116.9495	7.79	12.28	20.07	43.50	-23.43	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

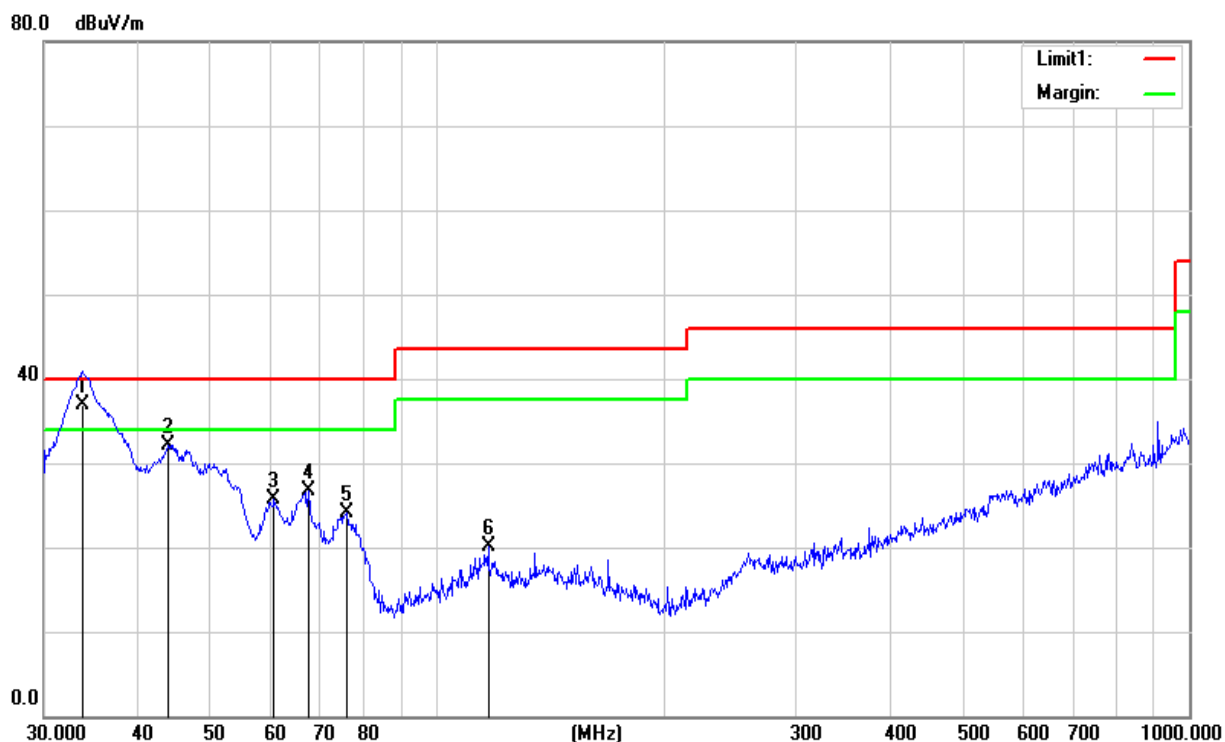



Test Frequency: 1GHz ~ 18GHz

GFSK Low Channel

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2402 MHz)										
3265.26	50.18	44.70	6.70	28.20	-9.80	40.38	74.00	-33.62	PK	Vertical
3265.26	40.17	44.70	6.70	28.20	-9.80	30.37	54.00	-23.63	AV	Vertical
3265.23	50.18	44.70	6.70	28.20	-9.80	40.38	74.00	-33.62	PK	Horizontal
3265.23	40.18	44.70	6.70	28.20	-9.80	30.38	54.00	-23.62	AV	Horizontal
4803.93	60.47	44.20	9.04	31.60	-3.56	56.91	74.00	-17.09	PK	Vertical
4803.93	40.47	44.20	9.04	31.60	-3.56	36.91	54.00	-17.09	AV	Vertical
4804.91	60.49	44.20	9.04	31.60	-3.56	56.93	74.00	-17.07	PK	Horizontal
4804.91	40.48	44.20	9.04	31.60	-3.56	36.92	54.00	-17.08	AV	Horizontal
5360.20	47.40	44.20	9.86	32.00	-2.34	45.06	74.00	-28.94	PK	Vertical
5360.20	39.40	44.20	9.86	32.00	-2.34	37.06	54.00	-16.94	AV	Vertical
5360.20	47.39	44.20	9.86	32.00	-2.34	45.05	74.00	-28.95	PK	Horizontal
5360.20	39.38	44.20	9.86	32.00	-2.34	37.04	54.00	-16.96	AV	Horizontal
7206.29	52.87	43.50	11.40	35.50	3.40	56.27	74.00	-17.73	PK	Vertical
7206.29	34.83	43.50	11.40	35.50	3.40	38.23	54.00	-15.77	AV	Vertical
7206.33	52.87	43.50	11.40	35.50	3.40	56.27	74.00	-17.73	PK	Horizontal
7206.33	34.87	43.50	11.40	35.50	3.40	38.27	54.00	-15.73	AV	Horizontal
11036.36	42.14	43.60	14.30	39.50	10.20	52.34	74.00	-21.66	PK	Vertical
11036.36	32.12	43.60	14.30	39.50	10.20	42.32	54.00	-11.68	AV	Vertical
11036.59	42.09	43.60	14.30	39.50	10.20	52.29	74.00	-21.71	PK	Horizontal
11036.59	32.11	43.60	14.30	39.50	10.20	42.31	54.00	-11.69	AV	Horizontal
13299.74	41.92	42.60	15.90	38.90	12.20	54.12	74.00	-19.88	PK	Vertical
13299.74	29.94	42.60	15.90	38.90	12.20	42.14	54.00	-11.86	AV	Vertical
13299.88	41.97	42.60	15.90	38.90	12.20	54.17	74.00	-19.83	Pk	Horizontal
13299.88	29.94	42.60	15.90	38.90	12.20	42.14	54.00	-11.86	AV	Horizontal

GFSK Mid Channel

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2441 MHz)										
3265.16	50.12	44.70	6.70	28.20	-9.80	40.32	74.00	-33.68	PK	Vertical
3265.16	40.09	44.70	6.70	28.20	-9.80	30.29	54.00	-23.71	AV	Vertical
3265.17	50.12	44.70	6.70	28.20	-9.80	40.32	74.00	-33.68	PK	Horizontal
3265.17	40.11	44.70	6.70	28.20	-9.80	30.31	54.00	-23.69	AV	Horizontal
4882.85	60.40	44.20	9.04	31.60	-3.56	56.84	74.00	-17.16	PK	Vertical
4882.85	40.41	44.20	9.04	31.60	-3.56	36.85	54.00	-17.15	AV	Vertical
4882.80	60.40	44.20	9.04	31.60	-3.56	56.84	74.00	-17.16	PK	Horizontal
4882.80	40.38	44.20	9.04	31.60	-3.56	36.82	54.00	-17.18	AV	Horizontal
5360.10	47.32	44.20	9.86	32.00	-2.34	44.98	74.00	-29.02	PK	Vertical
5360.10	39.30	44.20	9.86	32.00	-2.34	36.96	54.00	-17.04	AV	Vertical
5360.02	47.31	44.20	9.86	32.00	-2.34	44.97	74.00	-29.03	PK	Horizontal
5360.02	39.30	44.20	9.86	32.00	-2.34	36.96	54.00	-17.04	AV	Horizontal
7320.20	52.79	43.50	11.40	35.50	3.40	56.19	74.00	-17.81	PK	Vertical
7320.20	34.73	43.50	11.40	35.50	3.40	38.13	54.00	-15.87	AV	Vertical
7320.58	52.81	43.50	11.40	35.50	3.40	56.21	74.00	-17.79	PK	Horizontal
7320.58	34.80	43.50	11.40	35.50	3.40	38.20	54.00	-15.80	AV	Horizontal
11036.30	42.07	43.60	14.30	39.50	10.20	52.27	74.00	-21.73	PK	Vertical
11036.30	32.05	43.60	14.30	39.50	10.20	42.25	54.00	-11.75	AV	Vertical
11036.47	42.01	43.60	14.30	39.50	10.20	52.21	74.00	-21.79	PK	Horizontal
11036.47	32.04	43.60	14.30	39.50	10.20	42.24	54.00	-11.76	AV	Horizontal
13299.83	41.83	42.60	15.90	38.90	12.20	54.03	74.00	-19.97	PK	Vertical
13299.83	28.86	42.60	15.90	38.90	12.20	41.06	54.00	-12.94	AV	Vertical
13299.75	41.88	42.60	15.90	38.90	12.20	54.08	74.00	-19.92	Pk	Horizontal
13299.75	30.86	42.60	15.90	38.90	12.20	43.06	54.00	-10.94	AV	Horizontal

GFSK High Channel

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2441 MHz)										
3265.16	50.10	44.70	6.70	28.20	-9.80	40.30	74.00	-33.70	PK	Vertical
3265.16	40.10	44.70	6.70	28.20	-9.80	30.30	54.00	-23.70	AV	Vertical
3265.16	50.12	44.70	6.70	28.20	-9.80	40.32	74.00	-33.68	PK	Horizontal
3265.16	40.11	44.70	6.70	28.20	-9.80	30.31	54.00	-23.69	AV	Horizontal
4960.84	60.40	44.20	9.04	31.60	-3.56	56.84	74.00	-17.16	PK	Vertical
4960.84	40.39	44.20	9.04	31.60	-3.56	36.83	54.00	-17.17	AV	Vertical
4960.83	60.40	44.20	9.04	31.60	-3.56	56.84	74.00	-17.16	PK	Horizontal
4960.83	40.40	44.20	9.04	31.60	-3.56	36.84	54.00	-17.16	AV	Horizontal
5360.14	47.32	44.20	9.86	32.00	-2.34	44.98	74.00	-29.02	PK	Vertical
5360.14	39.34	44.20	9.86	32.00	-2.34	37.00	54.00	-17.00	AV	Vertical
5360.14	47.31	44.20	9.86	32.00	-2.34	44.97	74.00	-29.03	PK	Horizontal
5360.14	39.30	44.20	9.86	32.00	-2.34	36.96	54.00	-17.04	AV	Horizontal
7440.16	52.81	43.50	11.40	35.50	3.40	56.21	74.00	-17.79	PK	Vertical
7440.16	34.75	43.50	11.40	35.50	3.40	38.15	54.00	-15.85	AV	Vertical
7440.23	52.81	43.50	11.40	35.50	3.40	56.21	74.00	-17.79	PK	Horizontal
7440.23	34.81	43.50	11.40	35.50	3.40	38.21	54.00	-15.79	AV	Horizontal
11036.26	42.08	43.60	14.30	39.50	10.20	52.28	74.00	-21.72	PK	Vertical
11036.26	32.04	43.60	14.30	39.50	10.20	42.24	54.00	-11.76	AV	Vertical
11036.30	42.03	43.60	14.30	39.50	10.20	52.23	74.00	-21.77	PK	Horizontal
11036.30	32.05	43.60	14.30	39.50	10.20	42.25	54.00	-11.75	AV	Horizontal
16000.14	41.94	42.70	18.00	37.10	12.40	54.34	74.00	-19.66	PK	Vertical
16000.14	28.87	42.70	18.00	37.10	12.40	41.27	54.00	-12.73	AV	Vertical
16000.15	41.95	42.70	18.00	37.10	12.40	54.35	74.00	-19.65	PK	Horizontal
16000.15	31.17	42.70	18.00	37.10	12.40	43.57	54.00	-10.43	AV	Horizontal

Note:

- 1) Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is GFSK Mode
- 2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Meter Reading + Factor
he measurements were more than 20 dB below the limit and not reported
- 3) Remark
 1. The testing has been conformed to $10 \times 2480 = 24800$ MHz.
 2. All other emissions more than 30dB below the limit.

Band edge

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
GFSK							
2390.0	69.47	-12.99	56.48	74	-17.52	PK	Vertical
2390.0	55.19	-12.99	42.20	54	-11.80	AV	Vertical
2390.0	70.25	-12.99	57.26	74	-16.74	PK	Horizontal
2390.0	54.13	-12.99	41.14	54	-12.86	AV	Horizontal
2483.6	71.19	-12.78	58.41	74	-15.59	PK	Vertical
2483.6	54.17	-12.78	41.39	54	-12.61	AV	Vertical
2483.6	71.42	-12.78	58.64	74	-15.36	PK	Horizontal
2483.6	54.38	-12.78	41.60	54	-12.40	AV	Horizontal
$\pi/4$ -DQPSK							
2390.0	71.49	-12.99	58.50	74	-15.50	PK	Vertical
2390.0	54.57	-12.99	41.58	54	-12.42	AV	Vertical
2390.0	70.18	-12.99	57.19	74	-16.81	PK	Horizontal
2390.0	55.04	-12.99	42.05	54	-11.95	AV	Horizontal
2483.6	71.49	-12.78	58.71	74	-15.29	PK	Vertical
2483.6	56.18	-12.78	43.40	54	-10.60	AV	Vertical
2483.6	71.17	-12.78	58.39	74	-15.61	PK	Horizontal
2483.6	54.58	-12.78	41.80	54	-12.20	AV	Horizontal
8DPSK							
2390.0	71.51	-12.99	58.52	74	-15.48	PK	Vertical
2390.0	55.39	-12.99	42.40	54	-11.60	AV	Vertical
2390.0	70.57	-12.99	57.58	74	-16.42	PK	Horizontal
2390.0	56.25	-12.99	43.26	54	-10.74	AV	Horizontal
2483.6	71.28	-12.78	58.50	74	-15.50	PK	Vertical
2483.6	55.03	-12.78	42.25	54	-11.75	AV	Vertical
2483.6	71.54	-12.78	58.76	74	-15.24	PK	Horizontal
2483.6	54.49	-12.78	41.71	54	-12.29	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz, high measurement frequencies is range from 2483.5 to 2500 MHz.

Only show the worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.

Hopping

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
GFSK							
2390.0	69.21	-12.99	56.22	74	-17.78	PK	Vertical
2390.0	55.16	-12.99	42.17	54	-11.83	AV	Vertical
2390.0	68.48	-12.99	55.49	74	-18.51	PK	Horizontal
2390.0	54.22	-12.99	41.23	54	-12.77	AV	Horizontal
2483.5	67.16	-12.78	54.38	74	-19.62	PK	Vertical
2483.5	55.18	-12.78	42.40	54	-11.60	AV	Vertical
2483.5	68.13	-12.78	55.35	74	-18.65	PK	Horizontal
2483.5	55.17	-12.78	42.39	54	-11.61	AV	Horizontal
π/4-DQPSK							
2390.0	69.07	-12.99	56.08	74	-17.92	PK	Vertical
2390.0	56.31	-12.99	43.32	54	-10.68	AV	Vertical
2390.0	68.03	-12.99	55.04	74	-18.96	PK	Horizontal
2390.0	54.13	-12.99	41.14	54	-12.86	AV	Horizontal
2483.5	68.09	-12.78	55.31	74	-18.69	PK	Vertical
2483.5	54.19	-12.78	41.41	54	-12.59	AV	Vertical
2483.5	69.17	-12.78	56.39	74	-17.61	PK	Horizontal
2483.5	55.22	-12.78	42.44	54	-11.56	AV	Horizontal
8DPSK							
2390.0	69.09	-12.99	56.10	74	-17.90	PK	Vertical
2390.0	55.07	-12.99	42.08	54	-11.92	AV	Vertical
2390.0	68.10	-12.99	55.11	74	-18.89	PK	Horizontal
2390.0	55.20	-12.99	42.21	54	-11.79	AV	Horizontal
2483.5	69.23	-12.78	56.45	74	-17.55	PK	Vertical
2483.5	55.20	-12.78	42.42	54	-11.58	AV	Vertical
2483.5	68.14	-12.78	55.36	74	-18.64	PK	Horizontal
2483.5	55.06	-12.78	42.28	54	-11.72	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz, high measurement frequencies is range from 2483.5 to 2500 MHz.

Only show the worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.

7 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013, DA 00-705
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Transmitting & Hopping
Remark	:	The worst case was recorded.

7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

7.2 Test Result


TX in GFSK Band edge-left side

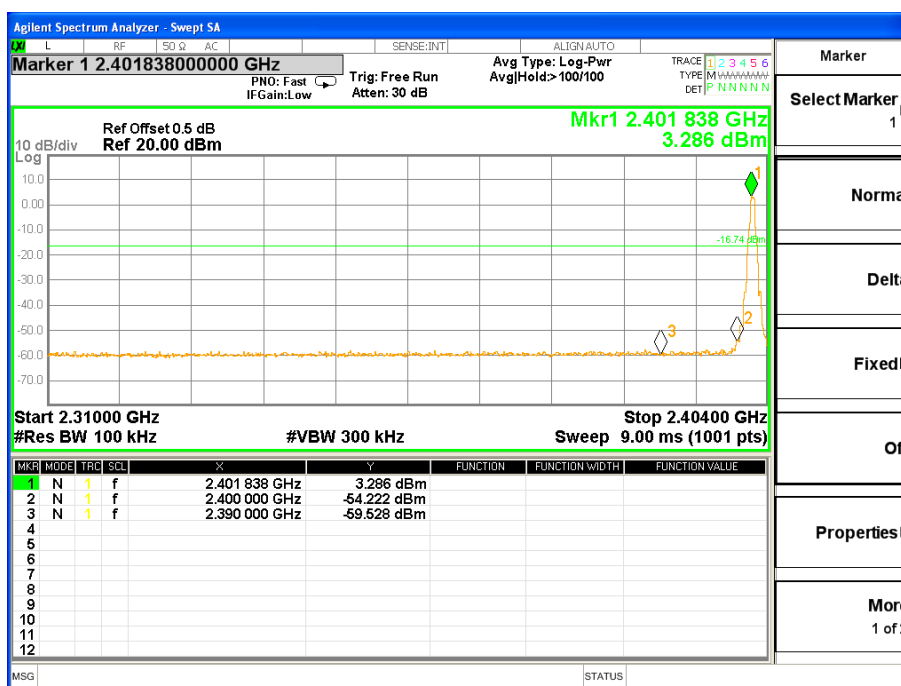


TX in GFSK Band edge-right side

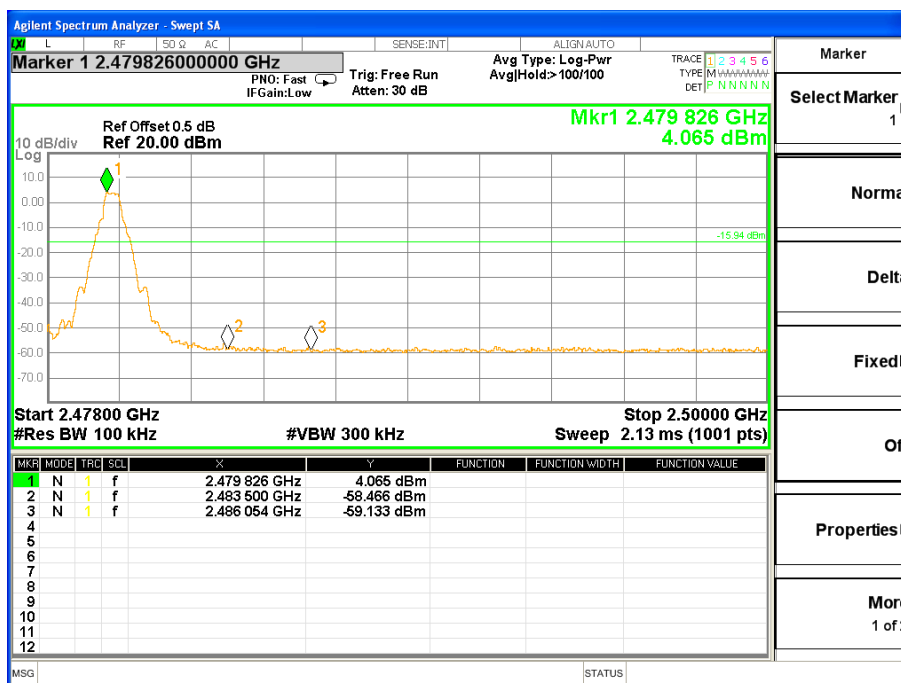


TX in Pi/4 DQPSK Band edge-left side

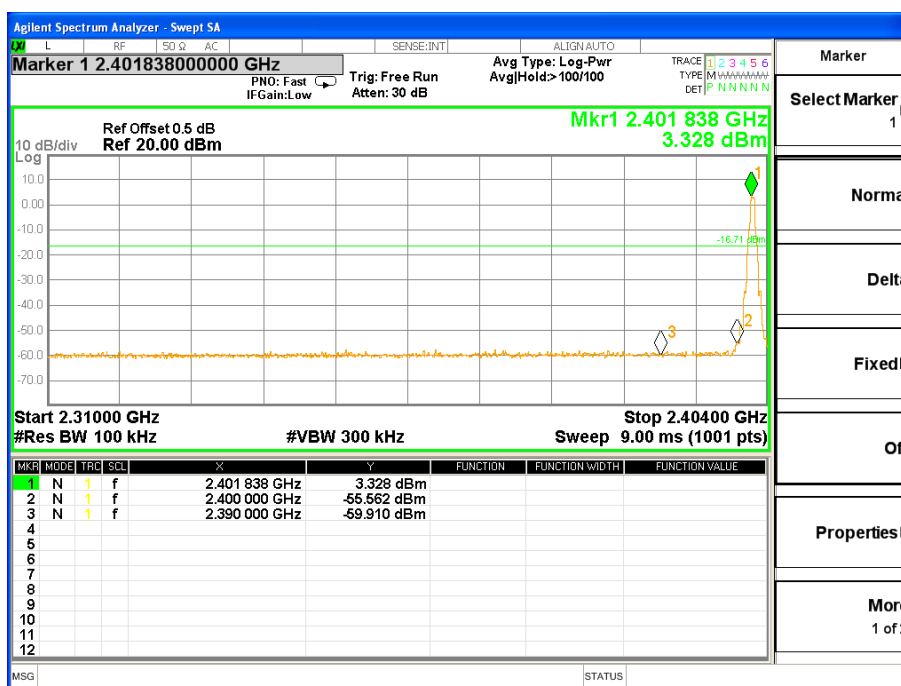


TX in Pi/4 DQPSK Band edge-right side

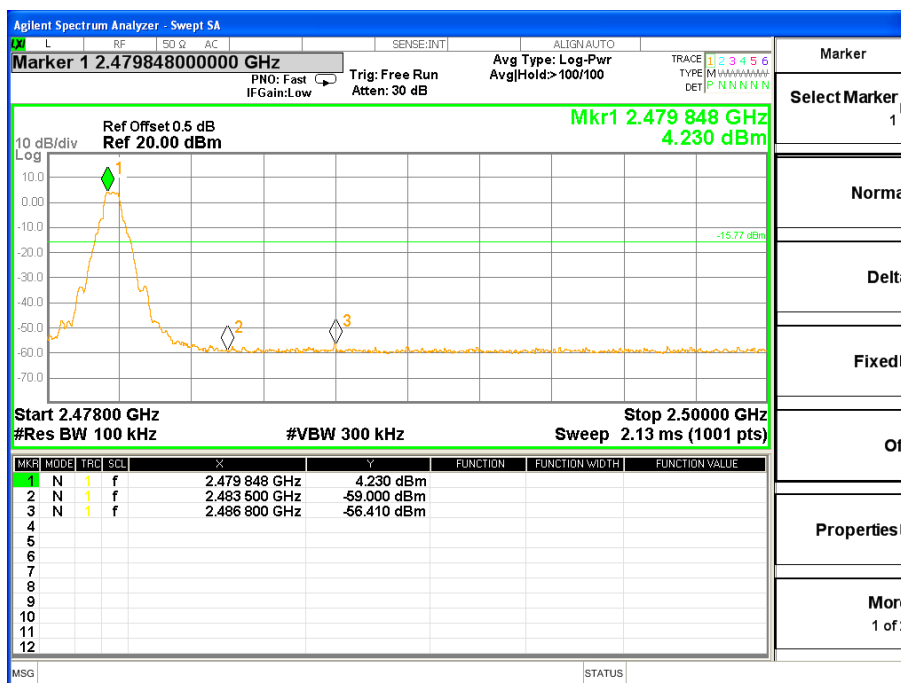


TX in 8DPSK Band edge-left side

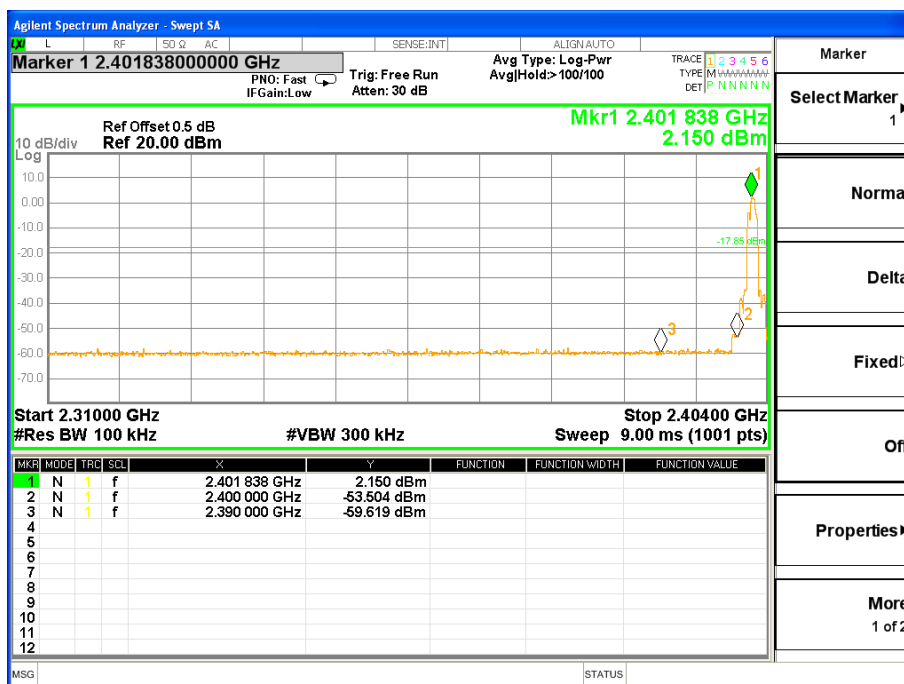


TX in 8DPSK Band edge-right side

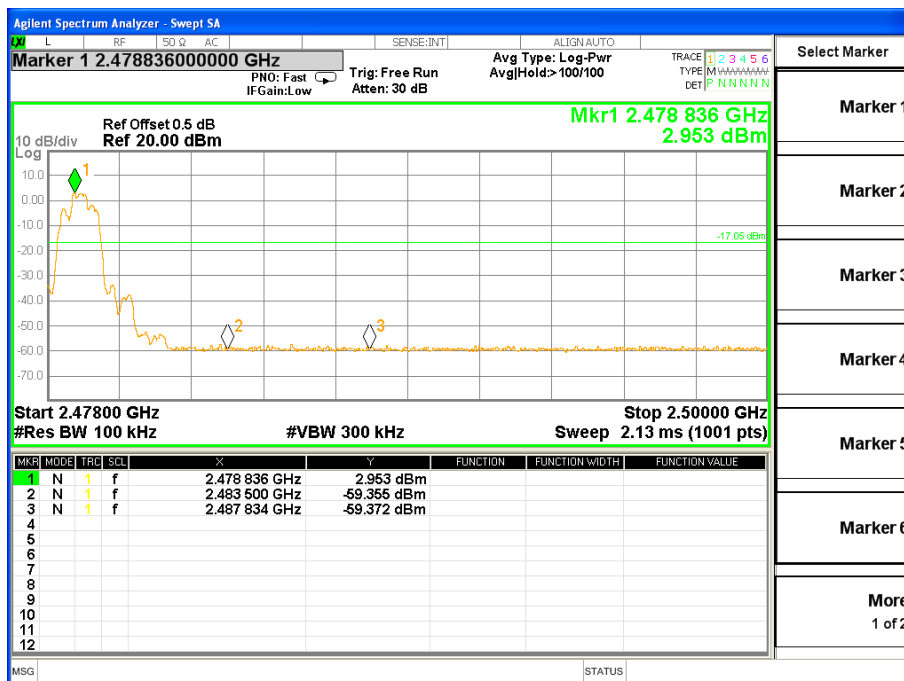


Hopping in GFSK Band edge-left side

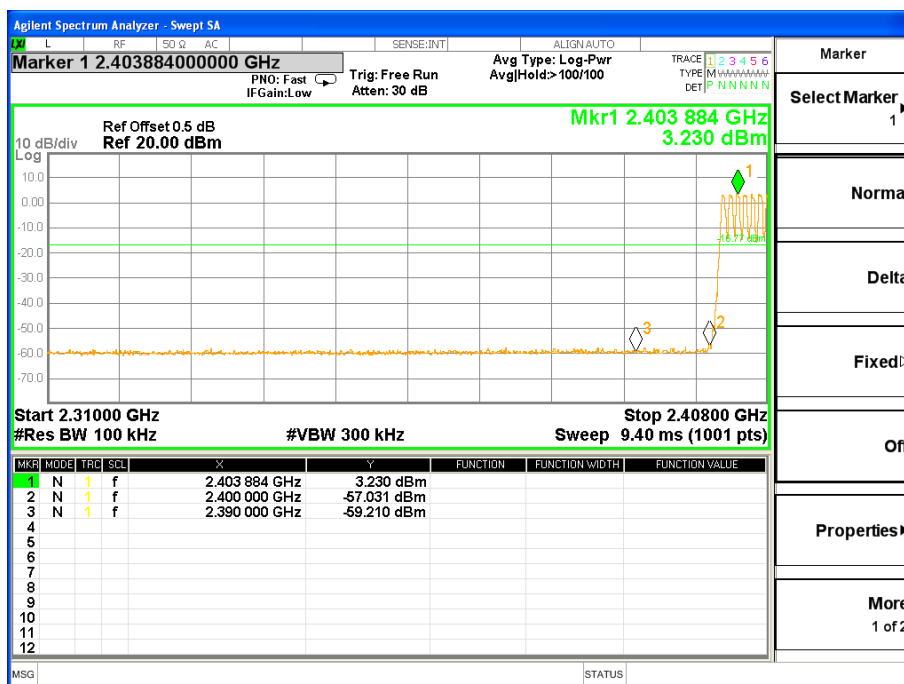


Hopping in GFSK Band edge-right side

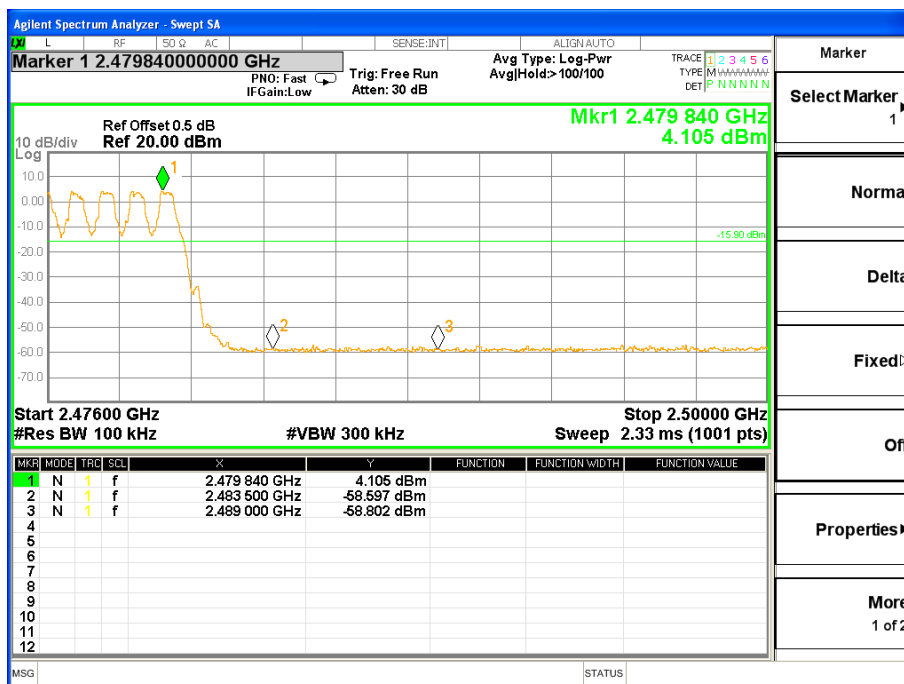


Hopping in Pi/4 DQPSK Band edge-left side

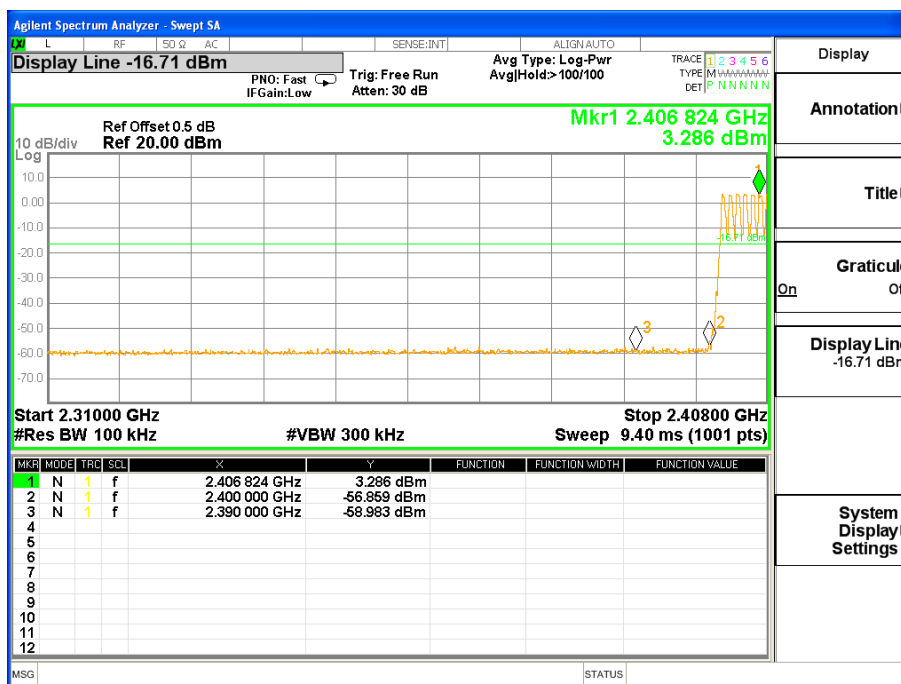


Hopping in Pi/4 DQPSK Band edge-right side

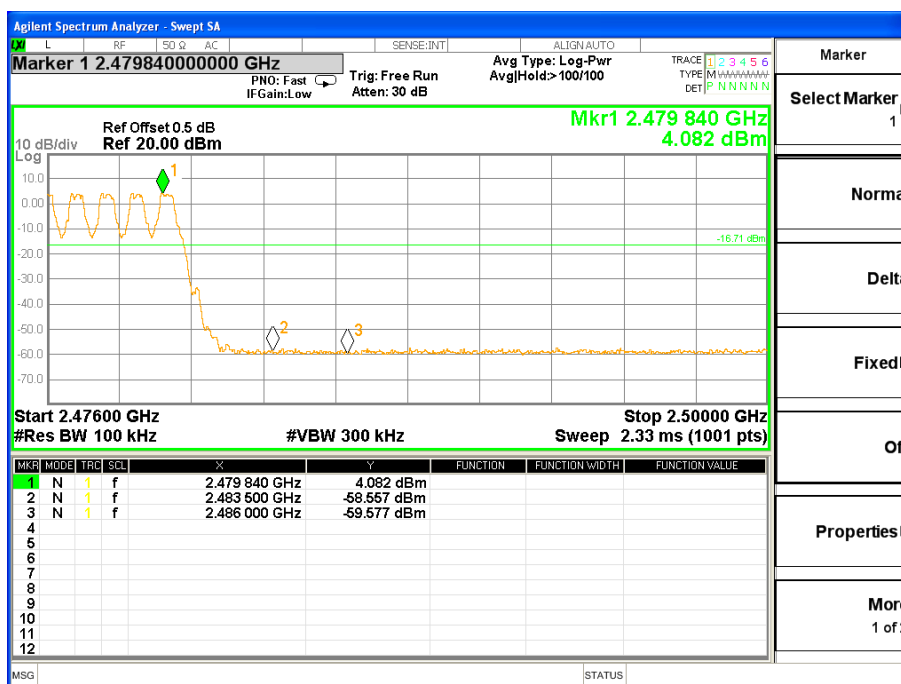

Hopping in 8DPSK Band edge-left side

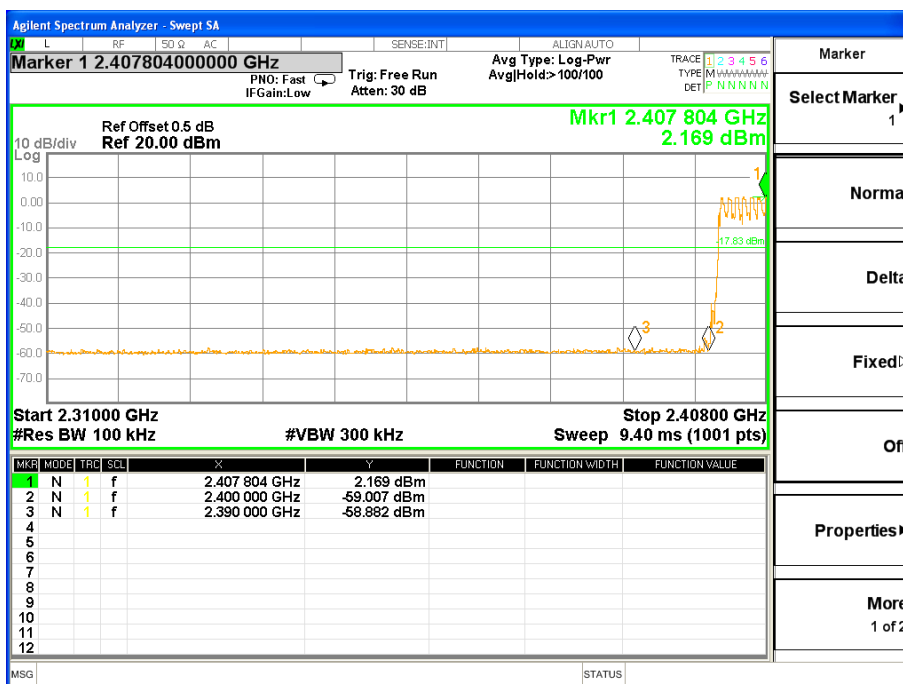

Hopping in 8DPSK Band edge-right side

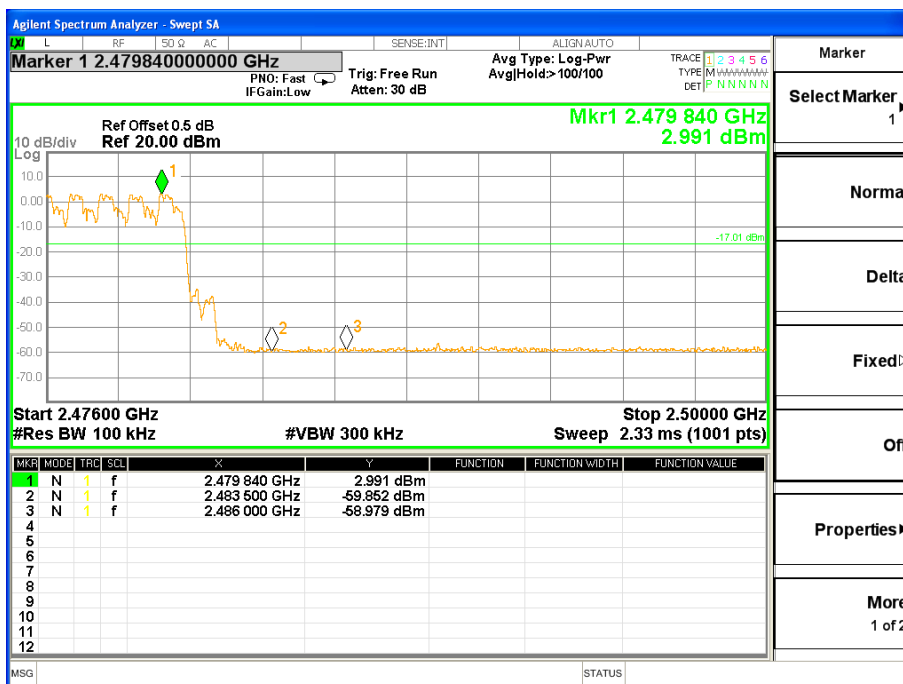



8 20 dB Bandwidth Measurement


Test Requirement : FCC CFR47 Part 15 Section 15.247
Test Method : ANSI C63.10:2013, DA 00-705
Test Mode : Refer to section 3.3

8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

8.2 Test Result


GFSK Low Channel

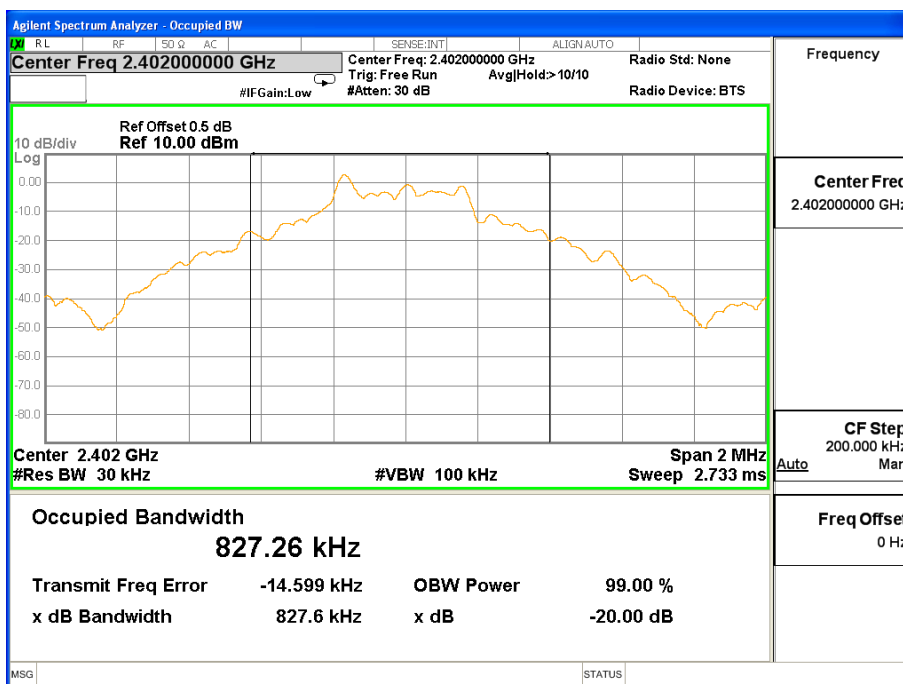


GFSK Middle Channel

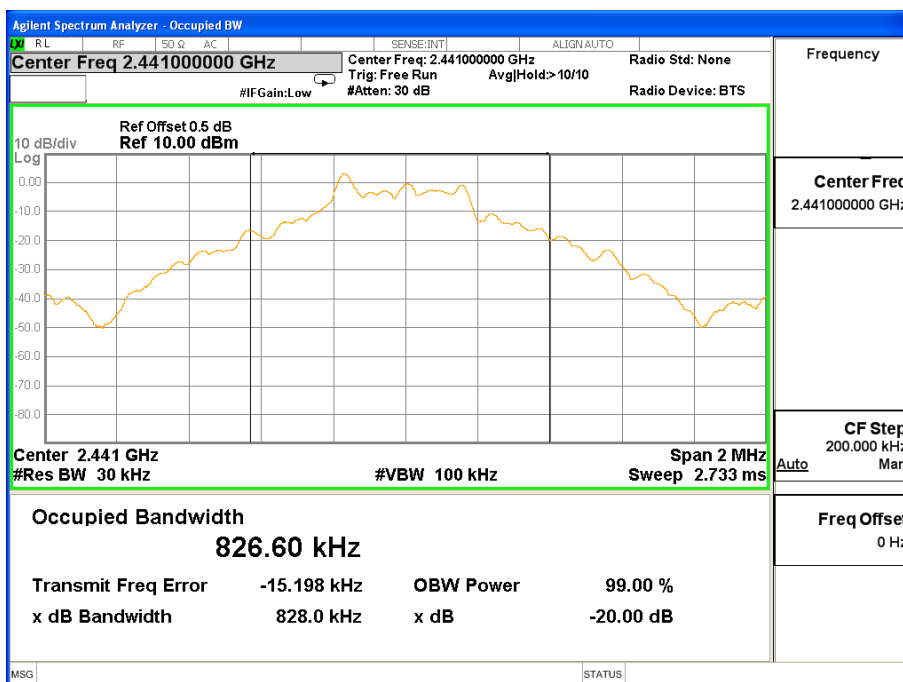


GFSK High Channel

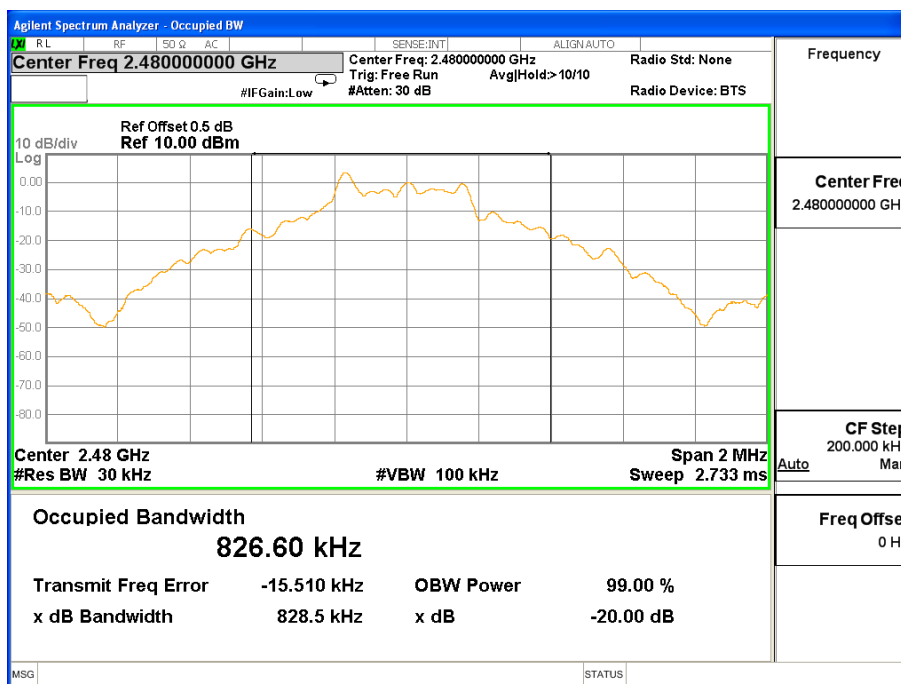


Pi/4DQPSK Low Channel

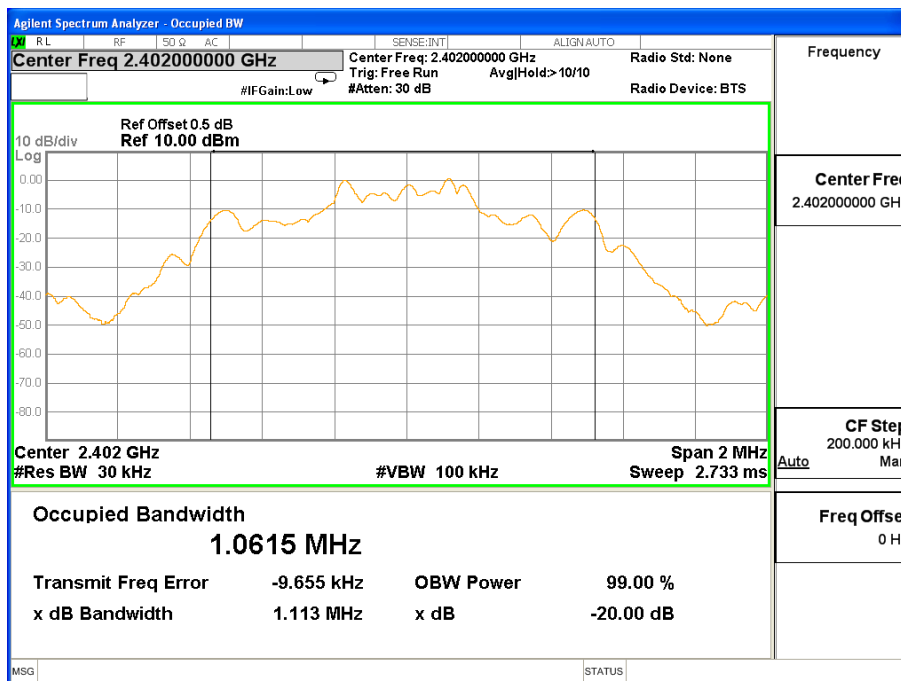


Pi/4DQPSK Middle Channel

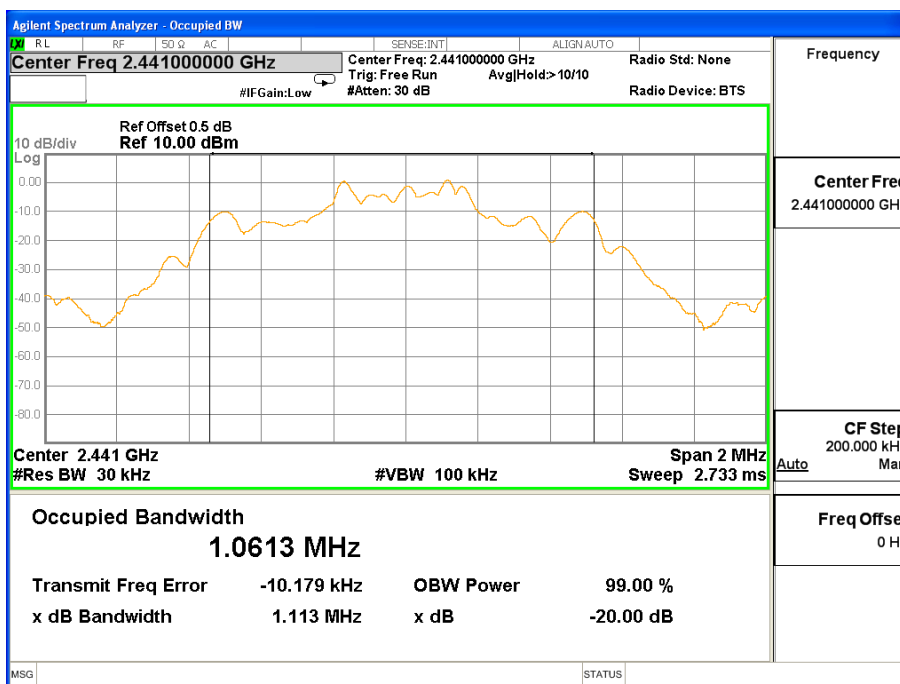


Pi/4DQPSK High Channel

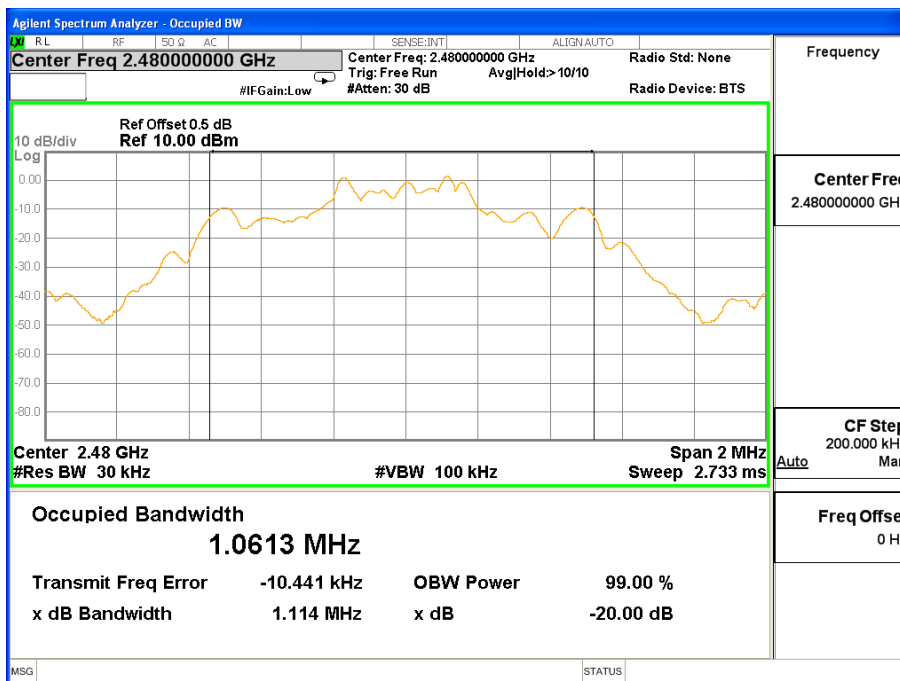


8DPSK Low Channel

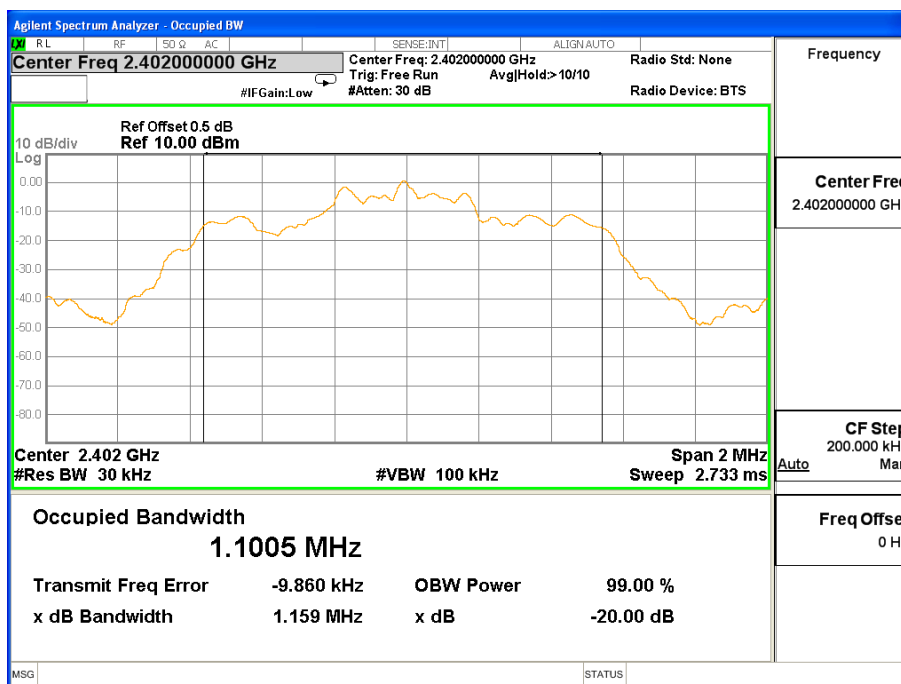

8DPSK Middle Channel

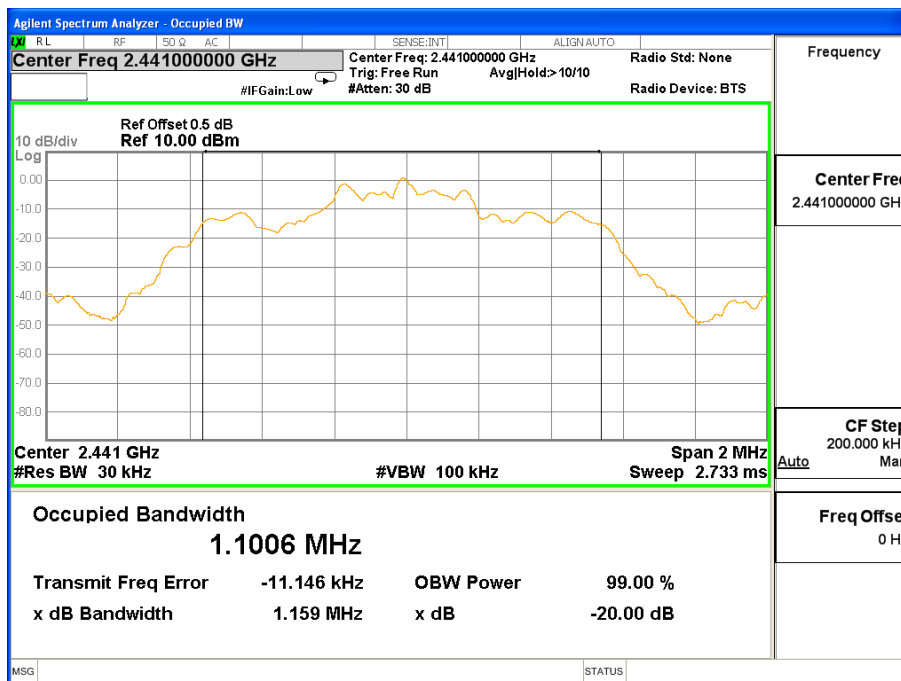

8DPSK High Channel

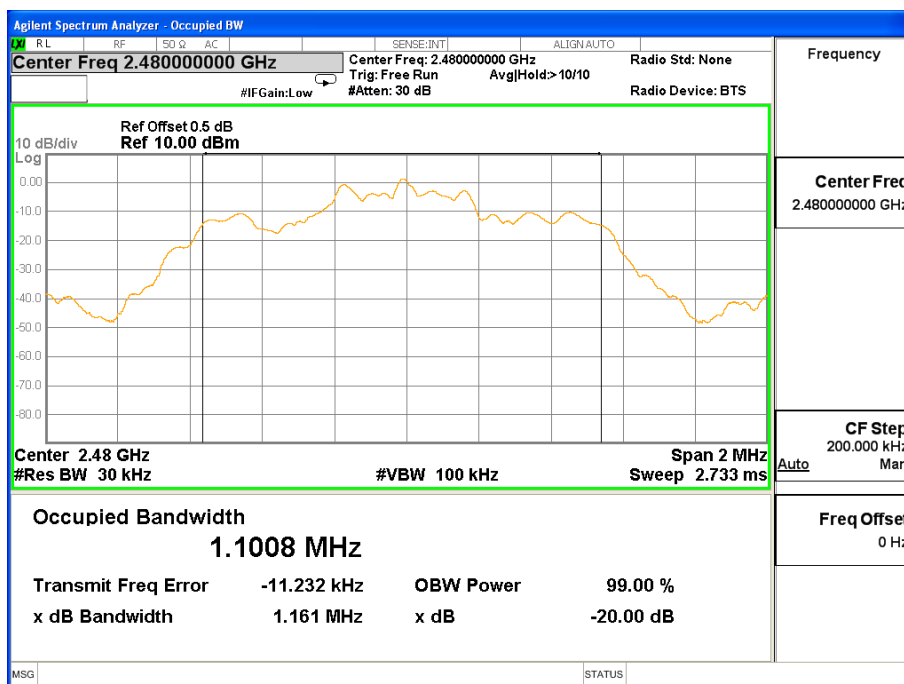


9 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: 1 W or 0.125W if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW(20.97dBm)
Test Mode	: Refer to section 3.3

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. The EUT was directly connected to the Power Sensor&PC
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

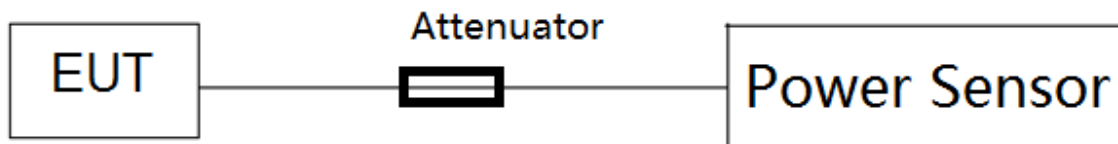

9.2 Test Result

GFSK(1Mbps)				
Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak (dBm)	AVG (dBm)	dBm
CH00	2402	4.72	-0.37	30
CH39	2441	4.02	-1.07	30
CH78	2480	3.40	-1.69	30

Note : the channel separation > bandwidth

$\pi/4$QPSK(2Mbps)				
Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak (dBm)	AVG (dBm)	dBm
CH00	2402	2.94	-2.15	20.96
CH39	2441	2.15	-2.94	20.96
CH78	2480	2.03	-3.05	20.96

Note : the channel separation >2/3 bandwidth

8-DPSK(3Mbps)				
Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak (dBm)	AVG (dBm)	dBm
CH00	2402	2.85	-2.24	20.96
CH39	2441	1.93	-3.15	20.96
CH78	2480	1.25	-3.83	20.96

Note : the channel separation >2/3 bandwidth

10 Hopping Channel Separation


Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Mode	: Hopping

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.2 Test Result

Modulation	Test Channel	Separation (MHz)	Limit (MHz)	Result
GFSK	Low	1.000	0.827	PASS
GFSK	Middle	1.000	0.827	PASS
GFSK	High	1.000	0.827	PASS
Pi/4 DQPSK	Low	1.000	0.742	PASS
Pi/4 DQPSK	Middle	1.000	0.742	PASS
Pi/4 DQPSK	High	1.000	0.742	PASS
8DPSK	Low	1.000	0.770	PASS
8DPSK	Middle	1.000	0.770	PASS
8DPSK	High	1.000	0.770	PASS



Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN: AUTO Avg Type: Log-Pwr

Reference Level 20.00 dBm

PN0: Wide IF Gain: Low Trig: Free Run #Atten: 30 dB

Ref Level 20.00 dBm

Attenuation [30 dB]

Scale/Div 10 dB

Scale Type Log Lin

Center 2.402500 GHz Span 3.000 MHz

#Res BW 30 kHz #VBW 100 kHz #Sweep 5.00 ms (601 pts)

Mkr2 2.402 830 GHz 2.939 dBm

10 dB/div Log

Ref Offset 0.5 dB Ref 20.00 dBm

1 2

MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.401 830 GHz	2.935 dBm			
2	N	1	f	2.402 830 GHz	2.939 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

MSG STATUS

Amplitude

Ref Level 20.00 dBm

Attenuation [30 dB]

Scale/Div 10 dB

Scale Type Log Lin

Presel Center

Presel Adjust 0 Hz

More 1 of 2

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Q AC SENSE:INT ALIGN AUTO

Reference Level 20.00 dBm

PNO: Wide IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6 TYPE SUMMARY DET P P P P P P

Ref Offset 0.5 dB Ref 20.00 dBm Mkr2 2.441 830 GHz 3.240 dBm


The figure shows a spectrum analyzer display with a yellow trace representing the signal spectrum. Two peaks are identified with green diamonds and labeled 1 and 2. Peak 1 is at approximately 2.440830 GHz and peak 2 is at approximately 2.441830 GHz. The y-axis represents power in dBm, ranging from -70.0 to 10.0. The x-axis represents frequency in GHz, ranging from 2.440 to 2.442. The plot includes a grid and various measurement parameters such as Reference Level, Span, and Frequency.

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.440 830 GHz	3.259 dBm			
2	N	1	f	2.441 830 GHz	3.240 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								


Center 2.441500 GHz Span 3.000 MHz
#Res BW 30 kHz #VBW 100 kHz #Sweep 5.00 ms (601 pts)

Amplitude
Ref Level 20.00 dBm
Attenuation [30 dB]
Scale/Div 10 dB
Scale Type Log Lin
Presel Center
Presel Adjust 0 Hz
More 1 of 2


GFSK High Channel

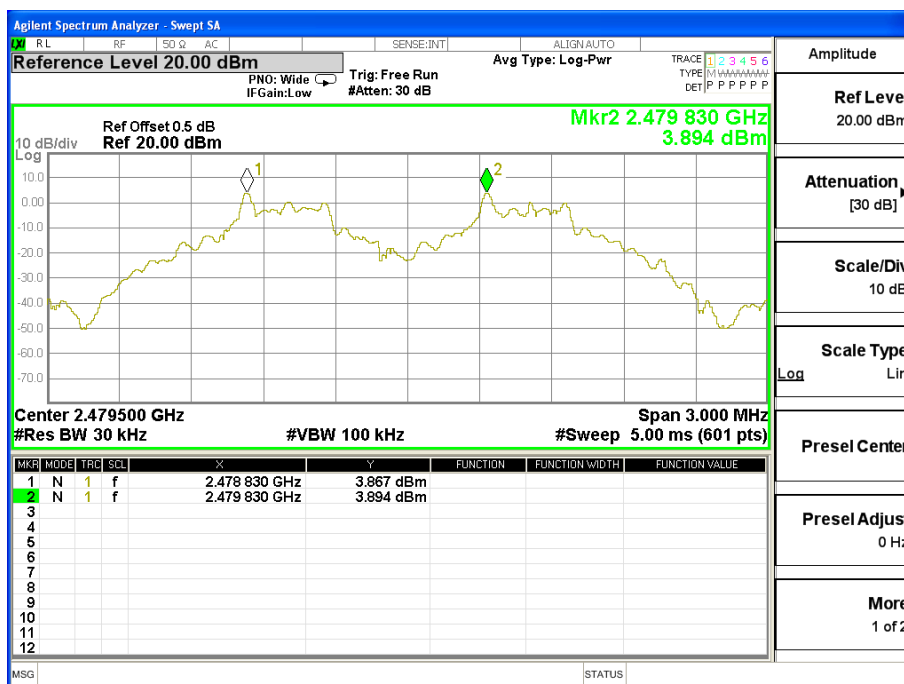


Pi/4DQPSK Low Channel

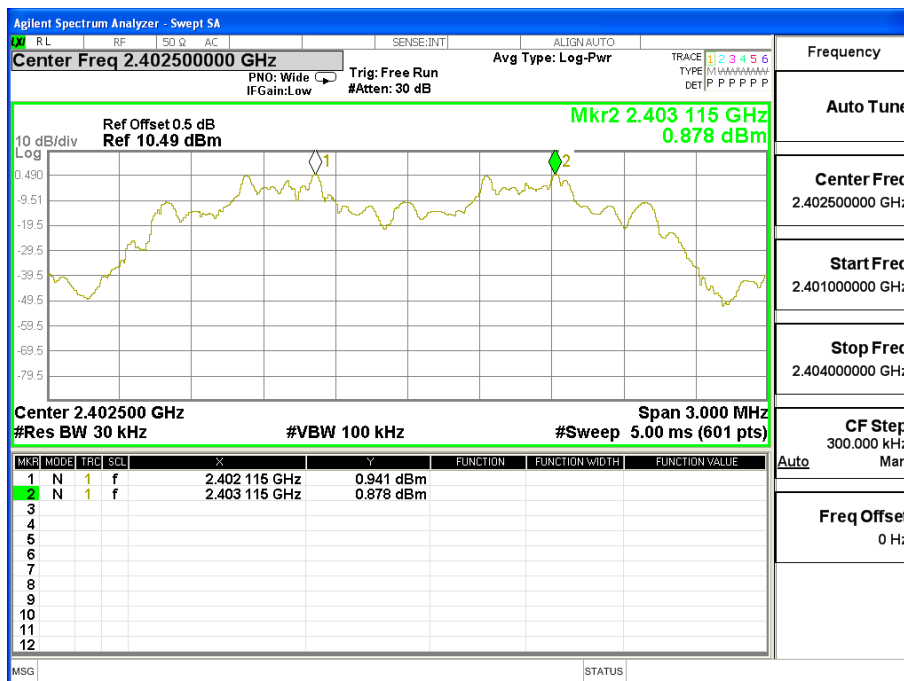


Pi/4DQPSK Middle Channel

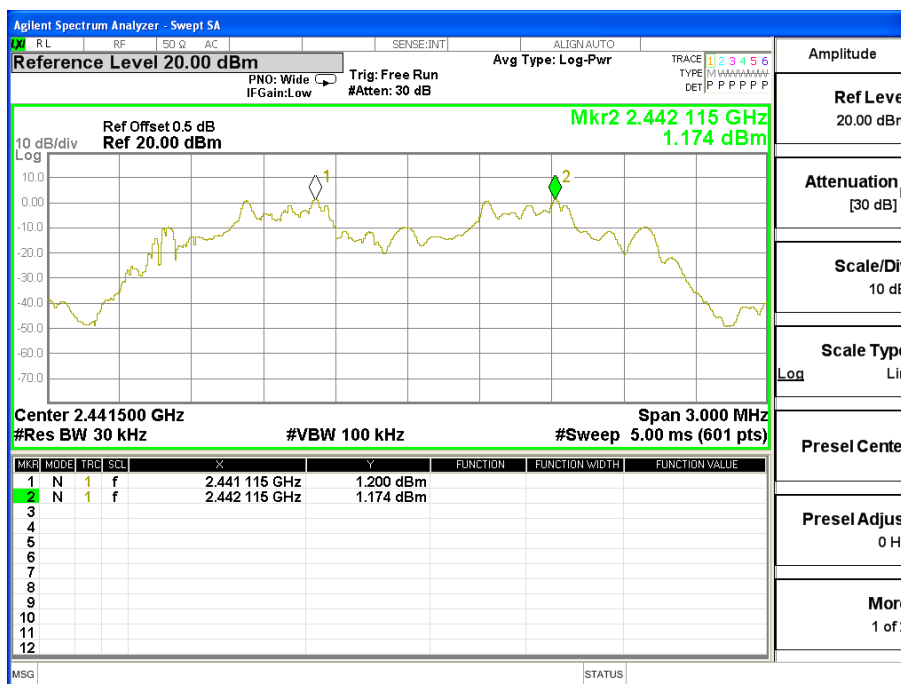


Pi/4DQPSK High Channel

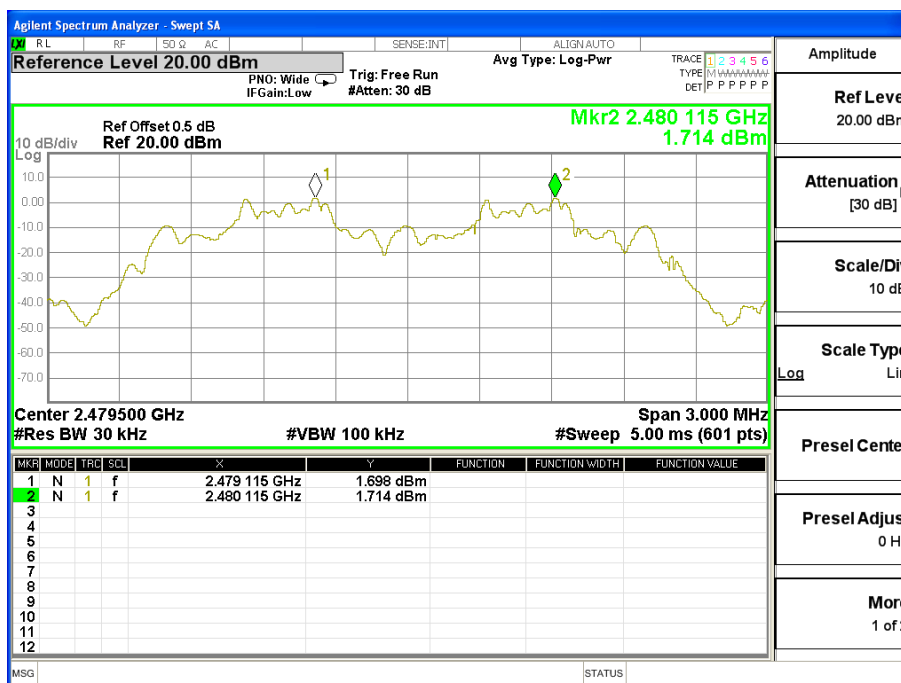


8DPSK Low Channel

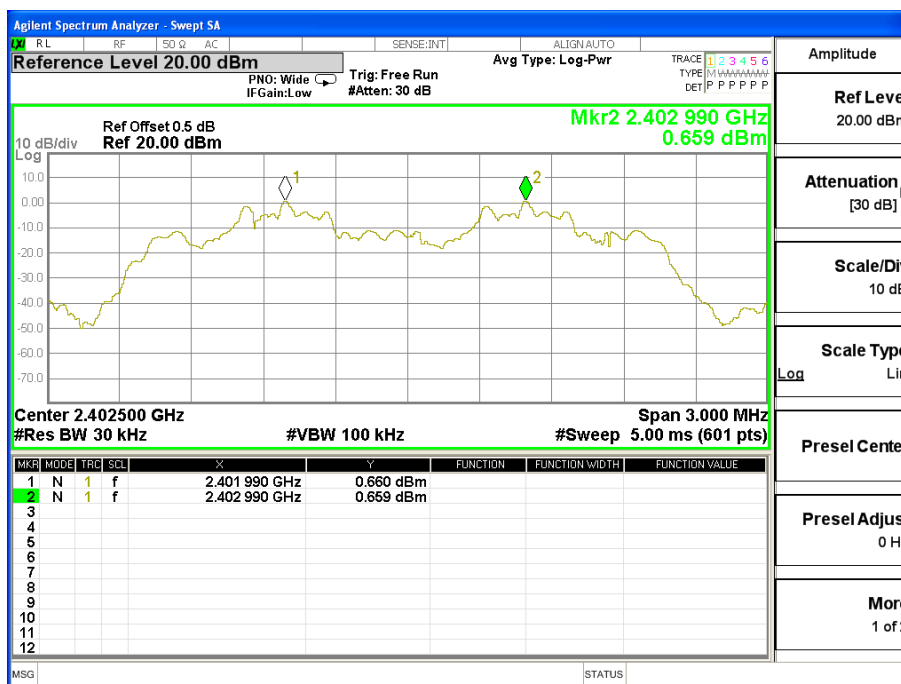

8DPSK Middle Channel

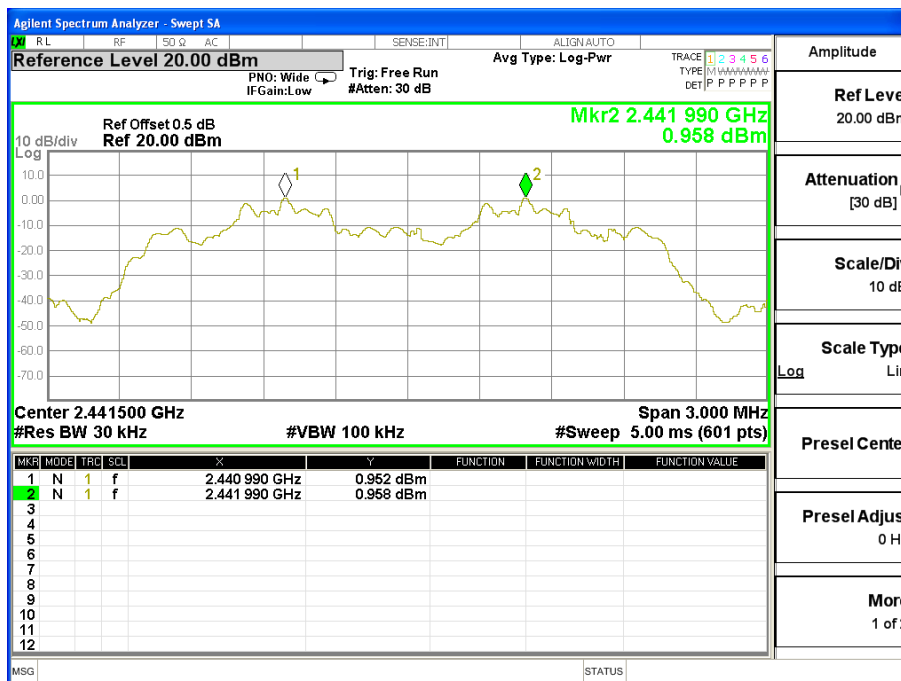

8DPSK High Channel

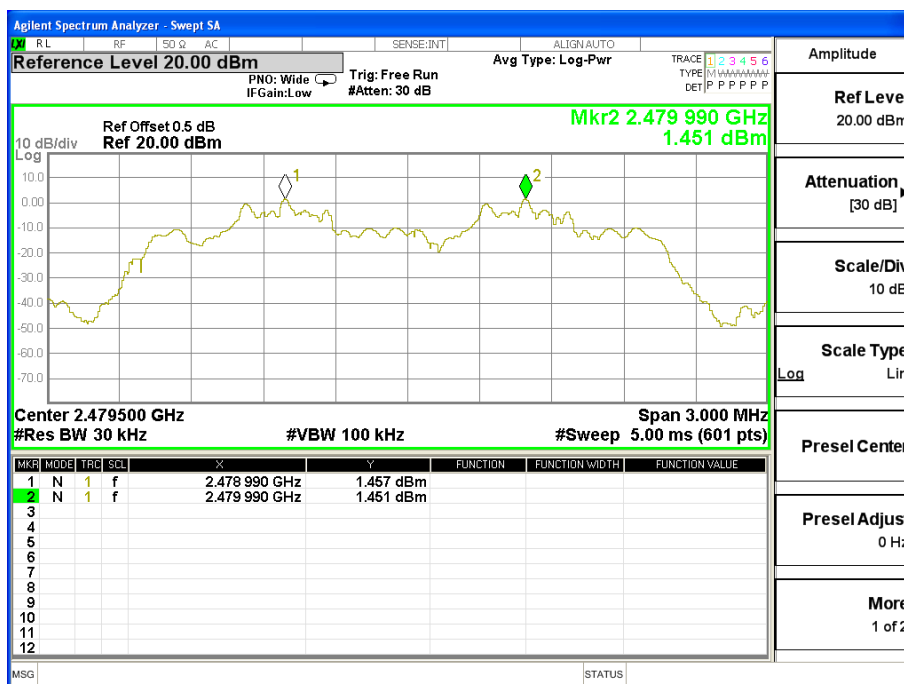

11 Number of Hopping Frequency


Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013, DA 00-705
 Test Limit : Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
 Test Mode : Hopping(GFSK)

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

11.2 Test Result

Channel Number	Limit
79	≥15

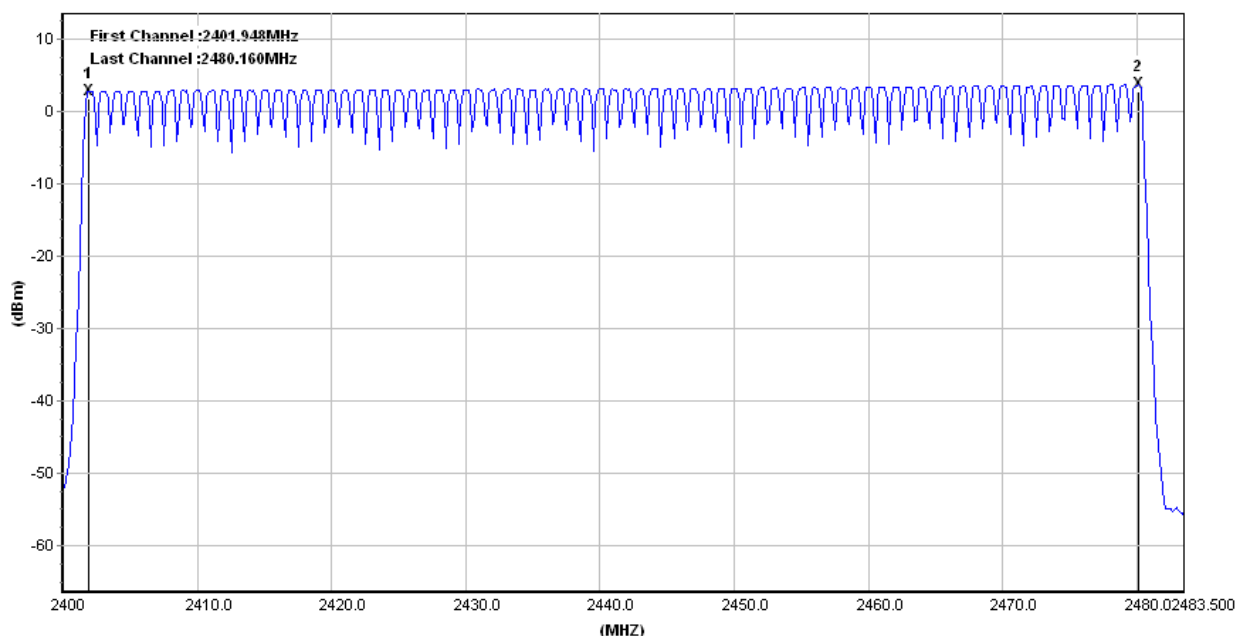

12 Dwell Time

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode	: Hopping
Remark	: The worst case(8DPSK,3DH5) was recorded

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

12.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5/2DH5/3DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3/2DH3/3DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1/2DH1/3DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time. Only the worst data(DH5) were show as follow.	




Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits(s)
DH1	2441 MHz	0.370	0.118	0.4
DH3	2441 MHz	1.630	0.261	0.4
DH5	2441 MHz	2.880	0.307	0.4


CH39-DH1

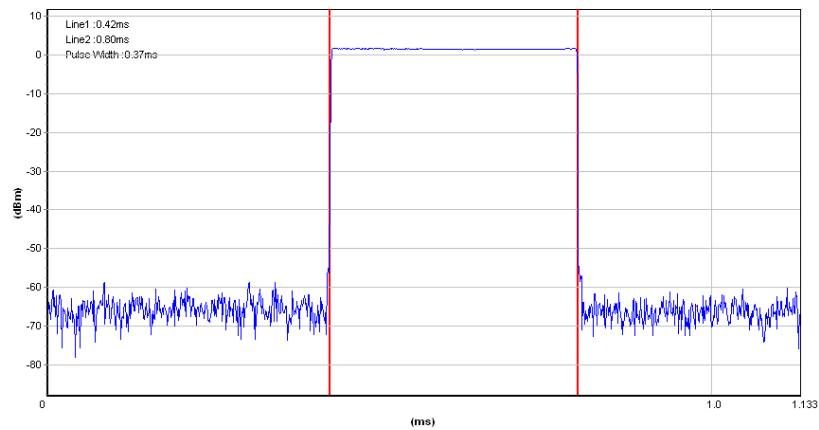

CH39-DH3

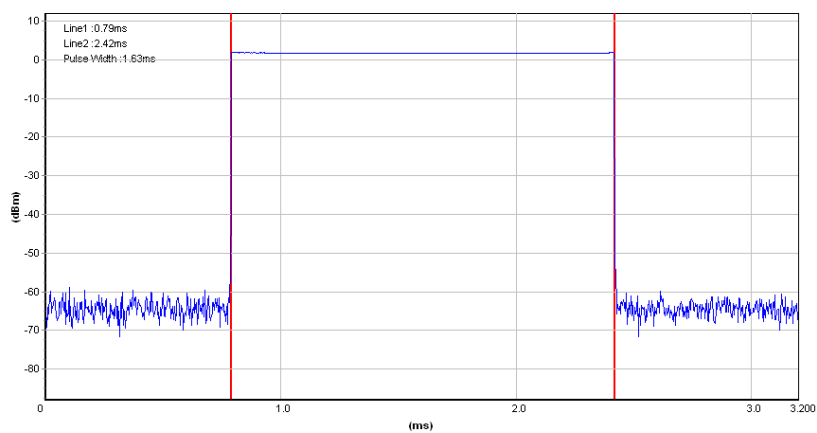


CH39-DH5

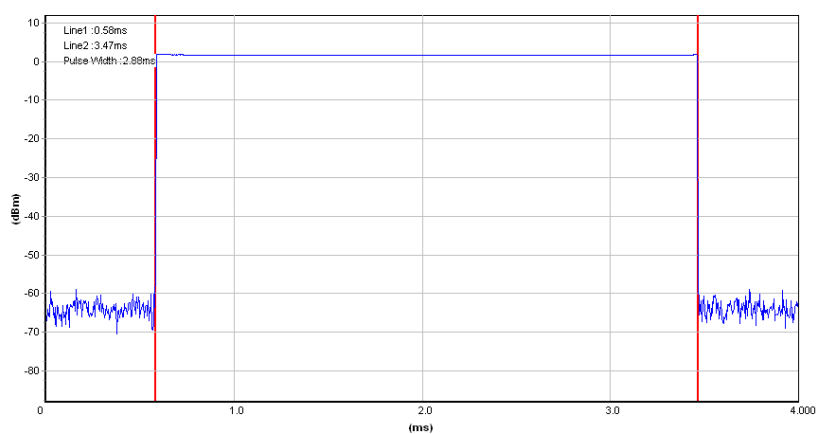




Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits(s)
2DH1	2441 MHz	0.380	0.122	0.4
2DH3	2441 MHz	1.640	0.262	0.4
2DH5	2441 MHz	2.890	0.308	0.4


CH39-2DH1

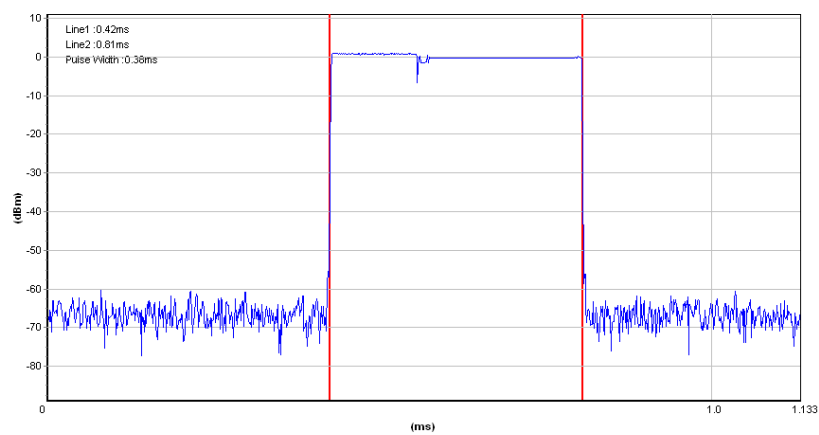

CH39-2DH3

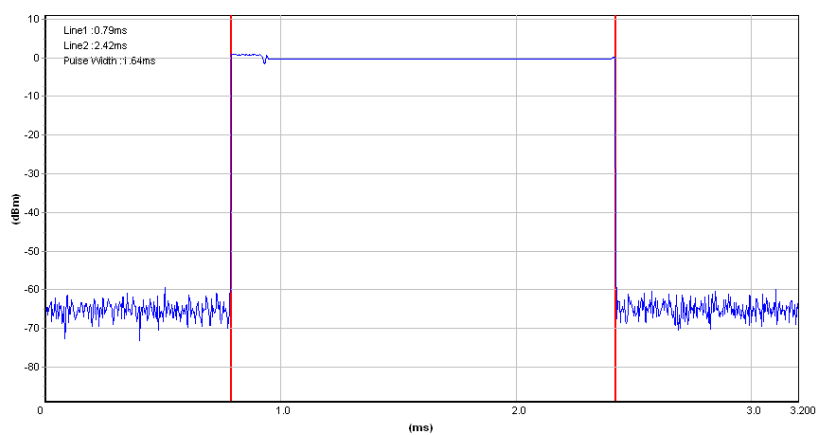


CH39-2DH5

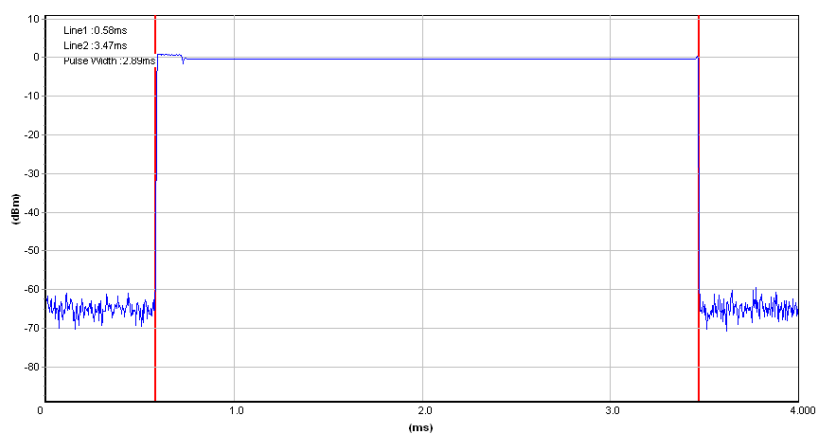


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits(s)
3DH1	2441 MHz	0.380	0.122	0.4
3DH3	2441 MHz	1.640	0.262	0.4
3DH5	2441 MHz	2.890	0.308	0.4


CH39-3DH1

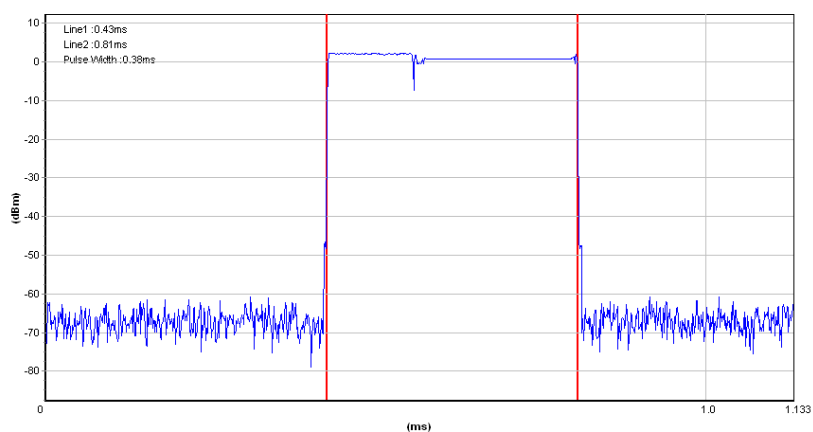

CH39-3DH3

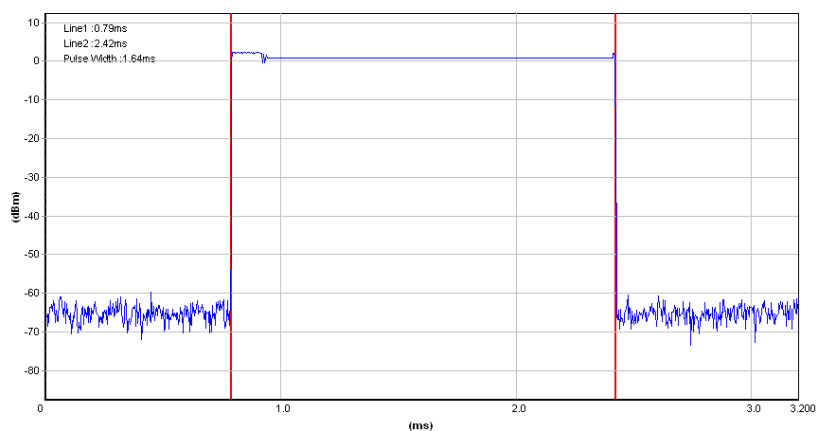

CH39-3DH5

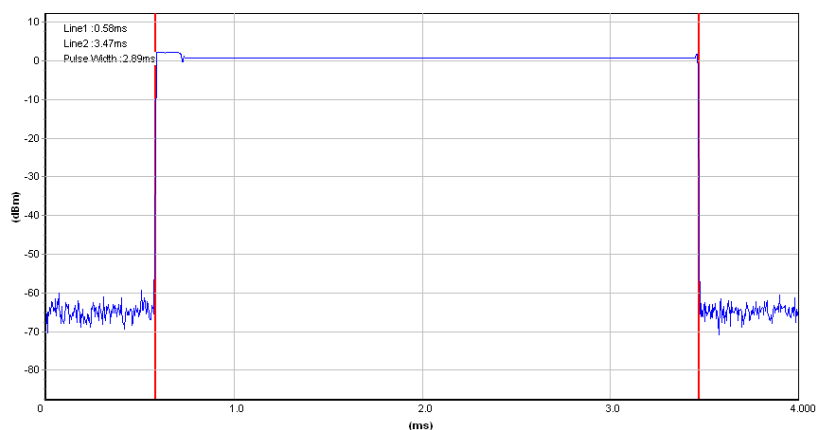




13 Antenna Requirement


According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an Integrated Antenna, it meet the requirement of this section.

14 Test Setup


Spurious Emissions
From 30MHz-1000MHz

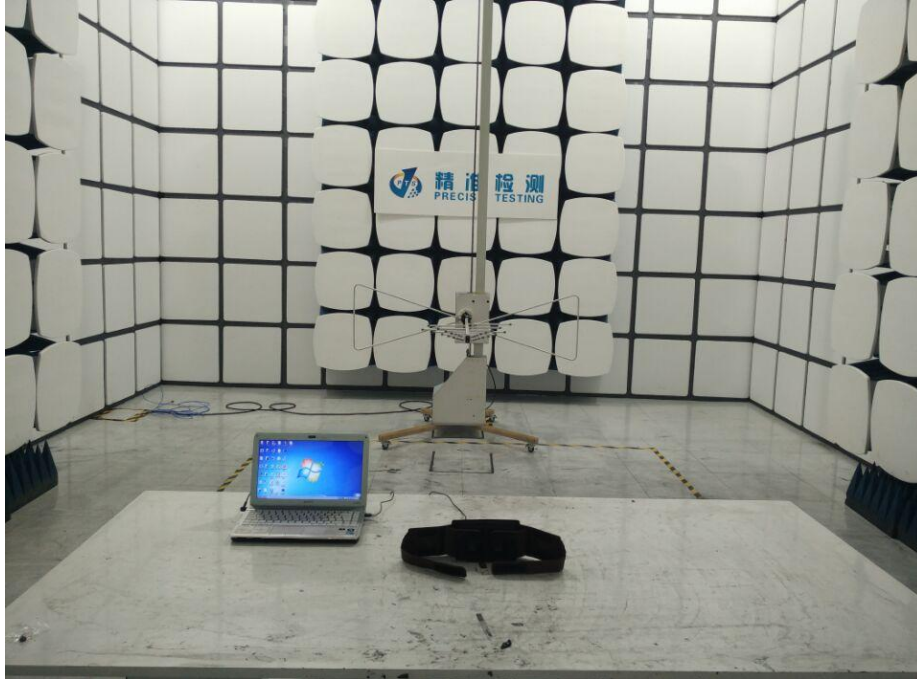

Above 1GHz

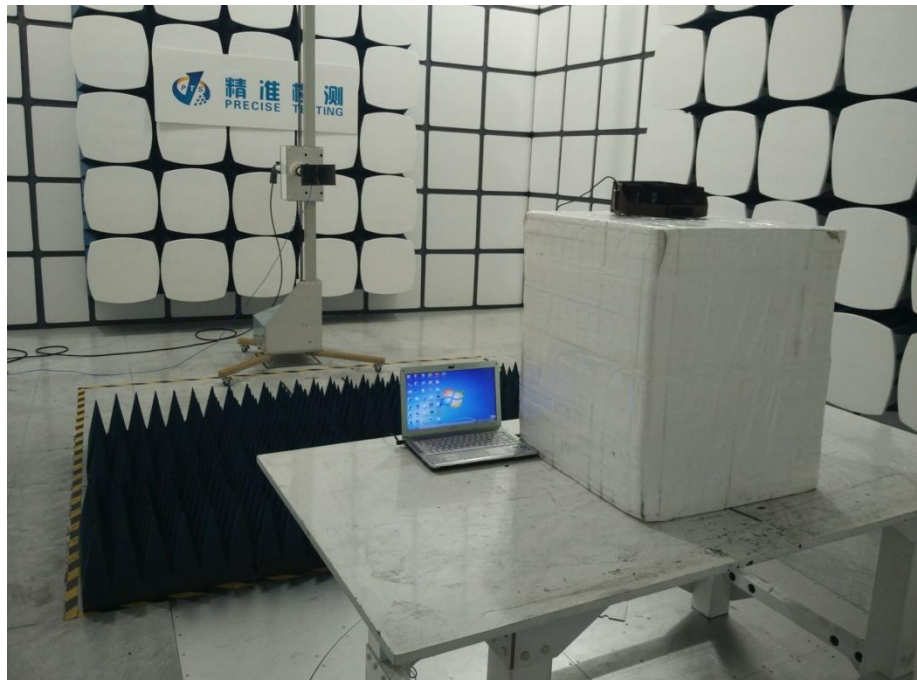

Conducted Emissions

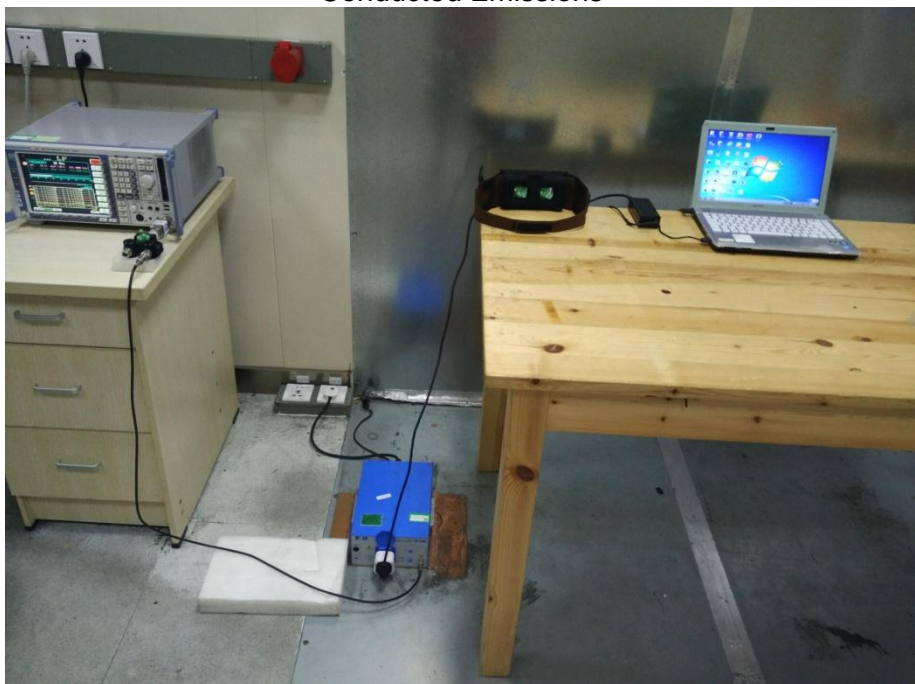

*****THE END REPORT*****