

# **FCC Test Report**

FCC ID : 2AJ4H-T815

Equipment : TPMS Sensor

Model No. : TIY-081005

Brand Name : TYC-TIY

Applicant : I YUAN PRECISION INDUSTRIAL CO., LTD.

Address : NO.24, Dinghu Rd., Guishan Dist., Taoyuan

City 33378, Taiwa(R.O.C.)

Standard : 47 CFR FCC Part 15.231

Received Date : Mar. 21, 2019

Tested Date : Mar. 22 ~ Mar. 25, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Cheid/ Assistant Manager Gary Chang / Manager

Testing Laboratory

Report No.: FR931905 Page: 1 of 36



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	
1.5	Test Standards	
1.6	Deviation from Test Standard and Measurement Procedure	7
1.7	Measurement Uncertainty	
2	TEST CONFIGURATION	8
2.1	Testing Condition	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Radiated Emission	
3.2	Transmission and Deactivation Time	26
3.3	20dB and Occupied Bandwidth	33
4	TEST LABORATORY INFORMATION	36



## **Release Record**

Report No.	Version	Description	Issued Date
FR931905	Rev. 01	Initial issue	Apr. 12, 2019

Report No.: FR931905 Page: 3 of 36



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	Note <sup>1</sup>	N/A
15.231(b)	Field Strength of Fundamental emissions	Meet the requirement of limit	Pass
15.231(b) 15.209	Unwanted Emissions	Meet the requirement of limit	Pass
15.231(a)	Transmission and Deactivation Time	Meet the requirement of limit	Pass
15.231(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

N/A means Not Applicable.

Note<sup>1</sup>: The EUT consumes DC power from battery, so the test is not required.

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared values of gain for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of the gain.

Report No.: FR931905 Page: 4 of 36



## 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Freq. (MHz)	Channel Number	Channel Bandwidth (kHz)	
315	ASK	315	1		
315	FSK	315	1		

Note: The device supports below 3 modes:

- 1) Rotating mode
- 2) Stationary mode
- 3) Alert mode

#### 1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector
1	Monopole		

## 1.1.3 EUT Operational Condition

Power Supply Type	3Vdc from battery

#### 1.1.4 Accessories

	Accessories				
No.	Equipment	Description			
1	Battery	Brand: maxell Model: CR2050HR Power Rating: 3Vdc			


Report No.: FR931905 Page: 5 of 36



## 1.2 Local Support Equipment List

	Support Equipment List					
No.	No. Equipment Brand Model FCC ID Remarks					
1	315MHz controller		TIY tool		provided by applicant	

## 1.3 Test Setup Chart

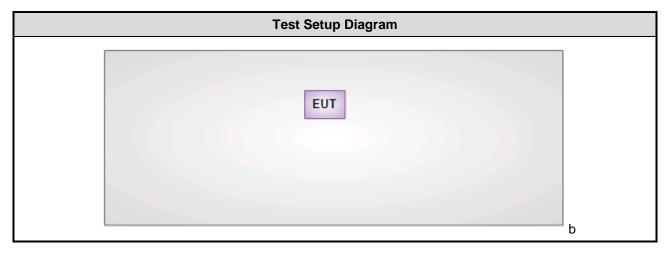

Report No.: FR931905 Page: 6 of 36



## 1.4 The Equipment List

Test Item	Radiated Emission					
Test Site	966 chamber1 / (03CH01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	<b>Calibration Date</b>	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019	
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 18, 2018	Jul. 17, 2019	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019	
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019	
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019	
Preamplifier	EMC	EMC02325	980225	Jul. 20, 2018	Jul. 19, 2019	
Preamplifier	Agilent	83017A	MY39501308	Oct. 04, 2018	Oct. 03, 2019	
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019	
RF Cable	EMC	EMC104-SM-SM-8000	181106	Oct. 08, 2018	Oct. 07, 2019	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 08, 2018	Oct. 07, 2019	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 08, 2018	Oct. 07, 2019	
LF cable 1M	EMC	EMCCFD400-NM-NM-100 0	160502	Oct. 08, 2018	Oct. 07, 2019	
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 08, 2018	Oct. 07, 2019	
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.					

#### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.231 ANSI C63.10-2013

#### 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Parameters	Uncertainty		
Radiated emission ≤ 1GHz	±3.41dB		
Radiated emission > 1GHz	±4.59 dB		

Report No.: FR931905 Page: 7 of 36



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	24°C / 65%	Aska Huang
RF Conducted	TH01-WS	24°C / 65%	Aska Huang

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

#### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration
Field Strength of Fundamental emissions	ASK, FSK	315	а
Unwanted Emissions	ASK, FSK	315	а
Deactivation Time	ASK, FSK	315	a/b/c
20dB bandwidth	ASK, FSK	315	а

#### Note:

 The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

2. Three test configurations are listing as follows:

Configuration a: Rotating mode. Configuration b: Stationary mode.

Configuration c: Alert mode.

3. The output power of above 3 configurations is same thus only one mode (Configuration a) is selected to perform emission and 20 dB bandwidth test item.

Report No.: FR931905 Page: 8 of 36



## 3 Transmitter Test Results

#### 3.1 Radiated Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

#### 3.1.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
40.66~40.70	1000	100
70 -130	500	50
130 -174	500 to 1500 Note	50 to 150 <sup>Note</sup>
174 -260	1500	150
260 -470	1500 to 5000 Note	150 to 500 Note
above 470	5000	500
Note: Linear interpolations.		

#### 3.1.2 Limit of Unwanted Emissions

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

Radiated emission limits					
Frequency Range (MHz)	Frequency Range (MHz) Field Strength (uV/m) Field Strength (dBuV/m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Report No.: FR931905 Page: 9 of 36



#### 3.1.3 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

- 1. Radiated emission below 1GHz
- 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
- Radiated emission Peak value for harmonics
- 2. RBW=1MHz, VBW=3MHz and Peak detector
- Radiated emission Peak value for fundamental

RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission Average value for field strength of fundamental and harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

∧ ASK mode

20log (Duty cycle) = 20log 
$$\frac{31*1ms}{100 ms}$$
 = -10.17dB

Please see page 18 for plotted duty

FSK mode


20log (Duty cycle) = 20log 
$$\frac{14.6*1 \text{ ms}}{100 \text{ ms}}$$
 = -16.71dB

Please see page 25 for plotted duty

Report No.: FR931905 Page: 10 of 36



## 3.1.4 Test Setup

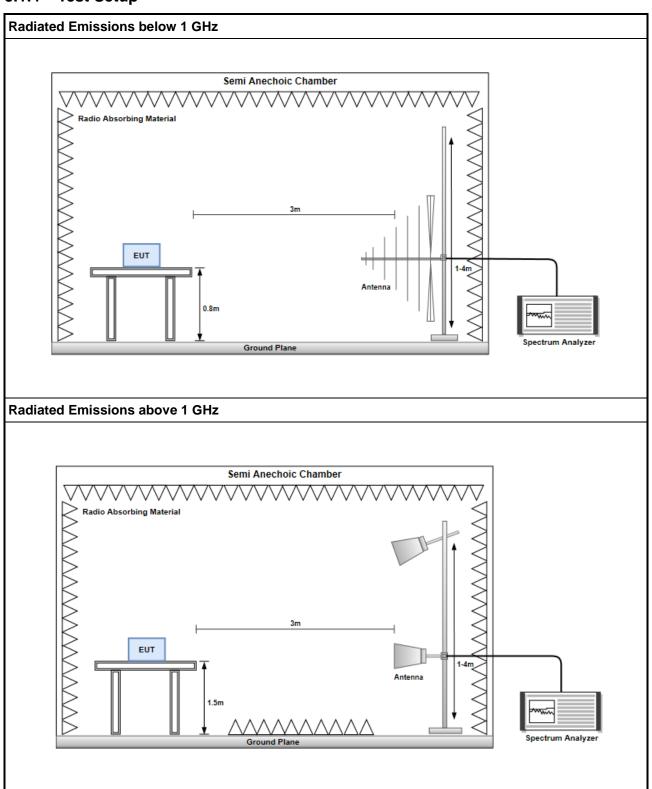


Report No.: FR931905 Page: 11 of 36



#### **ASK mode**

#### 3.1.5 Transmitter Field strength of fundamental emissions and harnonics

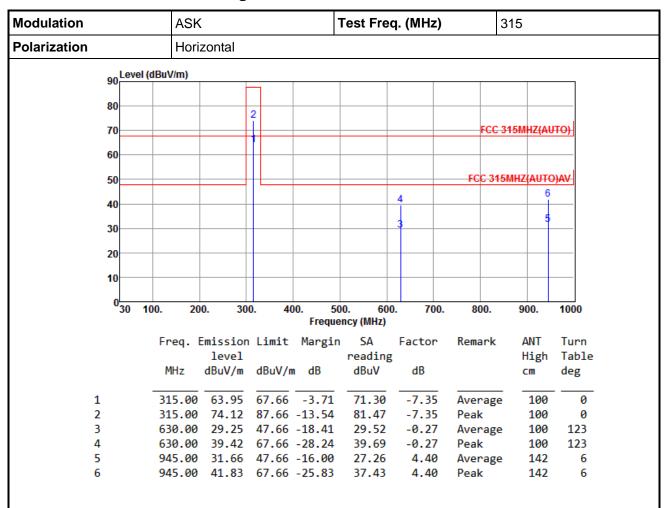


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 12 of 36



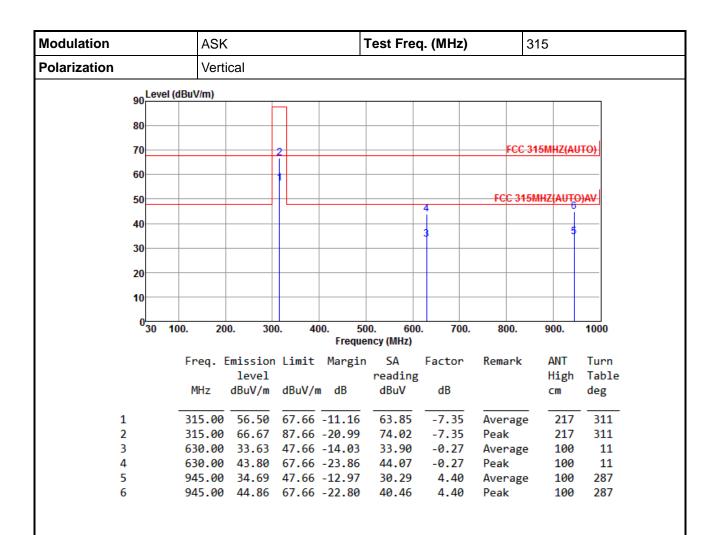

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 13 of 36



#### 3.1.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

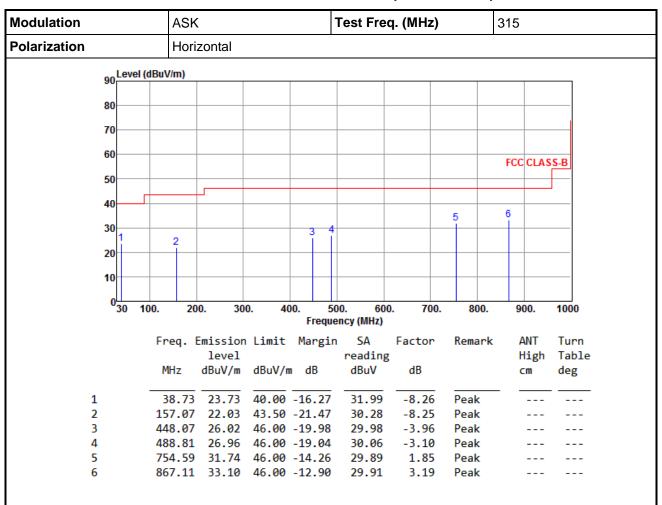

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR931905 Page: 14 of 36



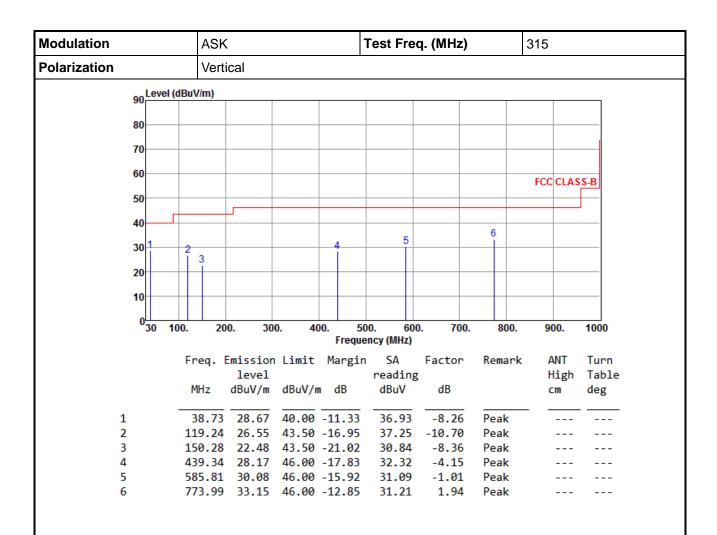

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR931905 Page: 15 of 36



#### 3.1.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

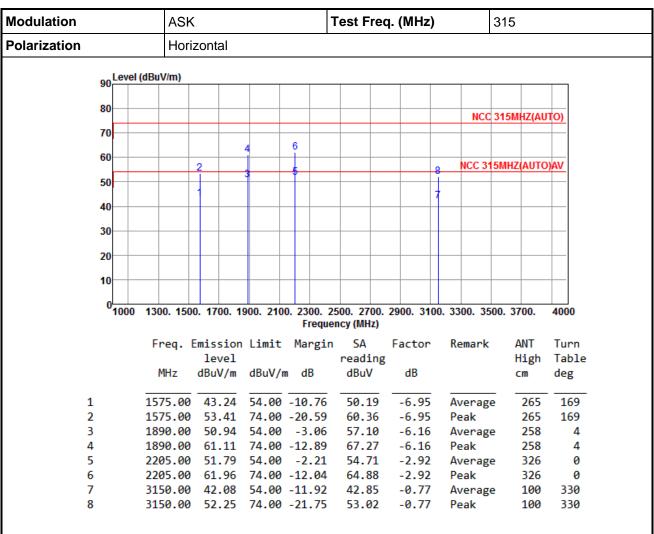


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 16 of 36

<sup>\*</sup>Factor includes antenna factor, cable loss and amplifier gain



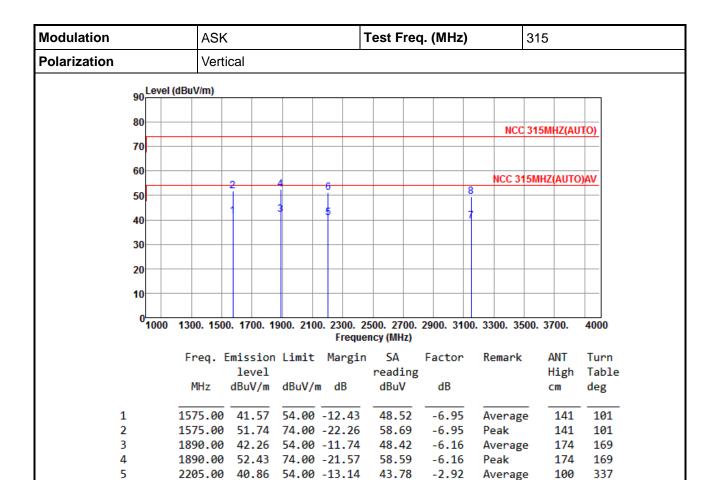

53.95

40.25

50.42

-2.92

-0.77

-0.77

Peak

Peak

Average

100

287

287

337

19

19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 17 of 36

Report Version: Rev. 01

6

7

8

2205.00


3150.00

51.03 74.00 -22.97

39.48 54.00 -14.52

3150.00 49.65 74.00 -24.35



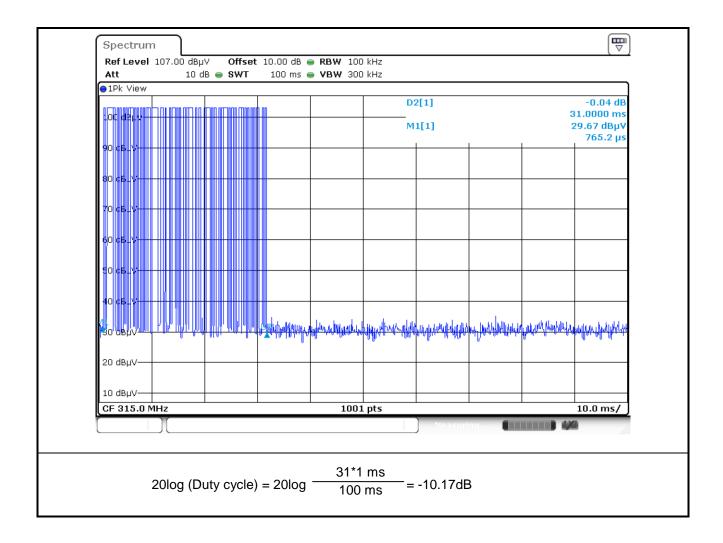


Report No.: FR931905 Page: 18 of 36



#### **FSK** mode

#### 3.1.8 Transmitter Field strength of fundamental emissions and harnonics

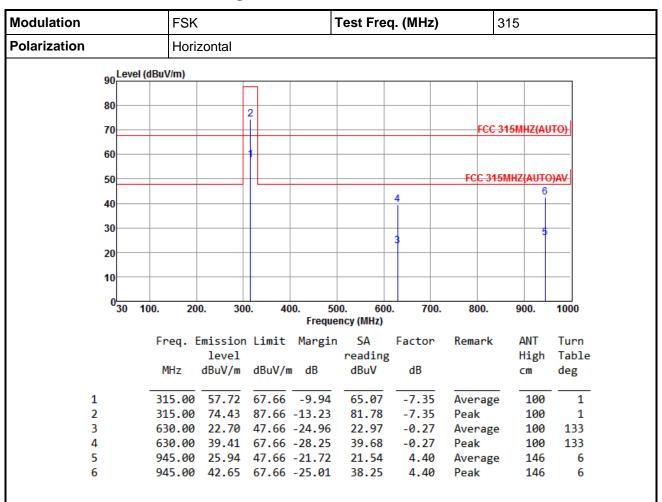


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR931905 Page: 19 of 36



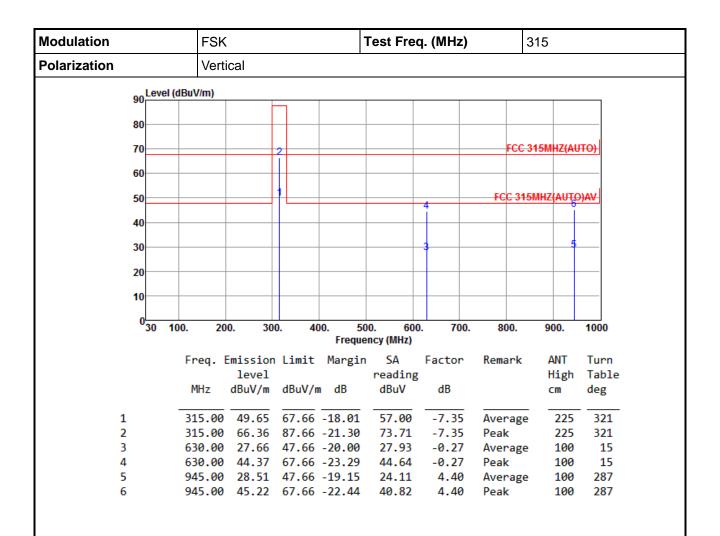

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 20 of 36



#### 3.1.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

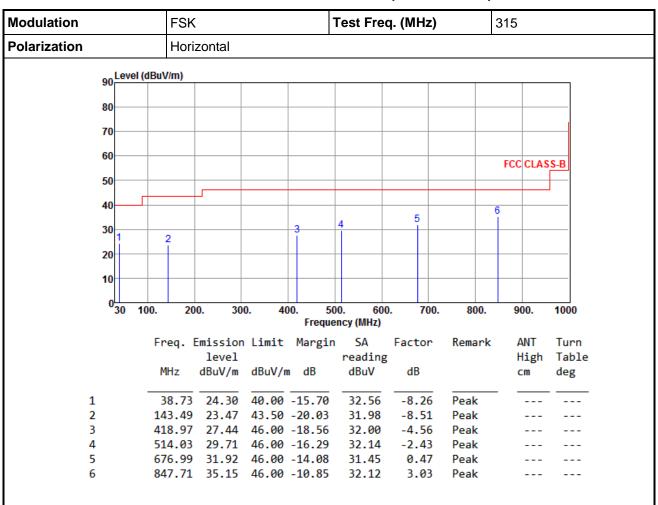

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR931905 Page: 21 of 36



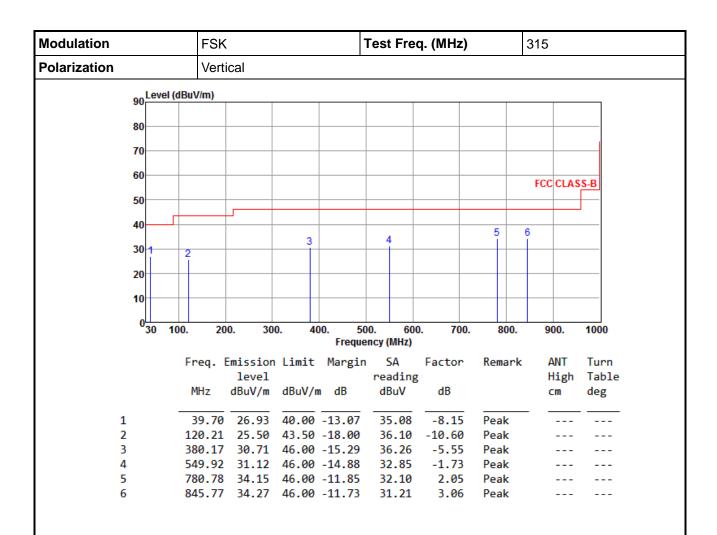

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR931905 Page: 22 of 36



### 3.1.10 Transmitter Radiated Unwanted Emissions (Above 1GHz)

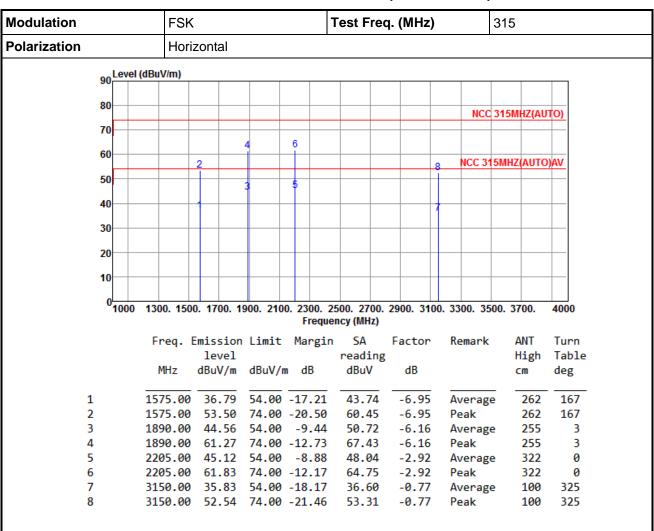


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 23 of 36

<sup>\*</sup>Factor includes antenna factor, cable loss and amplifier gain



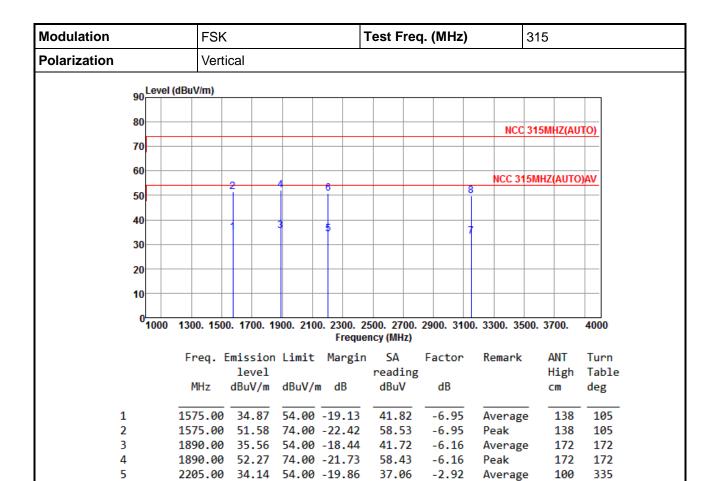

53.77

33.82

50.53

-2.92

-0.77

-0.77

Peak

Peak

Average

100

285

285

335

22

22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR931905 Page: 24 of 36

Report Version: Rev. 01

6

7

8

2205.00

3150.00


33.05

3150.00 49.76 74.00 -24.24

50.85 74.00 -23.15

54.00 -20.95



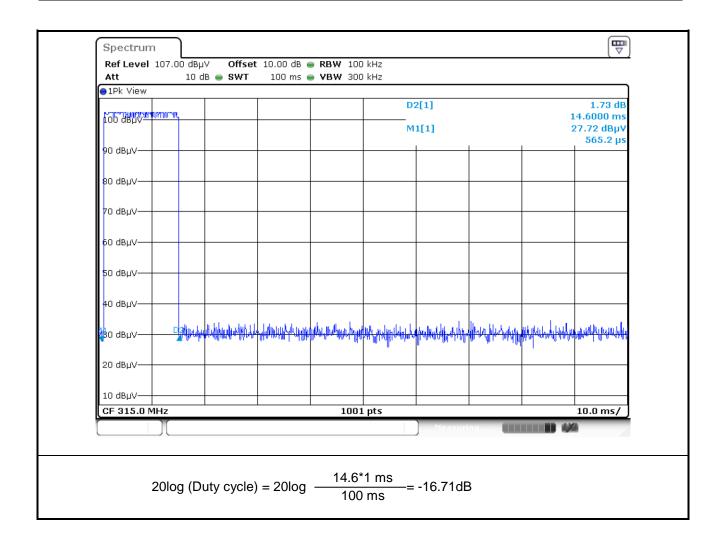

Report No.: FR931905 Page: 25 of 36



#### 3.2 Transmission and Deactivation Time


#### 3.2.1 Limit of Transmission and Deactivation Time

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

#### 3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Set Sweep = fitting time as shown on plots of next pages, Allow the trace to stabilize.
- 4. Set the EUT to operates at operation modes then record the transmission and deactivation time.

#### 3.2.3 Test Setup

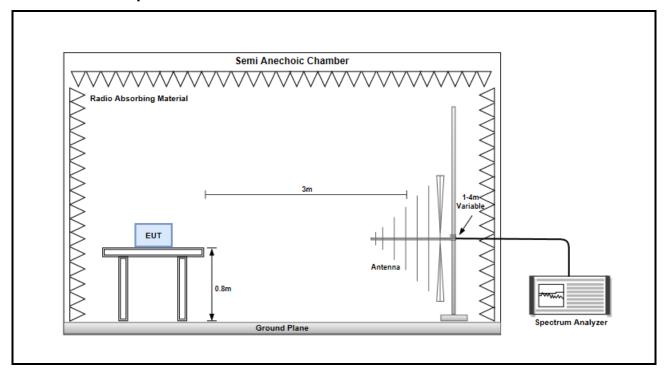

Report No.: FR931905 Page: 26 of 36




## 3.2.4 Test Result of Rotating mode

#### ASK mode

Rotating mode					
Frequency(MHz) Transmission time (S) Limit (s) Pass/Fail					
315.00	0.96174 1.0 PASS				
Frequency(MHz)	Deactivation Time (S)	Limit (s)	Pass/Fail		
315.00	29.3551	28.85	PASS		

Note: The limit is longer than 10 seconds and is not shorter than transmission time multiplied by 30 (0.96174 s \* 30 = 28.85 s)

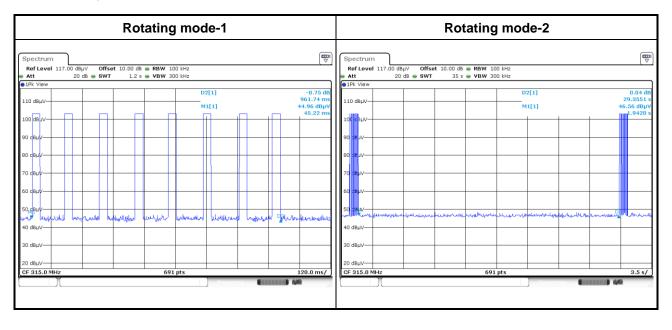


Report No.: FR931905 Page: 27 of 36



#### **FSK** mode

Rotating mode				
Frequency(MHz)	Transmission time (S)	Pass/Fail		
315.00	0.81884	1.0	PASS	
Frequency(MHz)	Deactivation Time (S)	Limit (s)	Pass/Fail	
315.00	29.3696	24.57	PASS	

Note: The limit is longer than 10 seconds and is not shorter than transmission time multiplied by 30 (0.81884 s \* 30 = 24.57 s)

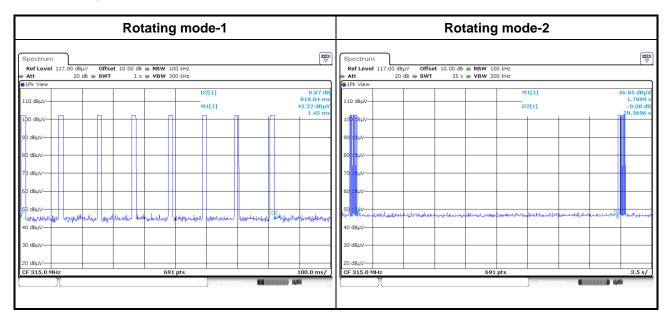

Report No.: FR931905 Page: 28 of 36




## 3.2.5 Test Result of Stationary mode

#### **ASK** mode

Stationary mode				
Frequency(MHz)	Transmission time (S)	Pass/Fail		
315.00	0.307971	1.0	PASS	
Frequency(MHz)	Deactivation Time (S)	Limit (s)	Pass/Fail	
315.00	59.957	10.0	PASS	

Note: The limit is longer than 10 seconds and is not shorter than transmission time multiplied by 30 (0.307971 s  $^*$  30 = 9.24 s)

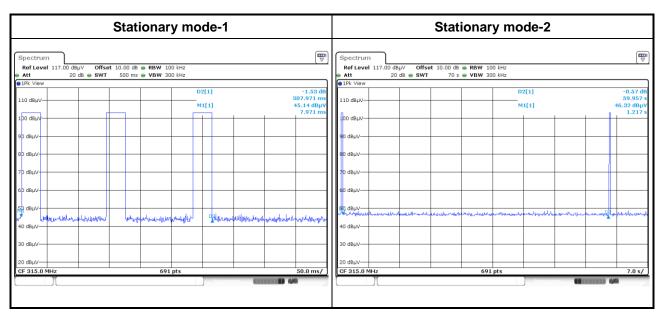


Report No.: FR931905 Page: 29 of 36



#### **FSK** mode

Stationary mode				
Frequency(MHz)	Transmission time (S)	Pass/Fail		
315.00	0.014493	1.0	PASS	
Frequency(MHz)	Deactivation Time (S)	Limit (s)	Pass/Fail	
315.00	60.058	10.0	PASS	

Note: The limit is longer than 10 seconds and is not shorter than transmission time multiplied by 30 (0.014493 s \* 30 = 0.43 s)

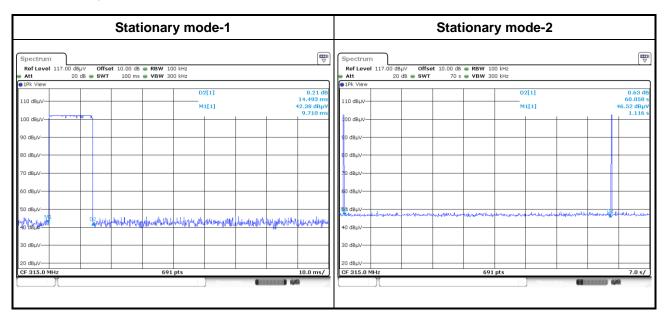


Report No.: FR931905 Page: 30 of 36



## 3.2.6 Test Result of Alert mode

#### **ASK** mode

Transmission Time Alert mode				
Frequency(MHz) Transmission time (S) Limit (s) Pass/Fail				
315.00 0.954		5.0	PASS	

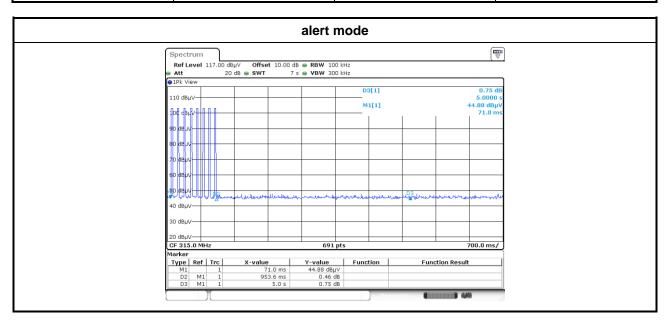


Report No.: FR931905 Page: 31 of 36



#### **FSK** mode

Transmission Time Alert mode				
Frequency(MHz) Transmission time (S) Limit (s) Pass/Fail				
315.00	0.832	5.0	PASS	

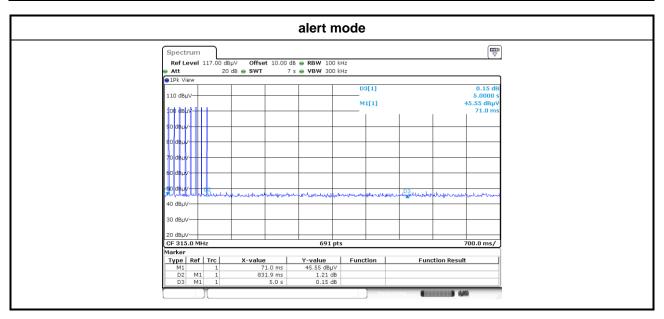

Report No.: FR931905 Page: 32 of 36



## 3.3 20dB and Occupied Bandwidth

#### 3.3.1 Limit of 20 dB Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

#### 3.3.2 Test Procedures


#### For 20dB bandwidth

- 1. Set resolution bandwidth (RBW) = 10 kHz, Video bandwidth = 30 kHz
- Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

#### For Occupied bandwidth

- Set resolution bandwidth (RBW) = 3 kHz, Video bandwidth = 10 kHz
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the occupied measurement function of specturm analyzer to measure 99% occupied bandwidth

#### 3.3.3 Test Setup

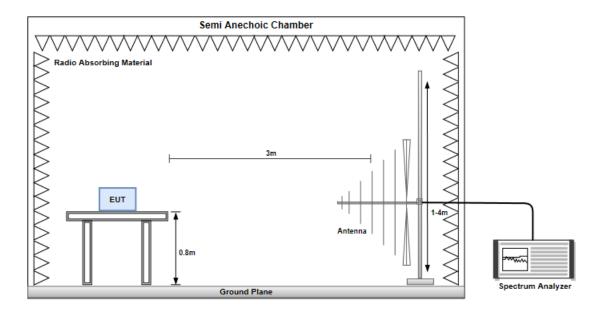


Report No.: FR931905 Page: 33 of 36



## 3.3.4 20dB and Occupied Bandwidth

#### **ASK** mode

20dB and Occupied Bandwidth				
Frequency(MHz)  20dB Bandwidth (MHz)  20dB BW Limit 99% BW (MHz)  Pass/Fail				
315.00	0.061	0.7875	0.082	PASS

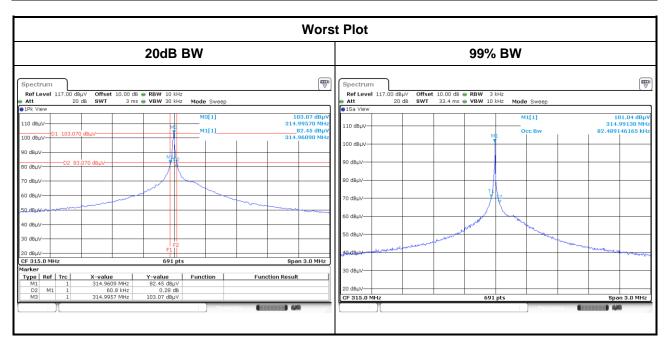


Report No.: FR931905 Page: 34 of 36



#### **FSK** mode

20dB and Occupied Bandwidth				
Frequency(MHz)  20dB Bandwidth (MHz)  20dB BW Limit (MHz)  99% BW (MHz)  Pass/Fail				
315.00	0.139	0.7875	0.113	PASS

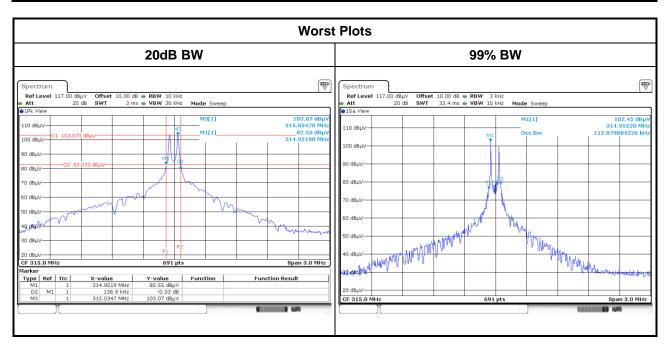

Report No.: FR931905 Page: 35 of 36



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR931905 Page: 36 of 36