



FCC / IC Test Report

FOR:

PetPomm, Inc dba Nuzzle

Model Name:

NZL-BS2016

Product Description:

Battery Charger and Beacon

FCC ID: 2AJ57-070114BST

IC ID: 22069-070114BST

Applied Rules and Standards:

47 CFR Part 15.247 (DTS)

RSS-247 Issue 1 (DTSs)

RSS-Gen Issue 4

REPORT #: EMC_PETPO-001-16001_15.247_DTS_Base

DATE: 2017-03-07



A2LA Accredited

**IC recognized #
3462B-1**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecom.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT.....	3
2	ADMINISTRATIVE DATA	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER.....	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS	6
3.3	ACCESSORY EQUIPMENT (AE) DETAILS.....	6
3.4	TEST SAMPLE CONFIGURATION	6
4	SUBJECT OF INVESTIGATION	7
5	MEASUREMENT RESULTS SUMMARY	7
6	MEASUREMENTS.....	8
6.1	MEASUREMENT UNCERTAINTY	8
6.2	ENVIRONMENTAL CONDITIONS DURING TESTING:	8
6.3	DATES OF TESTING:	8
7	MEASUREMENT PROCEDURES	9
7.1	RADIATED MEASUREMENT.....	9
7.2	POWER LINE CONDUCTED MEASUREMENT PROCEDURE	12
7.3	RF CONDUCTED MEASUREMENT PROCEDURE	12
7.4	CONDUCTED SETUP BLOCK DIAGRAM	12
8	TEST RESULT DATA	13
8.1	EMISSION BANDWIDTH.....	13
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	20
8.3	POWER SPECTRAL DENSITY	24
8.4	BAND EDGE AND RESTRICTED BAND COMPLIANCE.....	28
8.5	RADIATED TRANSMITTER SPURIOUS EMISSIONS	33
8.6	AC POWER LINE CONDUCTED EMISSIONS	47
9	TEST SETUP PHOTOS.....	49
10	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	49
11	REVISION HISTORY	50

1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant IC standard RSS-247 Issue 1, and RSS-Gen Issue 4.

Company	Description	Model #
PetPomm, Inc dba Nuzzle	Battery Charger and Beacon	NZL-BS2016

Responsible for Testing Laboratory:

Peter Nevermann

2017-03-10 Compliance (Director Radio Communications and EMC)

Date	Section	Name	Signature
------	---------	------	-----------

Responsible for the Report:

Kris Lazarov

2017-03-10 Compliance (EMC Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Section 3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Director RadioCom. and EMC:	Peter Nevermann
Responsible Project Leader:	Kris Lazarov

2.2 Identification of the Client

Applicant's Name:	PetPomm, Inc dba Nuzzle
Street Address:	408 Tamiami Trail, Unit 122
City/Zip Code	Punta Gorda, FL 33950
Country	USA
Contact Person:	Alex Andreae
Phone No.	(941) 268-4955
e-mail:	alex@hellonuzzle.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as Applicant
Manufacturers Address:	-----
City/Zip Code	-----
Country	-----

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Model No:	NZL-BS2016
HW Version :	1.0
SW Version :	0.1.0
FCC-ID :	2AJ57-070114BST
IC-ID:	22069-070114BST
HVIN:	NZL-BS2016
PMN:	
Product Description:	Battery charger and beacon
Frequency Range / number of channels:	Nominal band: 2402 – 2480; Center to center: 2402(ch 0) – 2480(ch 39), 40 channels
Type(s) of Modulation:	Bluetooth version 4.0, Low Energy, GFSK modulation.
Modes of Operation:	Bluetooth LE
Antenna Information as declared:	Chip antenna max gain = 1.7dBi
Max. Output Powers:	Peak Conducted Power = 12.61dBm
Power Supply/ Rated Operating Voltage Range:	5VDC from AC/DC adapter
Operating Temperature Range	-20 °C to 55 °C
Other Radios included in the device:	N/A
Sample Revision	<input type="checkbox"/> Prototype Unit <input checked="" type="checkbox"/> Production Unit <input type="checkbox"/> Pre-Production

3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	2CYD2GTE	1.0	0.1.0	Radiated Sample
2	2B30AF42	1.0	0.1.0	Conducted Sample

3.3 Accessory Equipment (AE) details

AE #	Type	Model	Manufacturer	Serial Number
1	AC/DC Power Adapter	A8-501000	Dongguan Aohai Power Technology Co	N/A
2	Lithium Polymer, 300mAh Battery	YE502030C	Yok Energy	N/A

3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1 + AE#1 +AE#2	
2	EUT#2 + AE#1 +AE#2	

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 Issue 1 of Industry Canada.

This test report is to support a request for new equipment authorization under the FCC ID: 2AJ57-070114BST and IC ID: 22069-070114BST

Testing procedures are based on 558074 D01 DTS Meas Guidance v03r05 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER §15.247; April 8, 2016” by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(a)(1) RSS-247 5.2(1)	Emission Bandwidth	Nominal	BTLE	■	□	□	□	Complies
§15.247(e) RSS-247 5.2(2)	Power Spectral Density	Nominal	BTLE	■	□	□	□	Complies
§15.247(b)(1) RSS-247 5.4(4)	Maximum Conducted Output Power and EIRP	Nominal	BTLE	■	□	□	□	Complies
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	BTLE	■	□	□	□	Complies
§15.247; 15.209; 15.205 RSS-Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	BTLE	■	□	□	□	Complies
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions- Radiated	Nominal	BTLE	■	□	□	□	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	BTLE	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

6 Measurements

6.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

Conducted measurement

150 kHz to 30 MHz	±0.7 dB (LISN)
-------------------	----------------

RF conducted measurement	±0.5 dB
--------------------------	---------

6.2 Environmental Conditions during Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%

6.3 Dates of Testing:

1/12/2017 – 2/20/2017


7 Measurement Procedures

7.1 Radiated Measurement


The radiated measurement is performed according to: ANSI C63.10 (2013)

- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.


Radiated Emissions Test Setup below 30MHz Measurements

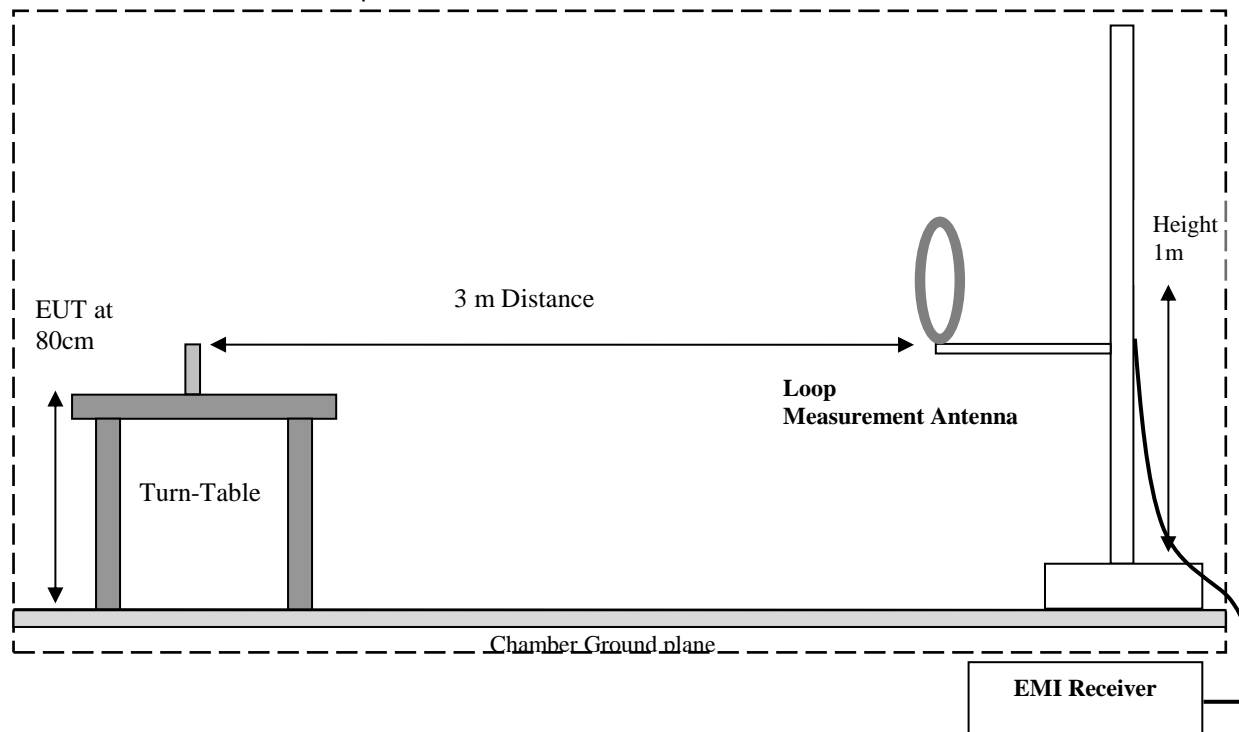


Radiated Emissions Test Setup 30MHz-1GHz Measurements

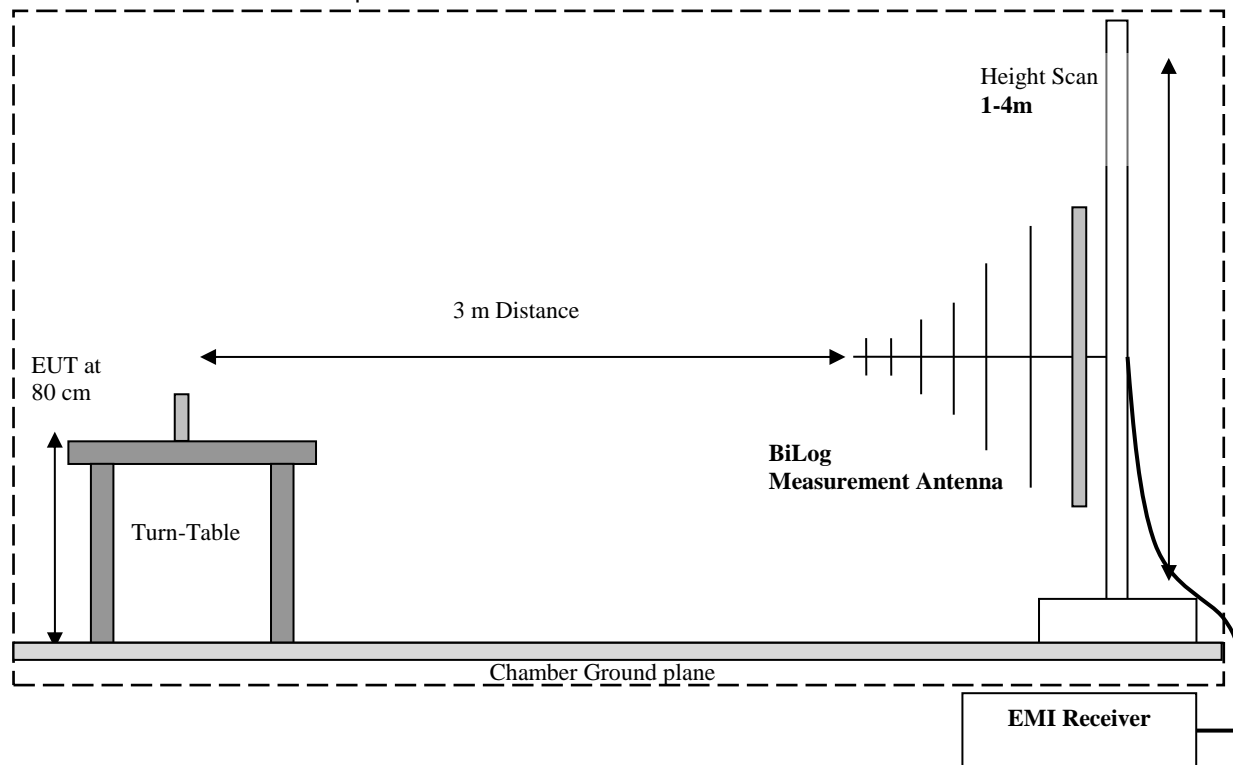

Radiated Emissions Test Setup above 1GHz Measurements

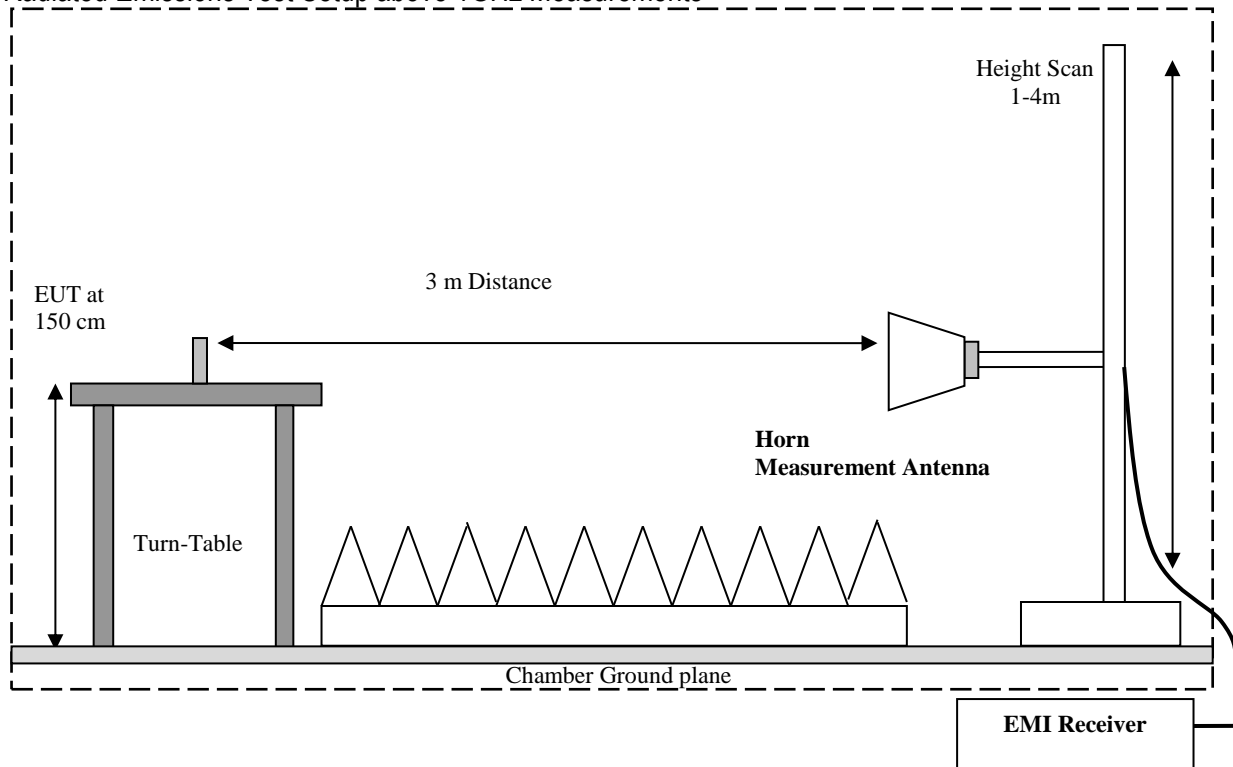

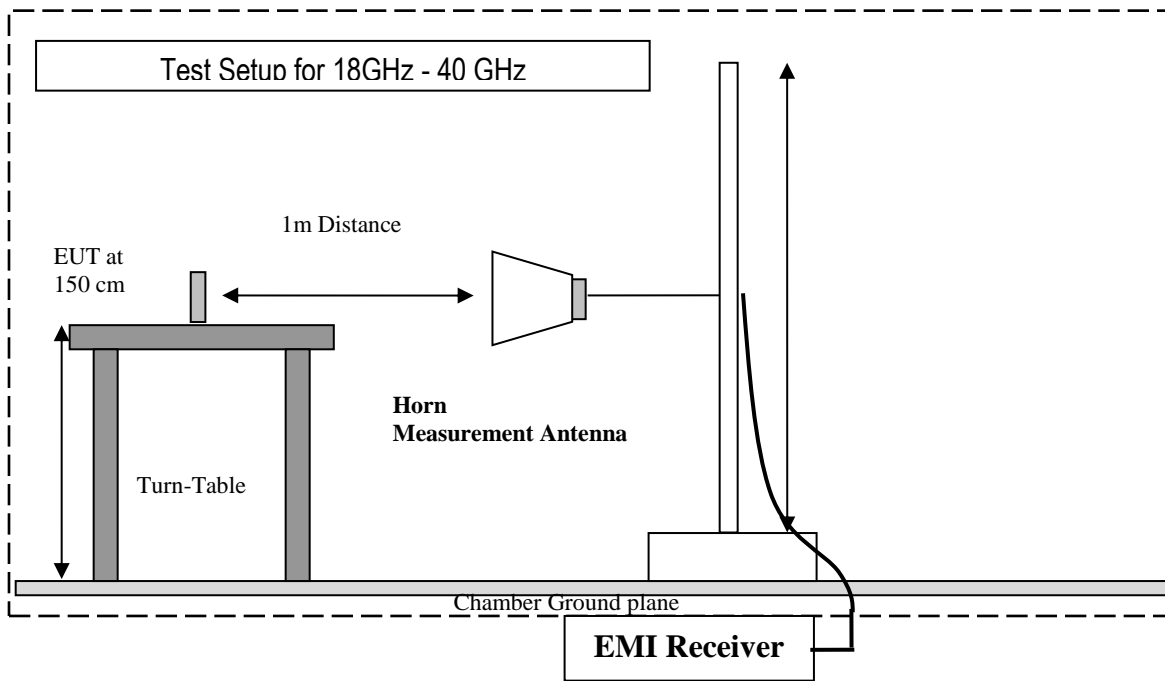

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0


7.2 Power Line Conducted Measurement Procedure

AC Power Line conducted emissions measurements performed according to: ANSI C63.10 (2013)

7.3 RF Conducted Measurement Procedure

Reference: 558074 D01 DTS Meas Guidance v03r05 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER §15.247; April 8, 2016” by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

7.4 Conducted Setup Block diagram

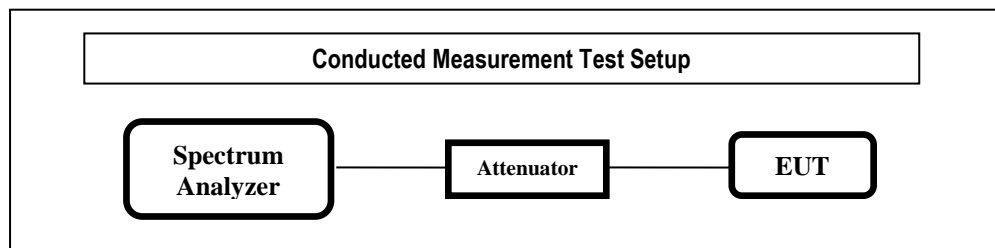

- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

8 Test Result Data

8.1 Emission Bandwidth

8.1.1 Measurement according to FCC KDB 558074 D01 DTS Meas Guidance v03r05

Spectrum Analyzer settings:

- Set RBW = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.1.2 Limits:

FCC §15.247(a)(1) and RSS-247 5.2(1)


- Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


8.1.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Measurement Path Loss (dB)	Antenna Gain (dBi)
24° C	2	BT LE	5V DC	16	1.7


8.1.4 Measurement result:


Plot #	Frequency (MHz)	6dB Emissions Bandwidth (MHz)	99% Emissions Bandwidth (MHz)	Limit (MHz)	Result
1 - 2	2402	0.550	0.894	> 0.5	Pass
3 - 4	2440	0.557	0.910	> 0.5	Pass
5 - 6	2480	0.586	0.894	> 0.5	Pass

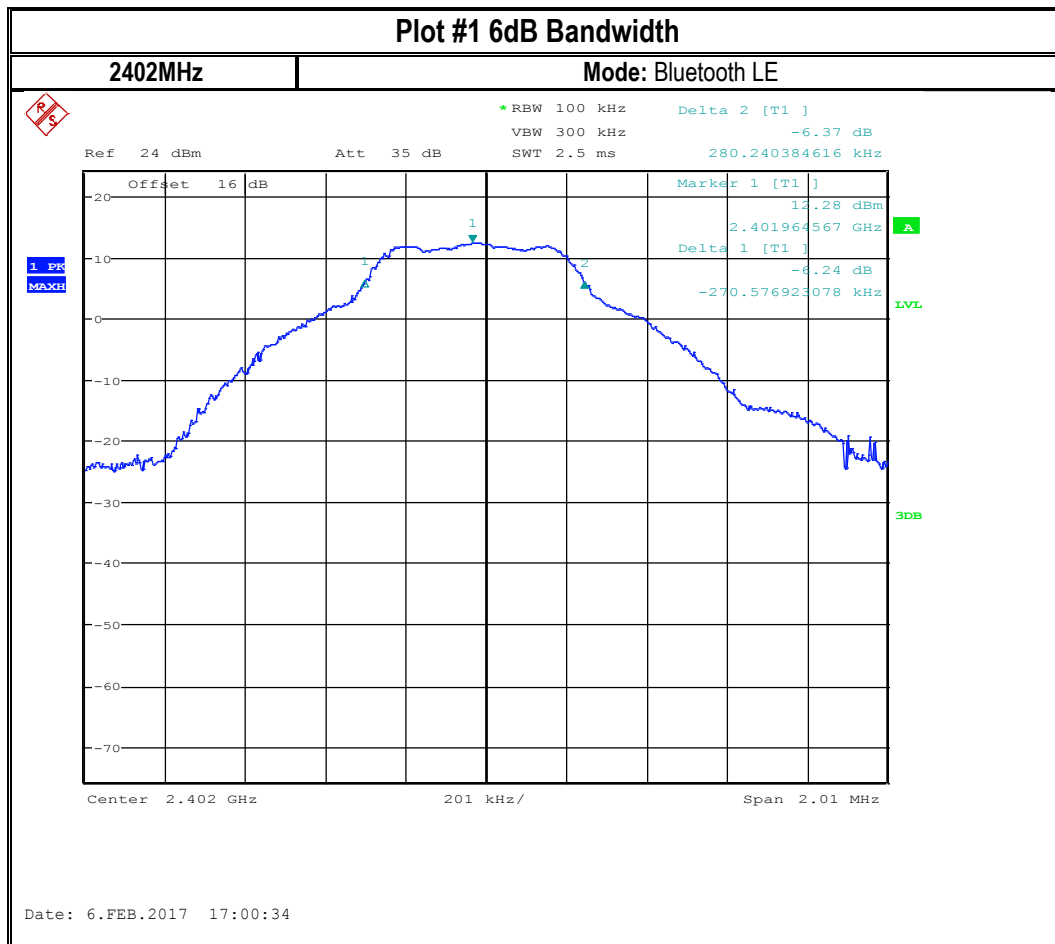
8.1.5 Measurement Plots:

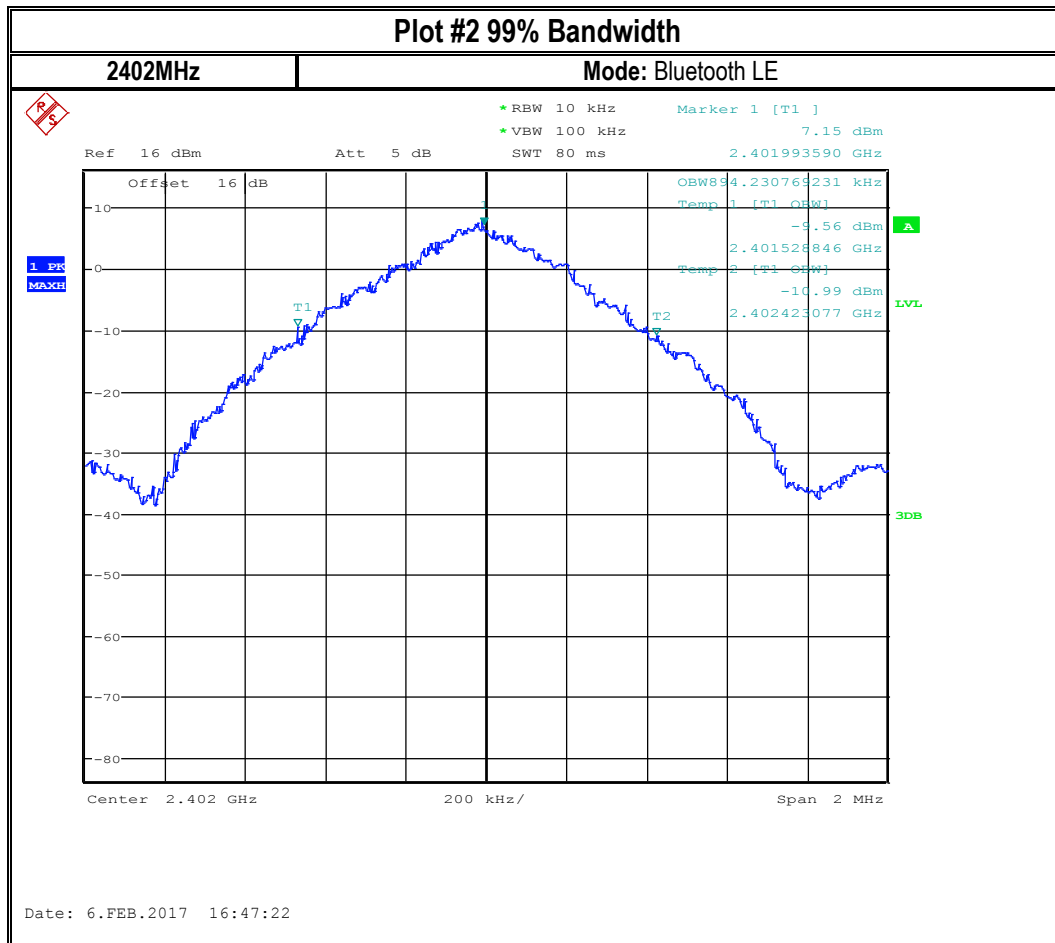

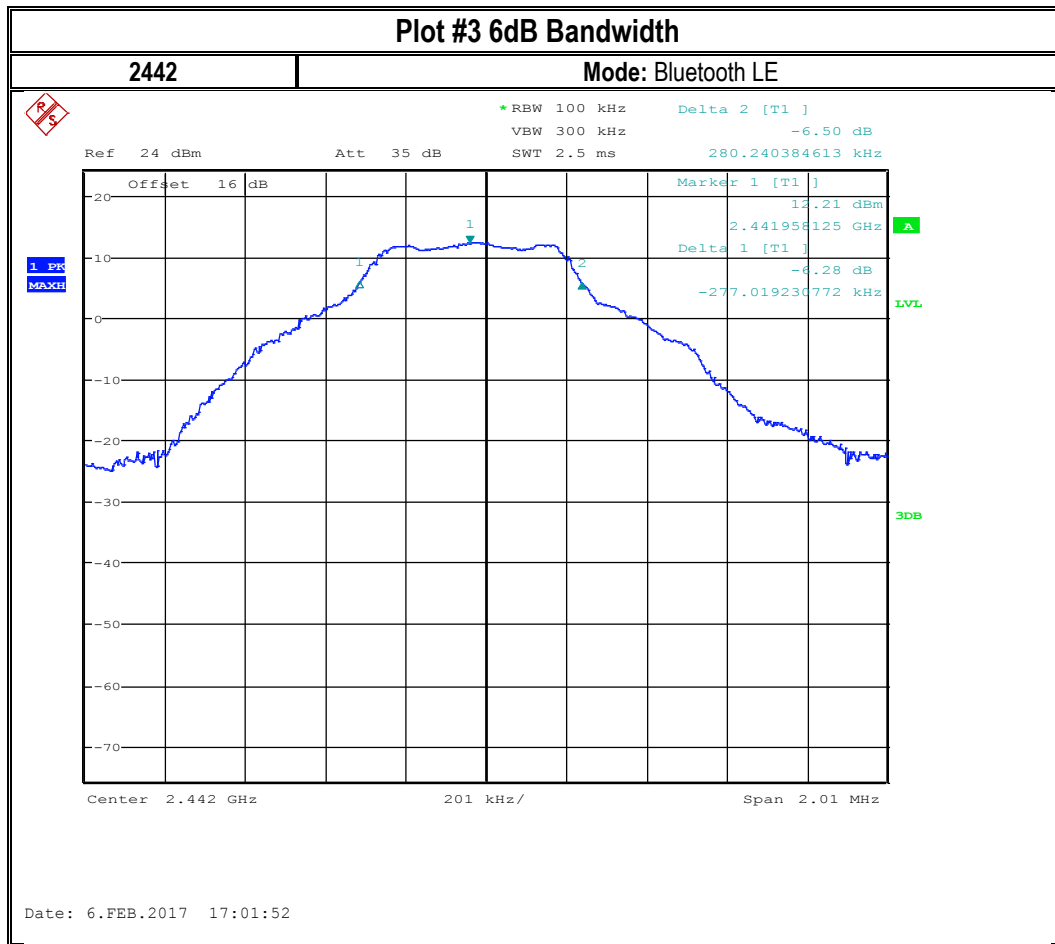

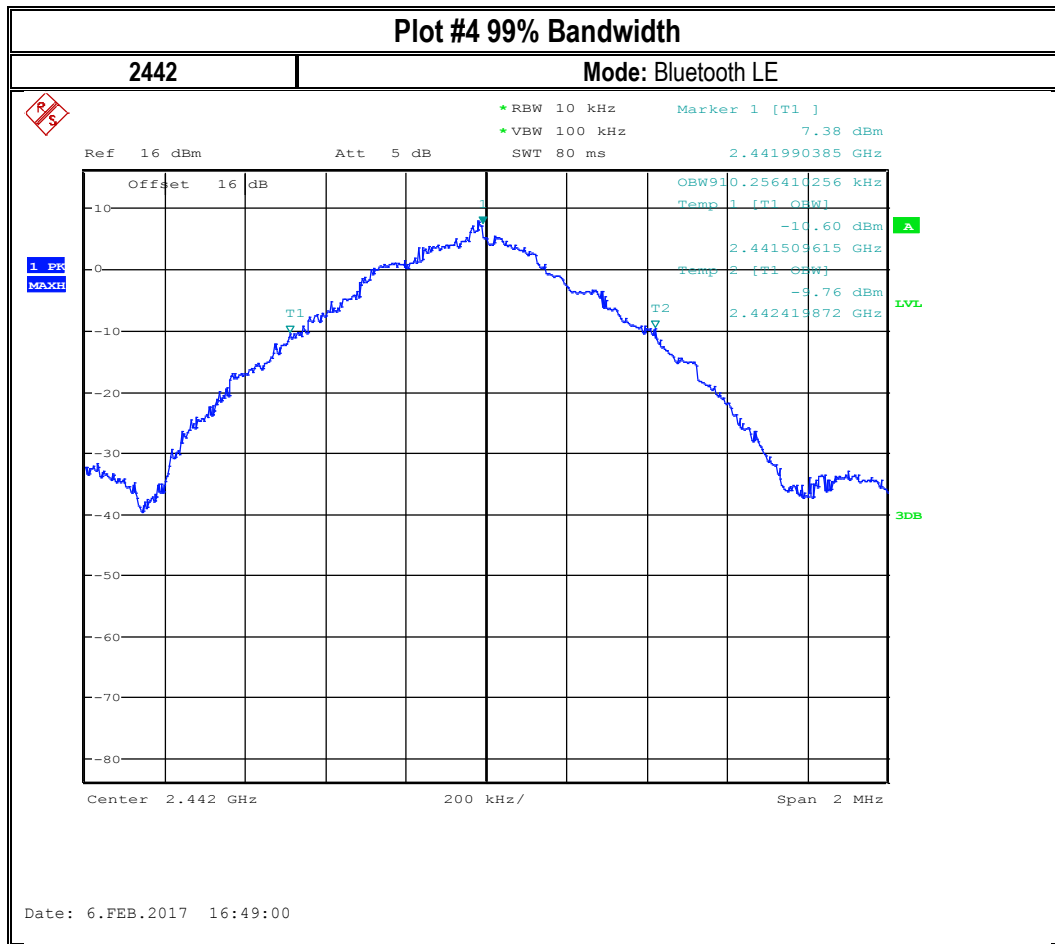

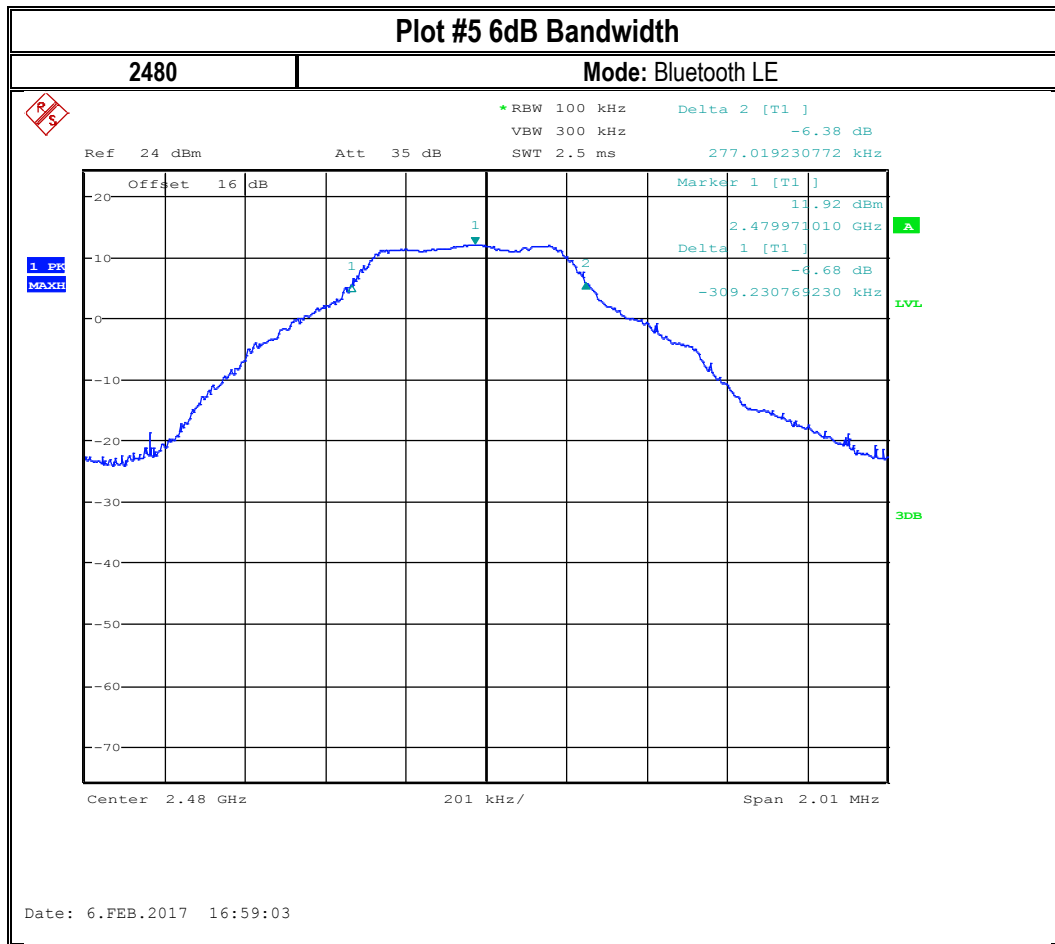

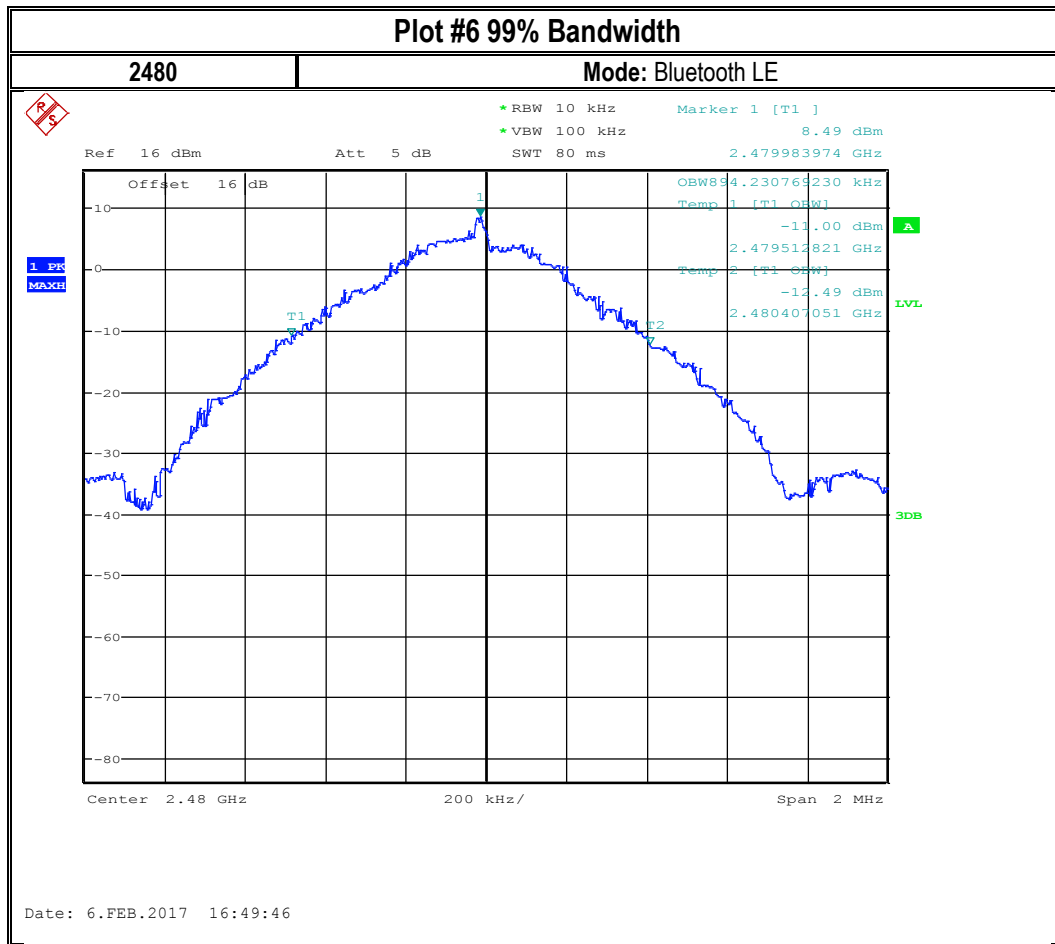

8.2 Maximum Peak Conducted Output Power

8.2.1 Measurement according to FCC KDB 558074 D01 DTS Meas Guidance v03r05

Spectrum Analyzer settings:

- Span = approximately 5 times the 20 dB bandwidth
- RBW > the 20 dB bandwidth of the emission being measured
- VBW \geq RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Use the marker-peak function to set the marker to the peak of the emission.

8.2.2 Limits:

Maximum Peak Output Power:


- FCC §15.247 (b): 1W
- IC RSS-247: 1W


8.2.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Measurement Path Loss (dB)	Antenna Gain (dBi)
22° C	2	BT LE	5V DC	16	1.7

8.2.4 Measurement result:

Plot #	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Result
1	2402	12.58	14.28	20.99(Pk) / 26.99(EIRP)	Pass
2	2440	12.61	14.31	20.99(Pk) / 26.99(EIRP)	Pass
3	2480	12.27	13.97	20.99(Pk) / 26.99(EIRP)	Pass

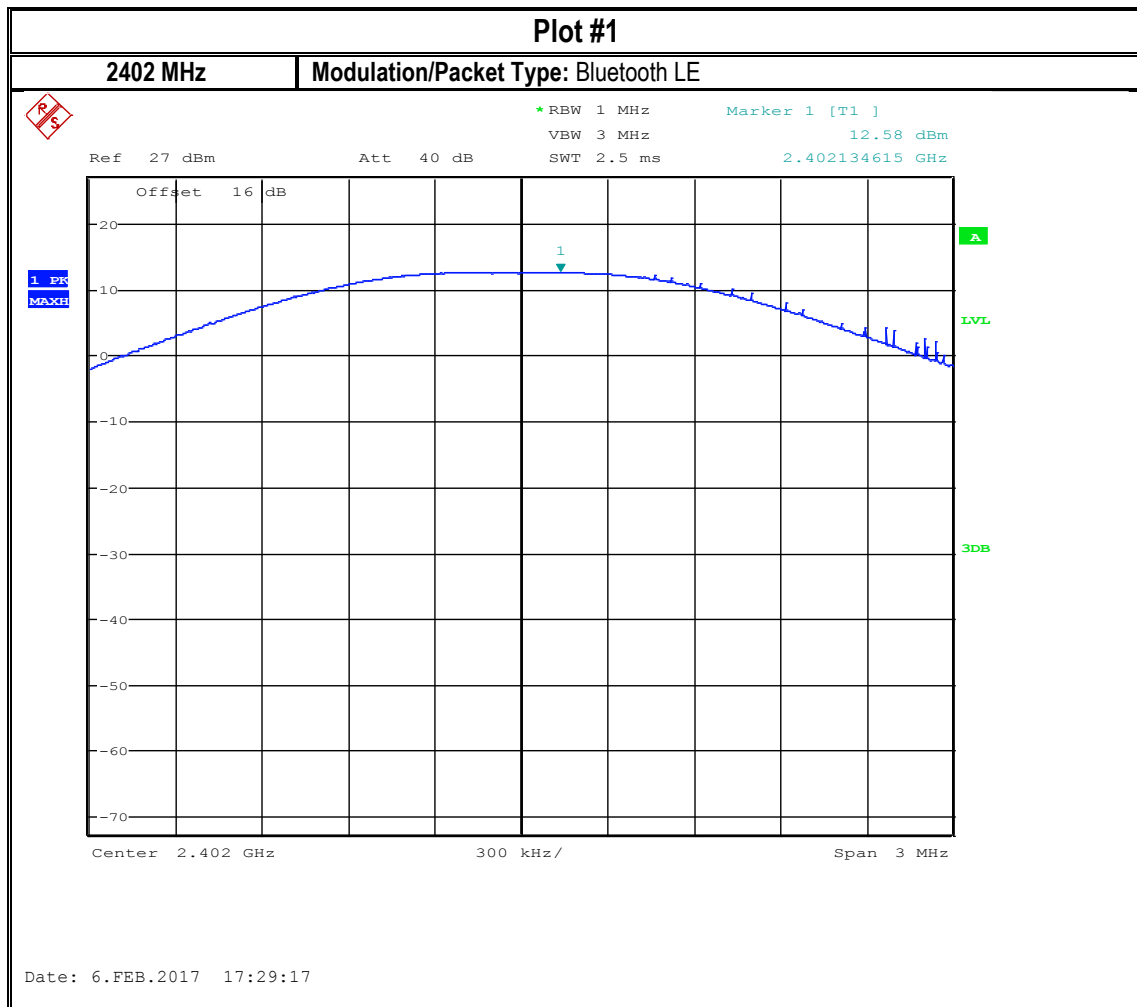8.2.5 Measurement Plots:

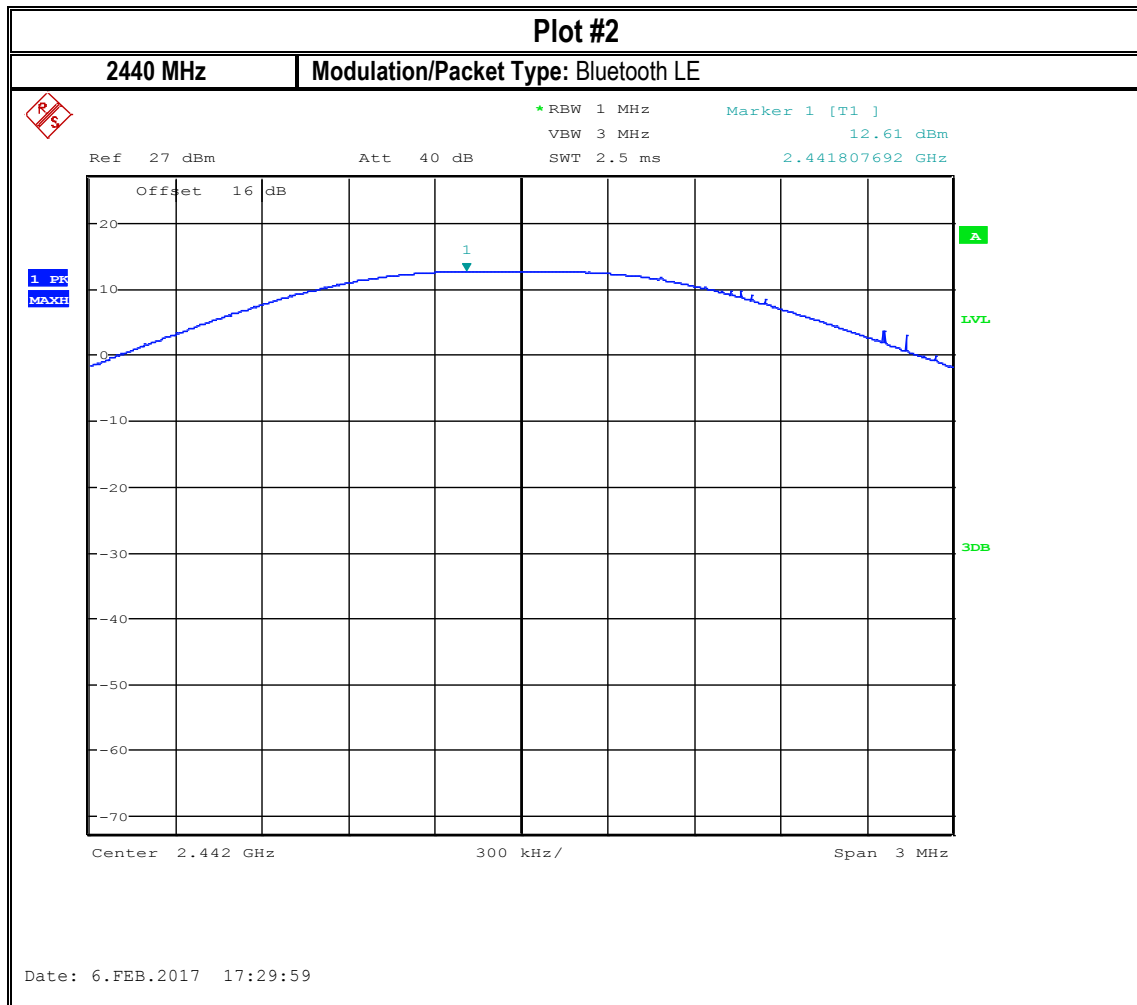

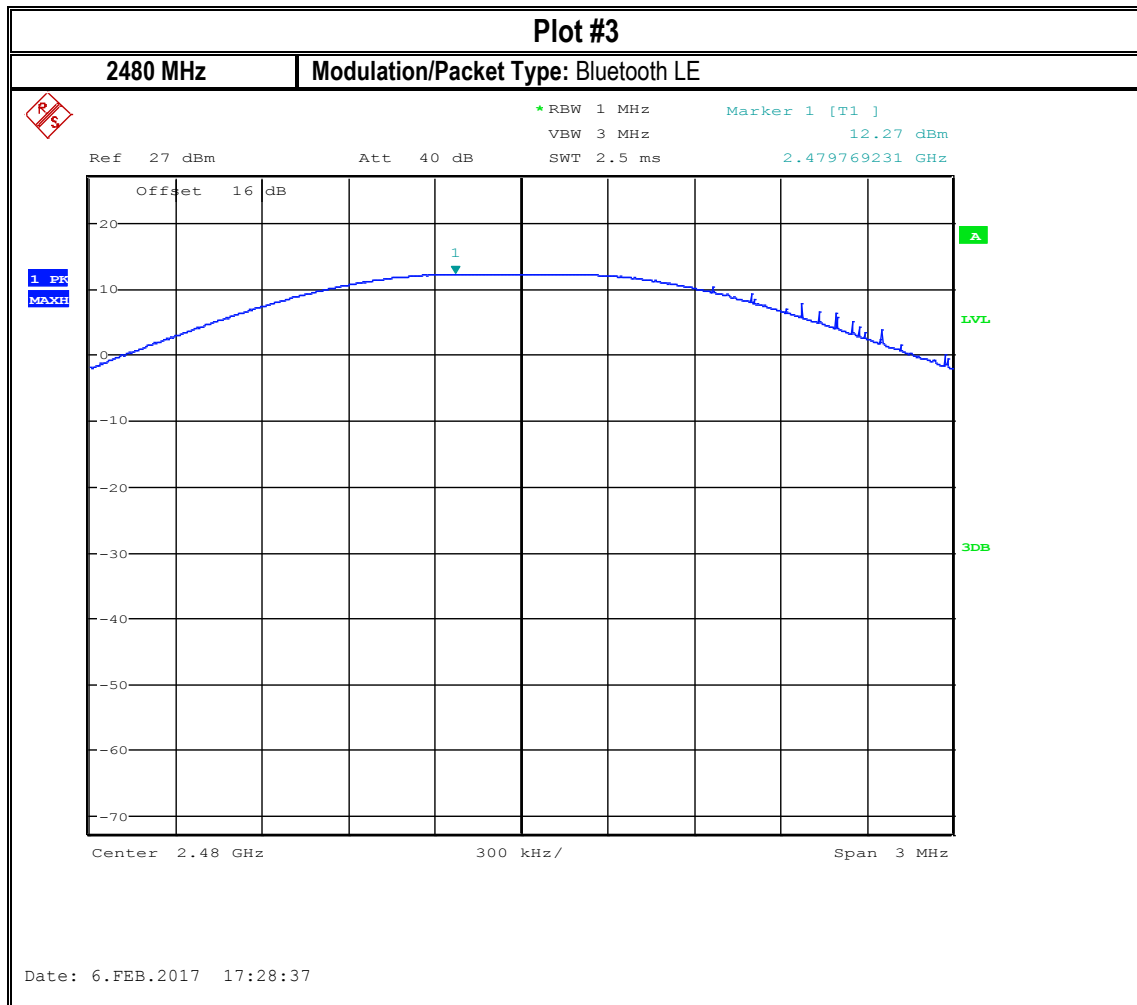

8.3 Power Spectral Density

8.3.1 Measurement according to FCC KDB 558074 D01 DTS Meas Guidance v03r05

Spectrum Analyzer settings for Peak PSD method:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.3.2 Limits:

FCC§15.247(e) & RSS-247 5.2(2)

- For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Measurement Path Loss (dB)	Antenna Gain (dBi)
22° C	2	BT LE	3.3V DC	16	1.7


8.3.4 Measurement result:


Plot #	Frequency (MHz)	Maximum Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
1	2402	3.51	8	Pass
2	2440	3.67	8	Pass
3	2480	2.92	8	Pass

Note: PSD results were adjusted to include antenna gain.

8.3.5 Measurement Plots:

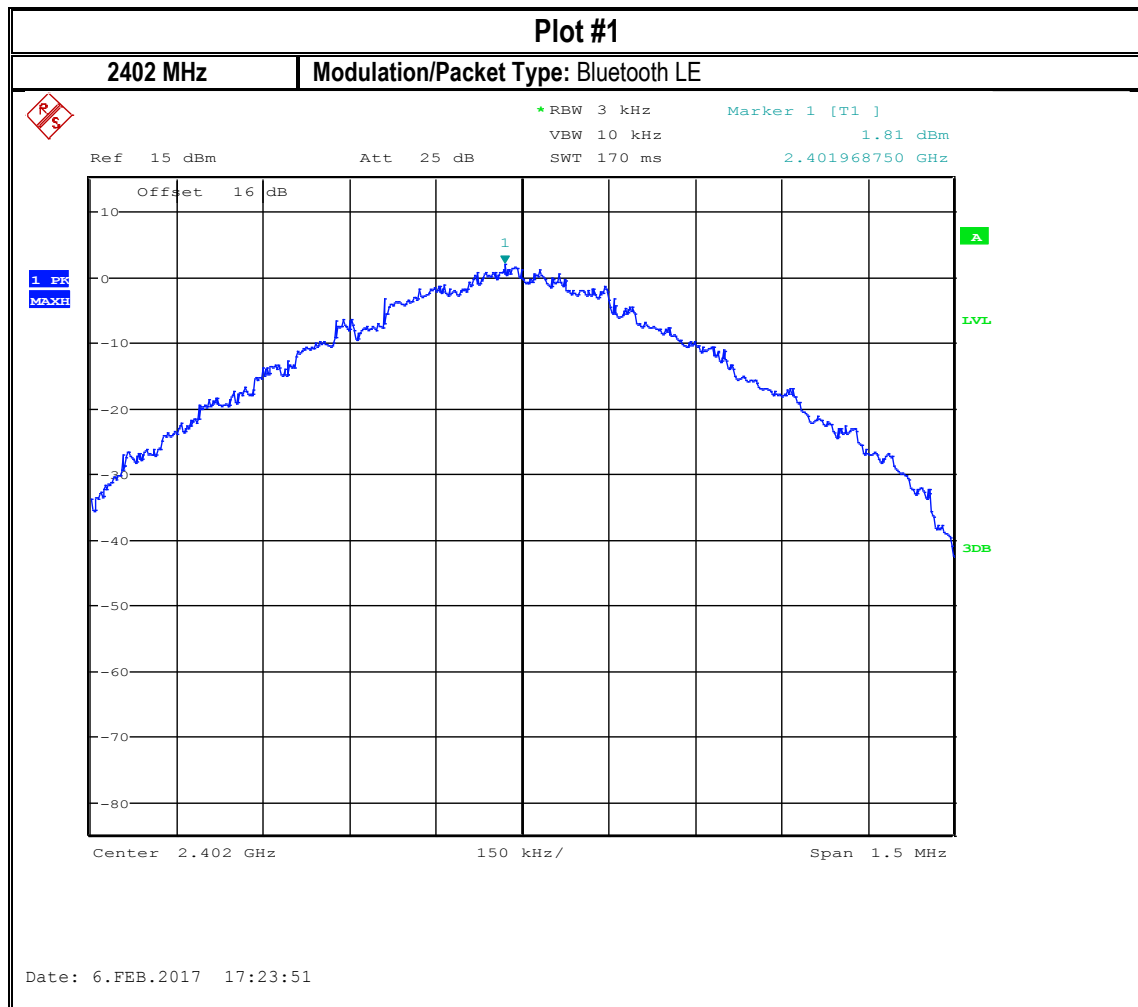

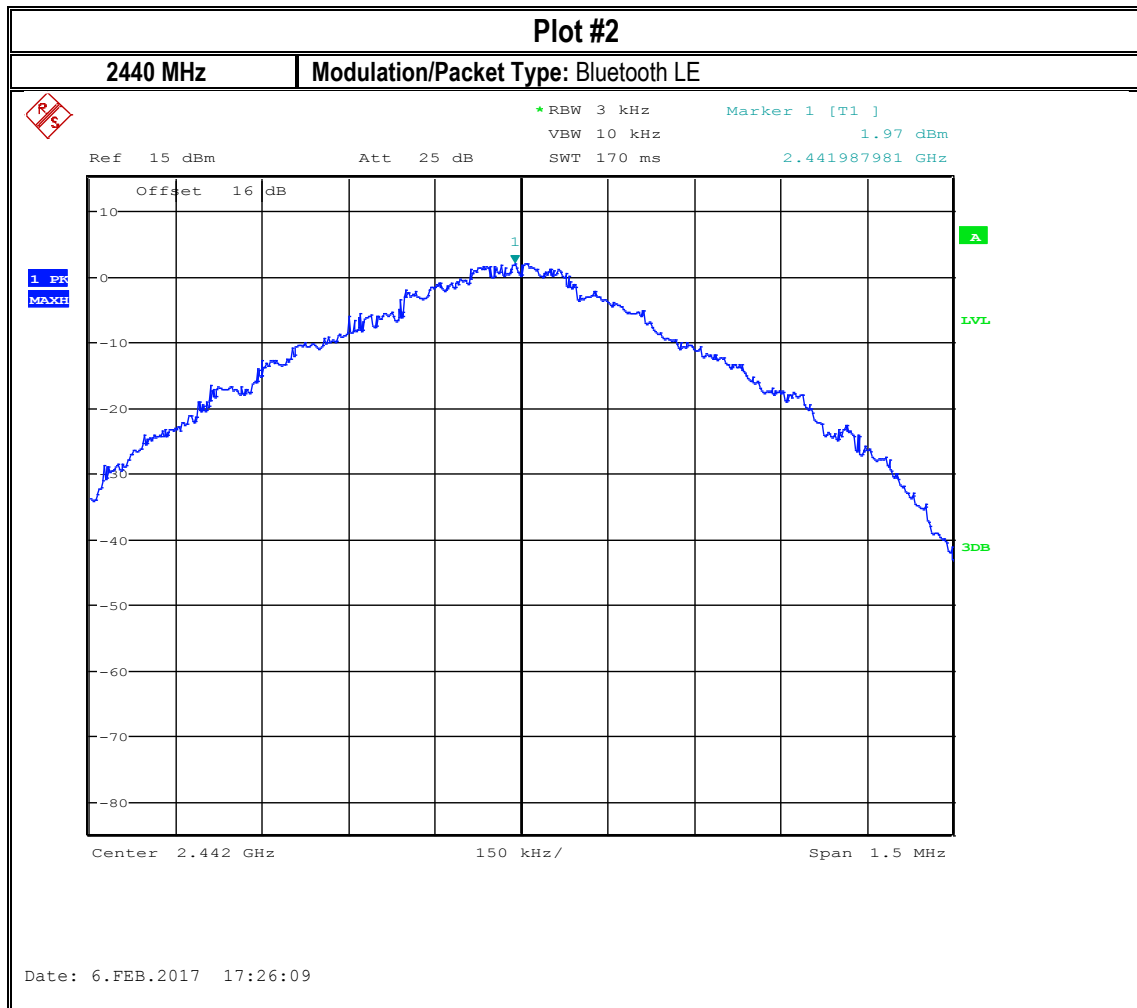

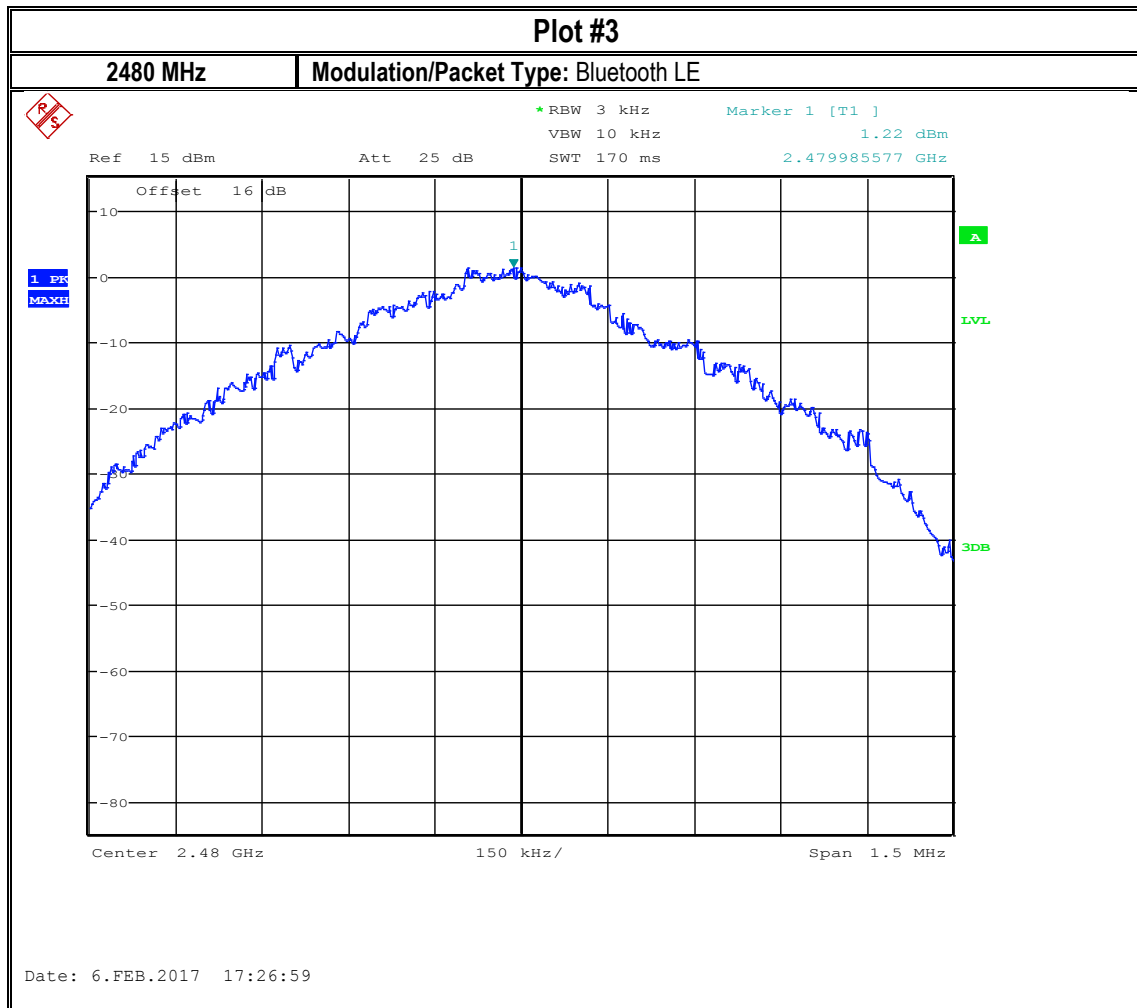

8.4 Band Edge and Restricted Band Compliance

8.4.1 Measurement according to FCC KDB 558074 D01 DTS Meas Guidance v03r05

Spectrum Analyzer settings for non-restricted band edge:

- Span: wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- RBW \geq 1% of the span
- VBW \geq RBW
- Sweep Time: Auto
- Detector = peak
- Trace = max hold
- Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge.

8.4.2 Limits non restricted band:

FCC§15.247 (d)

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 5/5

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.

Spectrum Analyzer settings for restricted band:

- Peak measurements are made using a peak detector and RBW=1 MHz, VBW \geq RBW

8.4.3 Limits restricted band §15.247/15.209/15.205 and RSS-Gen 8.9/8.10

- *PEAK LIMIT= 74dBμV/m @3m =-21.23dBm
- *AVG. LIMIT= 54dBμV/m @3m =-41.23dBm
- Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10
- Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			


8.4.4 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Measurement Path Loss (dB)	Antenna Gain (dBi)
22° C	2	BT LE	3.3V DC	16	1.7


8.4.5 Measurement result:

Plot #	Band Edge	Band Edge Delta (dBc)	Limit (dBc)	Result
1	Lower non restricted	52.84	> 20	Pass

Plot #	EUT operating mode	Band Edge	Measured Value (dBm)	Corrected by Ant. Gain (dBm)	Limit (dBm)	Result
2	BT LE	Upper restricted peak	-27.83	-26.13	PEAK = -21.23	Pass
3	BT LE	Upper restricted average	-44.35	-42.65	AVG = -41.23	Pass

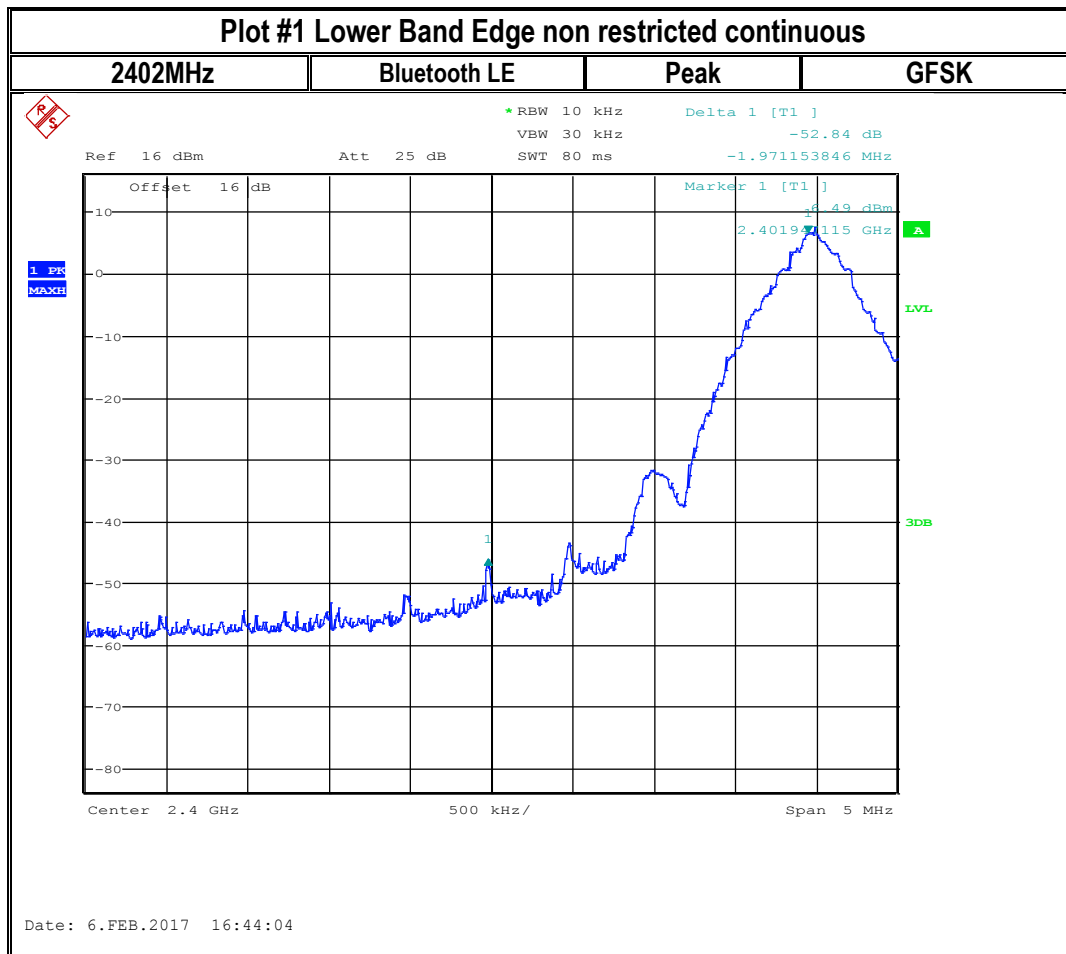8.4.6 Measurement Plots:

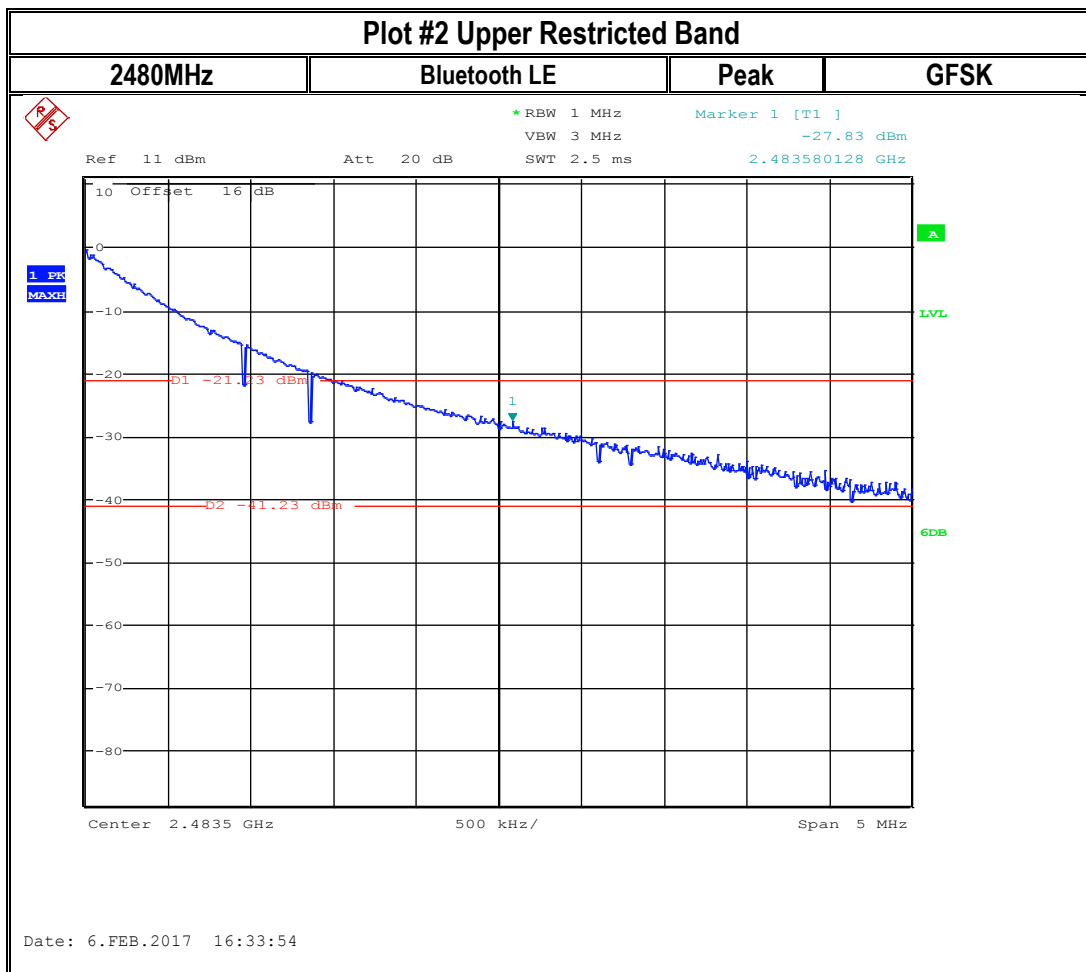

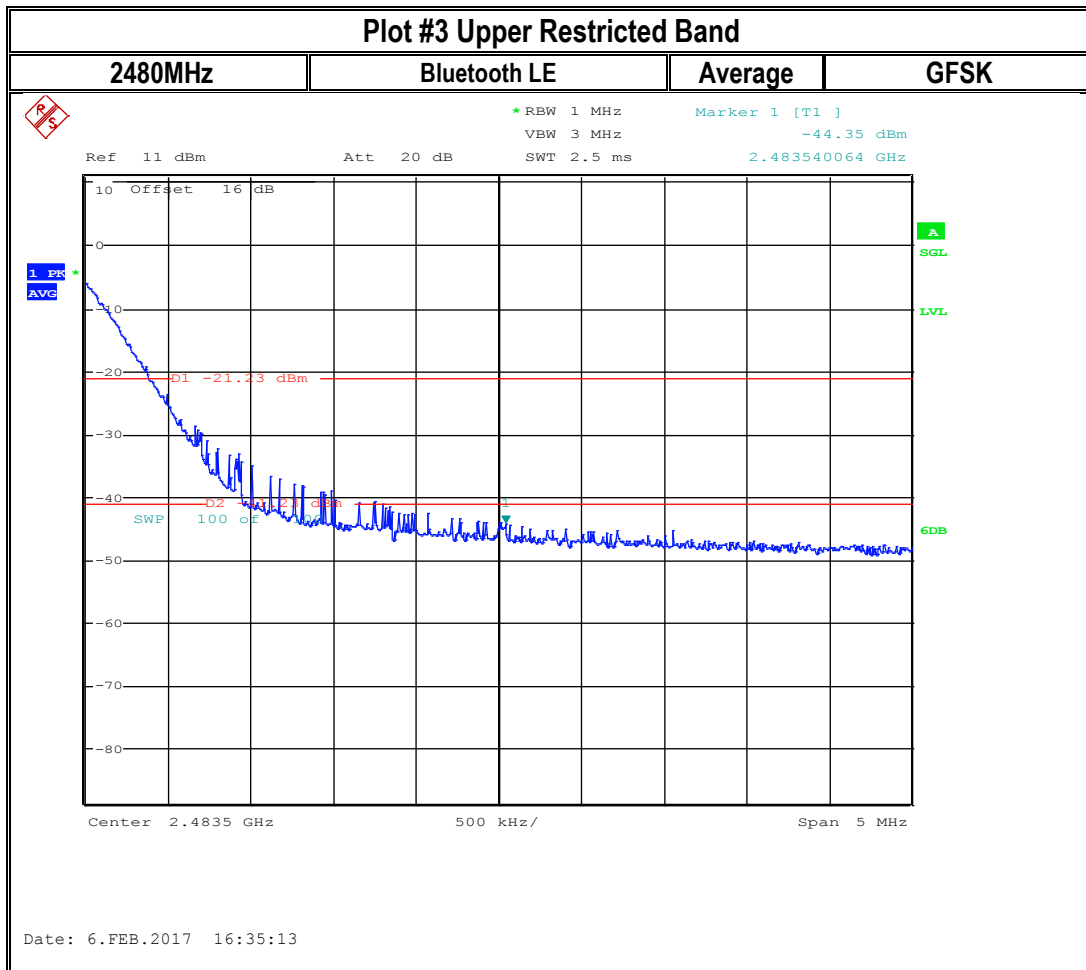

8.5 Radiated Transmitter Spurious Emissions

8.5.1 Measurement according to ANSI C63.10 (2013)

Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak

- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW=120 KHz (<1GHz)

- Frequency > 1 GHz
- Detector = Peak / Average
- RBW= 1MHz

- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow: Conversion factor (CF) = $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$

8.5.2 Limits:

FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)	Field strength @ 3m (dBμV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 dBμV/m
88–216	150	3	43.5 dBμV/m
216–960	200	3	46 dBμV/m
Above 960	500	3	54 dBμV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

*PEAK LIMIT= 74dBμV/m

*AVG. LIMIT= 54dBμV/m

8.5.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain (dBi)
21.6° C	1	BT LE	3.3V DC	5.64

8.5.4 Measurement result:

Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.5.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.5.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.5.2	Pass

The average field strength in the test results from 3 GHz to 18 GHz was calculated by applying -13 dB duty cycle correction, corresponding to the typical maximum duty cycle of 5% for Bluetooth LE technology.

The Duty cycle correction factor was calculated using the following formula:

$$10 \log .05 = (-13 \text{ dB})$$


8.5.5 Measurement Plots:

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT. Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Plot #1 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE

Channel: Low

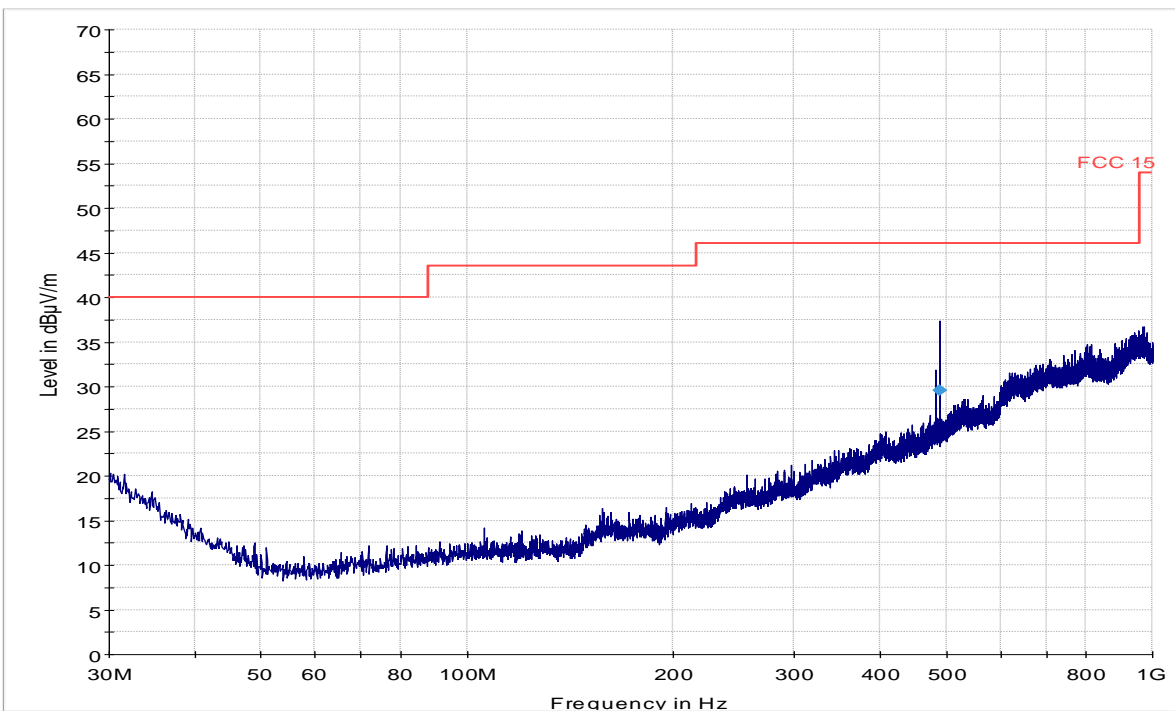

— FCC 15

— Preview Result 1-PK+

◆ Final Result 1-QPK

Plot # 2 Radiated Emissions: 1-3 GHz



Modulation: BT LE

Channel: Low

Final Measurement Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
1069.000000	38.7	100.0	1000.000	150.0	H	-18.0	0.3	Pass
1006.000000	36.8	100.0	1000.000	200.0	H	161.0	-0.4	Pass
1043.500000	39.0	100.0	1000.000	390.0	H	335.0	1.0	Pass
1164.000000	37.0	100.0	1000.000	290.0	H	301.0	-0.9	Pass

Frequency (MHz)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
1289.000000	24.4	100.0	1000.000	265.0	H	222.0	-1.3	Pass
1732.000000	28.2	100.0	1000.000	177.0	V	30.0	2.1	Pass

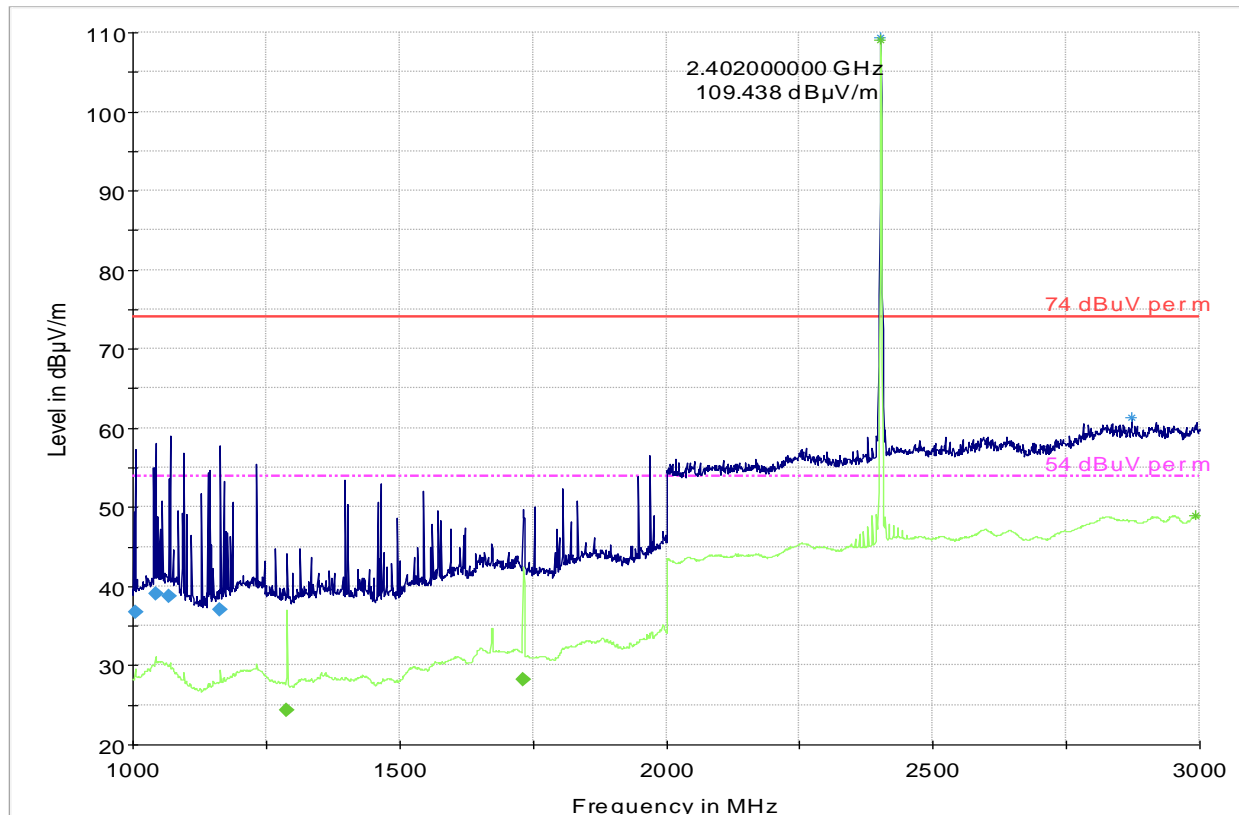

Plot # 3 Radiated Emissions: 3-18 GHz


Modulation: BT LE

Channel: Low

Final Measurement Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comments
7206.562500	57.41	73.99	16.58	131.0	H	49.0	-20.6	Pass
9607.500000	56.19	73.99	17.80	236.0	V	13.0	-14.5	Pass
12008.893125	60.59	73.99	13.39	103.0	V	352.0	-10.8	Pass
16815.000000	55.94	73.98	18.04	193.0	V	342.0	-1.2	Pass


Frequency (MHz)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. for 5% DC (dB)	Comments
7206.562500	44.41	54	9.59	131.0	H	49.0	-13	Pass
9607.500000	43.19	54	10.81	236.0	V	13.0	-13	Pass
12008.893125	47.59	54	6.41	103.0	V	352.0	-13	Pass
16815.000000	42.94	54	11.06	193.0	V	342.0	-13	Pass

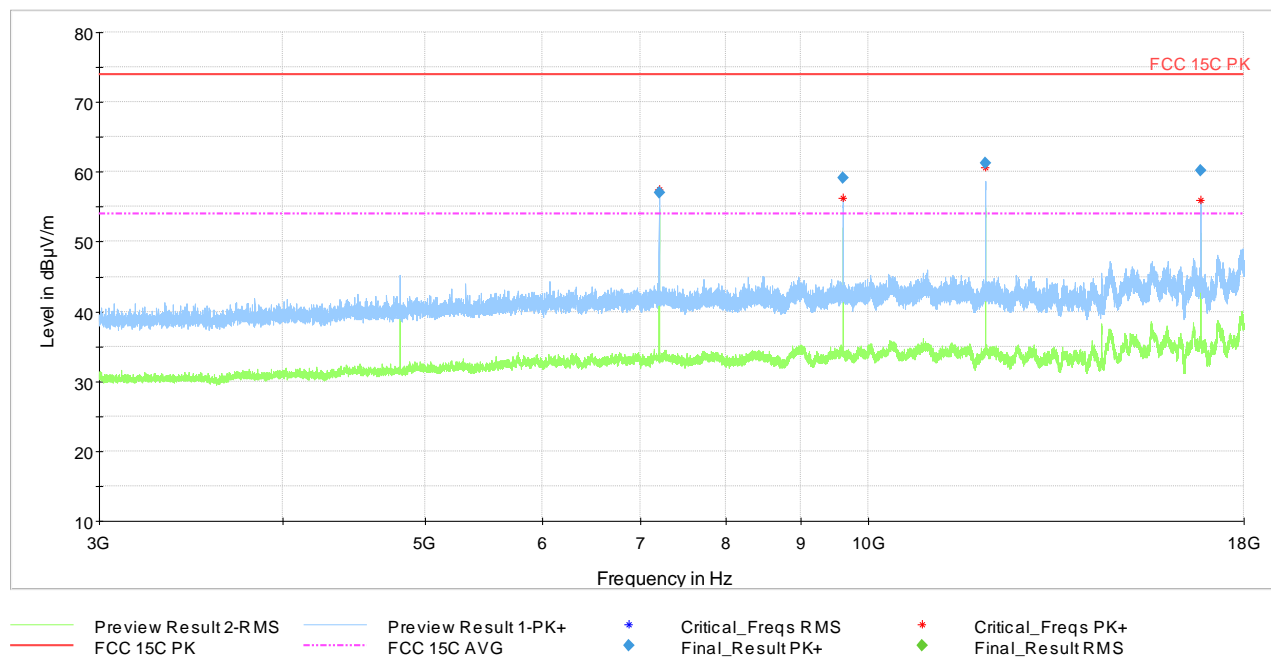

Plot # 4 Radiated Emissions: 9 KHz - 30 MHz

Modulation: BT LE

Channel: Mid

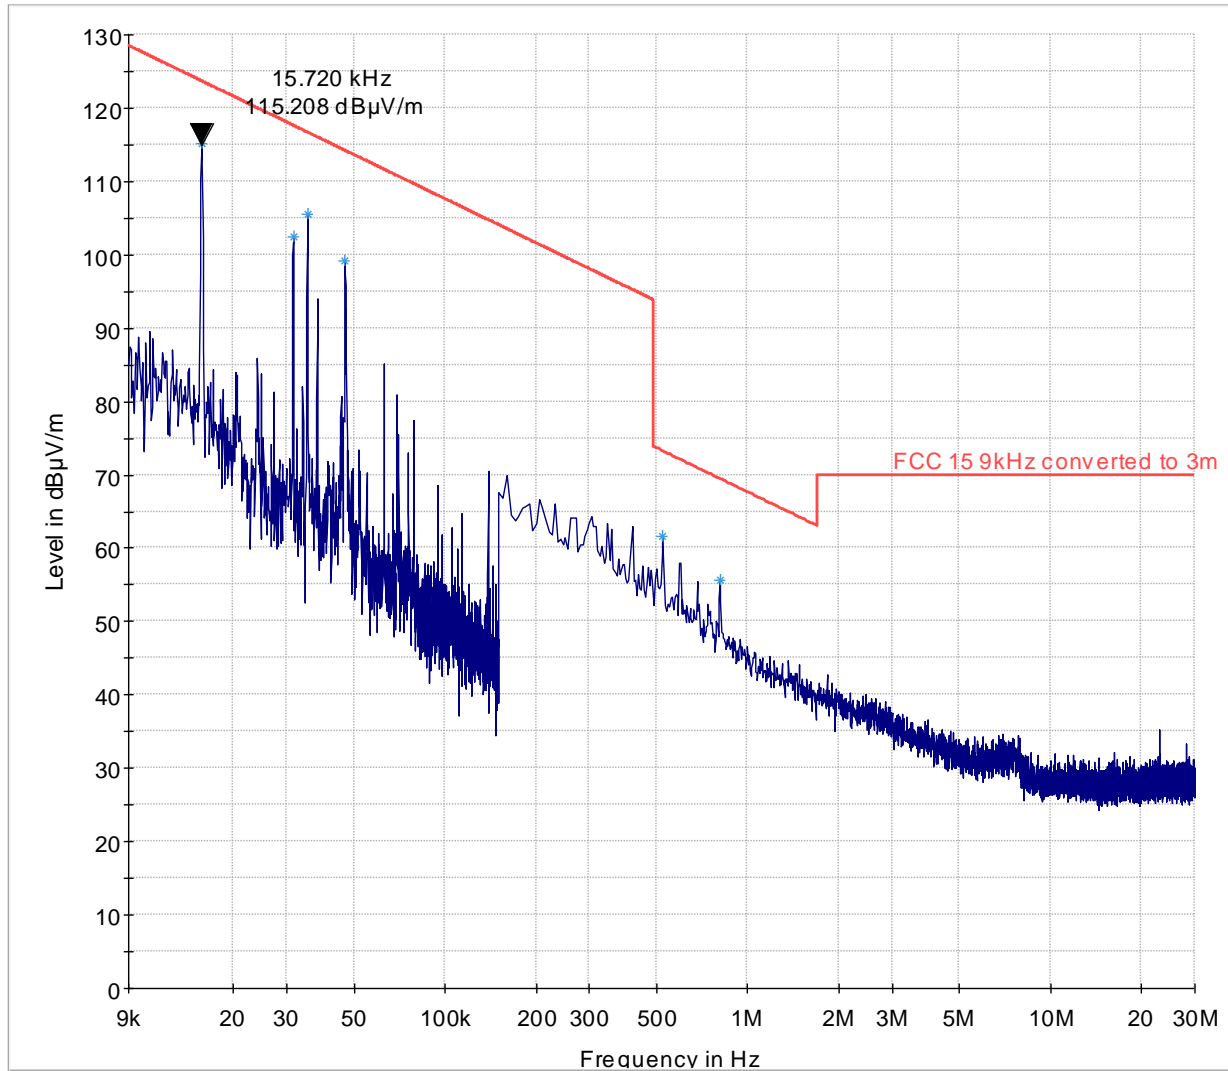

FCC 15.9kHz converted to 3m

Preview Result 1-PK+


*

Data Reduction Result 1 [1]-PK+

Plot #5 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE

Channel: Mid

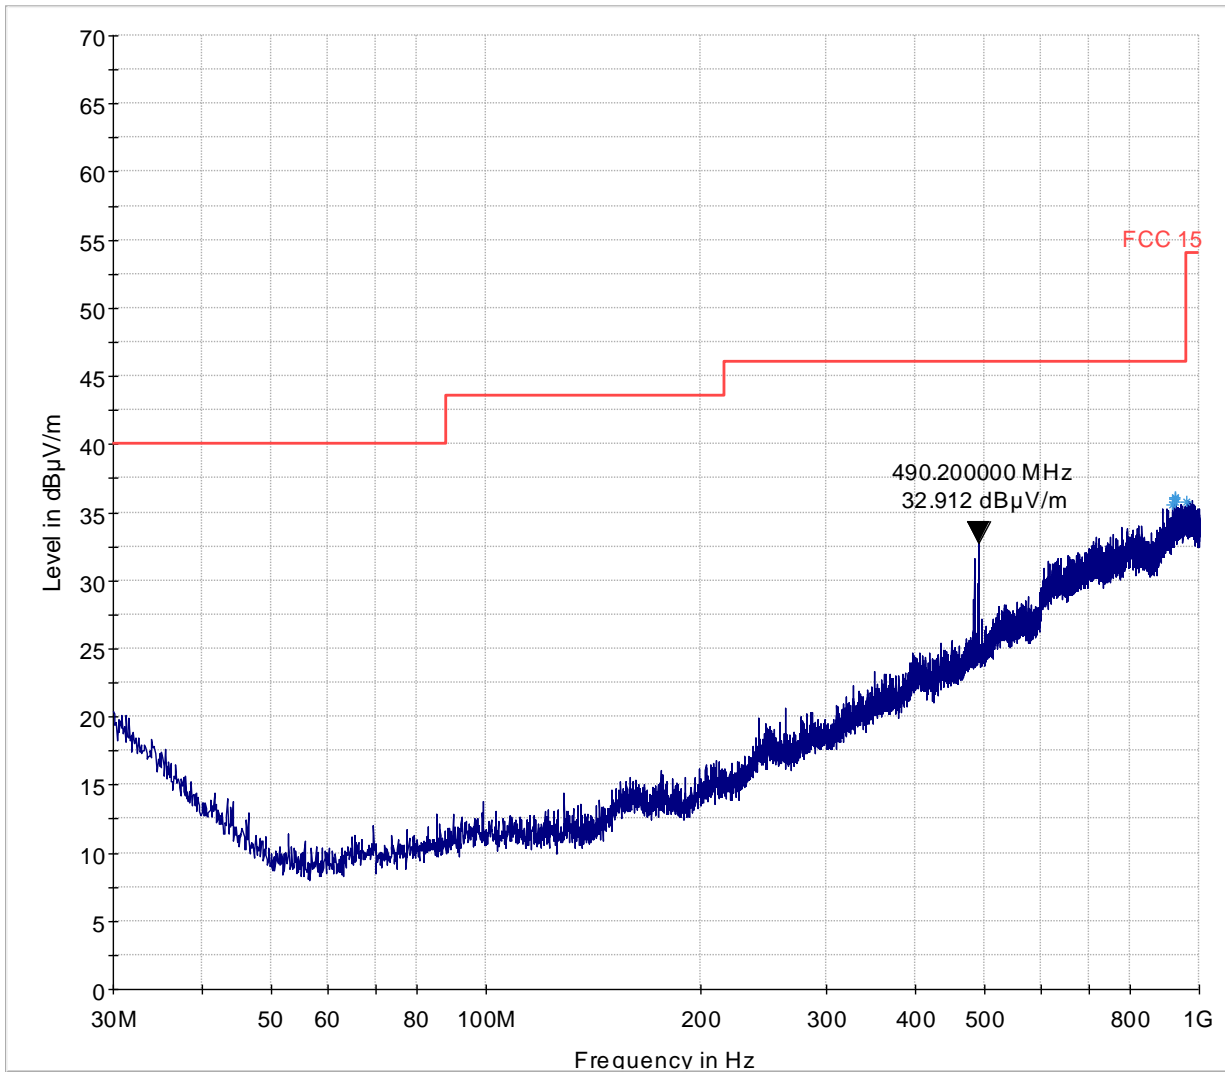

— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Plot #6 Radiated Emissions: 1-3 GHz


Modulation: BT LE

Channel: Mid

Final Measurement Result

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
1824.500000	41.5	100.0	1000.000	360.0	V	27.0	2.8	Pass
1187.500000	37.9	100.0	1000.000	194.0	V	43.0	-0.1	Pass

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
1349.000000	25.5	100.0	1000.000	337.0	H	236.0	-0.2	Pass
1674.000000	31.0	100.0	1000.000	229.0	V	24.0	3.0	Pass

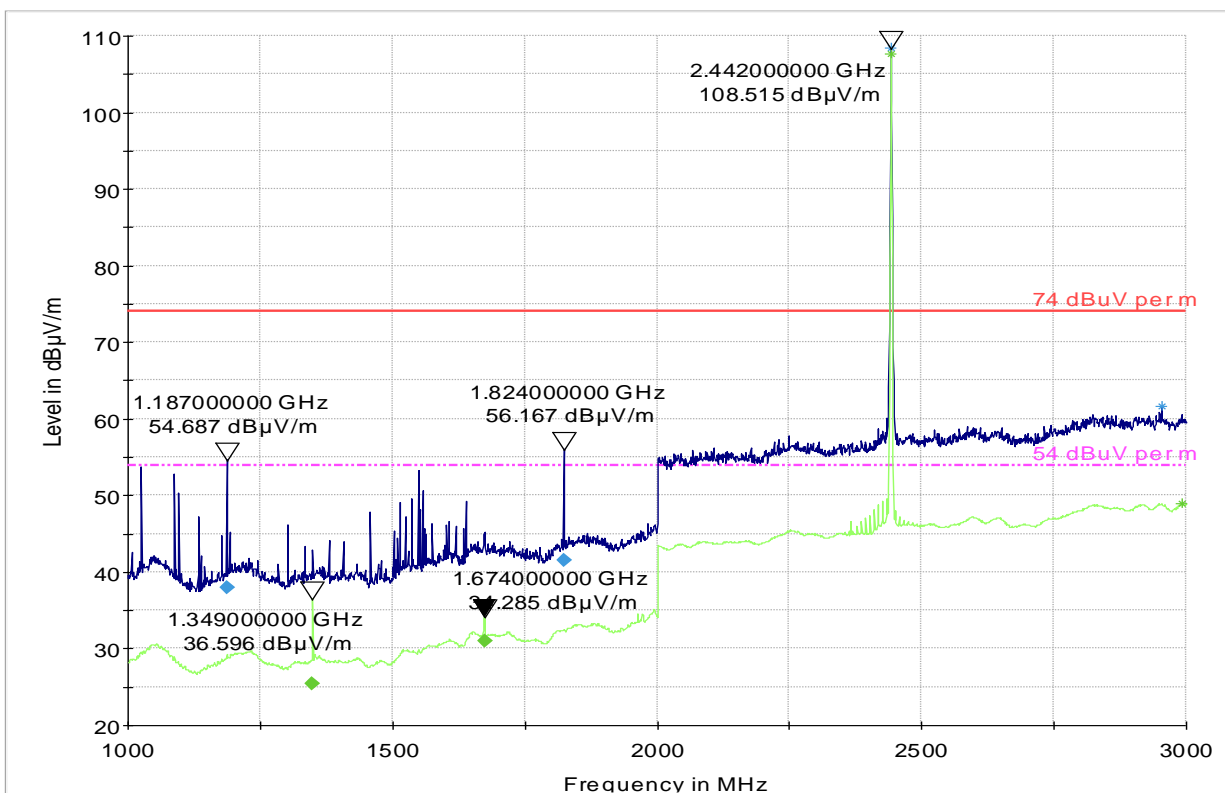

— 74 dBμV per m
— Preview Result 1-PK+
* Data Reduction Result 1 [4]-PK+
◆ Final Measurement Result 2-AVG

— 54 dBμV per m
— Preview Result 2-RMS
* Data Reduction Result 2 [4]-RMS
◆ Final Measurement Result 1-PK+

Plot #7 Radiated Emissions: 3-18 GHz


Modulation: BT LE

Channel: Mid

Final Measurement Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comments
9768.567500	58.82	73.99	15.16	253.0	V	19.0	-14.0	Pass


Frequency (MHz)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. for 5% DC (dB)	Comments
9768.567500	45.82	54	8.18	253.0	V	19.0	-14.0	Pass

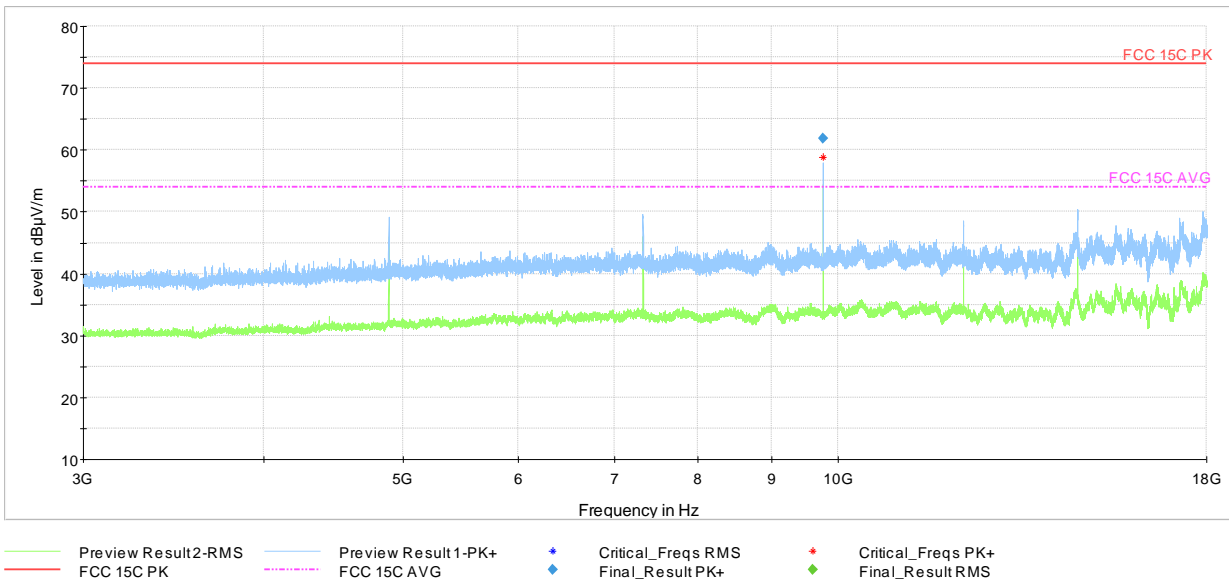

Plot #8 Radiated Emissions: 18-26 GHz

Modulation: BT LE

Channel: Mid

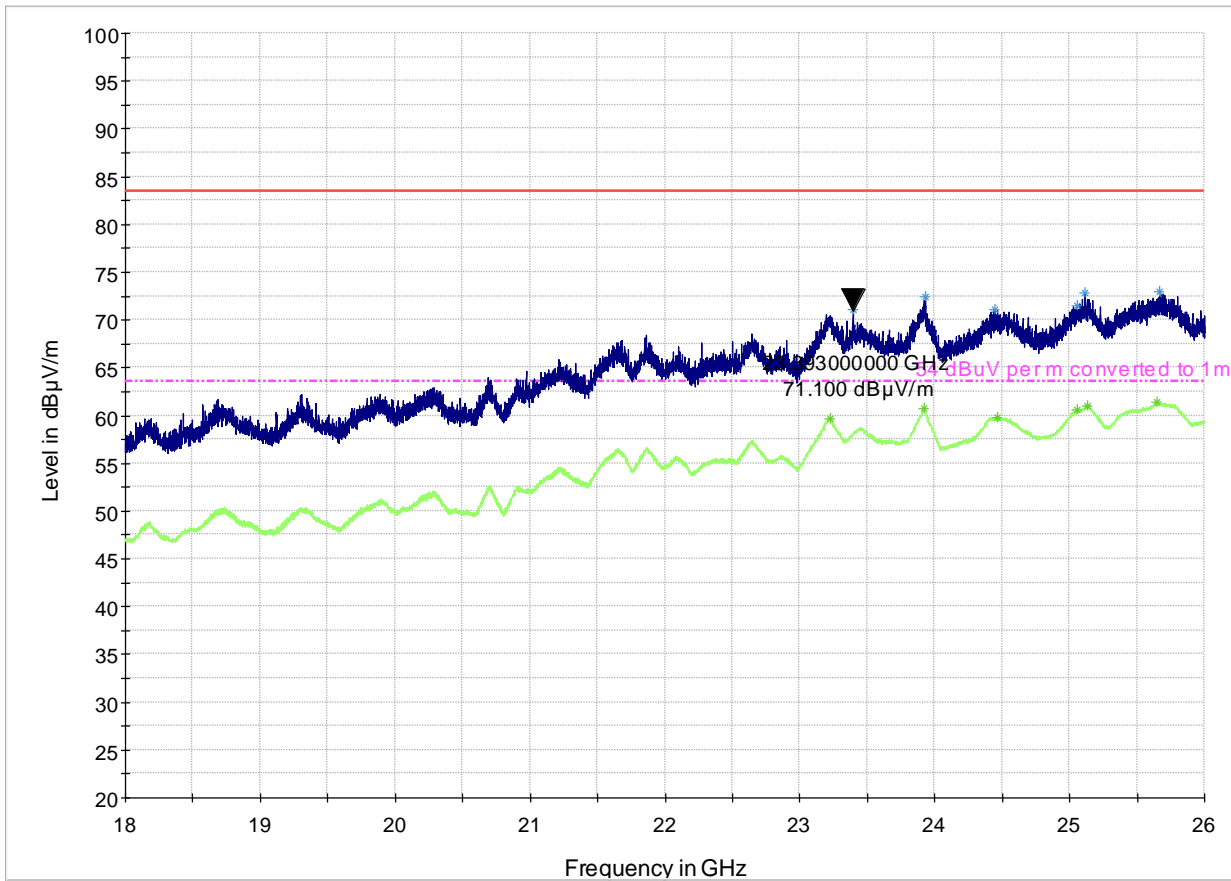


— 74 dBµV per m converted to 1m	--- 54 dBµV per m converted to 1m
— Preview Result 1-PK+	— Preview Result 2-RMS
* Data Reduction Result 1 [6]-PK+	* Data Reduction Result 2 [6]-RMS

Plot #9 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE

Channel: High

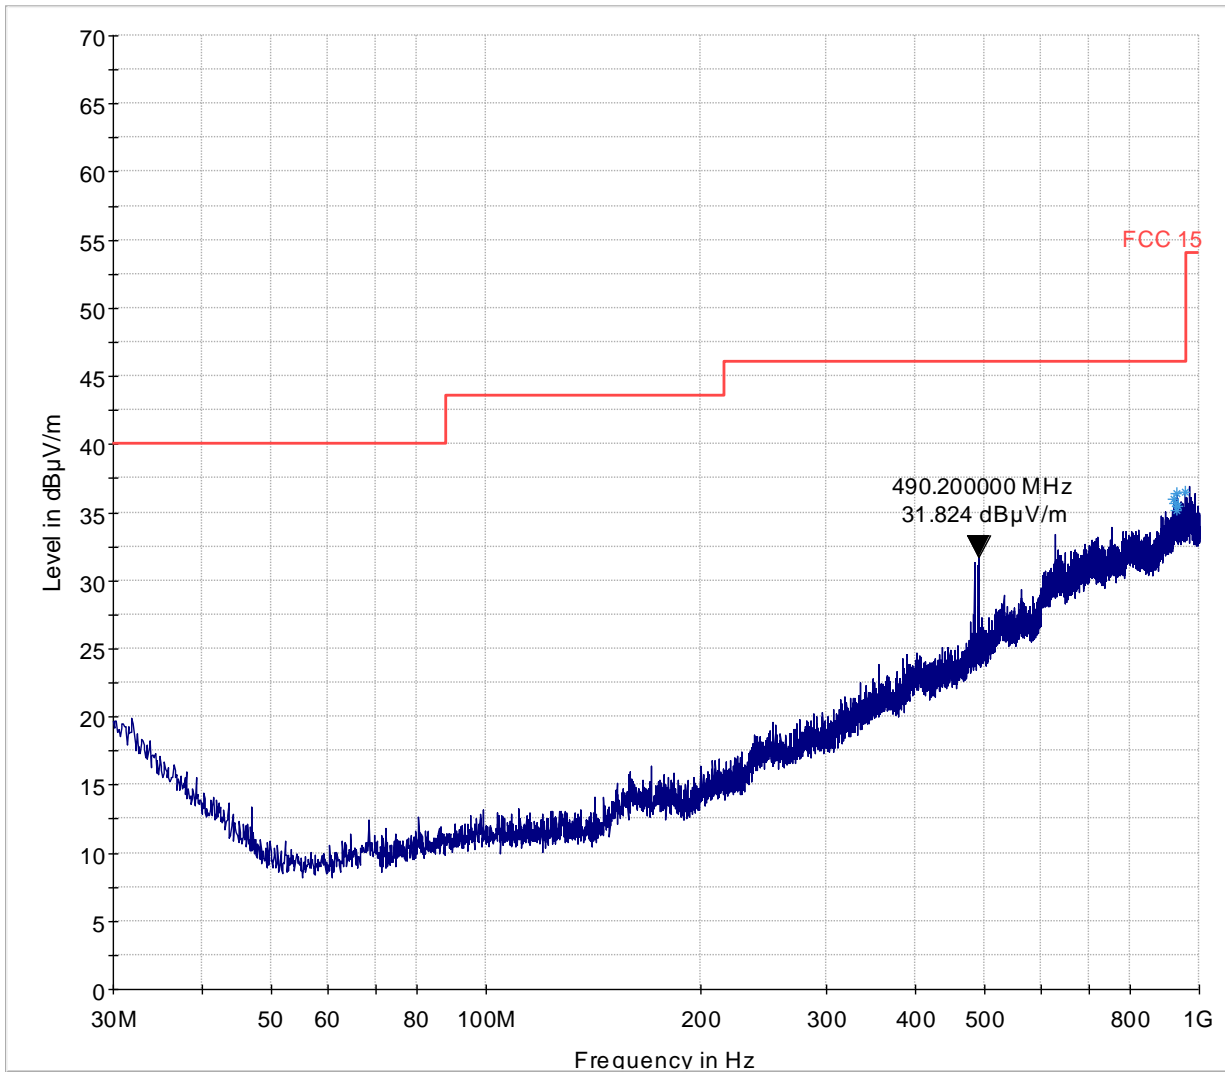

— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+


Plot # 10 Radiated Emissions: 1-3 GHz and Restricted Bands

Modulation: BT LE

Channel: High

Final Measurement Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
1060.000000	40.1	100.0	1000.000	280.0	V	304.0	0.5	Pass

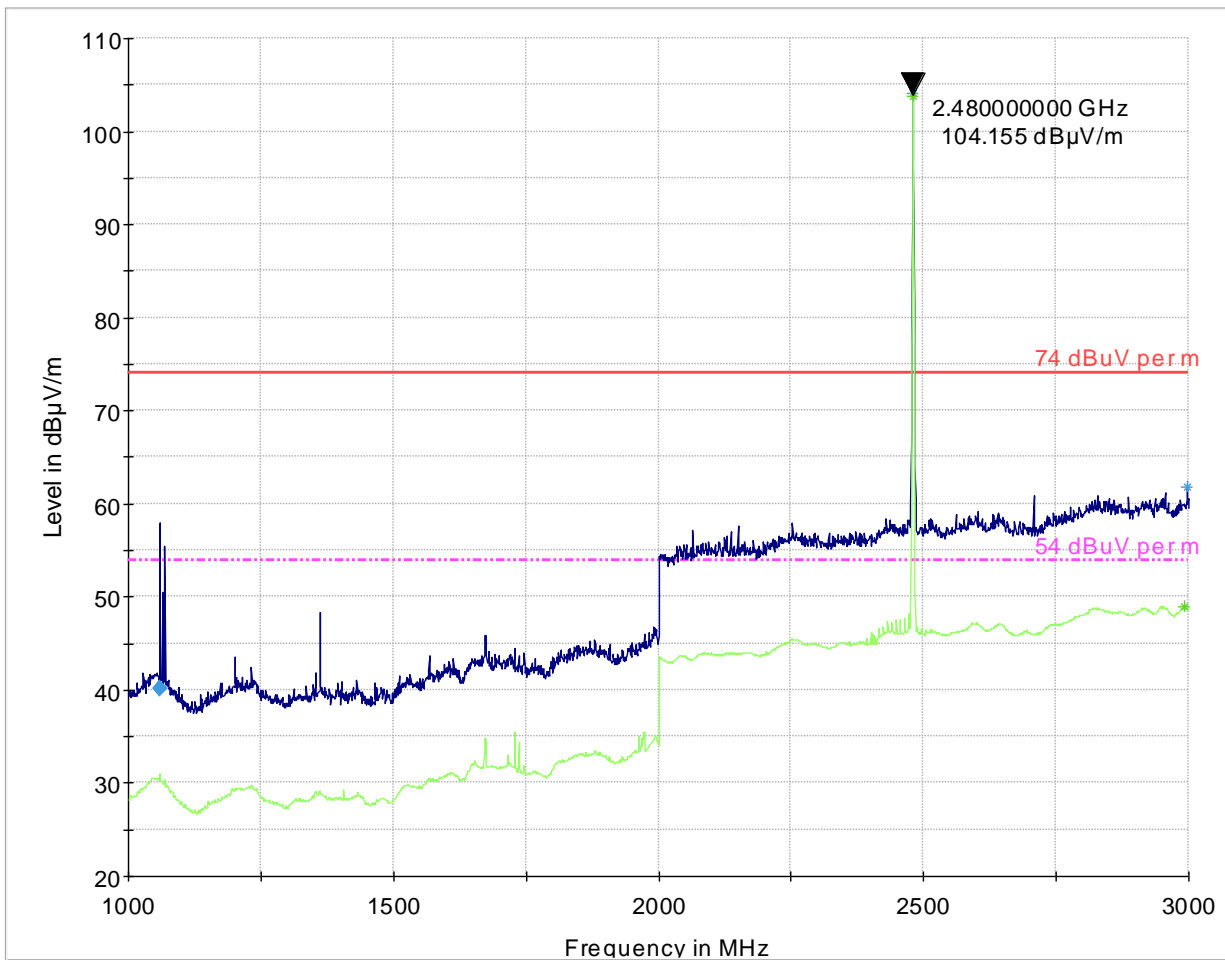

— 74 dB μ V per m
— 54 dB μ V per m
— Preview Result1-PK+
— Preview Result2-RMS
* Data Reduction Result 1 [4]-PK+
* Data Reduction Result 2 [4]-RMS
◆ Final Measurement Result 1-PK+

Plot #11 Radiated Emissions: 3-18 GHz


Modulation: GFSK

Channel: High

Final Measurement Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comments
9920.471250	56.77	73.99	17.22	250.0	H	108.0	-14.3	Pass

Frequency (MHz)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. for 5% DC (dB)	Comments
9768.567500	43.77	54	10.23	253.0	V	19.0	-14.0	Pass

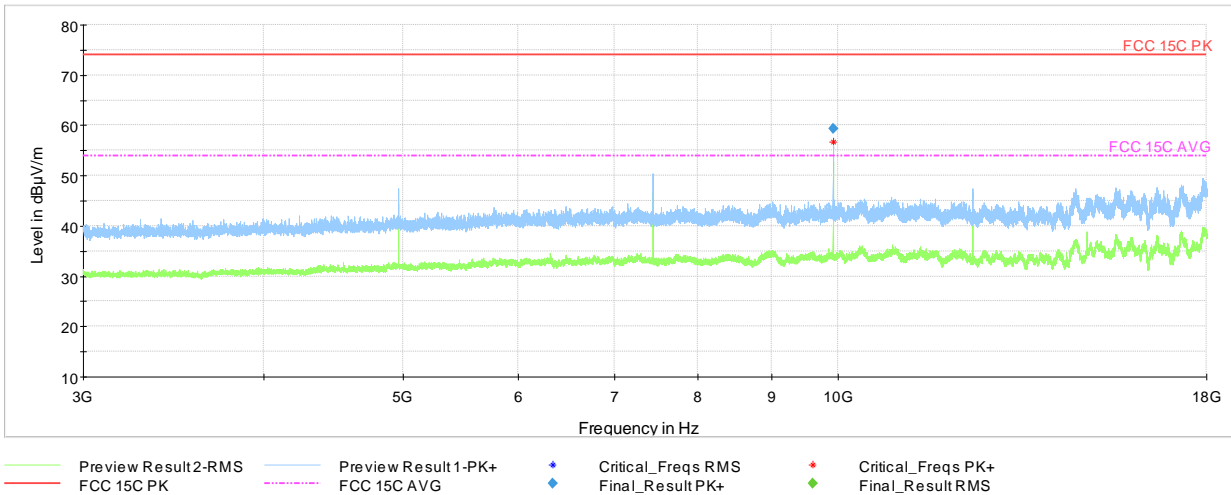

8.6 AC Power Line Conducted Emissions

8.6.1 Measurement according to ANSI C63.10 (2013)

Spectrum Analyzer Settings:

- RBW = 9 KHz (CISPR Bandwidth)
- Detector: Peak / Average for Pre-scan
- Quasi-Peak/Average for Final Measurements

8.6.2 Limits:

FCC §15.207(a) & RSS-Gen 8.8

- Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

8.6.3 Test conditions and setup:

Ambient Temperature (C)	EUT Set-Up #	EUT operating mode	Power line (L1, L2, L3, N)	Power Input
22	1	BT LE	Line & Neutral	110V / 60Hz

8.6.4 Measurement Result:

Plot #	Port	EUT Set-Up #	EUT operating mode	Scan Frequency	Limit	Result
1	AC Mains	1	BT LE	150 kHz – 30 MHz	See section 8.6.2	Pass

8.6.5 Measurement Plots:

Plot # 1

EUT Information

EUT Name: NZL-BS2016
 Manufacturer: PetPomm
 Comment: 120V 60Hz

Quasipeak Measurement Final Result


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.306000	36.0	500.0	9.000	GN	N	4.0	24.0	60.1	Pass
0.346000	32.7	500.0	9.000	GN	N	3.5	26.4	59.1	Pass
0.478000	46.4	500.0	9.000	GN	N	2.2	10.0	56.4	Pass

Average Measurement Final Result

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.430000	17.6	500.0	9.000	GN	N	2.6	29.6	47.3	Pass
0.502000	22.8	500.0	9.000	GN	L1	2.1	23.2	46.0	Pass
0.582000	21.7	500.0	9.000	GN	N	1.7	24.3	46.0	Pass
0.290000	32.0	500.0	9.000	GN	L1	4.3	18.5	50.5	Pass
0.354000	29.6	500.0	9.000	GN	L1	3.4	19.3	48.9	Pass
0.478000	43.0	500.0	9.000	GN	L1	2.2	3.4	46.4	Pass
0.498000	36.3	500.0	9.000	GN	L1	2.1	9.8	46.0	Pass
0.522000	30.3	500.0	9.000	GN	L1	2.0	15.7	46.0	Pass

Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

CISPR 22 Mains Conducted FCC_LISN

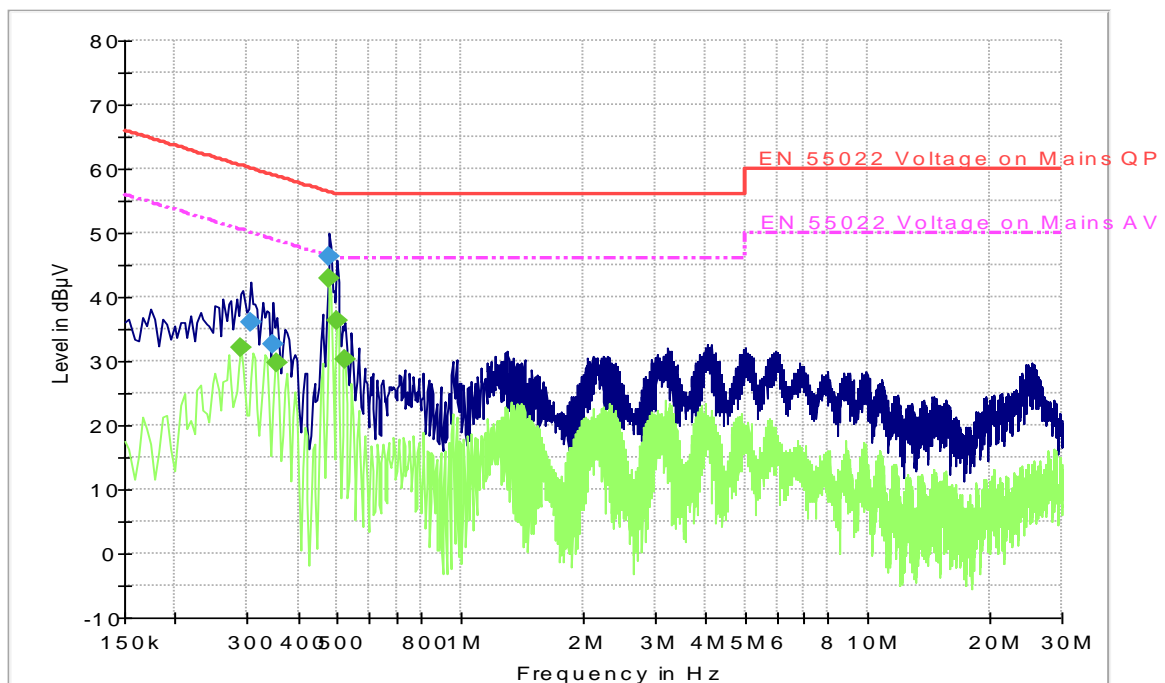

— EN 55022 Voltage on Mains QP — EN 55022 Voltage on Mains AV
 — Preview Result 1-PK+ — Preview Result 2-AVG
 ◆ Final Result 1-QPK ◆ Final Result 2-AVG

9 Test setup photos

Setup photos are included in supporting file name: "EMC_PETPO-001-16001_15.247_DTS_Base_Setup_Photos.pdf"

10 Test Equipment And Ancillaries Used For Testing

Item Name	Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
Antenna Biconilog 3142E	Biconilog Antenna	EMCO	3142E	166067	3 years	6/14/2014
Antenna Loop 6512	Loop Antenna	ETS Lindgren	6512	49838	3 years	3/13/2014
Antenna Horn 3115 SN 35111	Horn Antenna	EMCO	3115	35111	3 years	7/24/2015
Antenna Horn 3116	Horn Antenna	ETS Lindgren	3116	70497	3 years	7/22/2015
Digital Barometer	Compact Digital Barometer	Control Company	35519-055	91119547	2 Years	4/7/2015
FSU26	Spectrum Analyzer	R&S	FSU26	200065	3 years	7/4/2015
FSU26	Spectrum Analyzer	R&S	FSU26	200302	3 years	7/4/2015
Thermometer Humidity TM320	Thermometer Humidity	Dickson	AY1072	0528	1 Year	11/2/2016

Note:

1. Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.
2. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

11 Revision History

Date	Report Name	Changes to report	Report prepared by
2017-03-07	EMC_PETPO-001-16001_15.247_DTS_Base	Initial Version	Kris Lazarov