



FCC PART 15, SUBPART C
ISED C RSS-247, ISSUE 2, FEBRUARY 2017



TEST REPORT

For

PerceptiMed, Inc.

365 San Antonio Road, Mountain View, CA 94048, USA

FCC ID: 2AJ8D-CLPON-G2

Report Type: Original Report	Product Type: RF Transceiver
Prepared By: Christian McCaig Test Engineer	
Report Number: R1907166-247 (DTS)	
Report Date: 2019-08-01	
Reviewed By: Xiao Lin Test Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: 1 (408) 732-9162 Fax: 1 (408) 732-9164	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Objective.....	5
1.3 Related Submittal(s)/Grant(s)	5
1.4 Test Methodology	5
1.5 Measurement Uncertainty	5
1.6 Test Facility Registrations	6
1.7 Test Facility Accreditations	6
2 System Test Configuration.....	9
2.1 Justification	9
2.2 Duty Cycle Correction Factor	9
2.3 Support Equipment	10
2.4 Interface Ports and Cabling.....	10
3 Summary of Test Results	11
4 FCC §15.203 & ISEDC RSS-Gen §6.8 - Antenna Requirements	12
4.1 Applicable Standards	12
4.2 Antenna Description	13
5 FCC §2.1091, §15.247(i) & ISEDC RSS-102 – RF Exposure	14
5.1 Applicable Standards	14
5.2 MPE Prediction.....	15
5.3 MPE Results	15
5.4 RF exposure evaluation exemption for IC	15
6 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....	16
6.1 Applicable Standards	16
6.2 Test Setup	18
6.3 Test Procedure	18
6.4 Corrected Amplitude and Margin Calculation	18
6.5 Test Equipment List and Details.....	19
6.6 Test Environmental Conditions	19
6.7 Summary of Test Results	19
6.8 Radiated Emissions Test Results	20
7 FCC §15.247(a) (2) & ISEDC RSS-247 §5.2 -Emission Bandwidth	24
7.1 Applicable Standards	24
7.2 Measurement Procedure.....	24
7.3 Test Equipment List and Details.....	24
7.4 Test Environmental Conditions	24
7.5 Test Results.....	25
8 FCC §15.247(b) (3) & ISEDC RSS-247 §5.4 (4) - Output Power Measurement	27
8.1 Applicable Standards	27
8.2 Measurement Procedure.....	27
8.3 Test Equipment List and Details.....	27
8.4 Test Environmental Conditions	27
8.5 Test Results.....	27
9 FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges.....	29
9.1 Applicable Standards	29
9.2 Measurement Procedure.....	29
9.3 Test Equipment List and Details.....	29
9.4 Test Environmental Conditions	29
9.5 Test Results.....	30

10 FCC §15.247(e) & ISEDC RSS-247 §5.2(2) – Power Spectral Density	31
10.1 Applicable Standards	31
10.2 Measurement Procedure.....	31
10.3 Test Equipment List and Details.....	31
10.4 Test Environmental Conditions	31
10.5 Test Results.....	32
11 FCC §15.247(d) & ISEDC RSS-247 §5.5, RSS-GEN §8.9 – Spurious Emissions at Antenna Terminals.....	33
11.1 Applicable Standards	33
11.2 Test Procedure	33
11.3 Test Equipment List and Details.....	33
11.4 Test Environmental Conditions	34
11.5 Test Results.....	34
12 Annex A (Normative) – EUT Test Setup Photographs.....	36
13 Annex B (Normative) – EUT External Photographs	37
14 Annex C (Normative) – EUT Internal Photographs.....	38
15 Annex D (Normative) - A2LA Electrical Testing Certificate.....	39

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1907166-247 (DTS)	Original Report	2019-08-01

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Perceptimed, Inc.*, and their product model: *SCLP-CLPON-G2V1*, FCC ID: 2AJ8D-CLPON-G2, or the “EUT” as referred to in this report. It is an RF transceiver. The EUT operates in the frequency range from 2402 to 2481 MHz.

1.2 Objective

This report is prepared on behalf of *Perceptimed, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISEDC RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and ISEDC RSS-247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

N/A

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r2: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2

2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;

- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates bandwidths, and modulations.

2.2 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v05r02 section 6.0:


Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).

On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
2.15	2.24	95.98	0.178

Duty Cycle = On Time (ms)/ Period (ms)

Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plot

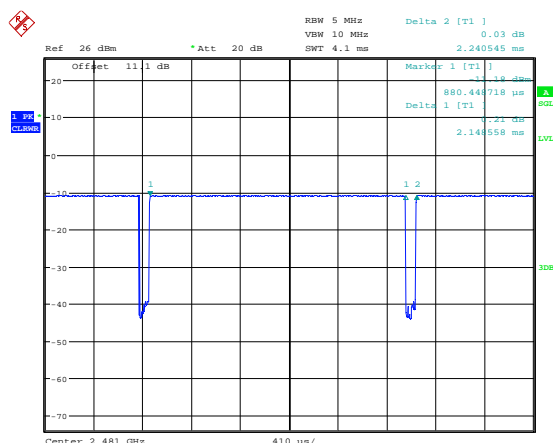

Date: 19.JUL.2019 09:03:02

2.3 Support Equipment

There was no support equipment included, or intended for use with EUT during these tests.

2.4 Interface Ports and Cabling

Cable Description	Length (m)	To	From
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISED Rules	Description of Test	Results
FCC §15.203 ISED RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207 ISED RSS-Gen §8.8	AC Line Conducted Emissions	N/A*
FCC §2.1091, §15.247(i) ISED RSS-102	RF Exposure	Compliant
FCC §2.1051, §15.247 (d) ISED RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247 (d) ISED RSS-247 §5.5 ISED RSS-Gen §8.9 and §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISED RSS-247 §5.2 (1)	6 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3) ISED RSS-247 §5.4 (4)	Maximum Peak Output Power	Compliant
FCC §15.247(d) ISED RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) ISED RSS-247 §5.2 (2)	Power Spectral Density	Compliant

*EUT is battery powered; AC Line Conducted Emissions testing is not required.

4 FCC §15.203 & ISEDC RSS-Gen §6.8 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

4.2 Antenna Description

The antennas used by the EUT are permanent attached antennas.

Frequency Range (MHz)	External/ Internal/Integral	Max Gain (dBi)	Antenna Type/Pattern
2402 - 2481	Internal	3.6	Omnidirectional

5 FCC §2.1091, §15.247(i) & ISEDC RSS-102 – RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of ISED RSS-102 must be followed concerning the exposure of humans to RF field

According to ISED RSS-102 Issue 5:

2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>3.37</u>
<u>Maximum output power at antenna input terminal tune-up (dBm):</u>	<u>4.37</u>
<u>Maximum output power at antenna input terminal tune-up (mW):</u>	<u>2.735</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2402</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>3.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>2.29</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.001</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.001mW/cm². Limit is 1.0 mW/cm².

5.4 RF exposure evaluation exemption for IC

$$3.37 + 3.6 \text{ dBi} = 6.97 \text{ dBm} < 1.31 \times 10^{-2} f^{0.6834} = 2.676 \text{ W} = 34.3 \text{ dBm}$$

Conclusion

Therefore the RF exposure is not required. All transceiver modules must be installed with a separation distance of no less than **20** cm from all persons.

6 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

6.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423		
0.495 – 0.505	16.69475 – 16.69525		
2.1735 – 2.1905	16.80425–16.80475	960 – 1240	4.5 – 5.15
4.125 – 4.128	25.5 – 25.67	1300 – 1427	5.35 – 5.46
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	7.25 – 7.75
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	8.025 – 8.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	9.0 – 9.2
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	9.3 – 9.5
6.31175 – 6.31225	123 – 138	2200 – 2300	10.6 – 12.7
8.291 – 8.294	149.9 – 150.05	2310 – 2390	13.25 – 13.4
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	14.47 – 14.5
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	15.35 – 16.2
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	17.7 – 21.4
12.29 – 12.293	167.72 – 173.2	3332 – 3.339	22.01 – 23.12
12.51975 – 12.52025	240 – 285	3 3458 – 3 358	23.6 – 24.0
12.57675 – 12.57725	322 – 335.4	3.600 – 4.400	31.2 – 31.8
13.36 – 13.41	399.9 – 410		36.43 – 36.5
	608 – 614		Above 38.6

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISERC RSS-Gen § 5.5

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for license-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISERC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

6.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

(1) Peak: $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$

(2) Average: $\text{RBW} = 1\text{MHz} / \text{VBW} = 10\text{Hz or } 1/\text{T} / \text{Sweep} = \text{Auto}$

6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2018-10-26	2 years
Rohde and Schwarz	Analyzer, Spectrum	FSV40	1321.3008K39- 101203-UW	2018-07-23	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
EMCO	Antenna, Horn	3115	9511-4627	2018-03-28	2 years
Agilent	Amplifier, Pre	8449B	3147A00400	2019-05-20	1 year
Insulated Wire INC	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1501AN- 3960-KPS	DC 1807	2018-03-13	2 years
-	SMA cable	-	C0002	Each time ¹	N/A
HP/Agilent	Pre-Amplifier	8449B	3008A01978	2018-08-17	1 year
Wisewave	Antenna, Horn	ARH-4223-02	10555-01	2018-02-14	2 years
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2019-04-02	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

6.6 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Christian McCaig 2019-07-19 in 5m chamber 3.

6.7 Summary of Test Results


According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and ISEDC RSS-247 standard's radiated emissions limits, and had the worst margin of:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	channel
-6.98	9760	Horizontal	middle channel

Please refer to the following table and plots for specific test result details

6.8 Radiated Emissions Test Results

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

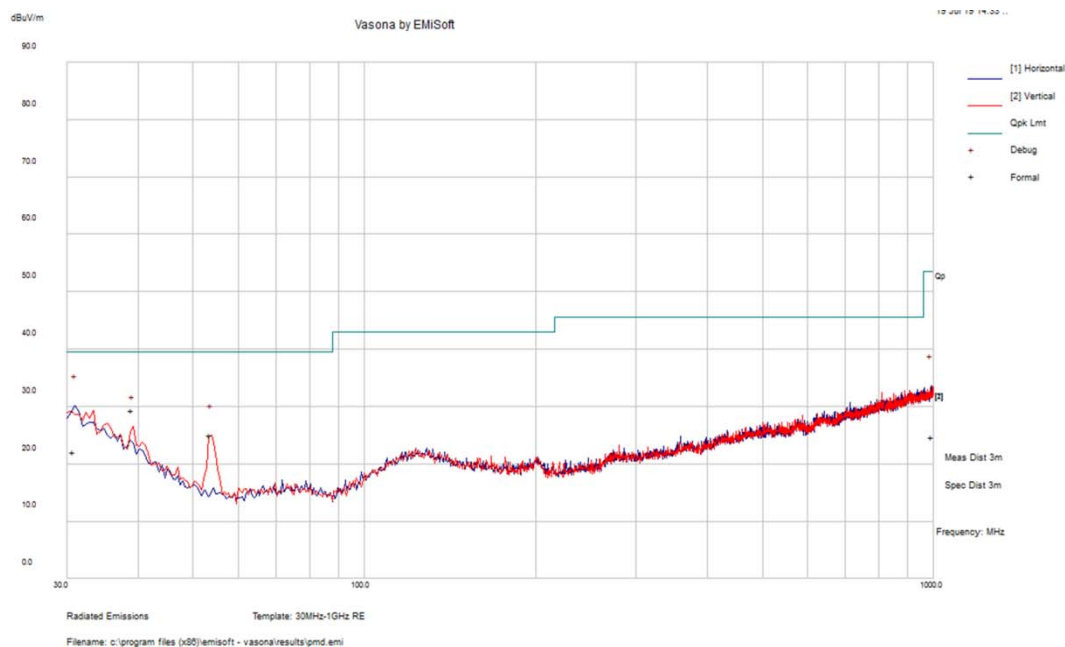



Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
30.7525	22.05	218	H	25	40	-17.95	QP
38.96675	29.45	116	V	69	40	-10.55	QP
53.5295	25.08	106	V	315	40	-14.92	QP
990.063	24.77	272	H	271	54	-29.23	QP

Note: Only 4 emissions were present because the other emissions were 20 dB below the limit.

2) 1–25 GHz Measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel											
2390	56.55	160	160	V	28.89	5.728	36.162	55.006	74	-18.994	PK
2390	54.77	130	140	H	28.865	5.728	36.162	53.201	74	-20.799	PK
2390	33.01	160	160	V	28.89	5.728	36.162	31.466	54	-22.534	AV
2390	32.97	130	140	H	28.865	5.728	36.162	31.401	54	-22.599	AV
4804	46.11	0	170	V	32.454	8.398	35.902	51.06	74	-22.94	PK
4804	44.92	337	150	H	32.455	8.398	35.902	49.871	74	-24.129	PK
4804	32.84	0	170	V	32.454	8.398	35.902	37.79	54	-16.21	AV
4804	31.83	337	150	H	32.455	8.398	35.902	36.781	54	-17.219	AV
7206	45.57	0	100	V	36.754	10.563	35.251	57.636	74	-16.364	PK
7206	45.40	0	100	H	36.901	10.563	35.251	57.613	74	-16.387	PK
7206	30.99	0	100	V	36.754	10.563	35.251	43.056	54	-10.944	AV
7206	31.04	0	100	H	36.901	10.563	35.251	43.253	54	-10.747	AV
9608	45.54	0	100	V	37.781	12.811	35.273	60.859	74	-13.141	PK
9608	45.45	0	100	H	37.875	12.811	35.273	60.863	74	-13.137	PK
9608	30.65	0	100	V	37.781	12.811	35.273	45.969	54	-8.031	AV
9608	30.80	0	100	H	37.875	12.811	35.273	46.213	54	-7.787	AV
Middle Channel											
4880	48.46	300	145	V	32.732	8.624	35.8	54.016	74	-19.984	PK
4880	45.89	0	100	H	32.769	8.624	35.8	51.483	74	-22.517	PK
4880	33.78	300	145	V	32.732	8.624	35.8	39.336	54	-14.664	AV
4880	31.65	0	100	H	32.769	8.624	35.8	37.243	54	-16.757	AV
7320	45.41	0	100	V	37.043	10.757	35.275	57.935	74	-16.065	PK
7320	45.55	0	100	H	37.075	10.757	35.275	58.107	74	-15.893	PK
7320	30.96	0	100	V	37.043	10.757	35.275	43.485	54	-10.515	AV
7320	30.81	0	100	H	37.075	10.757	35.275	43.367	54	-10.633	AV
9760	46.09	0	100	V	37.931	13.145	35.446	61.72	74	-12.28	PK
9760	45.99	0	100	H	37.961	13.145	35.446	61.65	74	-12.35	PK
9760	31.32	0	100	V	37.931	13.145	35.446	46.95	54	-7.05	AV
9760	31.36	0	100	H	37.961	13.145	35.446	47.02	54	-6.98	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel											
2483.5	57.72	160	160	V	29.095	5.848	36.148	56.515	74	-17.485	PK
2483.5	57.69	115	160	H	29.169	5.848	36.148	56.559	74	-17.441	PK
2483.5	33.34	160	160	V	29.095	5.848	36.148	32.135	54	-21.865	AV
2483.5	33.6	115	160	H	29.169	5.848	36.148	32.469	54	-21.531	AV
4962	45.48	0	100	V	32.793	8.813	35.732	51.354	74	-22.646	PK
4962	44.93	0	100	H	32.844	8.813	35.732	50.855	74	-23.145	PK
4962	30.77	0	100	V	32.793	8.813	35.732	36.644	54	-17.356	AV
4962	30.32	0	100	H	32.844	8.813	35.732	36.245	54	-17.755	AV
7443	44.97	0	100	V	37.985	11.45	38.326	56.079	74	-17.921	PK
7443	44.77	0	100	H	37.985	11.45	38.326	55.879	74	-18.121	PK
7443	30.04	0	100	V	32.738	11.45	38.326	35.902	54	-18.098	AV
7443	30.05	0	100	H	32.738	11.45	38.326	35.912	54	-18.088	AV
9924	44.72	0	100	V	38.185	13.27	35.473	60.702	74	-13.298	PK
9924	44.93	0	100	H	38.194	13.27	35.473	60.921	74	-13.079	PK
9924	30.09	0	100	V	38.185	13.27	35.473	46.072	54	-7.928	AV
9924	29.96	0	100	H	38.194	13.27	35.473	45.951	54	-8.049	AV

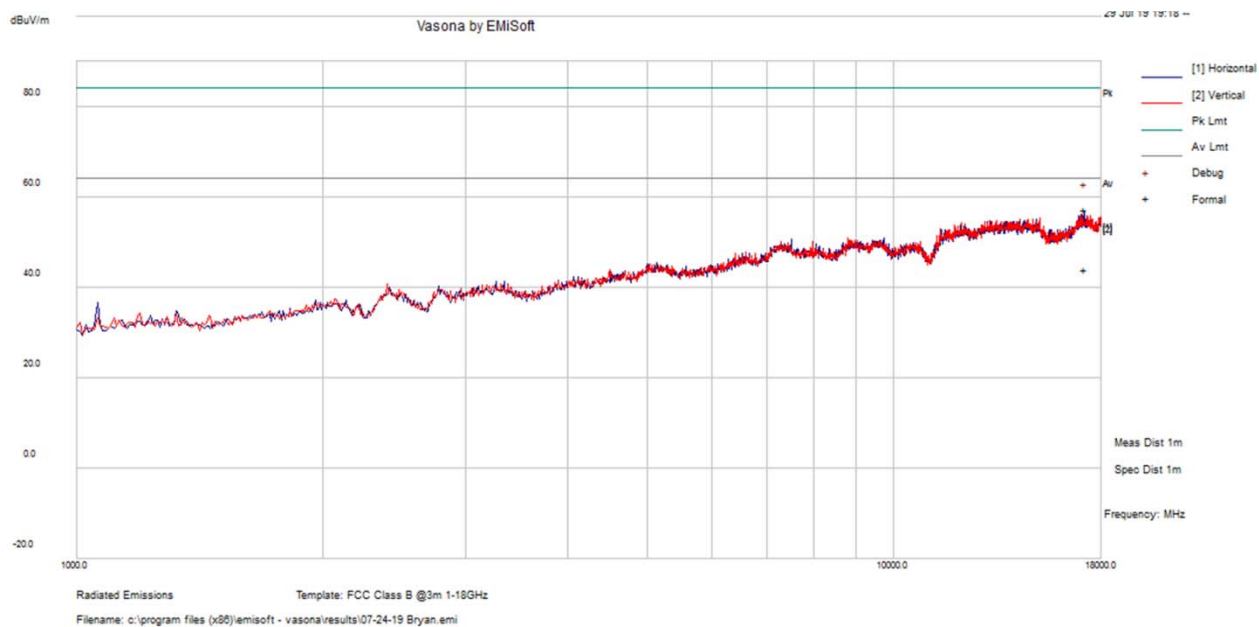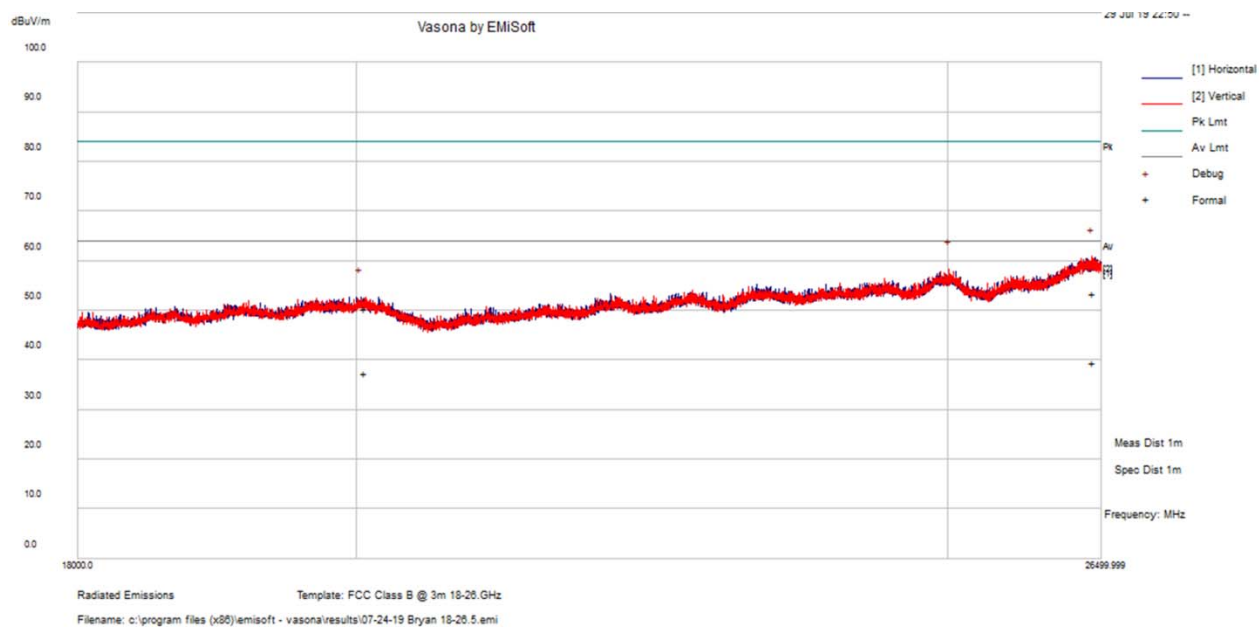1 GHz – 18 GHz Worst Case Scan**18 GHz – 26.5 2.4GHz Worst Case Scan**

7 FCC §15.247(a) (2) & ISEDC RSS-247 §5.2 -Emission Bandwidth

7.1 Applicable Standards

According to ECFR §15.247(a) (2) and ISEDC RSS-247 §5.2, systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

7.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Analyzer, Spectrum	FSQ26	200749	2019-03-14	2 years
-	RF cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2019-07-19 in RF site.


7.5 Test Results

Channel	Frequency (MHz)	99% OBW (kHz)	6 dB OBW (kHz)	6 dB OBW Limit (kHz)
Low	2402	1033.6	528.85	500
Middle	2440	1000.0	524.04	500
High	2481	985.6	524.04	500

Please refer to the following plots for detailed test results.


99% OBW

Low Channel 2402 MHz

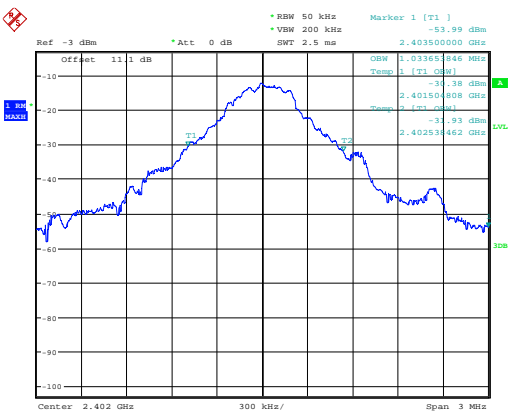


Date: 19.JUL.2019 09:12:35

Middle Channel 2440 MHz

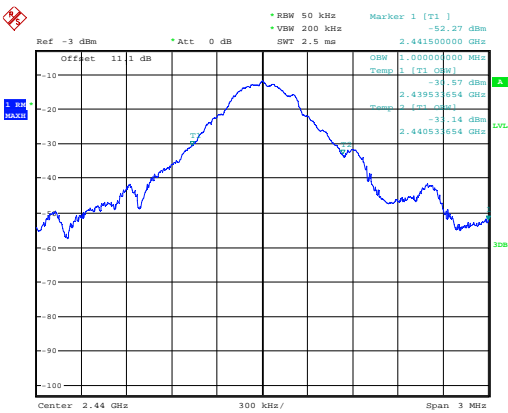


Date: 19.JUL.2019 09:11:27

High Channel 2481 MHz

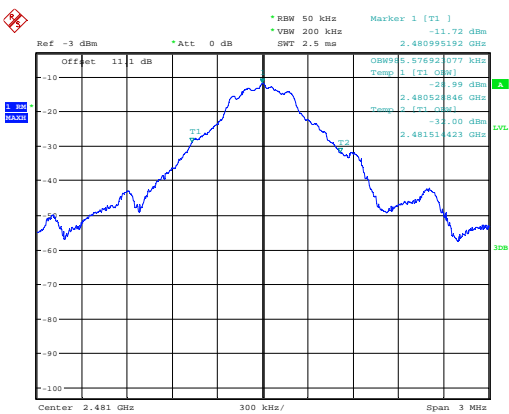


Date: 19.JUL.2019 09:08:32

Middle Channel 2440 MHz

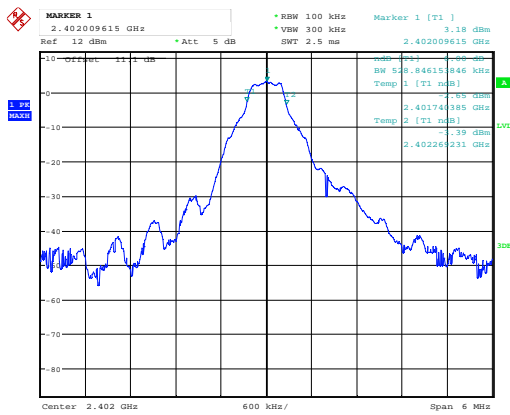


Date: 19.JUL.2019 11:00:46

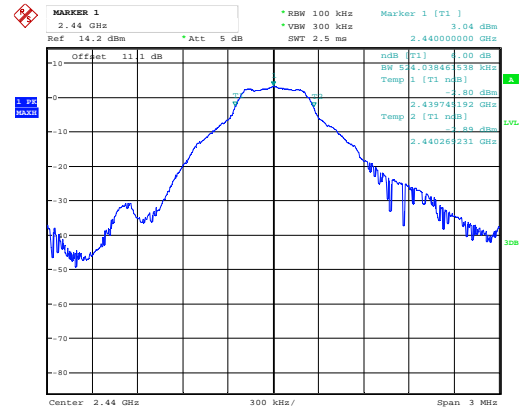

Date: 19.JUL.2019 10:54:46

High Channel 2481 MHz

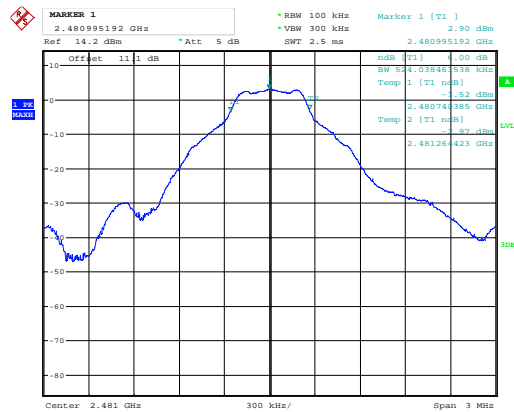

Date: 19.JUL.2019 10:53:01

8 FCC §15.247(b) (3) & ISEDC RSS-247 §5.4 (4) - Output Power Measurement

8.1 Applicable Standards

According to ECFR §15.247(b) (3) and ISEDC RSS-247 §5.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

8.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Analyzer, Spectrum	FSQ26	200749	2019-03-14	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Christian McCaig on 2019-07-19 in RF site.

8.5 Test Results

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Limit (dBm)
Low	2402	3.37	30
Middle	2440	3.29	30
High	2481	3.17	30


Please refer to the following plots for detailed test results.

Low Channel 2402 MHz

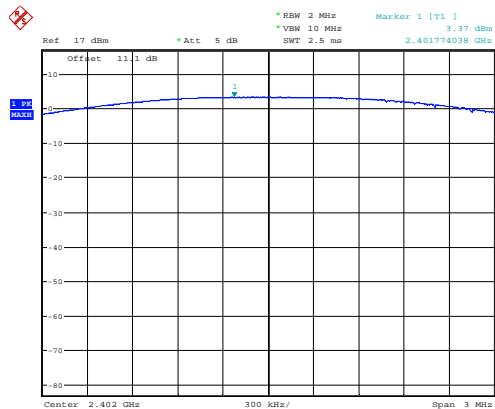


Date: 19.JUL.2019 10:57:54

Middle Channel 2440 MHz

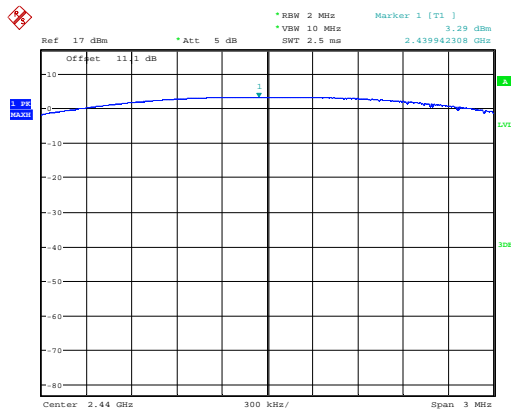

Date: 19.JUL.2019 10:56:09

High Channel 2481 MHz

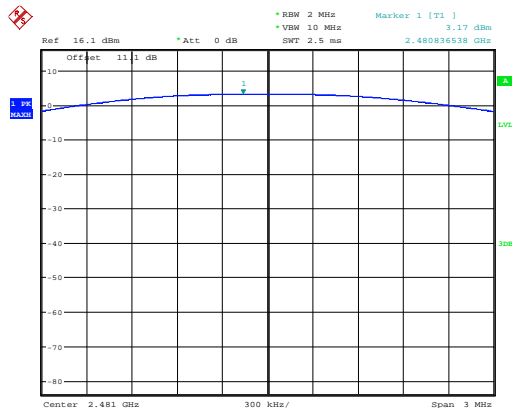

Date: 19.JUL.2019 10:27:32

9 FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges

9.1 Applicable Standards

According to ECFR §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Analyzer, Spectrum	FSQ26	200749	2019-03-14	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.


9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2019-07-19 in RF site.


9.5 Test Results

Low Channel 2402 MHz

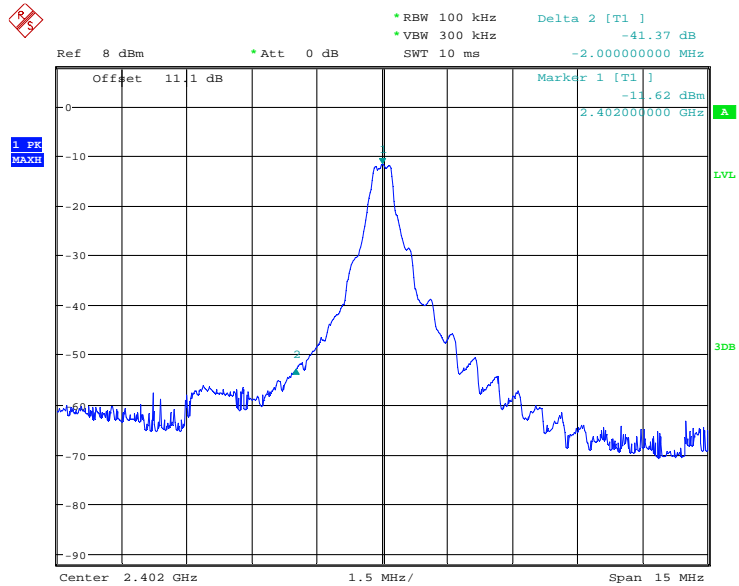

Date: 19.JUL.2019 09:58:35

High Channel 2481 MHz

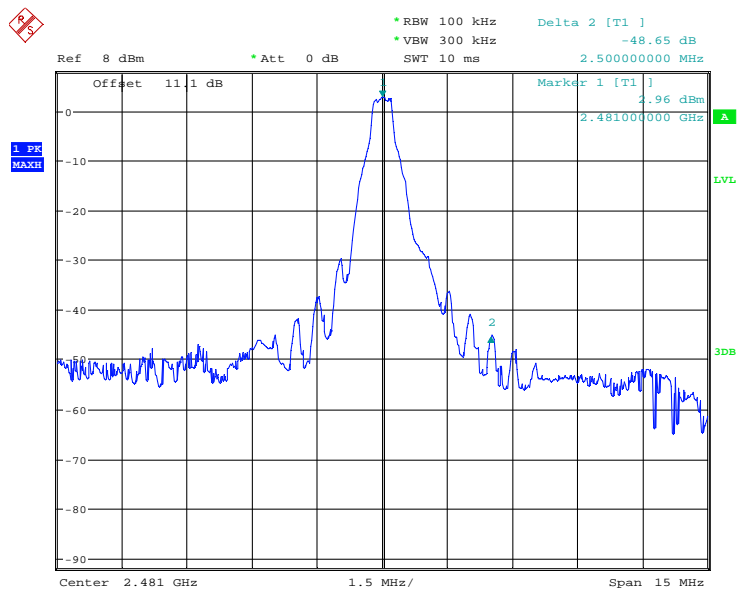

Date: 19.JUL.2019 10:01:08

10 FCC §15.247(e) & ISEDC RSS-247 §5.2(2) – Power Spectral Density

10.1 Applicable Standards

According to ECFR §15.247(e) and RSS-247 §5.2 (2) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission.

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Analyzer, Spectrum	FSQ26	200749	2019-03-14	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Christian McCaig on 2019-07-19 in RF site.

10.5 Test Results

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-7.85	8
Middle	2440	-8.17	8
High	2481	-6.06	8


Please refer to the following plots for detailed test results

Low Channel 2402 MHz

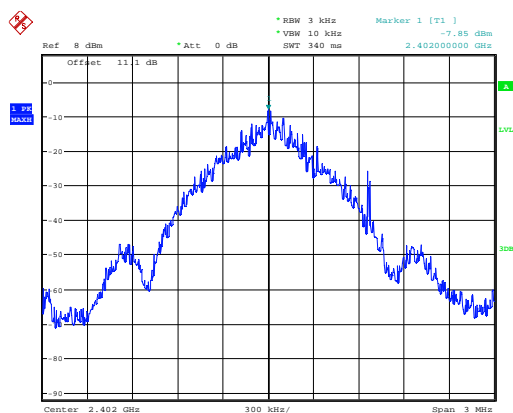


Date: 19.JUL.2019 09:52:29

Middle Channel 2440 MHz

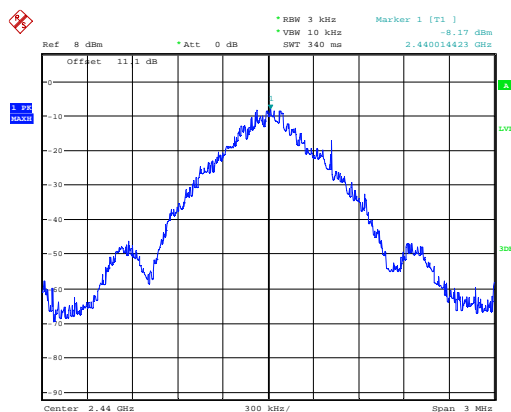

Date: 19.JUL.2019 09:51:14

High Channel 2481 MHz

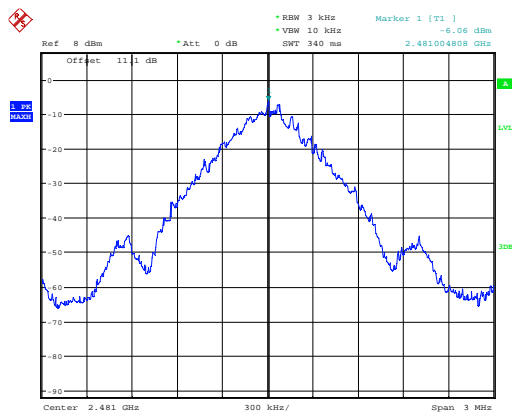

Date: 19.JUL.2019 09:48:27

11 FCC §15.247(d) & ISEDC RSS-247 §5.5, RSS-GEN §8.9 – Spurious Emissions at Antenna Terminals

11.1 Applicable Standards

For ECFR §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

11.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Analyzer, Spectrum	FSQ26	200749	2019-03-14	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

11.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2019-07-19 in RF site.


11.5 Test Results

Please refer to following plots.


Frequency (MHz)	Peak Output Power (dBm)	Max Spurious Emission (dBm)	Max Spurious Emission (dBc)	Limit (dBc)	Result
2402	3.37	-42.57	45.94	>20	Pass
2440	3.29	-42.31	45.60	>20	Pass
2481	3.17	-42.62	45.79	>20	Pass

Please refer to the following plots for detailed test results

Low Channel

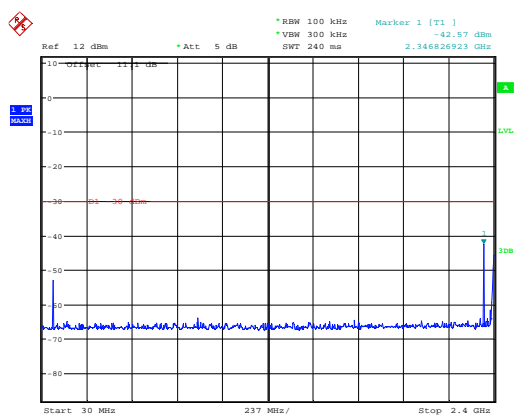


Date: 19.JUL.2019 11:12:50

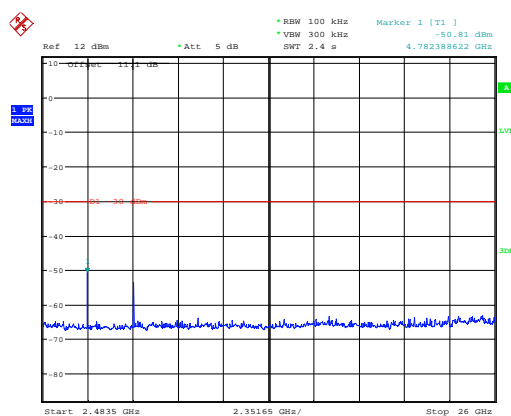


Date: 19.JUL.2019 11:13:49

Middle Channel

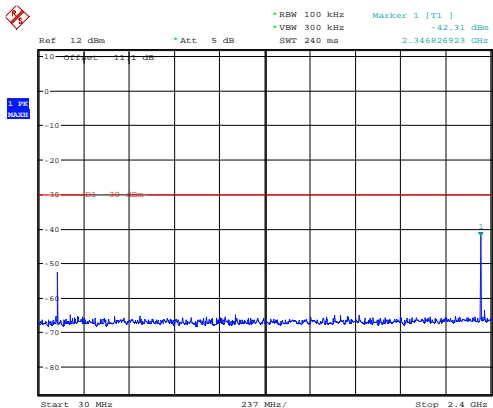


Date: 19.JUL.2019 11:18:58

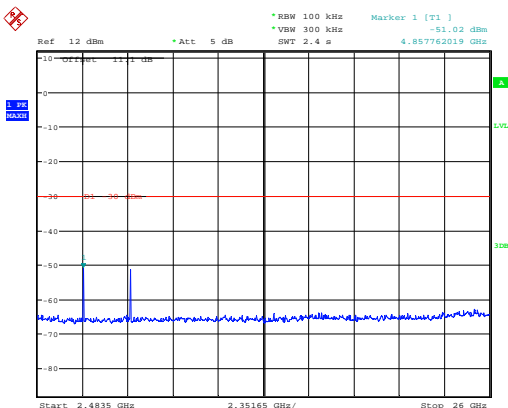


Date: 19.JUL.2019 11:18:07

High Channel

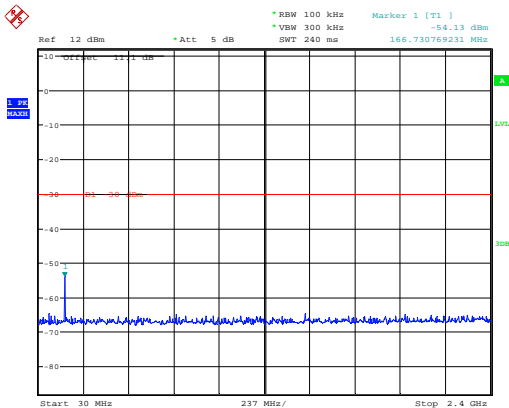

Date: 19.JUL.2019 11:22:01

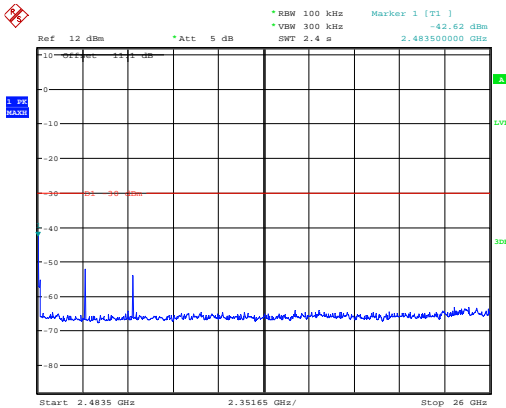

Date: 19.JUL.2019 11:22:49

12 Annex A (Normative) – EUT Test Setup Photographs

Please refer to the attachment.

13 Annex B (Normative) – EUT External Photographs

Please refer to the attachment.

14 Annex C (Normative) – EUT Internal Photographs

Please refer to the attachment.

15 Annex D (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2nd day of October 2018.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2020
Revised June 5, 2019

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---