# **TEST REPORT**

**Reference No.** ..... : WTS16S1164343-4E V1

FCC ID ...... : 2AJ80PCB-I316

Applicant..... : Grupo Nucleo S.A

Address ...... : Chaco 1670, Mar del Plata, Buenos Aires, Argentina

Manufacturer ...... Gionee Communication Equipment Co.,Ltd.

Address ...... 21/F, Times Technology Building, No. 7028, Shennan Avenue, Futian

District, Shenzhen, China

Product Name.....: Mobile Phone

**Model No.....** : PCB-i316

Brand.....: PCBOX

Standards..... FCC CFR47 Part 24 Subpart E: 2015

FCC CFR47 Part 27: 2015

Date of Receipt sample .... : Aug. 08, 2016

**Date of Test** ...... : Aug. 09 – Nov. 11, 2016

**Date of Issue**.....: Nov. 26, 2016

Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

#### Prepared By:

#### Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel:+86-755-83551033 Fax:+86-755-83552400

Compiled by:

Zero Zhou / Test Engineer

8

Philo Zhong / Manager

coved by:

Reference No.: WTS16S1164343-4E V1 Page 2 of 67

## 2 Test Summary

Test Items	Test Requirement	Result	
	2.1046		
DE Output Power	24.232 (c)	PASS	
RF Output Power	27.50(c)	PASS	
	27.50(d)		
Dook to Average Detic	24.232 (d)	PASS	
Peak-to-Average Ratio	27.50(d)	PASS	
	2.1049		
Bandwidth	24.238	PASS	
	27.53(a)		
	2.1051		
Spurious Emissions at Antenna Terminal	24.238 (a)	PASS	
	27.53(h)		
	2.1053		
Field Strength of Spurious Radiation	24.238 (a)	PASS	
	27.53(h)		
Out of band emission	24.238 (a)	PASS	
Out of barid effission	27.53(h)	FASS	
	2.1055		
Fraguancy Stability	24.235	PASS	
Frequency Stability	27.5(h)	FASS	
	27.54		
Maximum Permissible Exposure	1.1307	PASS	
(SAR)	2.1093	FASS	

## 3 Contents

		Page
1	COVER PAGE	1
2	TEST SUMMARY	2
3	CONTENTS	3
4	REPORT REVISION HISTORY	
	GENERAL INFORMATION	
5		
		9
6	EQUIPMENT USED DURING TEST	10
	6.1 EQUIPMENTS LIST	10
		11
	6.3 Test Equipment Calibration	11
7	RF OUTPUT POWER	12
	7.1 EUT OPERATION	12
		12
		13
8	PEAK-TO-AVERAGE RATIO	
		30
9	BANDWIDTH	
9		
		31
10		
		47
		47
		47
11	SPURIOUS RADIATED EMISSIONS	48
	11.1 EUT OPERATION	48
		48
		49
		50
10		
12		
13		
		54
		55

Reference No.: WTS16S1164343-4E V1

14 RF EXPOSURE.......67

Page 4 of 67

Reference No.: WTS16S1164343-4E V1 Page 5 of 67

# 4 Report Revision History

Report No.	Report Version	Description	Issue Date
WTS16S1164343-4E	NONE	Original	Nov. 12, 2016
WTS16S1164343-4E V1	V1	Version 1	Nov. 26, 2016

Reference No.: WTS16S1164343-4E V1 Page 6 of 67

## 5 General Information

## 5.1 General Description of E.U.T.

Product Name : Mobile Phone Model No. : PCB-i316

Model Description : N/A

GSM Band(s) : GSM 850/900/1800/1900MHz

GPRS/EGPRS Class : 12

WCDMA Band(s) : FDD Band II/V LTE Band(s) : LTE Band 2/4

Wi-Fi Specification : 2.4G: 802.11b/g/n HT20 HT40

Bluetooth Version : Bluetooth v4.0 with BLE

GPS : Support

NFC : N/A

Hardware Version : KING\_Mainboard\_P3

Software Version : KING\_0303\_V6202

Storage Location : Internal Storage

Note : This EUT has two SIM card slots, and use same one RF module. We

found that RF parameters are the same, when we insert the card 1 and

card 2. So we usually performed the test under main card slot 1.

#### 5.2 Details of E.U.T.

Operation Frequency : GSM/GPRS/EGPRS 850: 824~849MHz

PCS/GPRS/EGPRS 1900: 1850~1910MHz

WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz

WiFi:

802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz

Max. RF output power : GSM 850: 32.80dBm

PCS1900: 29.80dBm

WCDMA Band II: 22.89dBm
WCDMA Band V: 22.62dBm
LTE Band 2: 23.79dBm
LTE Band 4: 23.99dBm
WiFi(2.4G): 9.39dBm
Bluetooth: 4.60dBm

Reference No.: WTS16S1164343-4E V1 Page 7 of 67

Type of Modulation : GSM,GPRS: GMSK

EDGE: GMSK, 8PSK

WCDMA: BPSK

LTE: QPSK, 16QAM WiFi: CCK, OFDM

Bluetooth: GFSK, Pi/4 DQPSK,8DPSK

Antenna installation : GSM/WCDMA/LTE: internal permanent antenna

WiFi/Bluetooth: internal permanent antenna

Antenna Gain : GSM 850: -4.0dBi

PCS1900: 0.12dBi

Bluetooth: -0.5dBi

WCDMA Band II: 0.12dBi WCDMA Band V: -4.0dBi LTE Band 2: 0.12dBi LTE Band 4: 0dBi WiFi(2.4G): -0.5dBi

Technical Data : Battery DC 3.8V, 2400mAh

DC 5V, 1.0A, charging from adapter

(Adapter Input: 100-240V~50/60Hz 0.3A)

Adapter : Manufacture: SHENZHEN FUJIA APPLIANCE CO.,LTD

Model No.: FJ-SW1160501000UA

Type of Emission : LTE Band 2 1.4MHz: 1M16G7D(QPSK), 1M15W7D(16QAM)

LTE Band 2 3MHz: 2M72G7D(QPSK), 2M73W7D(16QAM)
LTE Band 2 5MHz: 4M50G7D(QPSK), 4M50W7D(16QAM)
LTE Band 2 10 MHz: 8M93G7D(QPSK), 8M92W7D(16QAM)
LTE Band 2 15MHz: 13M4G7D(QPSK), 13M4W7D(16QAM)
LTE Band 2 20MHz: 17M8G7D(QPSK), 17M9W7D(16QAM)
LTE Band 4 1.4MHz: 1M15G7D(QPSK), 1M16W7D(16QAM)
LTE Band 4 3MHz: 2M73G7D(QPSK), 2M72W7D(16QAM)
LTE Band 4 5MHz: 4M50G7D(QPSK), 4M49W7D(16QAM)
LTE Band 4 10 MHz: 9M34G7D(QPSK), 8M92W7D(16QAM)
LTE Band 4 15MHz: 13M4G7D(QPSK), 13M4W7D(16QAM)

LTE Band 4 20MHz: 17M8G7D(QPSK), 17M8W7D(16QAM)

## 5.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Support Band	Test Mode BW(MHz)	Channel Frequency	Channel Number
capport Barra		1850.7 MHz	18607
	1.4	1880.0 MHz	18900
		1909.3 MHz	19193
		1851.5 MHz	18615
	3	1880.0 MHz	18900
		1908.5 MHz	19185
		1852.5 MHz	18625
	5	1880.0 MHz	18900
		1907.5 MHz	19175
LTE Band 2		1855.0 MHz	18650
	10	1880.0 MHz	18900
		1905.0 MHz	19150
		1857.5 MHz	18675
	15	1880.0 MHz	18900
		1902.5 MHz	19125
		1860.0 MHz	18700
	20	1880.0 MHz	18900
		1900.0 MHz	19100
		1710.7 MHz	19957
	1.4	1732.5 MHz	20175
		1754.3 MHz	20393
		1711.5 MHz	19965
	3	1732.5 MHz	20175
		1753.5 MHz	20385
LTE Band 4		1712.5 MHz	19975
	5	1732.5 MHz	20175
		1752.5 MHz	20375
		1715.0 MHz	20000
	10	1732.5 MHz	20175
		1750.0 MHz	20350
	15	1717.5 MHz	20025

		1732.5 MHz	20175					
		1747.5 MHz	20325					
		1720.0 MHz	20050					
	20	1732.5 MHz	20175					
		1745.0 MHz	20300					
Remark: All mode(s) were tested and the worst data was recorded.								

## 5.4 Test Facility

The test facility has a test site registered with the following organizations:

#### IC – Registration No.: 7760A

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

#### • FCC Test Site 1#- Registration No.: 880581

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

#### FCC Test Site 2# Registration No.: 328995

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory 'has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## **6** Equipment Used during Test

## 6.1 Equipments List

l	o.i Equipments L	-131				
RF Co	nducted Test		<del> </del>	<del> </del>		
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2016	Sep.14,2017
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Sep.15,2016	Sep.14,2017
4.	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.10,2016	Apr.09,2017
3m Sei	mi-anechoic Chamber	for Radiated Emiss	sions			
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2016	Sep.14,2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Тор	TYPE16(13M)	-	Sep.15,2016	Sep.14,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	669	Apr.18,2016	Apr.17,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2016	Mar.16,2017
8	Coaxial Cable (above 1GHz)	Тор	1000MHz- 25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
9	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2016	Apr.17,2017
10	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.10,2016	Apr.09,2017
11	Signal Generator	R&S	SMR20	100046	Sep.15,2016	Sep.14,2017
12	Smart Antenna	SCHWARZBECK	HA08	-	Apr.18,2016	Apr.17,2017
L		l	1	I	<u> </u>	

Reference No.: WTS16S1164343-4E V1 Page 11 of 67

## **6.2** Measurement Uncertainty

Parameter	Uncertainty	
Radio Frequency	± 1 x 10 <sup>-6</sup>	
RF Power	± 1.0 dB	
RF Power Density	± 2.2 dB	
Redicted Spurious Emissions tost	± 5.03 dB (Bilog antenna 30M~1000MHz)	
Radiated Spurious Emissions test	± 5.47 dB (Horn antenna 1000M~25000MHz)	
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)	

## 6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

Reference No.: WTS16S1164343-4E V1 Page 12 of 67

## 7 RF OUTPUT POWER

Test Requirement: FCC Part 2.1046, 24.232 (c) 27.50(c),27.50(d)

Test Method: TIA/EIA-603-D:2010

Test Mode: Transmitting

## 7.1 EUT Operation


Operating Environment:

Temperature: 22.5 °C
Humidity: 52.1 % RH
Atmospheric Pressure: 101.2kPa

#### 7.2 Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



#### Radiated method:

- 1. The setup of EUT is according with per TIA/EIA Standard 603D:2010.
- 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

## 7.3 Test Result

## **Conducted Power**

## LTE Band 2:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.37	23.0±1	/
				1	2	23.4	23.0±1	/
				1	5	23.37	23.0±1	/
			QPSK	3	0	23.39	22.5±1	1
				3	1	23.38	22.5±1	/
				3	2	23.37	22.5±1	/
	18607	1850.7		6	0	22.28	22.5±1	0.5
	10007	1650.7		1	0	22.35	22.0±1	1.0
				1	2	22.43	22.0±1	1.0
				1	5	22.37	22.0±1	1.0
			16QAM	3	0	22.32	22.0±1	1.0
				3	1	21.74	22.0±1	1.0
				3	2	21.79	22.0±1	1.0
				6	0	21.06	22.0±1	1.0
				1	0	23.38	23.0±1	/
				1	2	23.46	23.0±1	1
				1	5	23.36	23.0±1	1
		1880	QPSK	3	0	23.41	22.5±1	1
				3	1	23.35	22.5±1	/
				3	2	23.46	22.5±1	/
4 4 5 4 1 1 -	10000			6	0	22.63	22.5±1	0.5
1.4MHz	18900			1	0	23.05	22.5±1	0.5
				1	2	23.04	22.5±1	0.5
				1	5	23.02	22.5±1	0.5
			16QAM	3	0	22.99	22.0±1	1.0
				3	1	22.93	22.0±1	1.0
				3	2	22.98	22.0±1	1.0
				6	0	21.57	22.0±1	1.0
				1	0	23.41	23.0±1	1
				1	2	23.52	23.0±1	/
				1	5	23.45	23.0±1	/
			QPSK	3	0	23.46	22.5±1	/
				3	1	23.46	22.5±1	/
				3	2	23.42	22.5±1	/
	10102	1909.3		6	0	22.02	22.5±1	0.5
	19193	1909.3		1	0	22.43	22.0±1	1.0
				1	2	22.48	22.0±1	1.0
				1	5	22.47	22.0±1	1.0
			16QAM	3	0	22.69	22.0±1	1.0
				3	1	22.66	22.0±1	1.0
				3	2	22.64	22.0±1	1.0
				6	0	21.48	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.13	23.0±1	/
				1	8	23.23	23.0±1	1
				1	14	23.17	23.0±1	1
			QPSK	6	0	22.21	22.5±1	0.5
				6	4	22.27	22.5±1	0.5
				6	9	22.27	22.5±1	0.5
	18615	1851.5		15	0	22.24	22.5±1	0.5
	10015	1001.0		1	0	22.05	22.0±1	1.0
				1	8	22.05	22.0±1	1.0
				1	14	22.02	22.0±1	1.0
			16QAM	6	0	21.32	22.0±1	1.0
				6	4	21.28	22.0±1	1.0
				6	9	21.24	22.0±1	1.0
				15	0	21.3	22.0±1	1.0
				1	0	23.61	23.0±1	/
				1	8	23.68	23.0±1	/
			QPSK	1	14	23.61	23.0±1	/
				6	0	22.64	22.5±1	0.5
				6	4	22.68	22.5±1	0.5
				6	9	22.67	22.5±1	0.5
2N4LI=	10000	1000		15	0	22.65	22.5±1	0.5
3MHz	18900	1880		1	0	23	22.5±1	0.5
				1	8	23.08	22.5±1	0.5
				1	14	23.04	22.5±1	0.5
			16QAM	6	0	21.79	22.0±1	1.0
				6	4	21.79	22.0±1	1.0
				6	9	21.77	22.0±1	1.0
				15	0	21.68	22.0±1	1.0
				1	0	23.34	23.0±1	/
				1	8	23.43	23.0±1	/
				1	14	23.4	23.0±1	/
			QPSK	6	0	22.45	22.5±1	0.5
				6	4	22.48	22.5±1	0.5
				6	9	22.49	22.5±1	0.5
	40405	4000.5		15	0	22.47	22.5±1	0.5
	19185	1908.5		1	0	22.37	22.0±1	1.0
				1	8	22.37	22.0±1	1.0
				1	14	22.3	22.0±1	1.0
			16QAM	6	0	21.41	22.0±1	1.0
				6	4	21.46	22.0±1	1.0
				6	9	21.44	22.0±1	1.0
				15	0	21.4	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.31	23.0±1	1
				1	12	23.32	23.0±1	1
				1	24	23.34	23.0±1	1
			QPSK	12	0	22.34	22.5±1	0.5
				12	6	22.35	22.5±1	0.5
				12	11	22.35	22.5±1	0.5
	10005	1050 F		25	0	22.29	22.5±1	0.5
	18625	1852.5		1	0	22.47	22.0±1	1.0
				1	12	22.47	22.0±1	1.0
				1	24	22.51	22.0±1	1.0
			16QAM	12	0	21.41	22.0±1	1.0
				12	6	21.43	22.0±1	1.0
				12	11	21.44	22.0±1	1.0
				25	0	21.34	22.0±1	1.0
				1	0	23.7	23.0±1	/
		00 1880		1	12	23.71	23.0±1	1
			QPSK	1	24	23.73	23.0±1	/
				12	0	22.79	22.5±1	0.5
				12	6	22.78	22.5±1	0.5
				12	11	22.77	22.5±1	0.5
53411	40000			25	0	22.73	22.5±1	0.5
5MHz	18900		16QAM	1	0	23.23	22.5±1	0.5
				1	12	23.25	22.5±1	0.5
				1	24	23.23	22.5±1	0.5
				12	0	21.92	22.0±1	1.0
				12	6	21.89	22.0±1	1.0
				12	11	21.91	22.0±1	1.0
				25	0	21.79	22.0±1	1.0
				1	0	23.53	23.0±1	/
				1	12	23.53	23.0±1	/
				1	24	23.56	23.0±1	/
			QPSK	12	0	22.5	22.5±1	0.5
				12	6	22.53	22.5±1	0.5
				12	11	22.52	22.5±1	0.5
	10175	1007.5		25	0	22.46	22.5±1	0.5
	19175	1907.5		1	0	22.57	22.0±1	1.0
				1	12	22.56	22.0±1	1.0
				1	24	22.53	22.0±1	1.0
			16QAM	12	0	21.54	22.0±1	1.0
				12	6	21.58	22.0±1	1.0
			-	12	11	21.6	22.0±1	1.0
				25	0	21.44	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.34	23.0±1	/
				1	24	23.4	23.0±1	/
				1	49	23.41	23.0±1	/
			QPSK	25	0	22.3	22.5±1	0.5
				25	12	22.31	22.5±1	0.5
				25	24	22.25	22.5±1	0.5
	10050	1055		50	0	22.25	22.5±1	0.5
	18650	1855		1	0	22.1	22.0±1	1.0
				1	24	22.15	22.0±1	1.0
				1	49	22.15	22.0±1	1.0
			16QAM	25	0	21.28	22.0±1	1.0
i				25	12	21.25	22.0±1	1.0
				25	24	21.29	22.0±1	1.0
i				50	0	21.26	22.0±1	1.0
				1	0	23.67	23.0±1	1
				1	24	23.69	23.0±1	1
				1	49	23.77	23.0±1	1
		1880	QPSK	25	0	22.74	22.5±1	0.5
				25	12	22.7	22.5±1	0.5
				25	24	22.71	22.5±1	0.5
10MHz	10000			50	0	22.74	22.5±1	0.5
TUIVITZ	18900			1	0	23.05	22.5±1	0.5
				1	24	23.07	22.5±1	0.5
				1	49	23.1	22.5±1	0.5
			16QAM	25	0	21.78	22.0±1	1.0
				25	12	21.77	22.0±1	1.0
				25	24	21.79	22.0±1	1.0
				50	0	21.77	22.0±1	1.0
				1	0	23.47	23.0±1	1
				1	24	23.44	23.0±1	1
				1	49	23.52	23.0±1	1
			QPSK	25	0	22.46	22.5±1	0.5
				25	12	22.48	22.5±1	0.5
				25	24	22.51	22.5±1	0.5
	10150	1005		50	0	22.51	22.5±1	0.5
	19150	1905		1	0	22.45	22.0±1	1.0
				1	24	22.43	22.0±1	1.0
				1	49	22.49	22.0±1	1.0
			16QAM	25	0	21.61	22.0±1	1.0
				25	12	21.56	22.0±1	1.0
				25	24	21.59	22.0±1	1.0
				50	0	21.57	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.36	23.0±1	1
				1	37	23.34	23.0±1	1
				1	74	23.4	23.0±1	1
			QPSK	36	0	22.39	22.5±1	0.5
				36	16	22.42	22.5±1	0.5
				36	35	22.42	22.5±1	0.5
	18675	1857.5		75	0	22.43	22.5±1	0.5
	10075	1007.5		1	0	22.25	22.0±1	1.0
				1	37	22.21	22.0±1	1.0
				1	74	22.34	22.0±1	1.0
			16QAM	36	0	21.35	22.0±1	1.0
				36	16	21.42	22.0±1	1.0
				36	35	21.41	22.0±1	1.0
				75	0	21.44	22.0±1	1.0
				1	0	23.72	23.0±1	1
		0 1880		1	37	23.7	23.0±1	1
			QPSK	1	74	23.78	23.0±1	1
				36	0	22.74	22.5±1	0.5
				36	16	22.73	22.5±1	0.5
				36	35	22.75	22.5±1	0.5
15MHz	18900			75	0	22.72	22.5±1	0.5
TOWNTZ	10300			1	0	23.04	22.5±1	0.5
				1	37	23.08	22.5±1	0.5
				1	74	23.07	22.5±1	0.5
				36	0	21.7	22.0±1	1.0
				36	16	21.72	22.0±1	1.0
				36	35	21.73	22.0±1	1.0
				75	0	21.69	22.0±1	1.0
				1	0	23.41	23.0±1	1
				1	37	23.32	23.0±1	1
				1	74	23.49	23.0±1	1
			QPSK	36	0	22.4	22.5±1	0.5
				36	16	22.54	22.5±1	0.5
				36	35	22.54	22.5±1	0.5
	19125	1902.5		75	0	22.55	22.5±1	0.5
	10120	1002.0		1	0	22.81	22.0±1	1.0
				1	37	22.74	22.0±1	1.0
				1	74	22.78	22.0±1	1.0
			16QAM	36	0	21.45	22.0±1	1.0
				36	16	21.48	22.0±1	1.0
				36	35	21.48	22.0±1	1.0
				75	0	21.57	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.39	23.0±1	1
				1	49	23.37	23.0±1	1
				1	99	23.5	23.0±1	1
			QPSK	50	0	22.39	22.5±1	0.5
				50	24	22.38	22.5±1	0.5
				50	49	22.47	22.5±1	0.5
	40700	1000		100	0	22.42	22.5±1	0.5
	18700	1860		1	0	22.92	22.0±1	1.0
				1	49	22.89	22.0±1	1.0
				1	99	23.08	22.0±1	1.0
			16QAM	50	0	21.37	22.0±1	1.0
				50	24	21.36	22.0±1	1.0
				50	49	21.45	22.0±1	1.0
				100	0	21.42	22.0±1	1.0
				1	0	23.7	23.0±1	1
				1	49	23.7	23.0±1	1
			QPSK	1	99	23.79	23.0±1	1
				50	0	22.85	22.5±1	0.5
		1880		50	24	22.97	22.5±1	0.5
				50	49	22.76	22.5±1	0.5
20MHz	10000			100	0	22.73	22.5±1	0.5
ZUIVIMZ	18900			1	0	23.14	22.5±1	0.5
				1	49	23.16	22.5±1	0.5
				1	99	23.19	22.5±1	0.5
			16QAM	50	0	21.79	22.0±1	1.0
				50	24	21.75	22.0±1	1.0
				50	49	21.78	22.0±1	1.0
				100	0	21.77	22.0±1	1.0
				1	0	23.64	23.0±1	1
				1	49	23.56	23.0±1	1
				1	99	23.7	23.0±1	1
			QPSK	50	0	22.59	22.5±1	0.5
				50	24	22.58	22.5±1	0.5
				50	49	22.57	22.5±1	0.5
	10100	1900		100	0	22.58	22.5±1	0.5
11	19100	1900		1	0	22.99	22.0±1	1.0
				1	49	22.85	22.0±1	1.0
				1	99	22.93	22.0±1	1.0
			16QAM	50	0	21.57	22.0±1	1.0
				50	24	21.55	22.0±1	1.0
			-	50	49	21.57	22.0±1	1.0
				100	0	21.58	22.0±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.87	23.0±1	/
				1	2	23.85	23.0±1	/
				1	5	23.88	23.0±1	1
			QPSK	3	0	23.15	22.5±1	1
				3	1	23.28	22.5±1	1
				3	2	23.09	22.5±1	1
	19957	1710.7		6	0	22.83	22.5±1	0.5
	19957	1710.7		1	0	22.97	22.5±1	0.5
				1	2	22.98	22.5±1	0.5
				1	5	22.99	22.5±1	0.5
			16QAM	3	0	22.99	22.5±1	0.5
				3	1	22.95	22.5±1	0.5
				3	2	22.99	22.5±1	0.5
				6	0	21.98	22.5±1	0.5
				1	0	23.84	23.0±1	1
			QPSK	1	2	23.83	23.0±1	1
				1	5	23.83	23.0±1	1
				3	0	23.22	22.5±1	1
		Q. S.t	3	1	23.26	22.5±1	1	
			3	2	23.16	22.5±1	1	
1.4MHz	4 4041	1732.5		6	0	22.83	22.5±1	0.5
1. <del>4</del> IVITZ	20175			1	0	23.21	22.5±1	0.5
				1	2	23.16	22.5±1	0.5
				1	5	23.19	22.5±1	0.5
			16QAM	3	0	23.1	22.5±1	0.5
				3	1	23.04	22.5±1	0.5
				3	2	23.06	22.5±1	0.5
				6	0	21.7	22.5±1	0.5
				1	0	23.78	23.0±1	/
				1	2	23.78	23.0±1	1
				1	5	23.8	23.0±1	1
			QPSK	3	0	23.37	22.5±1	1
				3	1	23.17	22.5±1	1
				3	2	23.25	22.5±1	1
	00000	47540		6	0	22.83	22.5±1	0.5
	20393	1754.3		1	0	22.81	22.5±1	0.5
				1	2	22.81	22.5±1	0.5
				1	5	22.85	22.5±1	0.5
			16001		-			
			16QAM		0	23.04	22.5±1	0.5
			16QAM	3	0	23.04 23.03	22.5±1 22.5±1	0.5 0.5
			16QAM		0 1 2	23.04 23.03 23.04	22.5±1 22.5±1 22.5±1	0.5 0.5 0.5

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.85	23.0±1	1
				1	8	23.88	23.0±1	1
				1	14	23.8	23.0±1	1
			QPSK	6	0	22.9	22.5±1	0.5
				6	4	22.91	22.5±1	0.5
				6	9	22.91	22.5±1	0.5
	10065	1711 E		15	0	22.89	22.5±1	0.5
	19965	1711.5		1	0	22.77	22.5±1	0.5
				1	8	22.78	22.5±1	0.5
				1	14	22.7	22.5±1	0.5
			16QAM	8	0	22.03	22.5±1	0.5
				8	4	22.02	22.5±1	0.5
				8	9	22.01	22.5±1	0.5
				15	0	21.92	22.5±1	0.5
				1	0	23.82	23.0±1	/
			QPSK	1	8	23.86	23.0±1	/
				1	14	23.82	23.0±1	/
				6	0	22.85	22.5±1	0.5
20475			6	4	22.86	22.5±1	0.5	
	1732.5		6	9	22.86	22.5±1	0.5	
			15	0	22.84	22.5±1	0.5	
3MHz	20175	1/32.5		1	0	23.16	22.5±1	0.5
				1	8	23.21	22.5±1	0.5
				1	14	23.18	22.5±1	0.5
			16QAM	6	0	21.93	22.5±1	0.5
				6	4	21.95	22.5±1	0.5
				6	9	21.93	22.5±1	0.5
				15	0	21.87	22.5±1	0.5
				1	0	23.75	23.0±1	/
				1	8	23.8	23.0±1	/
				1	14	23.78	23.0±1	/
			QPSK	6	0	22.84	22.5±1	0.5
				6	4	22.86	22.5±1	0.5
				6	9	22.88	22.5±1	0.5
	20205	1750 5		15	0	22.85	22.5±1	0.5
2	20385	1753.5		1	0	22.79	22.5±1	0.5
				1	8	22.81	22.5±1	0.5
				1	14	22.79	22.5±1	0.5
			16QAM	8	0	21.85	22.5±1	0.5
				8	4	21.89	22.5±1	0.5
			-	8	9	21.9	22.5±1	0.5
				15	0	21.79	22.5±1	0.5

16QAM

12

12

12

25

0

24

49

0

21.93

21.93

21.92

21.8

22.5±1

22.5±1

22.5±1

22.5±1

0.5

0.5

0.5

0.5

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.97	23.0±1	/
				1	49	23.96	23.0±1	1
				1	99	23.92	23.0±1	/
			QPSK	25	0	22.94	22.5±1	0.5
				25	24	22.93	22.5±1	0.5
				25	49	22.96	22.5±1	0.5
	20000	1715		50	0	22.97	22.5±1	0.5
	20000	1715		1	0	22.9	22.5±1	0.5
				1	49	22.8	22.5±1	0.5
				1	99	22.86	22.5±1	0.5
			16QAM	25	0	21.98	22.5±1	0.5
				25	24	21.95	22.5±1	0.5
				25	49	21.97	22.5±1	0.5
				50	0	21.95	22.5±1	0.5
				1	0	23.87	23.0±1	1
			QPSK	1	49	23.84	23.0±1	1
				1	99	23.87	23.0±1	1
				25	0	22.84	22.5±1	0.5
				25	24	22.85	22.5±1	0.5
		1732.5		25	49	22.87	22.5±1	0.5
10MHz	20175			50	0	22.88	22.5±1	0.5
TOWNIZ	20170			1	0	23.17	22.5±1	0.5
				1	49	23.15	22.5±1	0.5
				1	99	23.21	22.5±1	0.5
			16QAM	25	0	21.87	22.5±1	0.5
				25	24	21.88	22.5±1	0.5
				25	49	21.92	22.5±1	0.5
				50	0	21.91	22.5±1	0.5
				1	0	23.82	23.0±1	/
				1	49	23.74	23.0±1	/
				1	99	23.81	23.0±1	1
			QPSK	25	0	22.81	22.5±1	0.5
				25	24	22.81	22.5±1	0.5
				25	49	22.82	22.5±1	0.5
	20350	1750		50	0	22.85	22.5±1	0.5
				1	0	22.87	22.5±1	0.5
				1	49	22.75	22.5±1	0.5
				1	99	22.82	22.5±1	0.5
			16QAM	25	0	21.92	22.5±1	0.5
			1000/11/1	25	24	21.9	22.5±1	0.5
				25	49	21.91	22.5±1	0.5
				50	0	21.88	22.5±1	0.5

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.98	23.0±1	1
				1	49	23.97	23.0±1	1
				1	99	23.99	23.0±1	1
			QPSK	36	0	22.99	22.5±1	0
				36	24	23.01	22.5±1	0.5
				36	49	23.03	22.5±1	0.5
	20025	1717.5		75	0	23.02	22.5±1	0.5
	20025	1717.5		1	0	22.9	22.5±1	0.5
				1	49	22.87	22.5±1	0.5
				1	99	22.9	22.5±1	0.5
			16QAM	36	0	21.96	22.5±1	0.5
				36	24	21.98	22.5±1	0.5
				36	49	22	22.5±1	0.5
				75	0	22	22.5±1	0.5
			QPSK	1	0	23.9	23.0±1	1
				1	49	23.89	23.0±1	1
				1	99	23.92	23.0±1	1
				36	0	22.9	22.5±1	0.5
			36	24	22.91	22.5±1	0.5	
			36	49	22.9	22.5±1	0.5	
15MHz	20175	1732.5		75	0	22.91	22.5±1	0.5
IOIVIEZ	20175			1	0	23.21	22.5±1	0.5
				1	49	23.22	22.5±1	0.5
				1	99	23.29	22.5±1	0.5
			16QAM	36	0	21.91	22.5±1	0.5
				36	24	21.92	22.5±1	0.5
				36	49	21.92	22.5±1	0.5
				75	0	21.91	22.5±1	0.5
				1	0	23.96	23.0±1	1
				1	49	23.89	23.0±1	1
				1	99	23.95	23.0±1	/
			QPSK	36	0	22.94	22.5±1	0.5
				36	24	22.92	22.5±1	0.5
				36	49	22.92	22.5±1	0.5
	20225	1747 E		75	0	22.95	22.5±1	0.5
20	20325	1747.5		1	0	23.35	22.5±1	0.5
				1	49	23.2	22.5±1	0.5
				1	99	23.24	22.5±1	0.5
			16QAM	36	0	21.86	22.5±1	0.5
			16QAM	36	24	21.85	22.5±1	0.5
				36	49	21.86	22.5±1	0.5
				75	0	21.91	22.5±1	0.5

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
				1	0	23.95	23.0±1	1
				1	49	23.87	23.0±1	1
				1	99	24.01	23.0±1	1
			QPSK	50	0	23	22.5±1	0.5
				50	24	22.97	22.5±1	0.5
				50	49	23.01	22.5±1	0.5
	20050	1720		100	0	22.97	22.5±1	0.5
	20050	1720		1	0	23.43	22.5±1	0.5
				1	49	23.4	22.5±1	0.5
				1	99	23.35	22.5±1	0.5
			16QAM	50	0	22.02	22.5±1	0.5
				50	24	22.01	22.5±1	0.5
				50	49	22.02	22.5±1	0.5
				100	0	22	22.5±1	0.5
				1	0	23.89	23.0±1	/
			QPSK	1	49	23.8	23.0±1	/
				1	99	23.94	23.0±1	/
				50	0	22.88	22.5±1	0.5
				50	24	22.91	22.5±1	0.5
				50	49	23.07	22.5±1	0.5
20MHz	20175	1732.5		100	0	22.87	22.5±1	0.5
ZUIVITZ	20175	1732.5		1	0	23.31	22.5±1	0.5
				1	49	23.27	22.5±1	0.5
				1	99	23.41	22.5±1	0.5
			16QAM	50	0	21.89	22.5±1	0.5
				50	24	21.9	22.5±1	0.5
				50	49	21.95	22.5±1	0.5
				100	0	21.89	22.5±1	0.5
				1	0	23.95	23.0±1	/
				1	49	23.87	23.0±1	/
				1	99	23.98	23.0±1	/
			QPSK	50	0	22.95	22.5±1	0.5
				50	24	22.91	22.5±1	0.5
				50	49	22.9	22.5±1	0.5
	20200	1745		100	0	22.92	22.5±1	0.5
	20300	1745		1	0	23.35	22.5±1	0.5
				1	49	23.26	22.5±1	0.5
				1	99	23.32	22.5±1	0.5
		I	400 444		_			

Page 24 of 67

16QAM

50

50

50

100

0

24

49

0

21.94

21.92

21.88

21.92

22.5±1

22.5±1

22.5±1

22.5±1

0.5

0.5

0.5

0.5

## **ERP and EIRP**

## LTE Band 2

	D i	Turn	RX Ant		Danu Z	Substitute	ed	A la a a la sta	Part	24E
Frequency	Receiver Reading	table Angle	Height	Polar	SG Level	Cable	Antenna Gain	Absolute Level	Limit	Margin
(MHz)	(dBµV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
		L	TE Band 2	Channel		.4MHz –	QPSK			
1850.70	78.22	164	1.0	Н	4.25	0.31	10.40	14.34	33	-18.66
1850.70	84.59	93	1.4	V	11.31	0.31	10.40	21.40	33	-11.60
		L	TE Band 2	Channel '	18900 –	1.4MHz –	QPSK			
1880.00	78.42	274	1.6	Н	4.57	0.31	10.40	14.66	33	-18.34
1880.00	84.26	115	1.8	V	11.14	0.31	10.40	21.23	33	-11.77
		L	TE Band 2	Channel '	19193 –	1.4MHz –	QPSK			
1909.30	77.80	50	1.3	Н	4.07	0.32	10.40	14.15	33	-18.85
1909.30	84.34	358	2.4	V	11.38	0.32	10.40	21.46	33	-11.54
	•	L	TE Band 2 (	Channel 1	8607 – 1	.4MHz –	16QAM			•
1850.70	77.90	104	2.2	Н	3.93	0.31	10.40	14.02	33	-18.98
1850.70	84.86	172	1.6	V	11.58	0.31	10.40	21.67	33	-11.33
		L7	E Band 2 C	Channel 1	8900 – 1	.4MHz –	16QAM			
1880.00	79.16	157	1.8	Н	5.31	0.31	10.40	15.40	33	-17.60
1880.00	84.22	347	2.1	V	11.10	0.31	10.40	21.19	33	-11.81
		L7	E Band 2 C	Channel 1	9193 – 1	.4MHz –	16QAM			•
1909.30	77.17	1	1.6	Н	3.44	0.32	10.40	13.52	33	-19.48
1909.30	84.04	319	1.1	V	11.08	0.32	10.40	21.16	33	-11.84
	•		LTE Band 2	Channel	18615 –	3MHz – 0	QPSK			•
1850.70	77.61	198	1.6	Н	3.64	0.31	10.40	13.73	33	-19.27
1850.70	84.12	39	1.4	V	10.84	0.31	10.40	20.93	33	-12.07
			LTE Band 2	Channel	18900 –	3MHz – 0	QPSK			
1880.00	76.74	294	2.3	Н	2.89	0.31	10.40	12.98	33	-20.02
1880.00	84.65	116	2.0	V	11.53	0.31	10.40	21.62	33	-11.38
			LTE Band 2	Channel	19185 –	3MHz – 0	PSK			
1909.30	78.94	178	2.0	Н	5.21	0.32	10.40	15.29	33	-17.71
1909.30	84.55	206	2.0	V	11.59	0.32	10.40	21.67	33	-11.33
	•	L	TE Band 2	Channel	18615 – 3	3MHz – 1	6QAM			
1850.70	77.41	268	2.0	Н	3.44	0.31	10.40	13.53	33	-19.47
1850.70	84.22	271	2.3	V	10.94	0.31	10.40	21.03	33	-11.97
		L	TE Band 2	Channel	18900 –	3MHz – 1	6QAM			
1880.00	77.48	175	2.1	Н	3.63	0.31	10.40	13.72	33	-19.28
1880.00	84.50	309	2.1	V	11.38	0.31	10.40	21.47	33	-11.53
		L	TE Band 2	Channel	19185 –	3MHz – 1	6QAM			
1909.30	77.50	145	1.4	Н	3.77	0.32	10.40	13.85	33	-19.15
1909.30	84.96	218	2.2	V	12.00	0.32	10.40	22.08	33	-10.92
			LTE Band 2	Channel	18625 –	5MHz – 0	QPSK			
1850.70	79.42	311	2.5	Н	5.45	0.31	10.40	15.54	33	-17.46
1850.70	84.20	157	2.3	V	10.92	0.31	10.40	21.01	33	-11.99
			LTE Band 2	2 Channel	18900 –	5MHz – 0	QPSK			
1880.00	79.88	81	1.0	Н	6.03	0.31	10.40	16.12	33	-16.88

1880.00		102	1.3	V	11.17	0.31	10.40	21.26	33	-11.74
	84.29	102	LTE Band 2	•		L		21.20	- 55	-11.74
1909.30	79.93	312	2.1	Н	6.20	0.32	10.40	16.28	33	-16.72
1909.30	84.45	131	1.1	V	11.49	0.32	10.40	21.57	33	-11.43
1909.50	04.40		TE Band 2	-	l			21.37	33	-11.43
1050.70	70.66	17	1	1	1			15 70	22	17.00
1850.70 1850.70	79.66 84.09	13	2.4 1.3	H V	5.69 10.81	0.31	10.40 10.40	15.78 20.90	33 33	-17.22 -12.10
1650.70	04.09		TE Band 2	•		L		20.90	33	-12.10
1880.00	78.77	356	1.9	H	4.92	0.31		15.01	33	-17.99
1880.00	84.50	38	1.1	V	11.38	0.31	10.40 10.40	21.47	33	-11.53
1000.00	04.30		TE Band 2	-	l .			21.47	33	-11.55
1000 20	76 70		1	1	1	1		12.14	22	10.06
1909.30	76.79	266	1.0 1.8	H V	3.06	0.32	10.40	13.14	33 33	-19.86
1909.30	84.64	276	I .	-	11.68	0.32	10.40	21.76	33	-11.24
1050.70	76.07		LTE Band 2			1		40.00	22	20.64
1850.70	76.27	41	1.8	H V	2.30	0.31	10.40	12.39	33	-20.61
1850.70	84.37	155	1.8	-	11.09	0.31	10.40	21.18	33	-11.82
1000.00	70.40		LTE Band 2	1	1	1		44.07	00	10.00
1880.00	78.43	333	2.4	H	4.58	0.31	10.40	14.67	33	-18.33
1880.00	84.17	73	1.9	Ob are real	11.05	0.31	10.40	21.14	33	-11.86
1000.00	70.00		LTE Band 2					40.00	00	00.00
1909.30	76.63	232	1.3	Н	2.90	0.32	10.40	12.98	33	-20.02
1909.30	84.24	91	2.4 TE D. 10	V	11.28	0.32	10.40	21.36	33	-11.64
			TE Band 2	1	1	1		1		1
1850.70	77.54	327	1.1	Н	3.57	0.31	10.40	13.66	33	-19.34
1850.70	84.05	300	2.0	V	10.77	0.31	10.40	20.86	33	-12.14
			TE Band 2 (	1		1				
1880.00	77.16	303	1.7	Н	3.31	0.31	10.40	13.40	33	-19.60
1880.00	84.85	173	2.5	V	11.73	0.31	10.40	21.82	33	-11.18
			TE Band 2					1	Т	1
1909.30	76.68	172	1.5	Н	2.95	0.32	10.40	13.03	33	-19.97
1909.30	84.68	152	2.5	V	11.72	0.32	10.40	21.80	33	-11.20
			LTE Band 2			ı	1	ı	ı	1
1850.70	76.95	296	2.3	Н	2.98	0.31	10.40	13.07	33	-19.93
1850.70	84.59	265	1.9	V	11.31	0.31	10.40	21.40	33	-11.60
			LTE Band 2			1	1	T	T	1
1880.00	76.49	290	1.9	Н	2.64	0.31	10.40	12.73	33	-20.27
1880.00	84.66	219	1.6	V	11.54	0.31	10.40	21.63	33	-11.37
			LTE Band 2	Channel	19125 – <sup>1</sup>	15MHz –	QPSK	1		
1909.30	79.14	132	1.1	Н	5.41	0.32	10.40	15.49	33	-17.51
1909.30	84.47	94	1.9	V	11.51	0.32	10.40	21.59	33	-11.41
		L	TE Band 2	Channel '	18675 – 1	5MHz – 1	16QAM			
1850.70	77.91	225	1.8	Н	3.94	0.31	10.40	14.03	33	-18.97
1850.70	84.34	254	1.4	V	11.06	0.31	10.40	21.15	33	-11.85
		L	TE Band 2	Channel 1	8900 - 1	15MHz –	16QAM			
1880.00	77.44	314	1.5	Н	3.59	0.31	10.40	13.68	33	-19.32
1880.00	84.44	19	2.1	V	11.32	0.31	10.40	21.41	33	-11.59
		L	TE Band 2	Channel 1	9125 – 1	15MHz –	16QAM			
1909.30	77.06	121	1.1	Н	3.33	0.32	10.40	13.41	33	-19.59

1909.30	84.85	297	2.2	V	11.89	0.32	10.40	21.97	33	-11.03
		L	TE Band 2	Channel	18700 – 2	20MHz –	QPSK			
1850.70	78.12	216	1.2	Н	4.15	0.31	10.40	14.24	33	-18.76
1850.70	84.80	309	1.8	V	11.52	0.31	10.40	21.61	33	-11.39
		L	TE Band 2	Channel	18900 – 2	20MHz –	QPSK			
1880.00	76.09	335	1.3	Н	2.24	0.31	10.40	12.33	33	-20.67
1880.00	84.57	61	2.3	V	11.45	0.31	10.40	21.54	33	-11.46
		Ĺ	TE Band 2	Channel	19100 – 2	20MHz –	QPSK			
1909.30	79.38	45	1.0	Н	5.65	0.32	10.40	15.73	33	-17.27
1909.30	84.86	246	1.7	V	11.90	0.32	10.40	21.98	33	-11.02
		Ľ	TE Band 2	Channel <sup>*</sup>	18670 – 2	0MHz – 1	6QAM			
1850.70	79.61	18	1.2	Н	5.64	0.31	10.40	15.73	33	-17.27
1850.70	84.28	40	2.2	V	11.00	0.31	10.40	21.09	33	-11.91
		Ľ	TE Band 2 (	Channel 1	8900 – 2	20MHz – 1	16QAM			
1880.00	78.20	74	2.5	Н	4.35	0.31	10.40	14.44	33	-18.56
1880.00	84.16	93	2.1	V	11.04	0.31	10.40	21.13	33	-11.87
		L	TE Band 2 (	Channel 1	9100 – 2	20MHz – 1	16QAM			
1909.30	79.11	138	1.4	Н	5.38	0.32	10.40	15.46	33	-17.54
1909.30	84.17	273	1.9	V	11.21	0.32	10.40	21.29	33	-11.71

## LTE Band 4

	Doggiver	Turn	RX Ant	enna		Substitute	ed	Abaqluta	Par	t 27
Frequency	Receiver Reading	table Angle	Height	Polar	SG Level	Cable	Antenna Gain	Absolute Level	Limit	Margin
(MHz)	(dBµV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
		L	TE Band 4	Channel	19957 – 1	.4MHz –	QPSK			
1710.70	76.90	221	1.5	Н	2.79	0.31	10.40	12.88	30	-17.12
1710.70	84.40	329	2.5	V	10.87	0.31	10.40	20.96	30	-9.04
		L	TE Band 4	Channel	20175 – 1	.4MHz –	QPSK			
1710.70	77.29	117	1.6	Н	3.18	0.30	9.40	12.28	30	-17.72
1710.70	84.99	21	1.3	V	11.46	0.30	9.40	20.56	30	-9.44
		L	TE Band 4	Channel	20393 – 1	.4MHz –	QPSK			
1732.50	76.76	167	1.7	Н	2.65	0.30	9.40	11.75	30	-18.25
1732.50	84.75	62	1.4	V	11.22	0.30	9.40	20.32	30	-9.68
		L <sup>-</sup>	TE Band 4 (	Channel 1	9957 – 1	.4MHz – 1	16QAM			
1754.30	78.34	183	1.0	Н	4.23	0.30	9.40	13.33	30	-16.67
1754.30	84.74	175	2.3	V	11.21	0.30	9.40	20.31	30	-9.69
		L <sup>-</sup>	TE Band 4 (	Channel 2	20175 – 1	.4MHz – 1	16QAM			
1710.70	77.02	292	1.7	Н	2.91	0.30	9.40	12.01	30	-17.99
1710.70	84.91	152	2.0	V	11.38	0.30	9.40	20.48	30	-9.52
		L <sup>-</sup>	TE Band 4 (	Channel 2	20393 – 1	.4MHz – 1	16QAM			
1732.50	79.99	294	2.3	Н	5.88	0.30	9.40	14.98	30	-15.02
1732.50	84.06	73	2.0	V	10.53	0.30	9.40	19.63	30	-10.37
			LTE Band 4	l Channel	19965 –	3MHz – 0	QPSK			
1754.30	76.39	286	1.7	Н	2.28	0.30	9.40	11.38	30	-18.62
1754.30	84.83	263	1.4	V	11.30	0.30	9.40	20.40	30	-9.60
			LTE Band 4	Channel	20175 –	3MHz – 0	QPSK			
1710.70	79.54	65	1.5	Н	5.43	0.30	9.40	14.53	30	-15.47

1710.70	84.71	36	1.4	V	11.18	0.30	9.40	20.28	30	-9.72
			LTE Band 4	Channe		L				
1732.50	77.13	208	1.3	Н	3.02	0.30	9.40	12.12	30	-17.88
1732.50	84.55	85	2.0	V	11.02	0.30	9.40	20.12	30	-9.88
	01.00		LTE Band 4	-			II.	20.12		0.00
1754.30	79.94	342	1.3	Н	5.83	0.30	9.40	14.93	30	-15.07
1754.30	84.62	49	2.1	V	11.09	0.30	9.40	20.19	30	-9.81
1701.00	01.02		LTE Band 4	•		L		20.10		0.01
1710.70	79.85	84	1.2	Н	5.74	0.30	9.40	14.84	30	-15.16
1710.70	84.67	232	1.1	V	11.14	0.30	9.40	20.24	30	-9.76
17 10.70	01.07		LTE Band 4	·			l	20.21		0.70
1732.50	78.24	84	1.0	Н	4.13	0.30	9.40	13.23	30	-16.77
1732.50	84.91	105	1.1	V	11.38	0.30	9.40	20.48	30	-9.52
1702.00	01.01	100	LTE Band 4	•		L		20.10		0.02
1754.30	78.64	133	2.2	Н	4.53	0.30	9.40	13.63	30	-16.37
1754.30	84.68	81	2.3	V	11.15	0.30	9.40	20.25	30	-9.75
1704.00	04.00	01	LTE Band 4	•			I.	20.20	- 00	0.70
1732.50	77.69	315	1.4	Н	3.58	0.31	10.40	13.67	30	-16.33
1732.50	84.37	340	2.3	V	10.84	0.31	10.40	20.93	30	-9.07
1702.00	04.07	0-10	LTE Band 4	•		L	I.	20.00	- 00	0.07
1752.50	79.15	5	2.0	Н	5.04	0.32	10.40	15.12	30	-14.88
1752.50	84.32	180	1.2	V	10.79	0.32	10.40	20.87	30	-9.13
1702.00	04.02		LTE Band 4	•			I.	20.01	- 00	0.10
1712.50	78.01	283	1.7	Н	3.90	0.31	10.40	13.99	30	-16.01
1712.50	84.50	180	1.8	V	10.97	0.31	10.40	21.06	30	-8.94
17 12.00	04.00		LTE Band 4	•		L	I.	21.00	- 00	0.04
1732.50	79.41	237	1.2	Н	5.30	0.31	10.40	15.39	30	-14.61
1732.50	84.59	145	2.1	V	11.06	0.31	10.40	21.15	30	-8.85
1702.00	01.00		LTE Band 4	•				21.10	- 00	0.00
1752.50	76.13	343	1.8	Н	2.02	0.32	10.40	12.10	30	-17.90
1752.50	84.49	20	1.8	V	10.96	0.32	10.40	21.04	30	-8.96
1102.00	0 11 10		LTE Band 4			l .	l .	21.01		0.00
1715.00	76.71	183	1.6	Н	2.60	0.31	10.40	12.69	30	-17.31
1715.00	84.22	66	2.2	V	10.69	0.31	10.40	20.78	30	-9.22
	0 1.22		LTE Band 4	•				20.10		0.22
1732.50	76.14	245	2.0	Н	2.03	0.31	10.40	12.12	30	-17.88
1732.50	84.24	277	1.3	V	10.71	0.31	10.40	20.80	30	-9.20
	J 1		LTE Band 4					_0.00	- 55	0.20
1750.00	78.24	115	2.4	Н	4.13	0.32	10.40	14.21	30	-15.79
1750.00	84.21	159	2.1	V	10.68	0.32	10.40	20.76	30	-9.24
1700.00	07.21		TE Band 4	•			l .	20.10	- 50	0.24
1715.00	76.49	92	1.2	H	2.38	0.31	10.40	12.47	30	-17.53
1715.00	84.68	133	2.0	V	11.15	0.31	10.40	21.24	30	-8.76
17 10.00	J 37.00		TE Band 4					<b>∠</b> 1. <b>∠</b> ¬	- 55	0.70
1732.50	78.92	245	1.2	H	4.81	0.31	10.40	14.90	30	-15.10
1732.50	84.83	170	2.2	V	11.30	0.31	10.40	21.39	30	-8.61
1702.00	04.00		TE Band 4	•				21.00	- 50	0.01
1750.00	77.70	166	1.1	H	3.59	0.32	10.40	13.67	30	-16.33
1730.00	11.10	100	1 1.1	11	5.58	0.02	10.40	10.07	50	10.00

1750.00	84.64	103	2.1	V	11.11	0.32	10.40	21.19	30	-8.81
		!	_TE Band 4	Channel	20025 – 1	15MHz –	QPSK			
1717.50	77.23	229	1.3	Н	3.12	0.31	10.40	13.21	30	-16.79
1717.50	84.68	194	1.3	V	11.15	0.31	10.40	21.24	30	-8.76
			TE Band 4	Channel	20175 – <i>1</i>	15MHz –	QPSK			
1732.50	77.02	136	1.6	Н	2.91	0.31	10.40	13.00	30	-17.00
1732.50	84.06	67	2.3	V	10.53	0.31	10.40	20.62	30	-9.38
			_TE Band 4	Channel	20325 – 1	15MHz –	QPSK			
1747.50	77.82	340	1.8	Н	3.71	0.32	10.40	13.79	30	-16.21
1747.50	84.36	323	2.1	V	10.83	0.32	10.40	20.91	30	-9.09
		L	TE Band 4	Channel 2	20025 – 1	5MHz – 1	6QAM			
1717.50	78.48	229	1.5	Н	4.37	0.31	10.40	14.46	30	-15.54
1717.50	84.63	3	1.3	V	11.10	0.31	10.40	21.19	30	-8.81
		L	TE Band 4	Channel 2	20175 – 1	5MHz – 1	6QAM			
1732.50	79.47	120	1.6	Н	5.36	0.31	10.40	15.45	30	-14.55
1732.50	84.37	224	2.1	V	10.84	0.31	10.40	20.93	30	-9.07
		L	TE Band 4	Channel 2	20325 – 1	5MHz – 1	6QAM			
1747.50	78.53	192	2.1	Н	4.42	0.32	10.40	14.50	30	-15.50
1747.50	84.07	111	1.1	V	10.54	0.32	10.40	20.62	30	-9.38
			_TE Band 4	Channel	20050 – 2	20MHz –	QPSK			
1720.00	78.03	247	1.9	Н	3.92	0.31	10.40	14.01	30	-15.99
1720.00	84.94	75	1.3	V	11.41	0.31	10.40	21.50	30	-8.50
			_TE Band 4	Channel	20175 – 2	20MHz –	QPSK			
1732.50	78.03	317	1.6	Н	3.92	0.31	10.40	14.01	30	-15.99
1732.50	84.13	175	1.8	V	10.60	0.31	10.40	20.69	30	-9.31
			_TE Band 4	Channel	20300 – 2	20MHz –	QPSK			
1745.00	76.77	265	2.2	Н	2.66	0.32	10.40	12.74	30	-17.26
1745.00	84.23	342	1.5	V	10.70	0.32	10.40	20.78	30	-9.22
		L	TE Band 4	Channel 2	20050 – 2	0MHz – 1	6QAM			
1720.00	76.65	347	1.6	Н	2.54	0.31	10.40	12.63	30	-17.37
1720.00	84.44	349	2.1	V	10.91	0.31	10.40	21.00	30	-9.00
		L	TE Band 4	Channel 2	20175 – 2	0MHz – 1	6QAM			
1732.50	77.33	304	1.0	Н	3.22	0.31	10.40	13.31	30	-16.69
1732.50	84.09	260	1.8	V	10.56	0.31	10.40	20.65	30	-9.35
		L	TE Band 4	Channel 2	20300 – 2	0MHz – 1	6QAM			
1745.00	77.98	65	1.3	Н	3.87	0.30	9.40	12.97	30	-17.03
1745.00	84.58	338	2.3	V	11.05	0.30	9.40	20.15	30	-9.85

Reference No.: WTS16S1164343-4E V1 Page 30 of 67

## 8 Peak-to-Average Ratio

Test Requirement: 24.232 (d), 27.50(d)

Test Method: N/A

Test Mode: Transmitting


## 8.1 EUT Operation

Operating Environment:

Temperature: 22.5 °C
Humidity: 52.3% RH
Atmospheric Pressure: 101.2kPa

## 8.2 Test Procedure

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. Set EUT to transmit at maximum output power.
- 3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

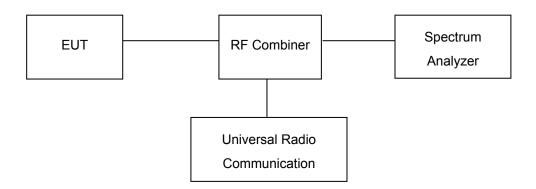

#### 8.3 Test Result

**PASS** 

#### **LTE Band**

Please refer to the Appendix Band 2/4 LTE Peak to Average Ratio.

Reference No.: WTS16S1164343-4E V1 Page 31 of 67

## 9 BANDWIDTH

Test Requirement: FCC Part 2.1049, 24.238, 27.53(a)

Test Method: TIA/EIA-603-D:2010

Test Mode: Transmitting

## 9.1 EUT Operation


Operating Environment:

Temperature: 22.5 °C
Humidity: 52.3% RH
Atmospheric Pressure: 101.2kPa

#### 9.2 Test Procedure

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 3 kHz (Cellular /PCS) and the 26 dB & 99%bandwidth was recorded.

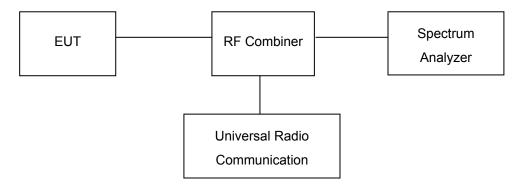

## 9.3 Test Result

LTE Band 2 (Part 24E):

LTE Band 2 (Part 24E):						
BW(MHz)	Channel	Frequency (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)	
1.4			QPSK	1.15	1.34	
	18607	1850.7	16QAM	1.15	1.33	
	18900	1880	QPSK	1.15	1.33	
1.4			16QAM	1.16	1.33	
	19193	1909.3	QPSK	1.16	1.34	
1.4			16QAM	1.15	1.33	
	18615	1851.5	QPSK	2.72	2.96	
3			16QAM	2.72	2.96	
	18900	1880	QPSK	2.73	2.96	
3			16QAM	2.73	2.96	
	19185	1908.5	QPSK	2.73	2.96	
3			16QAM	2.72	2.96	
	18625	1852.5	QPSK	4.5	4.88	
5			16QAM	4.5	4.87	
	18900	1880	QPSK	4.5	4.84	
5			16QAM	4.5	4.85	
	19175	1907.5	QPSK	4.49	4.84	
5			16QAM	4.5	4.86	
	18650	1855	QPSK	8.93	9.44	
10			16QAM	8.92	9.4	
10	18900	1880	QPSK	8.92	9.33	
			16QAM	8.91	9.35	
10	19150	1905	QPSK	8.92	9.37	
			16QAM	8.92	9.37	
15	18675	1857.5	QPSK	13.38	14.01	
			16QAM	13.37	13.99	
4-	18900	1880	QPSK	13.38	13.9	
15			16QAM	13.37	13.94	

Waltek Services (Shenzhen) Co.,Ltd.

http://www.waltek.com.cn

Reference No.: WTS16S1164343-4E V1 Page 33 of 67


15	19125	1902.5	QPSK	13.38	13.96
			16QAM	13.38	13.95
20	18700	1860	QPSK	17.84	18.44
			16QAM	17.83	18.48
20	18900	1880	QPSK	17.83	18.41
			16QAM	17.84	18.4
20	19100	1900	QPSK	17.84	18.48
			16QAM	17.85	18.47


LTE Band 4 (Part 27):


BW(MHz)	Channel	Frequency (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
	19957	1710.7	QPSK	1.15	1.33
1.4			16QAM	1.15	1.33
	20175	1732.5	QPSK	1.15	1.33
1.4			16QAM	1.16	1.33
	20393	1754.3	QPSK	1.16	1.34
1.4			16QAM	1.15	1.33
	19965	1711.5	QPSK	2.72	2.95
3			16QAM	2.72	2.95
	20175	1732.5	QPSK	2.72	2.96
3			16QAM	2.72	2.96
	20385	1753.5	QPSK	2.73	2.96
3			16QAM	2.72	2.96
5	19975	1712.5	QPSK	4.5	4.83
			16QAM	4.49	4.82
5	20175	1732.5	QPSK	4.5	4.84
			16QAM	4.49	4.84
5	20375	1752.5	QPSK	4.49	4.83
			16QAM	4.49	4.84
40	20000	1715	QPSK	9.34	10
10			16QAM	8.91	9.34


10	20175	1732.5	QPSK	8.92	9.34
			16QAM	8.92	9.37
10	20350	1750	QPSK	8.91	9.36
			16QAM	8.91	9.34
15	20025	1717.5	QPSK	13.37	13.93
			16QAM	13.36	13.92
15	20175	1732.5	QPSK	13.39	13.89
			16QAM	13.38	13.95
15	20325	1747.5	QPSK	13.36	13.93
			16QAM	13.36	13.89
20	20050	1720	QPSK	17.83	18.37
			16QAM	17.82	18.41
20	20175	1732.5	QPSK	17.84	18.43
			16QAM	17.84	18.42
20	20300	1745	QPSK	17.81	18.42
			16QAM	17.82	18.45




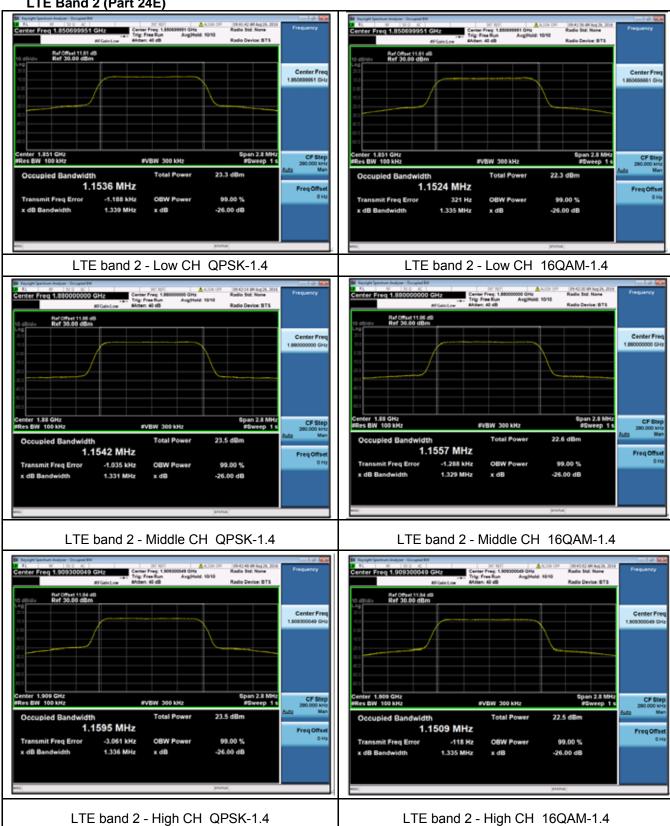


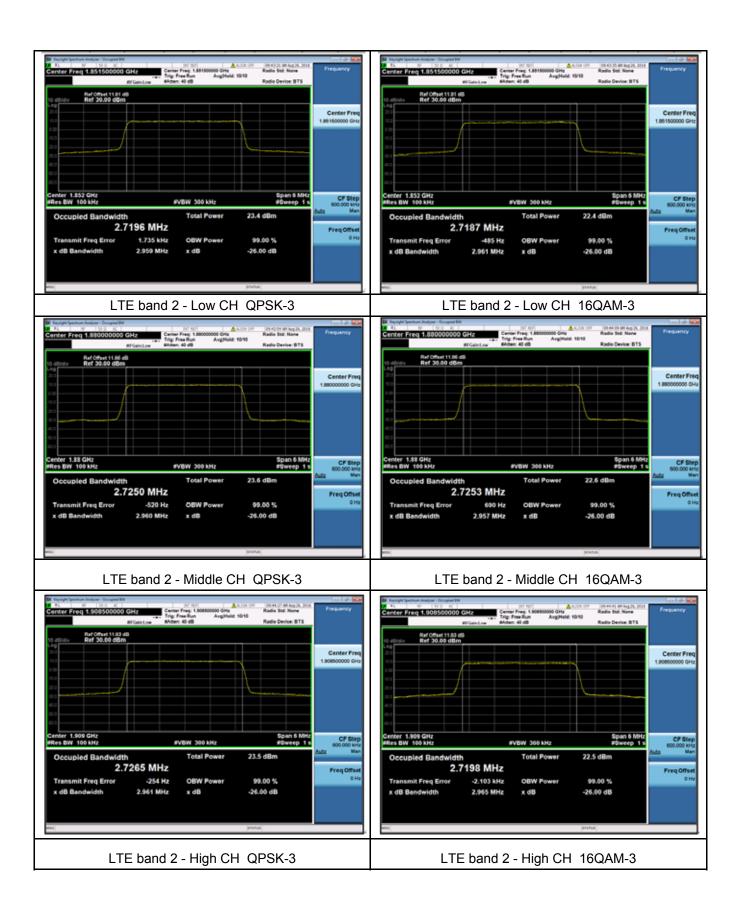


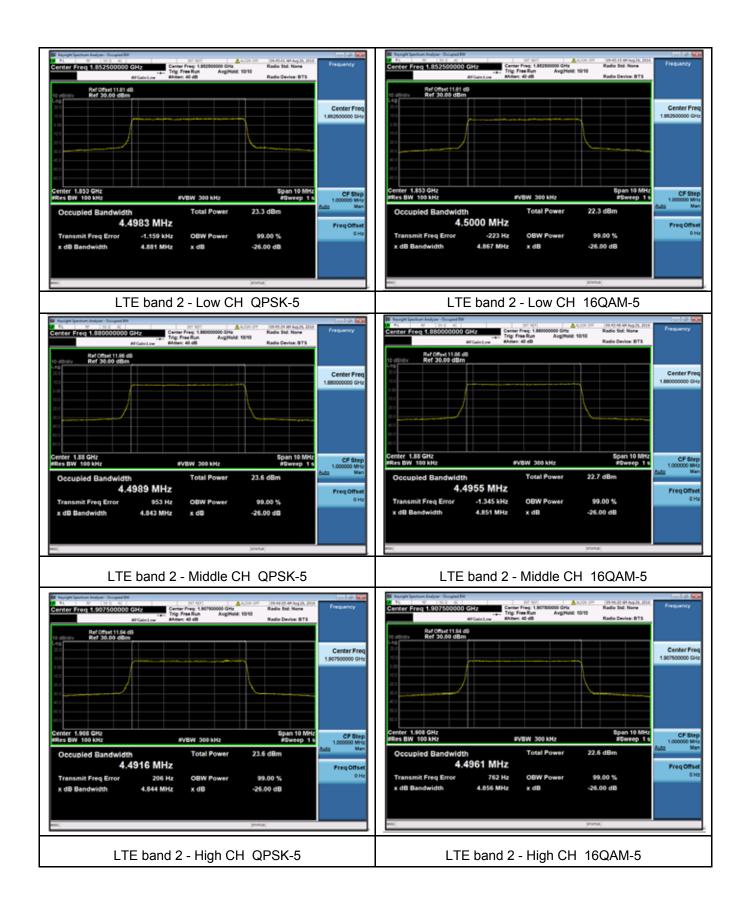


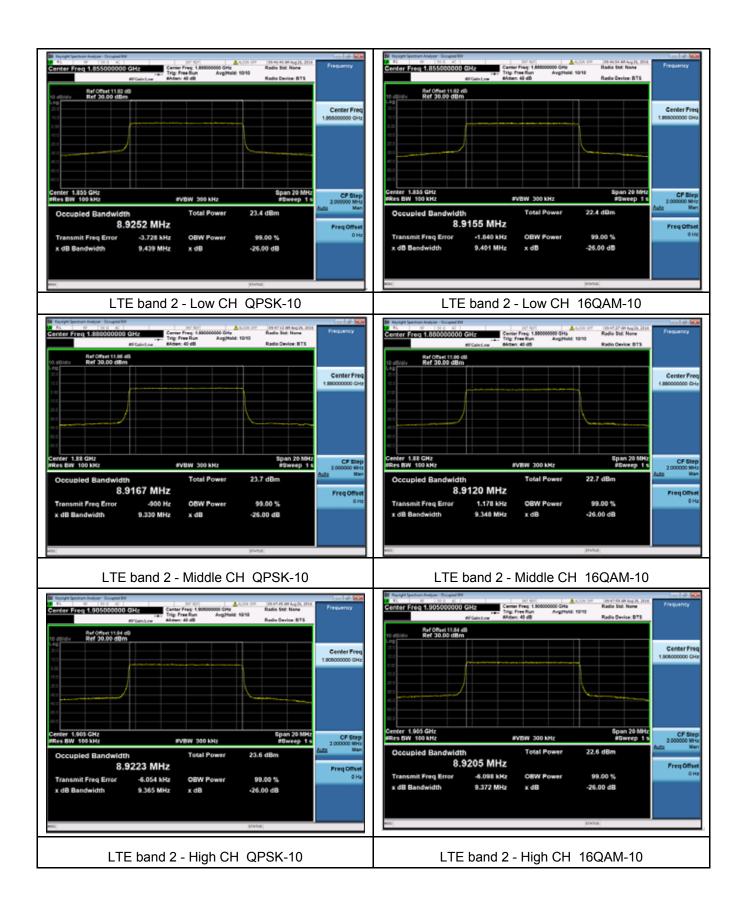


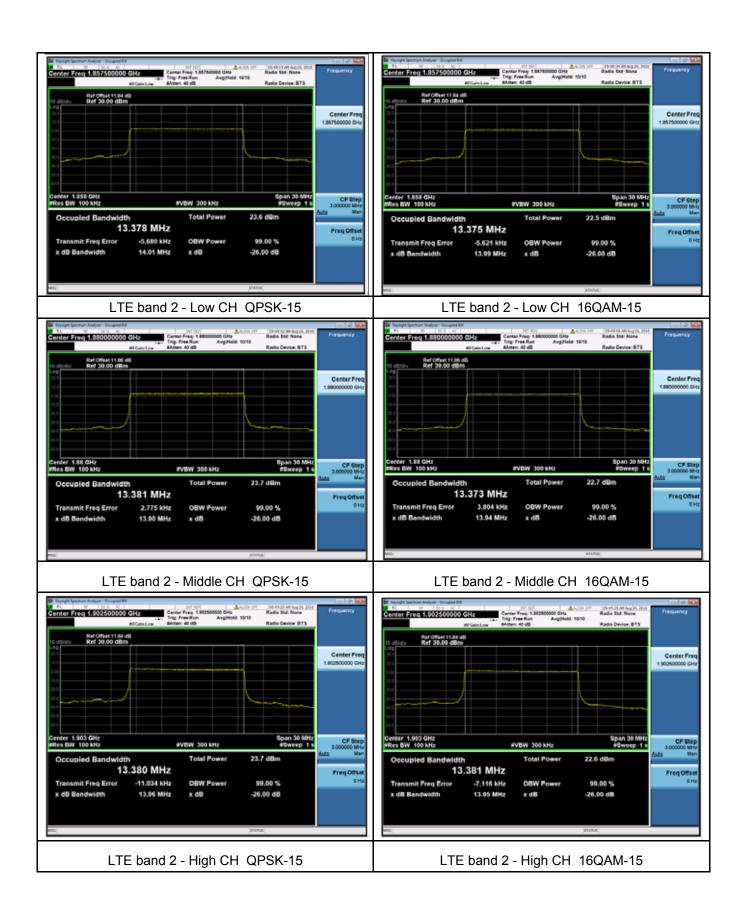

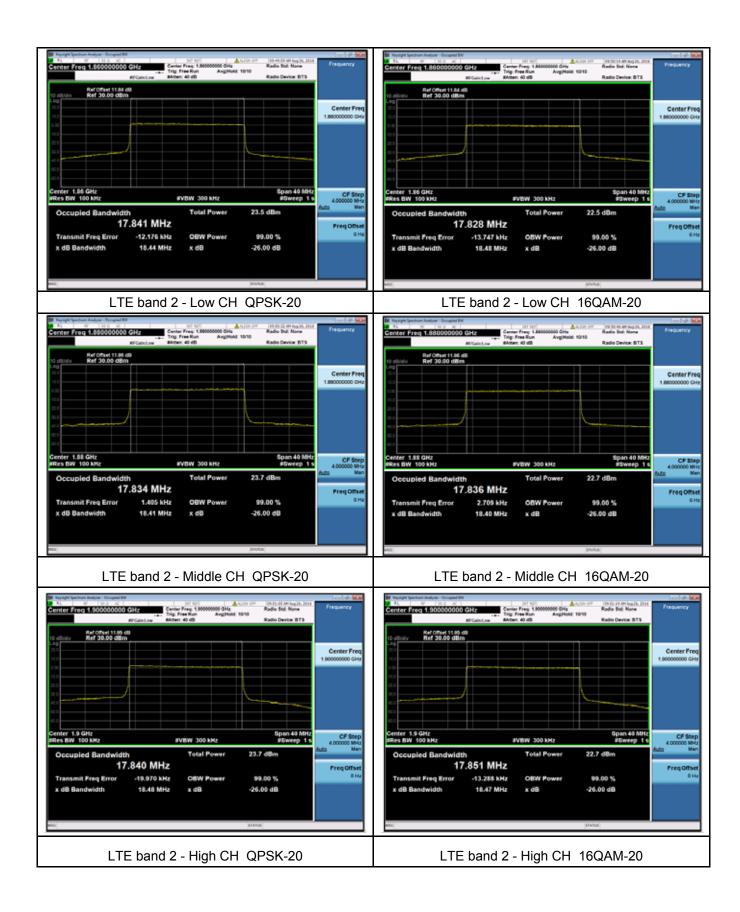





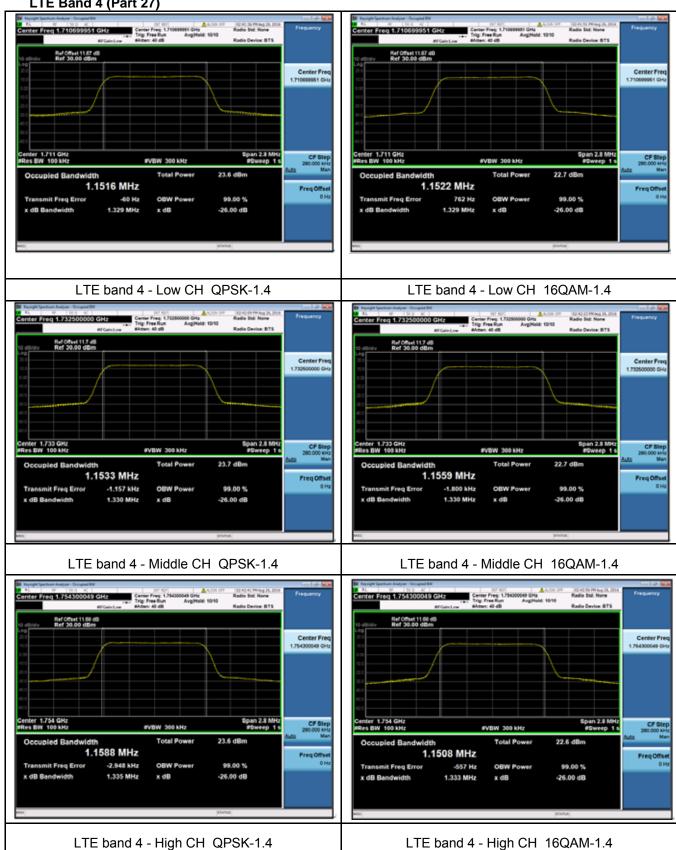

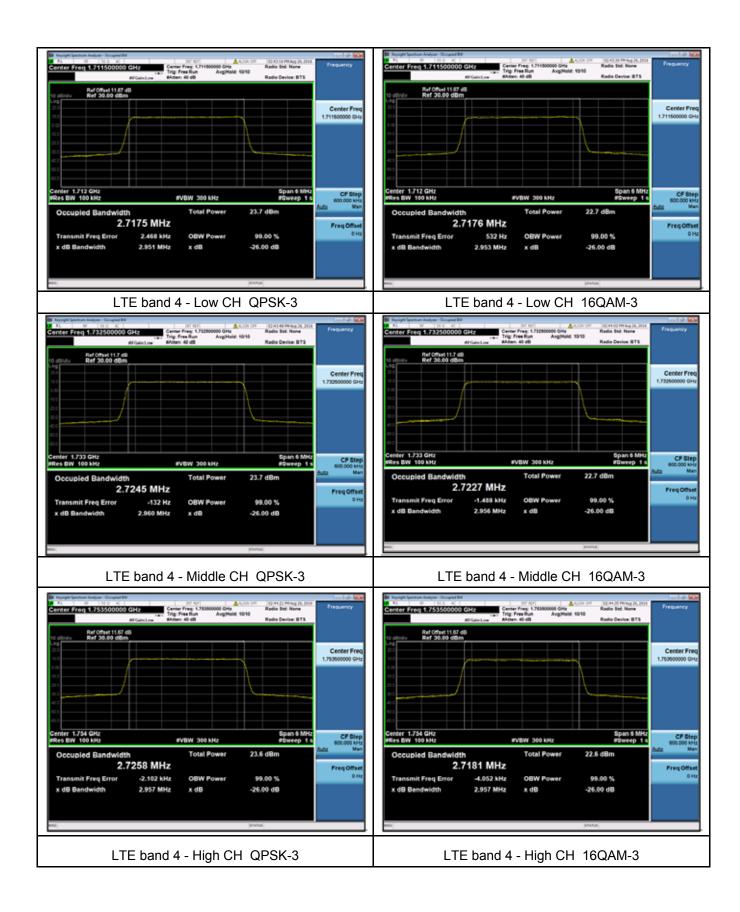



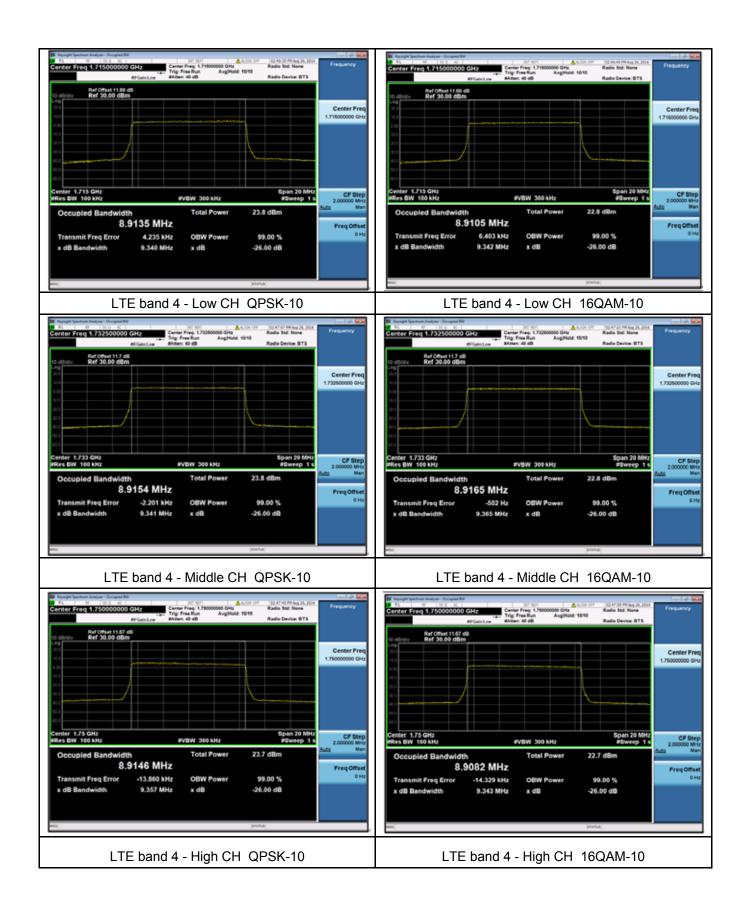

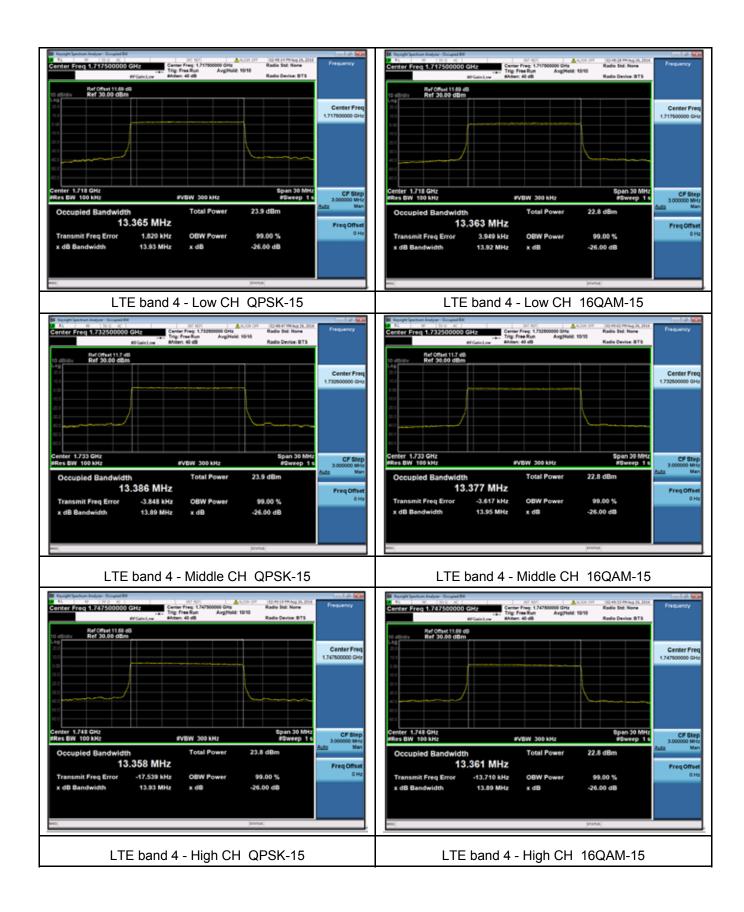



Reference No.: WTS16S1164343-4E V1 Page 47 of 67

### 10 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: FCC Part 2.1051, 24.238(a), 27.53(h)

Test Method: TIA/EIA-603-D:2010

Test Mode: Transmitting


# **10.1 EUT Operation**

Operating Environment:

Temperature: 23.5 °C
Humidity: 52.1 % RH
Atmospheric Pressure: 101.3kPa

# 10.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

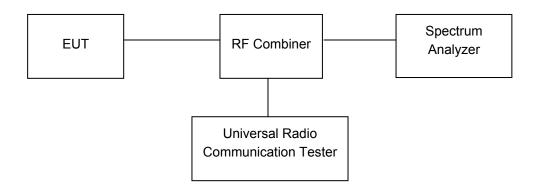

#### 10.3 Test Result

**PASS** 

#### **LTE Band**

Please refer to the Appendix Band 2/4 LTE Transmitter Spurious Emissions.

Reference No.: WTS16S1164343-4E V1 Page 48 of 67

### 11 SPURIOUS RADIATED EMISSIONS

Test Requirement: FCC Part 2.1053,24.238, 27.53(h)

Test Method: TIA/EIA-603-D:2010

Test Mode: Transmitting


# 11.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C
Humidity: 52.1 % RH
Atmospheric Pressure: 101.2kPa

### 11.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The test setup for emission measurement from 30 MHz to 1 GHz.

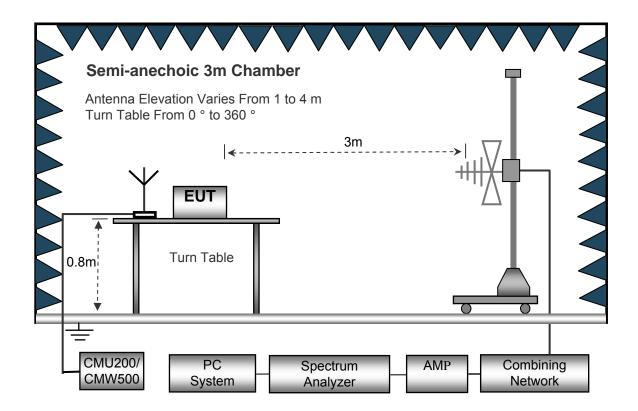

Semi-anechoic 3m Chamber

Antenna Elevation Varies From 1 to 4 m
Turn Table From 0 ° to 360 °

Sm

Turn Table

CMU200/
CMW500

PC
System
Analyzer

AMP
Combining
Network

The test setup for emission measurement above 1 GHz.

# 11.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth	100kHz
Video Bandwidth	300kHz

Above 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth	1MHz
Video Bandwidth	3MHz
Detector	Ave.
Resolution Bandwidth	1MHz
Video Bandwidth	10Hz

Reference No.: WTS16S1164343-4E V1 Page 50 of 67

#### 11.4 Test Procedure

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from 30MHz up to the tenth harmonic of the highest fundamental frequency.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.
- 7. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
  - Spurious emissions in dB =  $10 \lg (TXpwr in Watts/0.001) the absolute level Spurious attenuation limit in dB = <math>43 + 10 \log 10$  (power out in Watts)
- 8. Repeat above procedures until the measurements for all frequencies are completed.

# 11.5 Summary of Test Results

Remark: Test performed from 30MHz to 10<sup>th</sup> harmonics with low/middle/high channels, only the worst data were recorded.

LTE Band 2

		Turn	RX An	tenna	Su	bstituted			Re	sult
Frequency	Receiver Reading	table Angle	Height	Polar	SG Level	Cable	Antenna Gain	Absolute Level	Limit	Margin
(MHz)	(dBµV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
			T	LTE	BAND 2 Channe	el 18607				
199.38	46.50	137	1.5	Н	-64.01	0.15	0.00	-64.16	-13.00	-51.16
199.38	38.51	242	1.6	V	-69.08	0.15	0.00	-69.23	-13.00	-56.23
3701.40	65.95	237	1.1	Н	-45.59	2.37	12.50	-35.46	-13.00	-22.46
3701.40	59.98	115	1.1	V	-49.83	2.37	12.50	-39.70	-13.00	-26.70
5552.10	53.58	172	1.2	Н	-56.03	2.86	12.90	-45.99	-13.00	-32.99
5552.10	44.73	278	2.1	V	-64.15	2.86	12.90	-54.11	-13.00	-41.11
			T	LTE	BAND 2 Channe	l 18900		1		
199.38	45.51	216	1.2	Н	-65.00	0.15	0.00	-65.15	-13.00	-52.15
199.38	37.58	198	1.8	V	-70.01	0.15	0.00	-70.16	-13.00	-57.16
3760.00	59.61	351	1.4	Н	-51.93	2.37	12.50	-41.80	-13.00	-28.80
3760.00	53.16	168	1.3	V	-56.65	2.37	12.50	-46.52	-13.00	-33.52
5640.00	45.87	72	1.4	Н	-63.74	2.86	12.90	-53.70	-13.00	-40.70
5640.00	37.34	328	1.4	V	-71.54	2.86	12.90	-61.50	-13.00	-48.50
				LTE E	BAND 2 Channe	el 19193				
199.38	45.32	129	1.5	Н	-65.19	0.15	0.00	-65.34	-13.00	-52.34
199.38	37.75	166	1.2	V	-69.84	0.15	0.00	-69.99	-13.00	-56.99
3818.60	53.19	124	1.3	Н	-57.66	2.37	12.60	-47.43	-13.00	-34.43
3818.60	46.57	340	1.5	V	-62.74	2.37	12.60	-52.51	-13.00	-39.51
5727.90	38.70	259	1.6	Н	-70.65	2.86	12.90	-60.61	-13.00	-47.61
5727.90	30.21	122	1.4	V	-78.29	2.86	12.90	-68.25	-13.00	-55.25

LTE Band 4

			->/ 4		LTE Balla 4				_	
	Receiver	Turn	RX An	tenna	Su	bstituted		Absolute	Re	sult
Frequency	Reading	table Angle	Height	Polar	SG Level	Cable	Antenna Gain	Level	Limit	Margin
(MHz)	(dBµV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
				LTE E	BAND 4 Channe	el 19957				
199.38	38.49	62	2.0	Н	-72.02	0.15	0.00	-72.17	-13.00	-59.17
199.38	29.50	243	1.9	V	-78.09	0.15	0.00	-78.24	-13.00	-65.24
3421.40	65.95	323	2.2	Н	-47.10	2.34	12.40	-37.04	-13.00	-24.04
3421.40	59.98	185	1.6	V	-51.17	2.34	12.40	-41.11	-13.00	-28.11
5132.10	53.58	160	1.3	Н	-55.83	2.79	12.70	-45.92	-13.00	-32.92
5132.10	44.73	147	1.5	V	-64.04	2.79	12.70	-54.13	-13.00	-41.13
			1	LTE E	BAND 4 Channe	el 20175				
199.38	37.73	77	1.2	Н	-72.78	0.15	0.00	-72.93	-13.00	-59.93
199.38	29.86	219	1.3	V	-77.73	0.15	0.00	-77.88	-13.00	-64.88
3465.00	58.92	266	1.2	Н	-54.13	2.37	12.50	-44.00	-13.00	-31.00
3465.00	53.58	9	1.7	V	-57.57	2.37	12.50	-47.44	-13.00	-34.44
5197.50	46.38	324	1.9	Н	-63.03	2.79	12.70	-53.12	-13.00	-40.12
5197.50	37.46	37	1.7	V	-71.31	2.79	12.70	-61.40	-13.00	-48.40
			T	LTE	BAND 4 Channe	el 20393				
199.38	37.15	170	1.7	Н	-73.36	0.15	0.00	-73.51	-13.00	-60.51
199.38	29.79	186	1.7	V	-77.80	0.15	0.00	-77.95	-13.00	-64.95
3508.60	52.80	209	2.0	Н	-59.84	2.37	12.50	-49.71	-13.00	-36.71
3508.60	46.69	185	1.8	V	-64.04	2.37	12.50	-53.91	-13.00	-40.91
5262.90	39.02	231	1.5	Н	-70.56	2.81	12.80	-60.57	-13.00	-47.57
5262.90	29.63	80	1.8	V	-79.17	2.81	12.80	-69.18	-13.00	-56.18

Note: 1) Absolute Level = SG Level - Cable loss + Antenna Gain
2) Margin = Limit- Absolute Level

Reference No.: WTS16S1164343-4E V1 Page 53 of 67

# 12 Band Edge Measurement

Test Requirement: FCC Part 2.1051, 24.238(a), 27.53(h)

Test Method: TIA/EIA-603-D:2010

Test Mode: Transmitting

## 12.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C
Humidity: 52.3 % RH
Atmospheric Pressure: 101.3kPa


#### 12.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

According to FCC Part 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to FCC Part 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The center of the spectrum analyzer was set to block edge frequency

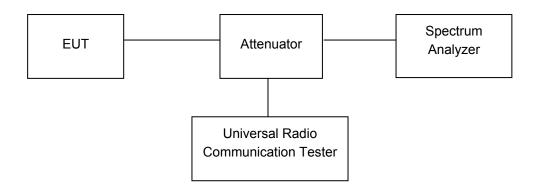

#### 12.3 Test Result

**PASS** 

### LTE Band

Please refer to the Appendix Band 2/4 LTE Band Edge.

Waltek Services (Shenzhen) Co.,Ltd. http://www.waltek.com.cn

Reference No.: WTS16S1164343-4E V1 Page 54 of 67

## 13 FREQUENCY STABILITY

Test Requirement: FCC Part 2.1055, 24.235, 27.5(h),27.54

Test Method: TIA/EIA-603-D:2010

Test Mode: Transmitting

## 13.1 EUT Operation

Operating Environment:


Temperature: 22.9 °C
Humidity: 52.0 % RH
Atmospheric Pressure: 101.3kPa

#### 13.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

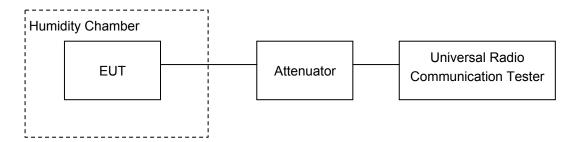

# 13.3 Test Result

LTE Band 2

	LTE Band 2							
	Test Frequency:1880.0MHz QPSK 1.4MHz							
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)				
50		-5	-0.0027	2.5				
40		8	0.0043	2.5				
30		-1	-0.0005	2.5				
20		3	0.0016	2.5				
10	3.7	2	0.0011	2.5				
0		9	0.0048	2.5				
-10		10	0.0053	2.5				
-20		10	0.0053	2.5				
-30		10	0.0053	2.5				
20	3.3	-4	-0.0021	2.5				
20	4.2	1	0.0005	2.5				

	Test Frequency:1880.0MHz 16QAM 1.4MHz						
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)			
50		5	0.0027	2.5			
40		3	0.0016	2.5			
30		8	0.0043	2.5			
20		2	0.0011	2.5			
10	3.7	8	0.0043	2.5			
0		-4	-0.0021	2.5			
-10		-1	-0.0005	2.5			
-20		3	0.0016	2.5			
-30		-2	-0.0011	2.5			
20	3.3	8	0.0043	2.5			
20	4.2	3	0.0016	2.5			

LTE Band 2

	LTE Ballu 2							
	Test Frequency:1880.0MHz QPSK 3MHz							
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)				
50		-2	-0.0011	2.5				
40		-6	-0.0032	2.5				
30		0	0.0000	2.5				
20		1	0.0005	2.5				
10	3.7	5	0.0027	2.5				
0		1	0.0005	2.5				
-10		-6	-0.0032	2.5				
-20		-7	-0.0037	2.5				
-30		0	0.0000	2.5				
20	3.3	-2	-0.0011	2.5				
20	4.2	-1	-0.0005	2.5				

	Test Frequency:1880.0MHz 16QAM 3MHz						
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)			
50		-2	-0.0011	2.5			
40		2	0.0011	2.5			
30		-10	-0.0053	2.5			
20		-1	-0.0005	2.5			
10	3.7	1	0.0005	2.5			
0		8	0.0043	2.5			
-10		-2	-0.0011	2.5			
-20		1	0.0005	2.5			
-30		-3	-0.0016	2.5			
20	3.3	7	0.0037	2.5			
20	4.2	-2	-0.0011	2.5			

LTE Band 2

	LTE Band 2							
	Test Frequency:1880.0MHz QPSK 5MHz							
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)				
50		-2	-0.0011	2.5				
40		-4	-0.0021	2.5				
30		0	0.0000	2.5				
20		-3	-0.0016	2.5				
10	3.7	6	0.0032	2.5				
0		-8	-0.0043	2.5				
-10		-8	-0.0043	2.5				
-20		2	0.0011	2.5				
-30		-9	-0.0048	2.5				
20	3.3	-3	-0.0016	2.5				
20	4.2	2	0.0011	2.5				

	Test Frequency:1880.0MHz 16QAM 5MHz						
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)			
50		1	0.0005	2.5			
40		5	0.0027	2.5			
30		10	0.0053	2.5			
20		4	0.0021	2.5			
10	3.7	-1	-0.0005	2.5			
0		11	0.0059	2.5			
-10		11	0.0059	2.5			
-20		13	0.0069	2.5			
-30		3	0.0016	2.5			
20	3.3	2	0.0011	2.5			
20	4.2	4	0.0021	2.5			

LTE Band 2

		LTL Dana 2					
	Test Frequency:1880.0MHz QPSK 10MHz						
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)			
50		4	0.0021	2.5			
40		3	0.0016	2.5			
30		6	0.0032	2.5			
20		-2	-0.0011	2.5			
10	3.7	3	0.0016	2.5			
0		-3	-0.0016	2.5			
-10		6	0.0032	2.5			
-20		-9	-0.0048	2.5			
-30		2	0.0011	2.5			
20	3.3	6	0.0032	2.5			
20	4.2	2	0.0011	2.5			

	Test Frequency:1880.0MHz 16QAM 10MHz						
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)			
50		2	0.0011	2.5			
40		2	0.0011	2.5			
30		6	0.0032	2.5			
20		0	0.0000	2.5			
10	3.7	-2	-0.0011	2.5			
0		-7	-0.0037	2.5			
-10		-8	-0.0043	2.5			
-20		5	0.0027	2.5			
-30		6	0.0032	2.5			
20	3.3	0	0.0000	2.5			
20	4.2	8	0.0043	2.5			

LTE Band 2

ETE Band 2					
	Test Frequency:1880.0MHz QPSK 15MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		10	0.0053	2.5	
40		-1	-0.0005	2.5	
30		4	0.0021	2.5	
20		3	0.0016	2.5	
10	3.7	3	0.0016	2.5	
0		9	0.0048	2.5	
-10		7	0.0037	2.5	
-20		1	0.0005	2.5	
-30		5	0.0027	2.5	
20	3.3	-1	-0.0005	2.5	
20	4.2	-6	-0.0032	2.5	

	Test Frequency:1880.0MHz 16QAM 15MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		1	0.0005	2.5	
40		10	0.0053	2.5	
30		-3	-0.0016	2.5	
20		4	0.0021	2.5	
10	3.7	13	0.0069	2.5	
0		-5	-0.0027	2.5	
-10		8	0.0043	2.5	
-20		-2	-0.0011	2.5	
-30		8	0.0043	2.5	
20	3.3	8	0.0043	2.5	
20	4.2	8	0.0043	2.5	

LTE Band 2

LTE BAILU Z					
	Test Frequency:1880.0MHz QPSK 20MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		5	0.0027	2.5	
40		3	0.0016	2.5	
30		5	0.0027	2.5	
20		7	0.0037	2.5	
10	3.7	12	0.0064	2.5	
0		7	0.0037	2.5	
-10		-1	-0.0005	2.5	
-20		11	0.0059	2.5	
-30		-2	-0.0011	2.5	
20	3.3	2	0.0011	2.5	
20	4.2	4	0.0021	2.5	

	Test Frequency:1880.0MHz 16QAM 20MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		-7	-0.0037	2.5	
40		-8	-0.0043	2.5	
30		1	0.0005	2.5	
20		-3	-0.0016	2.5	
10	3.7	5	0.0027	2.5	
0		-9	-0.0048	2.5	
-10		-5	-0.0027	2.5	
-20		-7	-0.0037	2.5	
-30		5	0.0027	2.5	
20	3.3	1	0.0005	2.5	
20	4.2	-5	-0.0027	2.5	

LTE Band 4

LTE Dallu 4					
Test Frequency:1732.5MHz QPSK 1.4MHz					
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		6	0.0035	2.5	
40		8	0.0046	2.5	
30		4	0.0023	2.5	
20		2	0.0010	2.5	
10	3.7	4	0.0023	2.5	
0		-7	-0.0040	2.5	
-10		0	0.0000	2.5	
-20		10	0.0058	2.5	
-30		-4	-0.0023	2.5	
20	3.3	3	0.0017	2.5	
20	4.2	3	0.0017	2.5	

	Test Frequency:1732.5MHz 16QAM 1.4MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		-3	-0.0017	2.5	
40		5	0.0029	2.5	
30		-6	-0.0035	2.5	
20		1	0.0006	2.5	
10	3.7	10	0.0058	2.5	
0		2	0.0012	2.5	
-10		7	0.0040	2.5	
-20		-6	-0.0035	2.5	
-30		1	0.0006	2.5	
20	3.3	0	0.0000	2.5	
20	4.2	-2	-0.0012	2.5	

LTE Band 4

LTE Dallu 4					
Test Frequency:1732.5MHz QPSK 3MHz					
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		2	0.0012	2.5	
40		-1	-0.0006	2.5	
30		1	0.0006	2.5	
20		4	0.0023	2.5	
10	3.7	-1	-0.0006	2.5	
0		-3	-0.0017	2.5	
-10		-2	-0.0012	2.5	
-20		7	0.0040	2.5	
-30		4	0.0023	2.5	
20	3.3	-4	-0.0023	2.5	
20	4.2	-3	-0.0017	2.5	

	Test Frequency:1732.5MHz 16QAM 3MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		9	0.0052	2.5	
40		8	0.0046	2.5	
30		-4	-0.0023	2.5	
20		3	0.0017	2.5	
10	3.7	6	0.0035	2.5	
0		-2	-0.0012	2.5	
-10		-5	-0.0029	2.5	
-20		-6	-0.0035	2.5	
-30		-4	-0.0023	2.5	
20	3.3	9	0.0052	2.5	
20	4.2	1	0.0006	2.5	

LTE Band 4

LTE Dallu 4					
Test Frequency:1732.5MHz QPSK 5MHz					
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		-3	-0.0017	2.5	
40		-7	-0.0040	2.5	
30		2	0.0012	2.5	
20		2	0.0012	2.5	
10	3.7	-6	-0.0035	2.5	
0		-6	-0.0035	2.5	
-10		-7	-0.0040	2.5	
-20		-2	-0.0012	2.5	
-30		-2	-0.0012	2.5	
20	3.3	5	0.0029	2.5	
20	4.2	10	0.0058	2.5	

	Test Frequency:1732.5MHz 16QAM 5MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		-3	-0.0017	2.5	
40		4	0.0023	2.5	
30		-2	-0.0012	2.5	
20		-1	-0.0006	2.5	
10	3.7	-1	-0.0006	2.5	
0		8	0.0046	2.5	
-10		6	0.0035	2.5	
-20		-2	-0.0012	2.5	
-30		7	0.0040	2.5	
20	3.3	-9	-0.0052	2.5	
20	4.2	6	0.0035	2.5	

LTE Band 4

ETE Band 4					
	Test Frequency:1732.5MHz QPSK 10MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		-6	-0.0035	2.5	
40		-3	-0.0017	2.5	
30		-4	-0.0023	2.5	
20		3	0.0017	2.5	
10	3.7	7	0.0040	2.5	
0		-2	-0.0012	2.5	
-10		3	0.0017	2.5	
-20		-2	-0.0012	2.5	
-30		5	0.0029	2.5	
20	3.3	-1	-0.0006	2.5	
20	4.2	0	0.0000	2.5	

	Test Frequency:1732.5MHz 16QAM 10MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		3	0.0017	2.5	
40		3	0.0017	2.5	
30		2	0.0012	2.5	
20		-5	-0.0029	2.5	
10	3.7	1	0.0006	2.5	
0		-8	-0.0046	2.5	
-10		3	0.0017	2.5	
-20		-2	-0.0012	2.5	
-30		-10	-0.0058	2.5	
20	3.3	-5	-0.0029	2.5	
20	4.2	-7	-0.0040	2.5	

LTE Band 4

LTE Balla 4				
Test Frequency:1732.5MHz QPSK 15MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50		3	0.0017	2.5
40		-4	-0.0023	2.5
30		-3	-0.0017	2.5
20		3	0.0017	2.5
10	3.7	-2	-0.0012	2.5
0		-6	-0.0035	2.5
-10		-2	-0.0012	2.5
-20		-2	-0.0012	2.5
-30		4	0.0023	2.5
20	3.3	4	0.0023	2.5
20	4.2	10	0.0058	2.5

Test Frequency:1732.5MHz 16QAM 15MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50		9	0.0052	2.5
40		6	0.0035	2.5
30		2	0.0012	2.5
20		4	0.0023	2.5
10	3.7	-3	-0.0017	2.5
0		13	0.0075	2.5
-10		10	0.0058	2.5
-20		7	0.0040	2.5
-30		1	0.0006	2.5
20	3.3	11	0.0063	2.5
20	4.2	-5	-0.0029	2.5

LTE Band 4

		LIE Dallu 4			
Test Frequency:1732.5MHz QPSK 20MHz					
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
50		-1	-0.0006	2.5	
40		-4	-0.0023	2.5	
30		-8	-0.0046	2.5	
20		-5	-0.0029	2.5	
10	3.7	-6	-0.0035	2.5	
0		-11	-0.0063	2.5	
-10		-13	-0.0075	2.5	
-20		-8	-0.0046	2.5	
-30		1	0.0006	2.5	
20	3.3	-5	-0.0029	2.5	
20	4.2	-13	-0.0075	2.5	

Test Frequency:1732.5MHz 16QAM 20MHz				
Temperature ( )	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50		-6	-0.0035	2.5
40		-2	-0.0012	2.5
30		-11	-0.0063	2.5
20		-6	-0.0035	2.5
10	3.7	-6	-0.0035	2.5
0		-12	-0.0069	2.5
-10		3	0.0017	2.5
-20		-9	-0.0052	2.5
-30		-12	-0.0069	2.5
20	3.3	-6	-0.0035	2.5
20	4.2	0	0.0000	2.5

Reference No.: WTS16S1164343-4E V1 Page 67 of 67

# 14 RF Exposure

Remark: refer to SAR test report: WTS16S1164344E

===== End of Report =====