

# TEST REPORT

Reference No..... : WTS16S1164343-2E V3  
FCC ID ..... : 2AJ8OPCB-I316  
Applicant..... : Grupo Nucleo S.A  
Address..... : Chaco 1670, Mar del Plata, Buenos Aires, Argentina  
Manufacturer ..... : Gionee Communication Equipment Co.,Ltd.  
Address..... : 21/F, Times Technology Building, No. 7028, Shennan Avenue,  
Futian District, Shenzhen, China  
Product Name..... : Mobile Phone  
Model No..... : PCB-i316  
Brand..... : PCBOX  
Standards..... : FCC CFR47 Part 15.247:2015  
Date of Receipt sample .... : Aug. 08, 2016  
Date of Test ..... : Aug. 09 – Nov. 11, 2016  
Date of Issue..... : Nov. 28, 2016  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,  
Guangdong, China  
Tel :+86-755-83551033  
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 REPORT REVISION HISTORY .....</b>	<b>5</b>
<b>5 GENERAL INFORMATION.....</b>	<b>6</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	6
5.2 DETAILS OF E.U.T. ....	6
5.3 CHANNEL LIST .....	7
5.4 TEST MODE .....	8
5.5 TEST FACILITY .....	9
<b>6 EQUIPMENT USED DURING TEST .....</b>	<b>10</b>
6.1 EQUIPMENTS LIST .....	10
6.2 DESCRIPTION OF SUPPORT UNITS .....	11
6.3 MEASUREMENT UNCERTAINTY .....	11
6.4 TEST EQUIPMENT CALIBRATION .....	11
<b>7 CONDUCTED EMISSION .....</b>	<b>12</b>
7.1 E.U.T. OPERATION .....	12
7.2 EUT SETUP .....	12
7.3 MEASUREMENT DESCRIPTION .....	13
7.4 CONDUCTED EMISSION TEST RESULT .....	13
<b>8 RADIATED EMISSIONS.....</b>	<b>17</b>
8.1 EUT OPERATION.....	17
8.2 TEST SETUP .....	18
8.3 SPECTRUM ANALYZER SETUP .....	19
8.4 TEST PROCEDURE .....	20
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	20
8.6 SUMMARY OF TEST RESULTS .....	21
<b>9 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>29</b>
9.1 TEST PROCEDURE .....	29
9.2 TEST RESULT .....	30
<b>10 BAND EDGE MEASUREMENT .....</b>	<b>53</b>
10.1 TEST PRODUCE .....	53
10.2 TEST RESULT .....	54
<b>11 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>59</b>
11.1 TEST PROCEDURE:.....	59
11.2 TEST RESULT: .....	59
<b>12 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>68</b>
12.1 TEST PROCEDURE:.....	68
12.2 TEST RESULT: .....	69
<b>13 POWER SPECTRAL DENSITY .....</b>	<b>78</b>
13.1 TEST PROCEDURE:.....	78
13.2 TEST RESULT: .....	78

14 ANTENNA REQUIREMENT ..... 87

15 RF EXPOSURE..... 88

## 4 Report Revision History

Report No.	Report Version	Description	Issue Date
WTS16S1164343-2E	NONE	Original	Nov. 12, 2016
WTS16S1164343-2E V1	V1	Version 1	Nov. 21, 2016
WTS16S1164343-2E V2	V2	Version 2	Nov. 26, 2016
WTS16S1164343-2E V3	V3	Version 3	Nov. 28, 2016

## 5 General Information

### 5.1 General Description of E.U.T.

Product Name	: Mobile Phone
Model No.	: PCB-i316
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EGPRS Class	: 12
WCDMA Band(s)	: FDD Band II/V
LTE Band(s)	: LTE Band 2/4
Wi-Fi Specification	: 2.4G: 802.11b/g/n HT20 HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: KING_Mainboard_P3
Software Version	: KING_0303_V6202
Storage Location	: Internal Storage

### 5.2 Details of E.U.T.

Operation Frequency	: GSM/GPRS/EGPRS 850: 824~849MHz PCS/GPRS/EGPRS 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power	: GSM 850: 32.80dBm PCS1900: 29.80dBm WCDMA Band II: 22.89dBm WCDMA Band V: 22.62dBm LTE Band 2: 23.79dBm LTE Band 4: 23.99dBm WiFi(2.4G): 9.39dBm Bluetooth: 4.60dBm
Type of Modulation	: GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK

	LTE: QPSK, 16QAM
	WiFi: CCK, OFDM
	Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK
Antenna installation	: GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain	: GSM 850: -4.0dBi PCS1900: 0.12dBi WCDMA Band II: 0.12dBi WCDMA Band V: -4.0dBi LTE Band 2: 0.12dBi LTE Band 4: 0dBi WiFi(2.4G): -0.5dBi Bluetooth: -0.5dBi
Technical Data	: Battery DC 3.8V, 2400mAh DC 5V, 1.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.3A)
Adapter	: Manufacture: SHENZHEN FUJIA APPLIANCE CO.,LTD Model No.: FJ-SW1160501000UA

### 5.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

## 5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .



## 5.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2016	Sep.14,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2016	Sep.14,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2016	Sep.14,2017
4.	Cable	LARGE	RF300	-	Sep.15,2016	Sep.14,2017
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2016	Sep.14,2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2016	Sep.14,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	669	Apr.18,2016	Apr.17,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2016	Mar.16,2017
8	Coaxial Cable (above 1GHz)	Top	1000MHz-25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
9	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.15,2016	Sep.14,2017
10	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.10,2016	Apr.09,2017
11	Signal Generator	R&S	SMR20	100046	Sep.15,2016	Sep.14,2017
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2016	Sep.14,2017
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Sep.15,2016	Sep.14,2017

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~26500MHz)
Conducted Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Confidence interval : 95%. Confidence factor:k=2	

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	60
5 to 30	60	50

### 7.1 E.U.T. Operation

Operating Environment :

Temperature: 21.5 °C

Humidity: 51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in WIFI link mode, the worst data ( 802.11b mode low channel ) were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

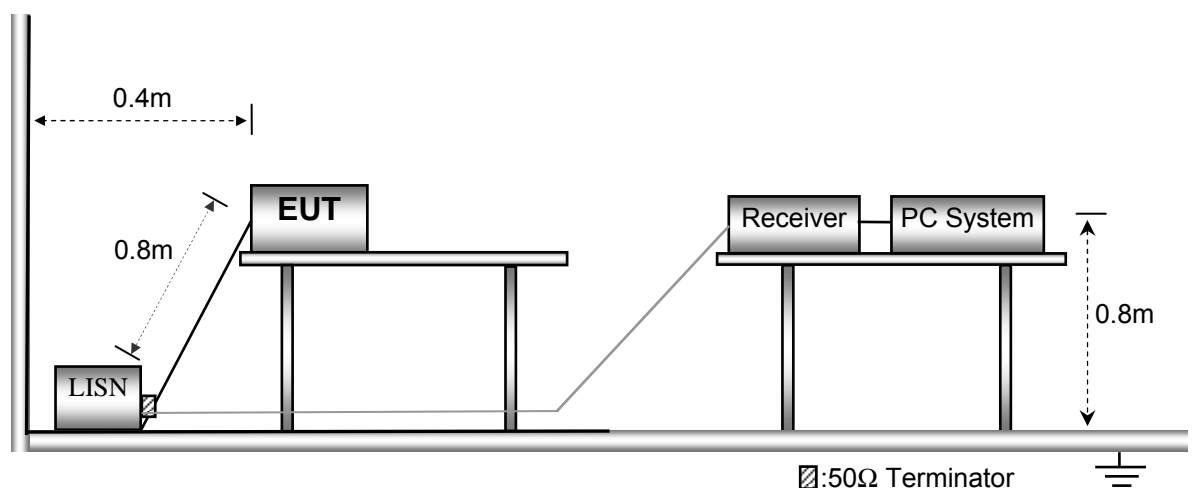

### 7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode

Live line:

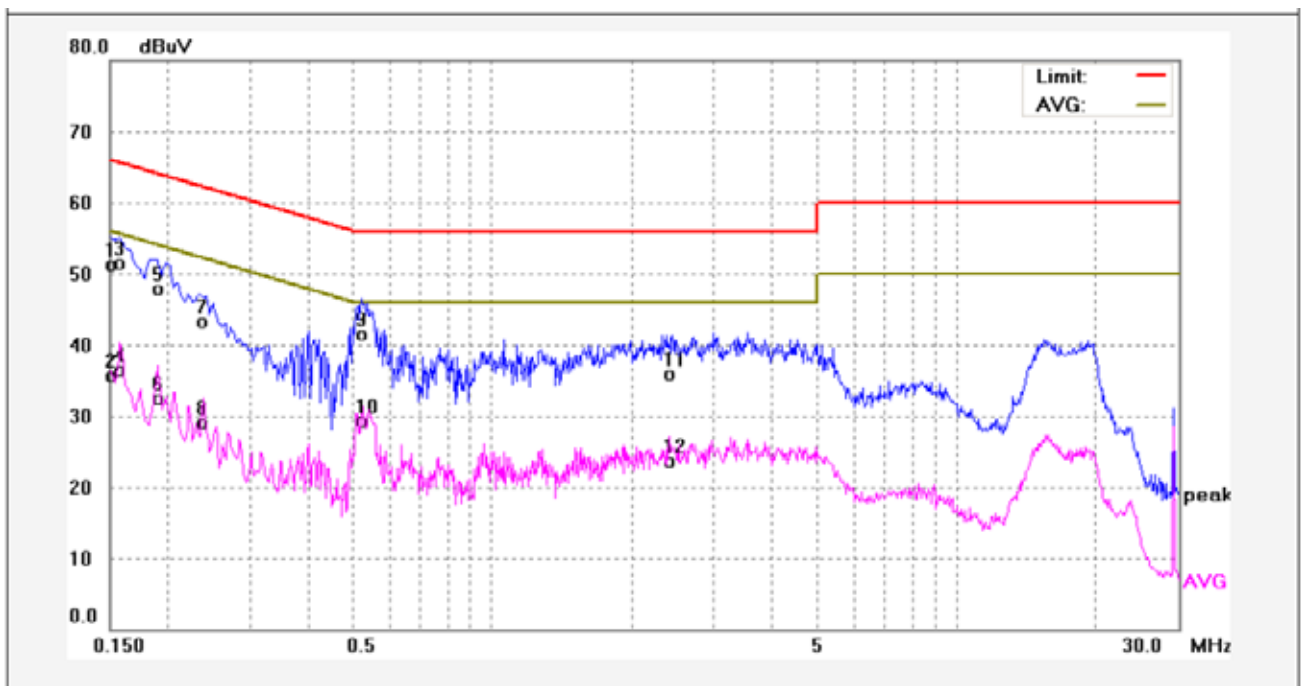


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	41.51	9.75	51.26	65.99	-14.73	QP	
2	0.1500	25.91	9.75	35.66	55.99	-20.33	AVG	
3	0.1580	41.75	9.75	51.50	65.56	-14.06	QP	
4	0.1580	26.83	9.75	36.58	55.56	-18.98	AVG	
5	0.1900	38.13	9.75	47.88	64.03	-16.15	QP	
6	0.1900	22.82	9.75	32.57	54.03	-21.46	AVG	
7	0.2380	33.55	9.74	43.29	62.16	-18.87	QP	
8	0.2380	19.29	9.74	29.03	52.16	-23.13	AVG	
9	0.5260	31.71	9.76	41.47	56.00	-14.53	QP	
10	0.5260	19.46	9.76	29.22	46.00	-16.78	AVG	
11	2.3980	26.06	9.91	35.97	56.00	-20.03	QP	
12	2.3980	13.77	9.91	23.68	46.00	-22.32	AVG	

Neutral line:

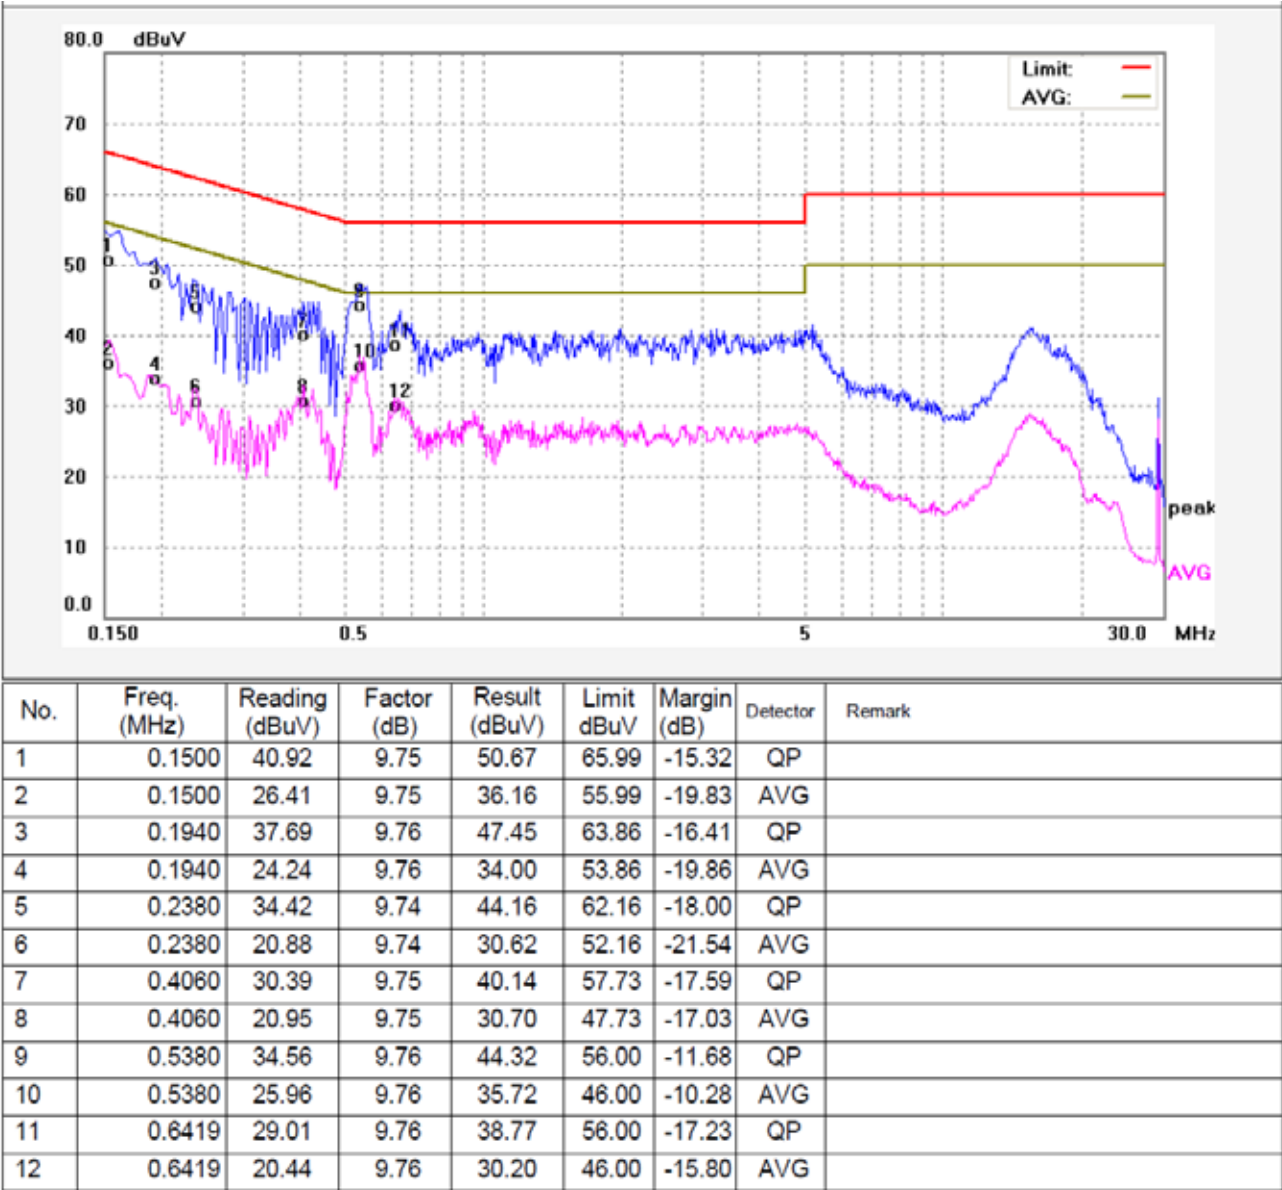


Worst Mode: BLE mode

Live line:

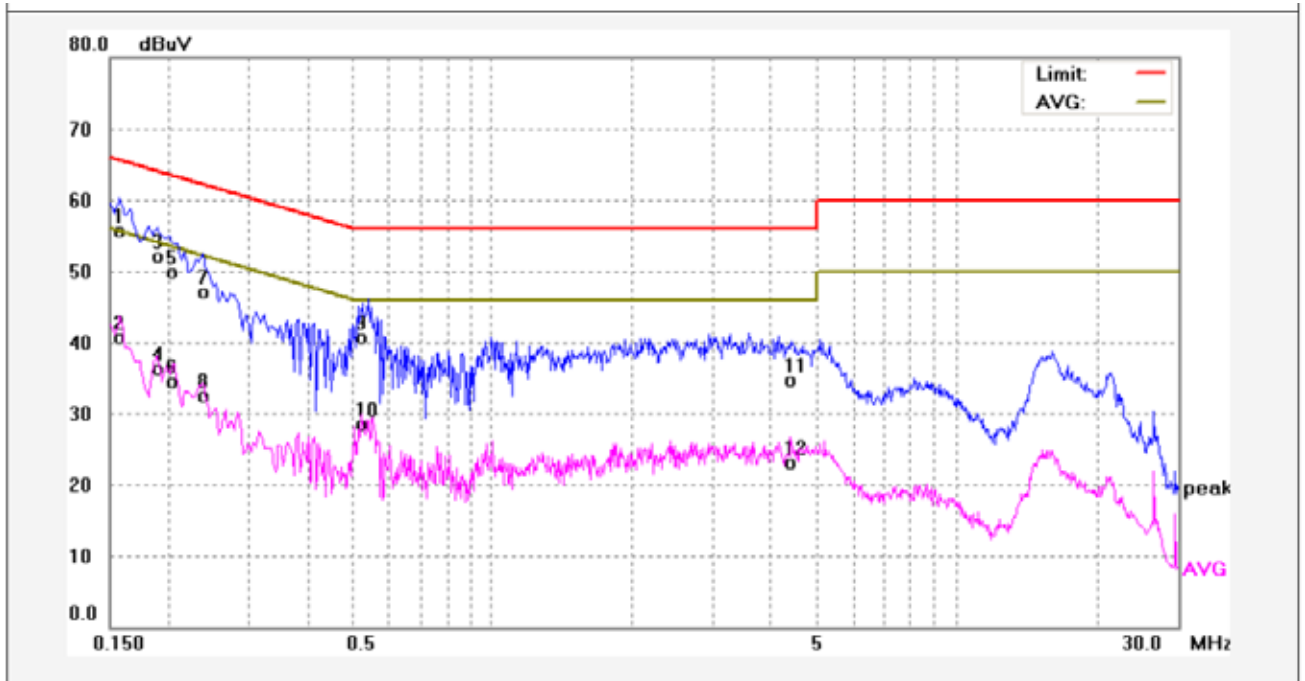

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1580	46.04	9.75	55.79	65.56	-9.77	QP	
2	0.1580	30.86	9.75	40.61	55.56	-14.95	AVG	
3	0.1900	42.26	9.75	52.01	64.03	-12.02	QP	
4	0.1900	26.63	9.75	36.38	54.03	-17.65	AVG	
5	0.2060	40.21	9.76	49.97	63.36	-13.39	QP	
6	0.2060	24.75	9.76	34.51	53.36	-18.85	AVG	
7	0.2380	37.42	9.74	47.16	62.16	-15.00	QP	
8	0.2380	22.77	9.74	32.51	52.16	-19.65	AVG	
9	0.5220	31.00	9.76	40.76	56.00	-15.24	QP	
10	0.5220	18.73	9.76	28.49	46.00	-17.51	AVG	
11	4.3940	24.77	9.94	34.71	56.00	-21.29	QP	
12	4.3940	13.12	9.94	23.06	46.00	-22.94	AVG	

Neutral line:

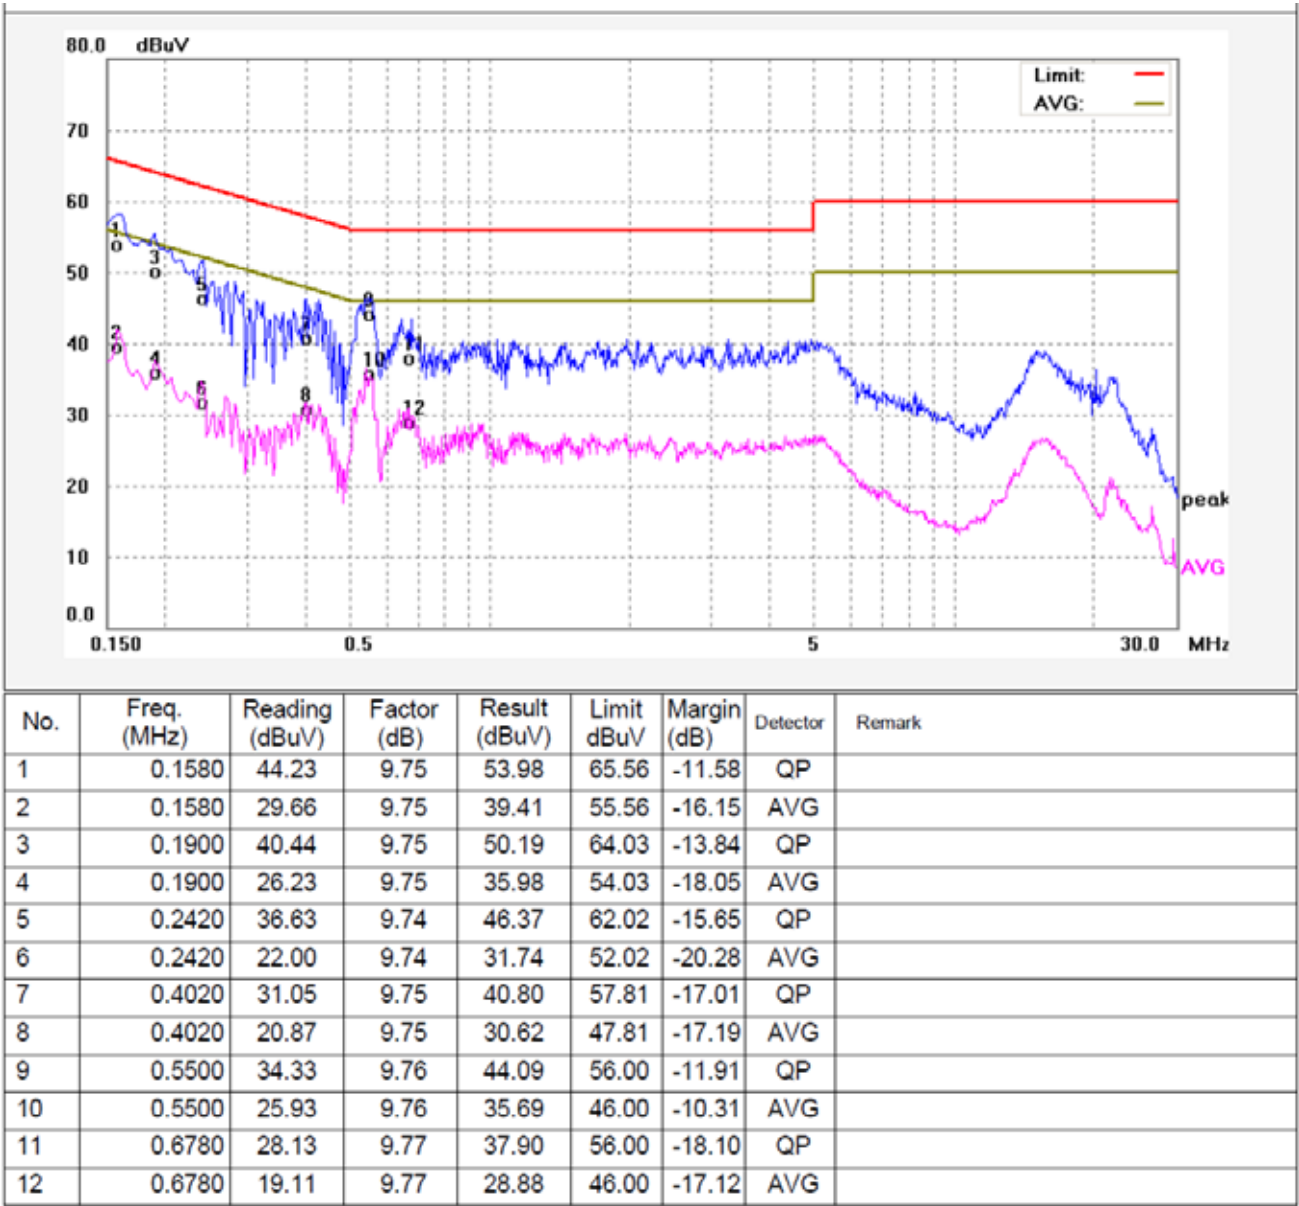



## 8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data ( 802.11b mode low channel ) were shown in the report.


## 8.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.

The test setup for emission measurement below 30MHz.

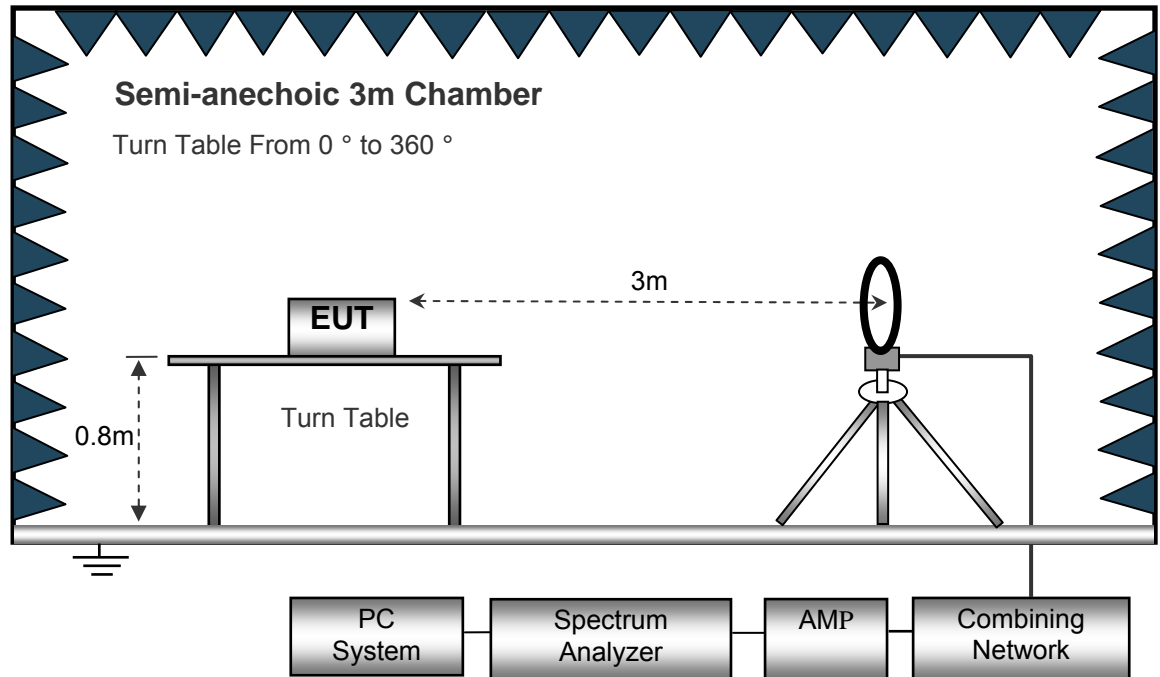

The test setup for emission measurement from 30 MHz to 1 GHz.

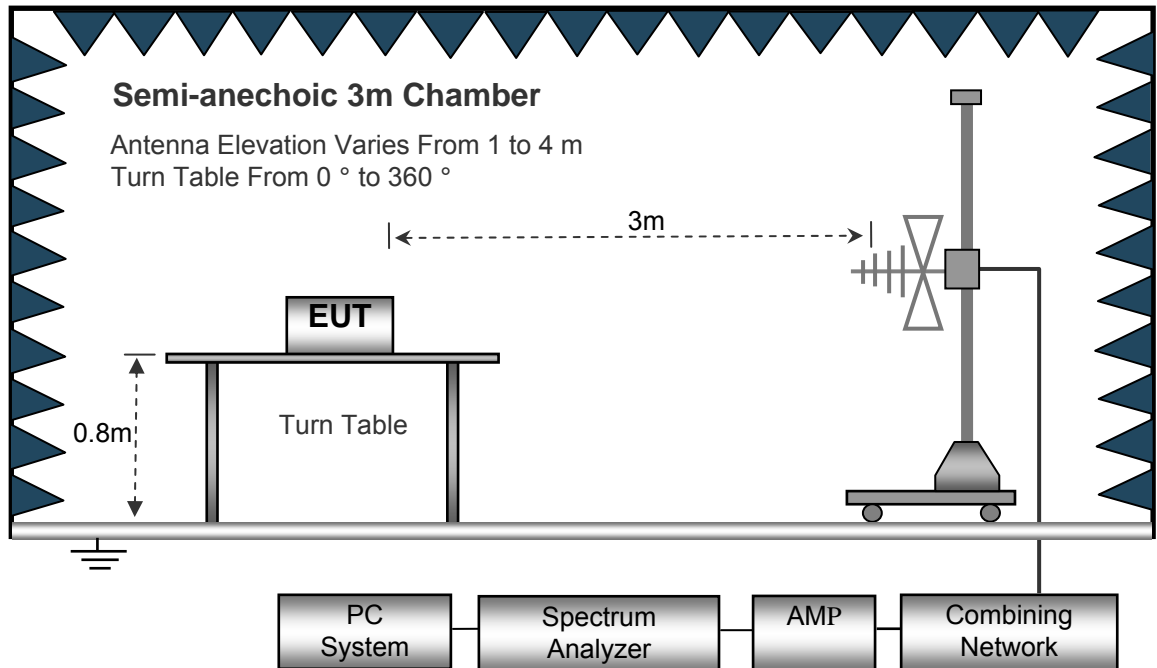

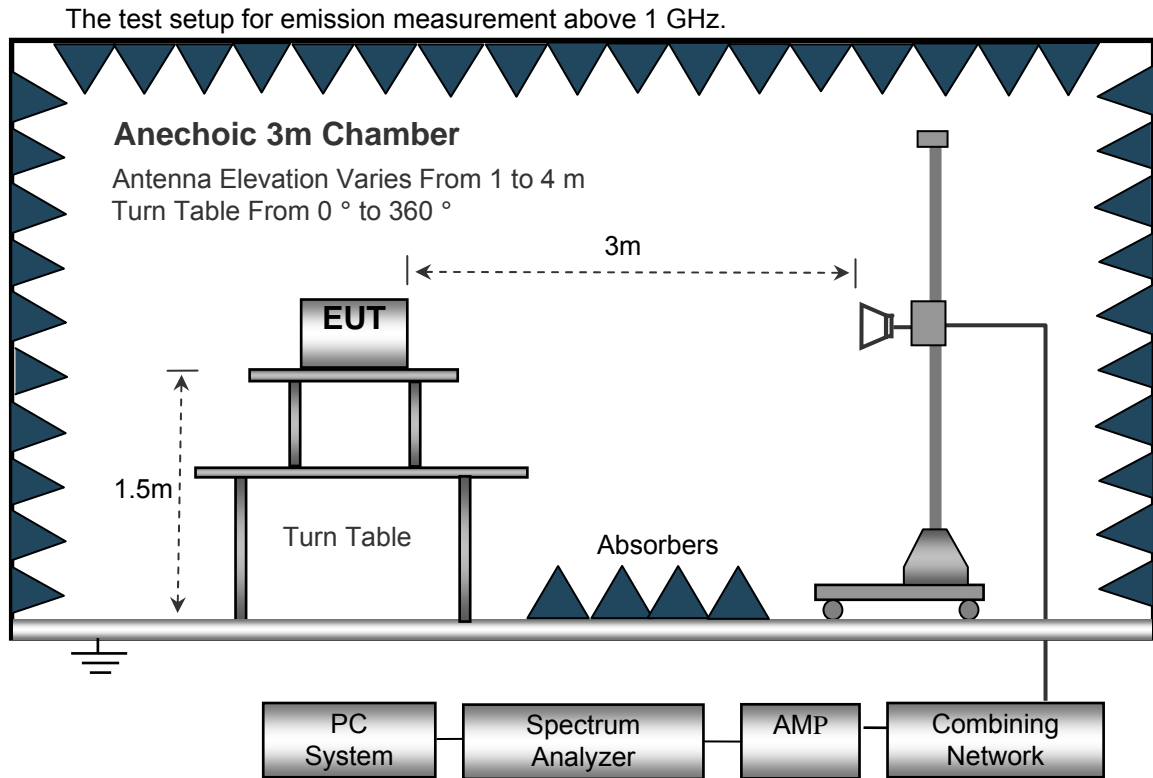

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
IF Bandwidth..... 10kHz  
Video Bandwidth..... 10kHz  
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth..... 100kHz  
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth..... 1MHz  
Video Bandwidth..... 3MHz  
Detector ..... Ave.  
Resolution Bandwidth..... 1MHz  
Video Bandwidth..... 10Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz ( only report the point less than 20 dB below the limit )**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
223.45	41.22	QP	82	1.3	H	-11.62	29.60	46.00	-16.40
4824.00	46.05	Ave	28	1.3	V	-1.06	44.99	54.00	-9.01
7236.00	40.52	Ave	269	1.9	H	1.33	41.85	54.00	-12.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	40.37	QP	268	1.9	H	-11.62	28.75	46.00	-17.25
4874.00	46.08	Ave	295	1.1	V	-0.62	45.46	54.00	-8.54
7311.00	39.19	Ave	0	1.2	H	2.21	41.40	54.00	-12.60

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
223.45	41.55	QP	178	1.9	H	-11.62	29.93	46.00	-16.07
4924.00	46.10	Ave	134	1.8	V	-0.24	45.86	54.00	-8.14
7386.00	40.11	Ave	260	1.8	H	2.84	42.95	54.00	-11.05

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
223.45	42.68	QP	123	1.7	H	-11.62	31.06	46.00	-14.94
4824.00	44.79	Ave	97	1.9	V	-1.06	43.73	54.00	-10.27
7236.00	40.06	Ave	55	1.7	H	1.33	41.39	54.00	-12.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	41.71	QP	79	1.7	H	-11.62	30.09	46.00	-15.91
4874.00	44.62	Ave	202	1.4	V	-0.62	44.00	54.00	-10.00
7311.00	39.64	Ave	25	1.9	H	2.21	41.85	54.00	-12.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
223.45	41.24	QP	36	1.4	H	-11.62	29.62	46.00	-16.38
4924.00	44.09	Ave	61	1.5	V	-0.24	43.85	54.00	-10.15
7386.00	39.02	Ave	262	1.9	H	2.84	41.86	54.00	-12.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
223.45	40.12	QP	24	1.1	H	-11.62	28.50	46.00	-17.50
4824.00	43.98	Ave	150	1.6	V	-1.06	42.92	54.00	-11.08
7236.00	38.43	Ave	65	1.4	H	1.33	39.76	54.00	-14.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
223.45	40.29	QP	282	1.1	H	-11.62	28.67	46.00	-17.33
4874.00	43.45	Ave	139	1.9	V	-0.62	42.83	54.00	-11.17
7311.00	39.59	Ave	134	1.3	H	2.21	41.80	54.00	-12.20

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
223.45	39.24	QP	214	1.1	H	-11.62	27.62	46.00	-18.38
4924.00	42.35	Ave	98	1.2	V	-0.24	42.11	54.00	-11.89
7386.00	40.36	Ave	184	1.4	H	2.84	43.20	54.00	-10.80



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) low channel 2422MHz									
223.45	40.65	QP	168	1.8	H	-11.62	29.03	46.00	-16.97
4844.00	39.60	Ave	99	1.9	V	-1.06	38.54	54.00	-15.46
7266.00	38.46	Ave	137	1.5	H	1.33	39.79	54.00	-14.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) middle channel 2437MHz									
223.45	41.50	QP	39	1.6	H	-11.62	29.88	46.00	-16.12
4874.00	39.93	Ave	151	1.6	V	-0.62	39.31	54.00	-14.69
7311.00	37.64	Ave	179	1.7	H	2.21	39.85	54.00	-14.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) High channel 2452MHz									
223.45	42.26	QP	150	1.9	H	-11.62	30.64	46.00	-15.36
4904.00	39.44	Ave	148	1.8	V	-0.24	39.20	54.00	-14.80
7356.00	37.29	Ave	186	1.3	H	2.84	40.13	54.00	-13.87

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

**BT BLE:****Test Frequency: 9KHz~30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low Channel 2402MHz									
268.32	40.34	QP	138	1.2	V	-13.35	26.99	46.00	-19.01
4804.00	43.93	Ave	13	1.2	V	-1.06	42.87	54.00	-11.13
7206.00	35.79	Ave	227	1.4	H	1.33	37.12	54.00	-16.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel 2440MHz									
268.32	40.11	QP	81	2.0	V	-13.35	26.76	46.00	-19.24
4880.00	44.99	Ave	222	1.9	V	-0.62	44.37	54.00	-9.63
7320.00	34.59	Ave	99	1.6	H	2.21	36.80	54.00	-17.20

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
High Channel 2480MHz									
268.32	39.88	QP	281	1.6	V	-13.35	26.53	46.00	-19.47
4960.00	44.68	Ave	134	1.9	V	-0.24	44.44	54.00	-9.56
7440.00	35.59	Ave	324	1.4	H	2.84	38.43	54.00	-15.57

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247  
Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016  
Test Result: PASS  
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

9.2 Test Result


9KHz – 30MHz


802.11b

Low Channel

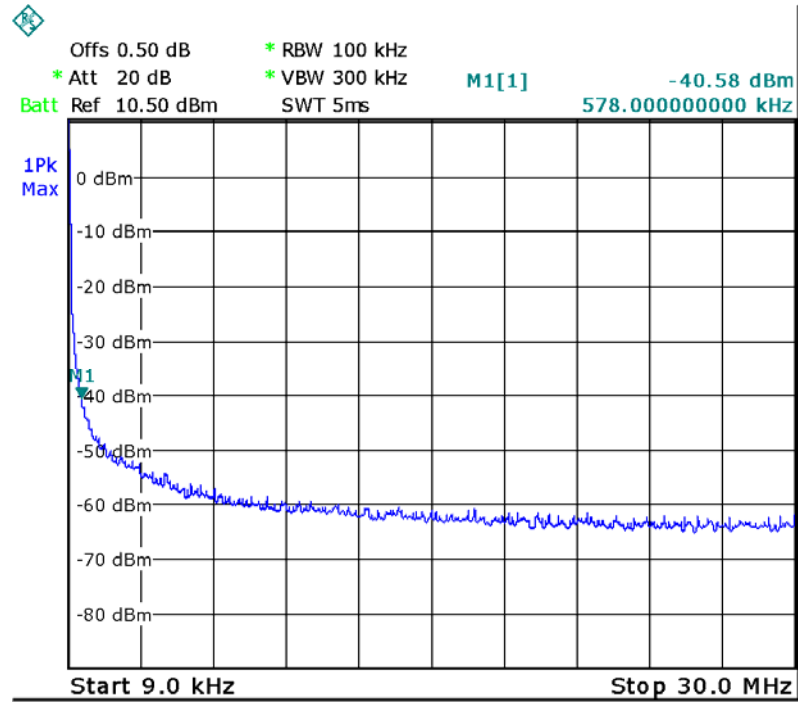




Middle Channel

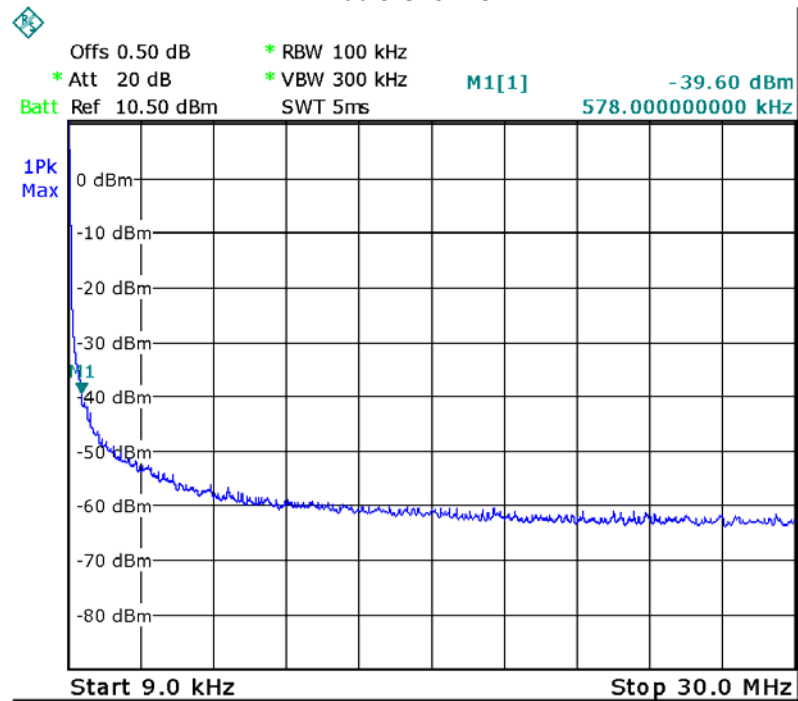

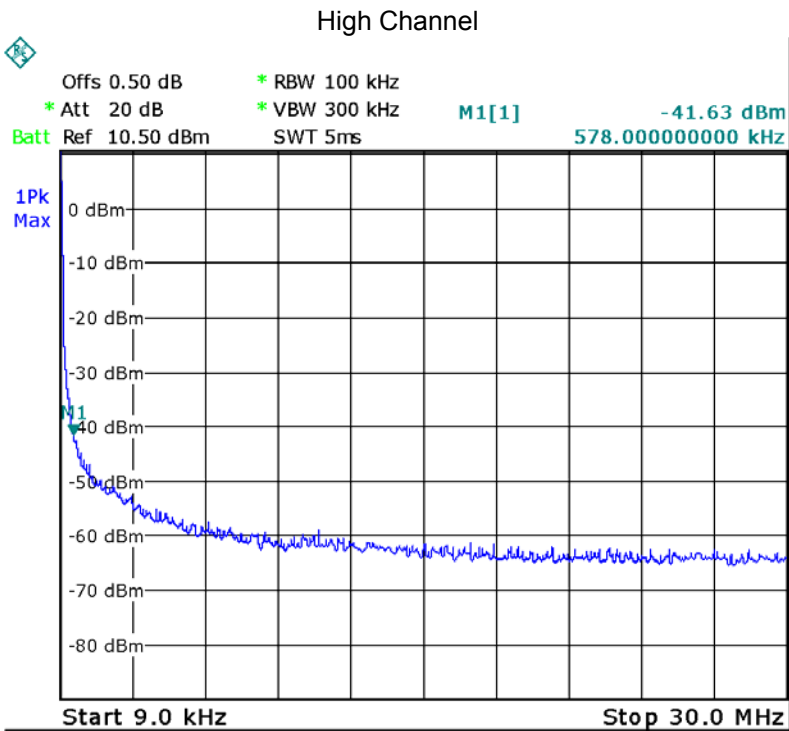

802.11g

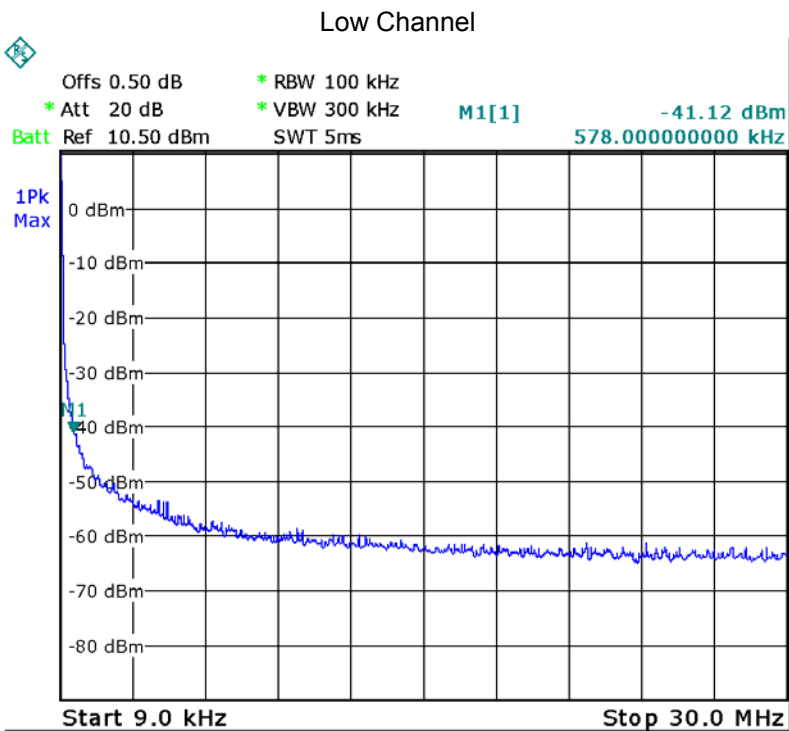


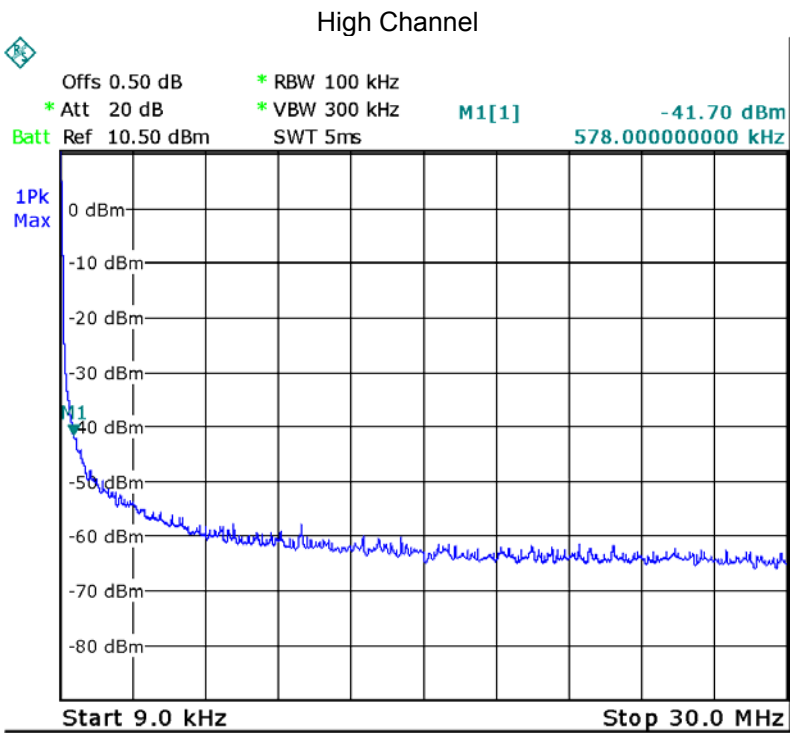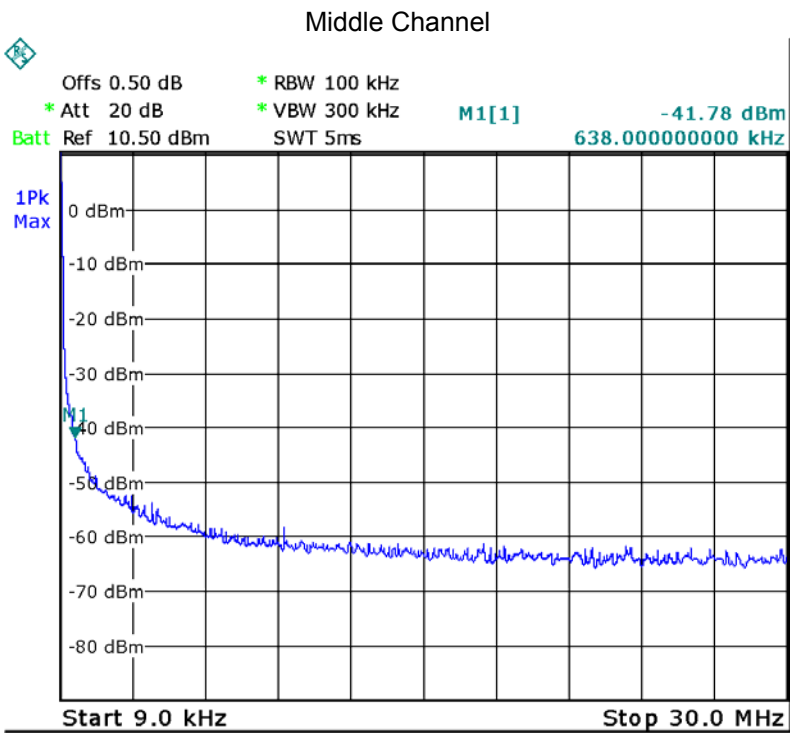





802.11n HT20

Low Channel

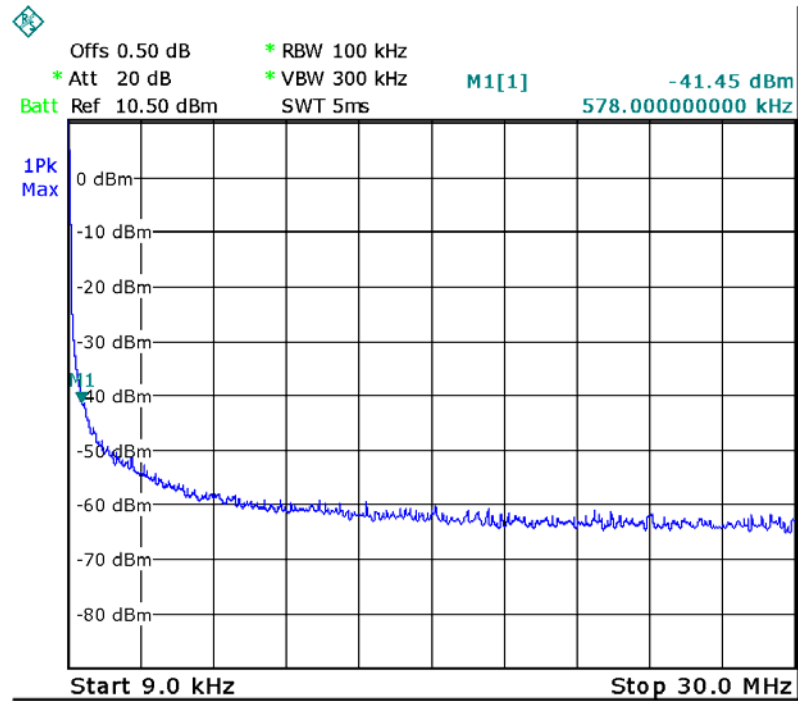




Middle Channel

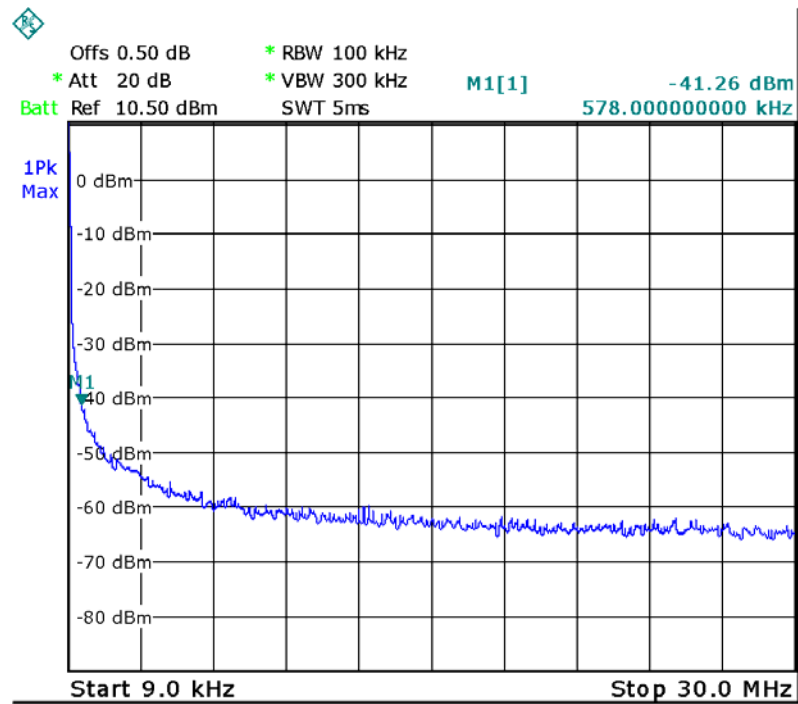

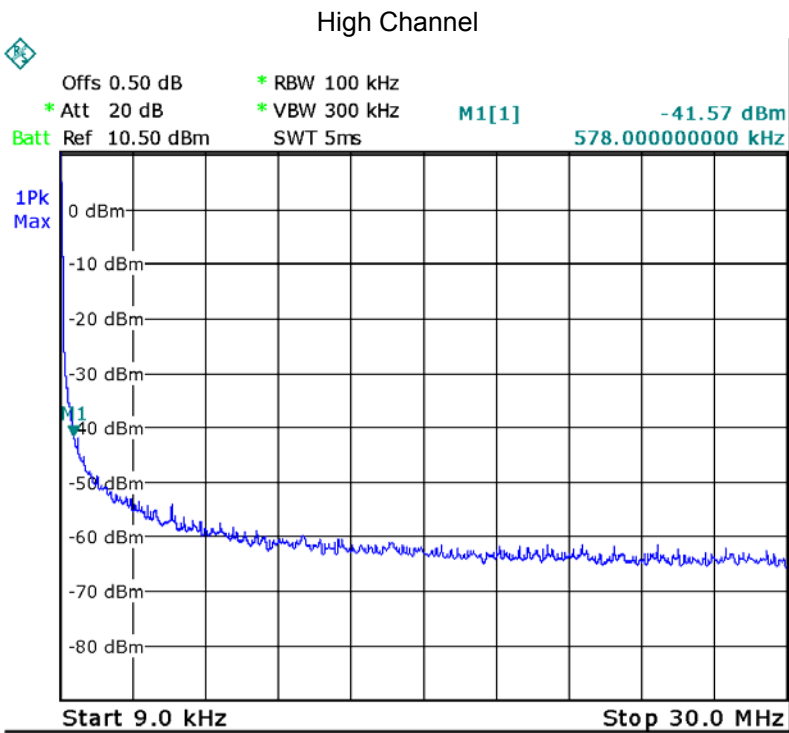


802.11n HT40

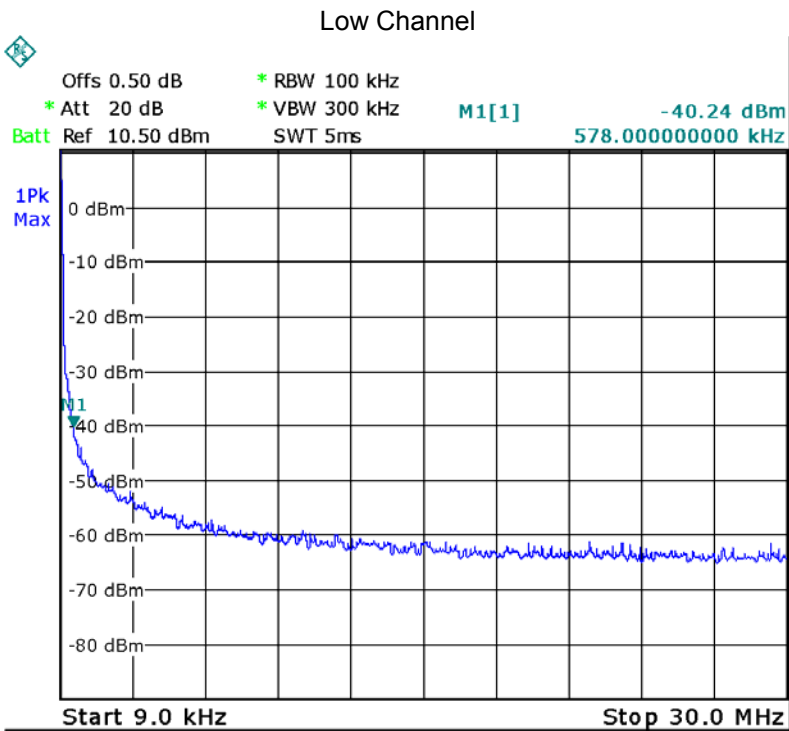

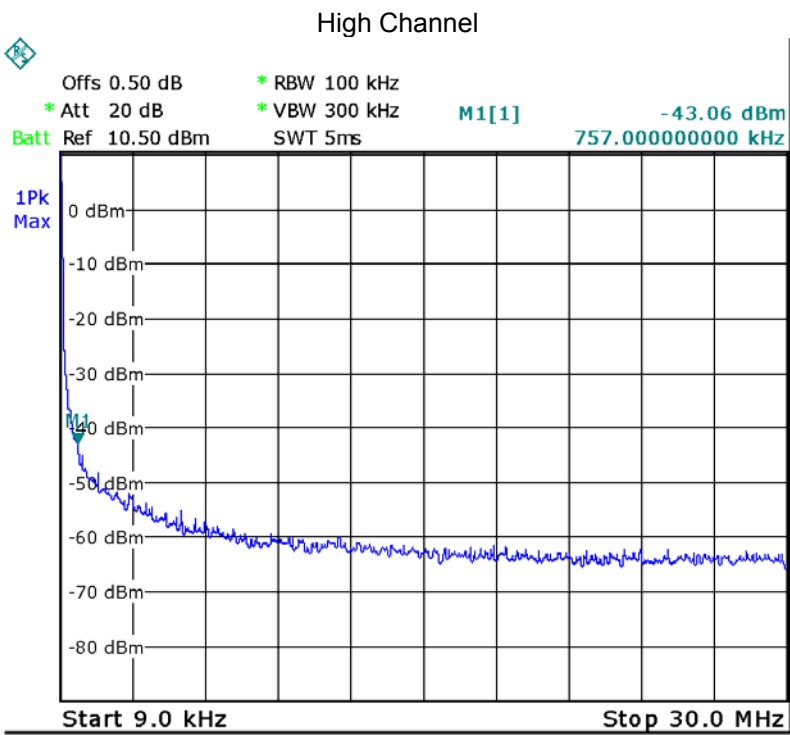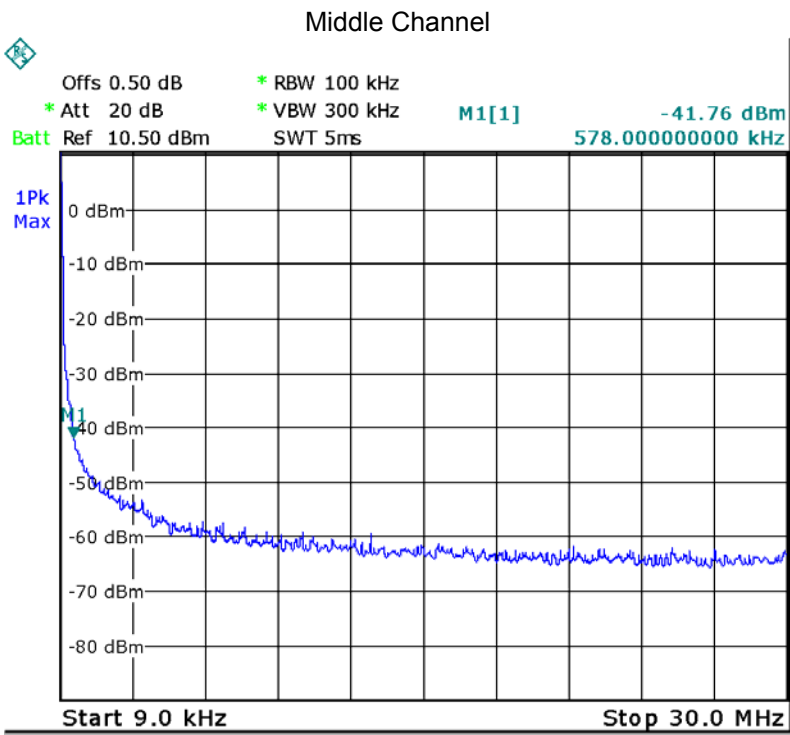



BLE

Low Channel

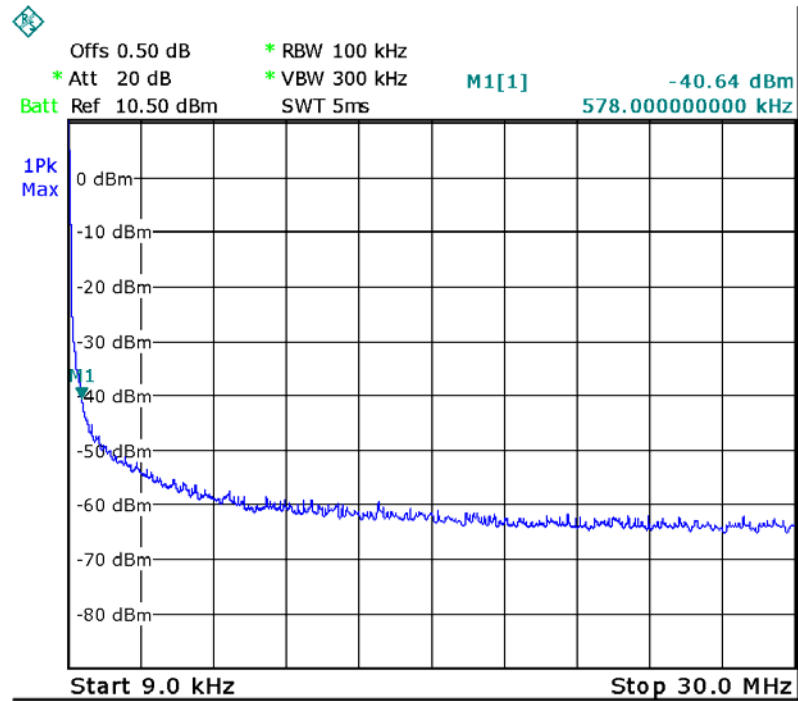


Middle Channel


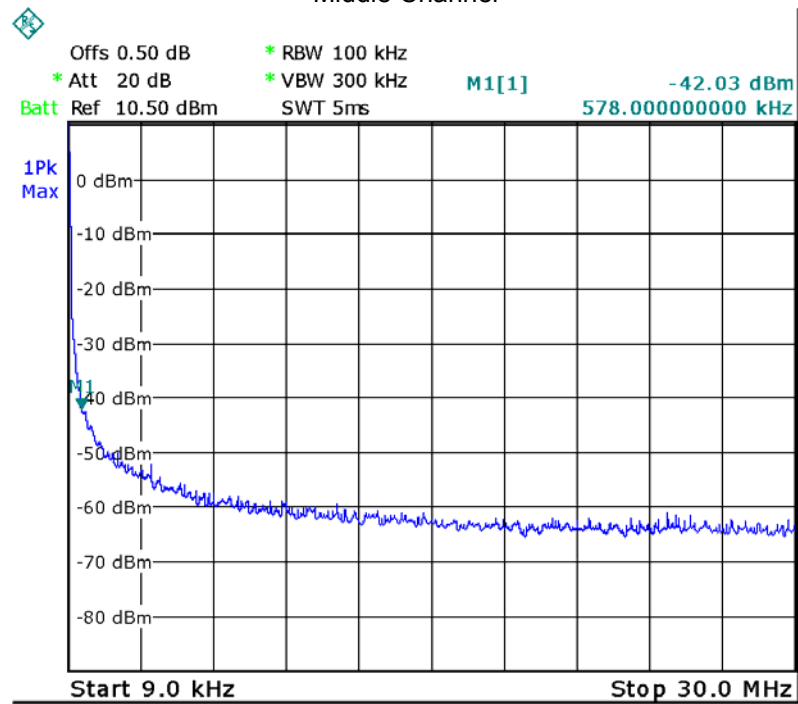


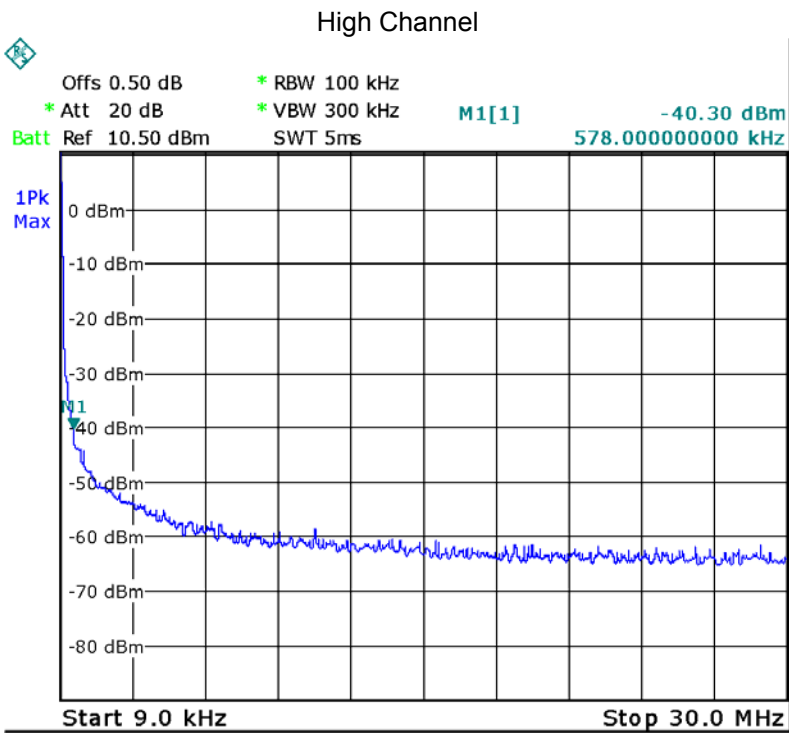

**30MHz – 1GHz**


802.11b

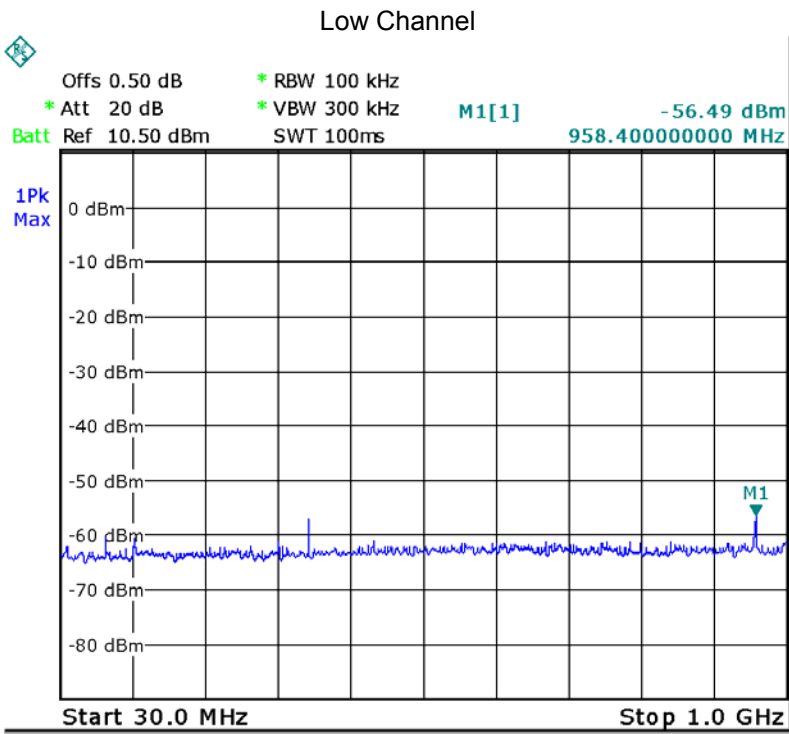

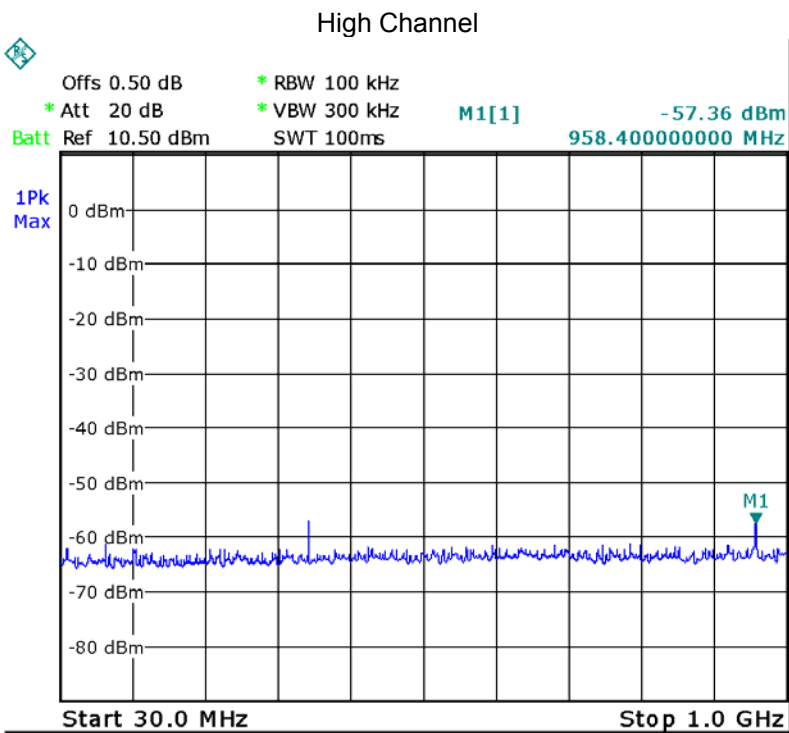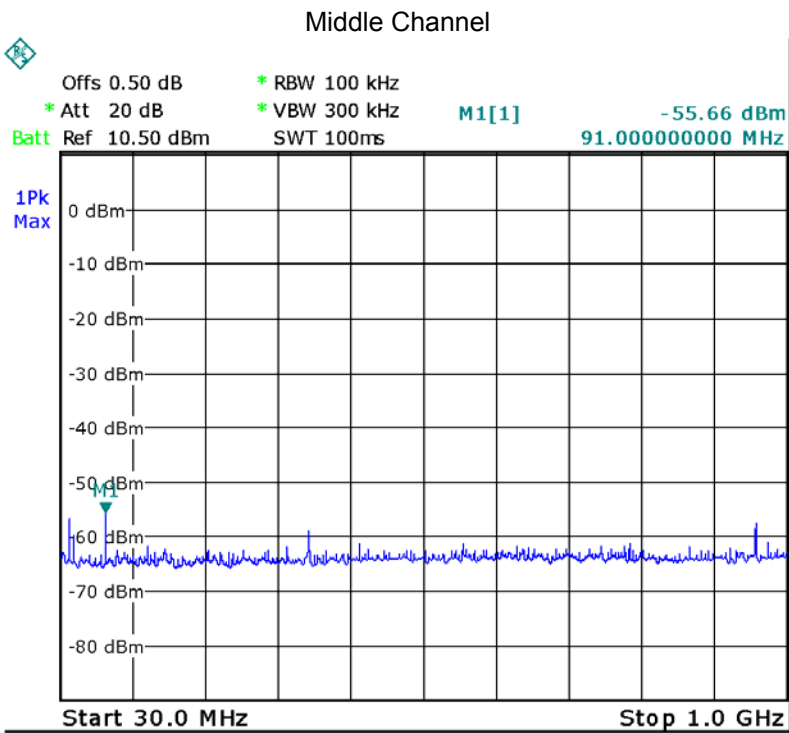



802.11g

Low Channel

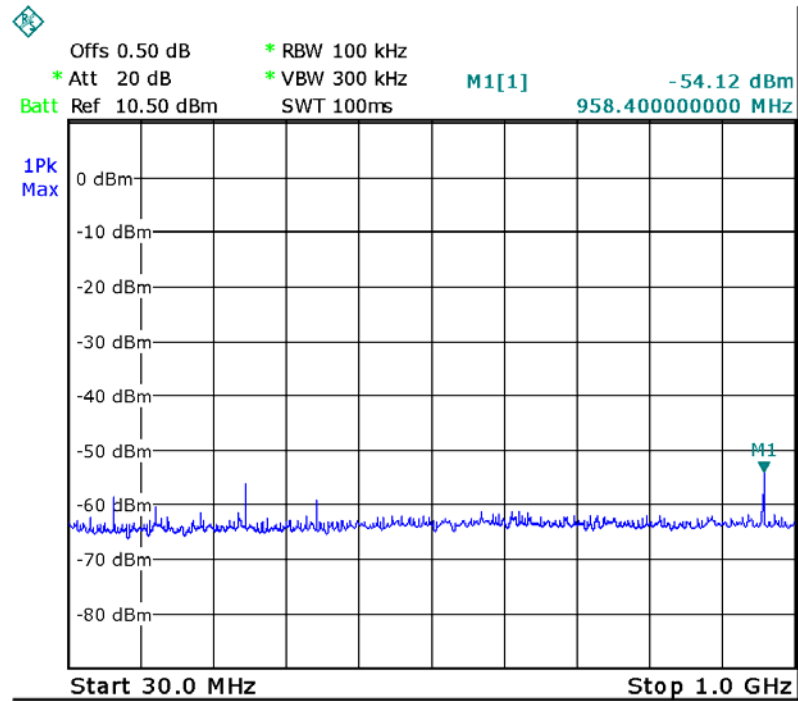


Middle Channel


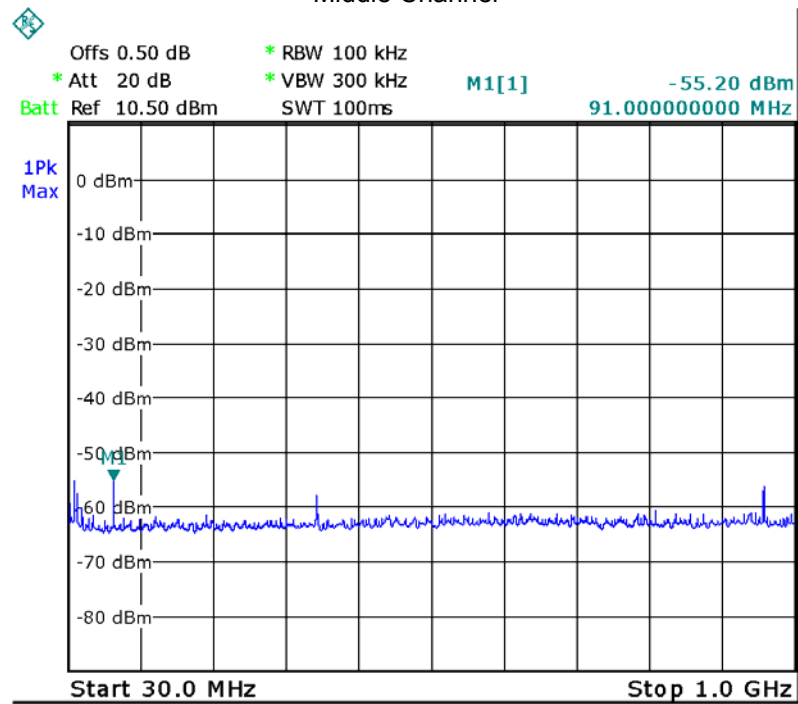


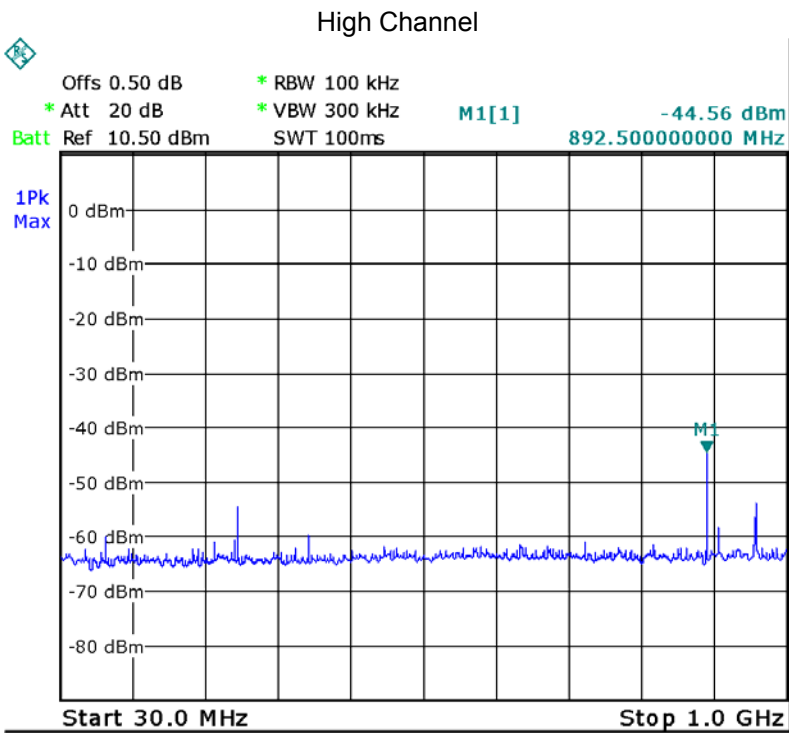

802.11n HT20

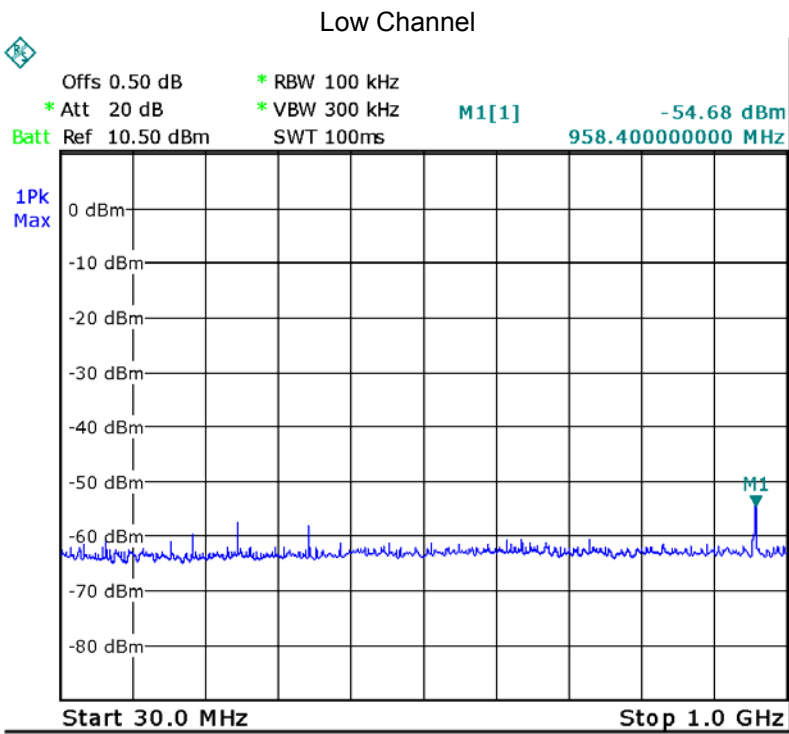




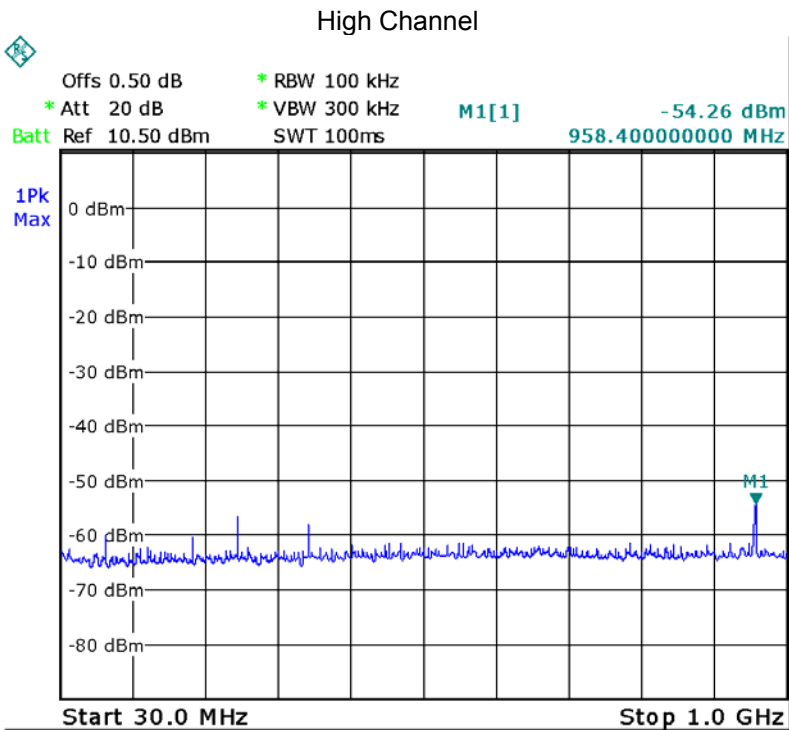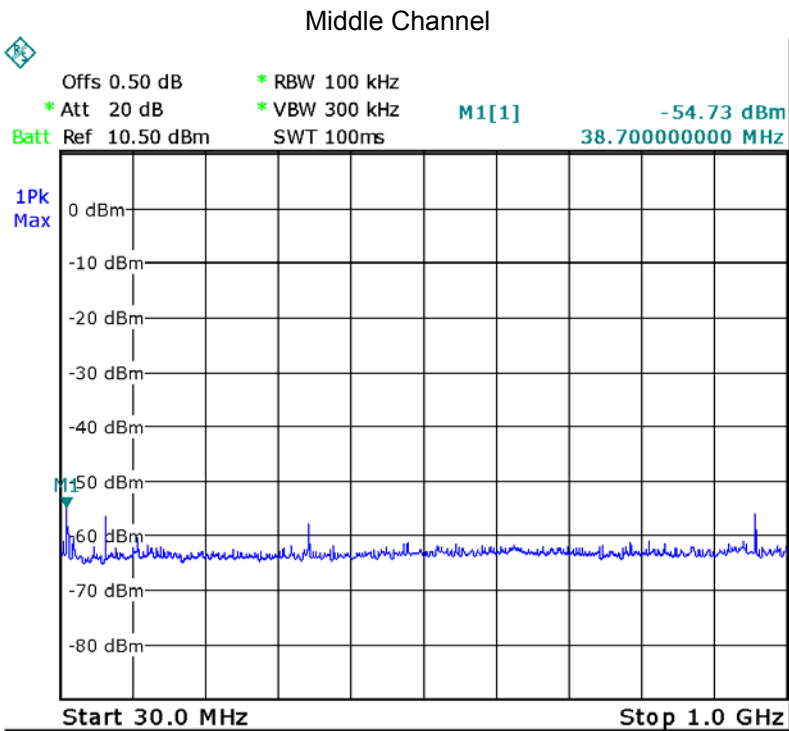




802.11n HT40



Low Channel

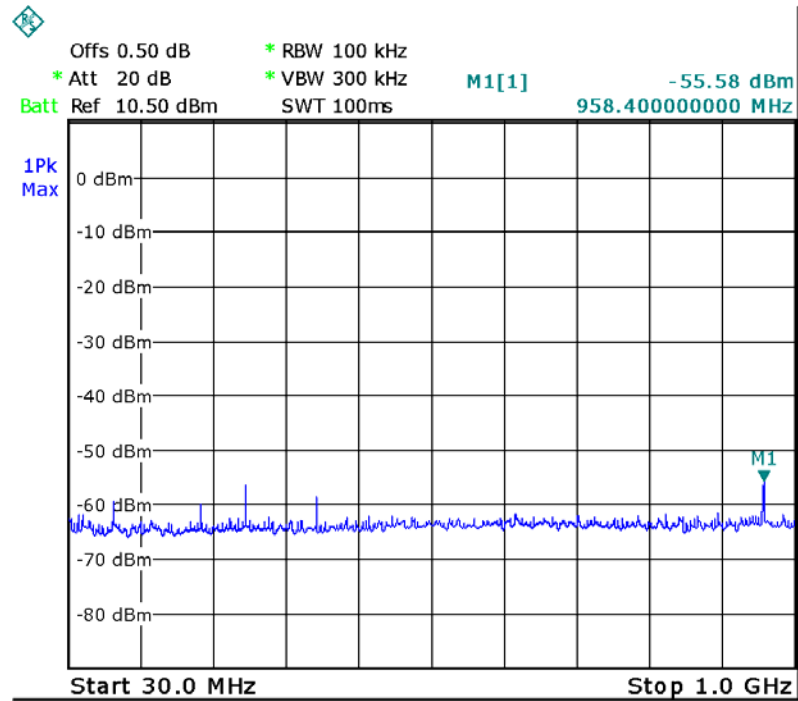

Middle Channel

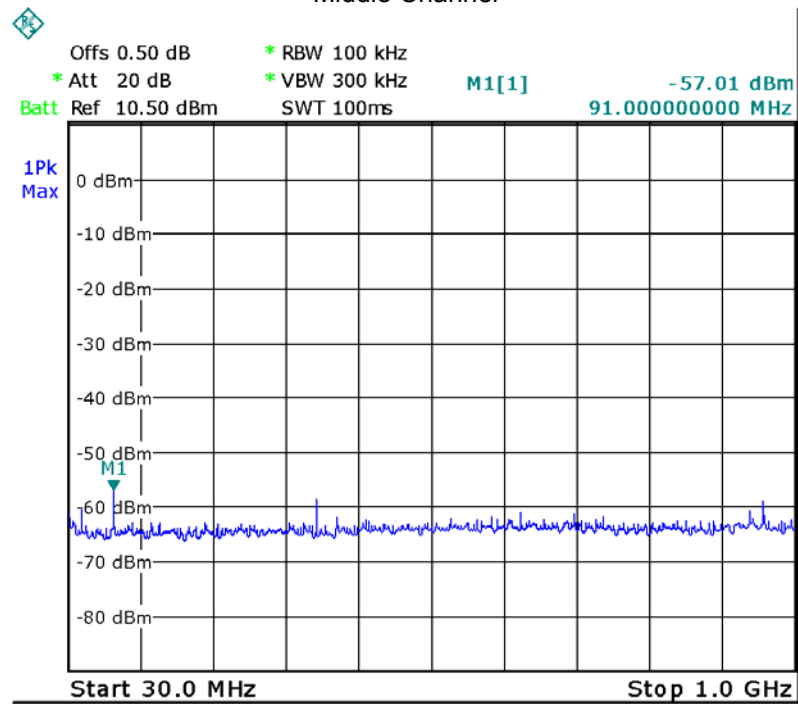

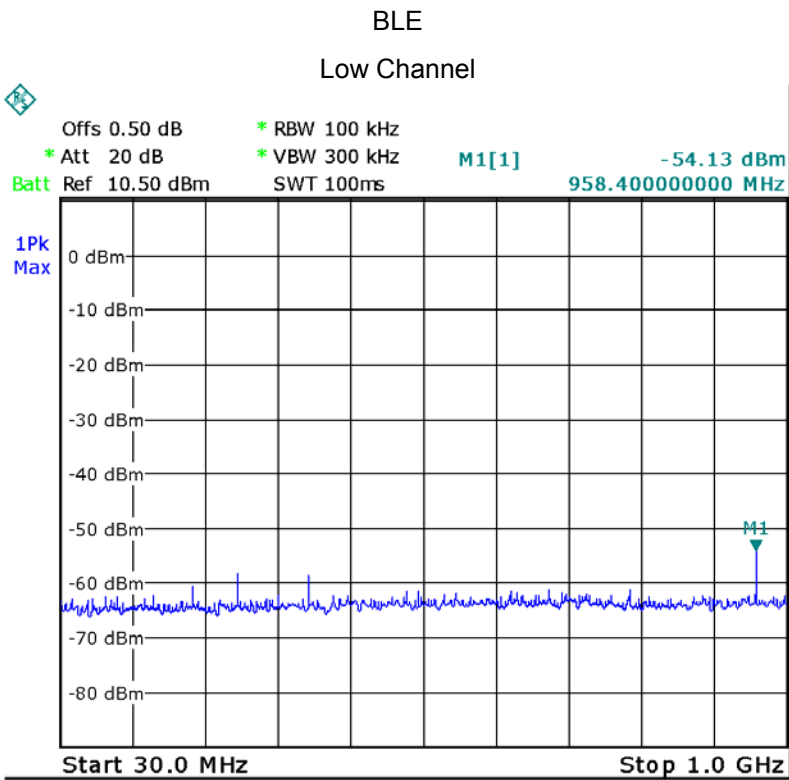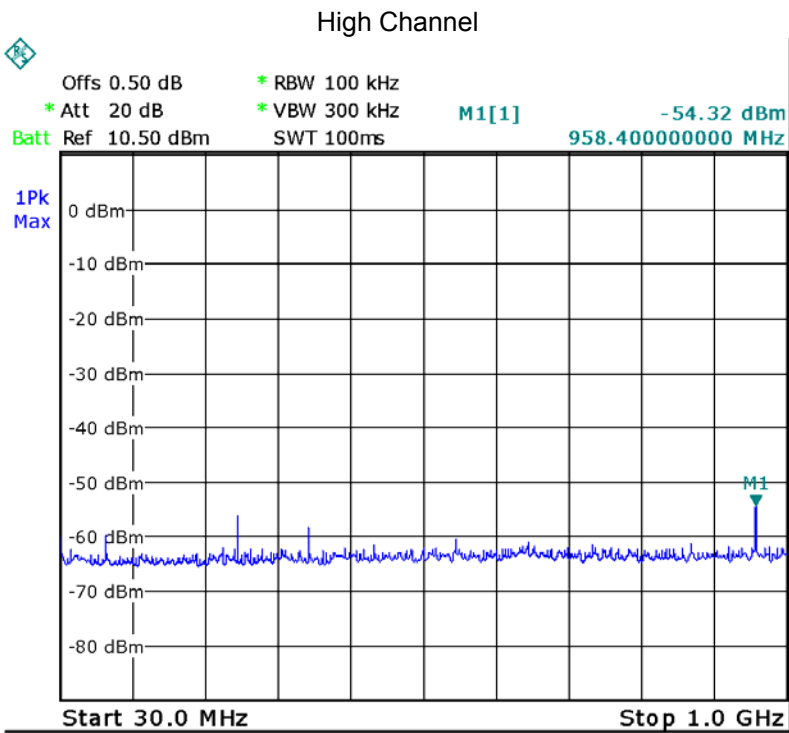

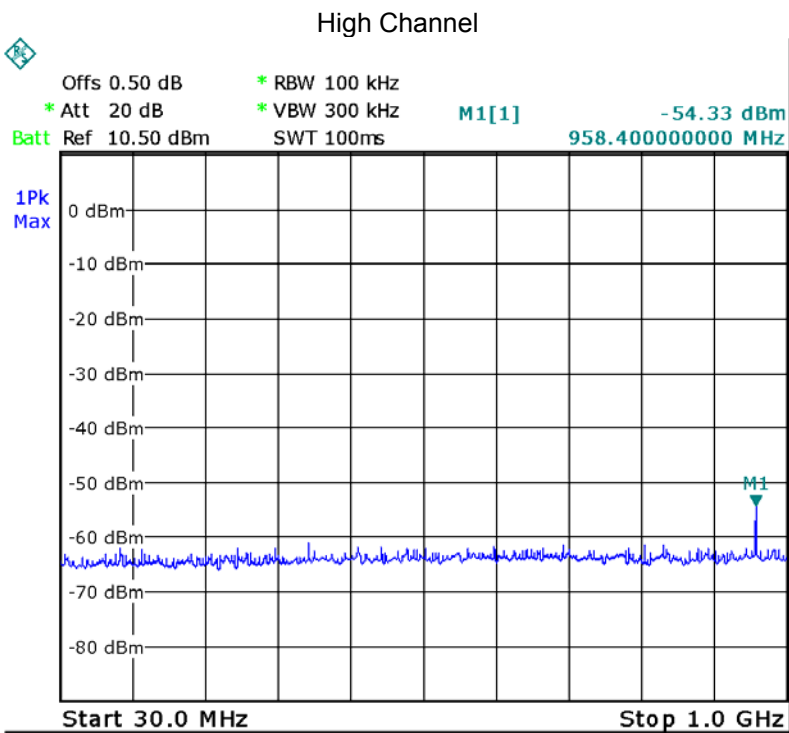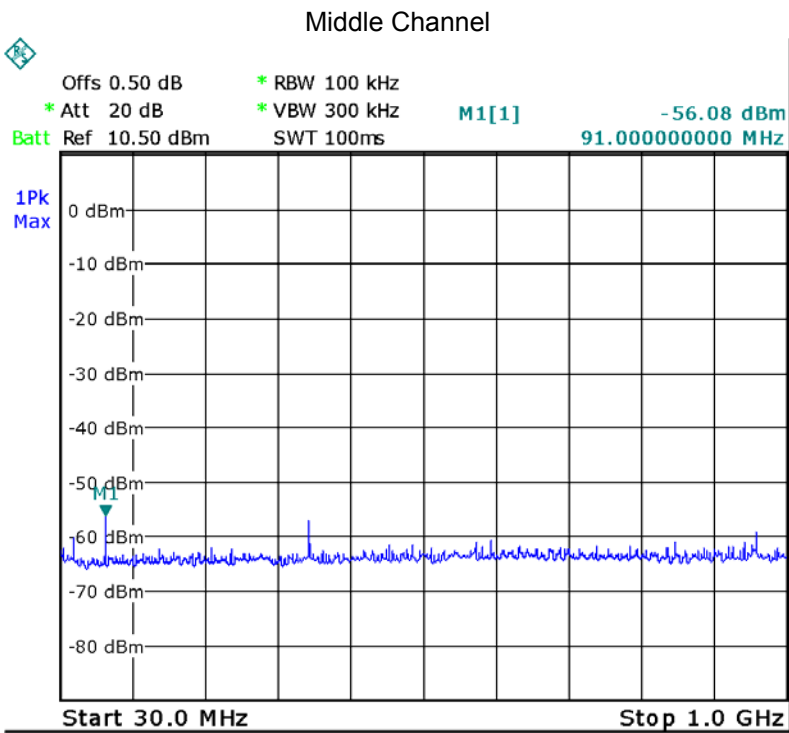

1GHz – 25GHz

802.11b

Low Channel

Fundamental




Middle Channel

Fundamental




## High Channel

Fundamental

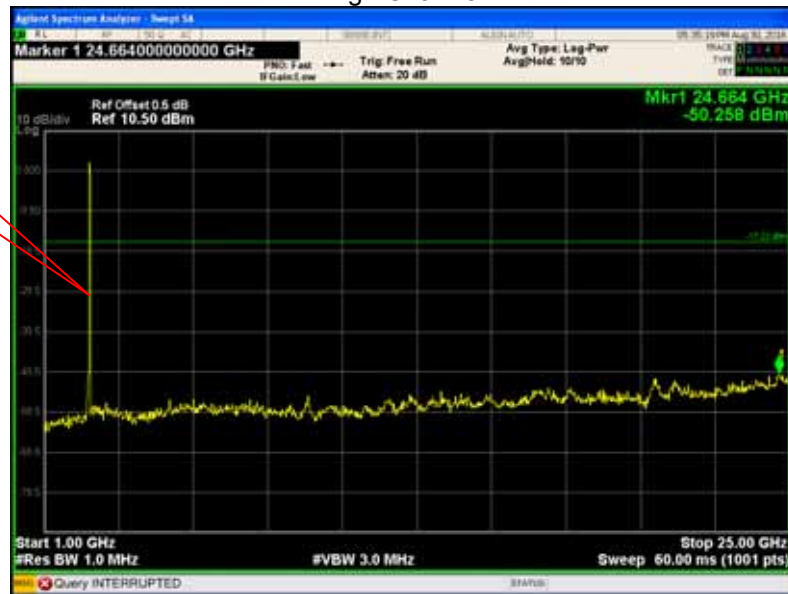802.11g  
Low Channel

Fundamental

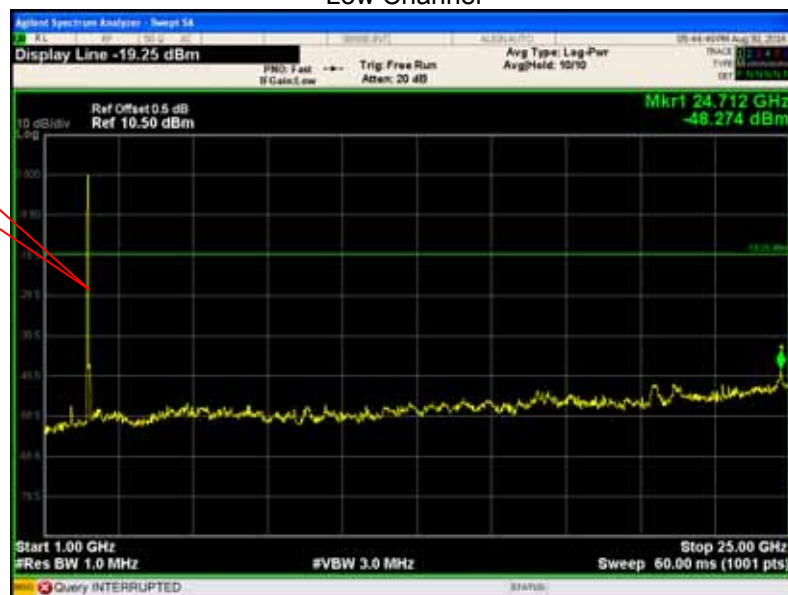

Middle Channel

Fundamental



High Channel

Fundamental



802.11n HT20

Low Channel

Fundamental



Middle Channel

Fundamental





High Channel

Fundamental



802.11n HT40

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



BLE


Low Channel

Fundamental




Middle Channel

Fundamental

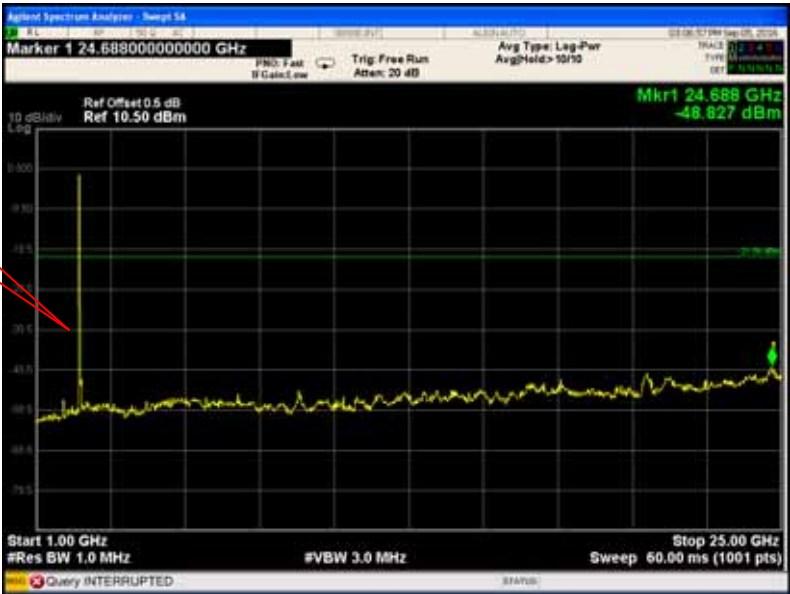

## High Channel

Fundamental

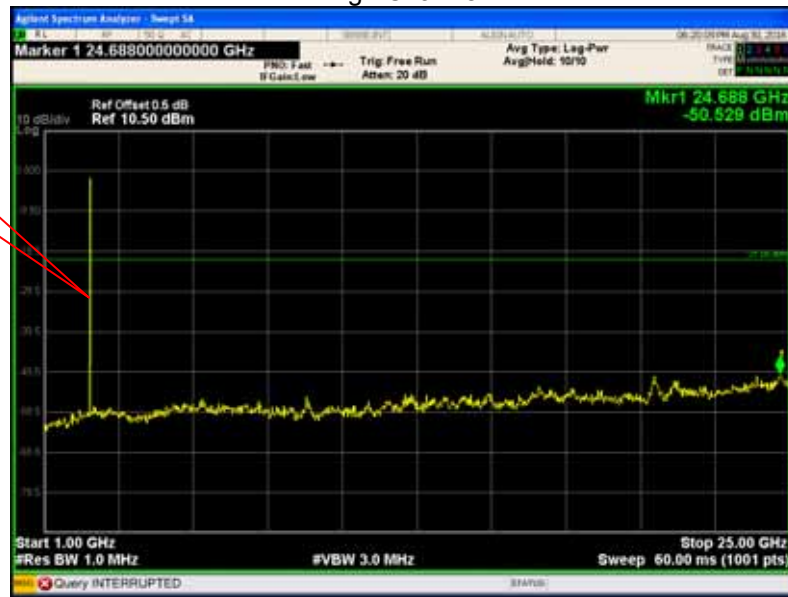

## 10 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

### 10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result


Test result plots shown as follows:

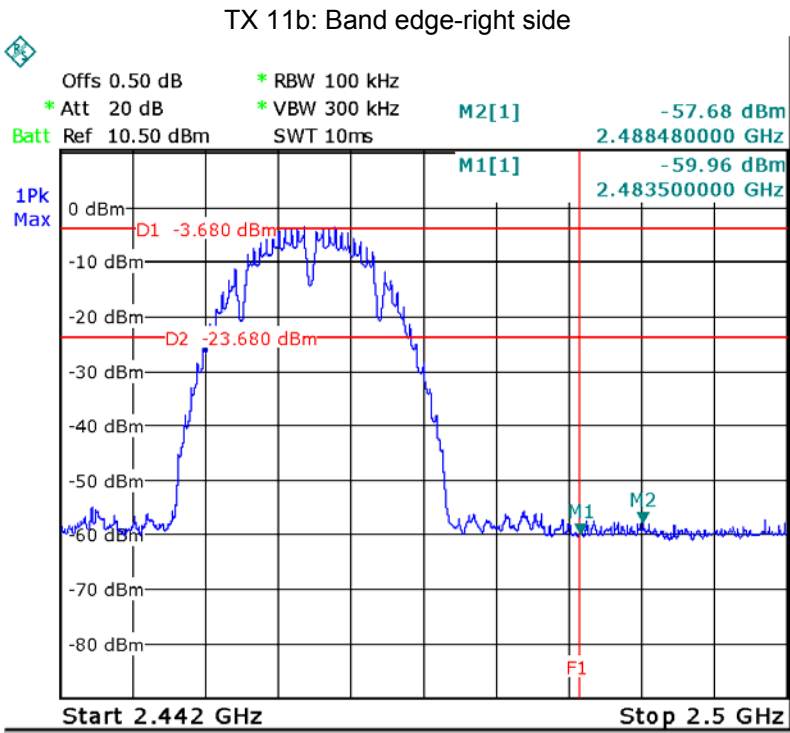
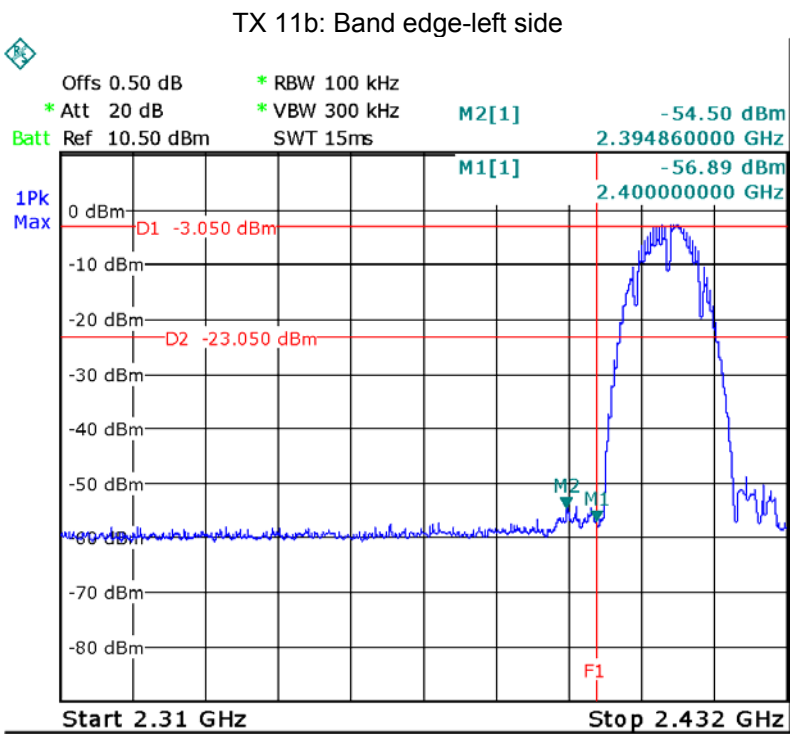


TX 11g: Band edge-left side


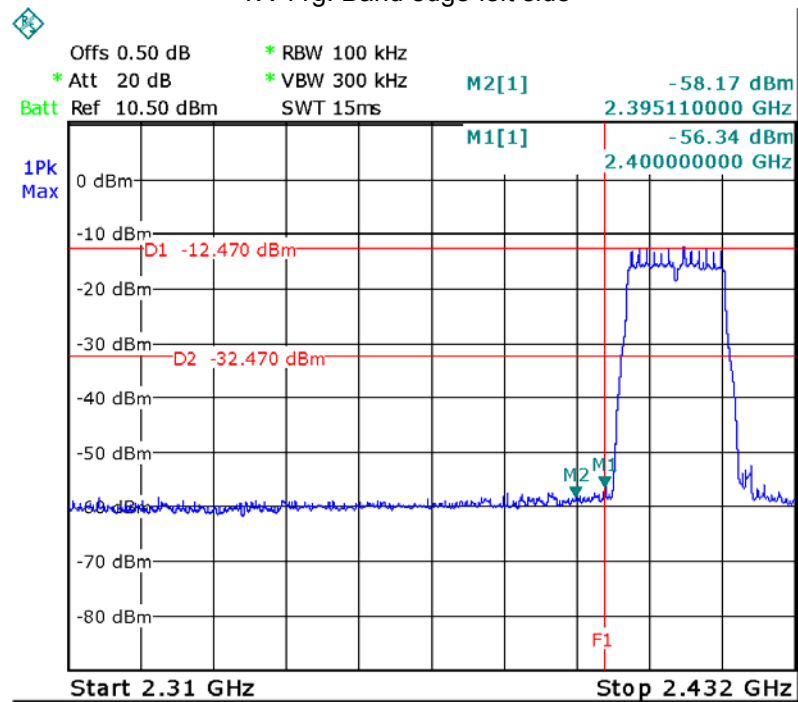




TX 11g: Band edge-right side

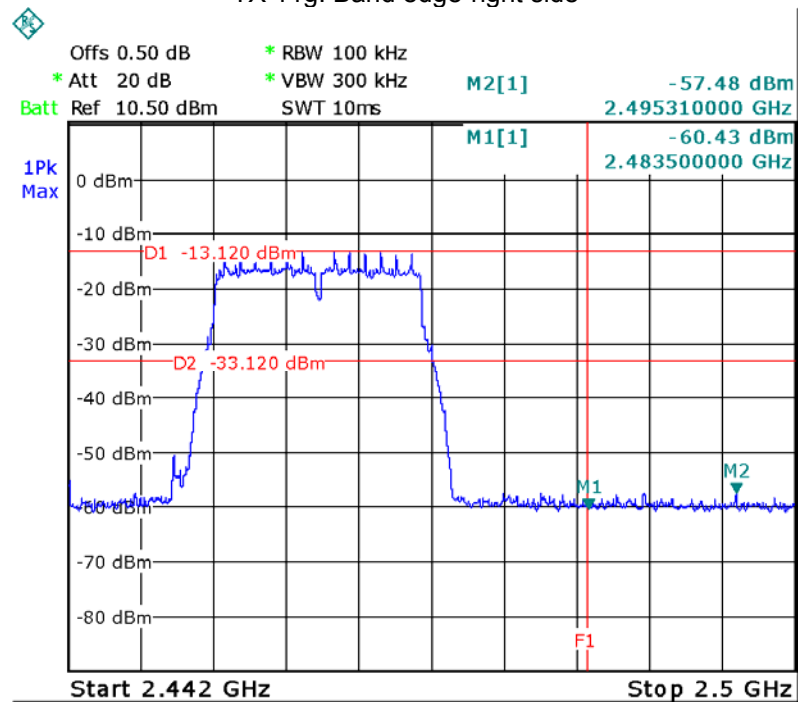

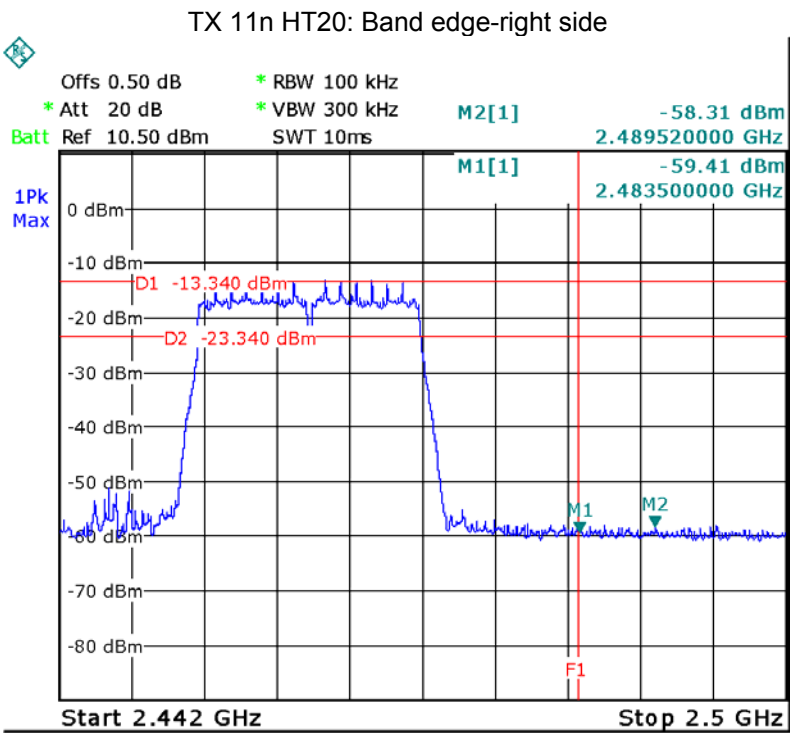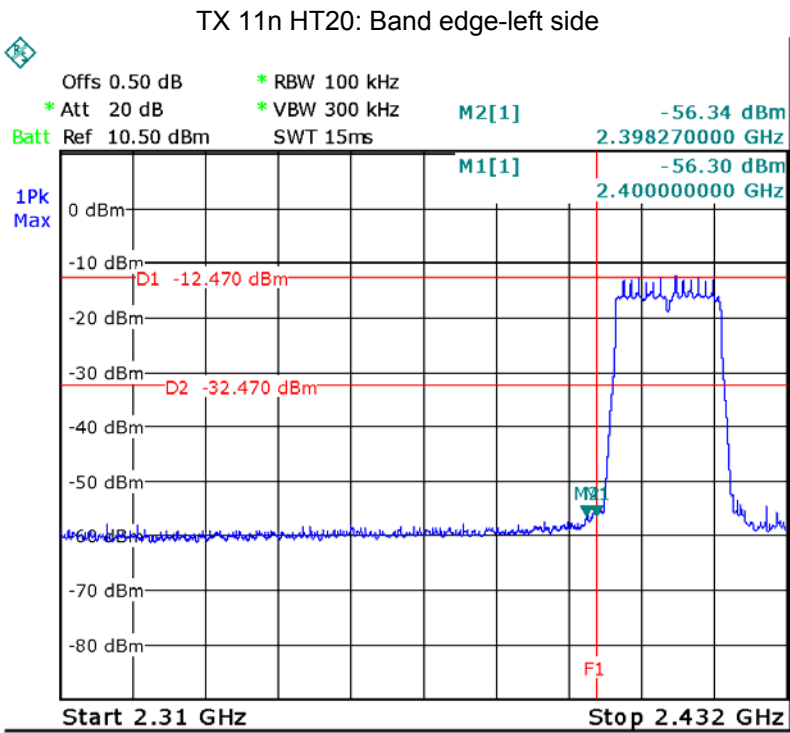



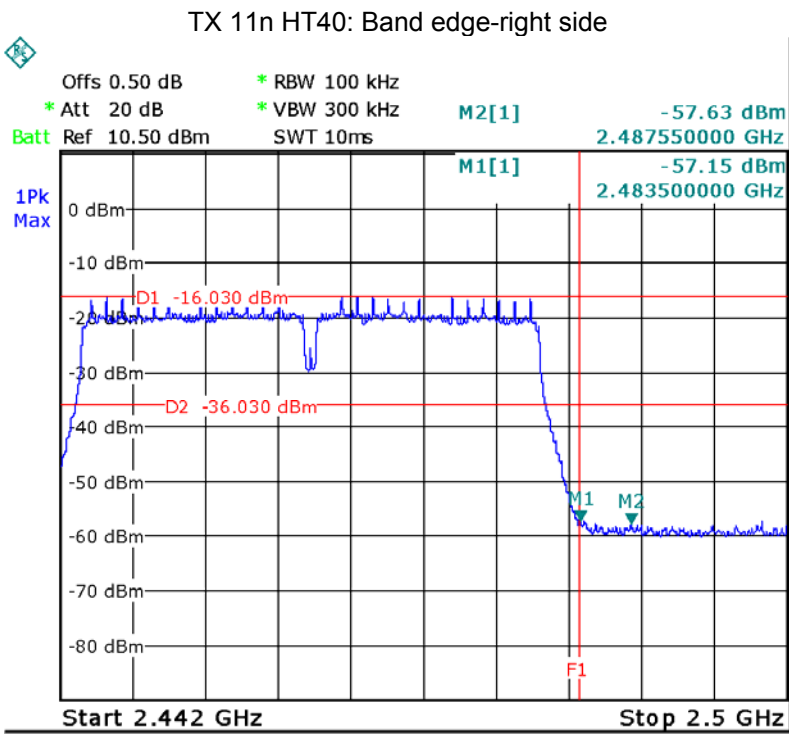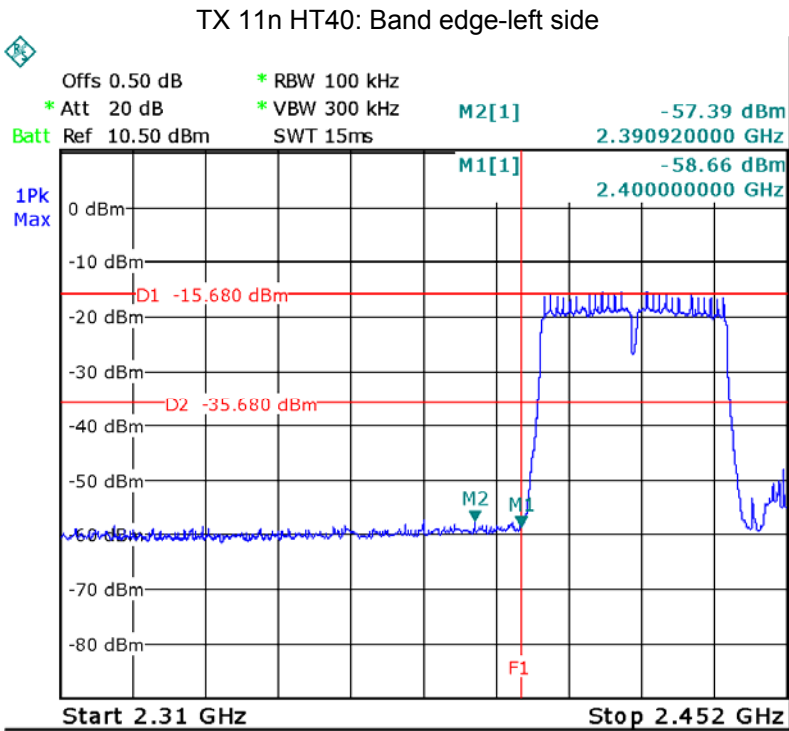

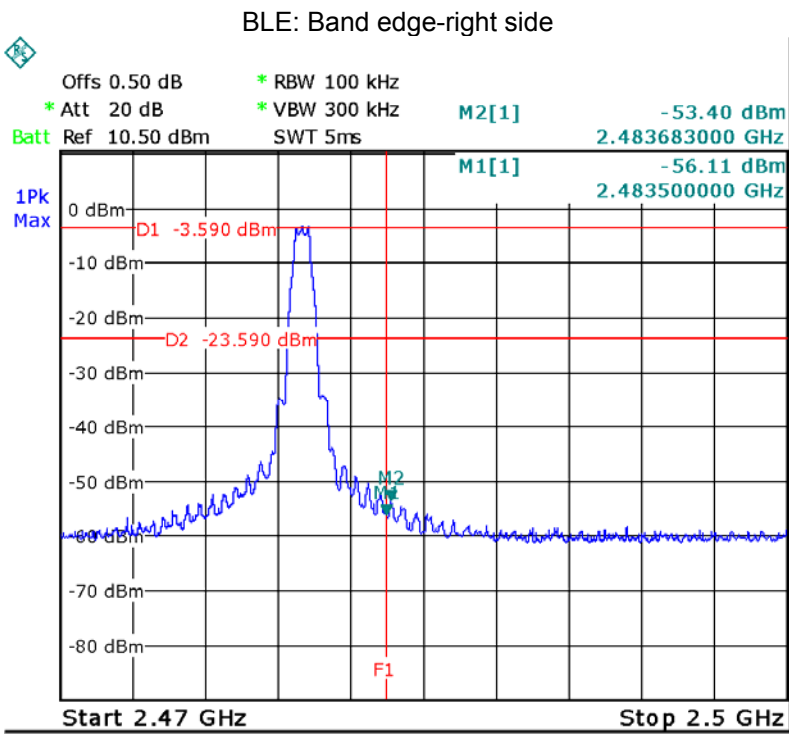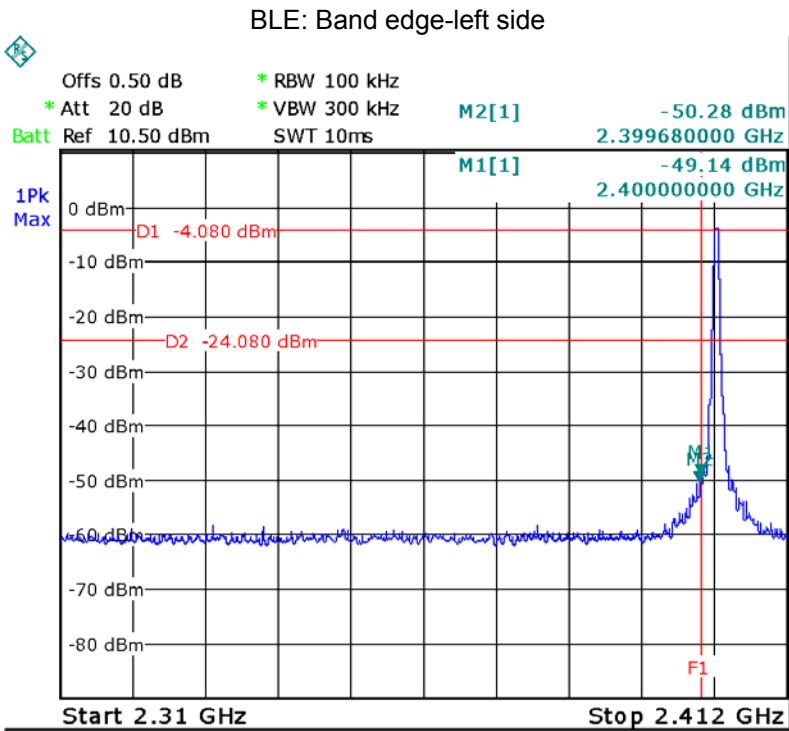

## 11 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016



### 11.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



### 11.2 Test Result:



Operation mode	Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11
	10.092	10.092	10.060
TX 11g	Channel 1	Channel 6	Channel 11
	16.417	16.417	16.417
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.623	17.623	17.623
TX 11n HT40	Channel 3	Channel 6	Channel 9
	35.350	35.350	35.350
BLE	Channel 0	Channel 19	Channel 39
	0.713	0.713	0.713



Test result plot as follows:

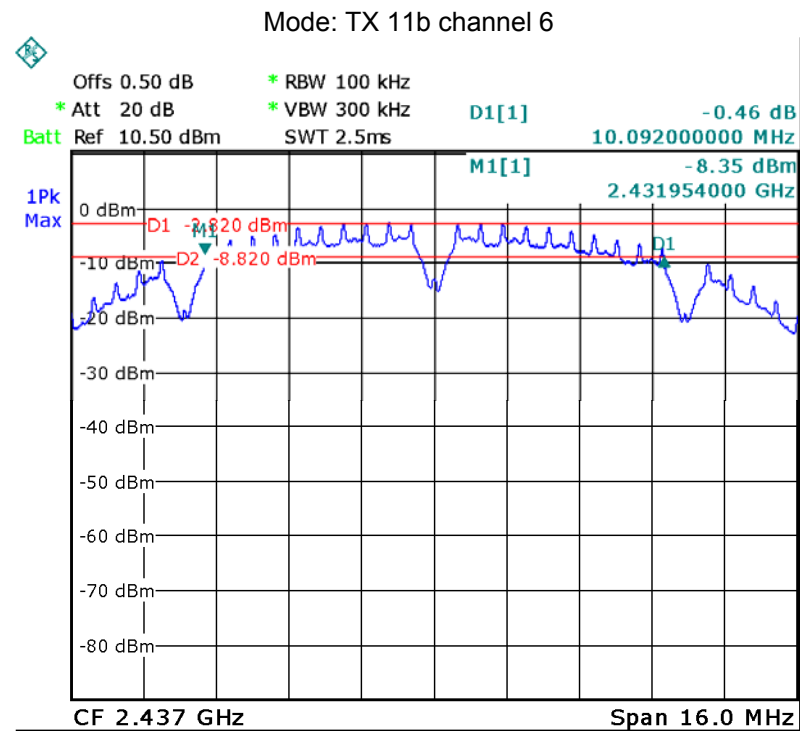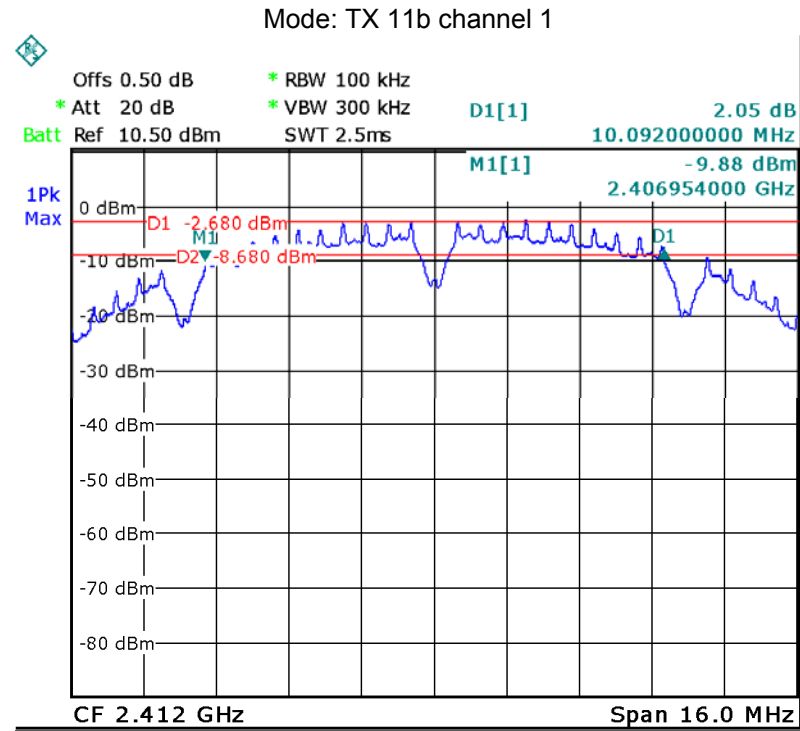

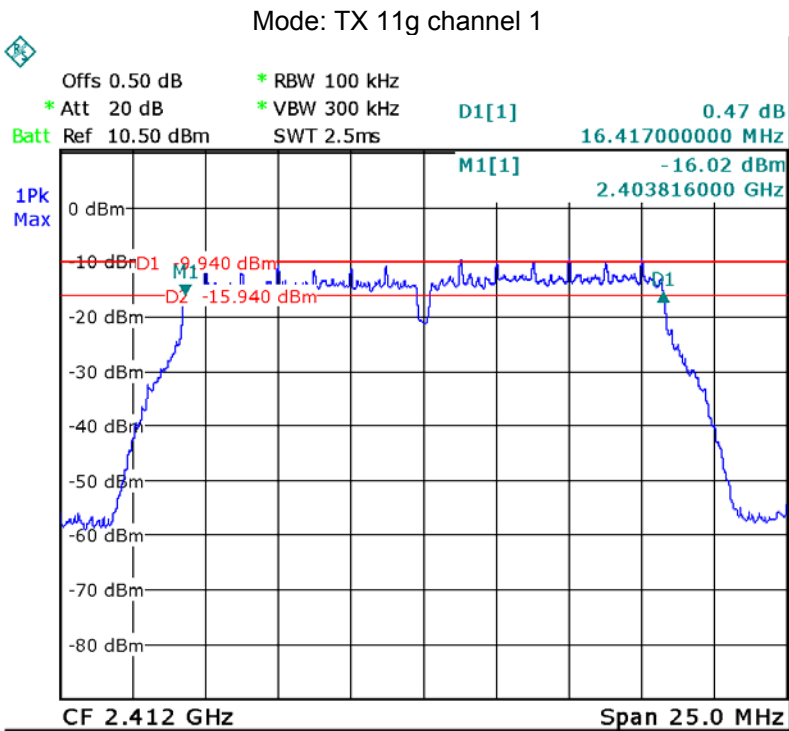
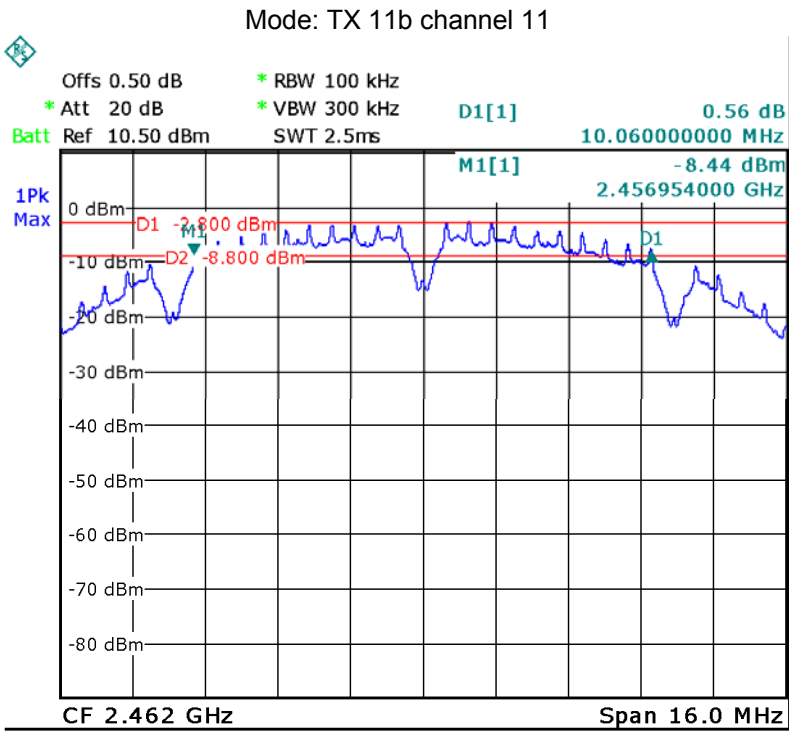


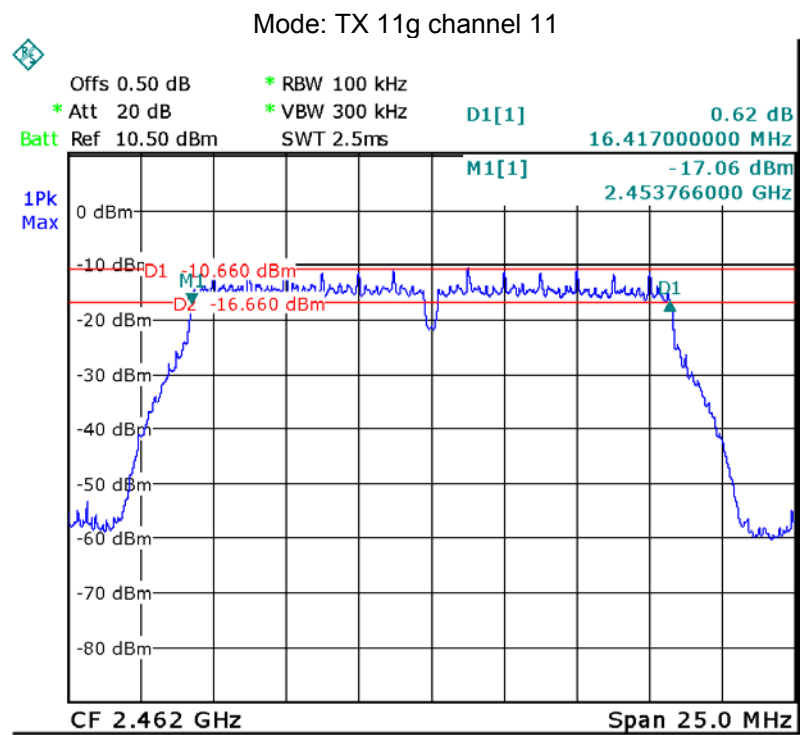
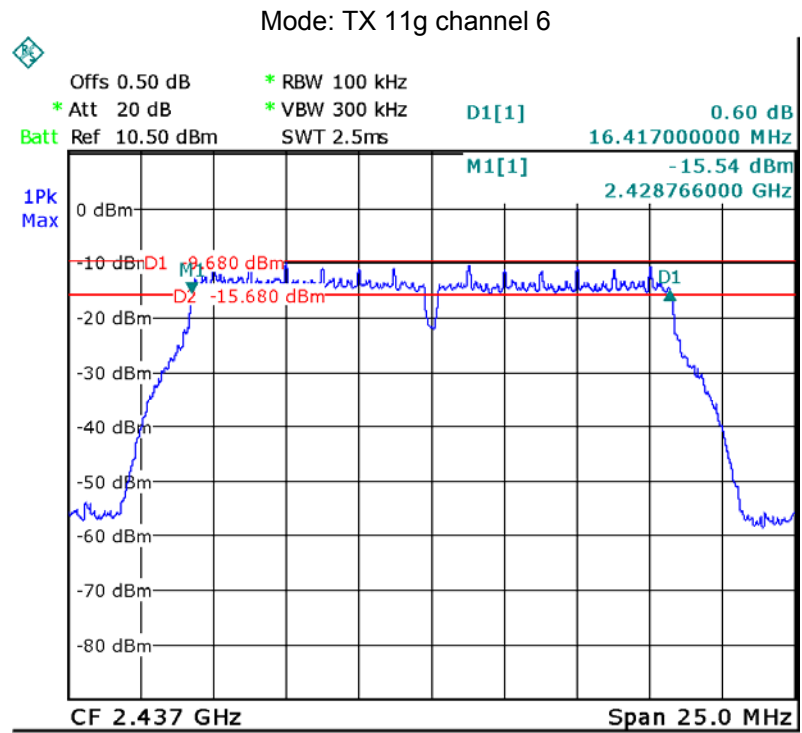


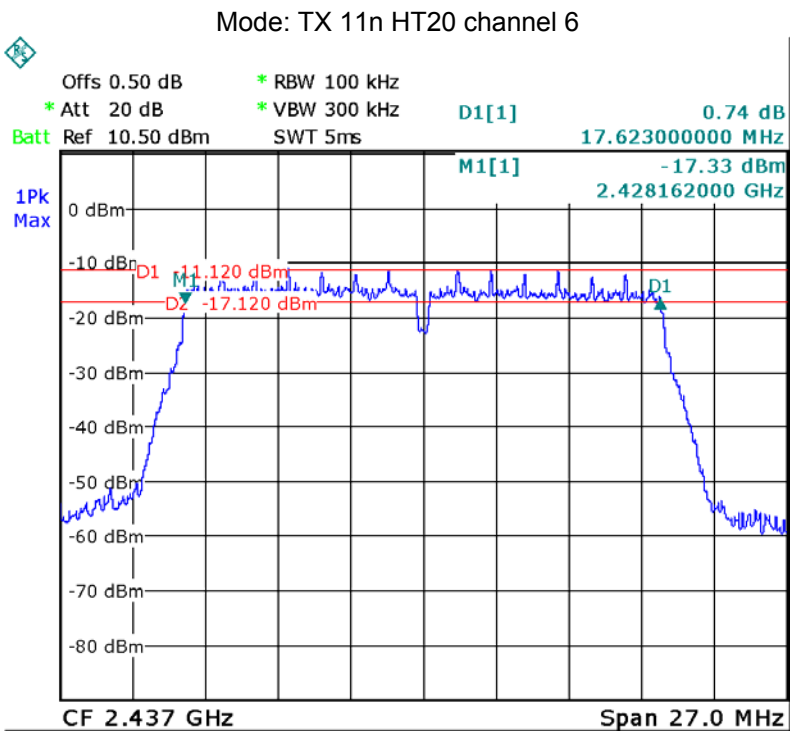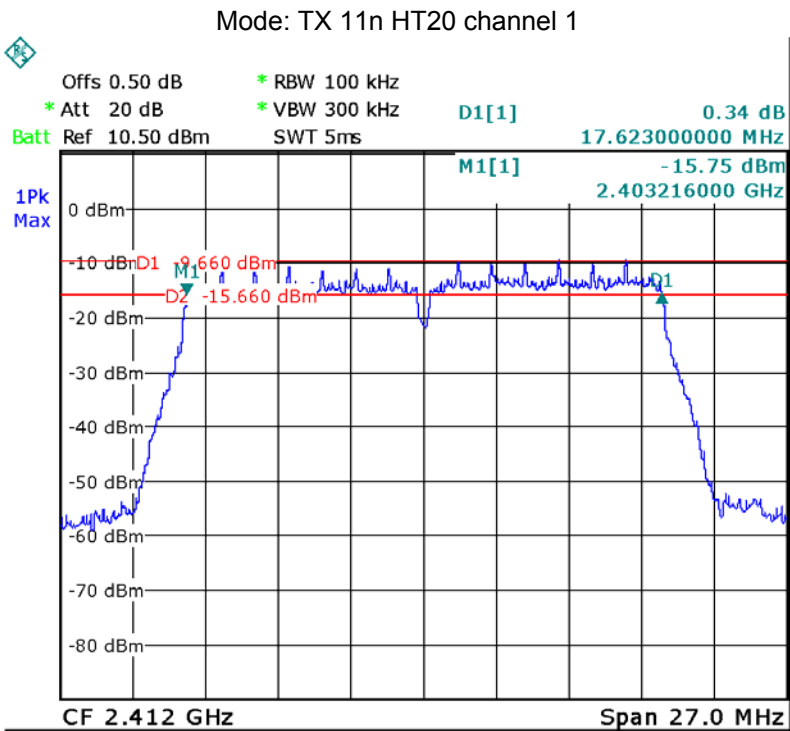


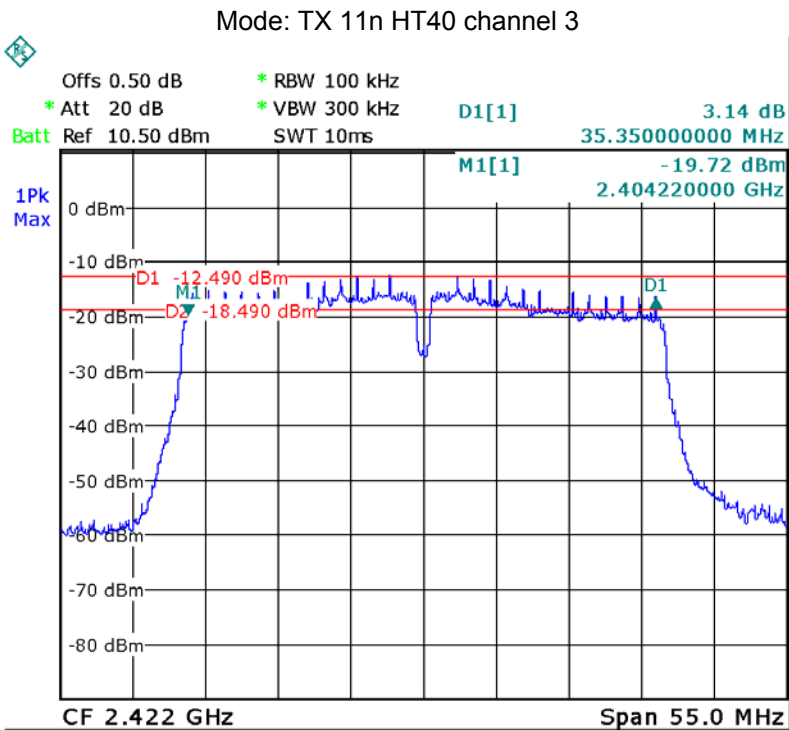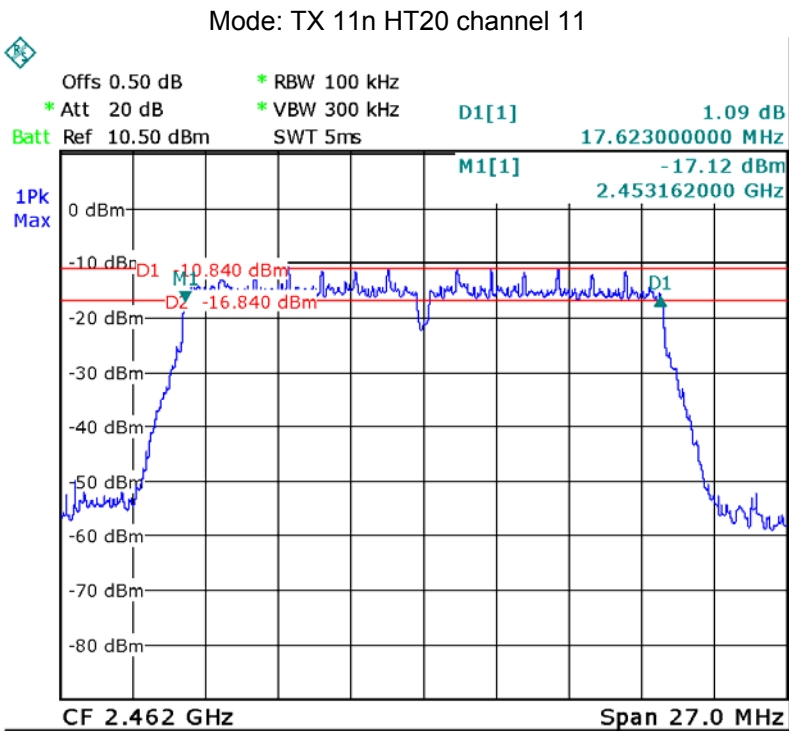



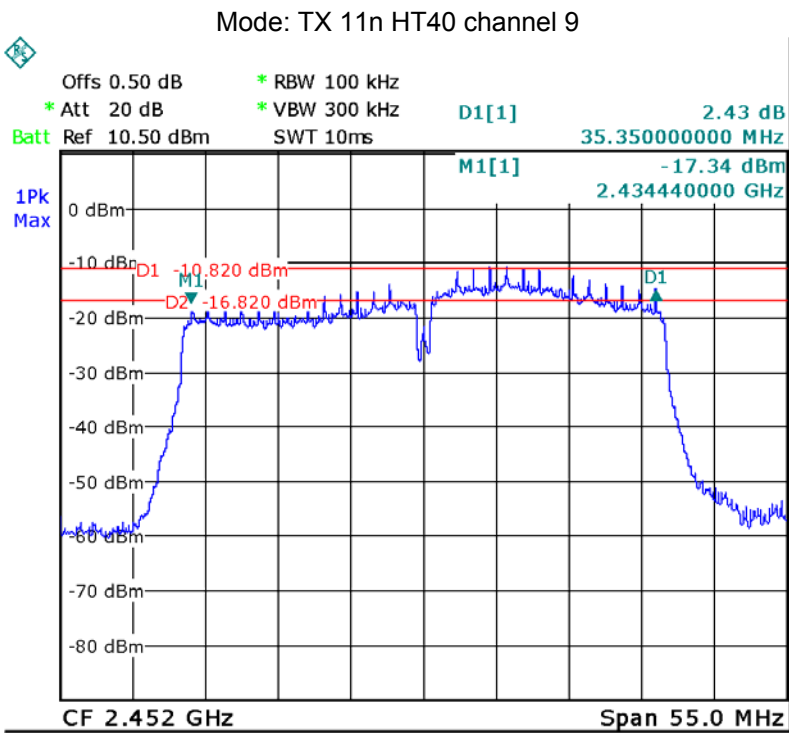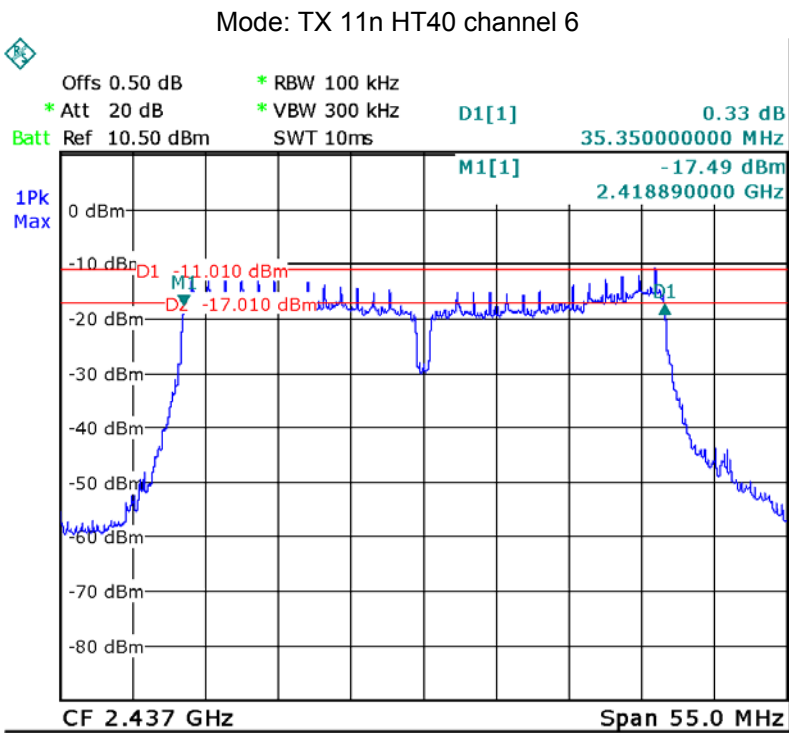

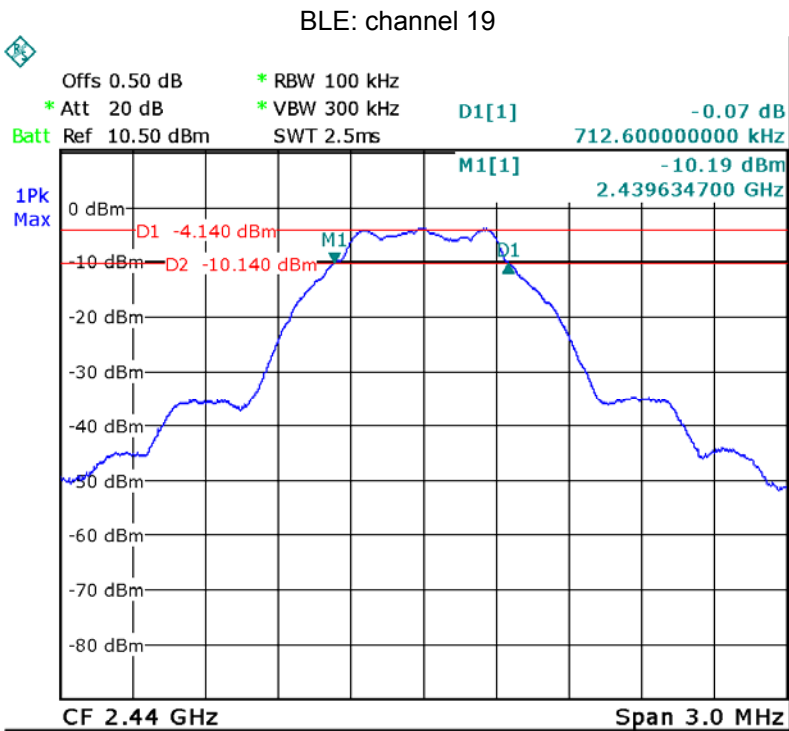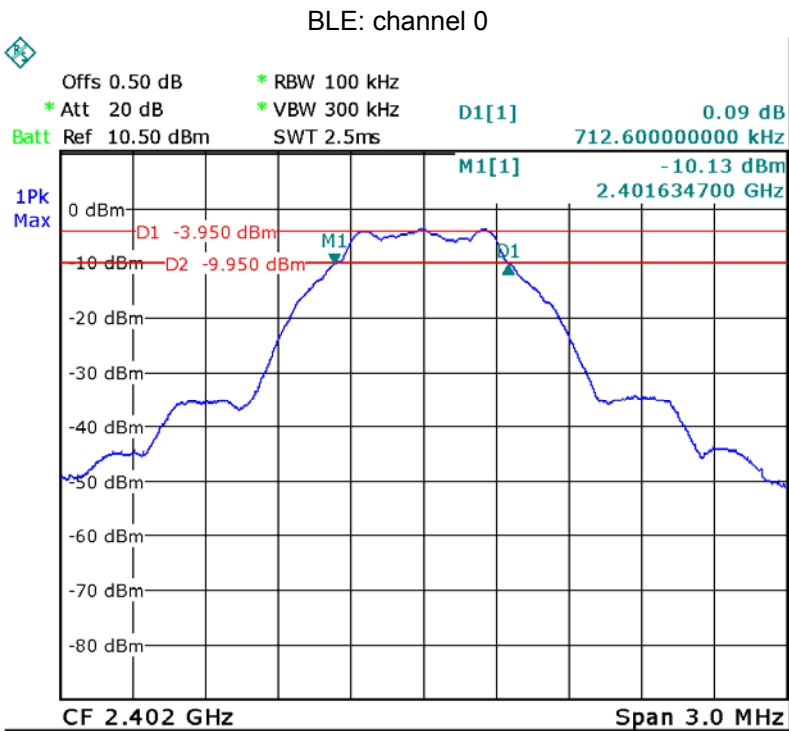

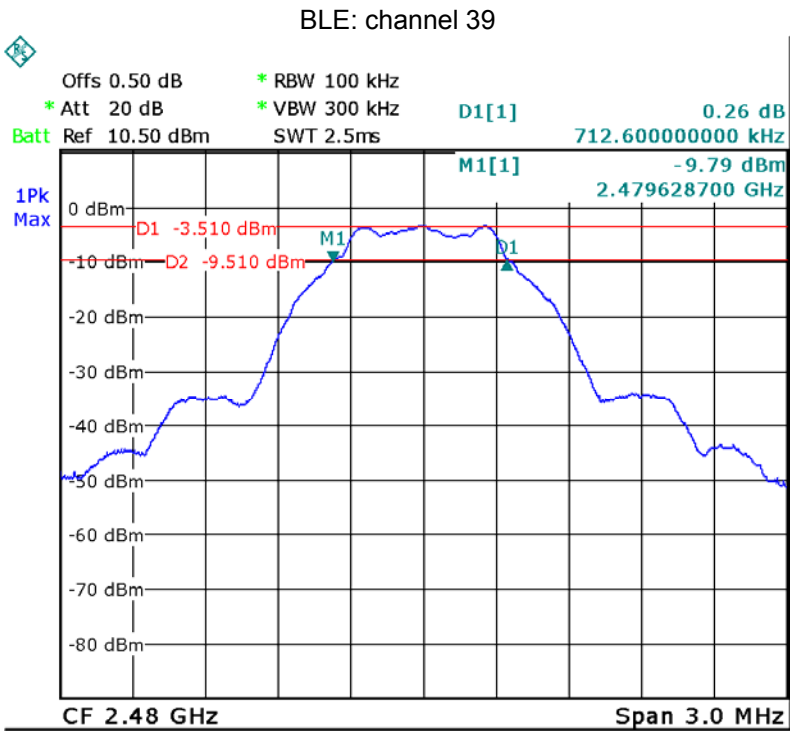

## 12 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

### 12.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the  $RBW \geq$  DTS bandwidth.
- b) Set  $VBW \geq 3 \times RBW$ .
- c) Set  $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the  $RBW = 1 \text{ MHz}$ .
- b) Set the  $VBW \geq 3 \times RBW$
- c) Set the  $span \geq 1.5 \times$  DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

**12.2 Test Result:**



Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.13	9.22	9.18
Limit: 1W/30dBm		



Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.27	9.22	9.37
Limit: 1W/30dBm		



Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.30	9.05	9.22
Limit: 1W/30dBm		

Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.06	9.34	9.39
Limit: 1W/30dBm		



BLE		
Maximum Peak Output Power (dBm)		
2402MHz	2440MHz	2480MHz
-3.13	-3.27	-2.66
Limit: 1W/30dBm		

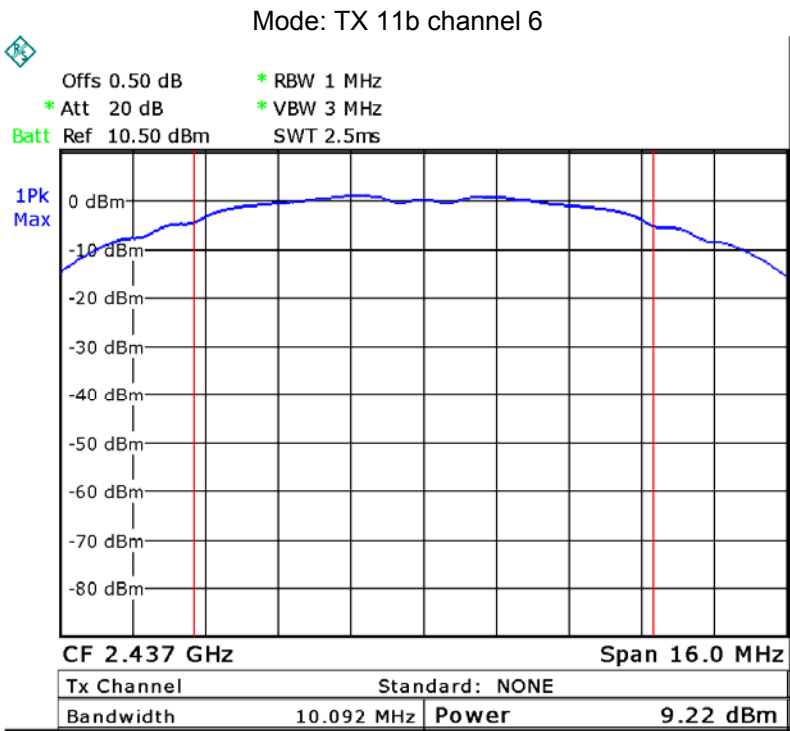
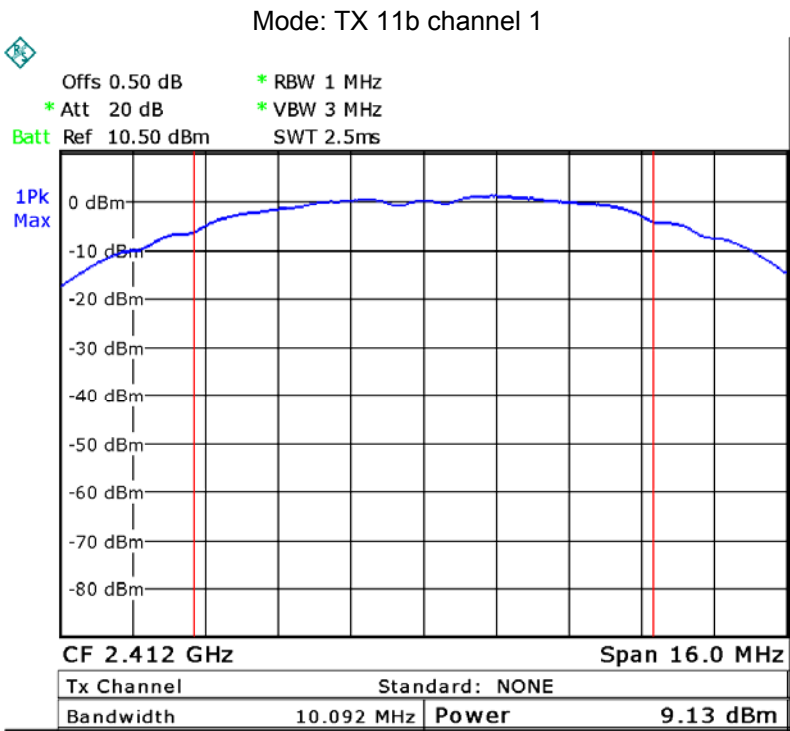


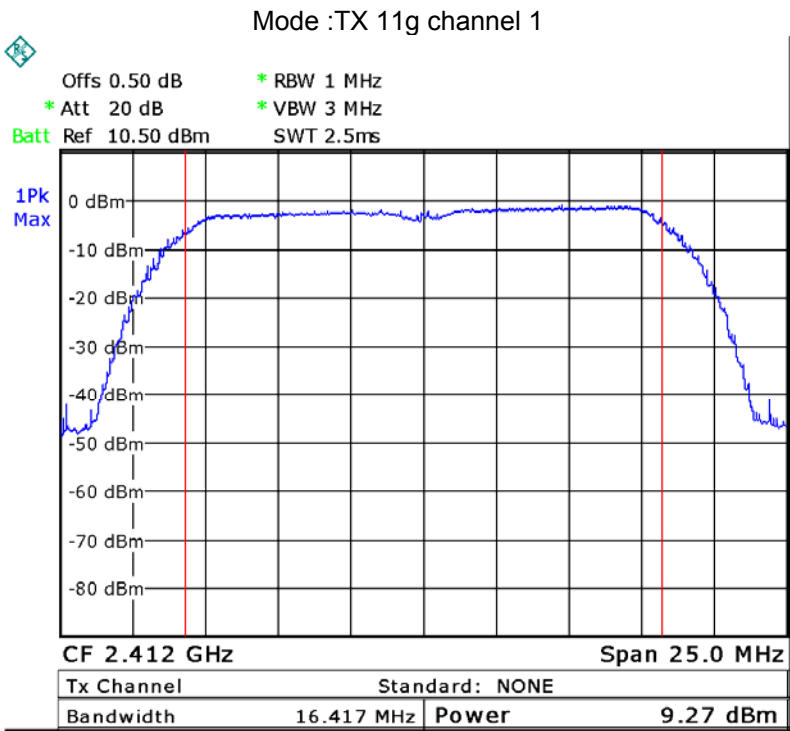
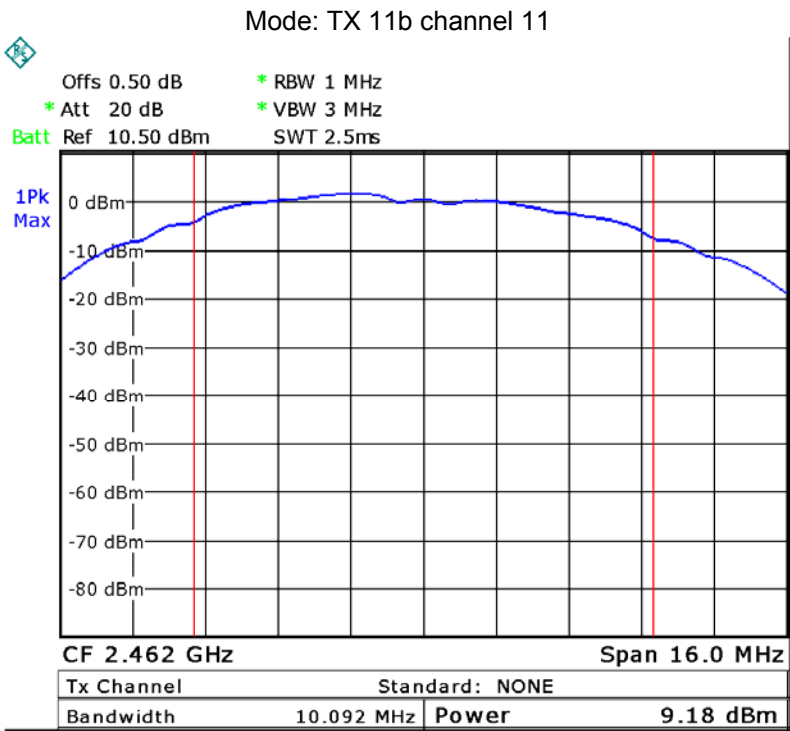


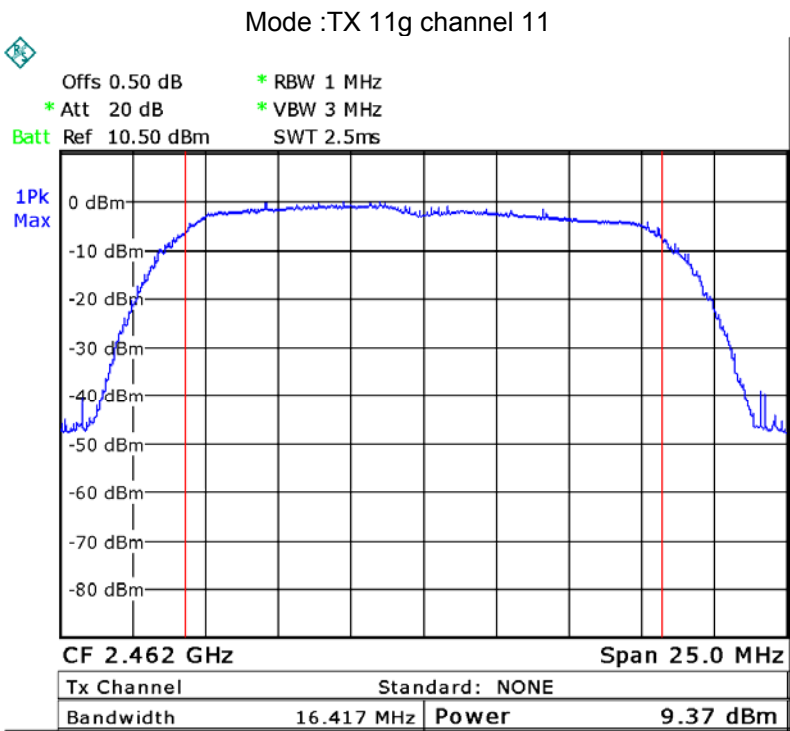
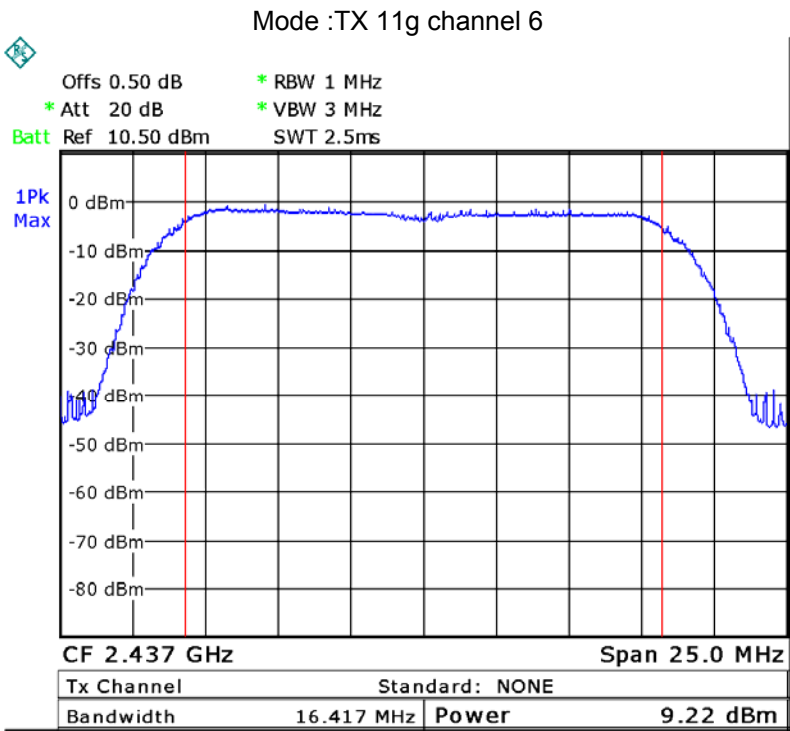





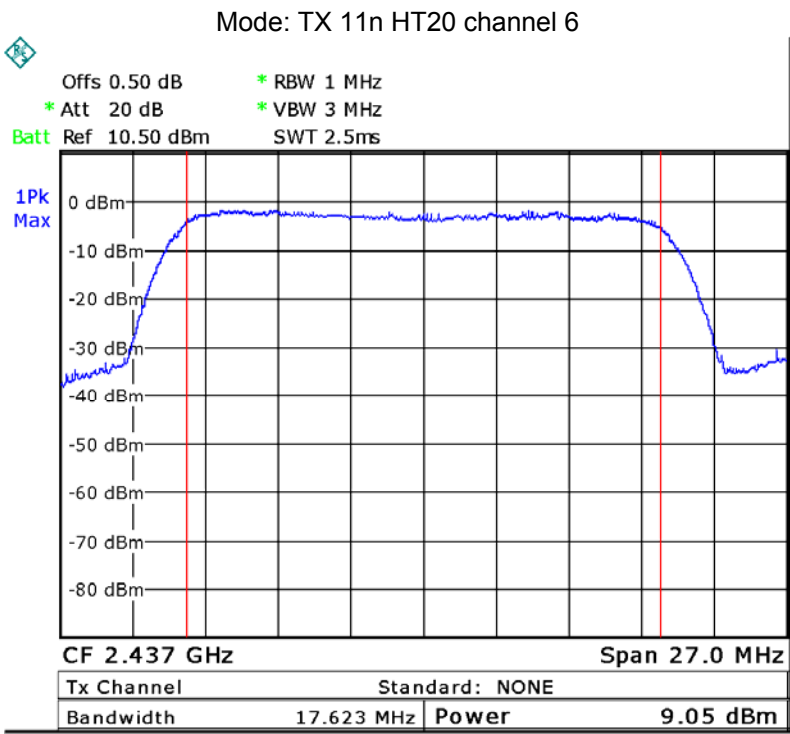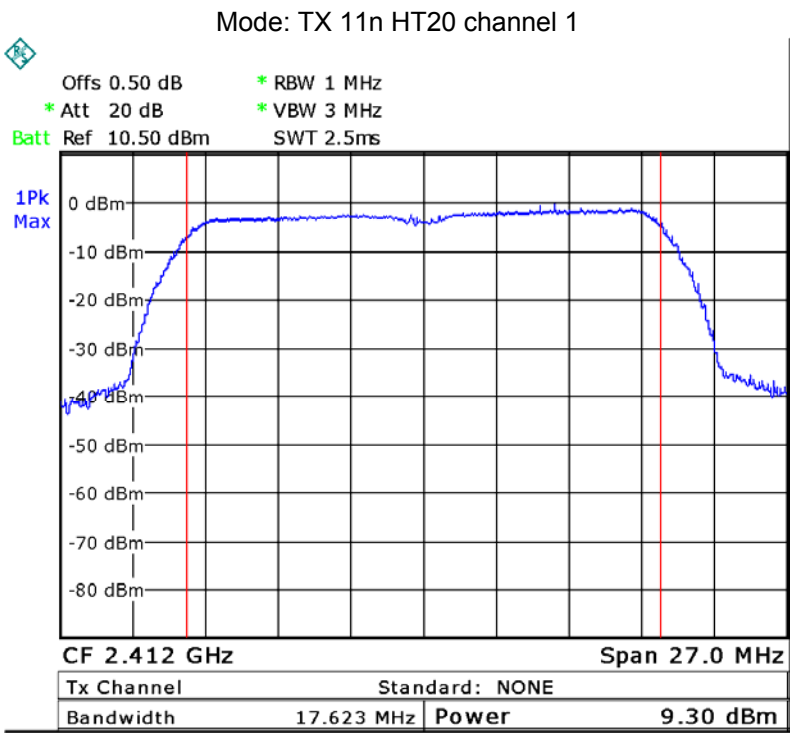

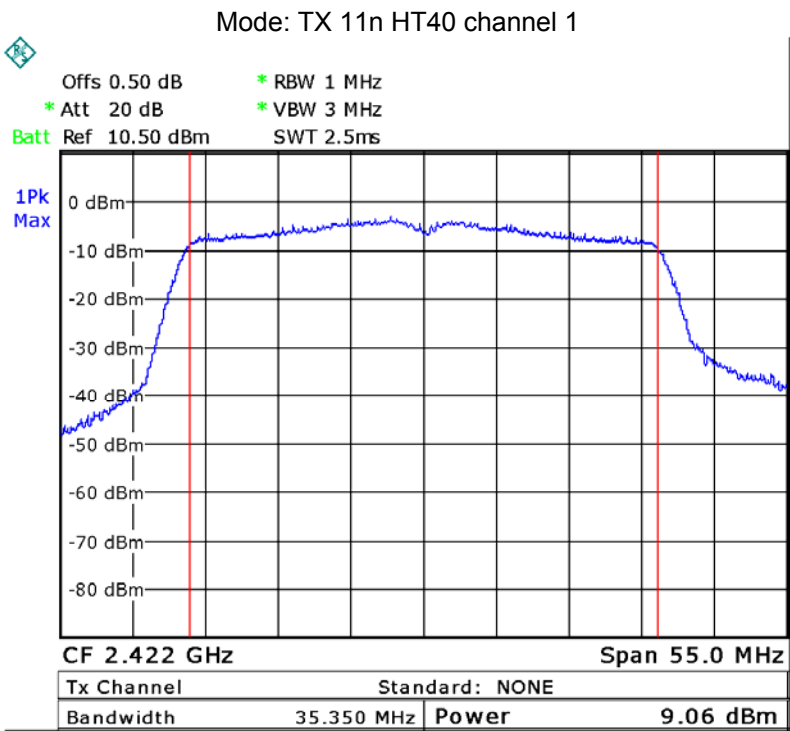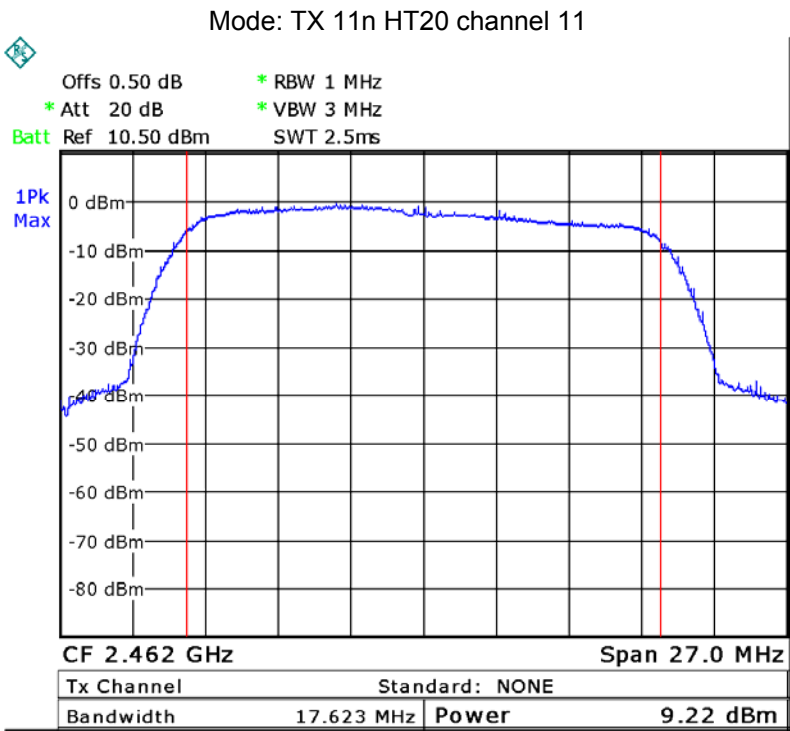

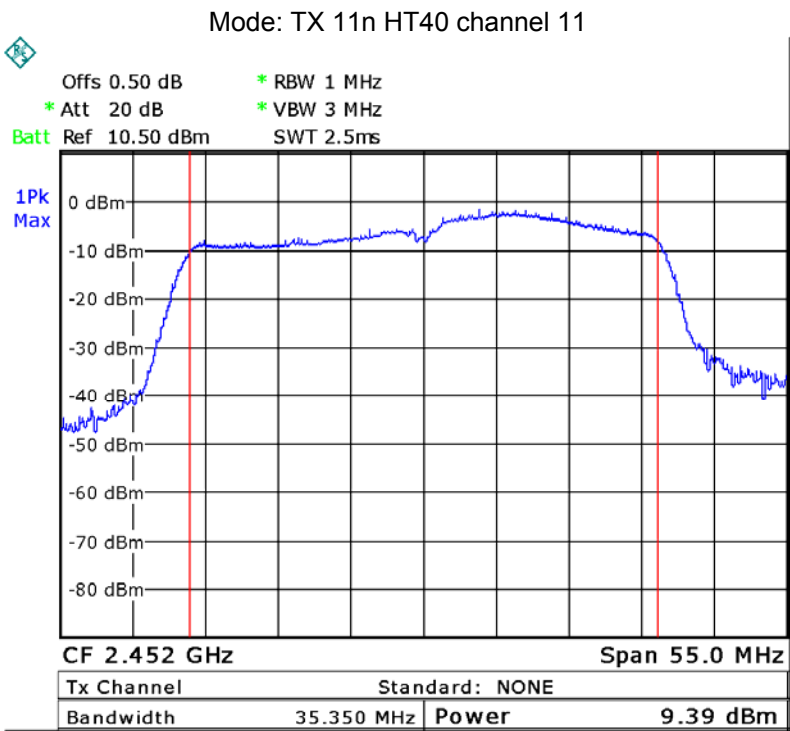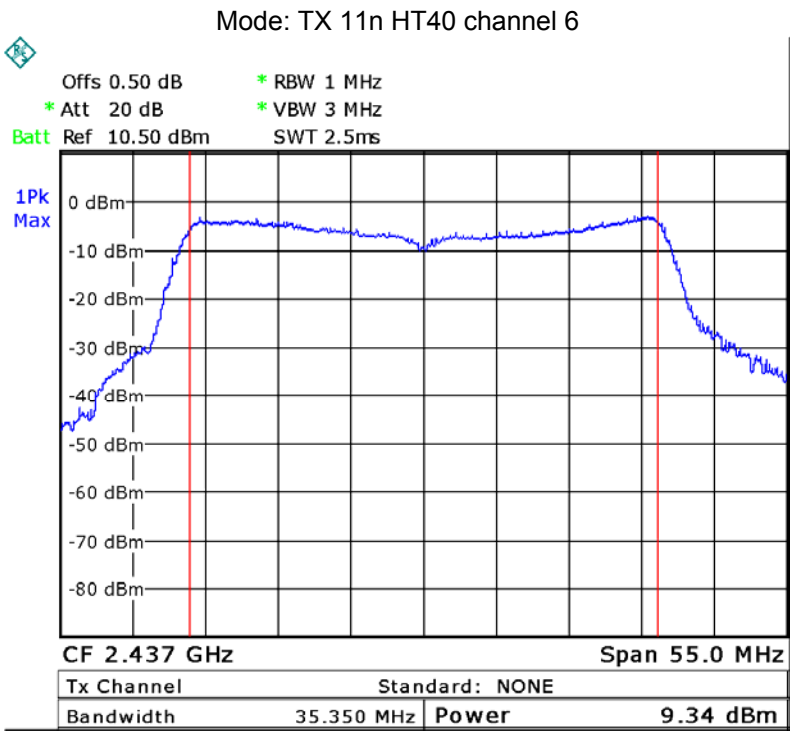

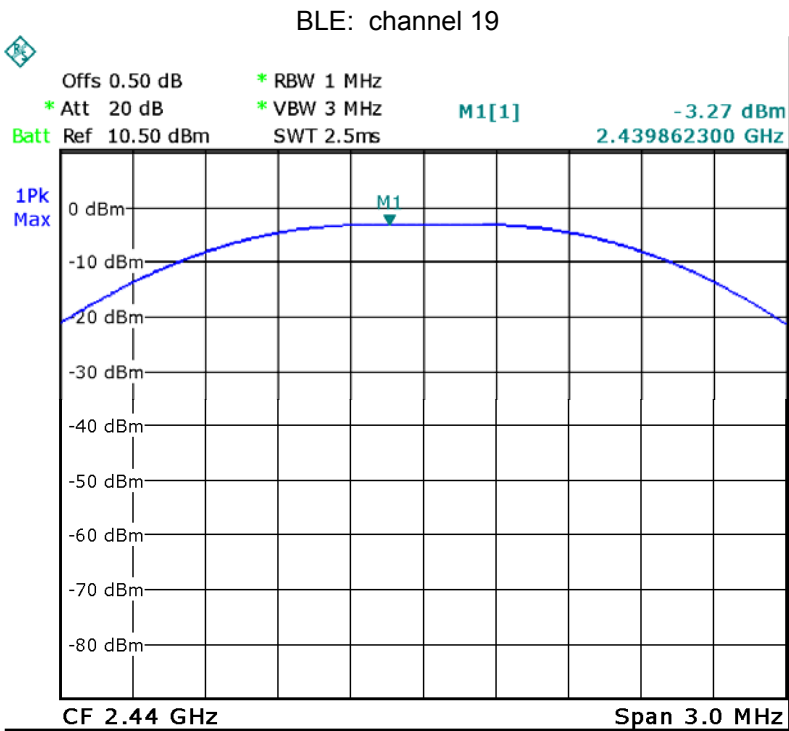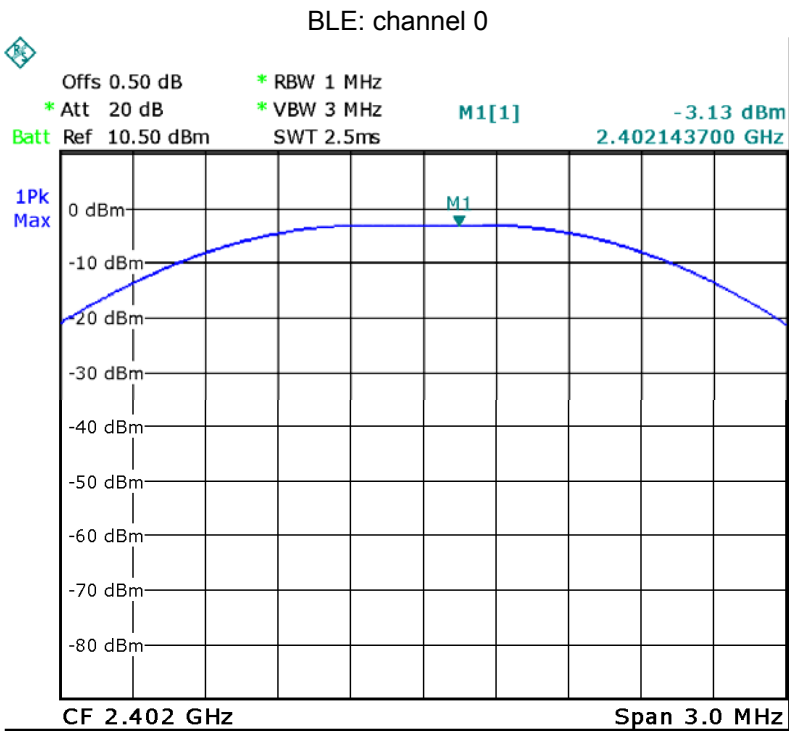

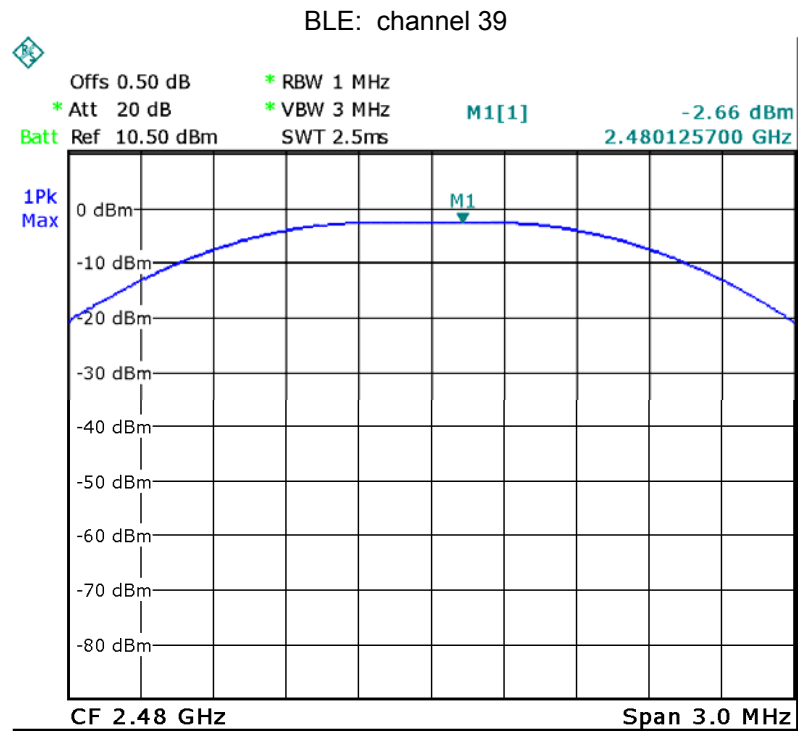

### 13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

#### 13.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 13.2 Test Result:


Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-16.60	-17.82	-16.71
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-24.19	-25.35	-23.66
Limit: 8dBm per 3kHz		

Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-23.71	-26.48	-23.66
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-28.05	-27.21	-26.05
Limit: 8dBm per 3kHz		



BLE		
Power Spectral (dBm per 3kHz)		
2402MHz	2440MHz	2480MHz
-19.24	-18.79	-18.53
Limit: 8dBm per 3kHz		


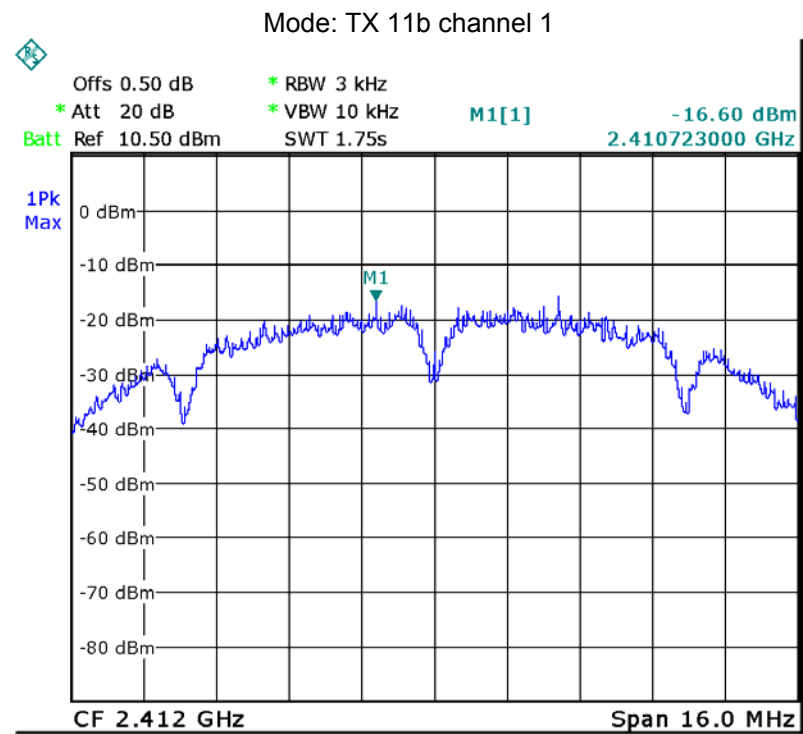


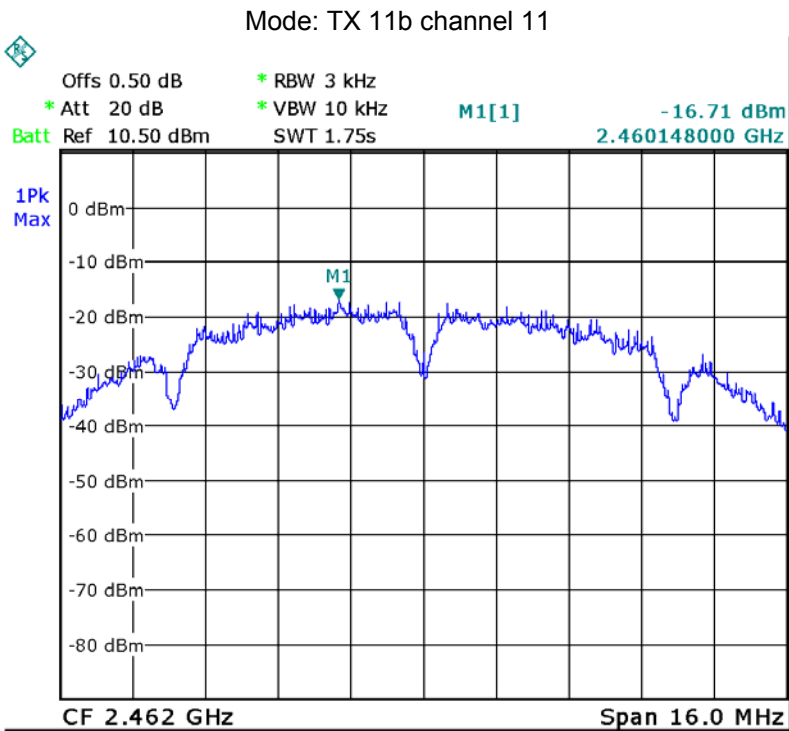
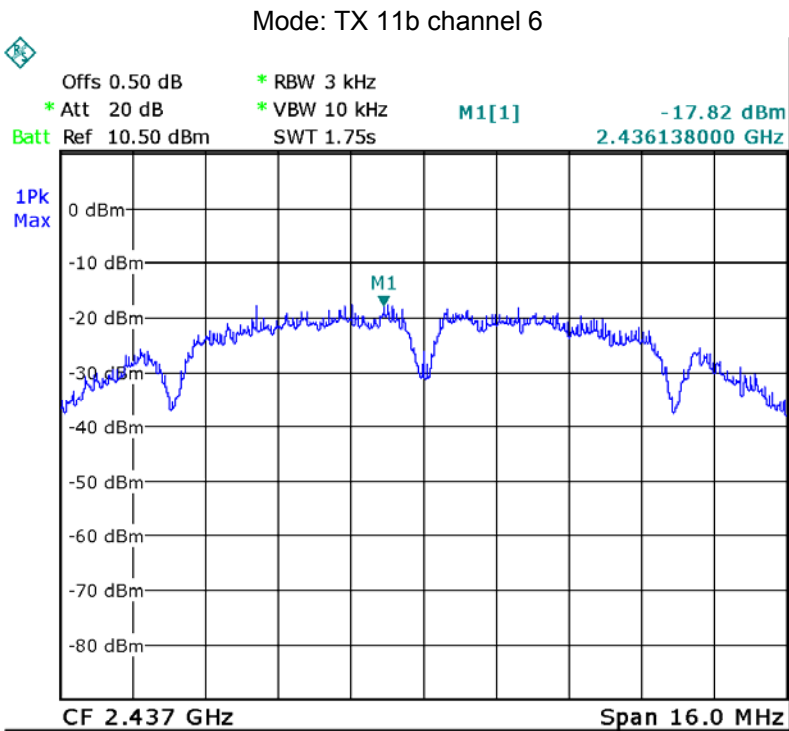






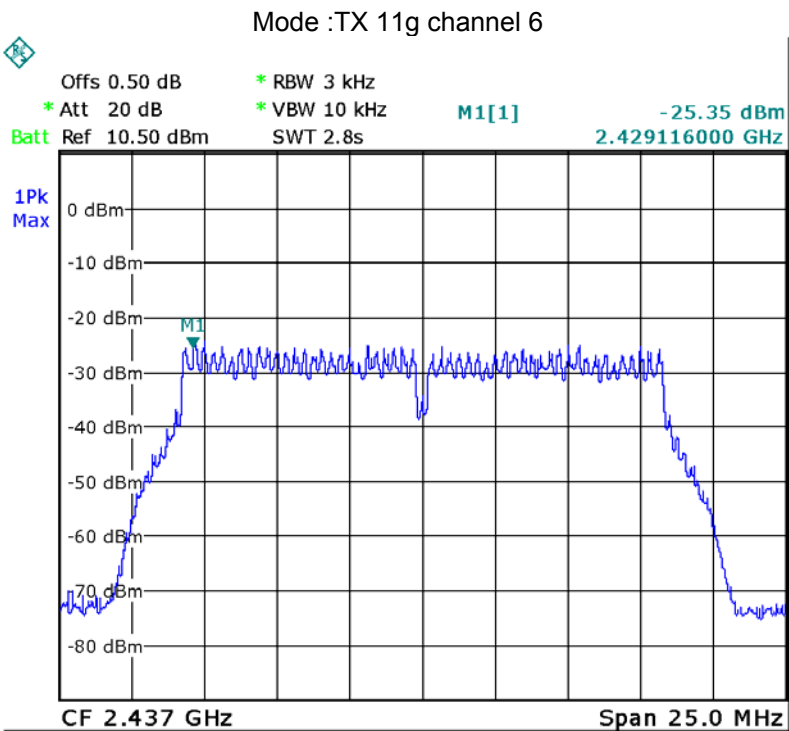
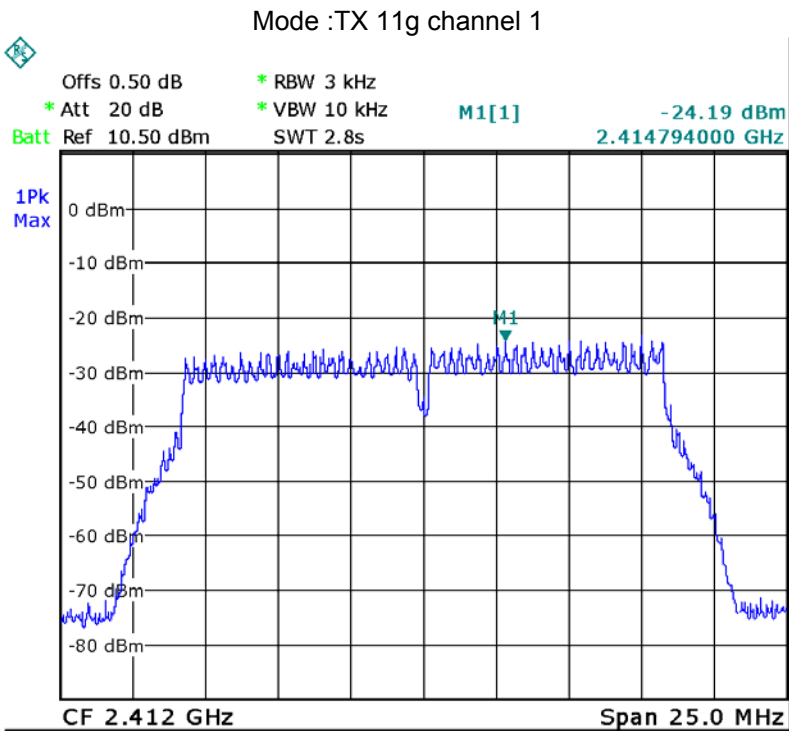


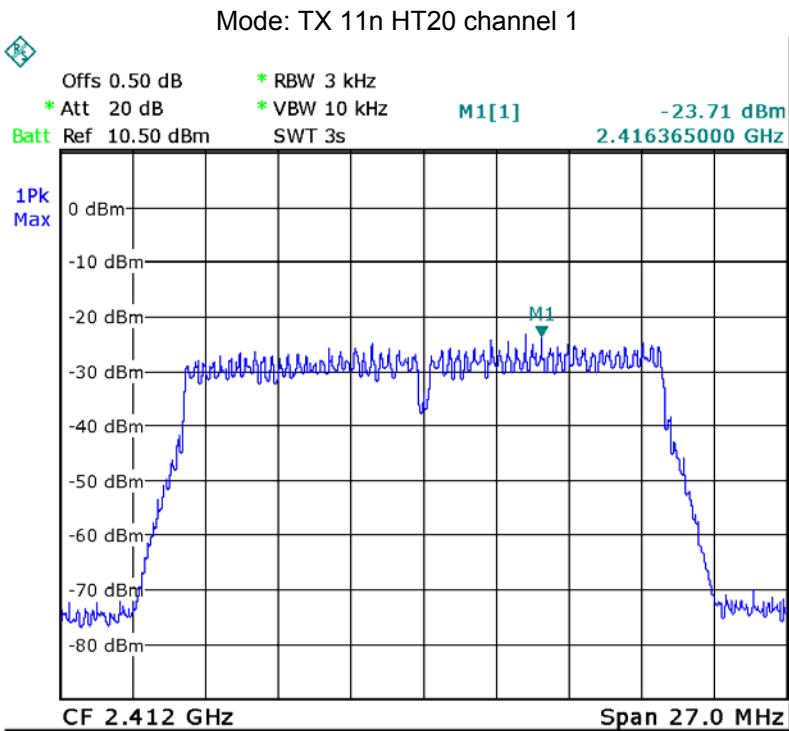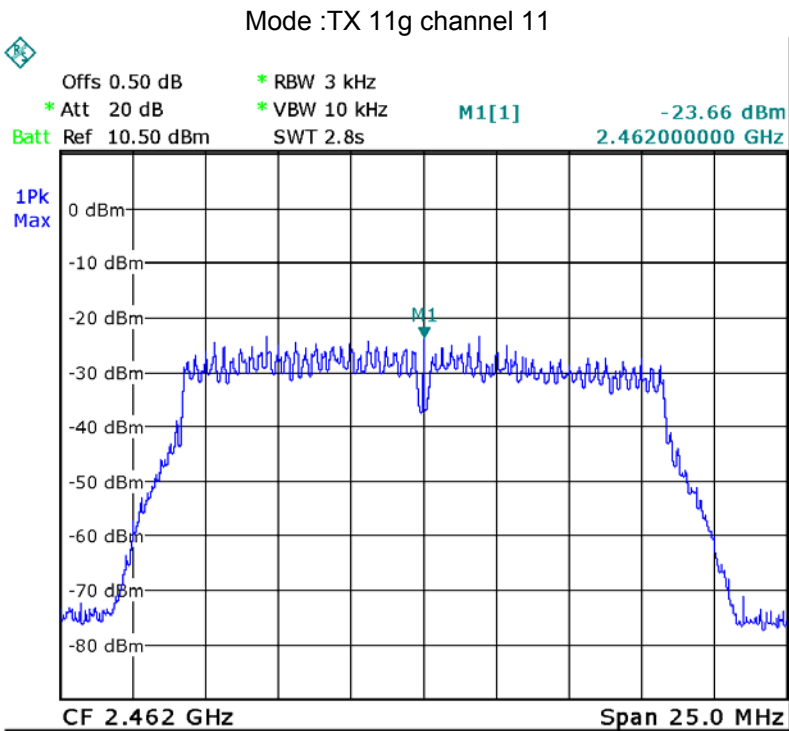

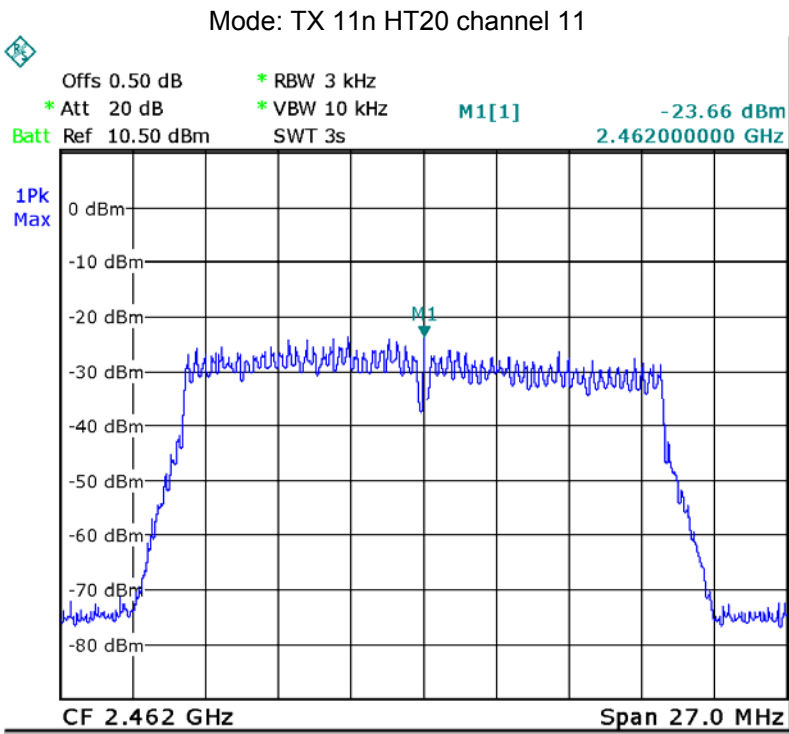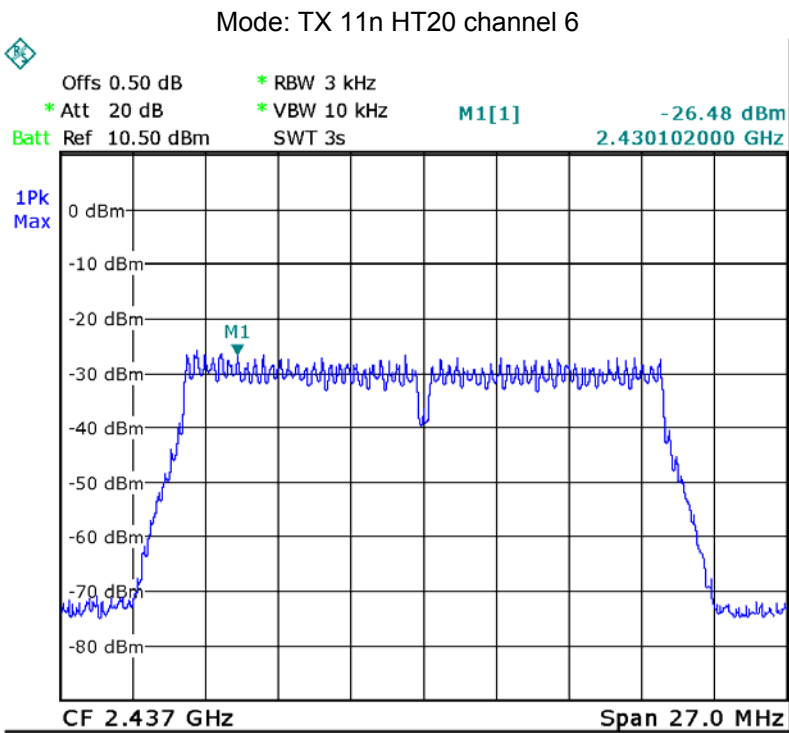

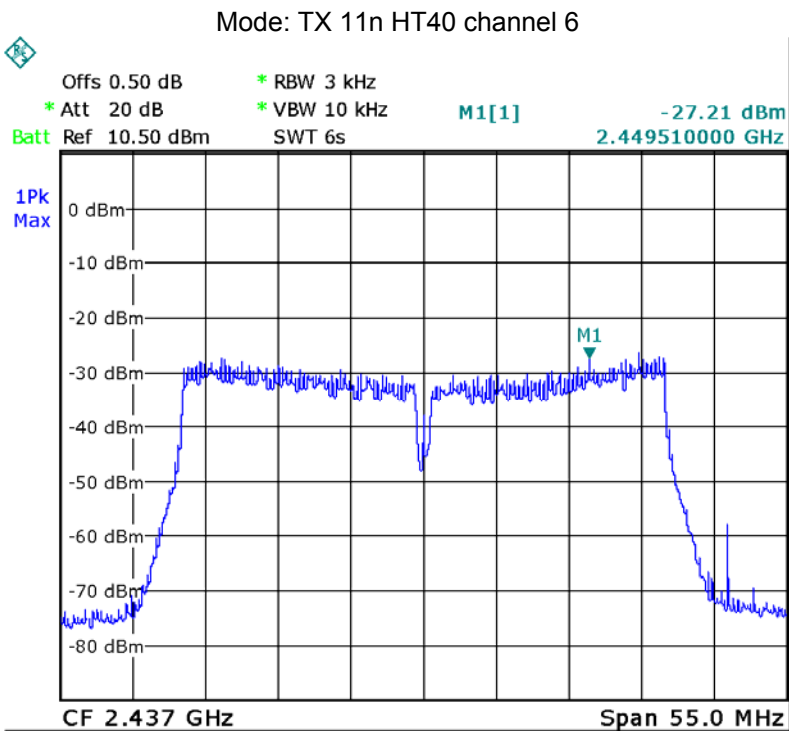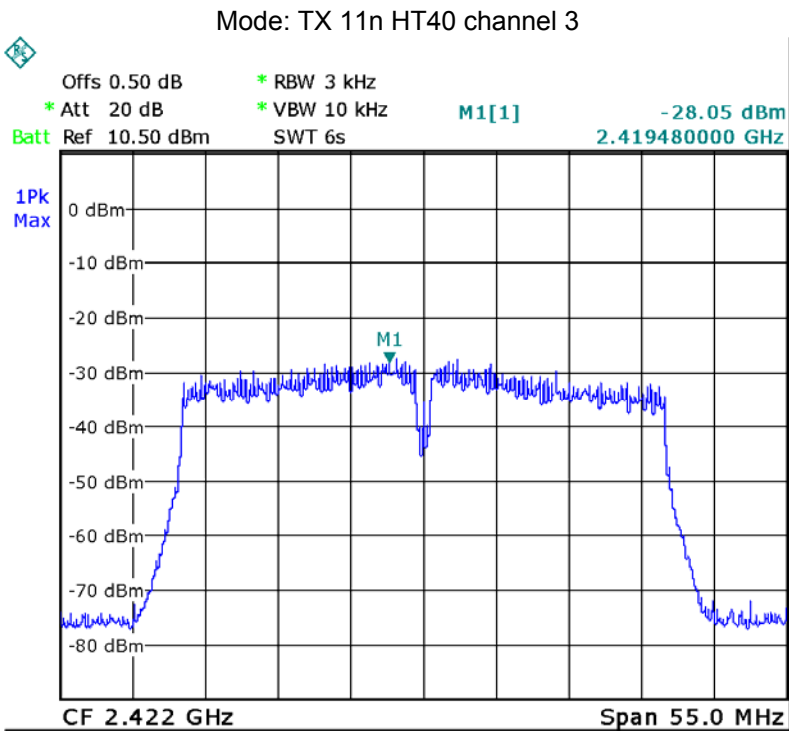

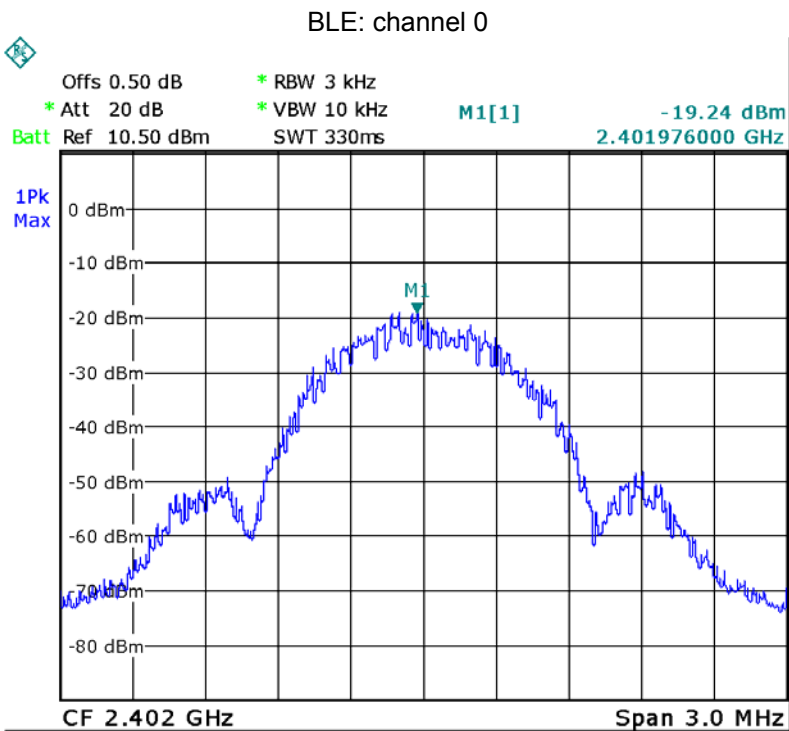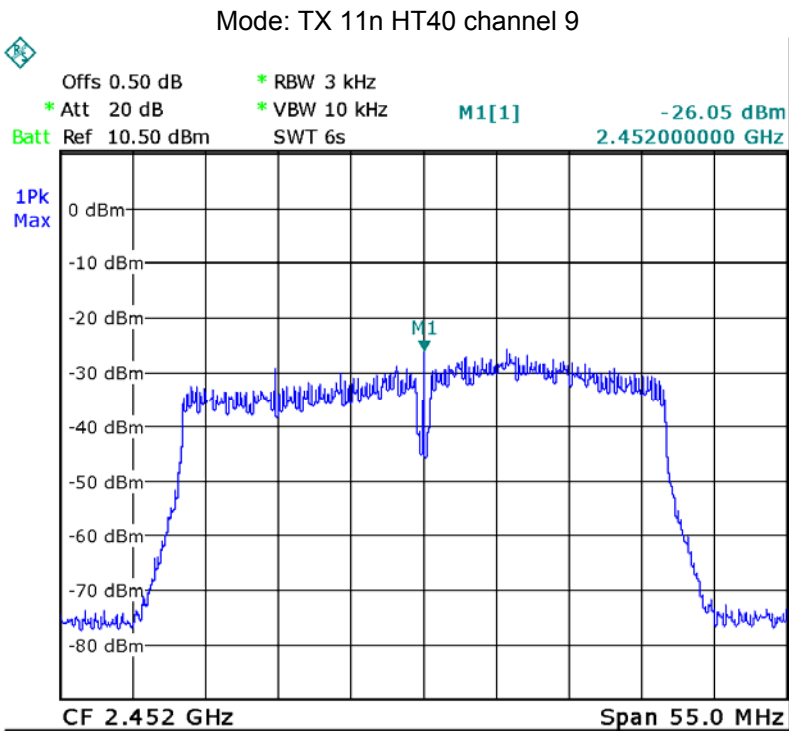

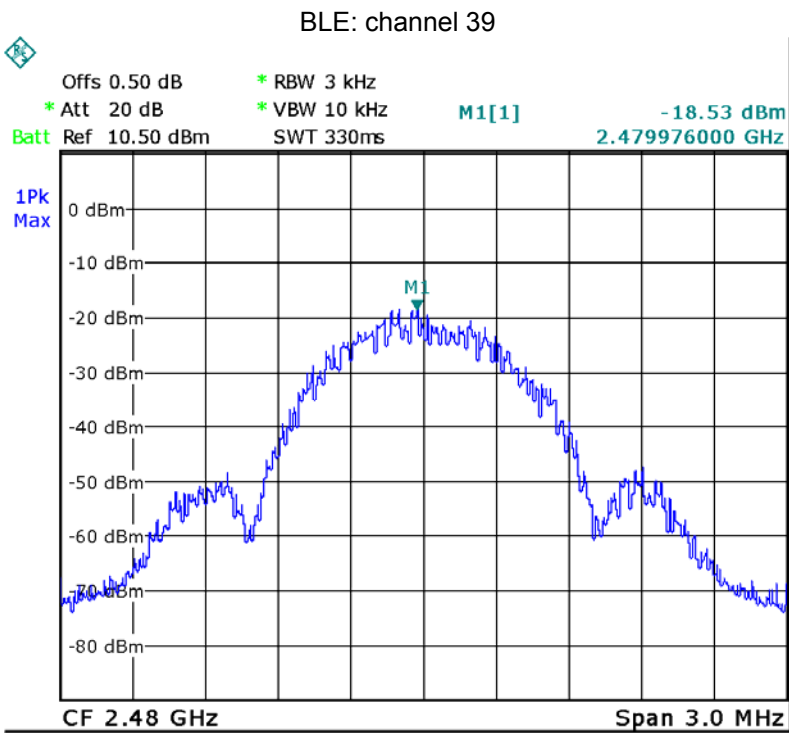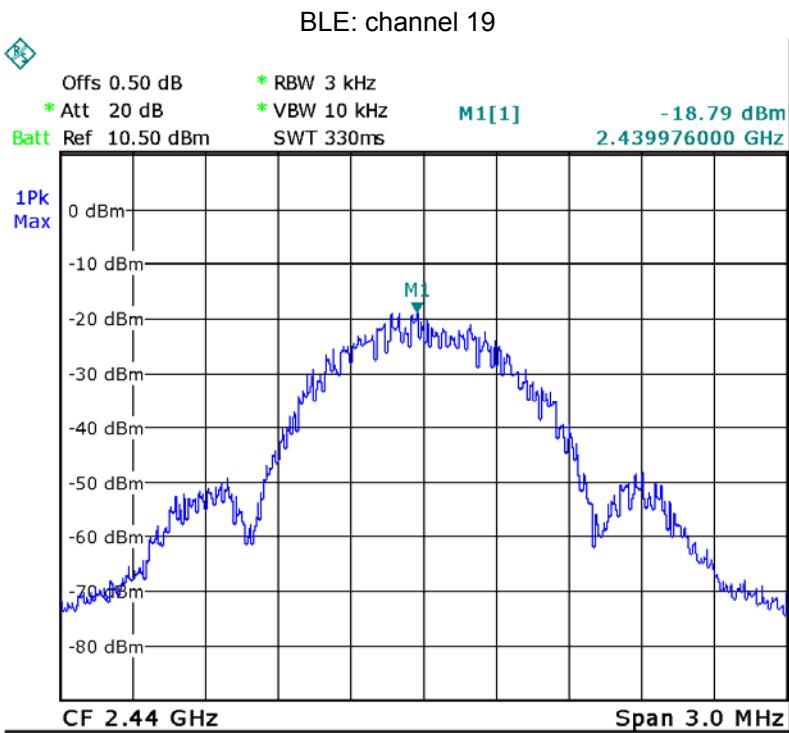

## **14 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

## 15 RF Exposure

Remark: refer to SAR test report: WTS16S1164344E

=====End of Report=====