

# FCC Radio Test Report

## FCC ID: 2AJ9Z-4GX8

### Original Grant

Report No. : TB-FCC150370  
Applicant : EMATIC LIMITED  
Equipment Under Test (EUT)  
EUT Name : X8+  
Model No. : X8+  
Series Model No. : N/A  
Brand Name : EXTREM  
Receipt Date : 2016-10-28  
Test Date : 2016-10-29 to 2016-11-29  
Issue Date : 2016-11-30  
Standards : FCC Part 15: 2016, Subpart C(15.247)  
Test Method : ANSI C63.10: 2013  
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

Test/Witness Engineer :

WANG SU

Approved & Authorized :

Long Hai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



---

---

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT .....</b>	<b>4</b>
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test) .....	4
1.3 Block Diagram Showing the Configuration of System Tested.....	5
1.4 Description of Support Units .....	6
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting .....	7
1.7 Measurement Uncertainty .....	7
1.8 Test Facility.....	8
<b>2. TEST SUMMARY.....</b>	<b>9</b>
<b>3. TEST EQUIPMENT.....</b>	<b>10</b>
<b>4. CONDUCTED EMISSION TEST .....</b>	<b>11</b>
4.1 Test Standard and Limit.....	11
4.2 Test Setup.....	11
4.3 Test Procedure.....	11
4.4 EUT Operating Mode .....	12
4.5 Test Data.....	12
<b>5. RADIATED EMISSION TEST .....</b>	<b>17</b>
5.1 Test Standard and Limit.....	17
5.2 Test Setup.....	18
5.3 Test Procedure.....	19
5.4 EUT Operating Condition .....	19
<b>6. RESTRICTED BANDS REQUIREMENT .....</b>	<b>34</b>
6.1 Test Standard and Limit.....	34
6.2 Test Setup.....	34
6.3 Test Procedure.....	34
6.4 EUT Operating Condition .....	35
6.4 Test Data.....	35
<b>7. NUMBER OF HOPPING CHANNEL .....</b>	<b>48</b>
7.1 Test Standard and Limit.....	48
7.2 Test Setup.....	48
7.3 Test Procedure.....	48
7.4 EUT Operating Condition .....	48
7.5 Test Data.....	48
<b>8. AVERAGE TIME OF OCCUPANCY.....</b>	<b>50</b>
8.1 Test Standard and Limit.....	50
8.2 Test Setup.....	50
8.3 Test Procedure.....	50



---

8.4 EUT Operating Condition .....	50
8.5 Test Data.....	51
<b>9. CHANNEL SEPARATION AND BANDWIDTH TEST .....</b>	<b>69</b>
9.1 Test Standard and Limit.....	69
9.2 Test Setup.....	69
9.3 Test Procedure.....	69
9.4 EUT Operating Condition .....	69
9.5 Test Data.....	70
<b>10. PEAK OUTPUT POWER TEST.....</b>	<b>82</b>
10.1 Test Standard and Limit .....	82
10.2 Test Setup.....	82
10.3 Test Procedure.....	82
10.4 EUT Operating Condition .....	82
10.5 Test Data.....	83
<b>11. ANTENNA REQUIREMENT.....</b>	<b>89</b>
11.1 Standard Requirement.....	89
11.2 Antenna Connected Construction .....	89



## 1. General Information about EUT

### 1.1 Client Information

**Applicant** : EMATIC LIMITED  
**Address** : Unit 17, 9/F Tower A, New Mandarin Plaza NO, 14 Science Museum Rd, TST, Hong Kong, China  
**Manufacturer** : EMATIC LIMITED  
**Address** : Unit 17, 9/F Tower A, New Mandarin Plaza NO, 14 Science Museum Rd, TST, Hong Kong, China

### 1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	X8+	
Models No.	:	X8+	
Model Difference	:	N/A	
Product Description	:	Operation Frequency:	Bluetooth 4.0(EDR): 2402~2480 MHz
		Number of Channel:	Bluetooth: 79 Channels See Note 2
		Max Peak Output Power:	Bluetooth: 7.793 dBm(GFSK)
		Antenna Gain:	-1.1 dBi PIFA Antenna
		Modulation Type:	GFSK 1Mbps(1 Mbps) $\pi$ /4-DQPSK(2 Mbps) 8-DPSK(3 Mbps)
Power Supply	:	DC power supplied by AC/DC Adapter. DC Voltage supplied from Li-ion battery.	
Power Rating	:	Input: AC 100~240V 50/60Hz, 0.3A. Output: 5V/2000mA. DC 3.7V from 3050mA Li-ion battery.	
Connecting I/O Port(S)	:	Please refer to the User's Manual	

**Note:**

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.  
 (2) Channel List:


Bluetooth Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459

04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	<b>39</b>	<b>2441</b>	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	<b>78</b>	<b>2480</b>
25	2427	52	2454		
26	2428	53	2455		

(3) The Antenna information about the equipment is provided by the applicant.

### 1.3 Block Diagram Showing the Configuration of System Tested

#### Charging with TX Mode

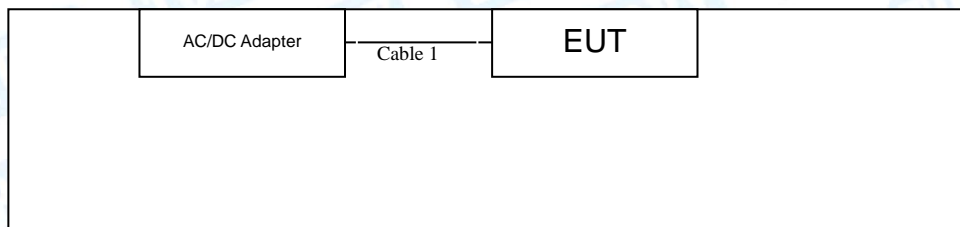

#### TX Mode





## 1.4 Description of Support Units

The EUT had been tested as an independent unit.

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging with TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX GFSK Mode
Mode 2	TX Mode(GFSK) Channel 00/39/78
Mode 3	TX Mode( $\pi/4$ -DQPSK) Channel 00/39/78
Mode 4	TX Mode(8-DPSK) Channel 00/39/78
Mode 5	Hopping Mode(GFSK)
Mode 6	Hopping Mode( $\pi/4$ -DQPSK)
Mode 7	Hopping Mode(8-DPSK)

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.  
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:  
TX Mode: GFSK (1 Mbps)  
TX Mode:  $\pi/4$ -DQPSK (2 Mbps)  
TX Mode: 8-DPSK (3Mbps)
- (2) The EUT is considered a mobile unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.



## 1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	***3646633***		
Frequency	2402 MHz	2441MHz	2480 MHz
GFSK	DEF	DEF	DEF
$\pi/4$ -DQPSK	DEF	DEF	DEF
8-DPSK	DEF	DEF	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.42$ dB $\pm 3.42$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.40$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB



## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **FCC List No.: (811562)**

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.



## 2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 1				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203		Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.2	Conducted Emission	PASS	N/A
15.205	RSS-Gen 7.2.3	Restricted Bands	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (2)	Hopping Channel Separation	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (4)	Dwell Time	PASS	N/A
15.247(b)(1)	RSS 247 5.4 (2)	Peak Output Power	PASS	N/A
15.247(b)(1)	RSS 247 5.1 (4)	Number of Hopping Frequency	PASS	N/A
15.247(c)& 15.209	RSS 247 5.5	Radiated Spurious Emission	PASS	N/A
15.247(a)	RSS 247 5.1 (1)	99% Occupied Bandwidth & 20dB Bandwidth	PASS	99%OBW GFSK:857.9927kHz $\pi$ /4-DQPSK: 1075.40kHz 8-DPSK: 1081.70KHz
<b>Note:</b> N/A is an abbreviation for Not Applicable.				



### 3. Test Equipment

#### AC Main Conducted Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	Rohde & Schwarz	ENV216	101131	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 22, 2016	Jul. 21, 2017

#### Radiation Spurious Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
EMI Test Receiver	Rohde & Schwarz	ESPI	10X8+0/007	Jul. 22, 2016	Jul. 21, 2017
Bilog Antenna	ETS-LINDGREN	3142E	X8+17537	Mar. 20, 2016	Mar. 19, 2017
Horn Antenna	ETS-LINDGREN	3117	X8+43207	Mar. 19, 2016	Mar. 18, 2017
Pre-amplifier	Sonoma	310N	185903	Mar. 20, 2016	Mar. 19, 2017
Pre-amplifier	HP	8449B	3008A00849	Mar. 26, 2016	Mar. 25, 2017
Loop Antenna	Laplace instrument	RF300	0701	Mar. 19, 2016	Mar. 18, 2017
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 26, 2016	Mar. 25, 2017
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

#### Antenna Conducted Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
Spectrum Analyzer	Rohde & Schwarz	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017



## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

4.1.1 Test Standard  
FCC Part 15.207

4.1.2 Test Limit


**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

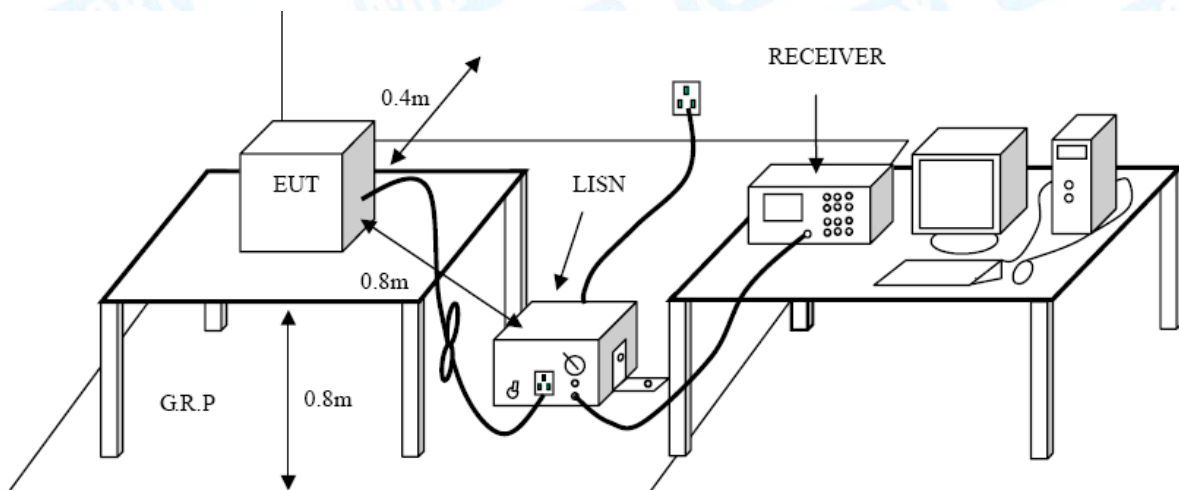

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.



---

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

#### 4.4 EUT Operating Mode


Please refer to the description of test mode.

#### 4.5 Test Data

Test data please refer the following pages.



EUT:	X8+	Model Name :	X8+
Temperature:	25℃	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	Charging with TX Mode		
Remark:	Only worse case is reported		

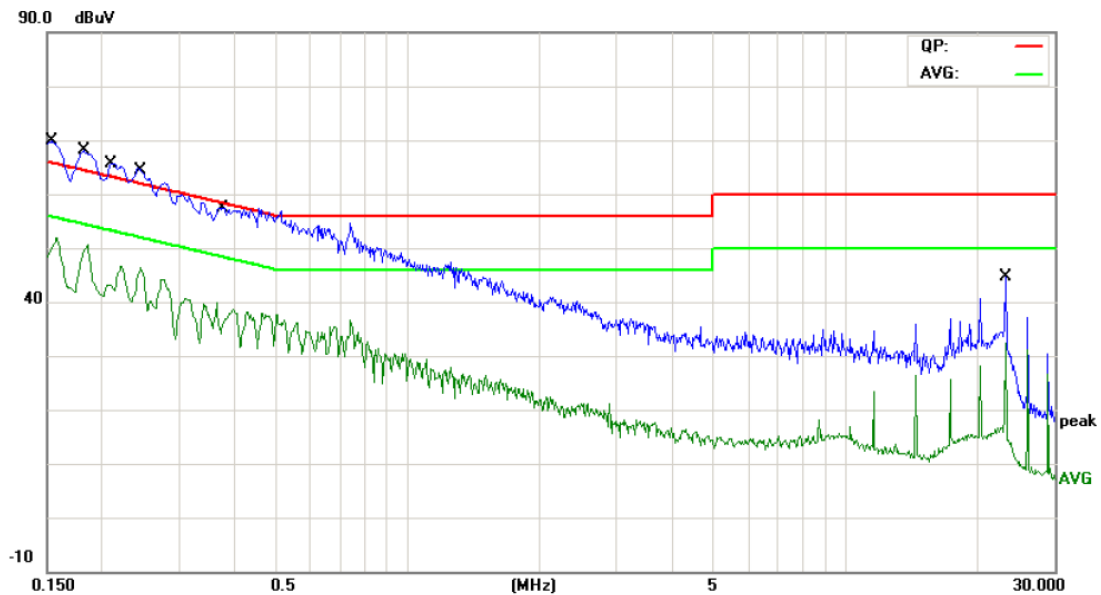


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	54.05	9.93	63.98	65.78	-1.80	QP
2		0.1539	38.77	9.93	48.70	55.78	-7.08	AVG
3		0.1819	50.51	9.98	60.49	64.39	-3.90	QP
4		0.1819	34.48	9.98	44.46	54.39	-9.93	AVG
5		0.2100	47.35	10.02	57.37	63.20	-5.83	QP
6		0.2100	30.42	10.02	40.44	53.20	-12.76	AVG
7		0.2481	47.55	10.02	57.57	61.82	-4.25	QP
8		0.2481	31.09	10.02	41.11	51.82	-10.71	AVG
9		0.3780	40.51	10.02	50.53	58.32	-7.79	QP
10		0.3780	24.14	10.02	34.16	48.32	-14.16	AVG
11		23.1740	30.84	10.16	41.00	60.00	-19.00	QP
12		23.1740	16.70	10.16	26.86	50.00	-23.14	AVG

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60 Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Charging with TX Mode		
<b>Remark:</b>	Only worse case is reported		

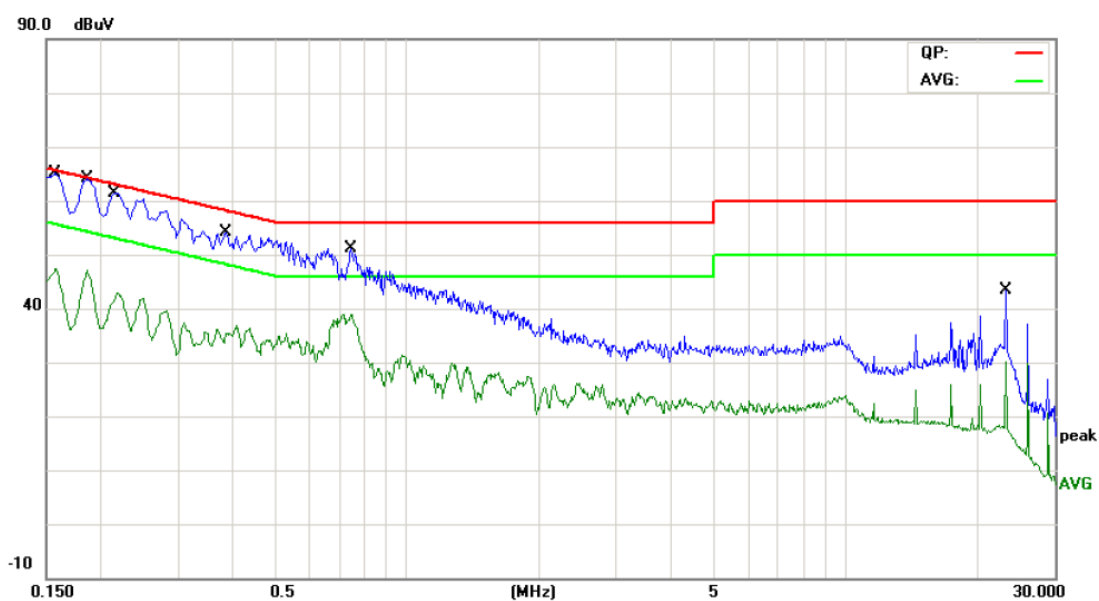

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1580	50.44	10.12	60.56	65.56	-5.00	QP
2		0.1580	35.71	10.12	45.83	55.56	-9.73	AVG
3		0.1860	49.02	10.12	59.14	64.21	-5.07	QP
4		0.1860	34.17	10.12	44.29	54.21	-9.92	AVG
5		0.2140	45.17	10.12	55.29	63.04	-7.75	QP
6		0.2140	29.92	10.12	40.04	53.04	-13.00	AVG
7		0.3860	35.81	10.06	45.87	58.15	-12.28	QP
8		0.3860	21.69	10.06	31.75	48.15	-16.40	AVG
9		0.7460	34.66	10.04	44.70	56.00	-11.30	QP
10		0.7460	26.46	10.04	36.50	46.00	-9.50	AVG
11		23.1860	13.17	10.06	23.23	60.00	-36.77	QP
12		23.1860	6.04	10.06	16.10	50.00	-33.90	AVG

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25℃	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 240V/60 Hz		
<b>Terminal:</b>	Line		
<b>Test Mode:</b>	Charging with TX Mode		
<b>Remark:</b>	Only worse case is reported		

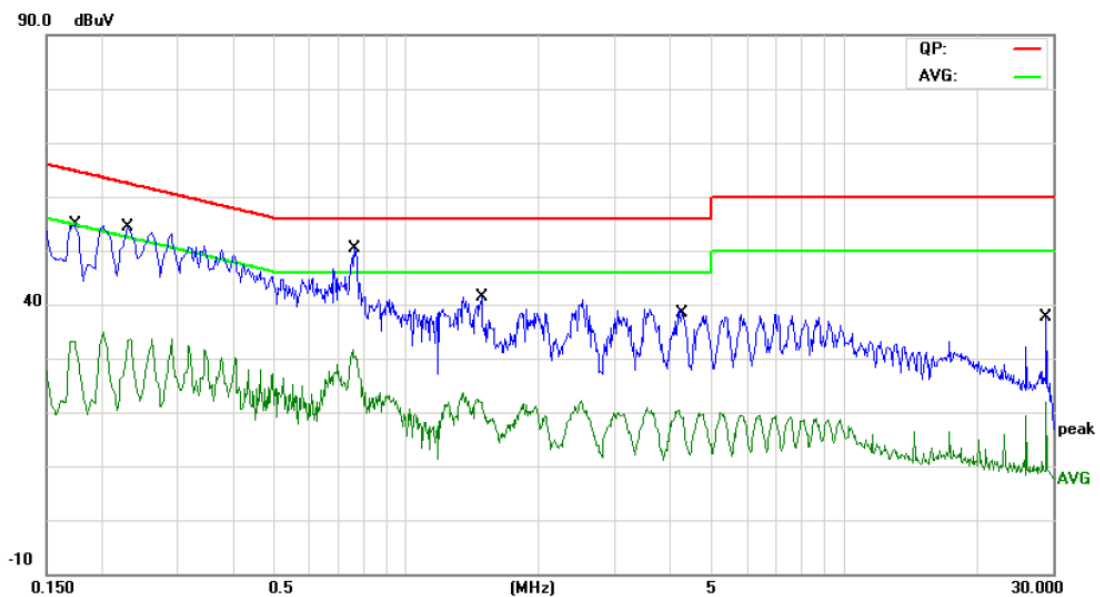


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1740	42.55	9.97	52.52	64.76	-12.24	QP
2		0.1740	23.44	9.97	33.41	54.76	-21.35	AVG
3	*	0.2300	41.45	10.02	51.47	62.45	-10.98	QP
4		0.2300	22.93	10.02	32.95	52.45	-19.50	AVG
5		0.7620	31.56	10.11	41.67	56.00	-14.33	QP
6		0.7620	20.05	10.11	30.16	46.00	-15.84	AVG
7		1.4819	22.31	10.06	32.37	56.00	-23.63	QP
8		1.4819	10.94	10.06	21.00	46.00	-25.00	AVG
9		4.2540	19.72	9.98	29.70	56.00	-26.30	QP
10		4.2540	8.05	9.98	18.03	46.00	-27.97	AVG
11		28.9780	23.47	10.24	33.71	60.00	-26.29	QP
12		28.9780	9.34	10.24	19.58	50.00	-30.42	AVG

Emission Level= Read Level+ Correct Factor



<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 240V/60 Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Charging with TX Mode		
<b>Remark:</b>	Only worse case is reported		

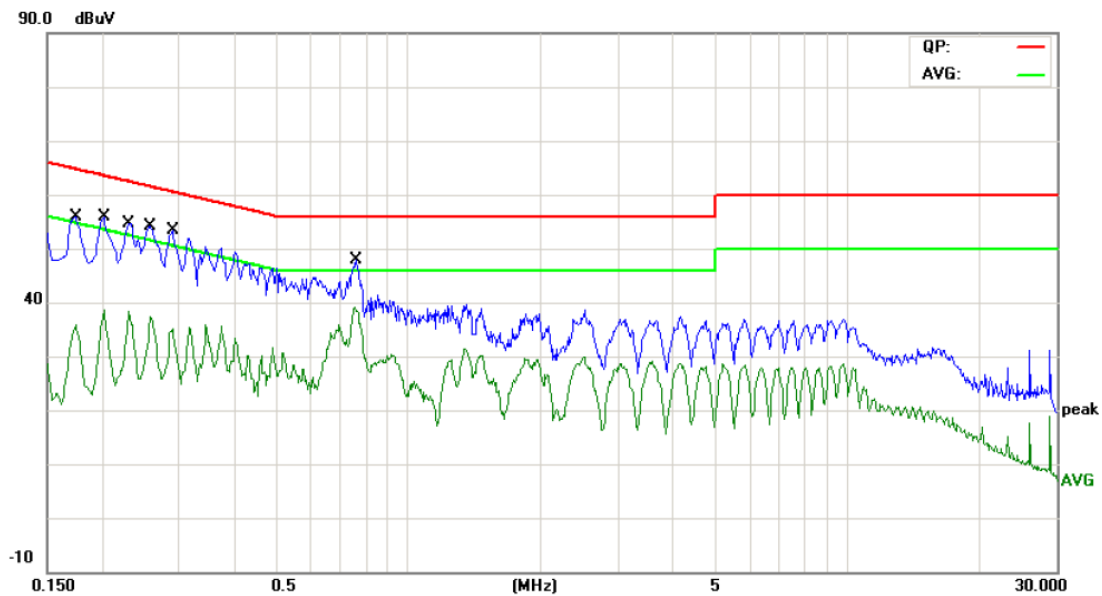

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1740	43.18	10.12	53.30	64.76	-11.46	QP
2		0.1740	26.58	10.12	36.70	54.76	-18.06	AVG
3		0.2020	42.37	10.12	52.49	63.52	-11.03	QP
4		0.2020	27.15	10.12	37.27	53.52	-16.25	AVG
5		0.2300	41.77	10.11	51.88	62.45	-10.57	QP
6		0.2300	27.41	10.11	37.52	52.45	-14.93	AVG
7		0.2580	40.68	10.10	50.78	61.49	-10.71	QP
8		0.2580	26.50	10.10	36.60	51.49	-14.89	AVG
9		0.2900	38.85	10.09	48.94	60.52	-11.58	QP
10		0.2900	25.12	10.09	35.21	50.52	-15.31	AVG
11		0.7620	33.79	10.05	43.84	56.00	-12.16	QP
12	*	0.7620	28.51	10.05	38.56	46.00	-7.44	AVG

Emission Level= Read Level+ Correct Factor

## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.209

#### 5.1.2 Test Limit

#### Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Emission Limit (Above 1000MHz)


Frequency (MHz)	Class B (dBuV/m)(at 3m)	
	Peak	Average
Above 1000	74	54

**Note:**


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)




## 5.2 Test Setup

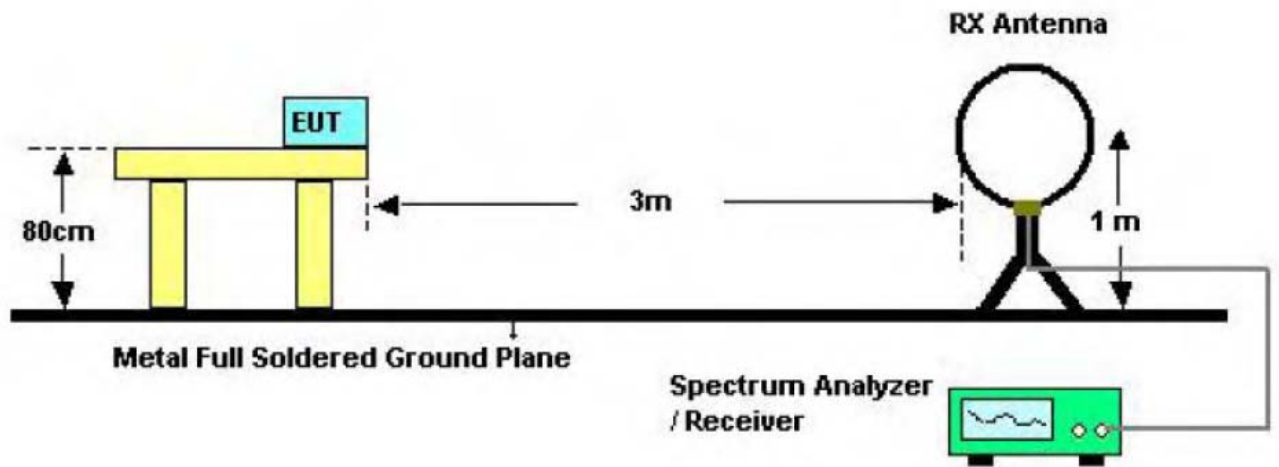

**Below 30MHz Test Setup**

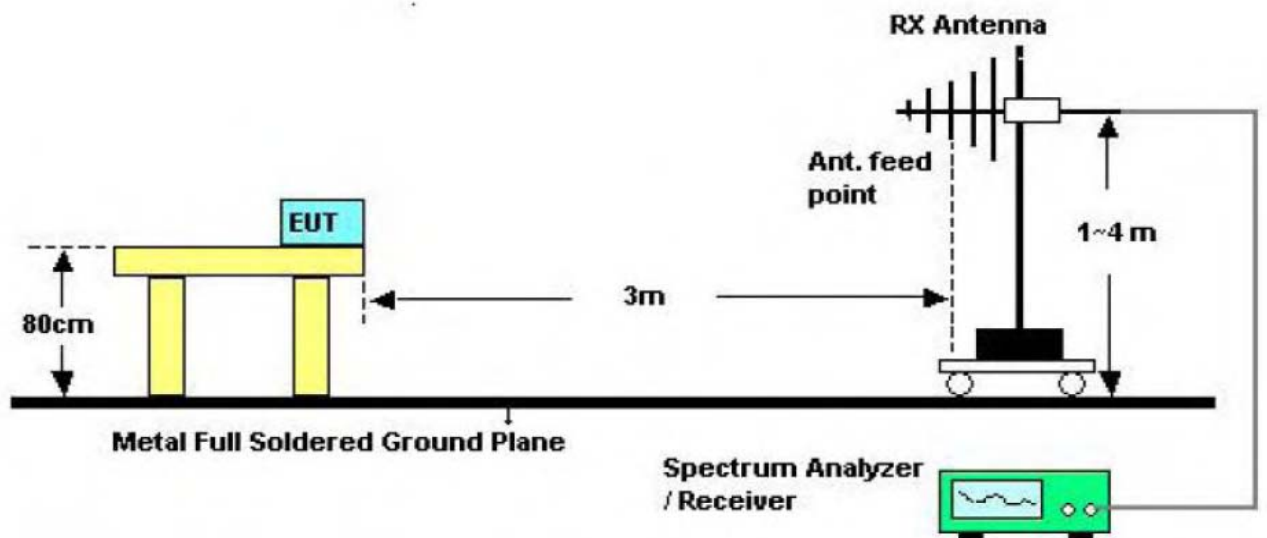

**Below 1000MHz Test Setup**

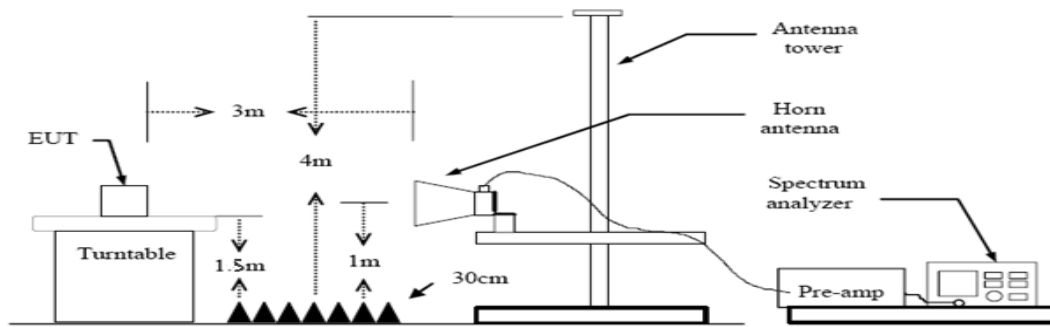

**Above 1GHz Test Setup**

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power in TX mode.

### 5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10Hz with Peak Detector for Average Values.

Test data please refer the following pages.




### 9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25℃	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2402MHz		
<b>Remark:</b>	Only worse case is reported		

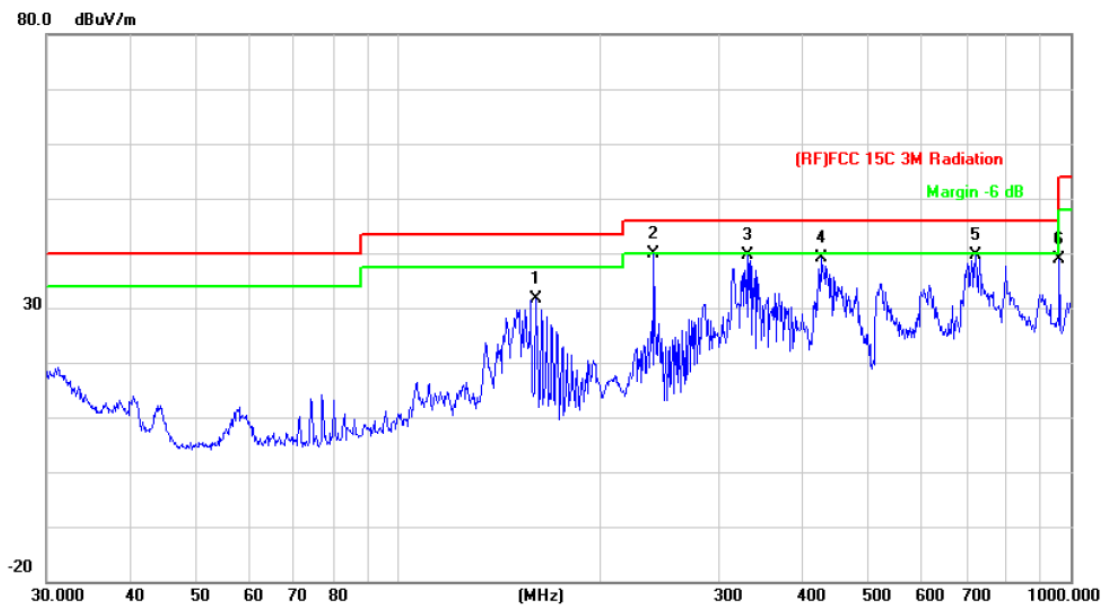


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		160.3456	51.88	-20.30	31.58	43.50	-11.92	peak
2	*	239.9874	58.01	-18.18	39.83	46.00	-6.17	peak
3		330.1949	55.02	-15.38	39.64	46.00	-6.36	peak
4		425.0280	51.49	-12.44	39.05	46.00	-6.95	peak
5		721.7259	45.68	-6.00	39.68	46.00	-6.32	peak
6		962.1622	42.10	-3.23	38.87	54.00	-15.13	peak

\*:Maximum data x:Over limit !:over margin

**Emission Level= Read Level+ Correct Factor**

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2402MHz		
<b>Remark:</b>	Only worse case is reported		

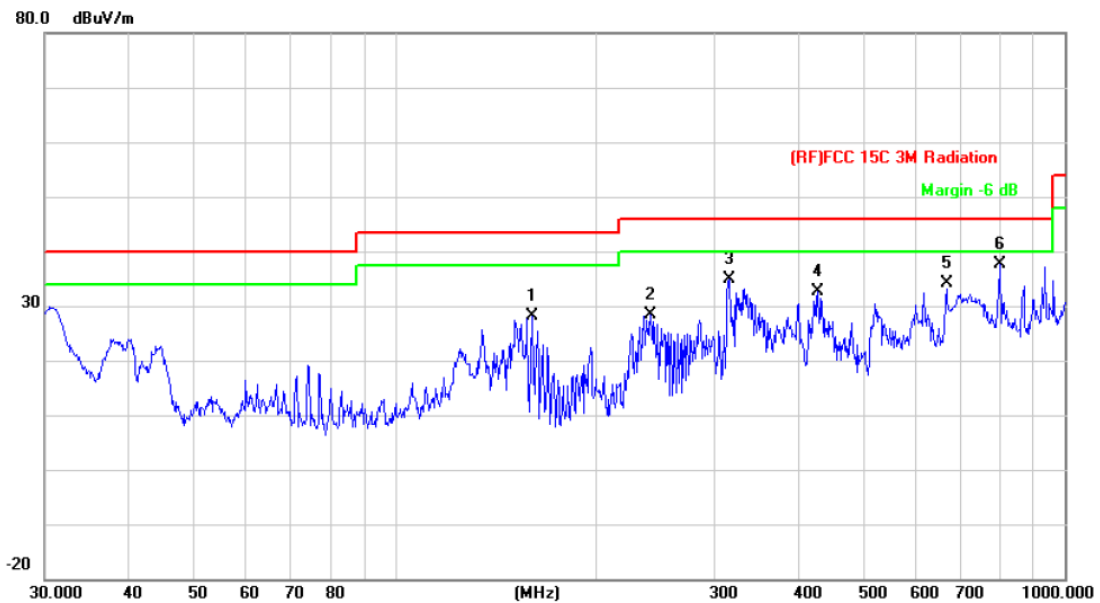


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		160.3456	48.31	-20.30	28.01	43.50	-15.49 peak
2		240.8304	46.42	-18.15	28.27	46.00	-17.73 peak
3		315.4808	51.02	-16.06	34.96	46.00	-11.04 peak
4		428.0193	45.07	-12.38	32.69	46.00	-13.31 peak
5		665.8035	41.34	-7.09	34.25	46.00	-11.75 peak
6	*	801.7862	42.99	-5.27	37.72	46.00	-8.28 peak

\*:Maximum data x:Over limit !:over margin

**Emission Level= Read Level+ Correct Factor**




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2402MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

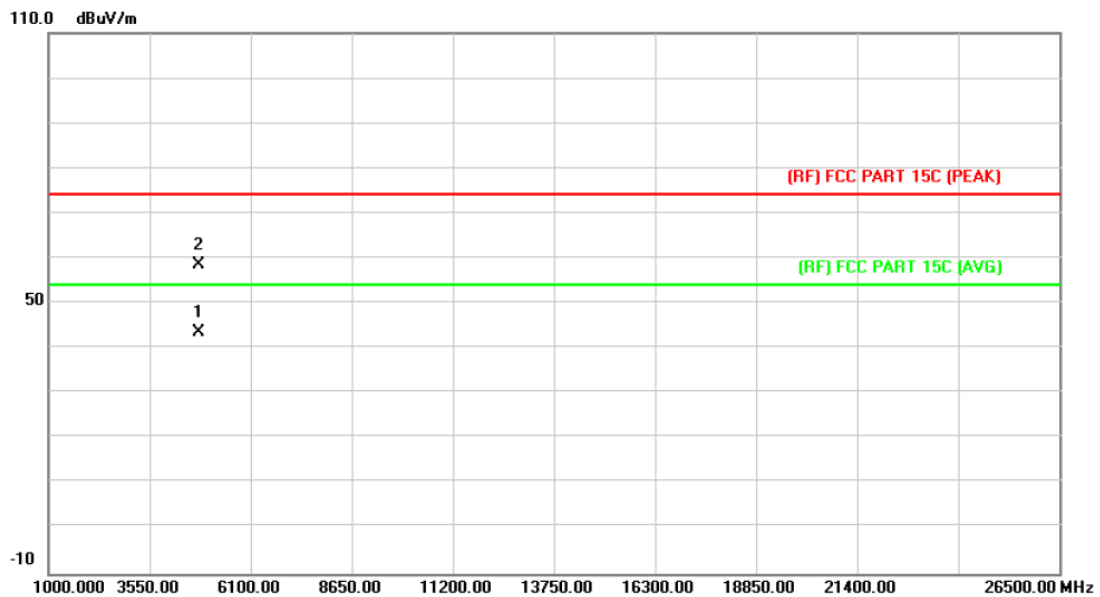

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4802.761	30.12	13.43	43.55	54.00	-10.45	AVG
2		4805.173	45.02	13.45	58.47	74.00	-15.53	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25℃	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2402MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

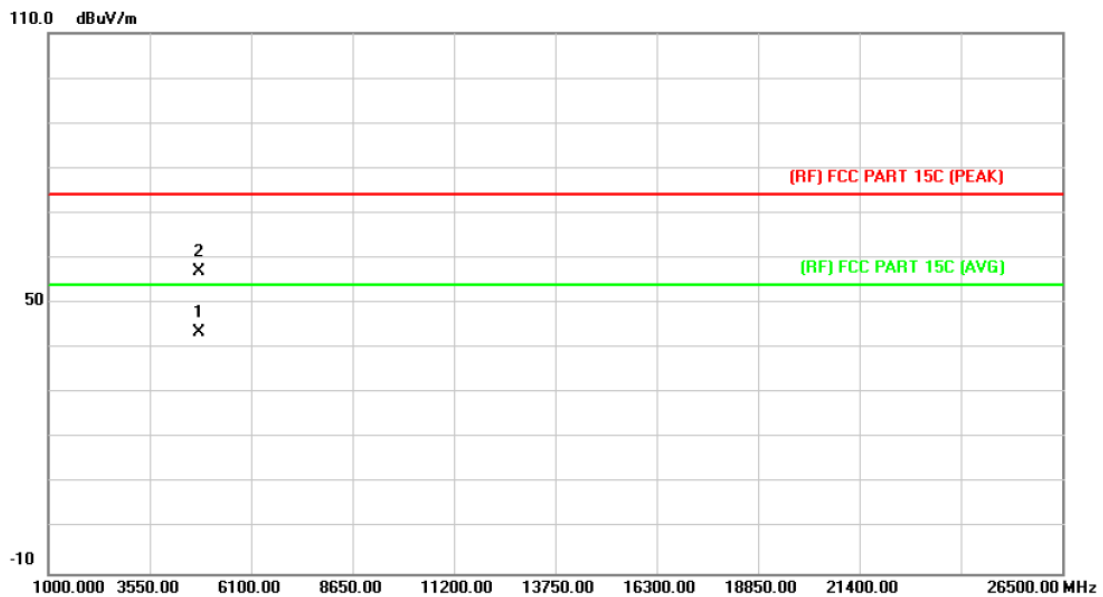


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4804.228	30.10	13.44	43.54	54.00	-10.46	AVG
2		4805.137	43.50	13.45	56.95	74.00	-17.05	peak

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2441MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

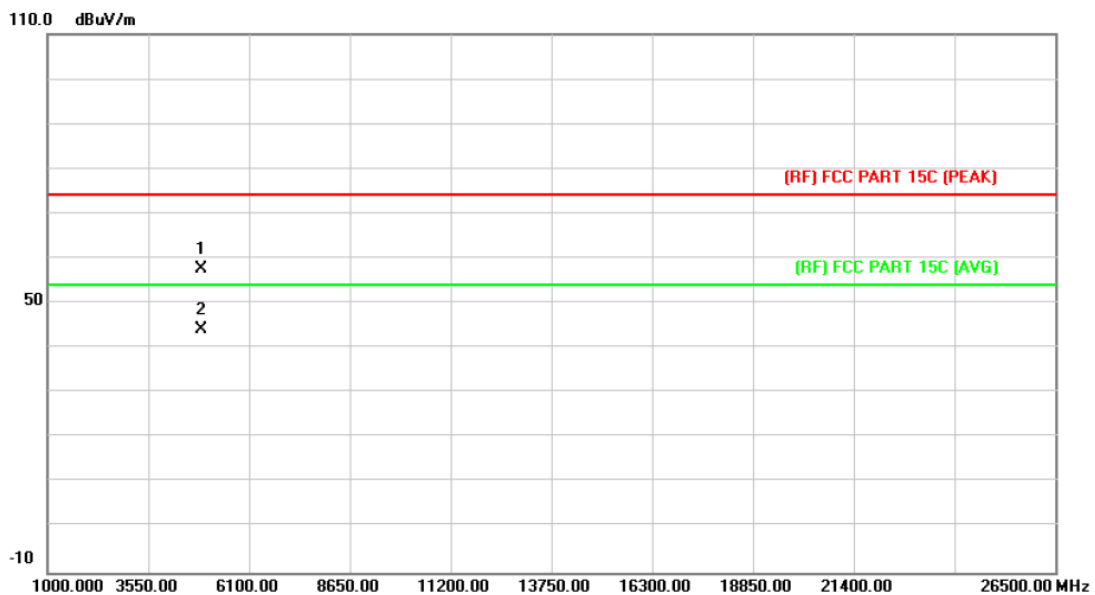

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4881.544	43.82	13.90	57.72	74.00	-16.28	peak
2	*	4882.594	30.31	13.90	44.21	54.00	-9.79	AVG

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2441MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

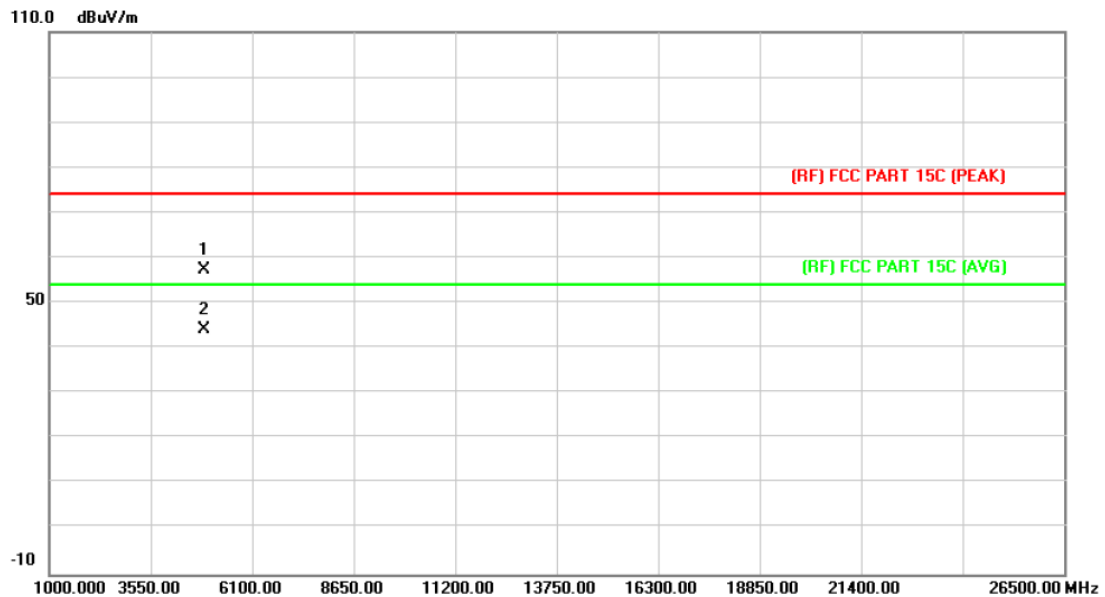


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4881.094	43.39	13.90	57.29	74.00	-16.71	peak
2	*	4881.160	30.18	13.90	44.08	54.00	-9.92	AVG

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2480MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

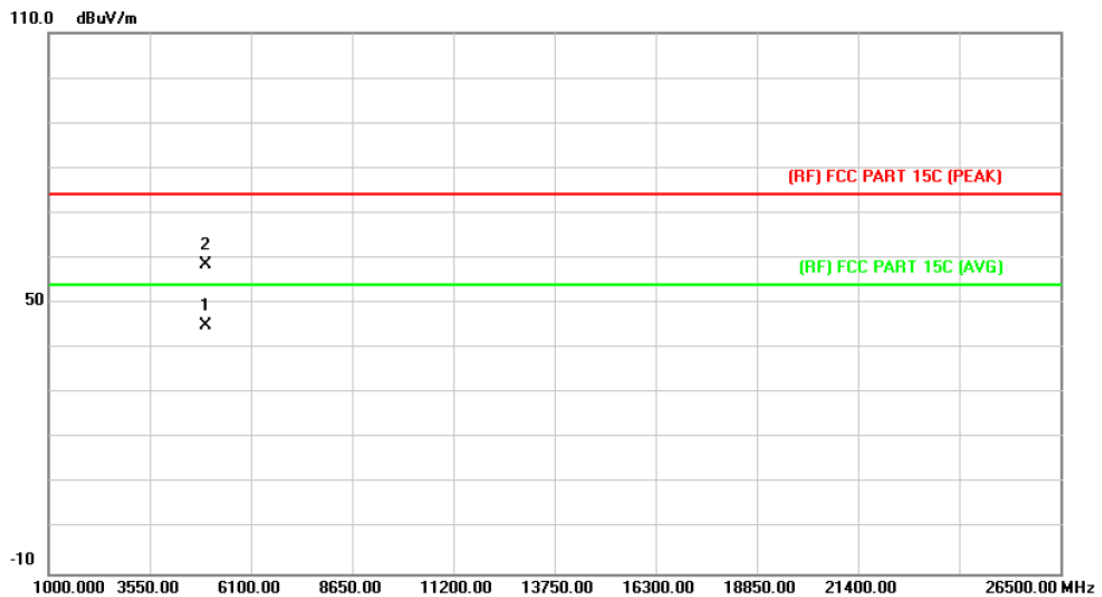

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.067	30.72	14.36	45.08	54.00	-8.92	AVG
2		4960.336	44.21	14.36	58.57	74.00	-15.43	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2480MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

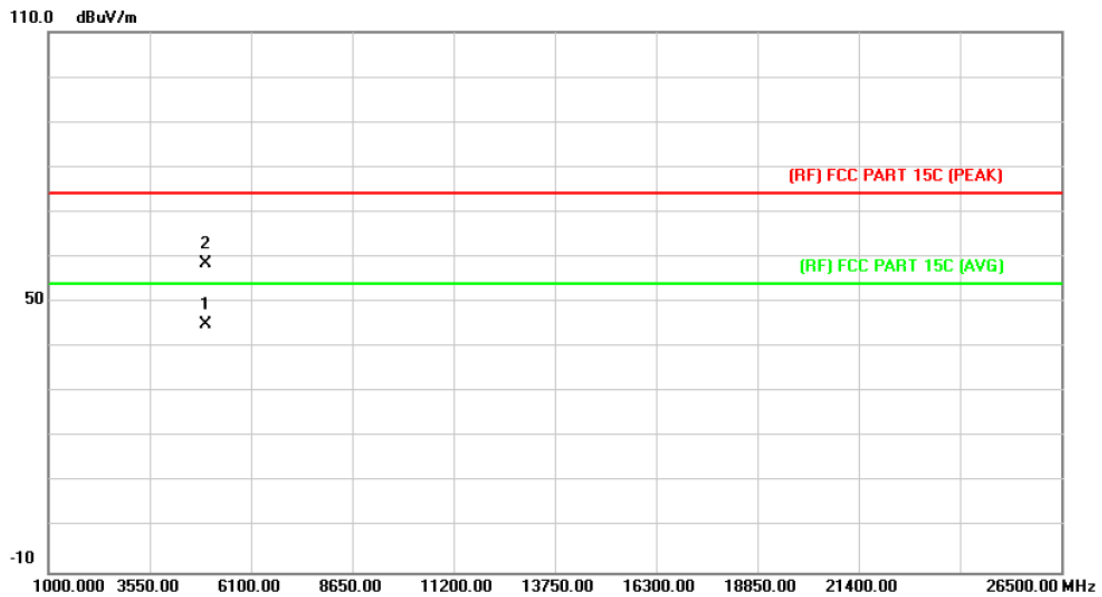


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.112	30.74	14.36	45.10	54.00	-8.90	AVG
2		4960.633	44.13	14.36	58.49	74.00	-15.51	peak

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

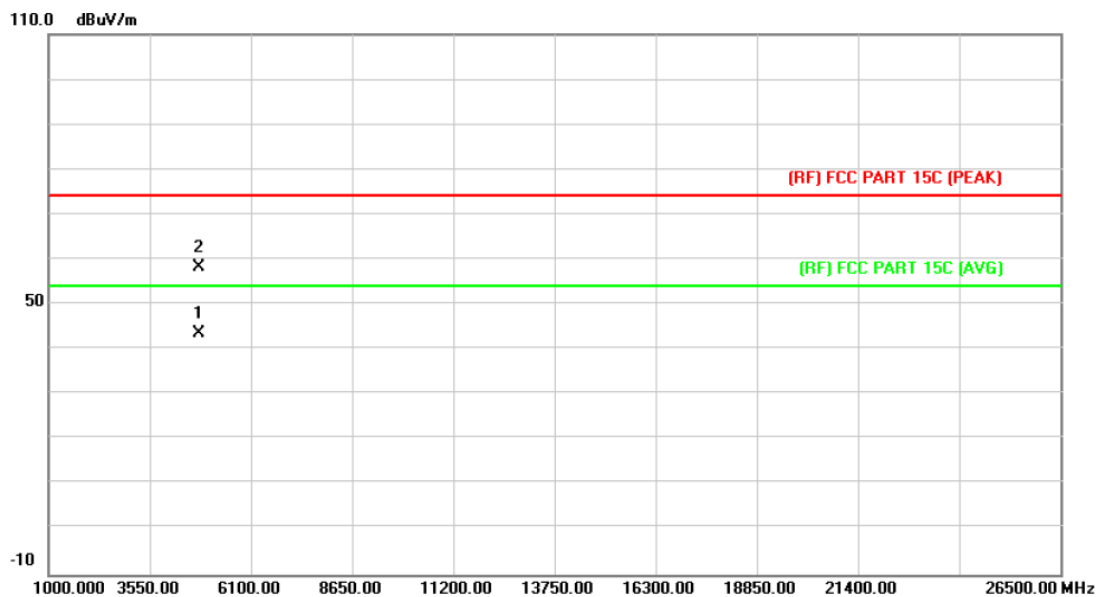

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4802.605	30.09	13.43	43.52	54.00	-10.48	AVG
2		4804.192	44.80	13.44	58.24	74.00	-15.76	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

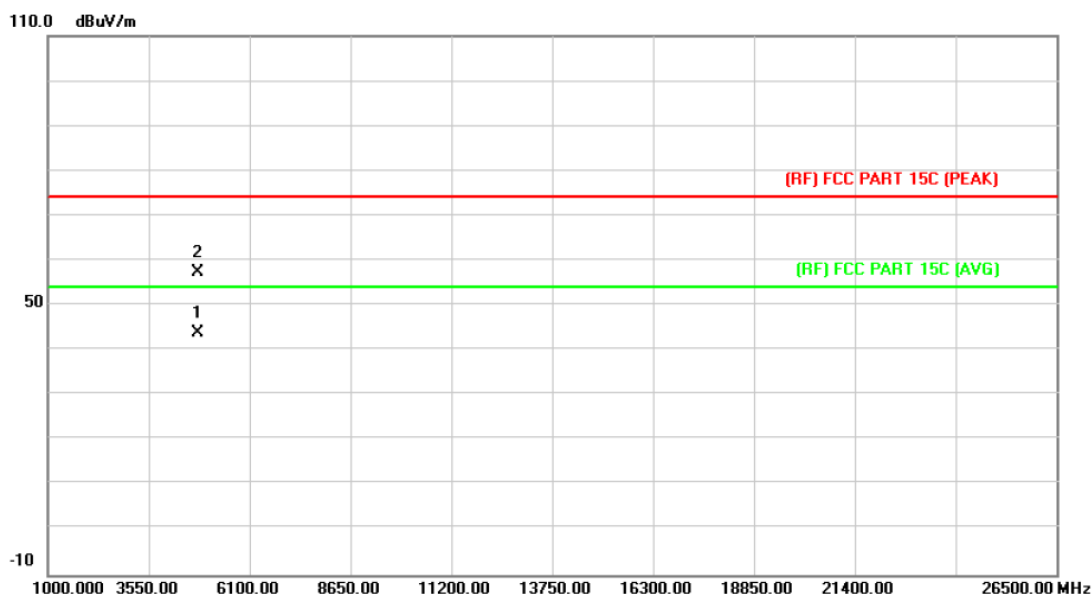


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4804.567	30.30	13.44	43.74	54.00	-10.26	AVG
2		4805.239	43.91	13.45	57.36	74.00	-16.64	peak

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 8-DPSK Mode 2441MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

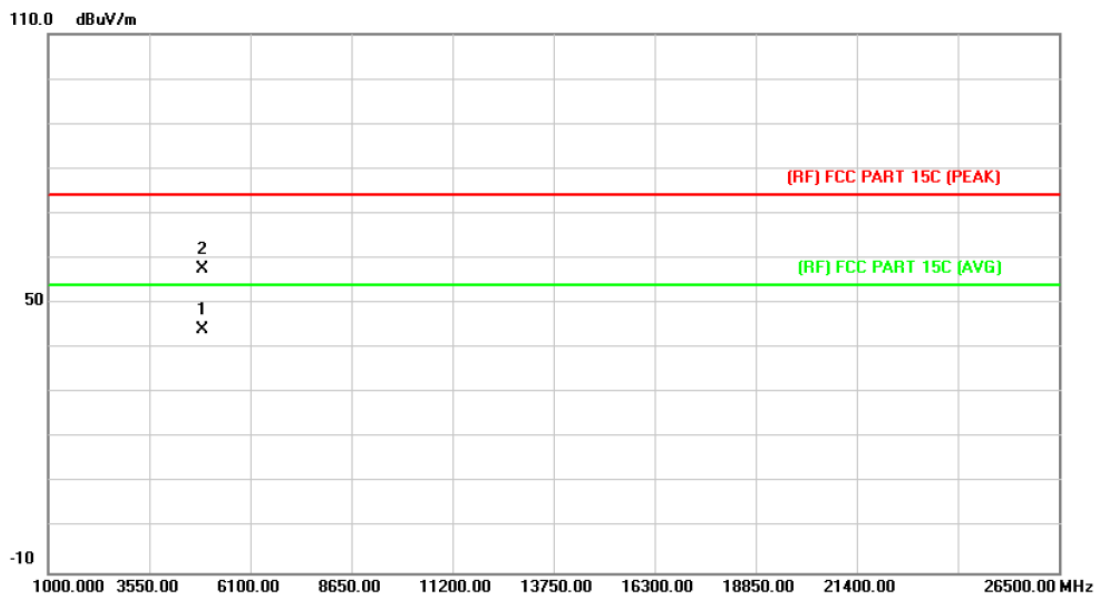

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4880.833	30.15	13.89	44.04	54.00	-9.96	AVG
2		4882.015	43.87	13.90	57.77	74.00	-16.23	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 8-DPSK Mode 2441MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

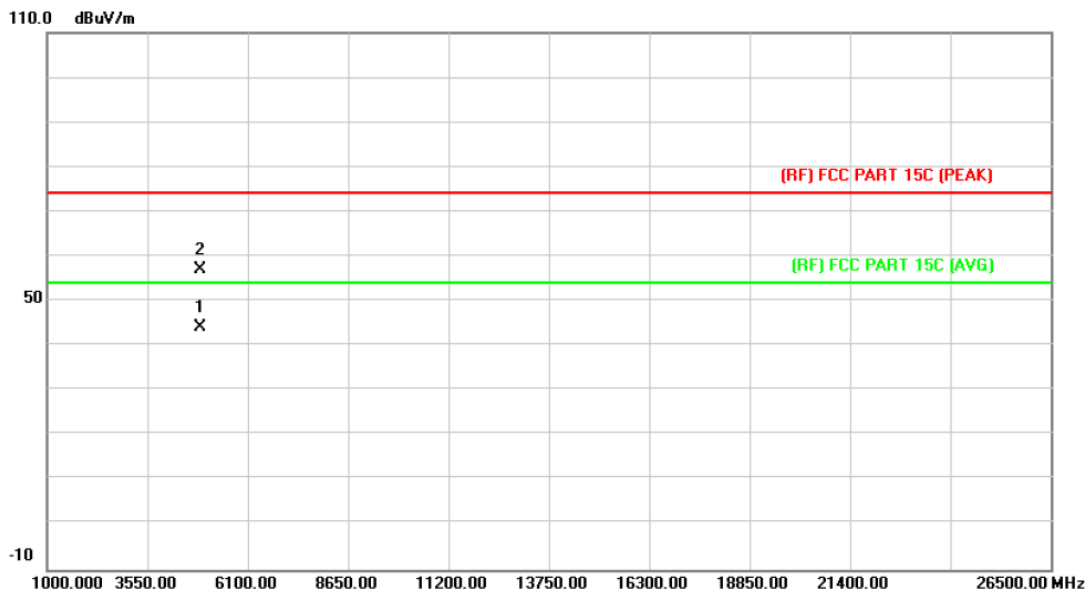


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4881.643	30.11	13.90	44.01	54.00	-9.99	AVG
2		4882.213	43.17	13.90	57.07	74.00	-16.93	peak

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

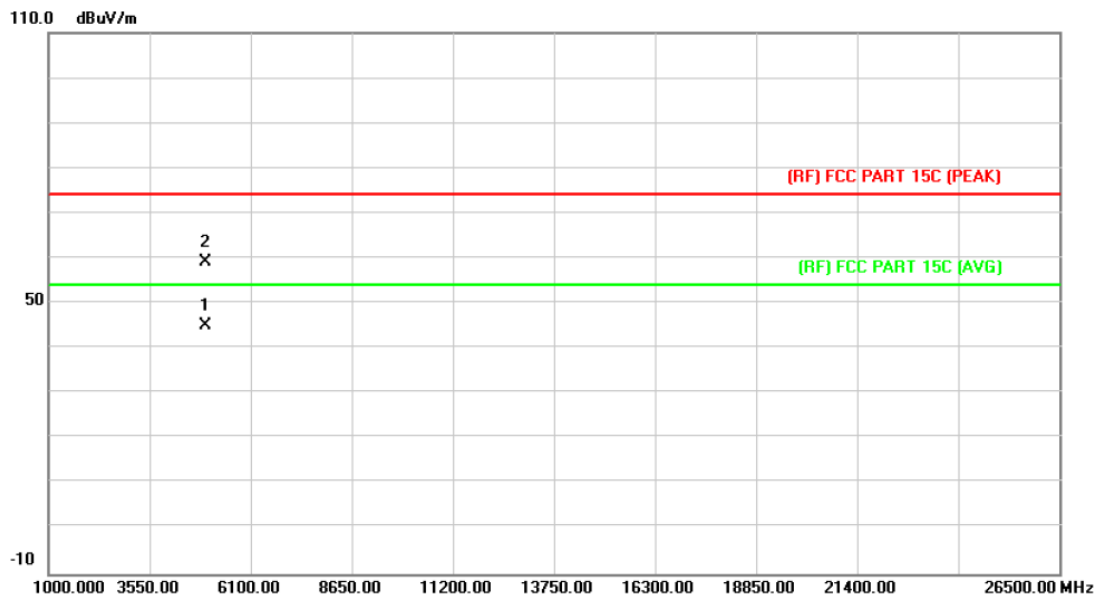

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.874	30.76	14.36	45.12	54.00	-8.88	AVG
2		4961.047	44.70	14.37	59.07	74.00	-14.93	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

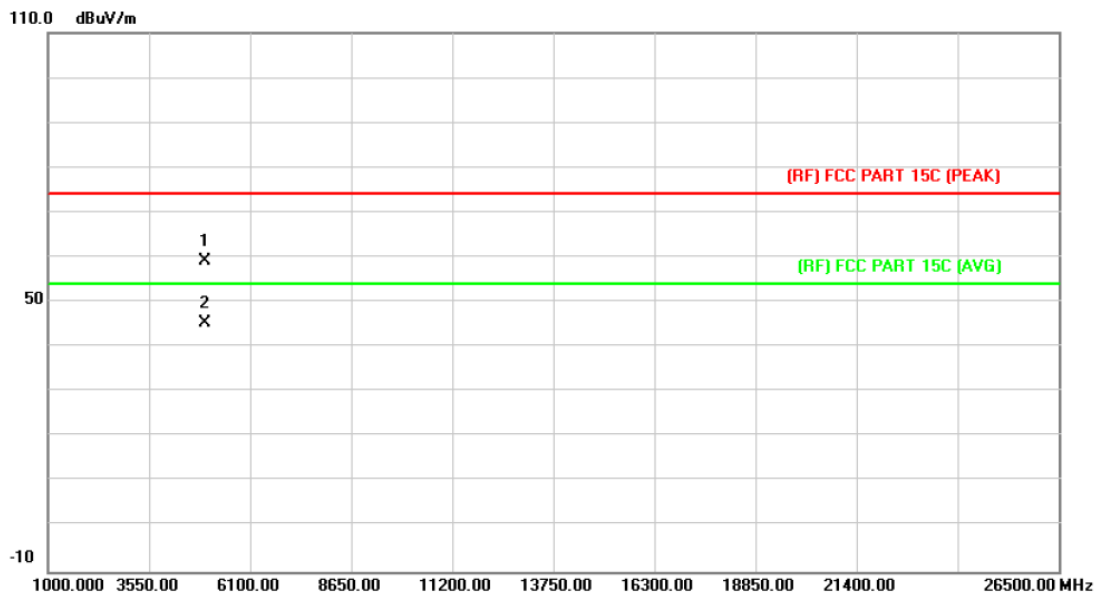

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4960.315	44.72	14.36	59.08	74.00	-14.92 peak
2	*	4961.050	30.89	14.37	45.26	54.00	-8.74 AVG

Emission Level= Read Level+ Correct Factor



## 6. Restricted Bands Requirement

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC Part 15.209


FCC Part 15.205

#### 6.1.2 Test Limit

Restricted Frequency Band (MHz)	Class B (dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

**Note:** All restriction bands have been tested, only the worst case is reported.

### 6.2 Test Setup

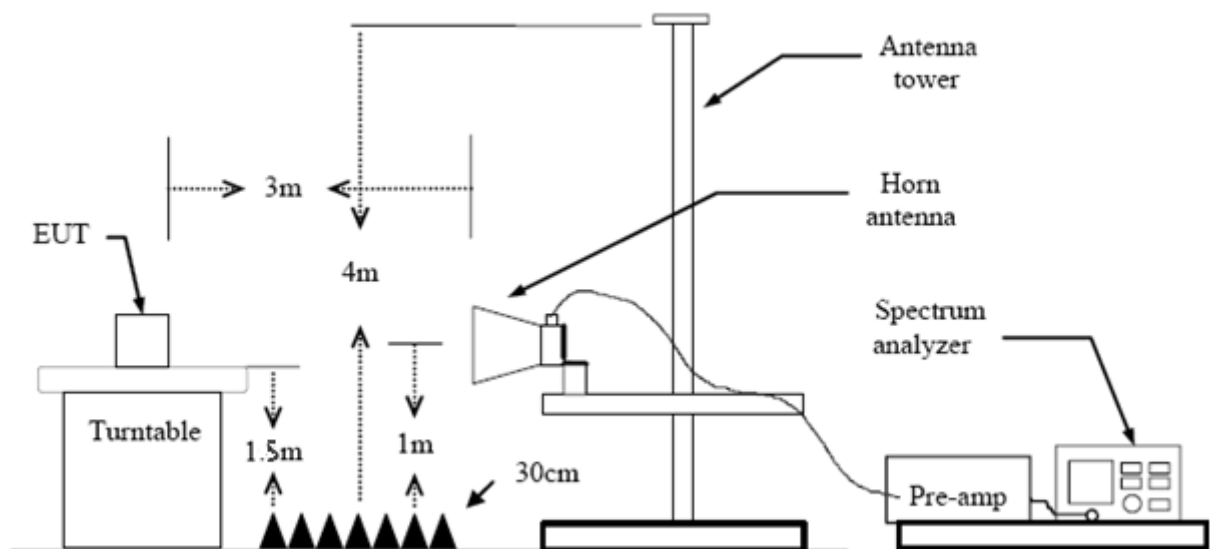

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

- 
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
  - (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
  - (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
  - (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
  - (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
  - (8) For the actual test configuration, please see the test setup photo.

#### 6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 6.4 Test Data


Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.



**(1) Radiation Test**


<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2402MHz		
<b>Remark:</b>	N/A		

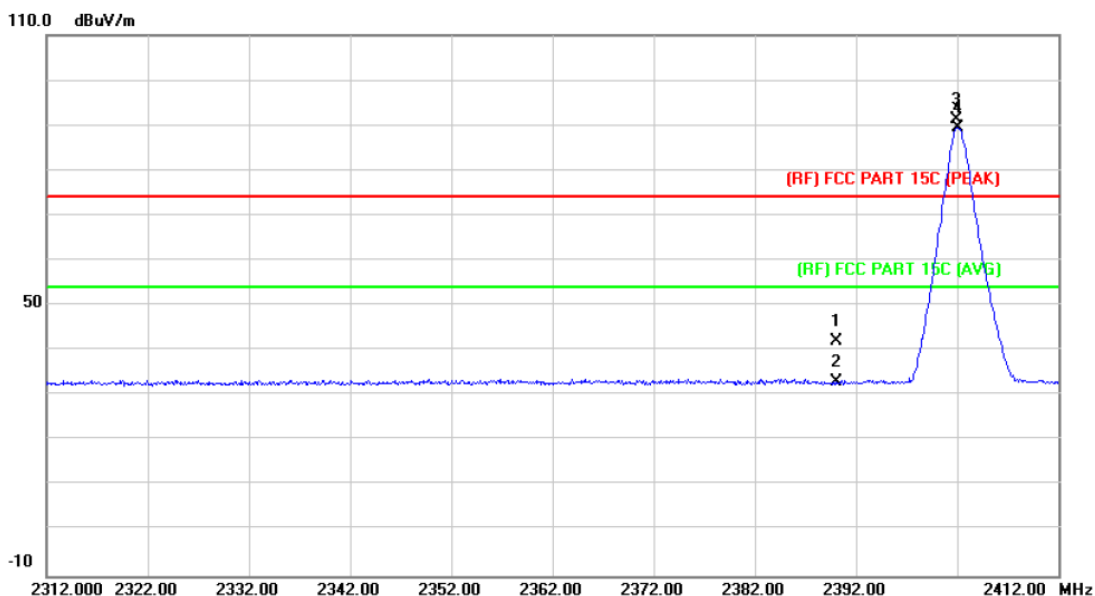

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		2390.000	41.16	0.77	41.93	74.00	-32.07 peak
2		2390.000	32.15	0.77	32.92	54.00	-21.08 AVG
3	X	2401.900	90.45	0.82	91.27	Fundamental Frequency peak	
4	*	2402.000	88.77	0.82	89.59	Fundamental Frequency AVG	

**Emission Level= Read Level+ Correct Factor**


<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2402MHz		
<b>Remark:</b>	N/A		

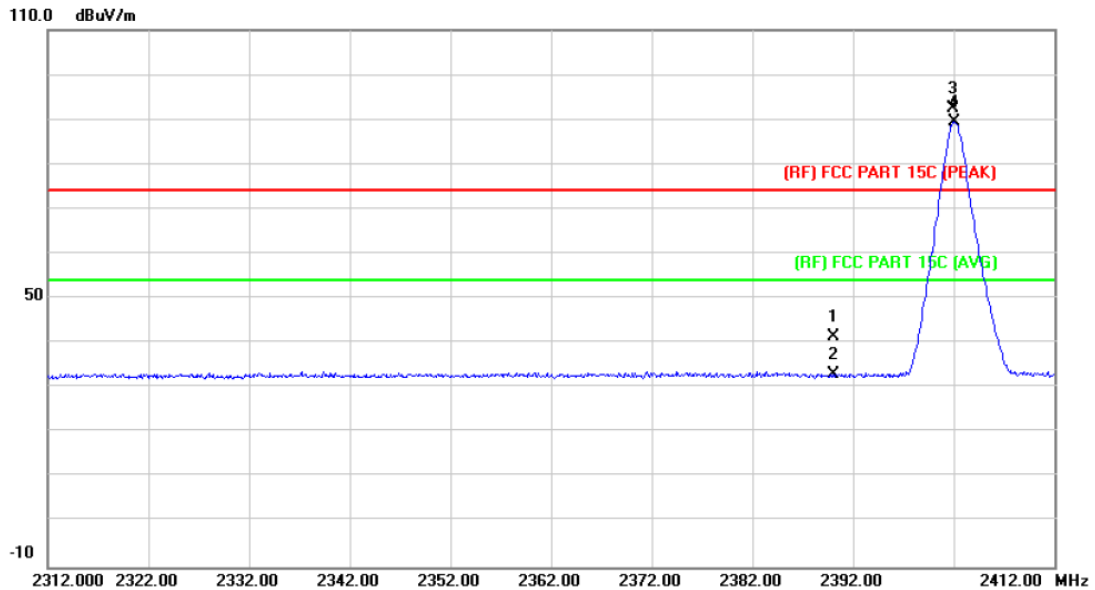


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	40.77	0.77	41.54	74.00	-32.46	peak
2		2390.000	32.19	0.77	32.96	54.00	-21.04	AVG
3	X	2401.900	91.74	0.82	92.56	Fundamental Frequency		peak
4	*	2402.100	88.64	0.82	89.46	Fundamental Frequency		AVG

**Emission Level= Read Level+ Correct Factor**



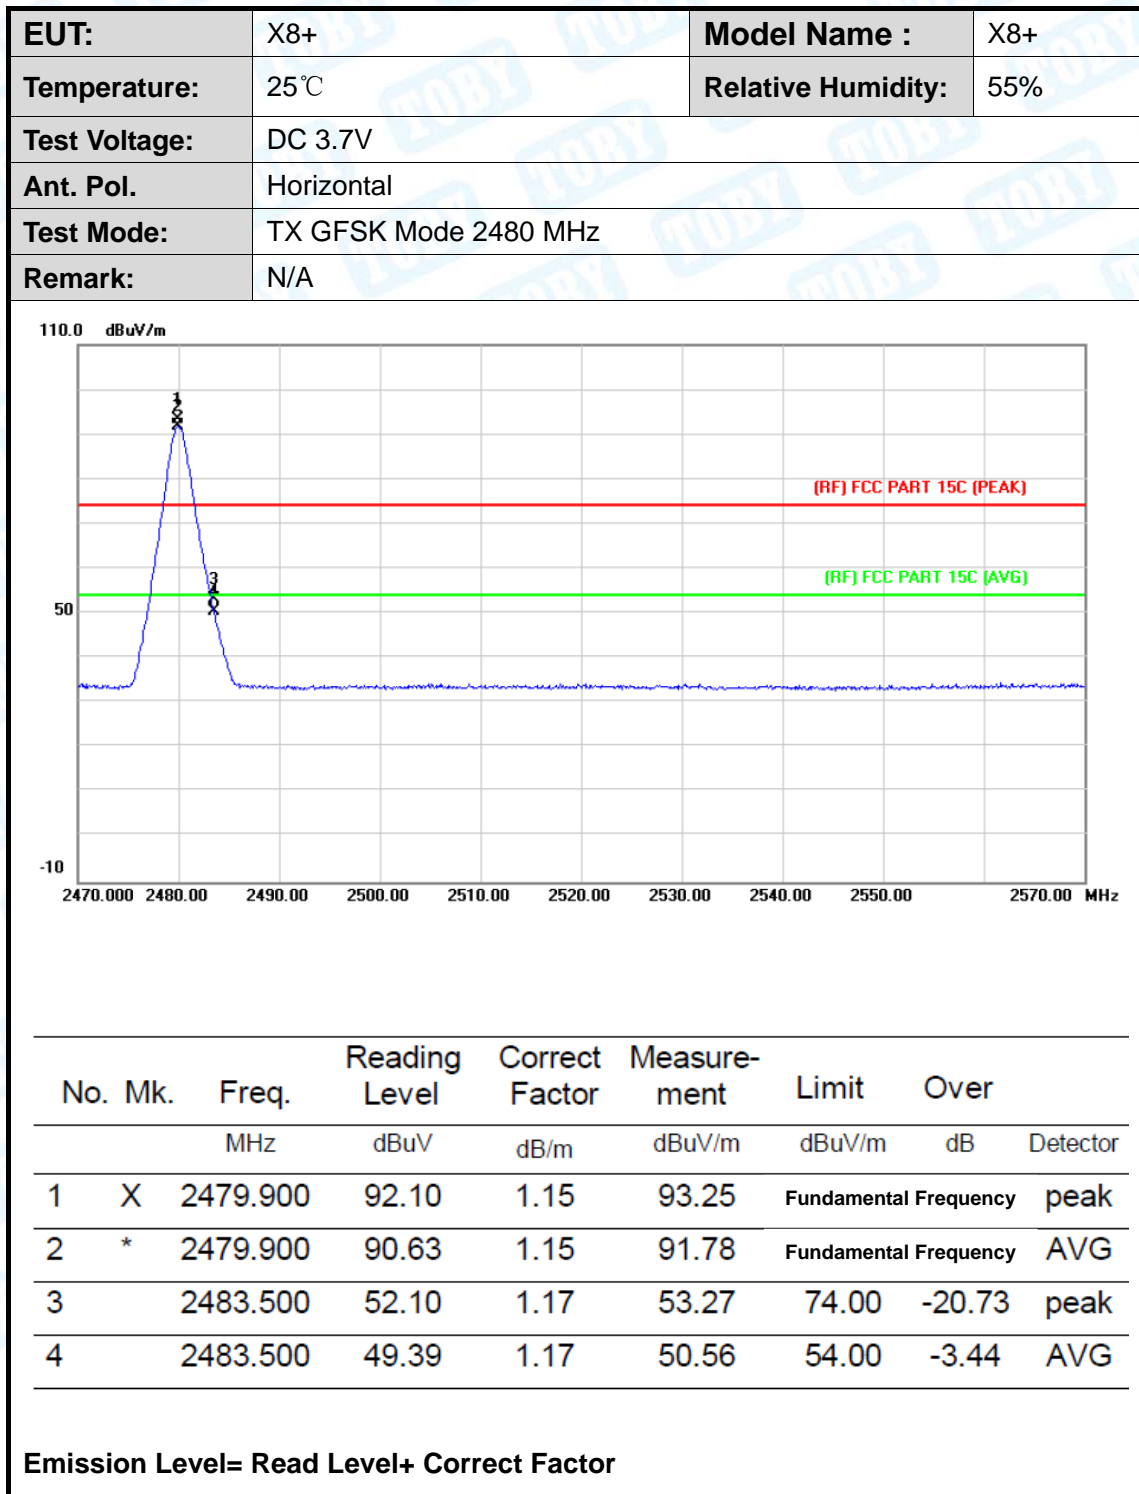

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2480 MHz		
<b>Remark:</b>	N/A		

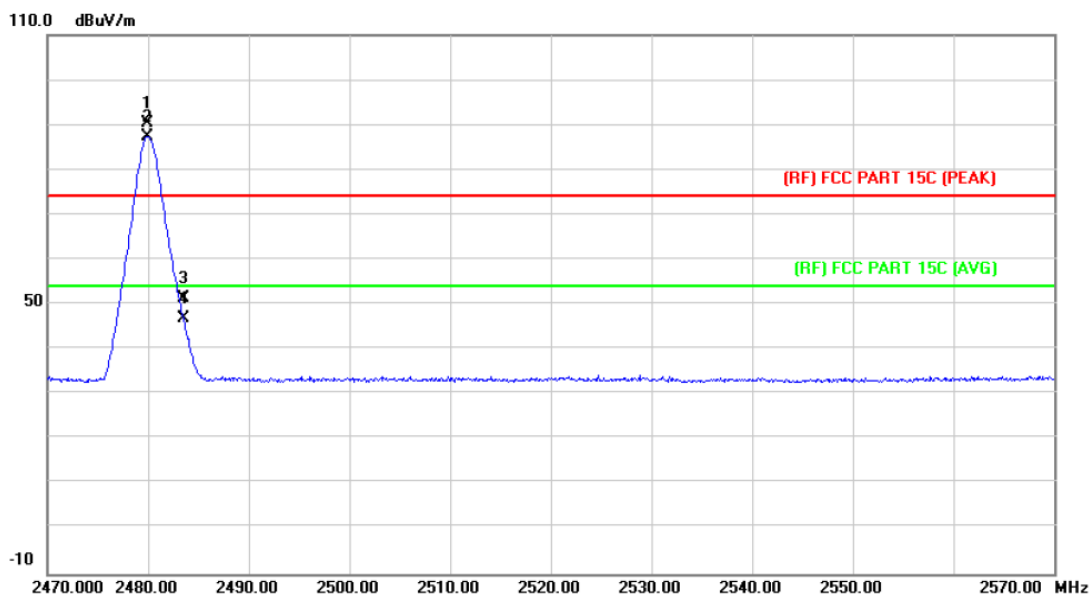


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2479.900	89.06	1.15	90.21	Fundamental Frequency		peak
2	*	2479.900	86.20	1.15	87.35	Fundamental Frequency		AVG
3		2483.500	50.20	1.17	51.37	74.00	-22.63	peak
4		2483.500	45.55	1.17	46.72	54.00	-7.28	AVG

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz		
<b>Remark:</b>	N/A		

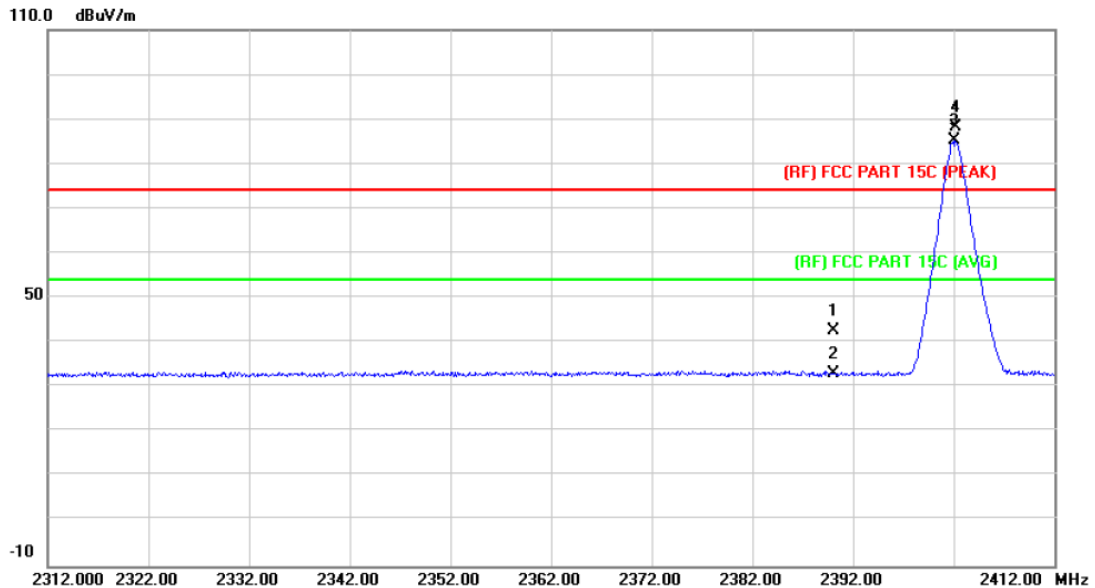

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	41.91	0.77	42.68	74.00	-31.32	peak
2		2390.000	32.19	0.77	32.96	54.00	-21.04	AVG
3	*	2402.100	84.30	0.82	85.12	Fundamental Frequency		AVG
4	X	2402.200	87.31	0.82	88.13	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz		
<b>Remark:</b>	N/A		

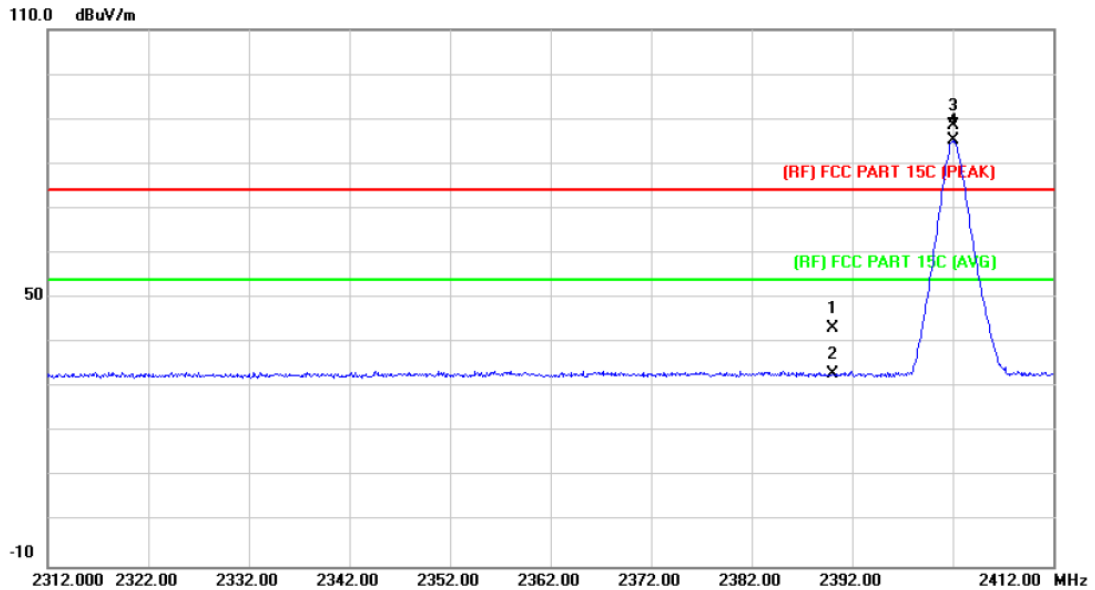


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	42.49	0.77	43.26	74.00	-30.74	peak
2		2390.000	32.31	0.77	33.08	54.00	-20.92	AVG
3	X	2402.100	87.71	0.82	88.53	Fundamental Frequency		peak
4	*	2402.100	84.34	0.82	85.16	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz		
<b>Remark:</b>	N/A		

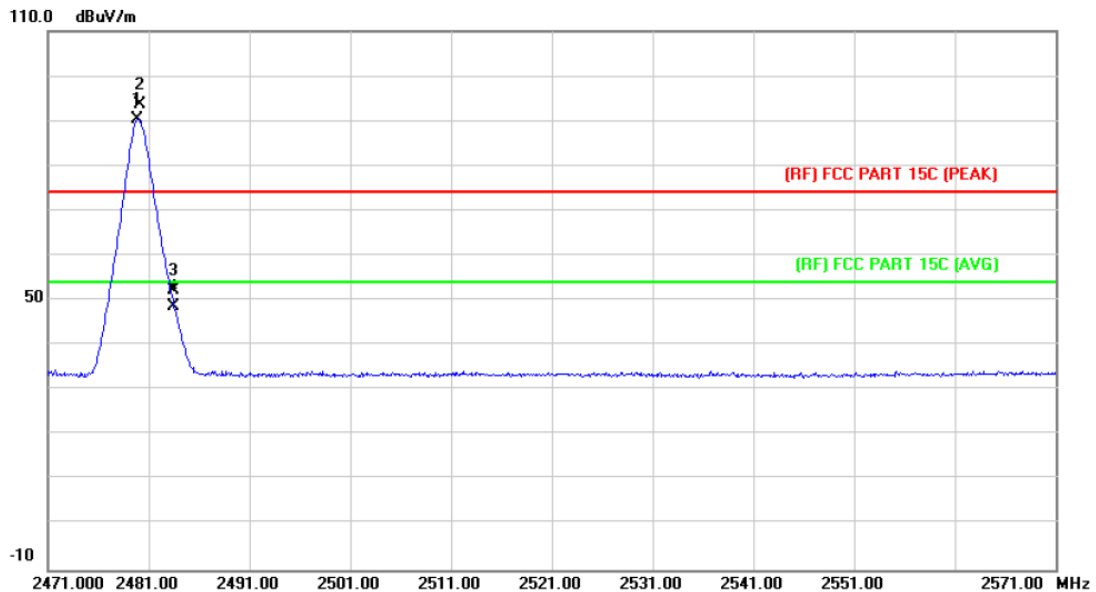

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2479.900	89.22	1.15	90.37	Fundamental Frequency		AVG
2	X	2480.100	92.50	1.15	93.65	Fundamental Frequency		peak
3		2483.500	51.17	1.17	52.34	74.00	-21.66	peak
4		2483.500	47.52	1.17	48.69	54.00	-5.31	AVG

**Emission Level= Read Level+ Correct Factor**

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz		
<b>Remark:</b>	N/A		

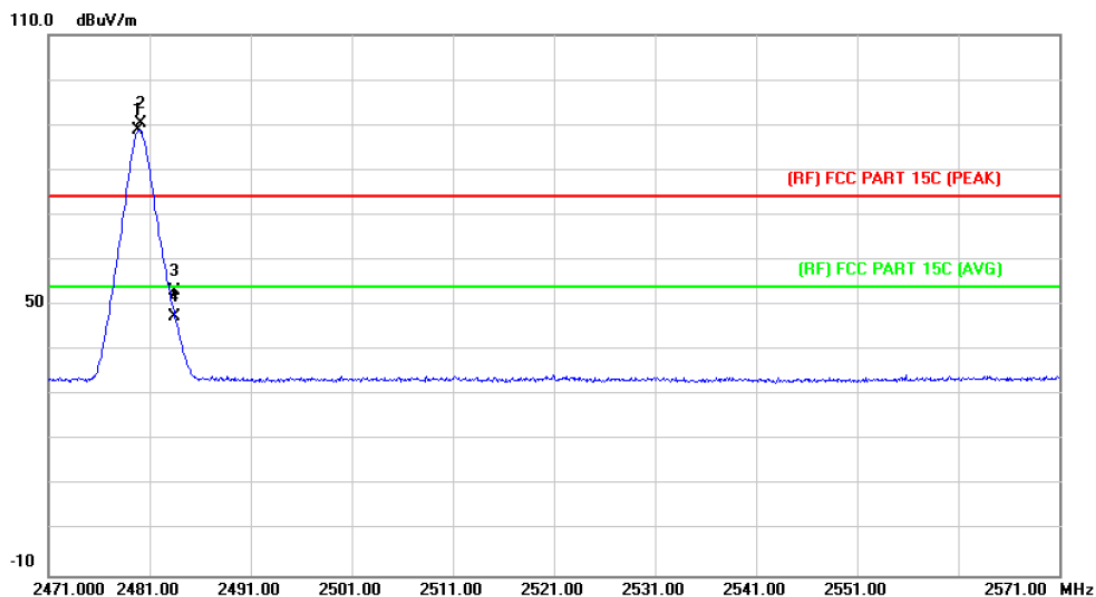



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2479.900	87.78	1.15	88.93	Fundamental Frequency		AVG
2	X	2480.100	89.34	1.15	90.49	Fundamental Frequency		peak
3		2483.500	51.84	1.17	53.01	74.00	-20.99	peak
4		2483.500	46.25	1.17	47.42	54.00	-6.58	AVG

Emission Level= Read Level+ Correct Factor





## (2) Conducted Test

EUT:	X8+	Model Name :	X8+
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	TX GFSK Mode 2402MHz / 2480 MHz		
Remark:	N/A		

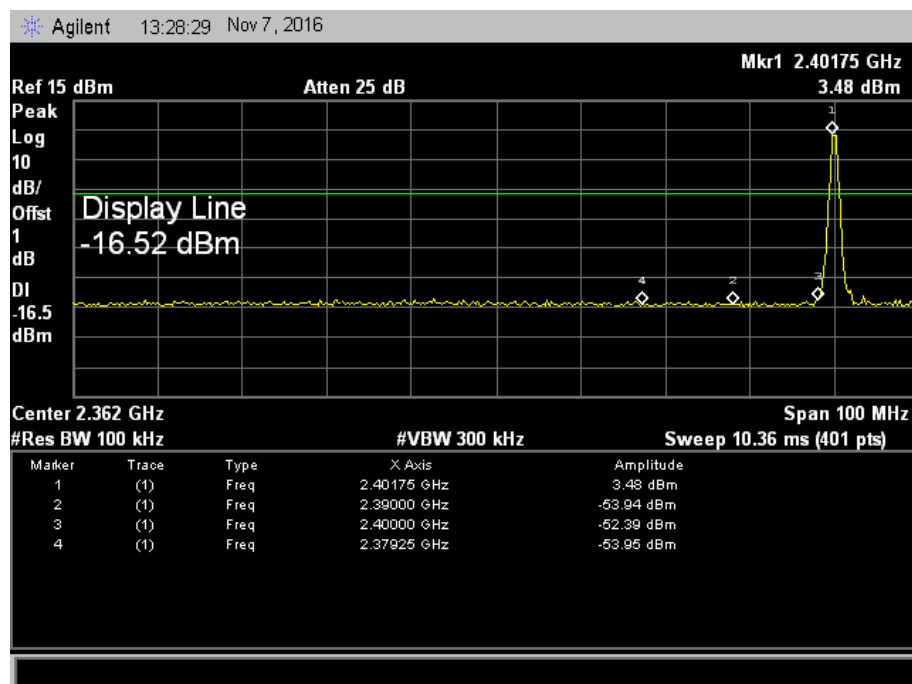
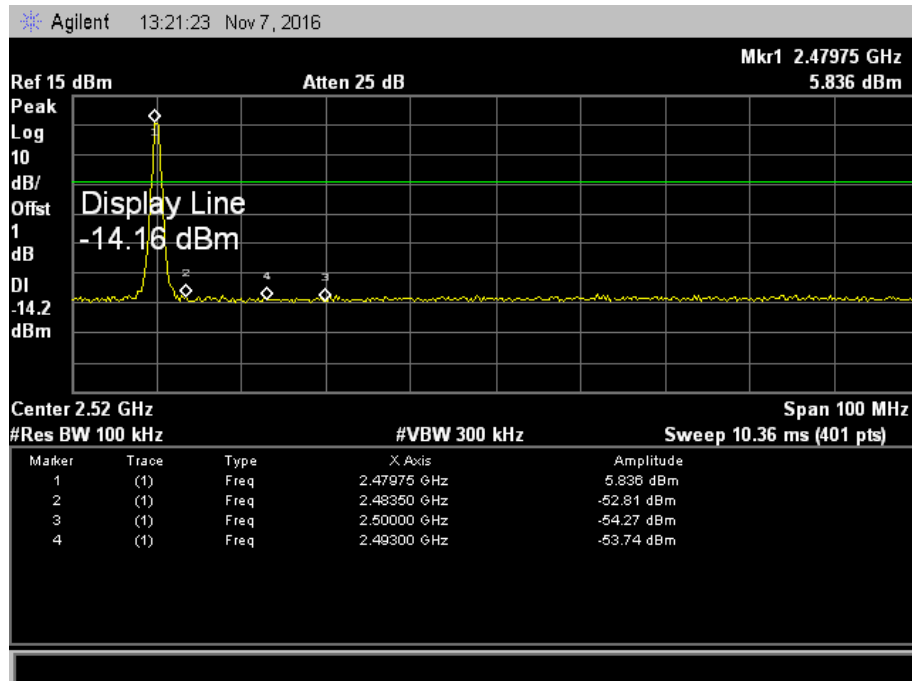


<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Test Mode:</b>	GFSK Hopping Mode		
<b>Remark:</b>	N/A		

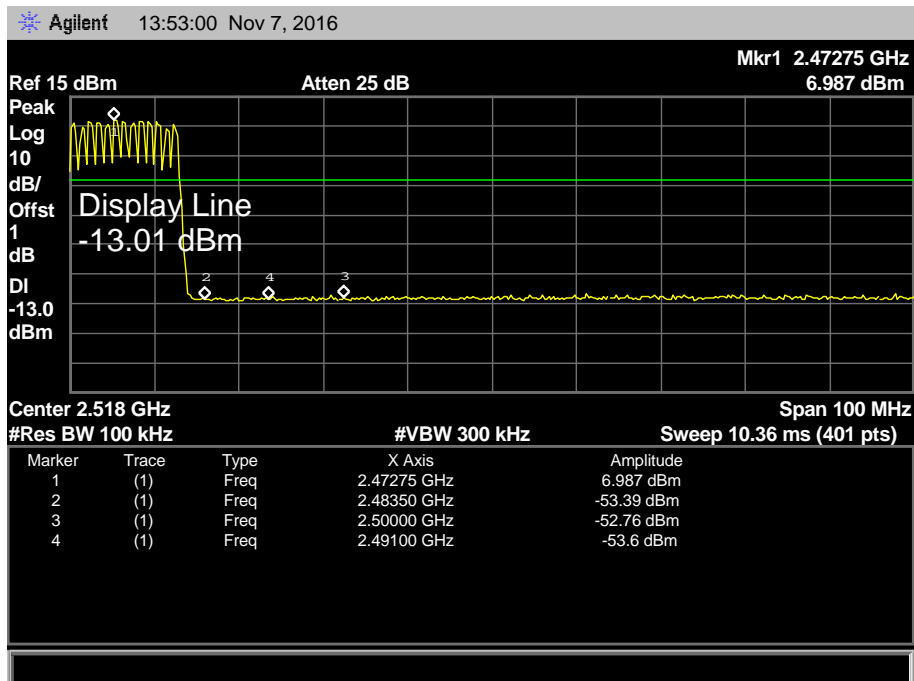
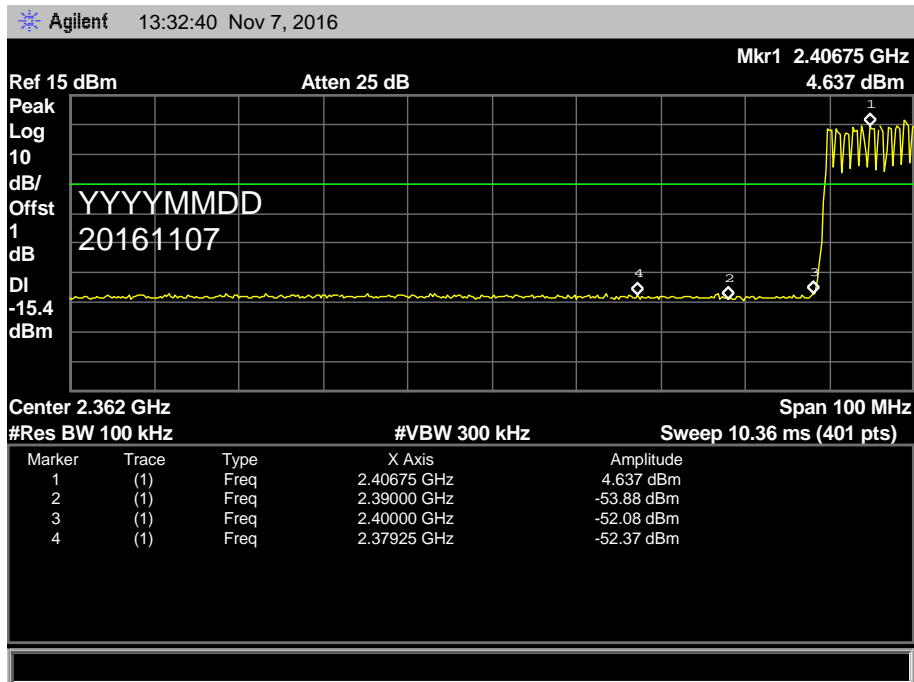




<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz / 2480 MHz		
<b>Remark:</b>	N/A		

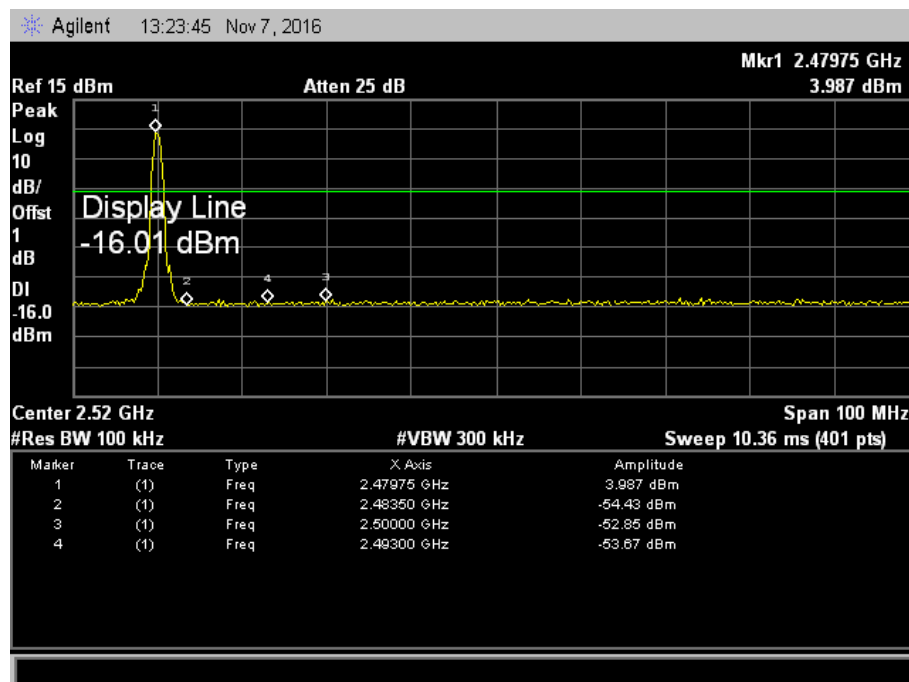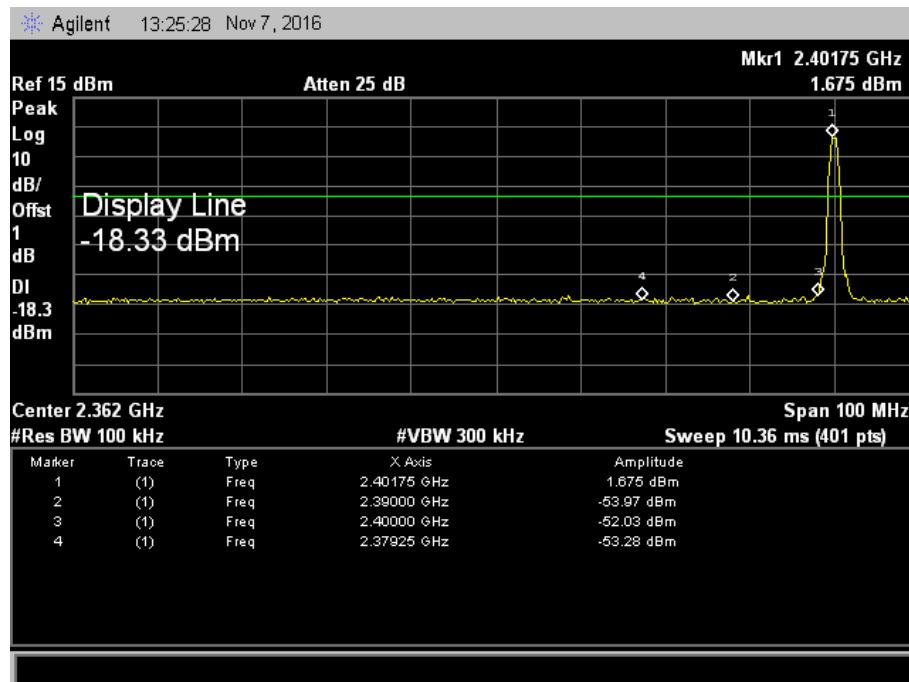

EUT:	X8+	Model Name :	X8+
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	8-DPSK Hopping Mode		
Remark:	N/A		

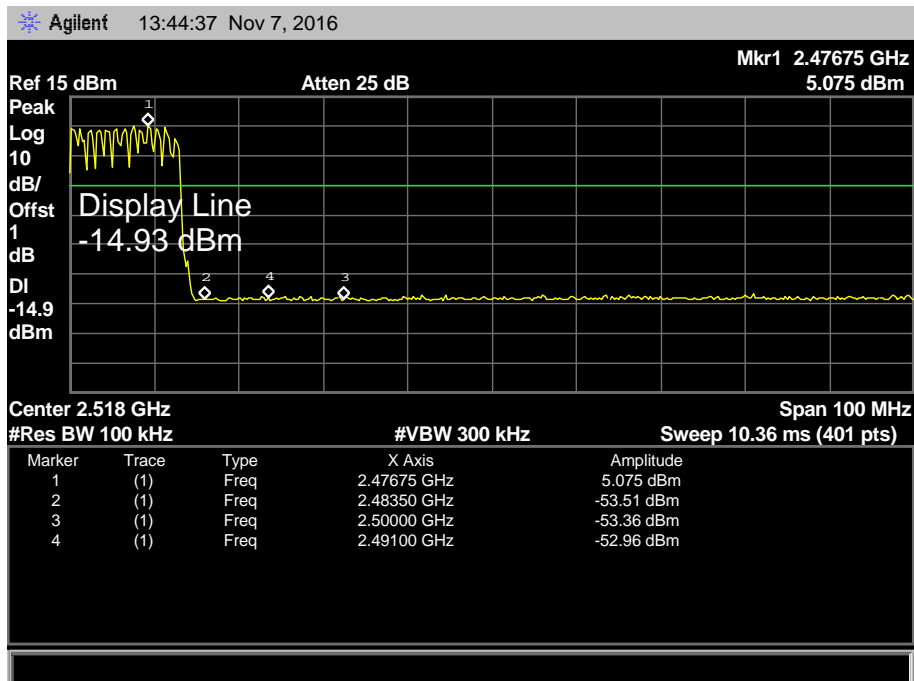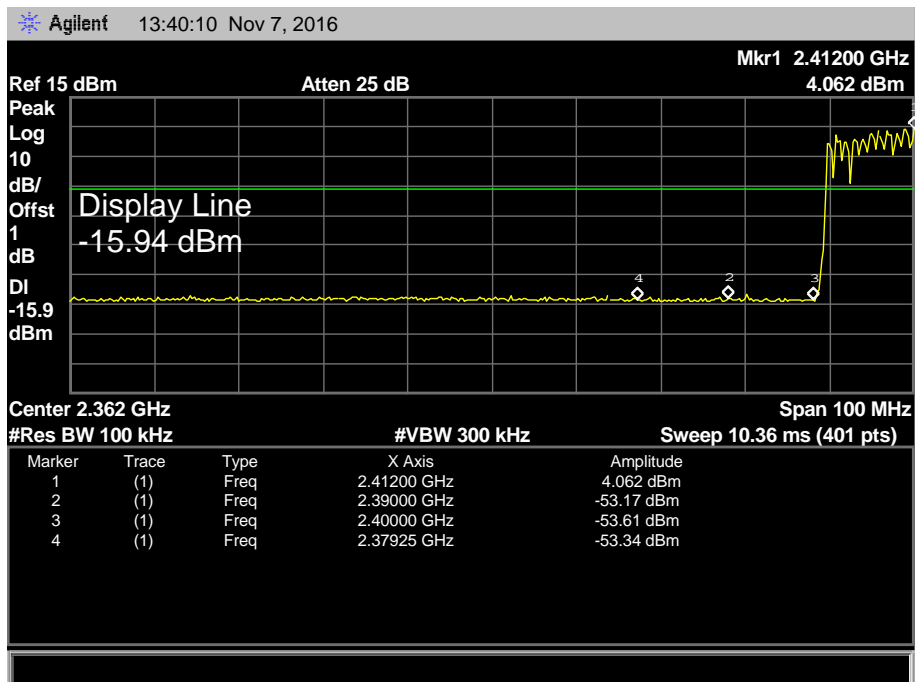



## 7. Number of Hopping Channel

### 7.1 Test Standard and Limit


#### 6.1.1 Test Standard

FCC Part 15.247 (a)(1)

#### 6.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

### 7.2 Test Setup



### 7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.


### 7.4 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.


### 7.5 Test Data

EUT:	X8+	Model Name :	X8+
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	Hopping Mode (GFSK/8-DPSK)		
Frequency Range	Quantity of Hopping Channel	Limit	
2402MHz~2480MHz	79	>15	
	79		

## GFSK Mode

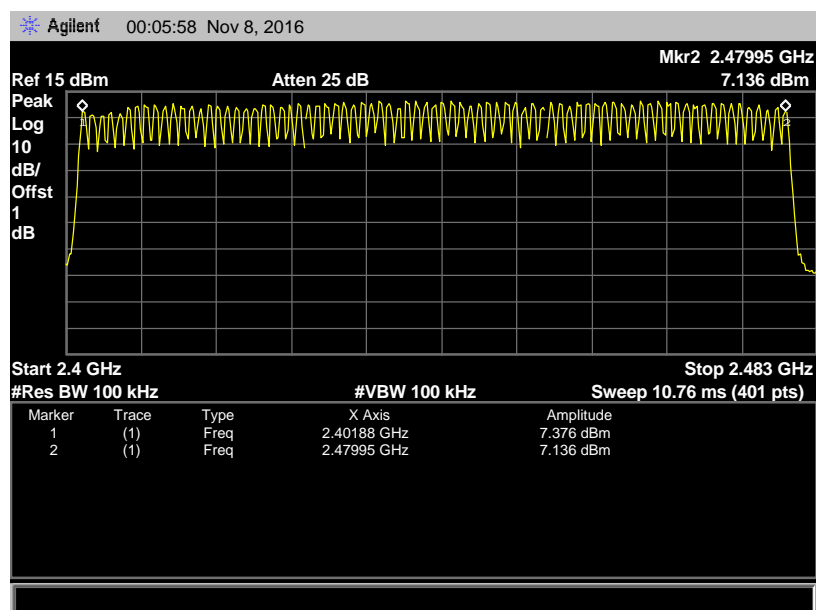

## 8-DPSK Mode

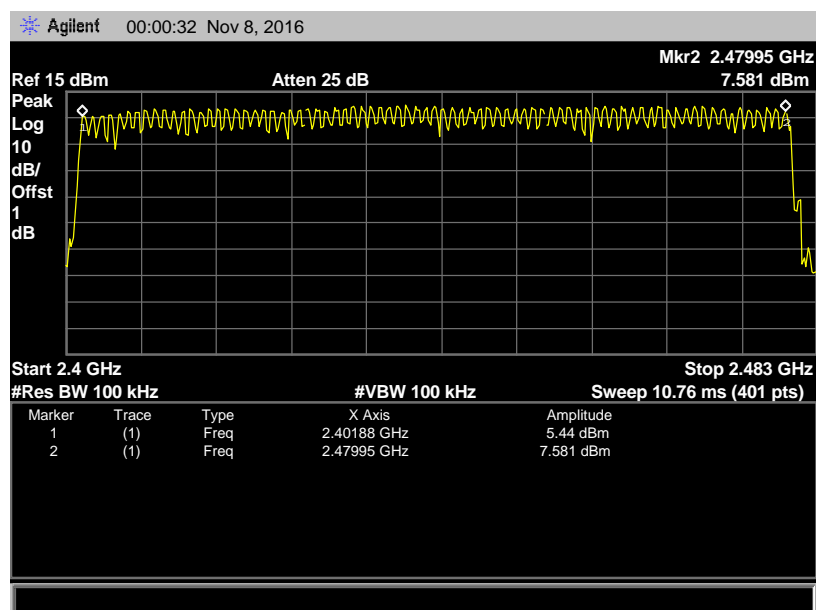



## 8. Average Time of Occupancy

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part 15.247 (a)(1)

#### 8.1.2 Test Limit

Section	Test Item	Limit
15.247(a)(1)/ RSS-210 Annex 8(A8.1d)	Average Time of Occupancy	0.4 sec

### 8.2 Test Setup



### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

### 8.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / X) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

**Note:** X=2 or 4 or 6 (1DH1=2, 1DH3=4, 1DH5=6. 2DH1=2, 2DH3=4, 2DH5=6. 3DH1=2,3DH3=4, 3DH5=6)

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.


## 8.5 Test Data

EUT:	X8+		Model Name :	X8+	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (GFSK DH1)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	0.440	140.80	31.60	400	PASS
2441	0.440	140.80			
2480	0.440	140.80			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 2 ÷ 79) ×31.6

### GFSK Hopping Mode DH1


#### 2402 MHz

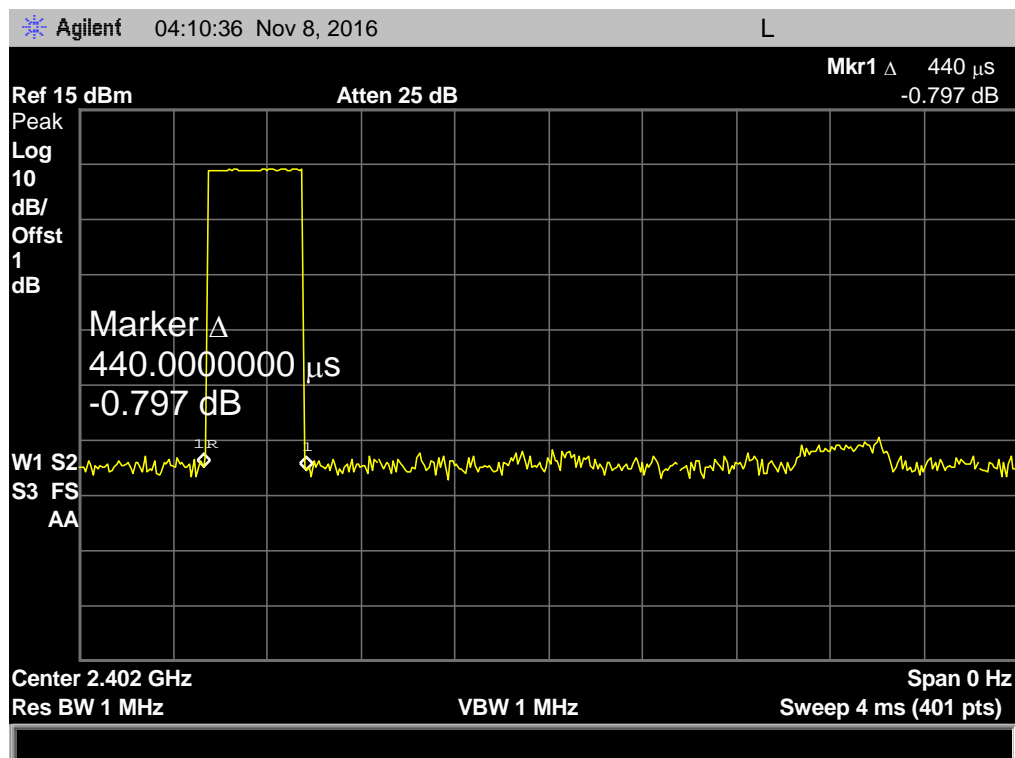




**GFSK Hopping Mode DH1**

**2441 MHz**

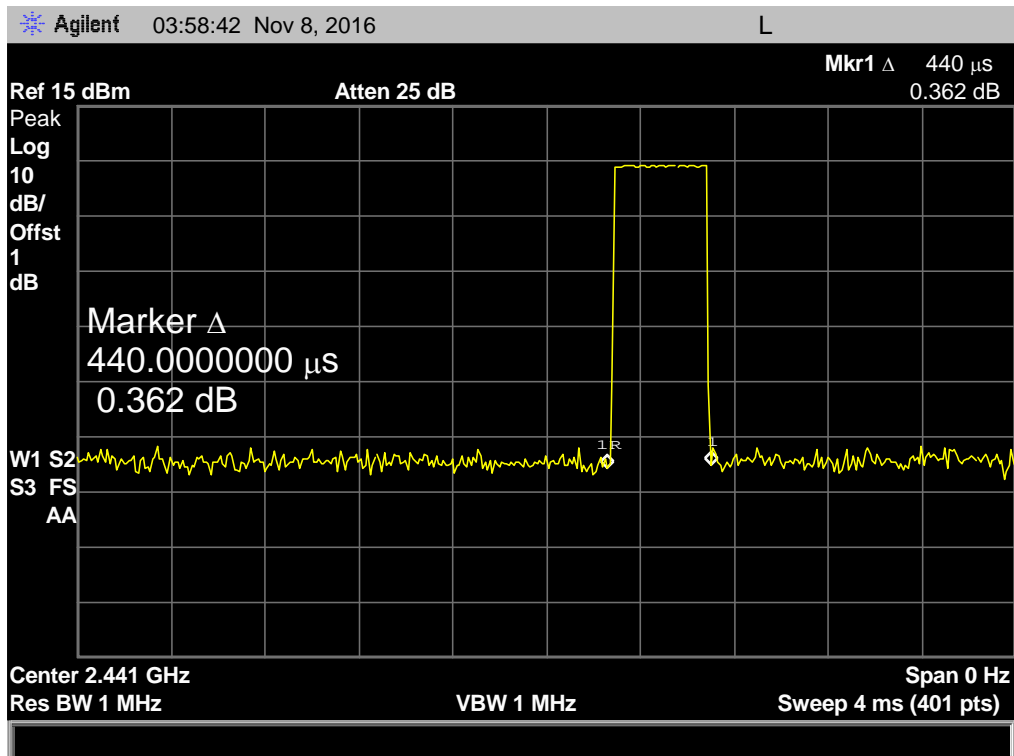

**GFSK Hopping Mode DH1**

**2480 MHz**

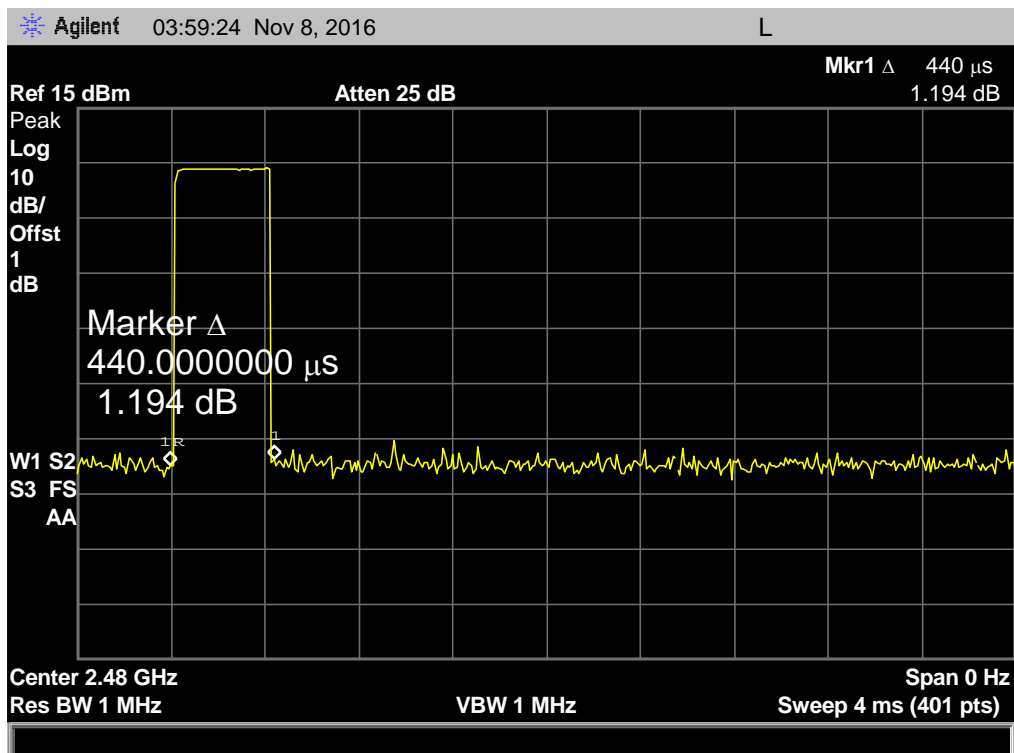


EUT:	X8+		Model Name :	X8+	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (GFSK DH3)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	1.700	272.00	31.60	400	PASS
2441	1.700	272.00			
2480	1.700	272.00			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 4 ÷ 79) ×31.6

**GFSK Hopping Mode DH3**


**2402 MHz**

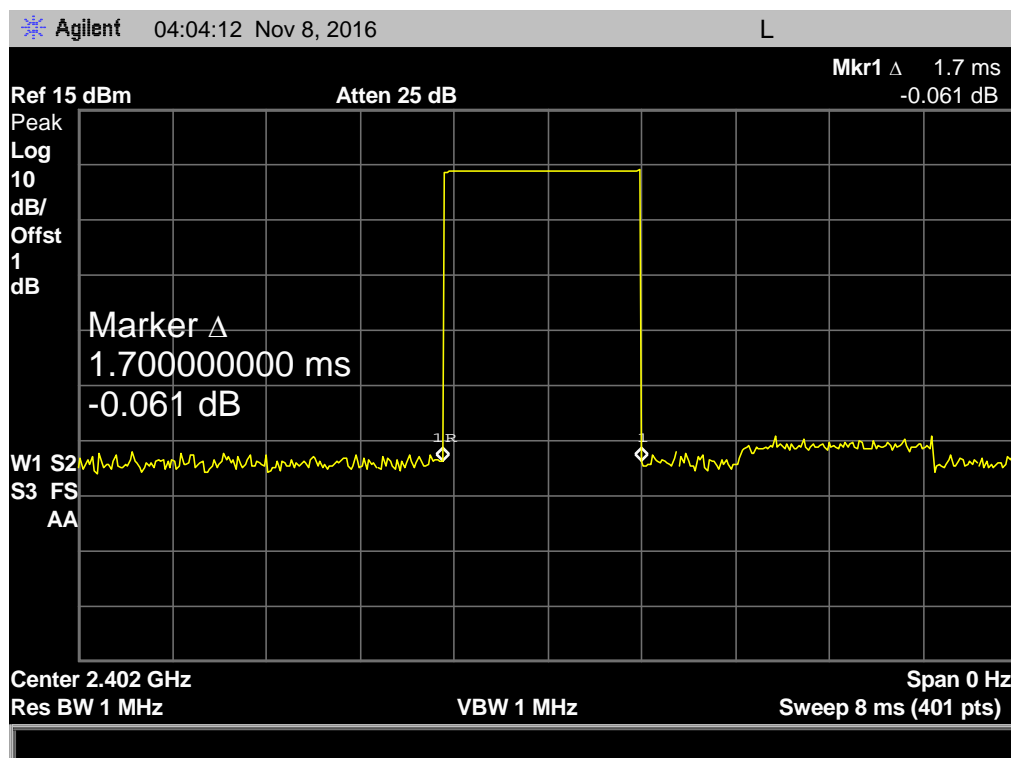




**GFSK Hopping Mode DH3**

**2441 MHz**

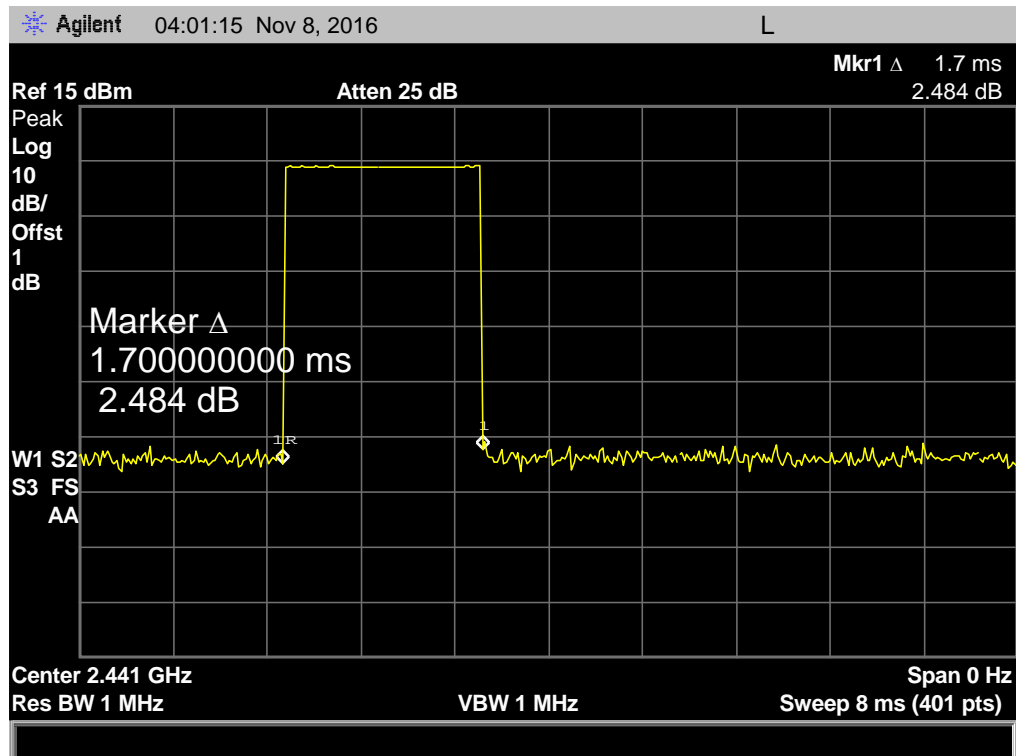

**GFSK Hopping Mode DH3**

**2480 MHz**

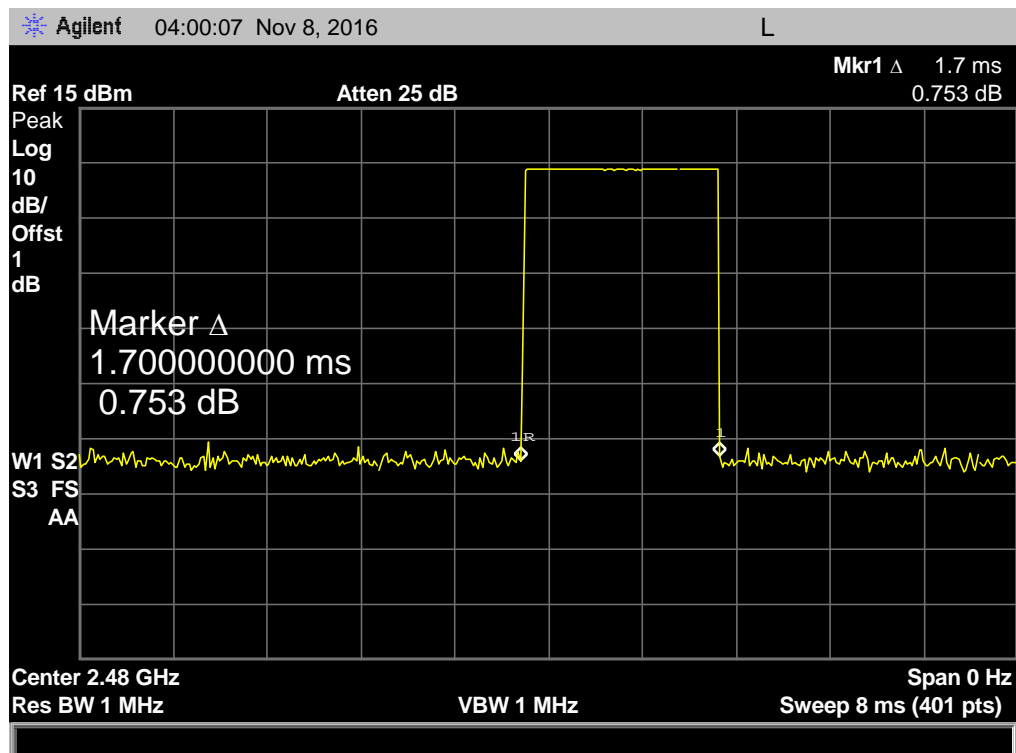


EUT:	X8+		Model Name :	X8+	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (GFSK DH5)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	2.970	316.80	31.60	400	PASS
2441	2.970	316.80			
2480	2.970	316.80			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6

## GFSK Hopping Mode DH5


2402 MHz

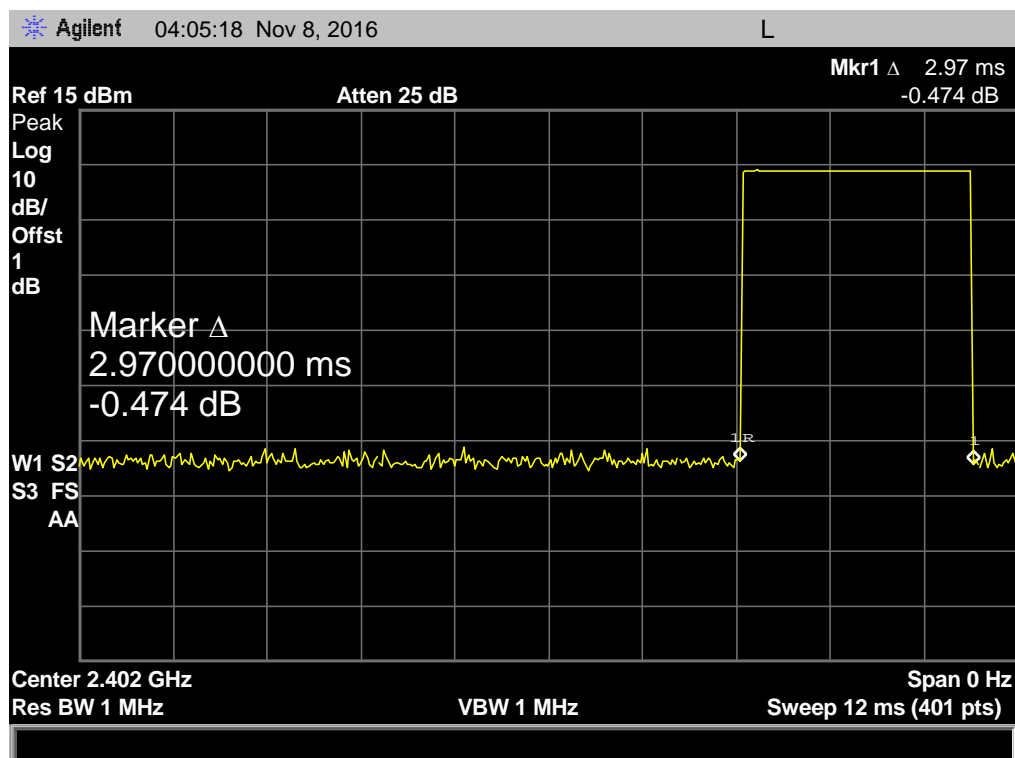




**GFSK Hopping Mode DH5**

**2441 MHz**

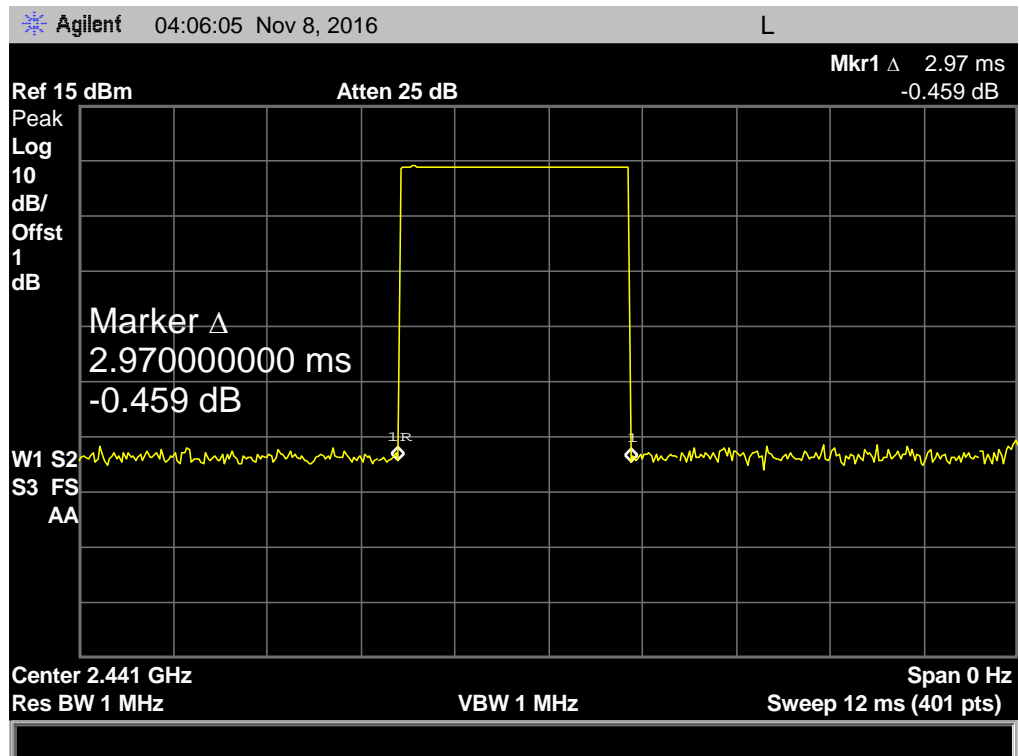

**GFSK Hopping Mode DH5**

**2480 MHz**

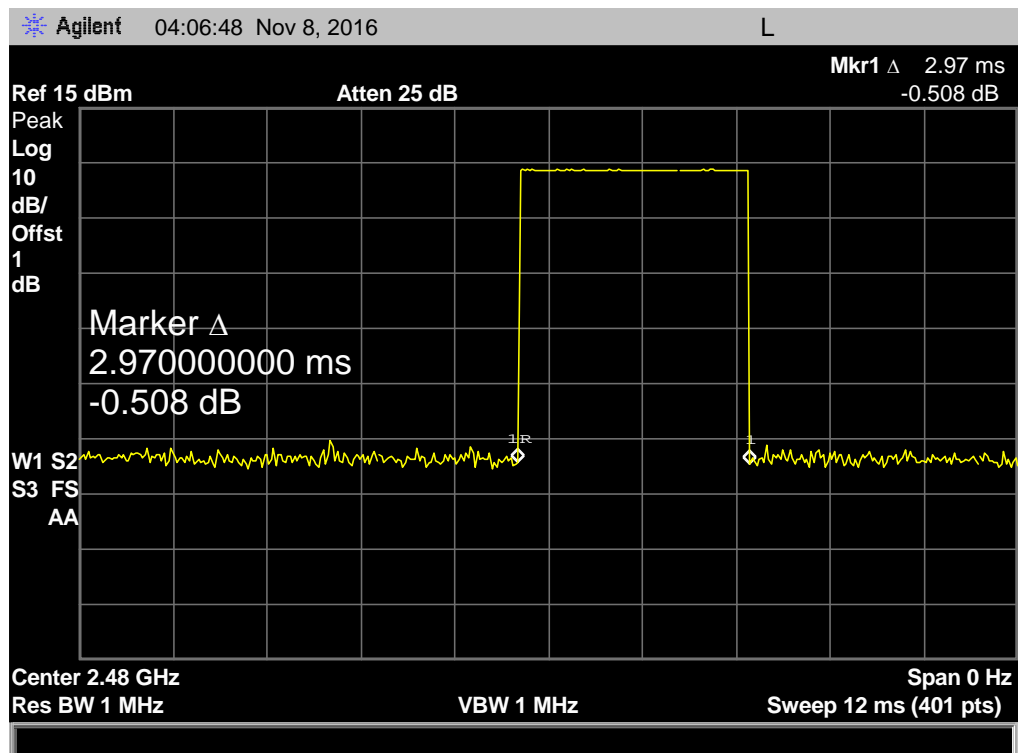

EUT:	X8+	Model Name :	X8+		
Temperature:	25℃	Relative Humidity:	55%		
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode ( $\pi$ /4-DQPSK DH1)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	0.430	137.60	31.60	400	PASS
2441	0.430	137.60			
2480	0.430	137.60			
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 2 ÷ 79) ×31.6					
$\pi$ /4-DQPSK Hopping Mode DH1					
2402 MHz					

Agilent

04:13:17 Nov 8, 2016

L

Ref 15 dBm

Atten 25 dB

Mkr1  $\Delta$  430  $\mu$ s  
1.131 dB

Peak Log 10 dB/ Offst 1 dB

Marker  $\Delta$  430.000000  $\mu$ s  
1.131 dB

W1 S2  
S3 FS  
AA


Center 2.402 GHz  
Res BW 1 MHz

Span 0 Hz  
Sweep 4 ms (401 pts)




$\pi/4$ -DQPSK Hopping Mode DH1


2441 MHz

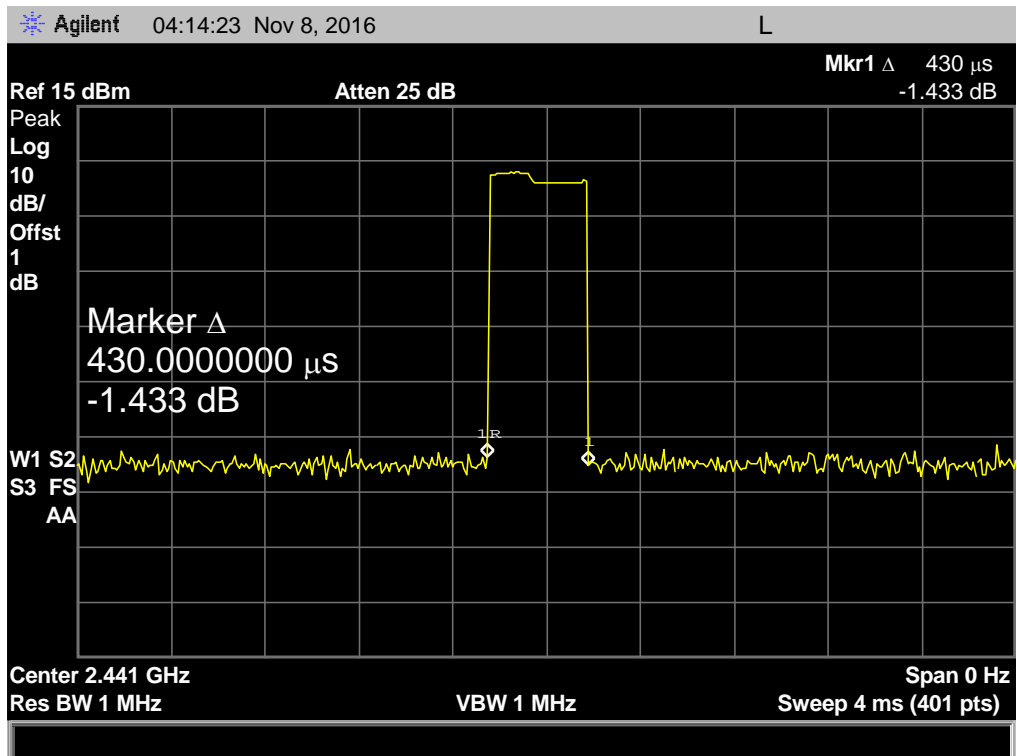

$\pi/4$ -DQPSK Hopping Mode DH1

2480 MHz

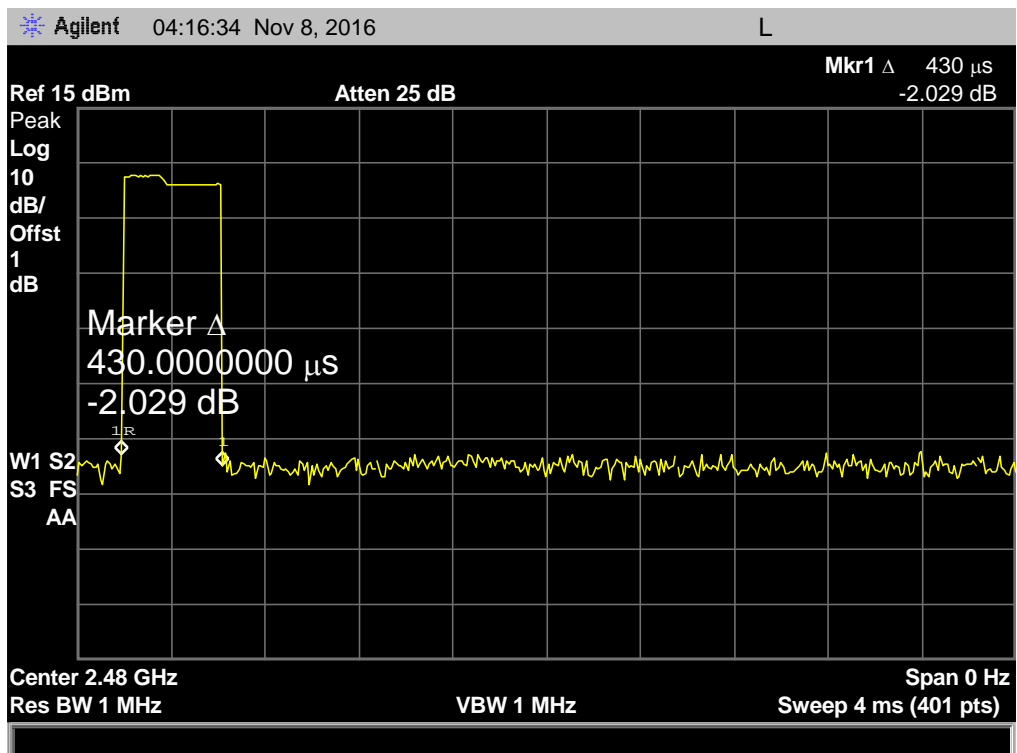


2402 MHz




$\pi/4$ -DQPSK Hopping Mode DH3

2441 MHz

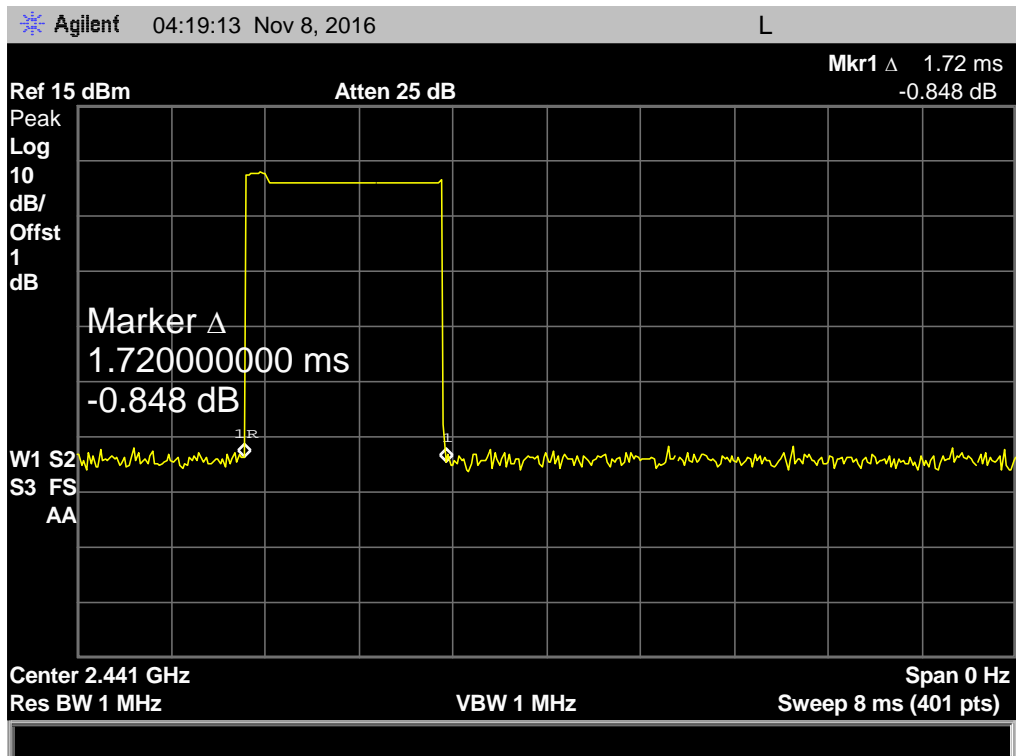

$\pi/4$ -DQPSK Hopping Mode DH3

2480 MHz

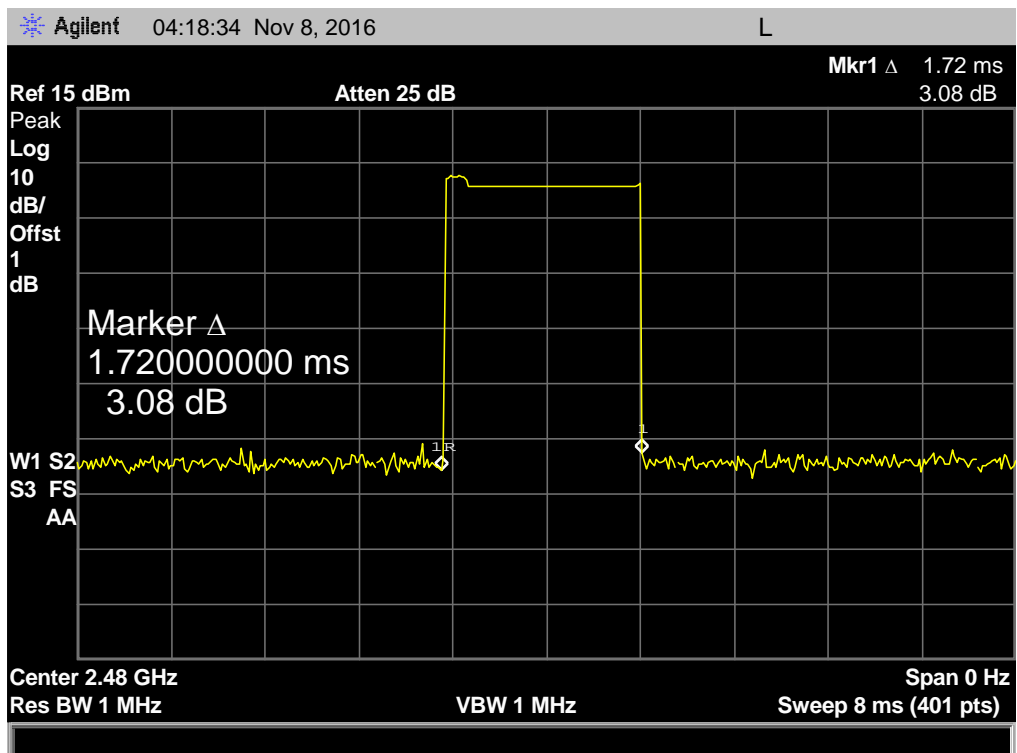


EUT:	X8+	Model Name :	X8+		
Temperature:	25℃	Relative Humidity:	55%		
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode ( $\pi$ /4-DQPSK DH5)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	3.000	320.00	31.60	400	PASS
2441	3.000	320.00			
2480	3.000	320.00			

Note: Dwell time=Pulse Time (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$  31.6


### $\pi/4$ -DQPSK Hopping Mode DH5

#### 2402 MHz

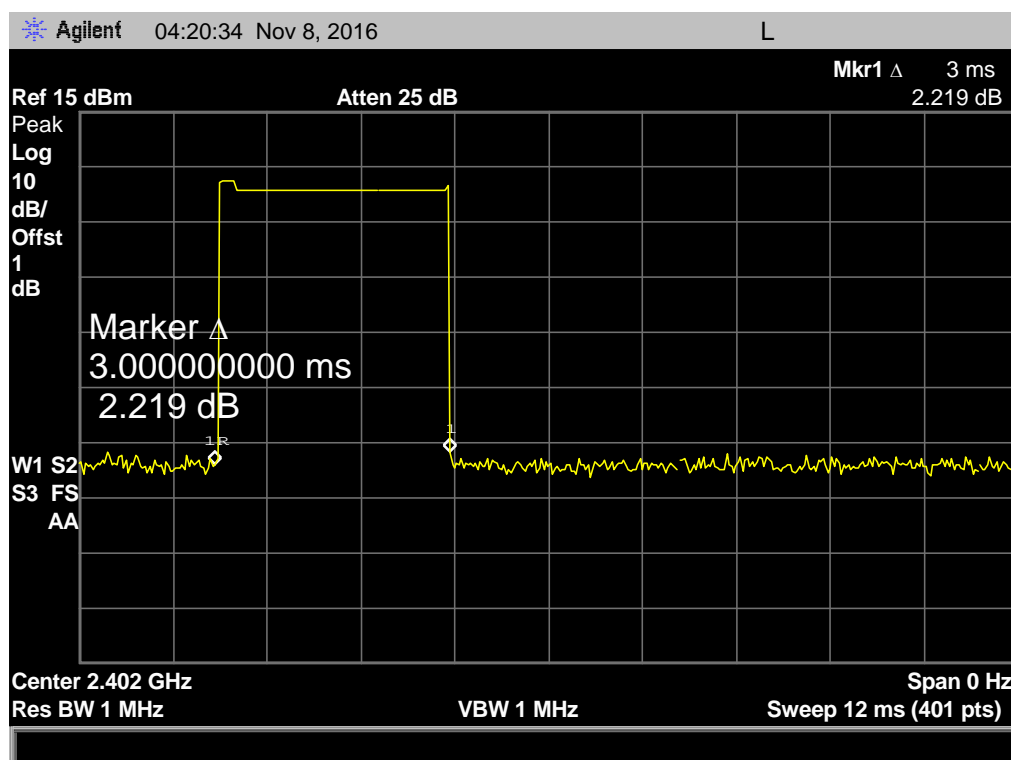




$\pi/4$ -DQPSK Hopping Mode DH5  
 2441 MHz

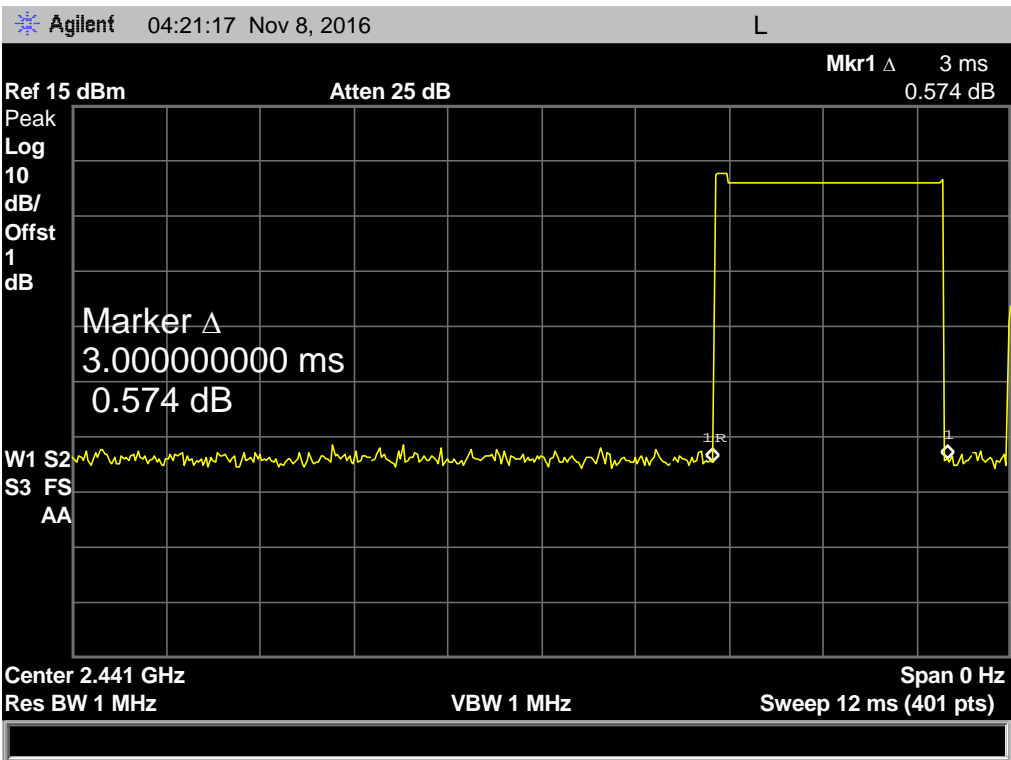

$\pi/4$ -DQPSK Hopping Mode DH5  
 2480 MHz

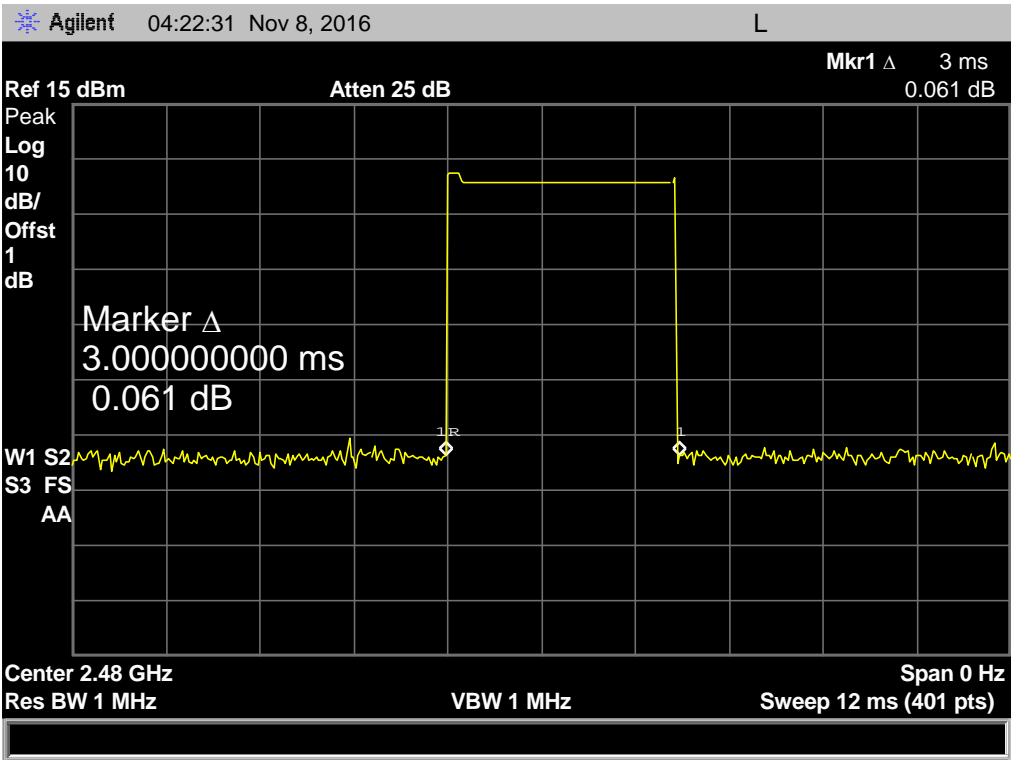

EUT:	X8+	Model Name :	X8+		
Temperature:	25℃	Relative Humidity:	55%		
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (8-DPSK DH1)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	0.450	144.00	31.60	400	PASS
2441	0.450	144.00			
2480	0.450	144.00			
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 2 ÷ 79) ×31.6					
8-DPSK Hopping Mode DH1					
2402 MHz					

Agilent

04:26:58 Nov 8, 2016

L

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 450 μs  
1.794 dB

Peak Log 10 dB/ Offst 1 dB

Marker Δ 450.000000 μs  
1.794 dB

W1 S2 S3 FS AA

Center 2.402 GHz

Res BW 1 MHz

VBW 1 MHz


Sweep 4 ms (401 pts)

Span 0 Hz




### 8-DPSK Hopping Mode DH1

2441 MHz

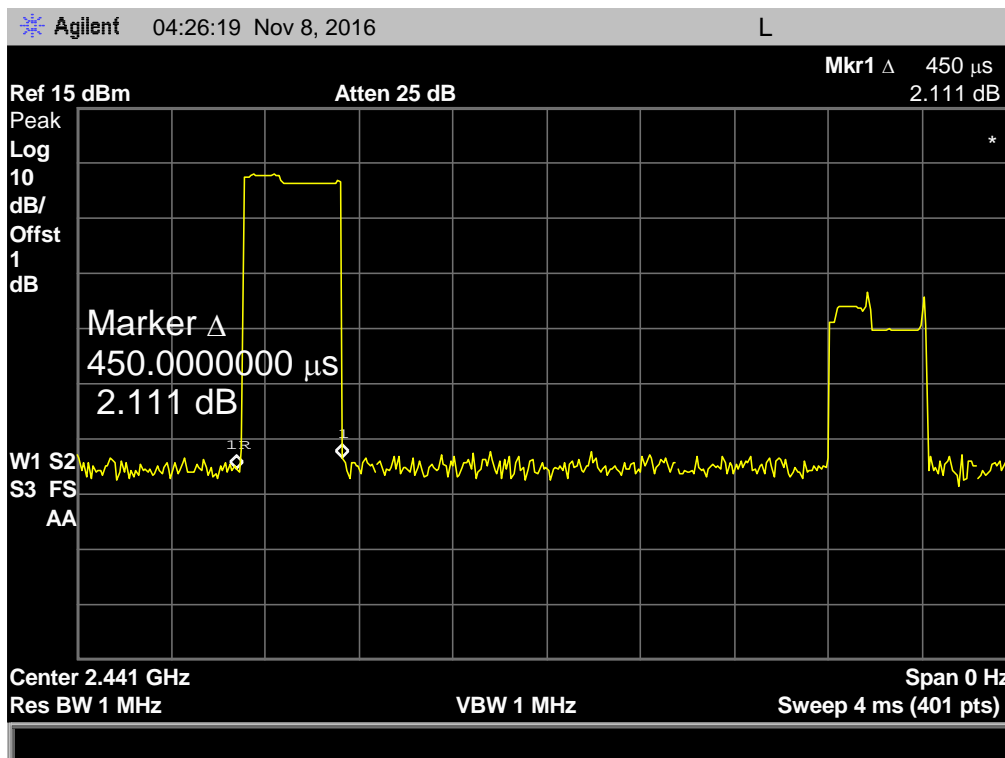

### 8-DPSK Hopping Mode DH1

2480 MHz

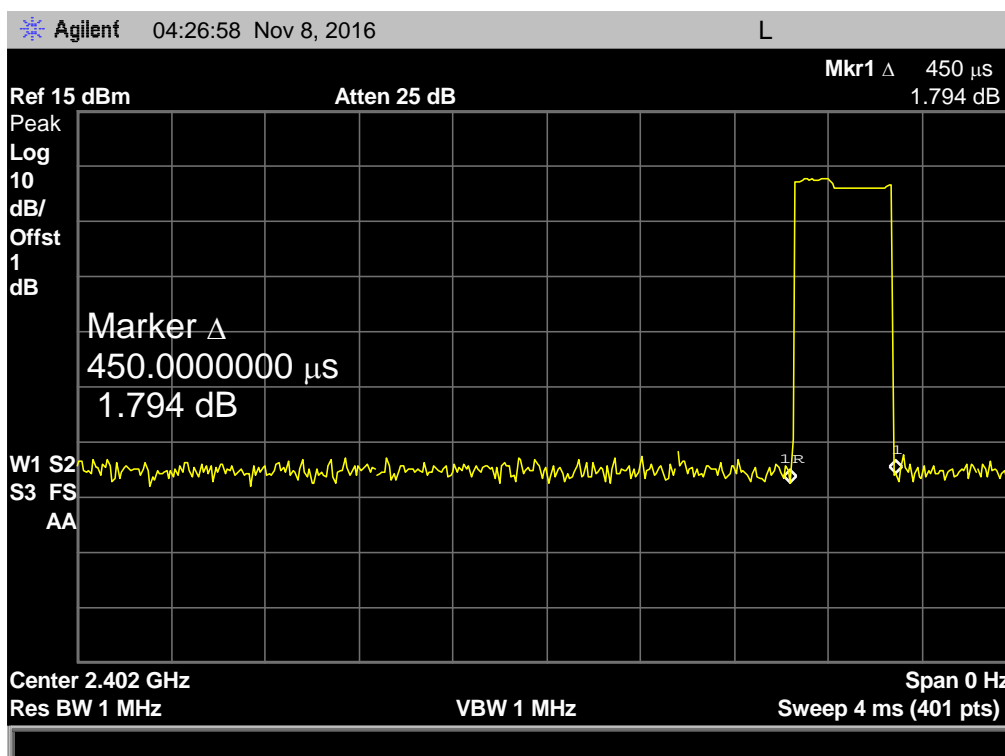


EUT:	X8+		Model Name :	X8+	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (8-DPSK DH3)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	1.700	272.00	31.60	400	PASS
2441	1.700	272.00			
2480	1.700	272.00			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 4 ÷ 79) × 31.6

### 8-DPSK Hopping Mode DH3


2402 MHz

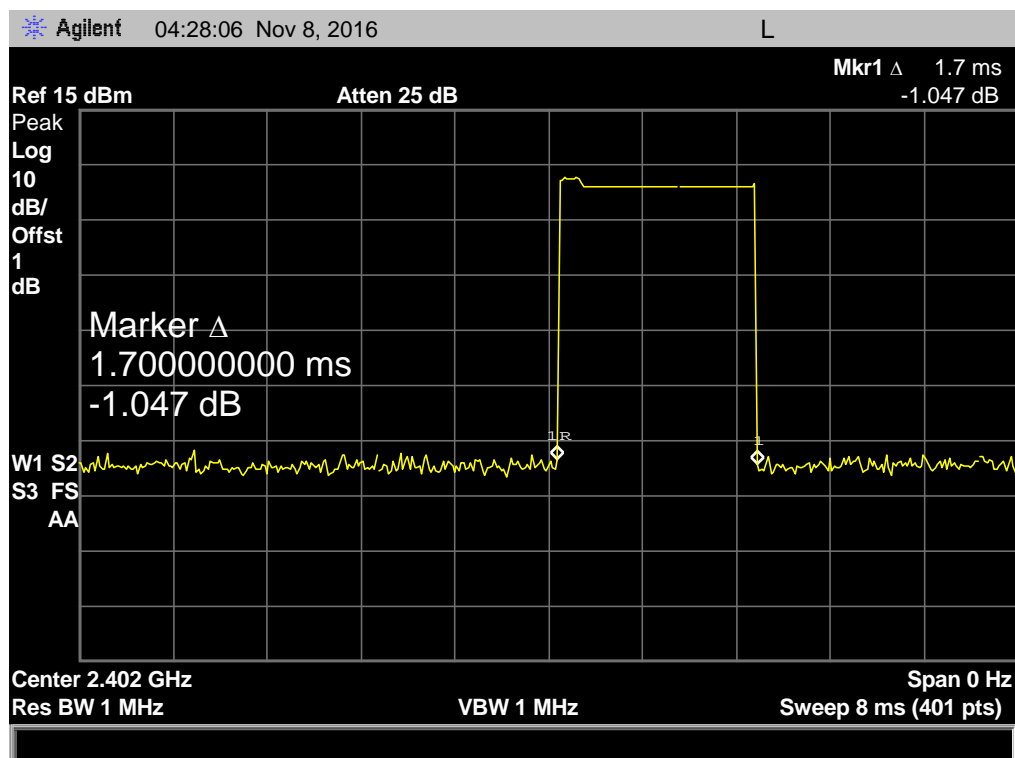




### 8-DPSK Hopping Mode DH3

2441 MHz

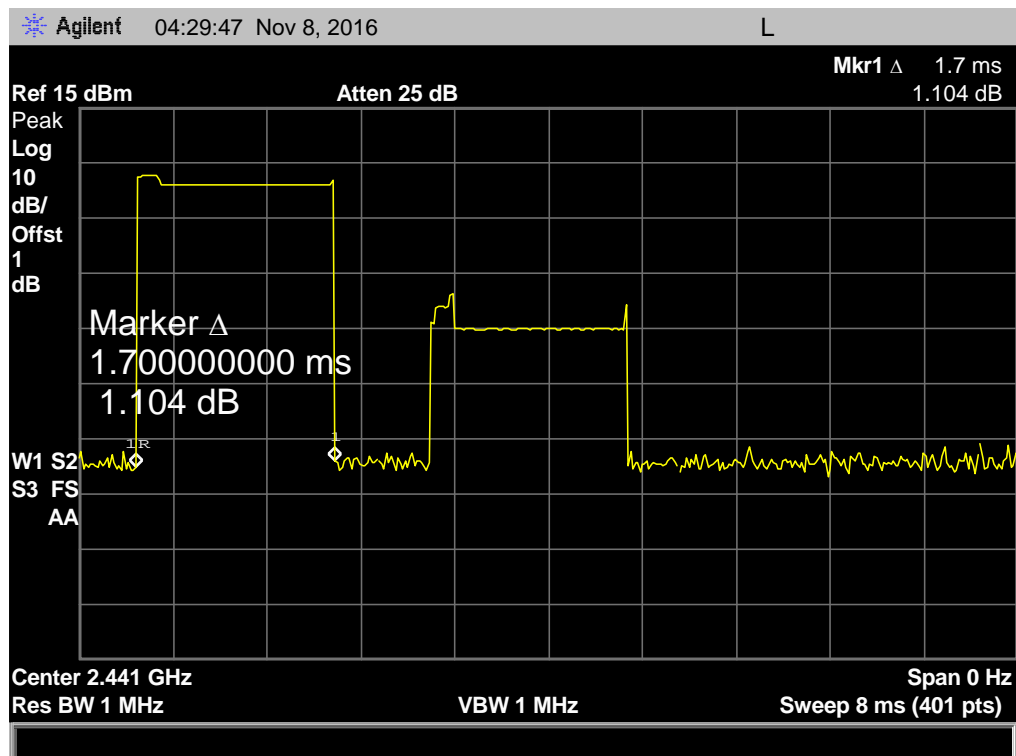

### 8-DPSK Hopping Mode DH3

2480 MHz

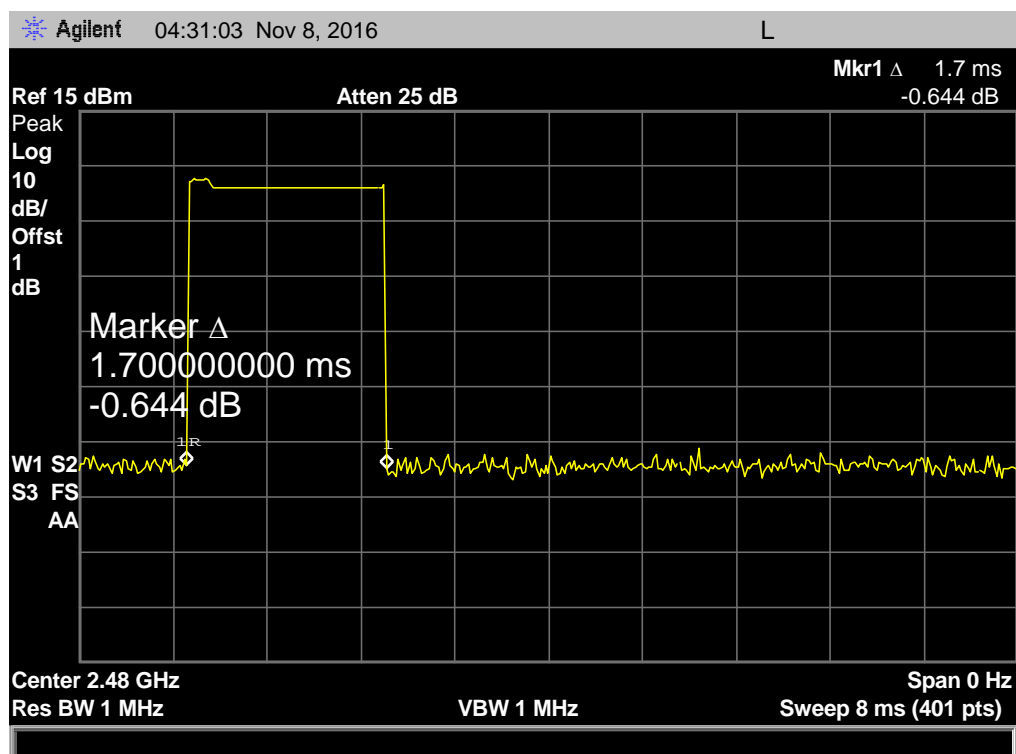


EUT:		X8+		Model Name :		X8+	
Temperature:		25℃		Relative Humidity:		55%	
Test Voltage:		DC 3.7V					
Test Mode:		Hopping Mode (8-DPSK DH5)					
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)		Period Time (s)	Limit (ms)	Result	
2402	3.000	320.00		31.60	400	PASS	
2441	3.000	320.00					
2480	3.000	320.00					

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) × 31.6

### 8-DPSK Hopping Mode DH5


2402 MHz

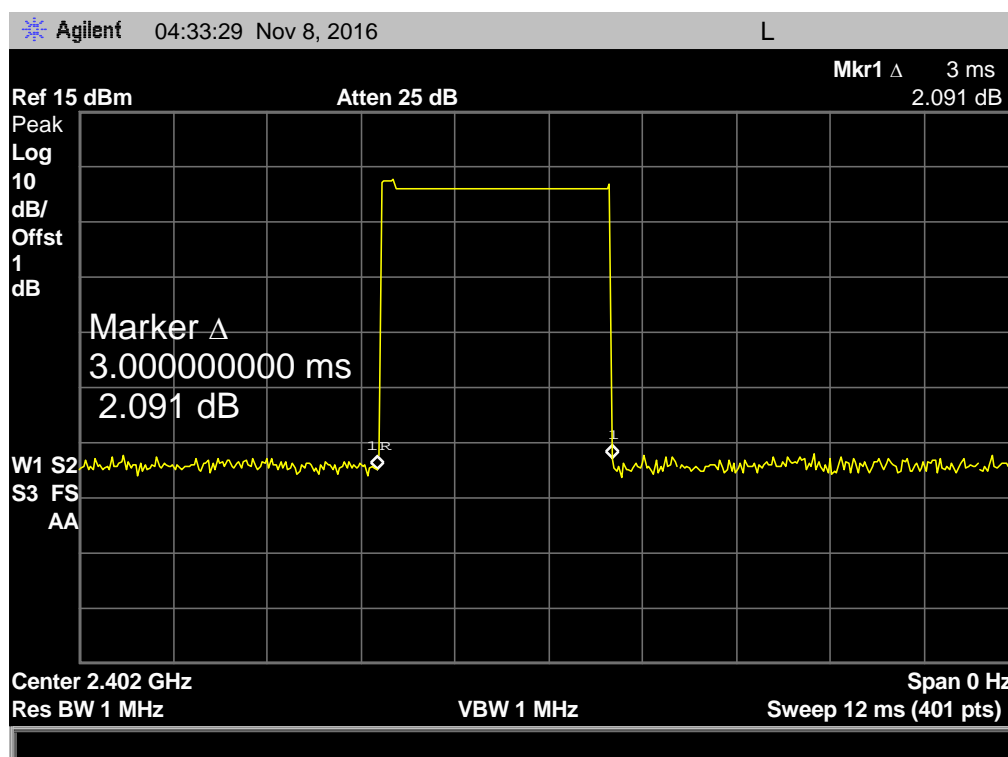




**8-DPSK Hopping Mode DH5**

**2441 MHz**

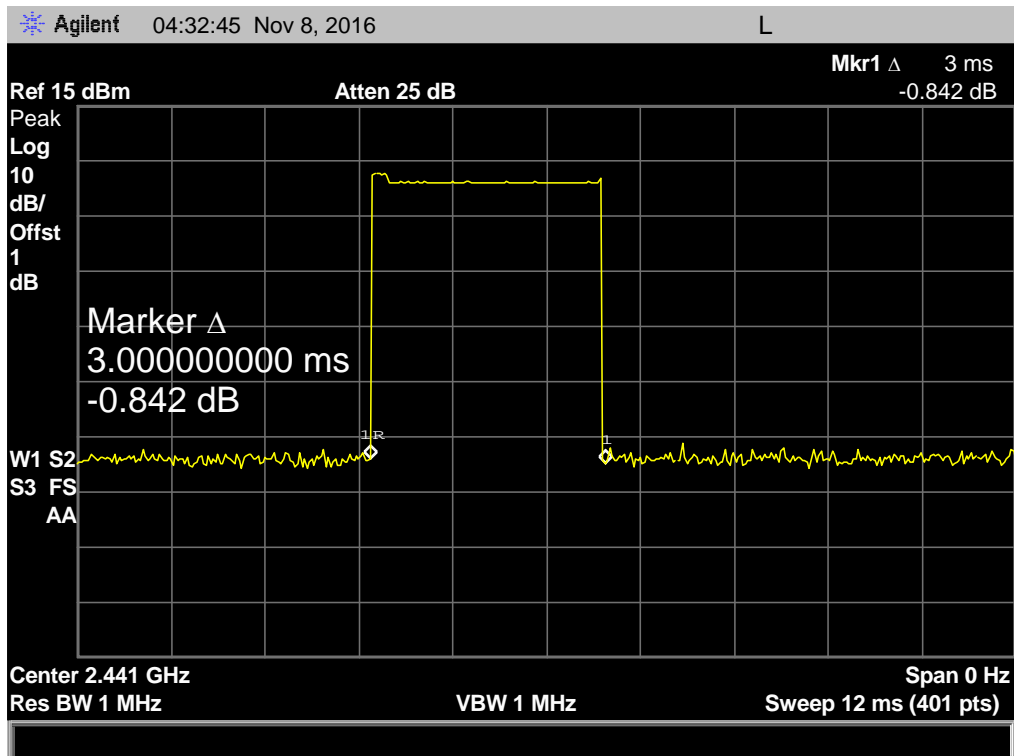

**8-DPSK Hopping Mode DH5**

**2480 MHz**

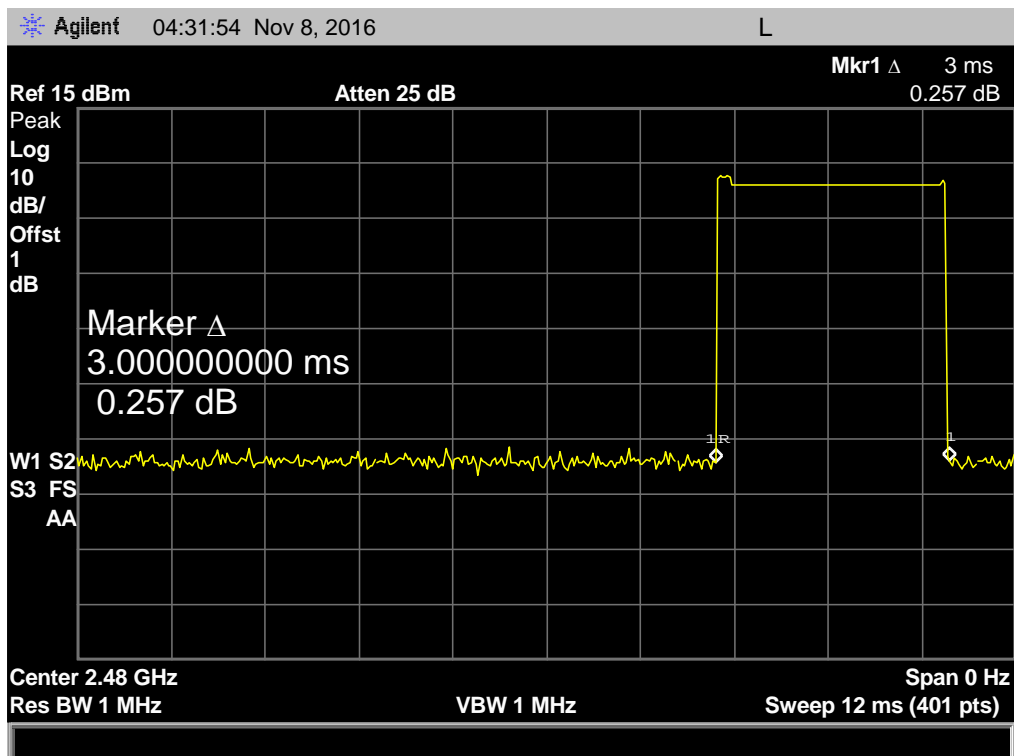

## 9. Channel Separation and Bandwidth Test


### 9.1 Test Standard and Limit

9.1.1 Test Standard  
FCC Part 15.247

9.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	$\leq 1$ MHz (20dB bandwidth)	2400~2483.5
Channel Separation	$> 25$ KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

### 9.2 Test Setup



### 9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Channel Separation: RBW=30 kHz, VBW=100 kHz.  
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

### 9.4 EUT Operating Condition


The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.




## 9.5 Test Data

<b>EUT:</b>	X8+	<b>Model Name :</b>	X8+
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Test Mode:</b>	TX Mode (GFSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2402	859.3832	890.781	
2441	857.9046	882.916	
2480	859.9927	879.888	


  

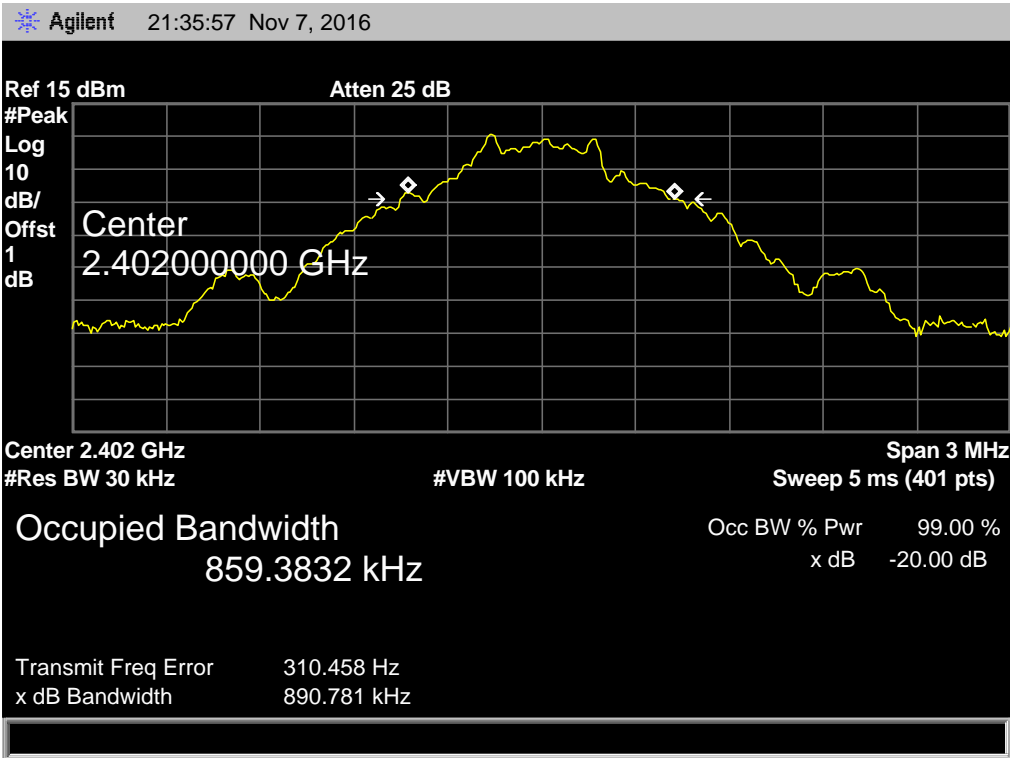GFSK TX Mode			
2402 MHz			
 <p>Agilent 21:35:57 Nov 7, 2016</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.402000000 GHz</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 859.3832 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error 310.458 Hz x dB Bandwidth 890.781 kHz</p>			


**GFSK TX Mode**  
**2441 MHz**

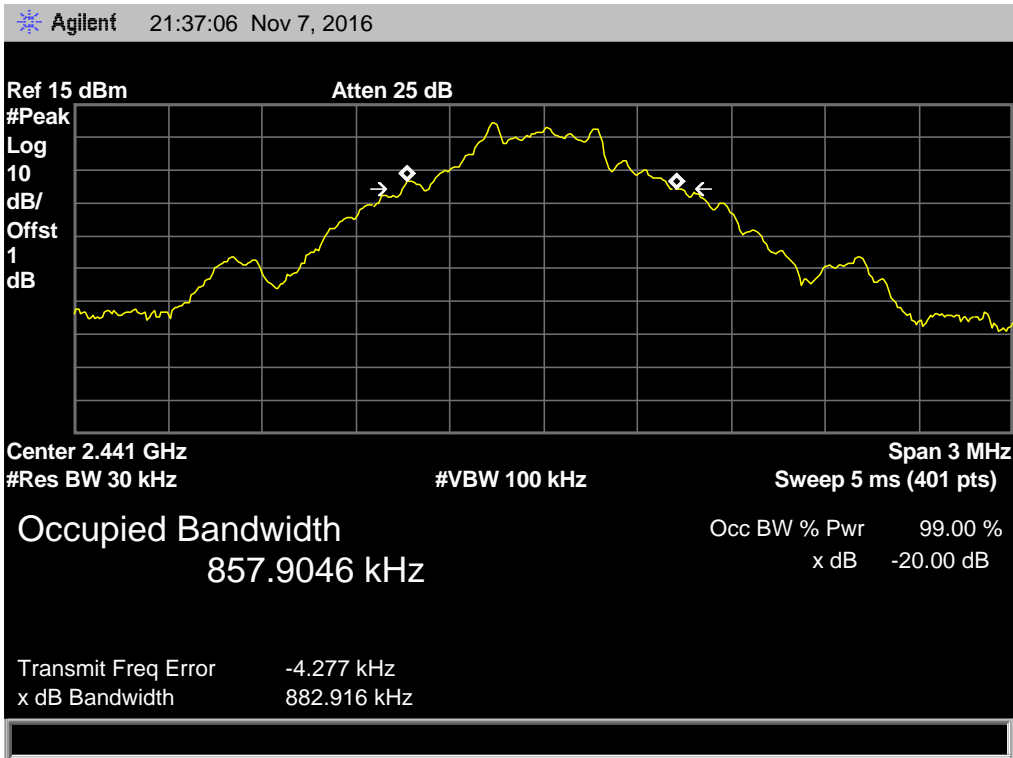


**GFSK TX Mode**  
**2480 MHz**

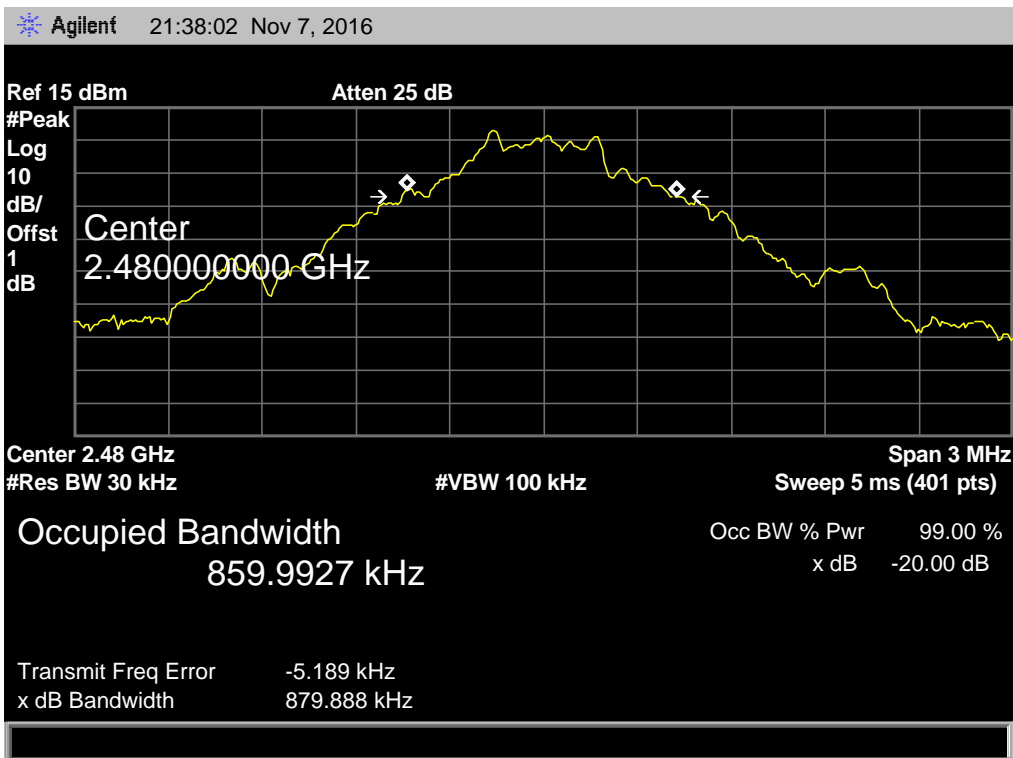




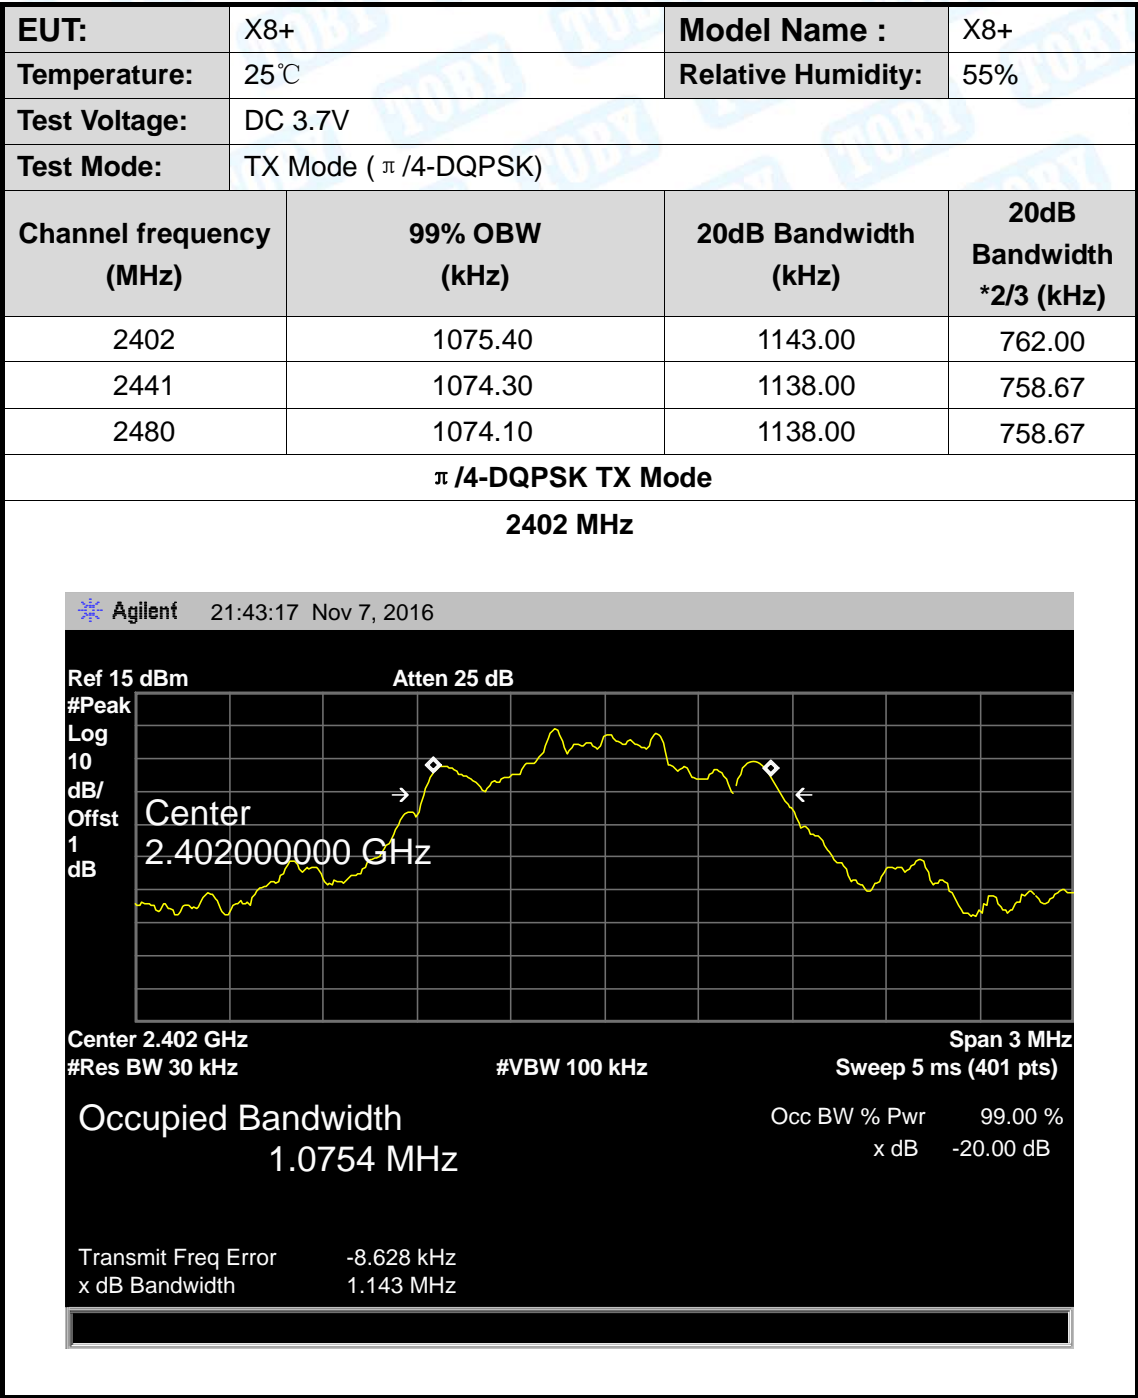


$\pi$  /4-DQPSK TX Mode  
 2441 MHz

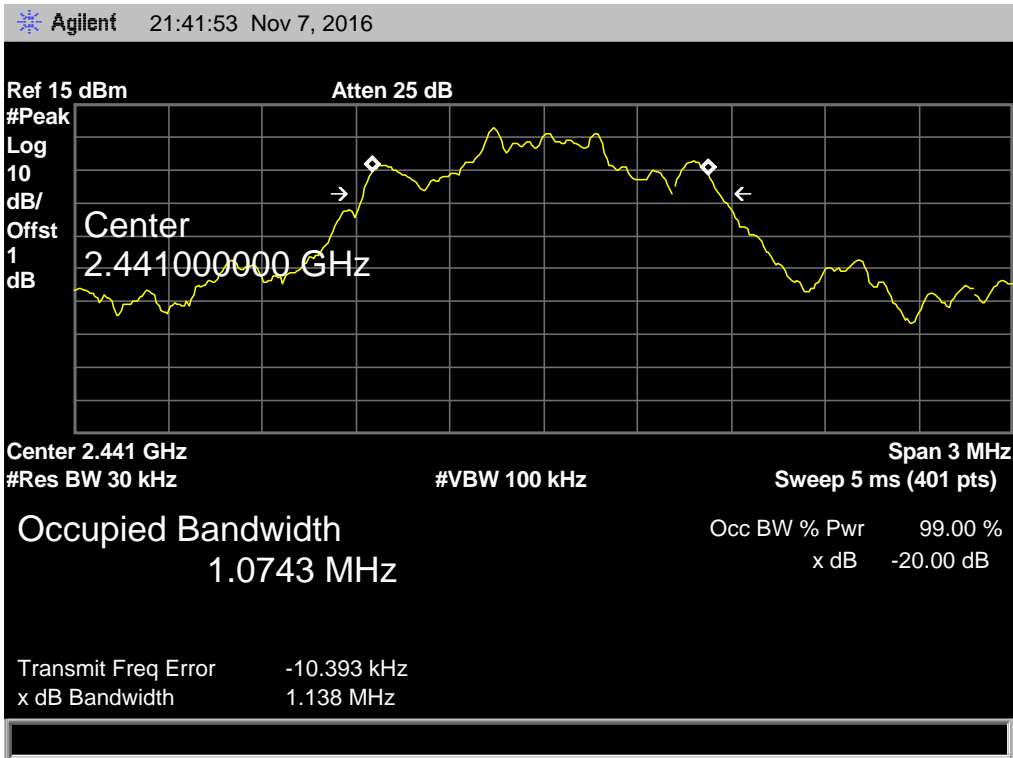


$\pi$  /4-DQPSK TX Mode  
 2480 MHz

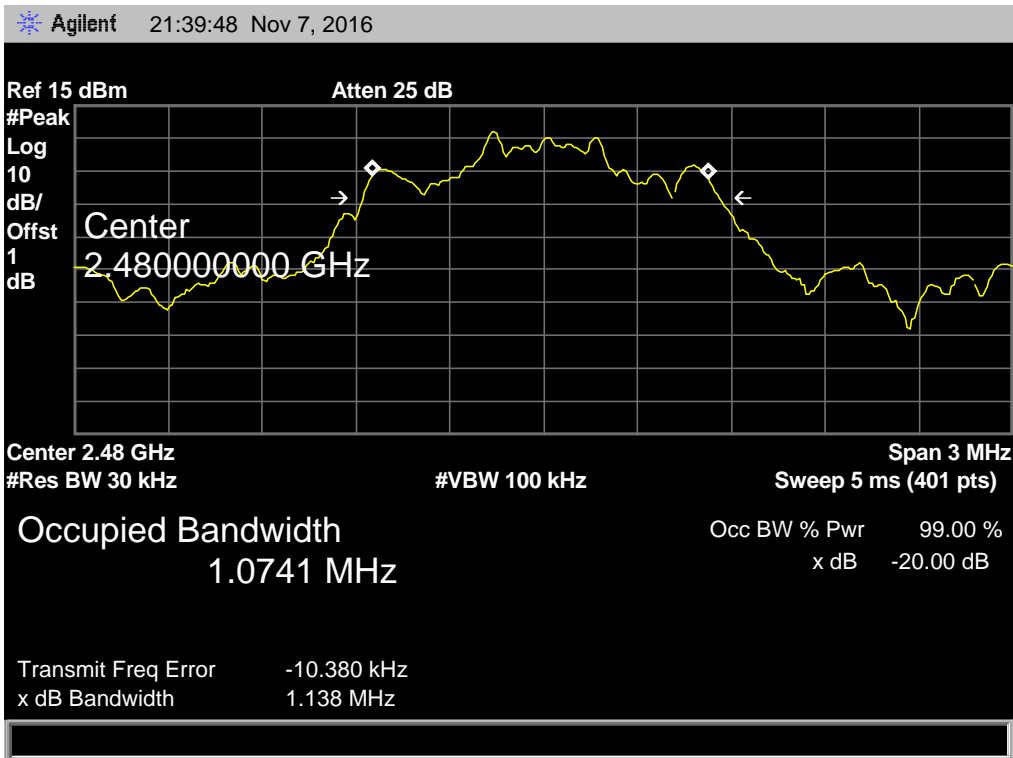

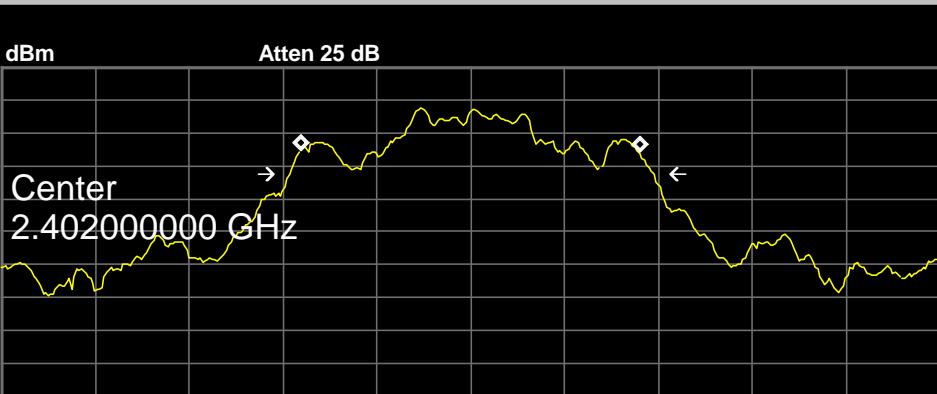


EUT:	X8+	Model Name :	X8+
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	TX Mode (8-DPSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2402	1078.80	1164.00	776.00
2441	1078.20	1162.00	774.67
2480	1081.70	1163.00	775.33
8-DPSK TX Mode			
2402 MHz			
<div> <div> <div>Agilent</div> <div>21:44:23 Nov 7, 2016</div> </div> <div> <div> <div>Ref 15 dBm</div> <div>Atten 25 dB</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> <div>Center</div> <div>2.402000000 GHz</div> </div> </div>  <div> <div>Center 2.402 GHz</div> <div>#Res BW 30 kHz</div> <div>#VBW 100 kHz</div> <div>Span 3 MHz</div> <div>Sweep 5 ms (401 pts)</div> </div> <div> <div>Occupied Bandwidth</div> <div>1.0788 MHz</div> <div>Occ BW % Pwr</div> <div>99.00 %</div> <div>x dB</div> <div>-20.00 dB</div> </div> <div> <div>Transmit Freq Error</div> <div>-2.152 kHz</div> <div>x dB Bandwidth</div> <div>1.164 MHz</div> </div> </div>			

8-DPSK TX Mode  
 2441 MHz

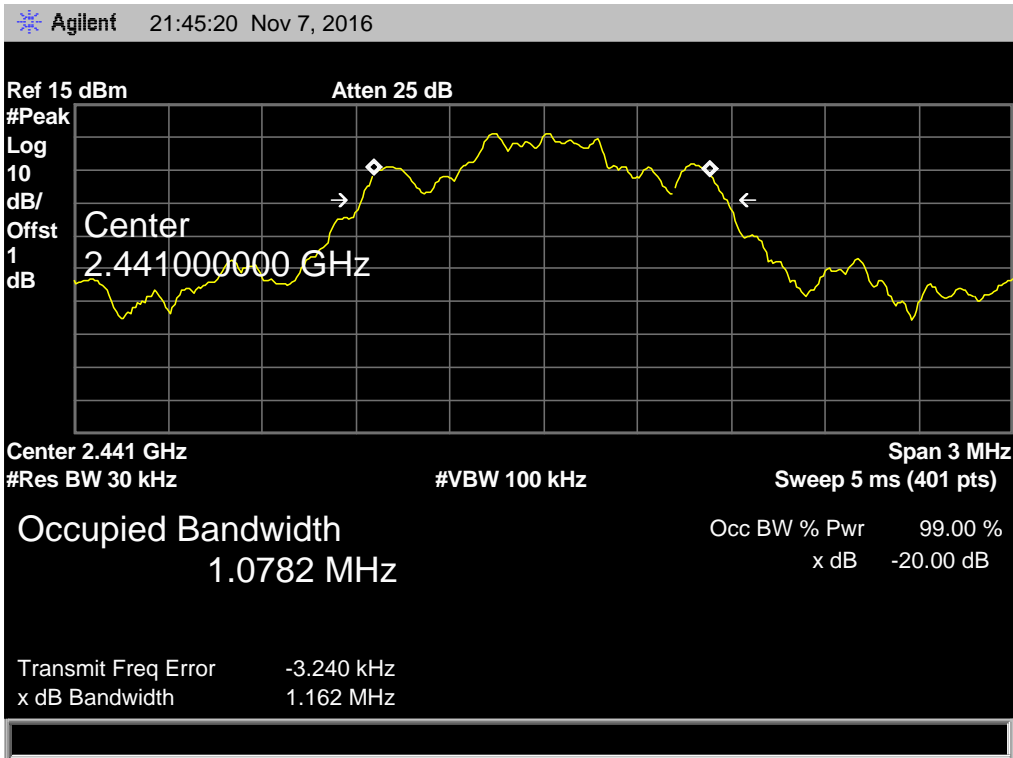

8-DPSK TX Mode  
 2480 MHz

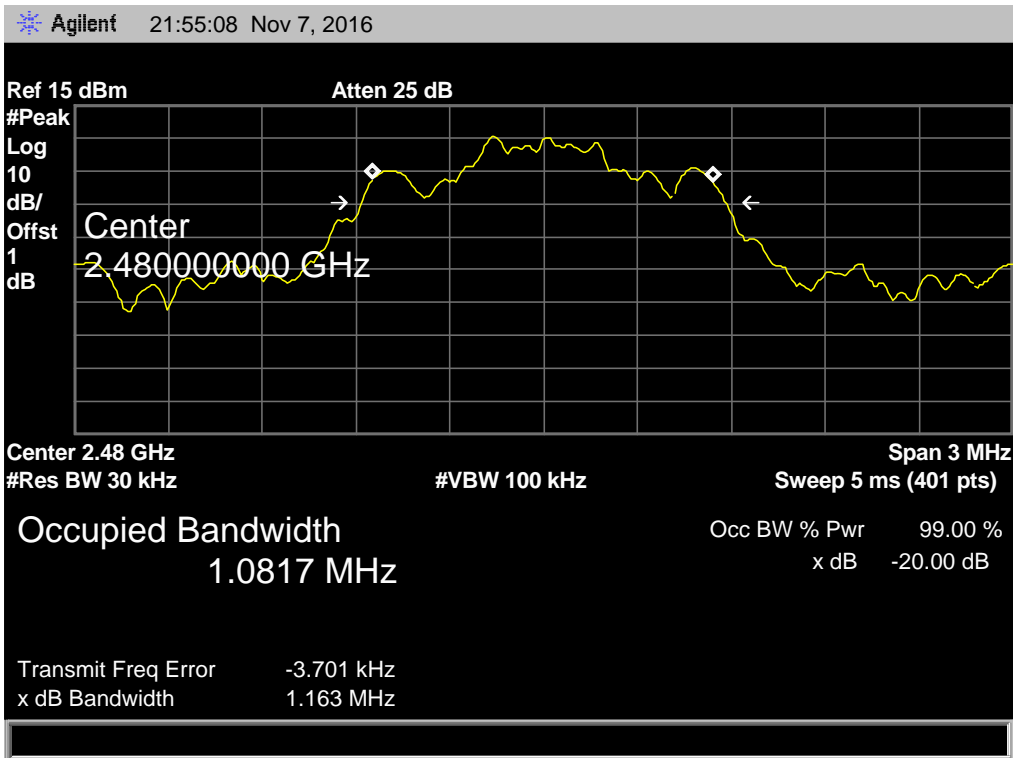







### GFSK Hopping Mode

2441 MHz

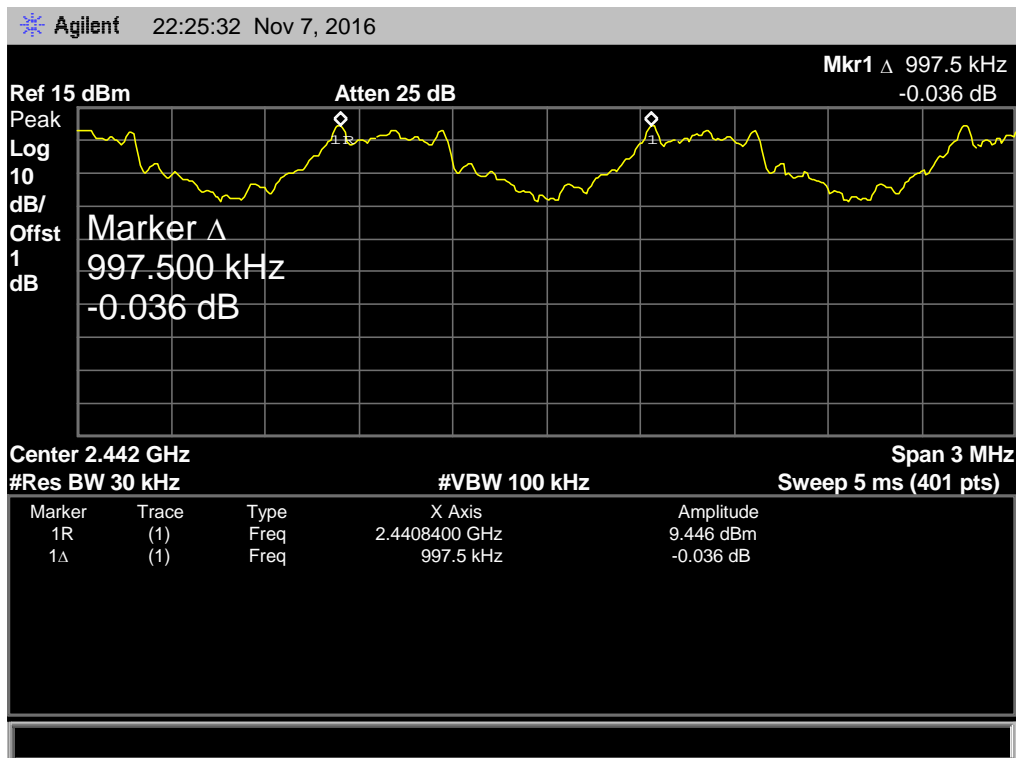


### GFSK Hopping Mode

2480 MHz

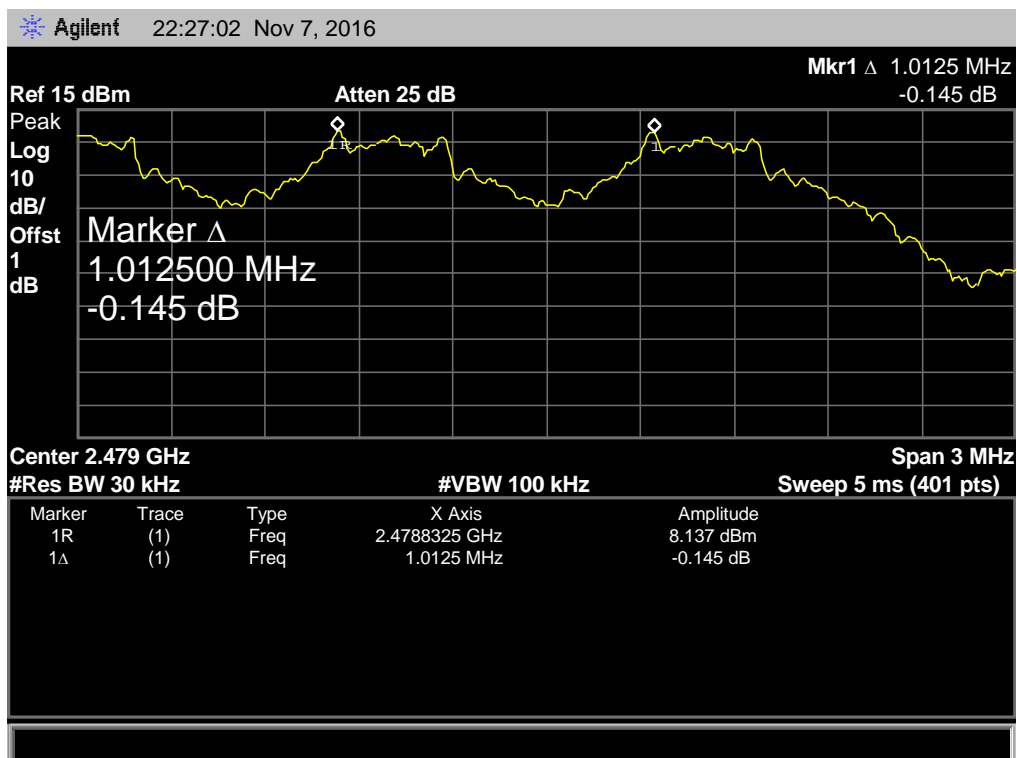




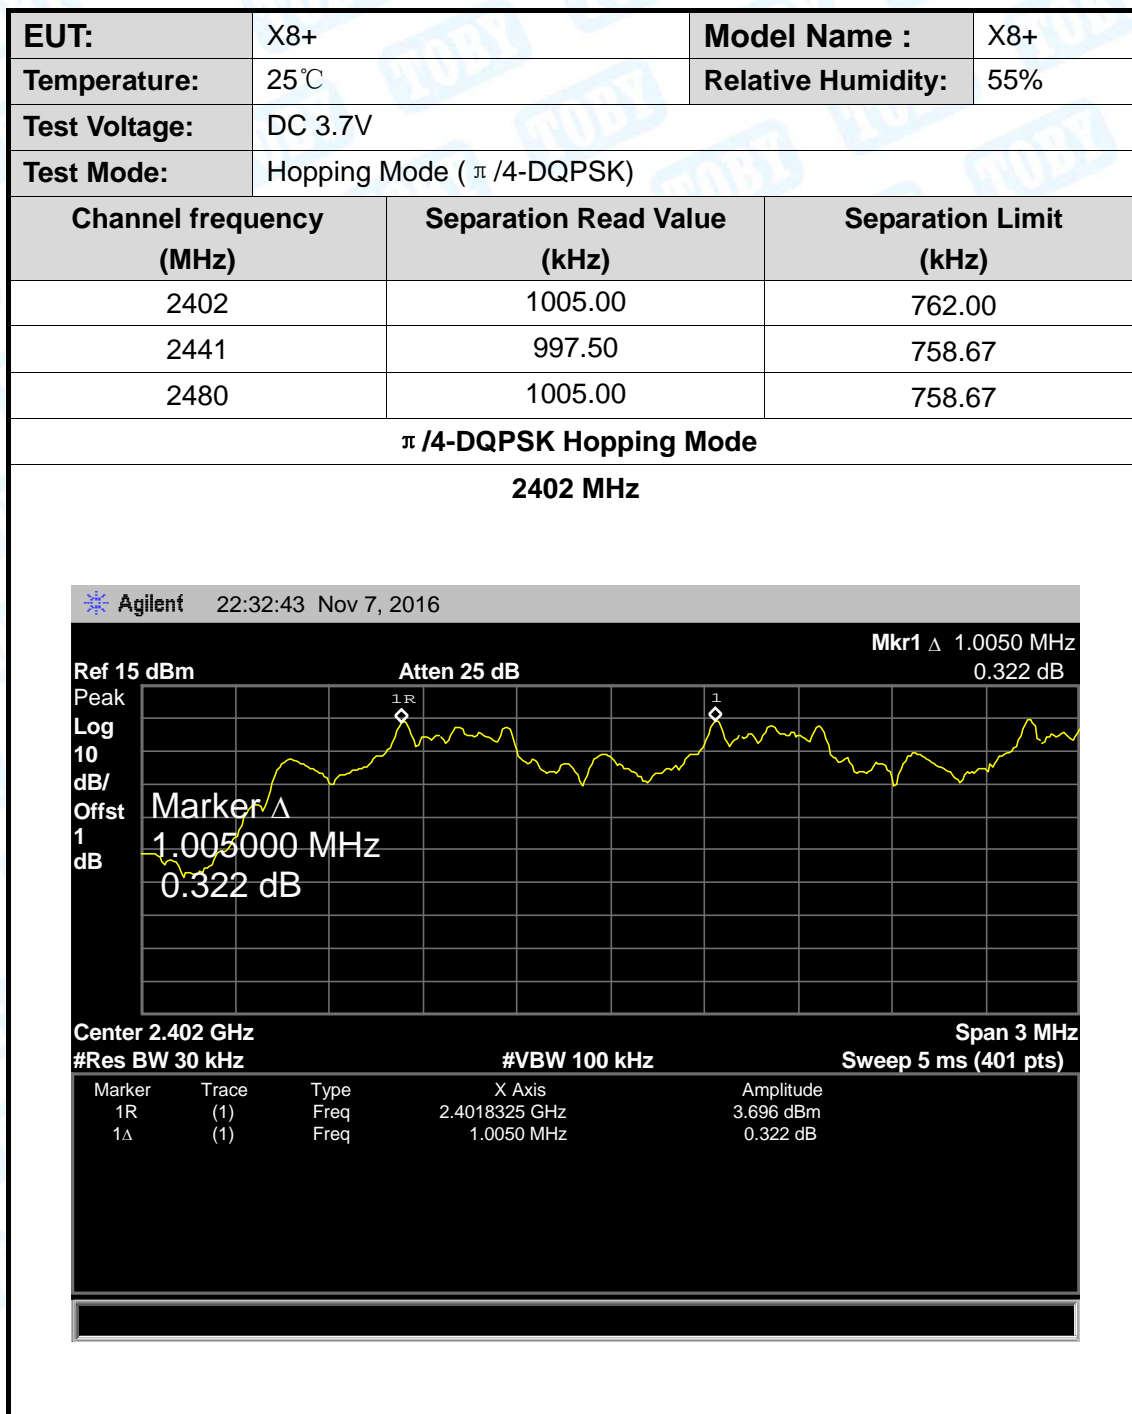


$\pi/4$ -DQPSK Hopping Mode

2441 MHz

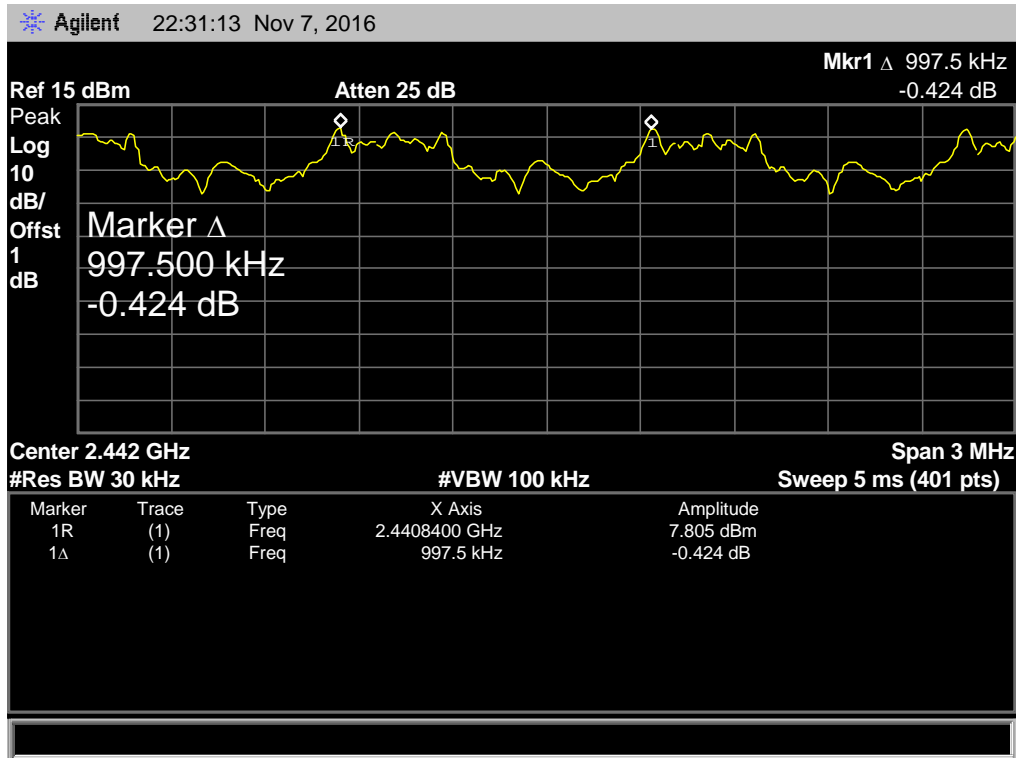


$\pi/4$ -DQPSK Hopping Mode

2480 MHz

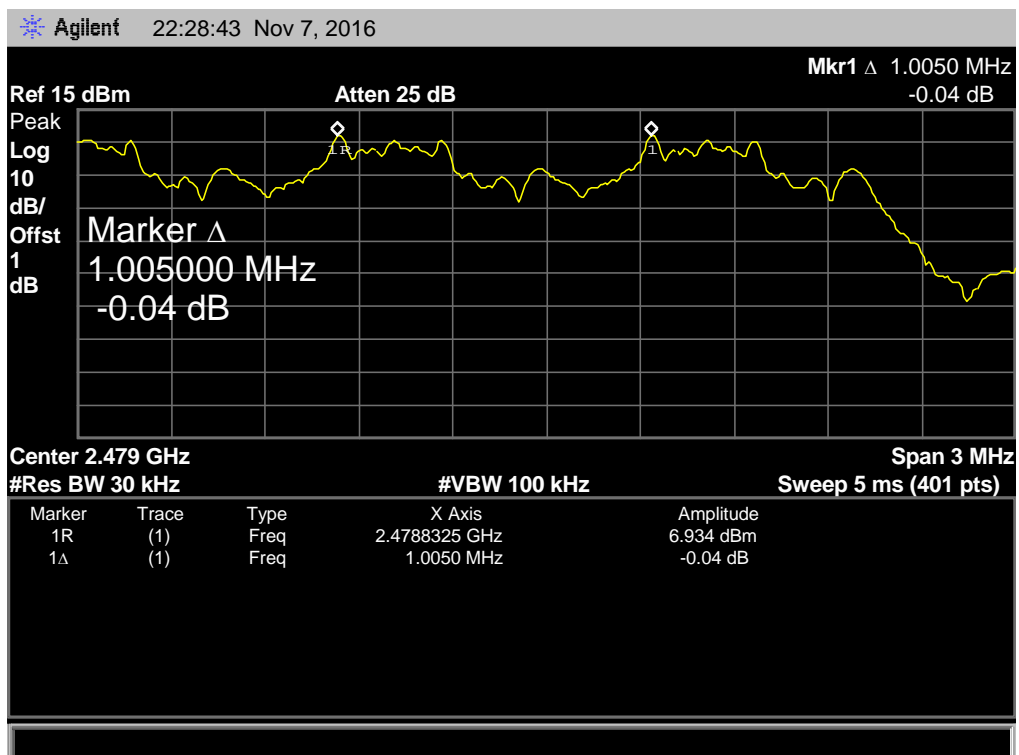




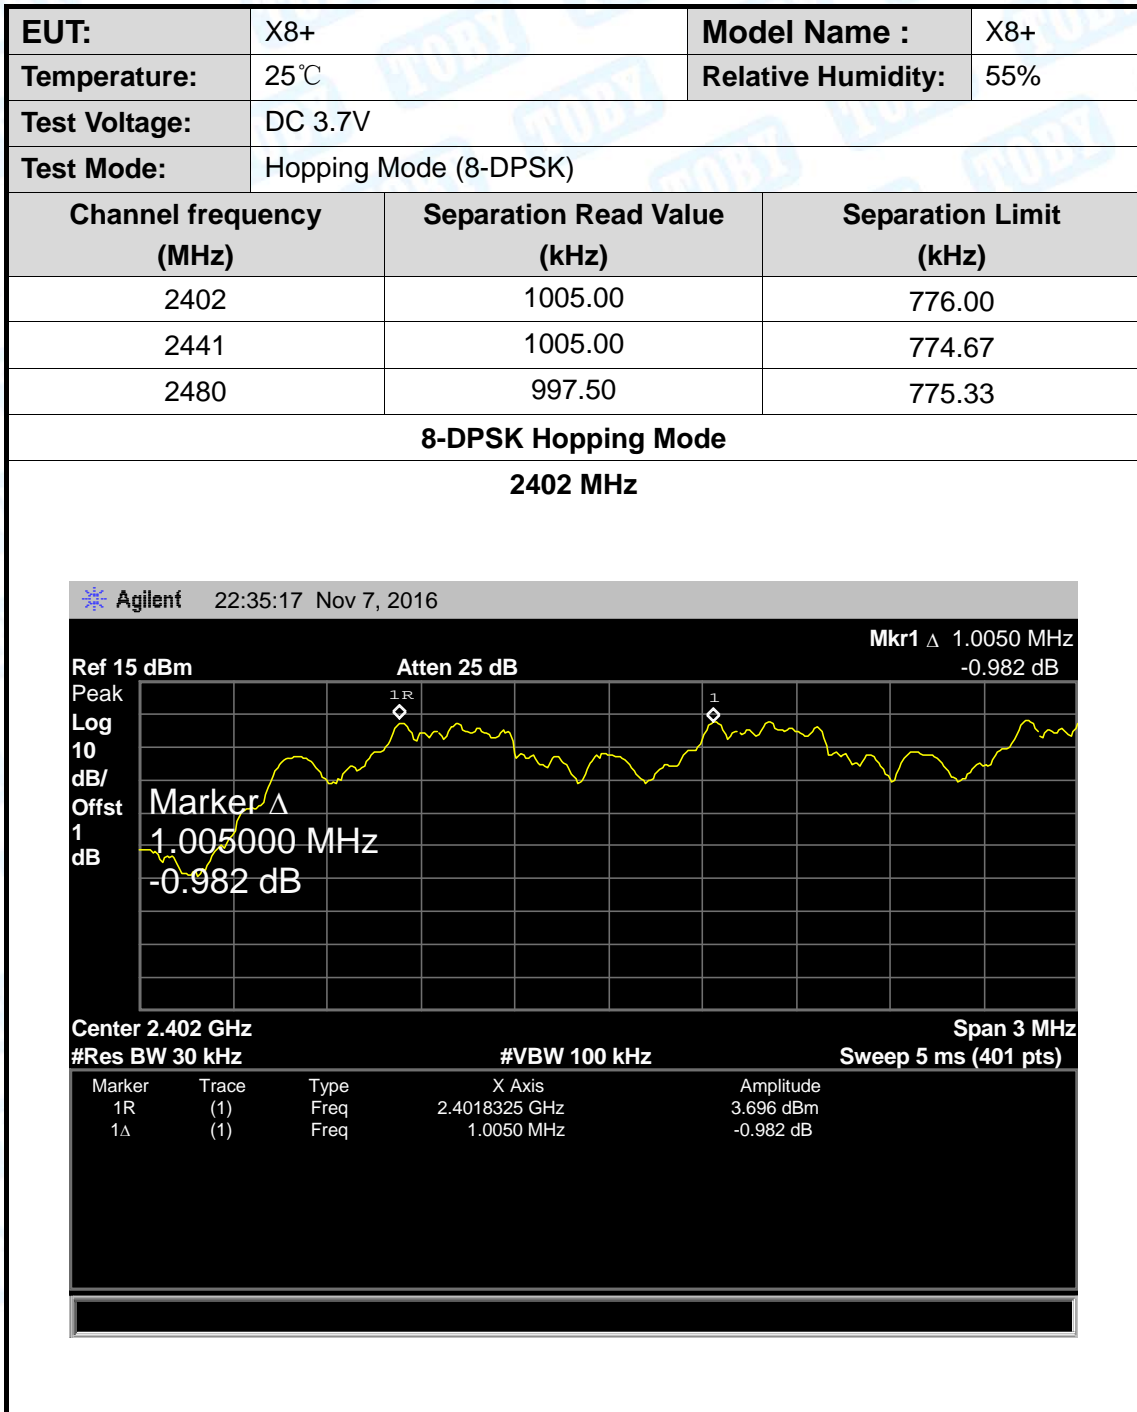


### 8-DPSK Hopping Mode

2441 MHz

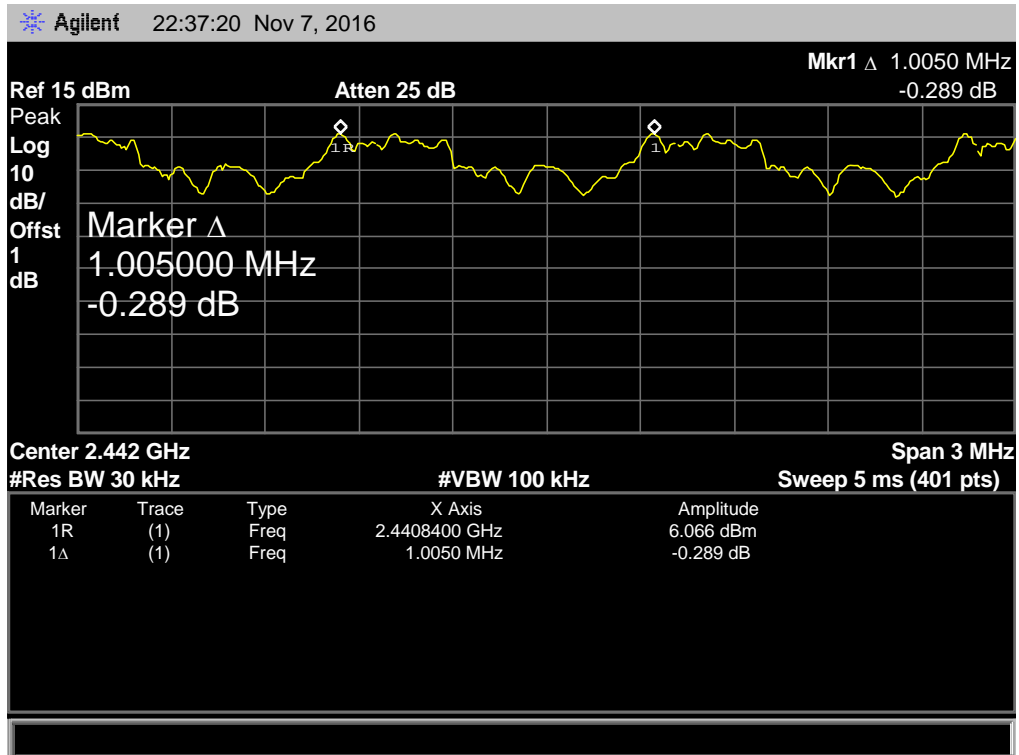

### 8-DPSK Hopping Mode

2480 MHz

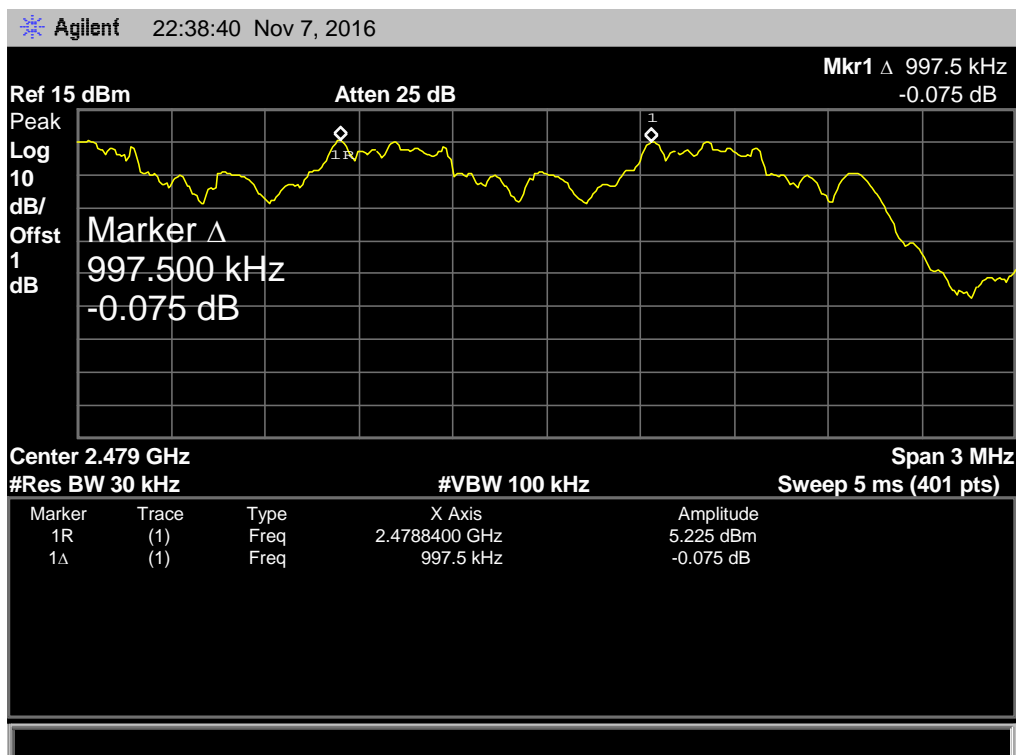



## 10. Peak Output Power Test

### 10.1 Test Standard and Limit


#### 10.1.1 Test Standard

FCC Part 15.247 (b) (1)

#### 10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

### 10.2 Test Setup



### 10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

### 10.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

## 10.5 Test Data

EUT:	X8+	Model Name :	X8+
Temperature:	25℃	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	7.793	30	
2441	6.827		
2480	4.854		

GFSK TX Mode

2402 MHz

Agilent22:03:35 Nov 7, 2016

Ref 15 dBm

Atten 25 dB

Mkr1 2.4021050 GHz7.793 dBm

Peak

Log

10

dB/

Marker

2.402105000 GHz

7.793 dBm

M1 S2

S3 FC

AA

Center 2.402 GHz

#Res BW 1 MHz


#VBW 3 MHz

Span 3 MHz


Sweep 5 ms (401 pts)




**GFSK TX Mode**  
**2441 MHz**


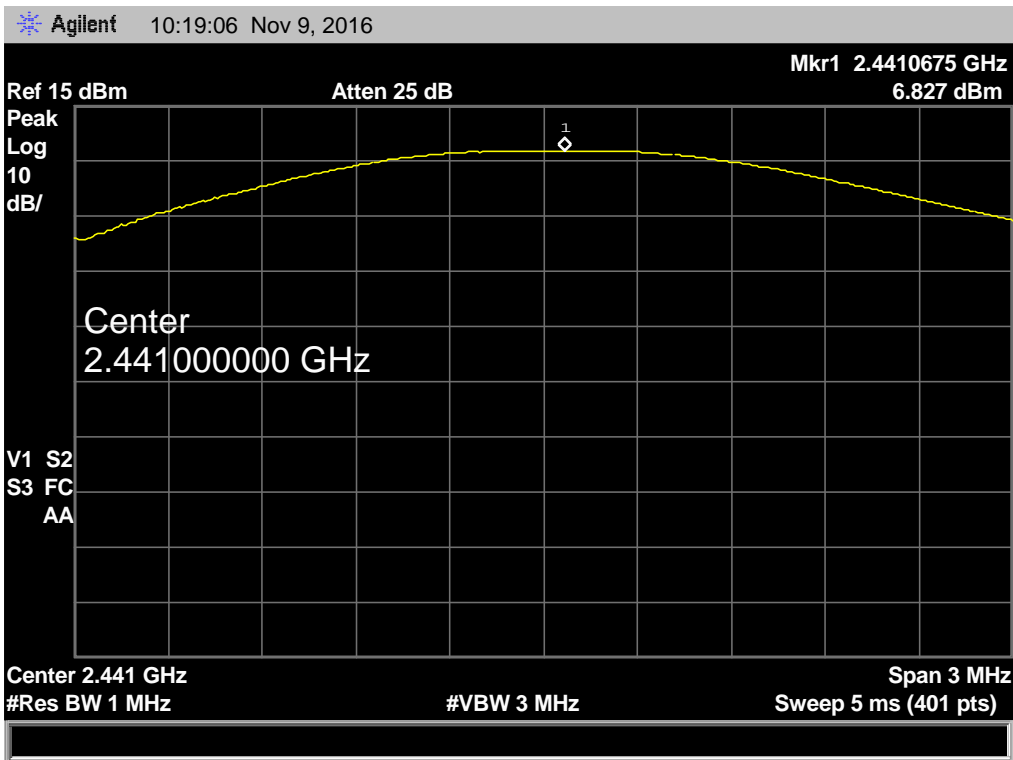


**GFSK TX Mode**  
**2480 MHz**

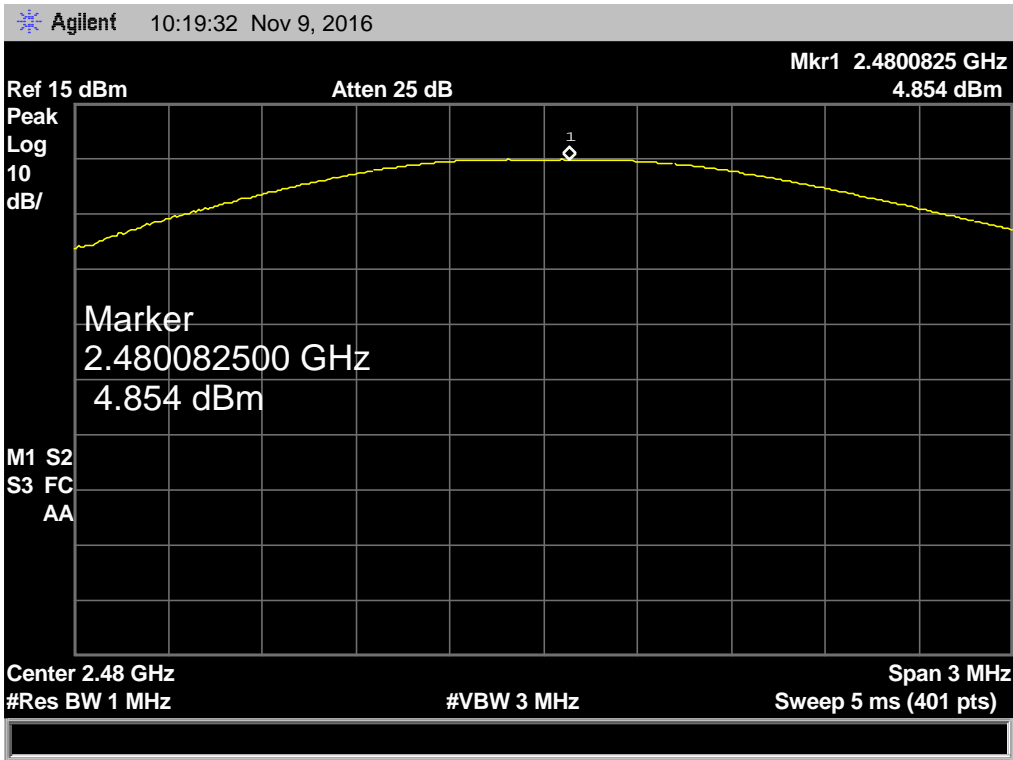

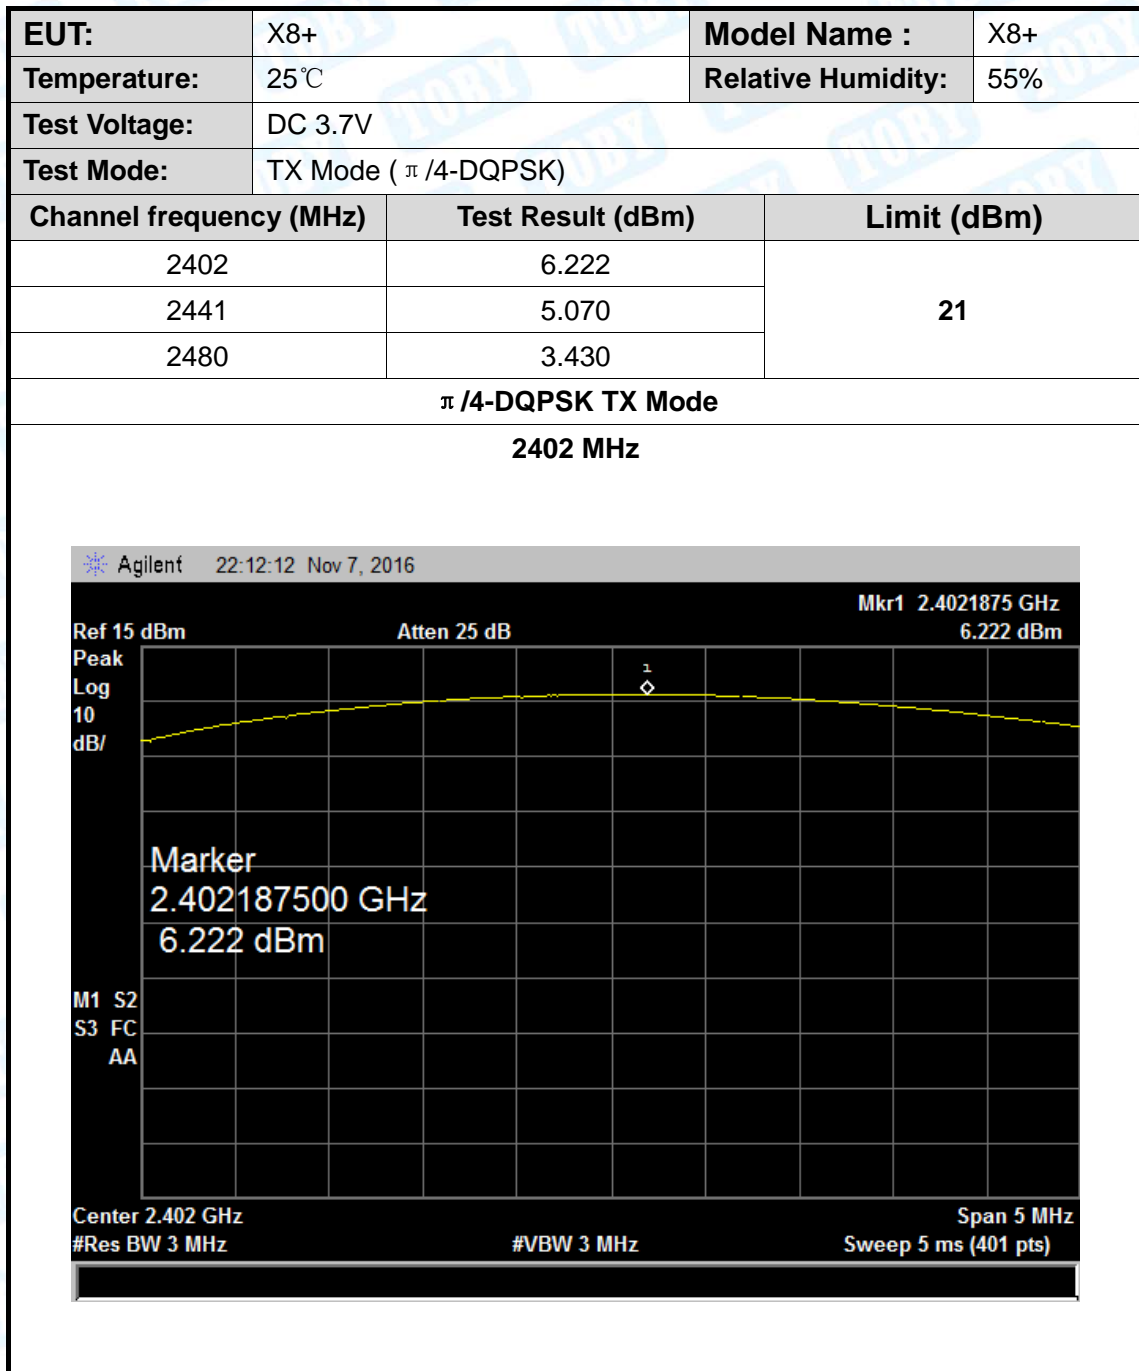



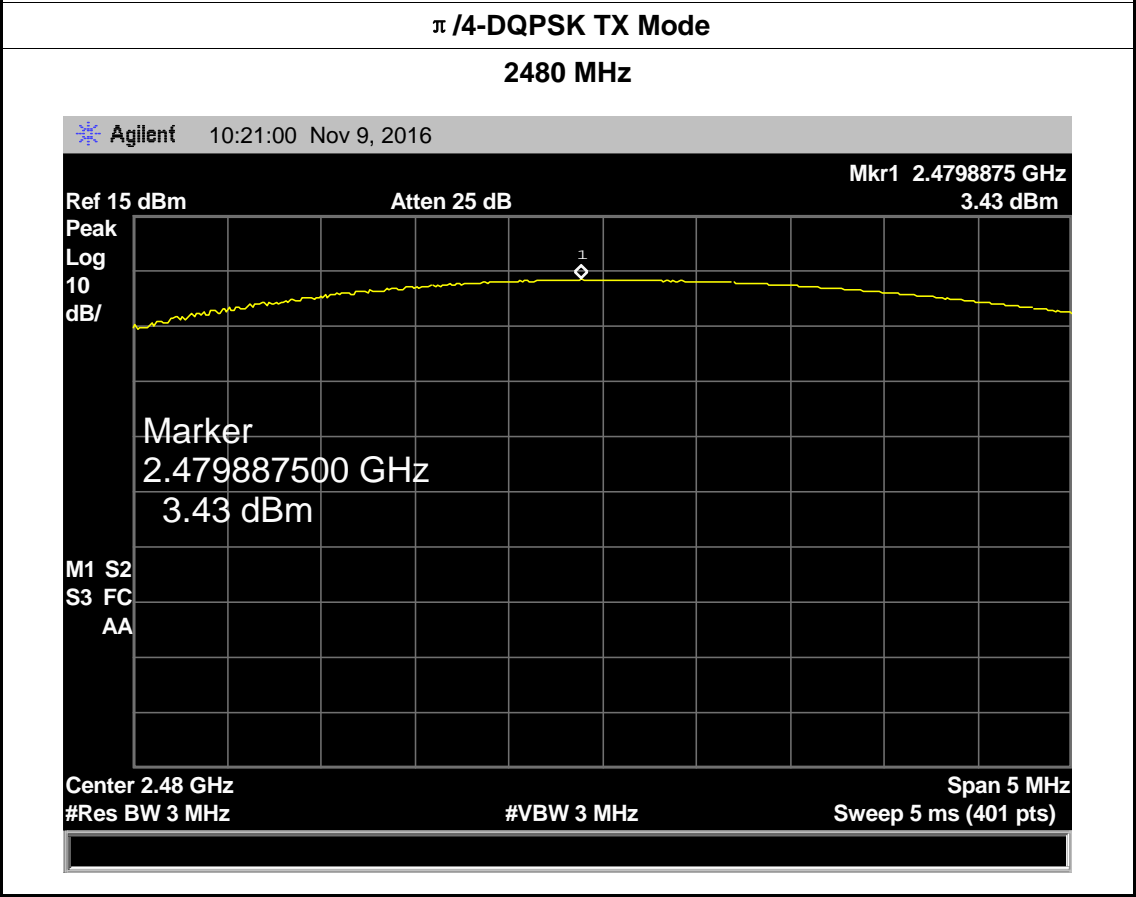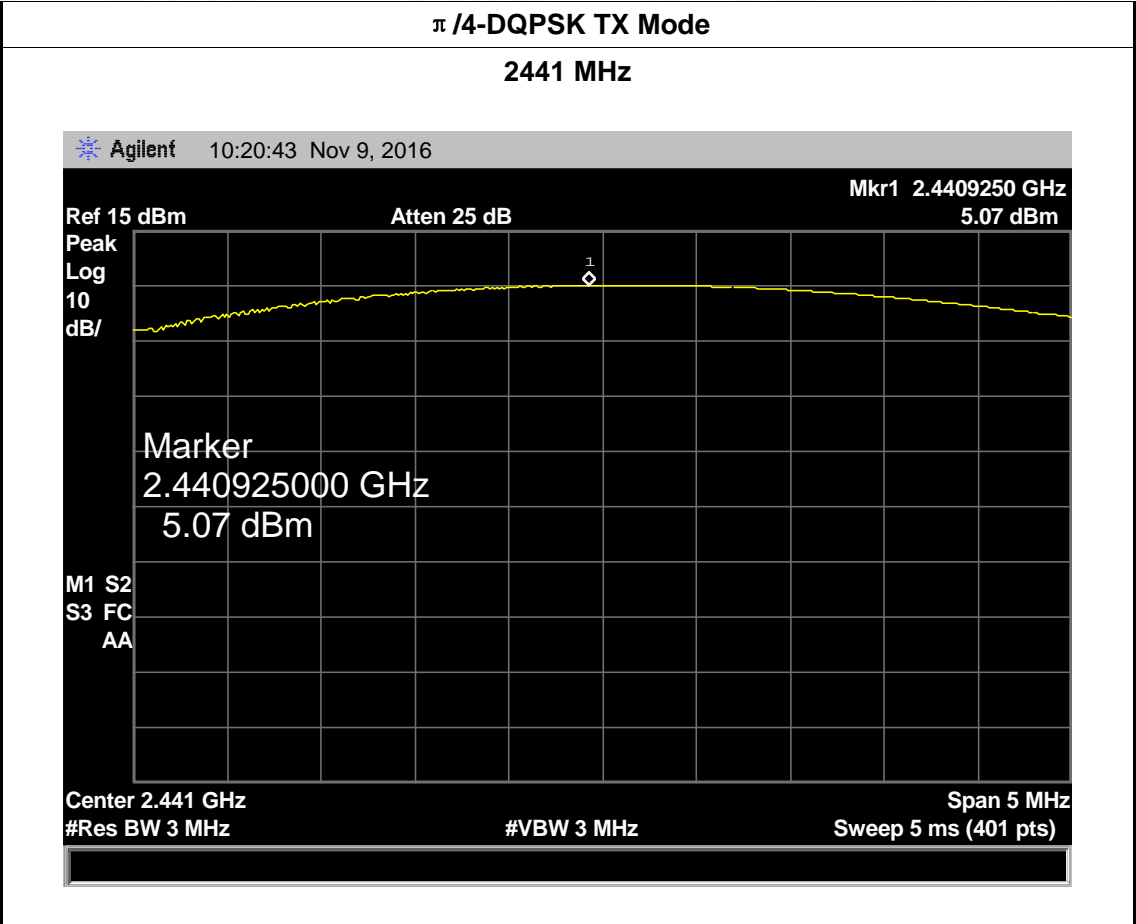

EUT:	X8+	Model Name :	X8+
Temperature:	25℃	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	TX Mode (8-DPSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	6.302	21	
2441	5.245		
2480	3.404		
8-DPSK TX Mode			
2402 MHz			

Agilent22:13:16 Nov 7, 2016

Ref 15 dBm

Atten 25 dB

Mkr1 2.4022875 GHz  
6.302 dBm

Peak

Log

10

dB/

Marker

2.402287500 GHz

6.302 dBm

M1 S2

S3 FC

AA

Center 2.402 GHz

#Res BW 3 MHz


#VBW 3 MHz

Span 5 MHz


Sweep 5 ms (401 pts)



8-DPSK TX Mode  
 2441 MHz

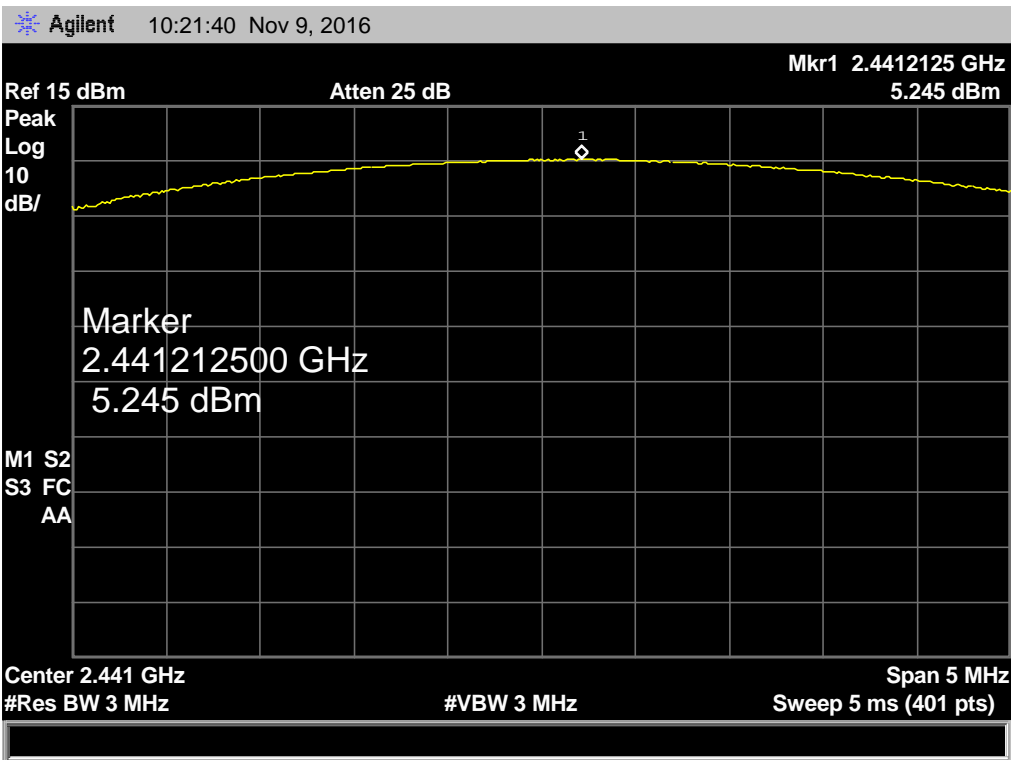

8-DPSK TX Mode  
 2480 MHz

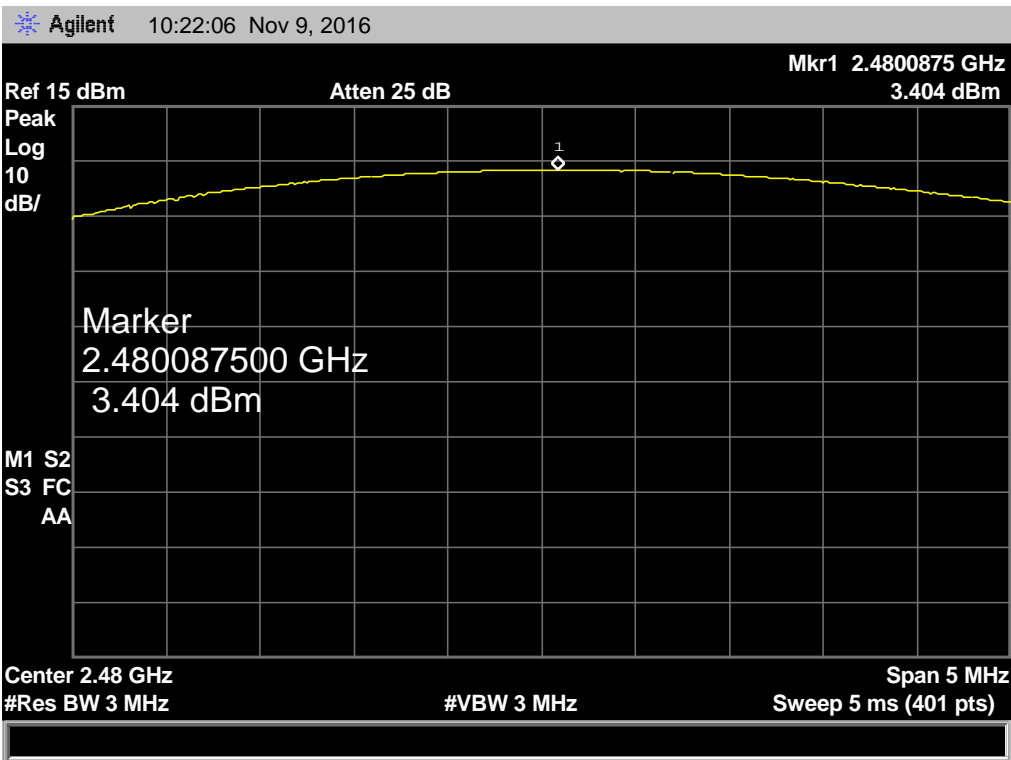

## 11. Antenna Requirement

### 11.1 Standard Requirement

#### 11.1.1 Standard

FCC Part 15.203

#### 11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is -1.1dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

The EUT antenna is a PIFA antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

-----END OF REPORT-----