



FCC PART 27 FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

Shandong USR IOT Technology Limited

Floor 11, Building 1, No. 1166 Xinluo Street, Gaoxin Qu, Jinan, Shandong, China

FCC ID: 2AJDAUSR-G806

Report Type: **Product Type:** Original Report 4G Router

Report Number: RSZ171011001-00B

Report Date: 2017-12-08

Reviewed By: RF Engineer

Rocky Kang

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Rocky Kang

Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307 (B) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
APPLICABLE STANDARD	
Result	
FCC §2.1047 - MODULATION CHARACTERISTIC	11
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); §27.50(C) (D) - RF OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	32
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	32
FCC §2.1051, §22.917(A) & §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA	= 0
TERMINALS	
APPLICABLE STANDARD	
TEST PROCEDURE TEST DATA	
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS	
APPLICABLE STANDARD	
TEST PROCEDURE	
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	
Applicable Standard	
TEST DATA	
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY	130
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	131

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Shandong USR IOT Technology Limited's product, model number: USR-G806 (FCC ID: 2AJDAUSR-G806) or the "EUT" in this report was a 4G Router, which was measured approximately: 110 mm (L) \times 99 mm (W) \times 30 mm (H), rated with input voltage: DC 12V from adapter.

Adapter Information: Model: SOY-1200100US

Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 12V, 1.0 A

Notes: This series products model: USR-G800, USR-G807, USR-G808, USR-G781, USR-G805, USR-G809, USR-G786, USR-G788 and USR-G806 are electrically identical, and only are different for model name. Model USR-G806 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

*All measurement and test data in this report was gathered from production sample serial number: 1702223 (Assigned by BACL). The EUT supplied by the applicant was received on 2017-10-11.

Objective

This type approval report is prepared on behalf of *Shandong USR IOT Technology Limited* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: 2AJDAUSR-G806.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±1.5dB
Unwanted Emission, conducted		±1.5dB
Emissions,	Below 1GHz	±4.70dB
Radiated	Above 1GHz	±4.80dB
Temperature		±1℃
Supply	voltages	±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	То
Shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

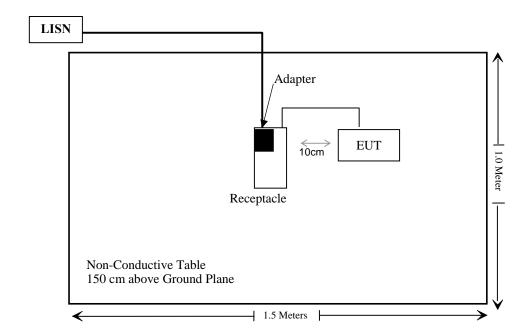

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 (b) (1) & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
]	Radiated Emission	Test		
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-17	2017-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
НР	Amplifier	HP8447E	1937A01046	2017-05-21	2017-11-19
Anritsu	Signal Generator	68369B	004114	2016-12-05	2017-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	1	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	2	2017-05-22	2017-11-22
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-04	2014-12-29	2017-12-28
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2014-12-29	2017-12-28
Ducommun technologies	Pre-amplifier	ALN-22093530- 01	991373-01	2017-08-03	2018-08-03

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
		RF Conducted T	'est		
Rohde & Schwarz	Rohde & Schwarz SPECTRUM ANALYZER		200120	2016-12-05	2017-12-05
Fluke	Digital Multimeter	287	19000011	2017-04-09	2018-04-09
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2016-11-22	2017-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-10-18	2018-10-18
Ducommun technologies	RF Cable	RG-214	3	2016-05-22	2017-11-22
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03- 101746-zn	2017-08-19	2018-08-19
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50- 146520-wh	2017-04-24	2018-04-24

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure								
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)				
0.3-1.34	614	1.63	*(100)	30				
1.34-30	824/f	2.19/f	$*(180/f^2)$	30				
30-300	27.5	0.073	0.2	30				
300-1500	/	/	f/1500	30				
1500-100,000	/	/	1.0	30				

f = frequency in MHz

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm2)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_{i} \frac{S_{i}}{S_{Limit,i}} \le 1$$

^{* =} Plane-wave equivalent power density

Frequency	Ante	nna Gain	Conduc	Conducted Power		Power	MPE Limit
(MHz)	(dBi)	(numeric)	(dBm)	(mW) Distance (cm)		Density (mW/cm ²)	(mW/cm ²)
2412-2472 WIFI	3.0	2.00	15	31.62	20	0.013	1.0
1850-1910 WCDMA	3.5	2.24	23.5	223.87	20	0.100	1.0
1710-1755 WCDMA	3.5	2.24	23.5	223.87	20	0.100	1.0
824-849 WCDMA	3.5	2.24	23.5	223.87	20	0.100	0.55
1850-1910 LTE	3.5	2.24	24	251.19	20	0.112	1.0
1710-1755 LTE	3.5	2.24	24	251.19	20	0.112	1.0
699-716 LTE	3.5	2.24	24	251.19	20	0.112	0.47

Note: WIFI Data please refer to DTS report.

Simultaneous transmitting consideration for PCB & WIFI:

$$\sum_{i} \frac{S_{i}}{S_{Limit,i}} = 0.112/0.47 + 0.013/1.0 = 0.251 < 1.0$$

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d), Part 22H, 24E & Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50(c) (d) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.


According to \$27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25 ℃	
Relative Humidity:	50 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Kobe Li on 2017-10-12.

Conducted Power

Cellular Band (Part 22H)

Mode	Test	Test	3GPP Sub	Ave	wer	
Mode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency
		RMC	12.2k	22.36	22.54	22.40
			1	21.25	21.50	21.34
		HSDPA	2	21.43	21.66	21.46
			3	21.25	21.47	21.28
			4	21.40	21.59	21.48
WCDMA (Band V)	Normal		1	21.25	21.32	21.23
(Build V)			2	21.17	21.20	21.16
		HSUPA	3	21.30	21.42	21.33
			4	21.13	21.27	21.20
			5	21.31	21.36	21.26
		HSPA+	1	21.67	21.85	21.82

PCS Band (Part 24E)

Mode	Test	Test	3GPP Sub	Average Output Power (dBm)		
Wiouc	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency
		RMC	12.2k	22.16	22.05	22.29
			1	21.06	21.94	21.22
		HSDPA	2	21.21	21.11	21.35
			3	21.11	21.01	21.24
			4	21.26	21.09	21.37
WCDMA (Band II)	Normal	Normal HSUPA	1	21.04	20.90	21.16
(Dana II)			2	21.00	20.79	21.11
			3	21.12	21.01	21.19
			4	20.95	20.86	21.09
			5	21.14	21.01	21.25
		HSPA+	1	20.46	20.37	20.62

AWS Band (Part 27)

Mode	Test	Test Mode	3GPP Sub	Average Output Power (dBm)			
Mode	Condition		Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	21.15	21.32	21.66	
		HSDPA	1	20.02	20.20	20.56	
			2	20.22	20.44	20.74	
			3	20.09	20.22	20.57	
			4	20.20	20.41	20.75	
WCDMA (Band IV)	Normal	HSUPA	1	20.51	20.48	20.47	
(Dalid IV)			2	20.43	20.39	20.44	
			3	20.59	20.52	20.57	
			4	20.40	20.35	20.36	
			5	20.55	20.55	20.56	
		HSPA+	1	20.65	20.78	20.88	

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
P) (G	Low	3.15	13
RMC (BPSK)	Middle	3.21	13
(BI SIL)	High	3.13	13
***	Low	3.10	13
HSDPA (16QAM)	Middle	3.18	13
(100/11/1)	High	3.05	13
HGHD 4	Low	3.01	13
HSUPA (BPSK)	Middle	2.93	13
(BI SIC)	High	2.85	13
	Low	3.22	13
HSPA+	Middle	3.01	13
	High	2.99	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.18	13
RMC (BPSK)	Middle	2.92	13
(BI SIL)	High	3.09	13
	Low	3.16	13
HSDPA (16QAM)	Middle	2.89	13
(10Q1111)	High	3.02	13
	Low	3.12	13
HSUPA (BPSK)	Middle	2.86	13
(BI SIL)	High	2.97	13
	Low	2.68	13
HSPA+	Middle	2.76	13
	High	2.93	13

AWS Band (Part 27)

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.12	13
RMC (BPSK)	Middle	3.16	13
(BI SIL)	High	3.09	13
	Low	3.05	13
HSDPA (16QAM)	Middle	3.09	13
(10Q/11/1)	High	3.03	13
	Low	2.95	13
HSUPA (BPSK)	Middle	2.98	13
(BI SIL)	High	2.92	13
	Low	3.12	13
HSPA+	Middle	3.15	13
	High	3.25	13

Radiated Power

WCDMA Mode:

Enggnengy	Receiver	Turntable	Rx An	tenna	S	Substitut	ed	Absolute	_	C Part 24E/27
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
		ERP f	or WCDI	MA Band	d V (Part	22H), M	iddle Chan	nel		
836.6	82.04	262	1.0	Н	15.4	0.8	0.0	14.5	38.45	23.95
836.6	85.02	32	1.0	V	20.8	0.8	0.0	20.0	38.45	18.45
		EIRP	for WCD	MA Ban	d II (Part	24E), M	iddle Chan	nel		
1880.00	82.00	89	2.2	Н	12.0	1.30	8.50	19.20	33	13.8
1880.00	84.49	48	1.2	V	14.2	1.30	8.50	21.40	33	11.6
	EIRP for WCDMA Band IV (Part 27), Middle Channel									
1732.60	85.44	265	2.2	Н	12.3	1.30	9.10	20.10	30	9.9
1732.60	88.39	341	1.3	V	15.8	1.30	9.10	23.60	30	6.4

Note:

 $Absolute\ Level = Substituted\ Level - Cable\ loss + Antenna\ Gain\ Margin = Limit-\ Absolute\ Level$

LTE Band 2:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.65	22.63	22.58
		RB Size=1, RB Offset=2	22.52	22.53	22.61
		RB Size=1, RB Offset=5	22.28	22.56	22.56
	QPSK	RB Size=3, RB Offset=0	22.40	22.34	22.32
		RB Size=3, RB Offset=1	22.25	22.31	22.20
		RB Size=3, RB Offset=2	22.18	22.14	22.16
1.4		RB Size=6, RB Offset=0	22.13	22.13	22.10
1.4		RB Size=1, RB Offset=0	22.17	22.15	22.08
		RB Size=1, RB Offset=2	22.02	22.02	21.94
		RB Size=1, RB Offset=5	21.99	21.92	22.95
	16QAM	RB Size=3, RB Offset=0	21.75	21.70	22.86
		RB Size=3, RB Offset=1	21.77	21.84	21.81
		RB Size=3, RB Offset=2	21.78	21.78	21.75
		RB Size=6, RB Offset=0	21.70	21.65	21.76
		RB Size=1, RB Offset=0	22.80	22.74	22.82
		RB Size=1, RB Offset=7	22.73	22.64	22.74
		RB Size=1, RB Offset=14	22.55	22.61	22.76
	QPSK	RB Size=8, RB Offset=0	21.86	21.84	21.90
		RB Size=8, RB Offset=4	21.77	21.68	21.77
		RB Size=8, RB Offset=7	21.56	21.58	21.70
3.0		RB Size=15, RB Offset=0	21.77	21.72	21.76
3.0		RB Size=1, RB Offset=0	22.08	22.06	22.00
		RB Size=1, RB Offset=7	22.07	21.96	22.00
		RB Size=1, RB Offset=14	22.16	21.78	21.89
	16QAM	RB Size=8, RB Offset=0	20.84	20.77	20.88
		RB Size=8, RB Offset=4	20.62	20.75	20.88
		RB Size=8, RB Offset=7	20.39	20.58	20.78
		RB Size=15, RB Offset=0	20.72	20.72	20.75

RB Size=50, RB Offset=0

20.48

20.46

20.48

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.10	22.05	22.34
		RB Size=1, RB Offset=37	22.00	21.92	22.18
		RB Size=1, RB Offset=74	22.01	21.99	22.19
	QPSK	RB Size=36, RB Offset=0	22.01	21.98	22.01
		RB Size=36, RB Offset=18	22.03	21.94	21.88
		RB Size=36, RB Offset=37	22.10	21.66	21.59
15.0		RB Size=75, RB Offset=0	21.87	21.88	21.99
15.0		RB Size=1, RB Offset=0	21.82	21.84	21.70
		RB Size=1, RB Offset=37	21.80	21.83	21.54
		RB Size=1, RB Offset=74	21.76	21.80	21.38
	16QAM	RB Size=36, RB Offset=0	21.79	21.79	22.02
		RB Size=36, RB Offset=18	21.79	21.68	21.97
		RB Size=36, RB Offset=37	21.53	21.56	21.81
		RB Size=75, RB Offset=0	21.16	21.1	20.97
		RB Size=1, RB Offset=0	22.89	22.87	22.95
		RB Size=1, RB Offset=49	22.90	22.85	22.83
		RB Size=1, RB Offset=99	22.77	22.80	22.76
	QPSK	RB Size=50, RB Offset=0	21.82	21.79	21.93
		RB Size=50, RB Offset=24	21.79	21.83	21.84
		RB Size=50, RB Offset=49	21.65	21.64	21.64
20.0		RB Size=100, RB Offset=0	21.76	21.75	21.83
20.0		RB Size=1, RB Offset=0	22.00	21.95	22.04
		RB Size=1, RB Offset=49	21.93	21.86	21.86
		RB Size=1, RB Offset=99	21.89	21.67	21.87
	16QAM	RB Size=50, RB Offset=0	20.87	20.84	20.98
		RB Size=50, RB Offset=24	20.75	20.83	20.96
		RB Size=50, RB Offset=49	20.48	20.69	20.87
		RB Size=100, RB Offset=0	20.77	20.77	20.91

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.68	13	Pass
QPSK (100RB Size)	5.95	13	Pass
16QAM (1RB Size)	5.65	13	Pass
16QAM (100%RB Size)	6.15	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	5	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz l	Bandwidth				
1880.00	76.08	250	2.3	Н	6.0	1.30	8.50	13.20	33
1880.00	82.15	336	1.4	V	11.9	1.30	8.50	19.10	33
				3 MHz B	andwidth				
1800.00	76.48	303	1.0	Н	4.4	1.30	8.50	11.60	33
1800.00	82.37	147	2.1	V	10.7	1.30	8.50	17.90	33
				5 MHz B	andwidth				
1880.00	75.95	5	1.6	Н	5.9	1.30	8.50	13.10	33
1880.00	81.59	172	2.1	V	11.3	1.30	8.50	18.50	33
			1	10 MHz I	Bandwidth				
1880.00	78.05	83	2.3	Н	8.0	1.30	8.50	15.20	33
1880.00	81.49	288	2.1	V	11.2	1.30	8.50	18.40	33
			1	5 MHz I	Bandwidth				
1800.00	76.59	250	2.2	Н	4.5	1.30	8.50	11.70	33
1800.00	82.36	158	1.8	V	10.7	1.30	8.50	17.90	33
			2	20 MHz I	Bandwidth				
1880.00	75.81	350	2.1	Н	5.8	1.30	8.50	13.00	33
1880.00	81.09	175	2.3	V	10.8	1.30	8.50	18.00	33

16QAM:

	D	Turn	Rx An	tenna		Substitut	ed	A books	
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz	Bandwidth				
1880.00	78.65	20	1.9	Н	8.6	1.30	8.50	15.80	33
1880.00	82.34	210	1.6	V	12.1	1.30	8.50	19.30	33
				3 MHz B	andwidth				
1880.00	78.18	220	1.5	Н	8.1	1.30	8.50	15.30	33
1880.00	83.21	349	2.4	V	12.9	1.30	8.50	20.10	33
				5 MHz B	andwidth				
1880.00	78.65	157	2.4	Н	8.6	1.30	8.50	15.80	33
1880.00	82.59	325	2.3	V	12.3	1.30	8.50	19.50	33
				10 MHz I	Bandwidth				
1880.00	77.96	336	2.0	Н	7.9	1.30	8.50	15.10	33
1880.00	83.12	7	1.8	V	12.9	1.30	8.50	20.10	33
				15 MHz I	Bandwidth				
1880.00	78.38	177	2.5	Н	8.3	1.30	8.50	15.50	33
1880.00	82.56	215	2.1	V	12.3	1.30	8.50	19.50	33
			2	20 MHz I	Bandwidth				
1880.00	78.34	360	1.3	Н	8.3	1.30	8.50	15.50	33
1880.00	82.51	211	2.1	V	12.2	1.30	8.50	19.40	33

LTE Band 4:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.38	22.38	22.49
		RB Size=1, RB Offset=2	22.42	22.22	22.51
		RB Size=1, RB Offset=5	22.39	21.96	22.56
	QPSK	RB Size=3, RB Offset=0	22.62	22.63	22.64
		RB Size=3, RB Offset=1	22.54	22.58	22.62
		RB Size=3, RB Offset=2	22.43	22.48	22.44
1.4		RB Size=6, RB Offset=0	21.43	21.4	21.39
1.4		RB Size=1, RB Offset=0	21.86	21.84	21.91
		RB Size=1, RB Offset=2	21.74	21.79	21.74
		RB Size=1, RB Offset=5	21.71	21.82	21.83
	16QAM	RB Size=3, RB Offset=0	22.78	21.78	21.74
		RB Size=3, RB Offset=1	22.78	21.66	21.78
		RB Size=3, RB Offset=2	22.58	21.69	21.58
		RB Size=6, RB Offset=0	20.65	20.65	20.67
		RB Size=1, RB Offset=0	22.46	22.44	22.41
		RB Size=1, RB Offset=7	22.25	22.36	22.23
		RB Size=1, RB Offset=14	22.31	22.18	22.20
	QPSK	RB Size=8, RB Offset=0	21.55	21.56	21.62
		RB Size=8, RB Offset=4	21.44	21.42	21.64
		RB Size=8, RB Offset=7	21.30	21.26	21.61
3.0		RB Size=15, RB Offset=0	21.56	21.58	21.64
3.0		RB Size=1, RB Offset=0	21.66	21.60	21.55
		RB Size=1, RB Offset=7	21.68	21.57	21.45
		RB Size=1, RB Offset=14	21.67	21.41	21.27
	16QAM	RB Size=8, RB Offset=0	20.67	20.65	20.71
		RB Size=8, RB Offset=4	20.56	20.56	20.69
		RB Size=8, RB Offset=7	20.59	20.68	20.52
		RB Size=15, RB Offset=0	20.70	20.69	20.70

RB Size=50, RB Offset=0

20.88

20.84

20.87

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.64	22.54	22.53
		RB Size=1, RB Offset=37	22.62	22.34	22.42
		RB Size=1, RB Offset=74	22.45	22.35	22.42
	QPSK	RB Size=36, RB Offset=0	21.95	21.86	21.82
		RB Size=36, RB Offset=18	21.85	21.70	21.73
		RB Size=36, RB Offset=37	21.93	21.61	21.69
15.0		RB Size=75, RB Offset=0	21.69	21.53	21.56
15.0		RB Size=1, RB Offset=0	21.67	21.56	21.56
		RB Size=1, RB Offset=37	21.57	21.43	21.63
		RB Size=1, RB Offset=74	21.49	21.40	21.48
	16QAM	RB Size=36, RB Offset=0	20.80	20.64	20.66
		RB Size=36, RB Offset=18	20.75	20.49	20.56
		RB Size=36, RB Offset=37	20.49	20.51	20.45
		RB Size=75, RB Offset=0	20.71	20.68	20.73
		RB Size=1, RB Offset=0	22.65	22.36	22.41
		RB Size=1, RB Offset=49	22.60	22.24	22.44
		RB Size=1, RB Offset=99	22.64	22.24	22.16
	QPSK	RB Size=50, RB Offset=0	21.79	21.85	21.91
		RB Size=50, RB Offset=24	21.75	21.83	21.86
		RB Size=50, RB Offset=49	21.68	21.81	21.74
20.0		RB Size=100, RB Offset=0	21.74	21.45	21.48
20.0		RB Size=1, RB Offset=0	22.27	22.16	22.26
		RB Size=1, RB Offset=49	22.11	22.16	22.29
		RB Size=1, RB Offset=99	21.98	22.11	22.32
	16QAM	RB Size=50, RB Offset=0	21.01	20.98	21.01
		RB Size=50, RB Offset=24	20.95	20.97	20.99
		RB Size=50, RB Offset=49	20.77	20.98	20.96
		RB Size=100, RB Offset=0	20.84	20.75	20.77

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.11	13	Pass
QPSK (100RB Size)	5.63	13	Pass
16QAM (1RB Size)	4.93	13	Pass
16QAM (100%RB Size)	5.54	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz l	Bandwidth				
1732.50	81.35	262	2.0	Н	8.2	1.30	9.10	16.00	30
1732.50	87.48	40	2.2	V	14.9	1.30	9.10	22.70	30
				3 MHz B	andwidth				
1732.50	82.26	77	2.2	Н	9.1	1.30	9.10	16.90	30
1732.50	87.31	212	1.3	V	14.7	1.30	9.10	22.50	30
				5 MHz B	andwidth				
1732.50	81.38	278	2.4	Н	8.2	1.30	9.10	16.00	30
1732.50	86.83	54	2.0	V	14.3	1.30	9.10	22.10	30
			1	10 MHz I	Bandwidth				
1732.50	82.13	251	1.4	Н	9.0	1.30	9.10	16.80	30
1732.50	86.64	57	1.2	V	14.1	1.30	9.10	21.90	30
			1	15 MHz I	Bandwidth				
1732.50	81.42	13	1.8	Н	8.3	1.30	9.10	16.10	30
1732.50	86.78	70	1.1	V	14.2	1.30	9.10	22.00	30
	20 MHz Bandwidth								
1732.50	81.59	138	1.0	Н	8.4	1.30	9.10	16.20	30
1732.50	86.35	31	2.0	V	13.8	1.30	9.10	21.60	30

16QAM:

	Receiver	Turn	Rx An	tenna		Substitut	ed	Absolute	
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	.4 MHz	Bandwidth	l .			
1732.50	82.74	329	1.1	Н	9.6	1.30	9.10	17.40	30
1732.50	86.78	108	2.1	V	14.2	1.30	9.10	22.00	30
				3 MHz B	andwidth				
1732.50	83.45	93	1.2	Н	10.3	1.30	9.10	18.10	30
1732.50	87.63	224	1.6	V	15.1	1.30	9.10	22.90	30
				5 MHz B	andwidth				
1732.50	82.57	141	2.0	Н	9.4	1.30	9.10	17.20	30
1732.50	87.33	288	2.3	V	14.8	1.30	9.10	22.60	30
				10 MHz I	Bandwidth				
1732.50	83.38	92	2.2	Н	10.2	1.30	9.10	18.00	30
1732.50	87.97	74	1.8	V	15.4	1.30	9.10	23.20	30
				15 MHz I	Bandwidth	÷.			
1732.50	82.28	153	1.7	Н	9.1	1.30	9.10	16.90	30
1732.50	87.02	73	1.6	V	14.5	1.30	9.10	22.30	30
	20 MHz Bandwidth								
1732.50	83.26	249	1.9	Н	10.1	1.30	9.10	17.90	30
1732.50	87.12	349	1.8	V	14.6	1.30	9.10	22.40	30

LTE Band 12:

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.97	22.99	22.96
		RB Size=1, RB Offset=2	22.97	23.03	23.01
		RB Size=1, RB Offset=5	22.88	22.87	22.83
	QPSK	RB Size=3, RB Offset=0	23.01	23.02	23.09
		RB Size=3, RB Offset=1	22.91	23.01	23.06
		RB Size=3, RB Offset=2	22.70	22.77	22.96
1.4		RB Size=6, RB Offset=0	21.99	21.97	21.95
1.4		RB Size=1, RB Offset=0	21.94	21.93	21.96
		RB Size=1, RB Offset=2	21.92	21.89	21.80
		RB Size=1, RB Offset=5	21.92	21.65	21.65
	16QAM	RB Size=3, RB Offset=0	22.14	22.11	22.16
		RB Size=3, RB Offset=1	22.03	22.13	22.09
		RB Size=3, RB Offset=2	21.85	22.09	22.05
		RB Size=6, RB Offset=0	20.91	20.93	20.96
		RB Size=1, RB Offset=0	22.96	22.96	22.92
		RB Size=1, RB Offset=7	22.76	22.98	22.85
		RB Size=1, RB Offset=14	22.50	22.74	22.67
	QPSK	RB Size=8, RB Offset=0	22.05	22.00	22.02
		RB Size=8, RB Offset=4	22.02	21.88	22.02
		RB Size=8, RB Offset=7	22.08	21.81	21.82
2		RB Size=15, RB Offset=0	22.03	21.99	22.06
3		RB Size=1, RB Offset=0	22.41	22.42	22.52
		RB Size=1, RB Offset=7	22.27	22.30	22.52
		RB Size=1, RB Offset=14	22.18	22.10	22.31
	16QAM	RB Size=8, RB Offset=0	21.14	21.10	21.11
		RB Size=8, RB Offset=4	21.05	21.04	21.09
		RB Size=8, RB Offset=7	21.10	21.01	21.17
		RB Size=15, RB Offset=0	21.09	21.04	21.07

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	21.97	21.97	22.00
		RB Size=1, RB Offset=12	21.95	21.86	21.81
		RB Size=1, RB Offset=24	21.87	21.82	21.76
	QPSK	RB Size=12, RB Offset=0	21.17	21.12	21.14
		RB Size=12, RB Offset=6	20.96	21.11	21.06
		RB Size=12, RB Offset=11	20.70	21.10	20.96
5		RB Size=25, RB Offset=0	22.01	21.97	21.96
3		RB Size=1, RB Offset=0	21.93	21.93	21.97
		RB Size=1, RB Offset=12	21.84	21.73	21.92
		RB Size=1, RB Offset=24	21.95	21.59	21.93
	16QAM	RB Size=12, RB Offset=0	21.17	21.12	21.17
		RB Size=12, RB Offset=6	20.96	21.05	21.10
		RB Size=12, RB Offset=11	20.90	20.96	20.91
		RB Size=25, RB Offset=0	21.07	21.03	21.08
		RB Size=1, RB Offset=0	23.04	23.01	23.02
		RB Size=1, RB Offset=24	23.05	22.96	22.89
		RB Size=1, RB Offset=49	22.95	23.00	22.80
	QPSK	RB Size=25, RB Offset=0	22.03	21.99	21.94
		RB Size=25, RB Offset=12	21.97	21.95	22.02
		RB Size=25, RB Offset=24	21.74	21.86	21.83
10		RB Size=50, RB Offset=0	22.04	22.02	22.06
10		RB Size=1, RB Offset=0	22.59	22.58	22.54
		RB Size=1, RB Offset=24	22.53	22.38	22.45
		RB Size=1, RB Offset=49	22.43	22.20	22.23
	16QAM	RB Size=25, RB Offset=0	21.10	21.09	21.12
		RB Size=25, RB Offset=12	20.96	21.16	20.97
		RB Size=25, RB Offset=24	20.97	21.22	20.92
		RB Size=50, RB Offset=0	21.09	21.05	21.11

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.64	13	Pass
QPSK (50RB Size)	5.89	13	Pass
16QAM (1RB Size)	5.86	13	Pass
16QAM (100%RB Size)	6.15	13	Pass

EIRP:

QPSK:

	Receiver	Turn	Rx An	tenna	\$	Substitute	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
]	Middle C	hannel				
			1.4	MHz B	andwidth				
707.5	76.21	53	2.2	Н	16.2	0.6	0.0	15.6	34.77
707.5	80.15	323	2.3	V	21.1	0.6	0.0	20.5	34.77
			3	MHz Ba	ndwidth				
707.5	77.65	161	1.7	Н	17.6	0.6	0.0	17.0	34.77
707.5	80.65	166	2.2	V	21.6	0.6	0.0	21.0	34.77
			5	MHz Ba	ndwidth				
707.5	78.36	355	2.4	Н	18.3	0.6	0.0	17.7	34.77
707.5	81.21	249	1.5	V	22.1	0.6	0.0	21.5	34.77
10 MHz Bandwidth									
707.5	77.56	122	1.9	Н	17.5	0.6	0.0	16.9	34.77
707.5	80.65	302	1.4	V	21.6	0.6	0.0	21.0	34.77

16QAM:

	Receiver	Turn	Rx An	tenna		Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	1.4 MHz	Bandwidth	ı.	_		
707.5	78.45	360	2.1	Н	18.4	0.6	0.0	17.8	34.77
707.5	80.35	216	2.1	V	21.3	0.6	0.0	20.7	34.77
				3 MHz E	Bandwidth				
707.5	77.56	136	1.8	Н	17.5	0.6	0.0	16.9	34.77
707.5	81.02	190	1.5	V	22.0	0.6	0.0	21.4	34.77
				5 MHz E	Bandwidth				
707.5	78.54	265	2.3	Н	18.5	0.6	0.0	17.9	34.77
707.5	80.65	280	1.1	V	21.6	0.6	0.0	21.0	34.77
10 MHz Bandwidth									
707.5	77.55	45	2.0	Н	17.5	0.6	0.0	16.9	34.77
707.5	80.21	70	1.7	V	21.1	0.6	0.0	20.5	34.77

Note:

All above data were tested with no amplifier Absolute Level = Substituted Level - Cable loss + Antenna Gain Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

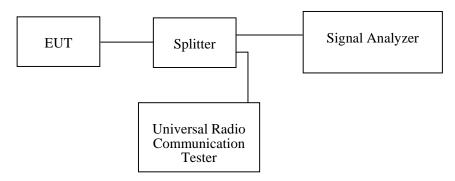

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Kobe Li from 2017-10-12 to 2017-10-15.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.135	4.744
HSUPA (BPSK)	836.6	4.167	4.744
HSDPA (16QAM)	836.6	4.167	4.744


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.167	4.792
HSUPA (BPSK)	1880.0	4.151	4.776
HSDPA (16QAM)	1880.0	4.151	4.792

AWS Band (Part27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.135	4.728
HSUPA (BPSK)	1880.0	4.135	4.712
HSDPA (16QAM)	1880.0	4.135	4.728

Cellular Band (Part 22H) 26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

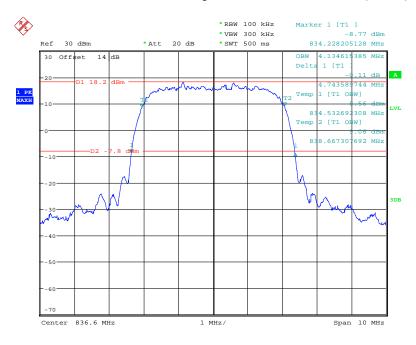


Date: 12.OCT.2017 21:02:33

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

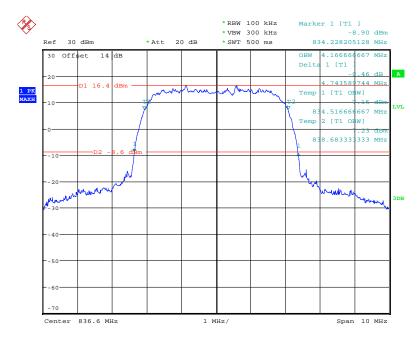

Date: 12.0CT.2017 21:05:58


26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

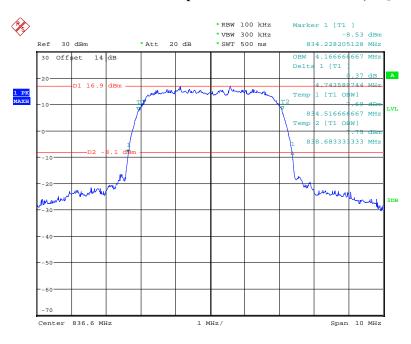

Date: 12.OCT.2017 21:07:17


PCS Band (Part 24E)

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

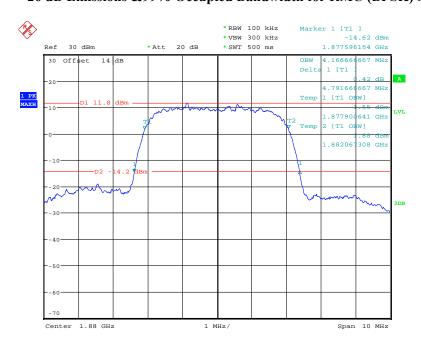


Date: 12.OCT.2017 20:43:37

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

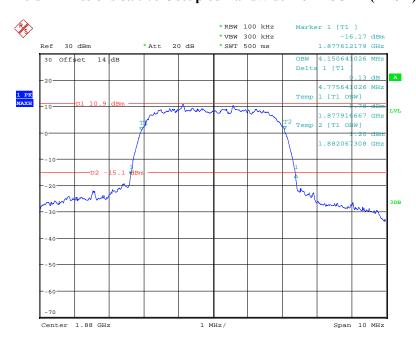


Date: 12.OCT.2017 20:59:04

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

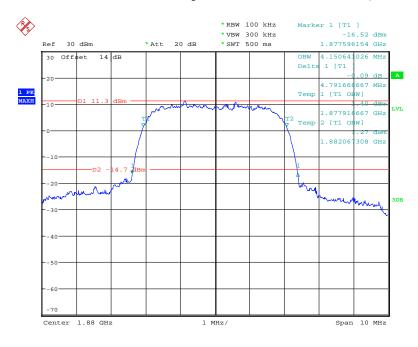


Date: 12.OCT.2017 20:49:05

AWS Band (Part 27)
26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

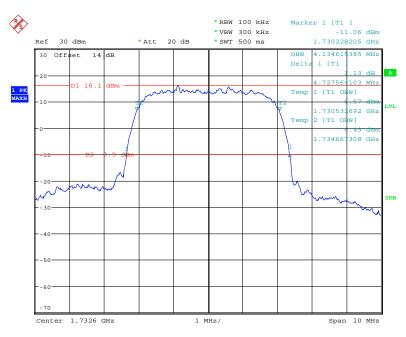


Date: 12.OCT.2017 20:32:20

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

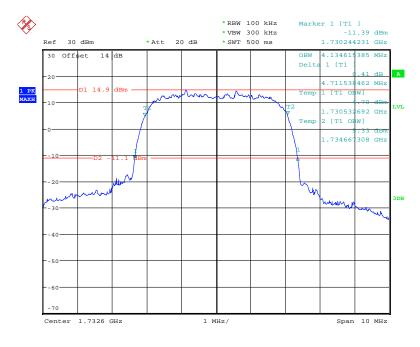

Date: 12.0CT.2017 20:36:51

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

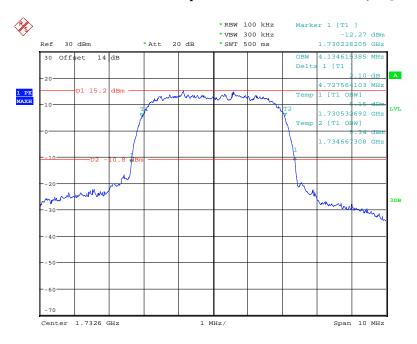


Date: 12.OCT.2017 20:40:14

LTE Band 2: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.115	1.336
	16QAM	1.106	1.341
3.0	QPSK	2.702	2.962
	16QAM	2.702	2.981
5.0	QPSK	4.535	5.045
	16QAM	4.519	5.061
10.0	QPSK	8.974	9.880
	16QAM	8.942	9.752
15.0	QPSK	13.462	14.704
	16QAM	13.413	14.702
20.0	QPSK	17.885	19.255
	16QAM	17.885	19.191

QPSK (1.4 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

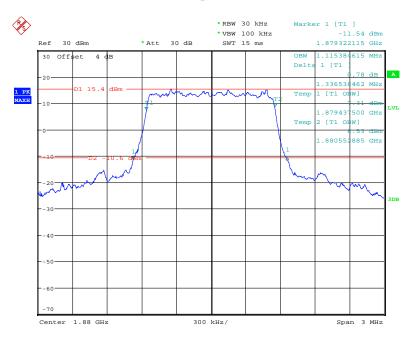


Date: 15.0CT.2017 15:09:26

16-QAM (1.4 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

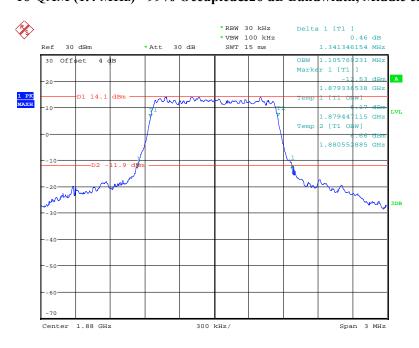


Date: 15.0CT.2017 15:08:18

QPSK (3.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

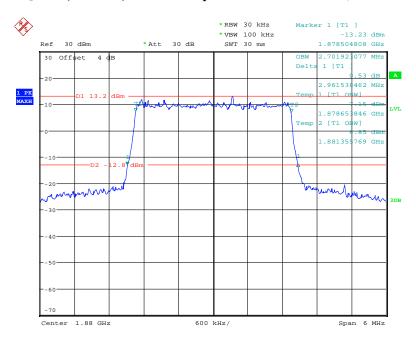


Date: 15.OCT.2017 15:10:47

16-QAM (3.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

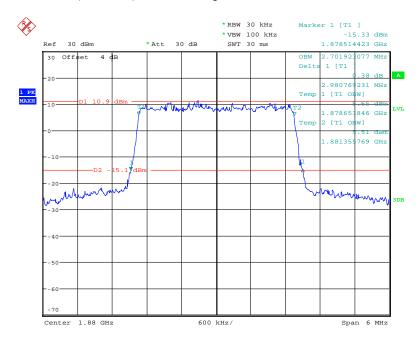


Date: 15.OCT.2017 15:10:00

QPSK (5.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

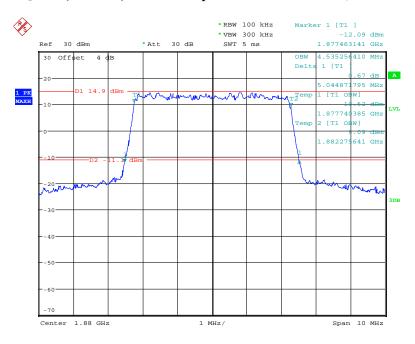


Date: 15.OCT.2017 15:11:53

16-QAM (5.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

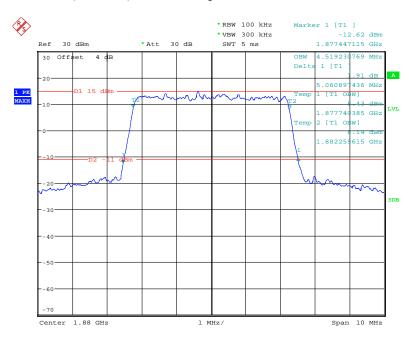


Date: 15.OCT.2017 15:45:31

QPSK (10.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

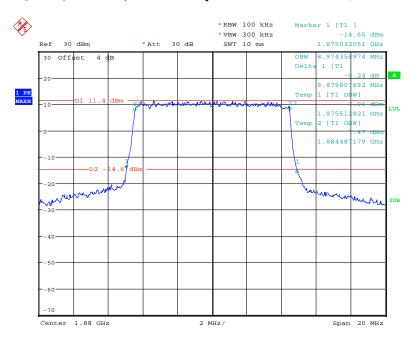


Date: 15.OCT.2017 15:54:56

16-QAM (10.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

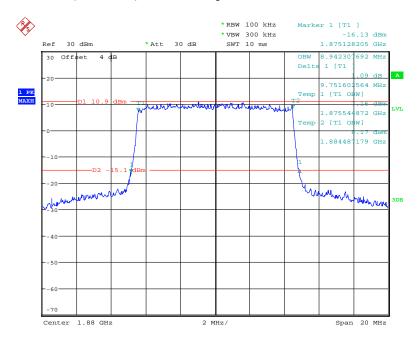


Date: 15.OCT.2017 15:55:30

QPSK (15.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

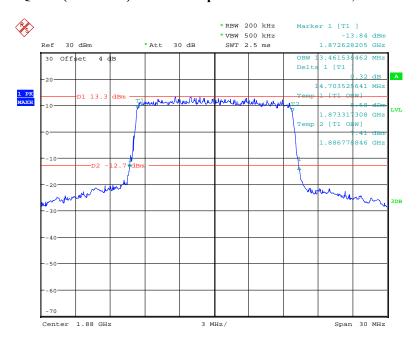


Date: 15.0CT.2017 15:57:24

16-QAM (15.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

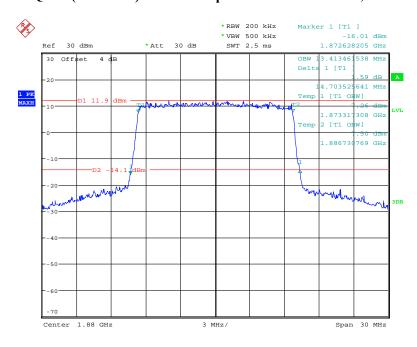


Date: 15.0CT.2017 15:56:39

QPSK (20.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

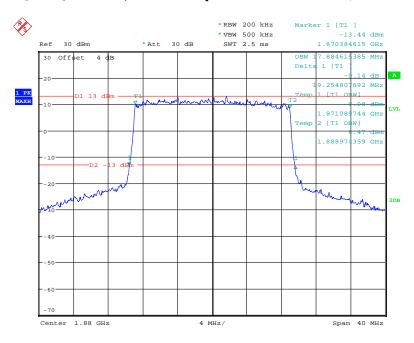

Date: 15.0CT.2017 16:06:07

16-QAM (20.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

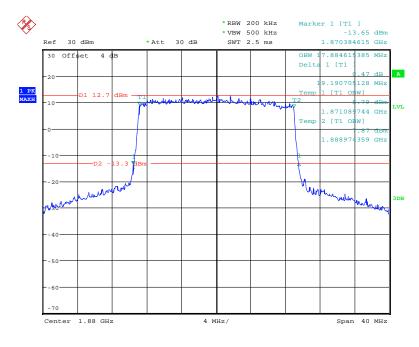


Date: 15.0CT.2017 15:59:33

LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.101	1.313
	16QAM	1.106	1.322
3.0	QPSK	2.692	2.947
	16QAM	2.692	2.976
5.0	QPSK	4.519	5.043
	16QAM	4.503	4.995
10.0	QPSK	8.974	9.785
	16QAM	8.910	9.689
15.0	QPSK	13.413	14.593
	16QAM	13.413	14.545
20.0	QPSK	17.821	19.032
	16QAM	17.821	19.160


QPSK (1.4 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

Report No.: RSZ171011001-00B

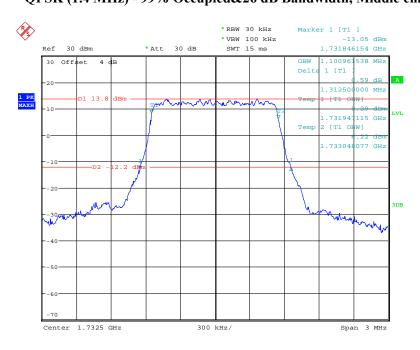


Date: 15.0CT.2017 14:53:17

16-QAM (1.4 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

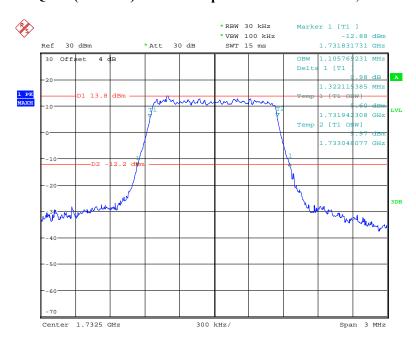


Date: 15.0CT.2017 14:54:28

QPSK (3.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

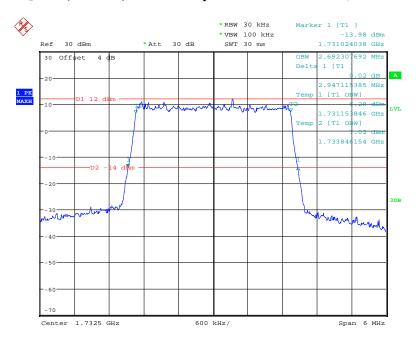


Date: 15.OCT.2017 14:55:51

16-QAM (3.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

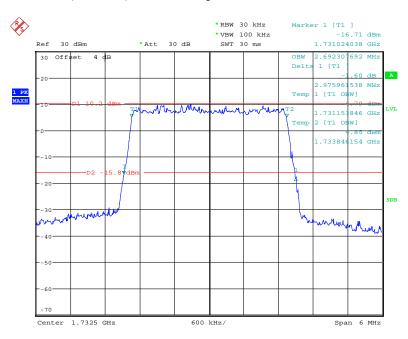


Date: 15.OCT.2017 14:56:37

QPSK (5.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

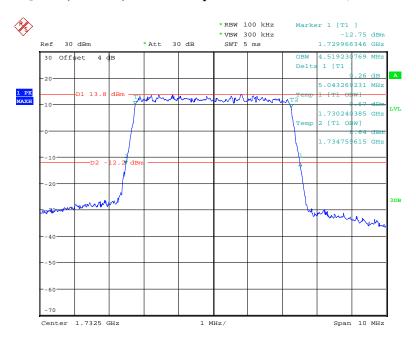


Date: 15.OCT.2017 14:58:29

16-QAM (5.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

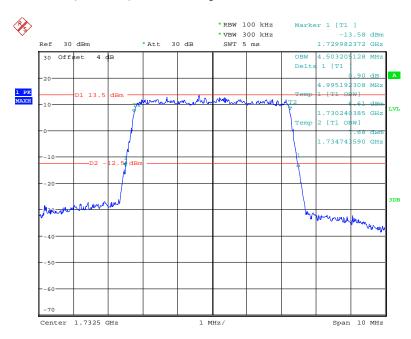


Date: 15.OCT.2017 14:57:34

QPSK (10.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

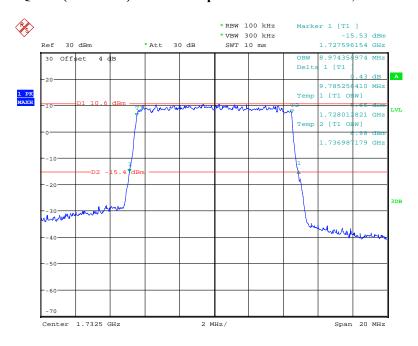


Date: 15.0CT.2017 15:01:20

16-QAM (10.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

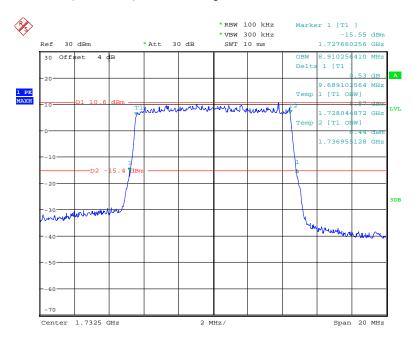


Date: 15.OCT.2017 15:02:09

QPSK (15.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

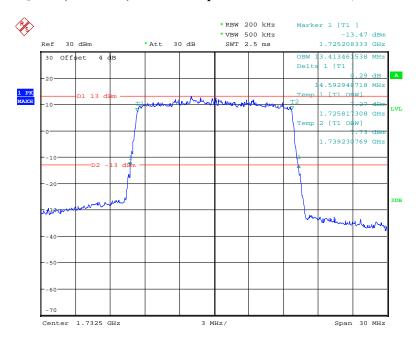


Date: 15.0CT.2017 15:03:47

16-QAM (15.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

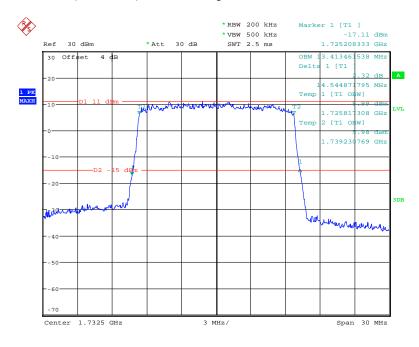


Date: 15.OCT.2017 15:04:32

QPSK (20.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

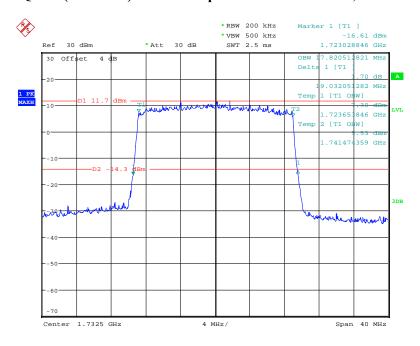

Date: 15.OCT.2017 15:05:41

16-QAM (20.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

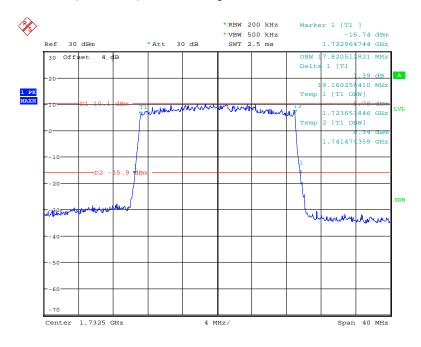


Date: 15.OCT.2017 15:06:53

BAND 12:


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.096	1.293
	16QAM	1.111	1.327
3.0	QPSK	2.692	2.962
	16QAM	2.692	2.962
5.0	QPSK	4.519	5.071
	16QAM	4.519	5.022
10.0	QPSK	8.974	9.750
	16QAM	8.942	9.686

QPSK (1.4 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

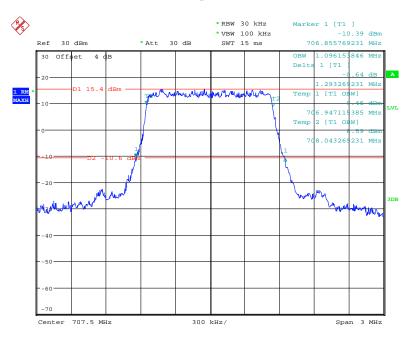


Date: 15.OCT.2017 14:43:02

16-QAM (1.4 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

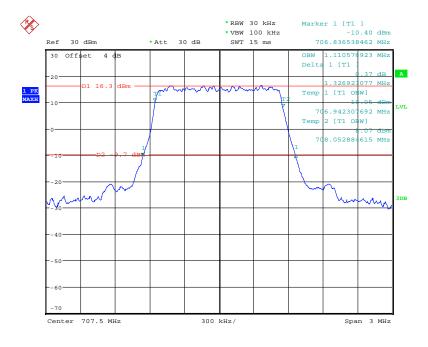


Date: 15.0CT.2017 14:47:11

QPSK (3.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

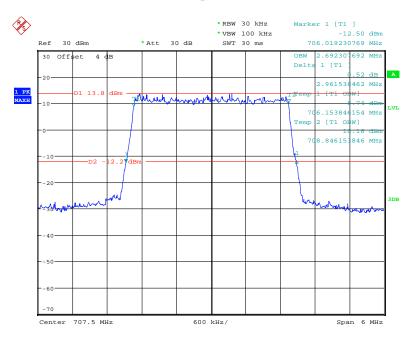


Date: 15.OCT.2017 14:49:03

16-QAM (3.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

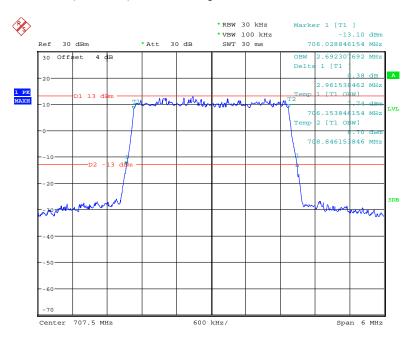


Date: 15.OCT.2017 14:48:18

QPSK (5.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

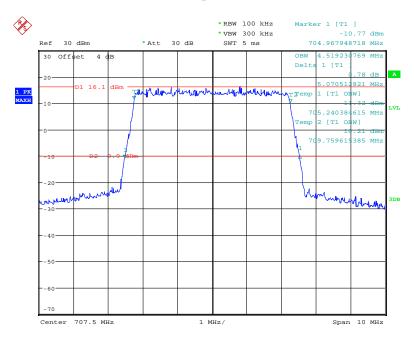


Date: 15.OCT.2017 14:50:43

16-QAM (5.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

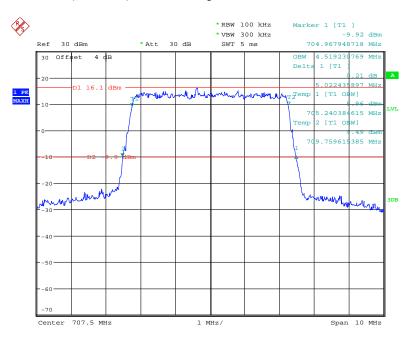


Date: 15.OCT.2017 14:49:59

QPSK (10.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

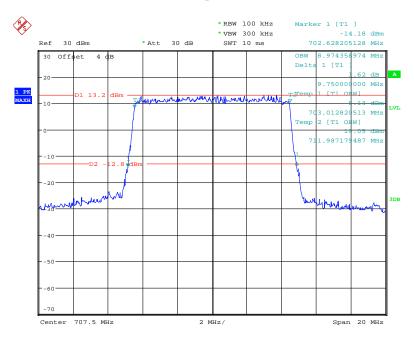

Date: 15.0CT.2017 14:52:07

16-QAM (10.0 MHz) - 99% Occupied&26 dB Bandwidth, Middle channel

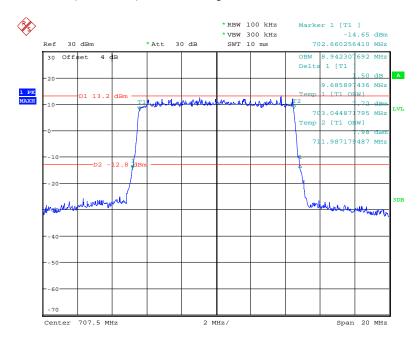

Date: 15.OCT.2017 14:51:22

FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

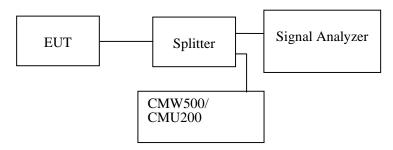

Test Data

Environmental Conditions

Temperature:	24~25 ℃
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Kobe Li from 2017-10-12 to 2017-10-15.


Test result: Compliance,

EUT operation mode: transmitting

Please refer to the following plots.


Cellular Band (Part 22H)

30 MHz – 1 GHz (WCDMA Mode)

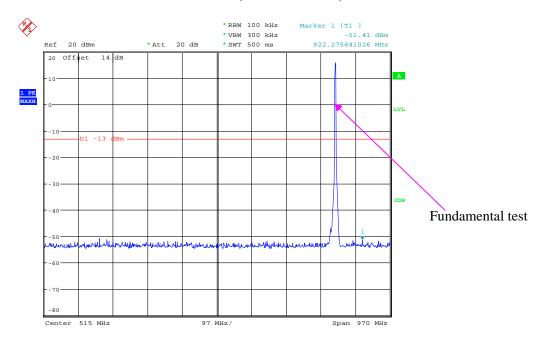

Date: 12.0CT.2017 22:12:30


1 GHz – 10 GHz (WCDMA Mode)

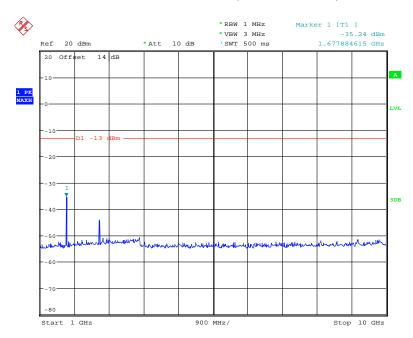

Date: 12.OCT.2017 22:14:06


PCS Band (Part 24E)

30 MHz – 1 GHz (WCDMA Mode)

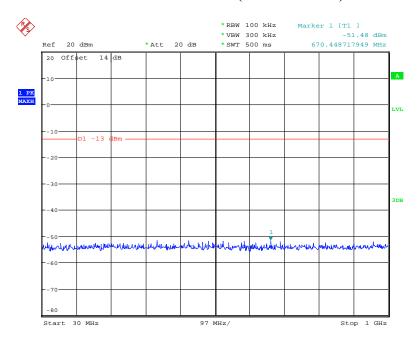


Date: 12.0CT.2017 22:08:05

1 GHz – 3 GHz (WCDMA Mode)

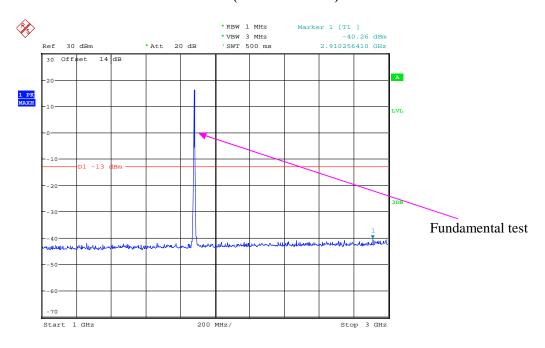

Date: 12.OCT.2017 22:18:11


3 GHz – 20 GHz (WCDMA Mode)

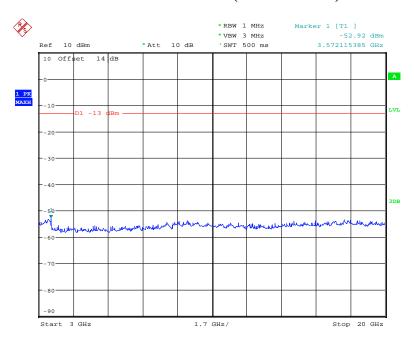

Date: 12.OCT.2017 22:18:54


AWS Band (Part 27)

30 MHz – 1 GHz (WCDMA Mode)

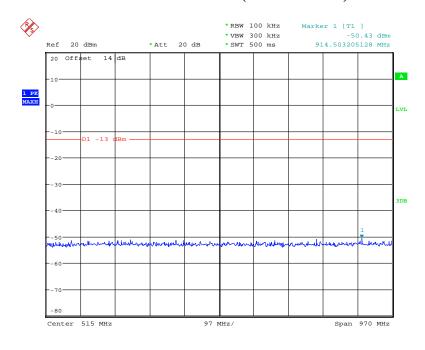


Date: 12.0CT.2017 22:10:07

1 GHz – 3 GHz (WCDMA Mode)

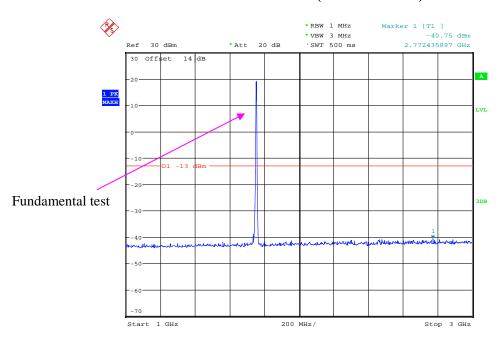

Date: 12.0CT.2017 22:15:16


3 GHz - 20 GHz (WCDMA Mode)

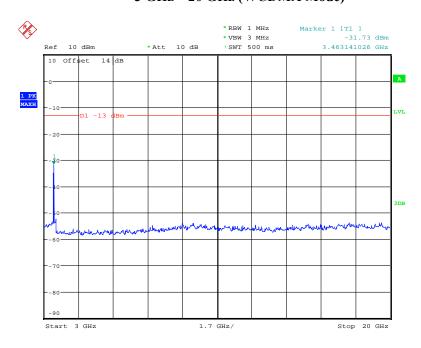

Date: 12.0CT.2017 22:20:02


LTE Band 2:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

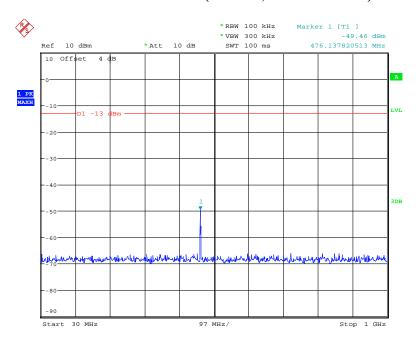


Date: 15.0CT.2017 16:52:42

1 GHz – 3 GHz (1.4 MHz, Middle Channel)

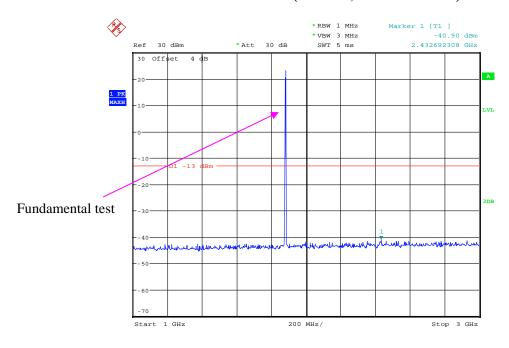


Date: 15.OCT.2017 17:00:03

3 GHz – 26 GHz (1.4 MHz, Middle Channel)

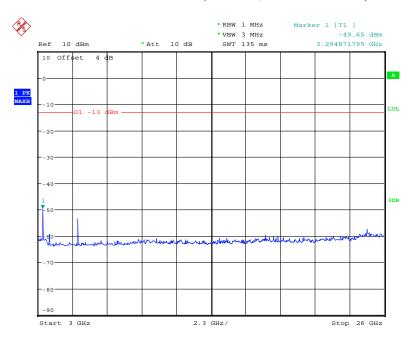


Date: 15.0CT.2017 17:08:46

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

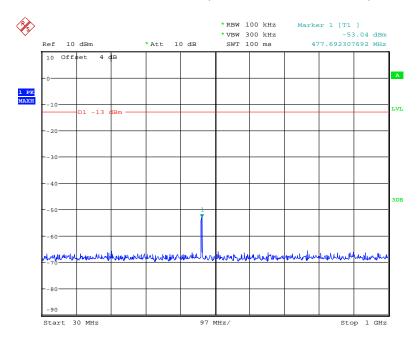


Date: 15.OCT.2017 16:52:56

1 GHz - 3 GHz (3.0 MHz, Middle Channel)

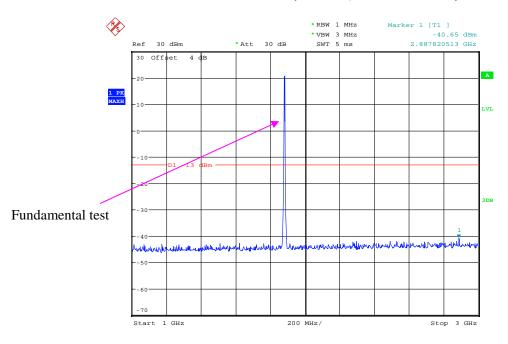


Date: 15.OCT.2017 17:00:31

3 GHz - 26 GHz (3.0 MHz, Middle Channel)

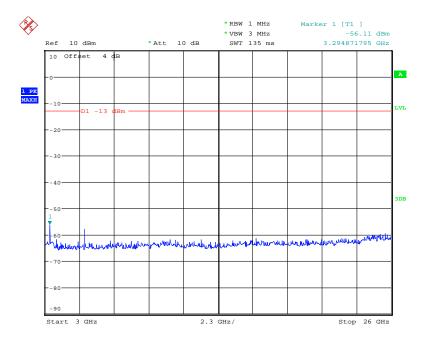


Date: 15.OCT.2017 17:07:10

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

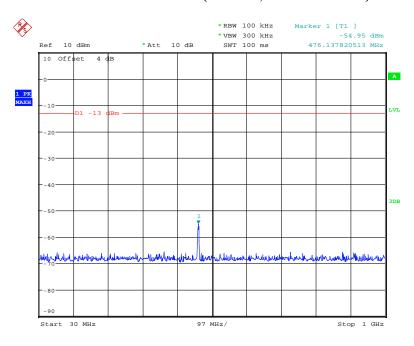


Date: 15.0CT.2017 16:53:09

1 GHz – 3 GHz (5.0 MHz, Middle Channel)

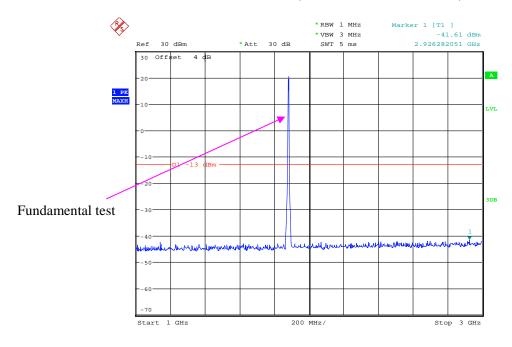


Date: 15.OCT.2017 17:00:52

3 GHz – 26 GHz (5.0 MHz, Middle Channel)

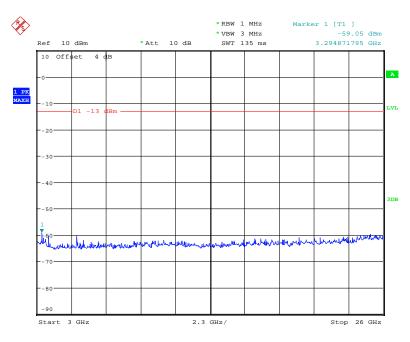


Date: 15.0CT.2017 17:07:00

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

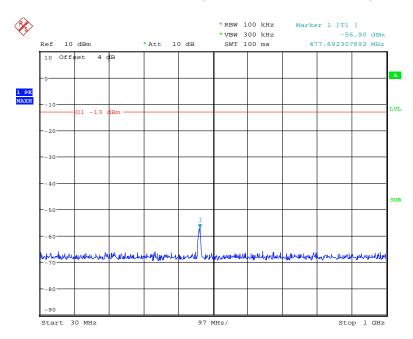


Date: 15.OCT.2017 16:53:24

1 GHz – 3 GHz (10.0 MHz, Middle Channel)

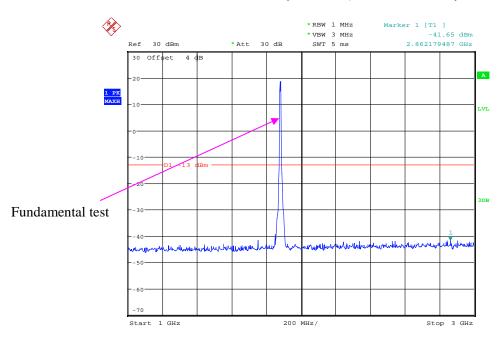


Date: 15.0CT.2017 17:01:10

3 GHz - 26 GHz (10.0 MHz, Middle Channel)

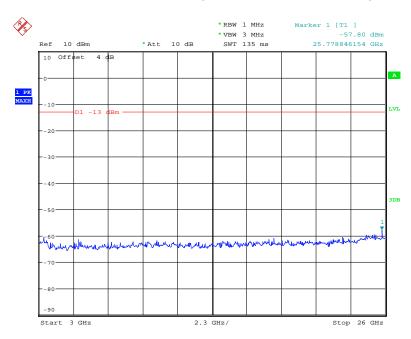


Date: 15.OCT.2017 17:06:48

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

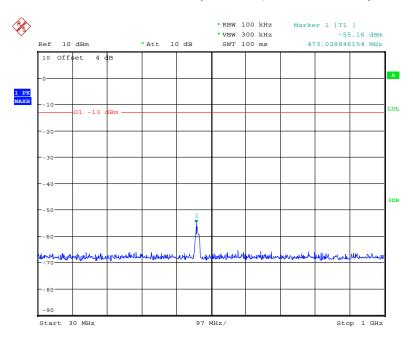


Date: 15.0CT.2017 16:53:40

1 GHz – 3 GHz (15.0 MHz, Middle Channel)

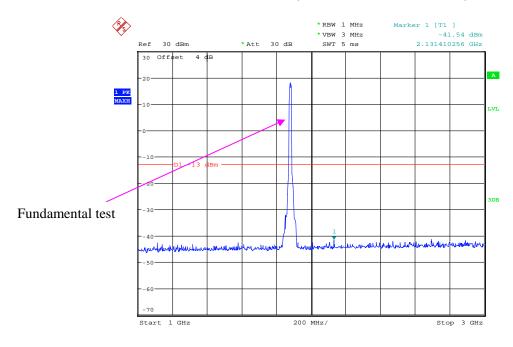


Date: 15.OCT.2017 17:01:26

3 GHz - 26 GHz (15.0 MHz, Middle Channel)

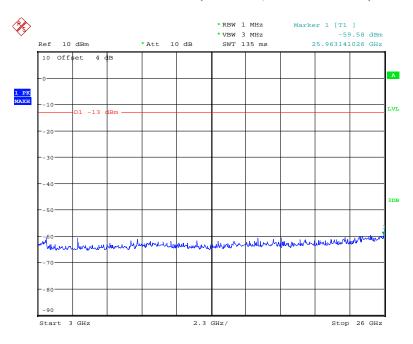


Date: 15.0CT.2017 17:06:34

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

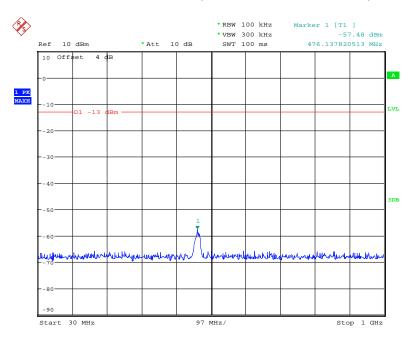


Date: 15.OCT.2017 16:53:56

1 GHz - 3 GHz (20.0 MHz, Middle Channel)

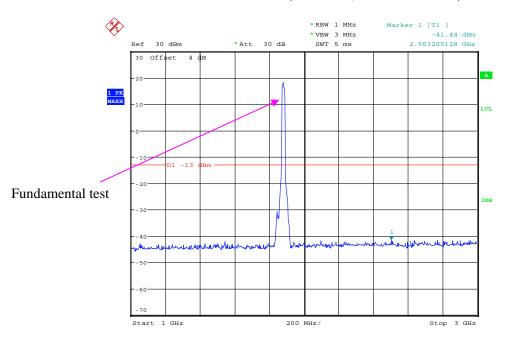

Date: 15.OCT.2017 17:01:59


3 GHz -26 GHz (20.0 MHz, Middle Channel)

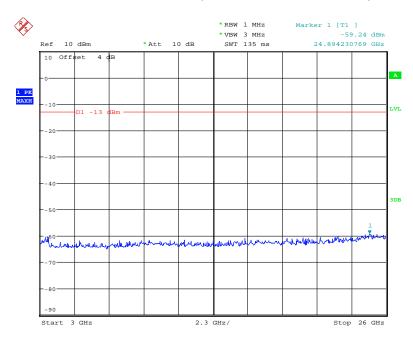

Date: 15.OCT.2017 17:06:20


LTE Band 4:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

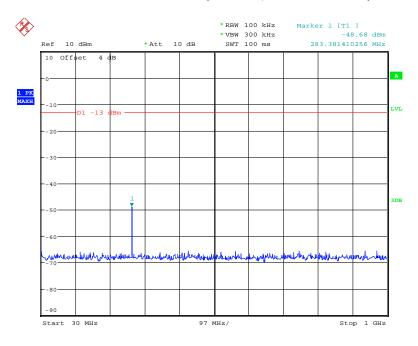


Date: 15.0CT.2017 16:50:18

1 GHz – 3 GHz (1.4 MHz, Middle Channel)

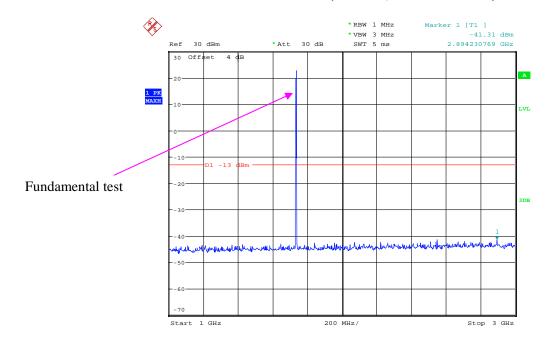


Date: 15.0CT.2017 17:04:24

3 GHz – 26 GHz (1.4 MHz, Middle Channel)

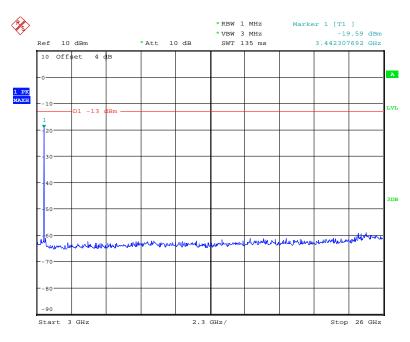


Date: 15.0CT.2017 17:04:48

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

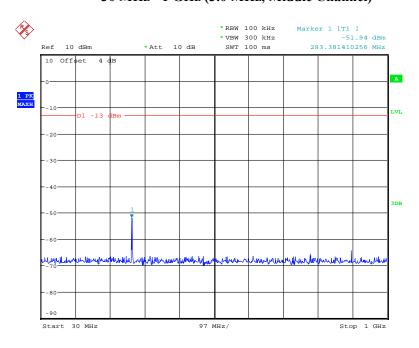


Date: 15.0CT.2017 16:50:55

1 GHz – 3 GHz (3.0 MHz, Middle Channel)

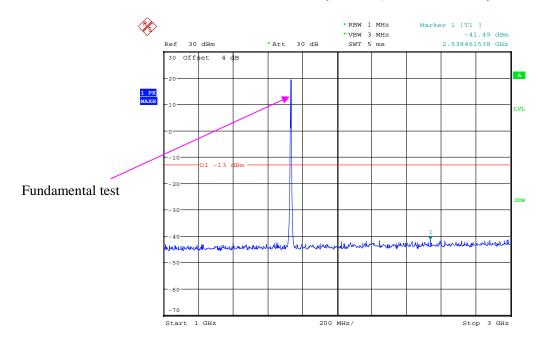


Date: 15.OCT.2017 17:03:52

3 GHz – 26 GHz (3.0 MHz, Middle Channel)

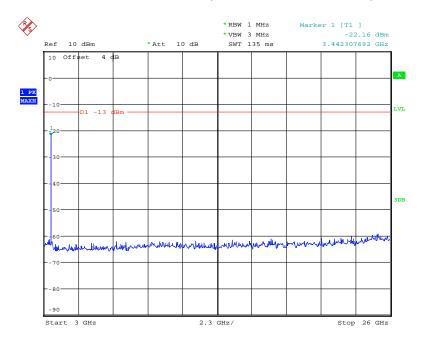


Date: 15.OCT.2017 17:05:04

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

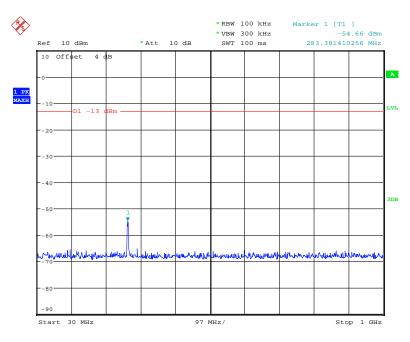


Date: 15.0CT.2017 16:51:12

1 GHz – 3 GHz (5.0 MHz, Middle Channel)

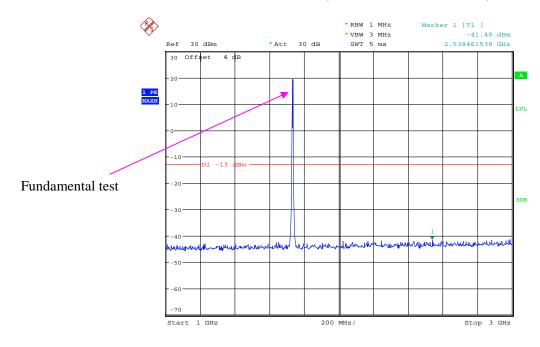


Date: 15.OCT.2017 17:03:52

3 GHz - 26 GHz (5.0 MHz, Middle Channel)

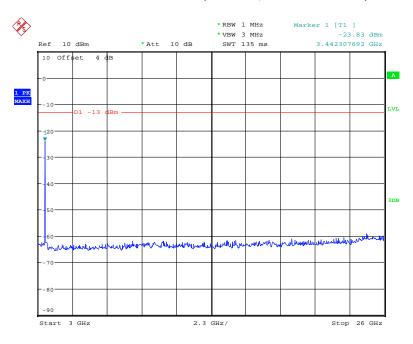


Date: 15.0CT.2017 17:05:17

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

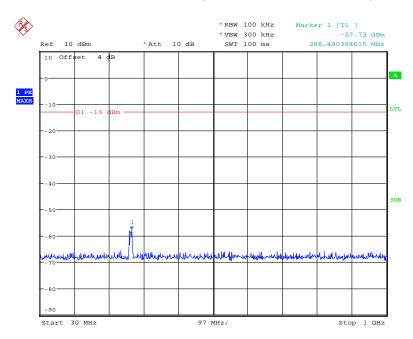


Date: 15.OCT.2017 16:51:30

1 GHz - 3 GHz (10.0 MHz, Middle Channel)

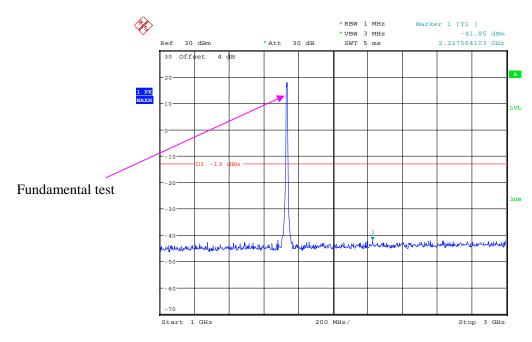


Date: 15.0CT.2017 17:03:04

3 GHz – 26 GHz (10.0 MHz, Middle Channel)

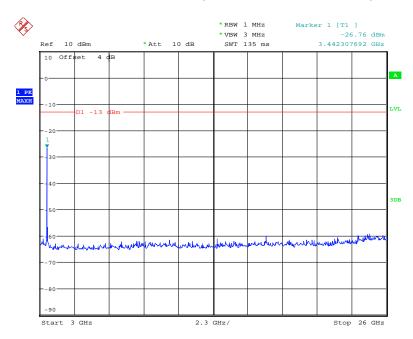


Date: 15.OCT.2017 17:05:28

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

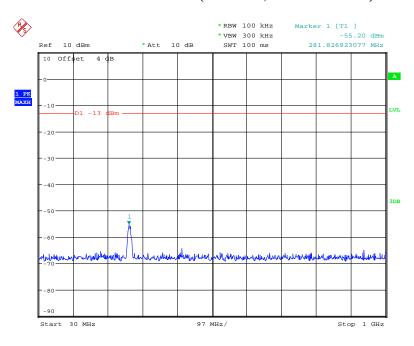


Date: 15.0CT.2017 16:51:47

1 GHz – 3 GHz (15.0 MHz, Middle Channel)

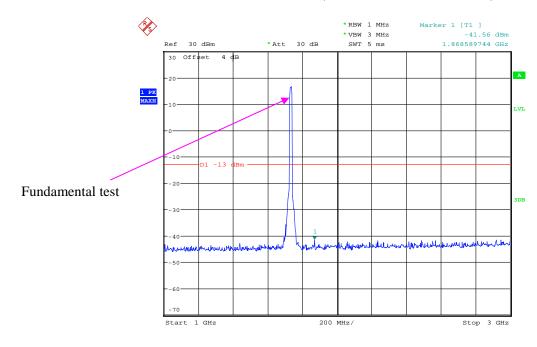


Date: 15.OCT.2017 17:02:49

3 GHz - 26 GHz (15.0 MHz, Middle Channel)

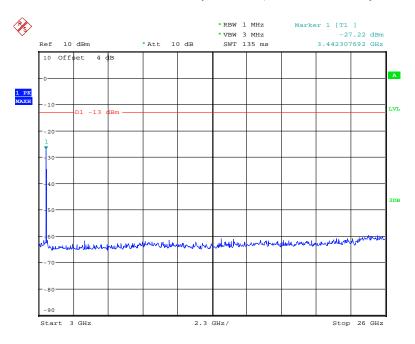


Date: 15.0CT.2017 17:05:40

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

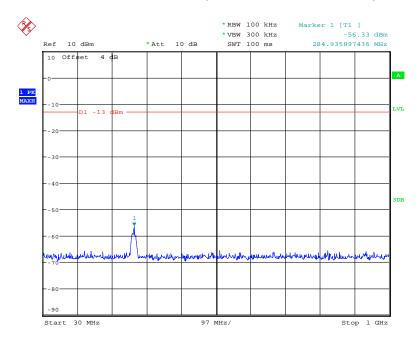


Date: 15.OCT.2017 16:52:03

1 GHz – 3 GHz (20.0 MHz, Middle Channel)

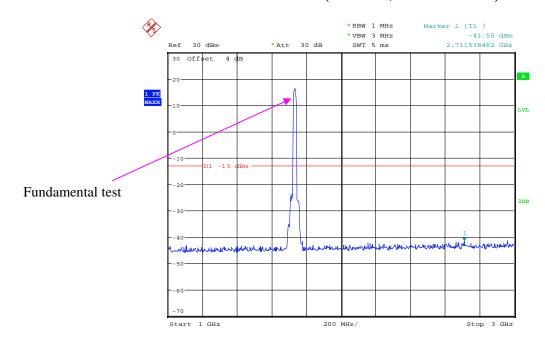

Date: 15.0CT.2017 17:02:27


3 GHz - 26 GHz (20.0 MHz, Middle Channel)

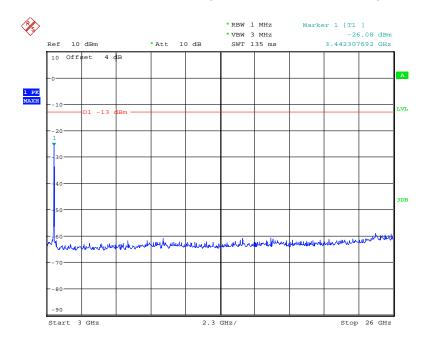

Date: 15.OCT.2017 17:05:52


LTE Band 12:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

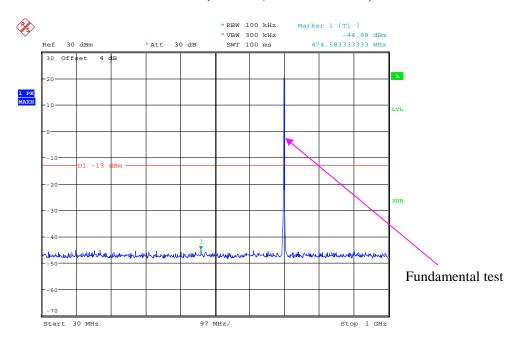


Date: 15.0CT.2017 16:55:13

1 GHz – 8 GHz (1.4 MHz, Middle Channel)

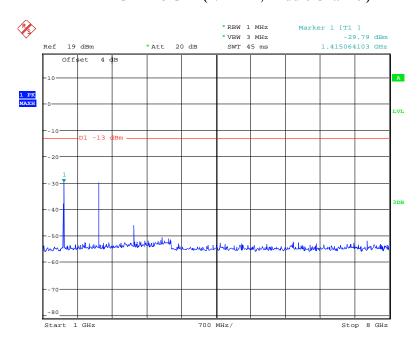


Date: 15.0CT.2017 16:58:19

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

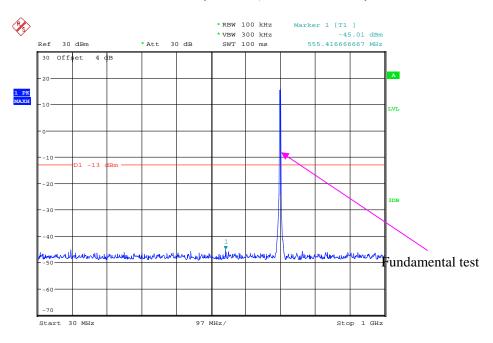


Date: 15.0CT.2017 16:55:45

1 GHz – 8 GHz (3.0 MHz, Middle Channel)

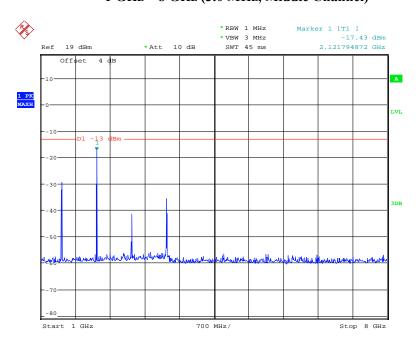


Date: 15.0CT.2017 16:57:59

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

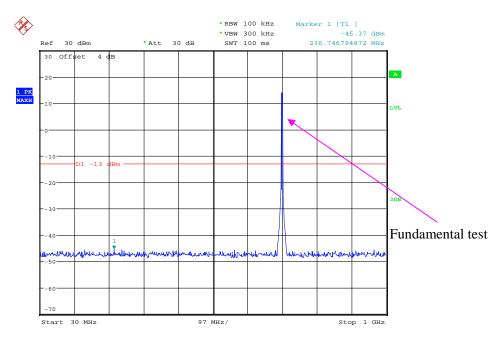


Date: 15.0CT.2017 16:56:15

1 GHz – 8 GHz (5.0 MHz, Middle Channel)

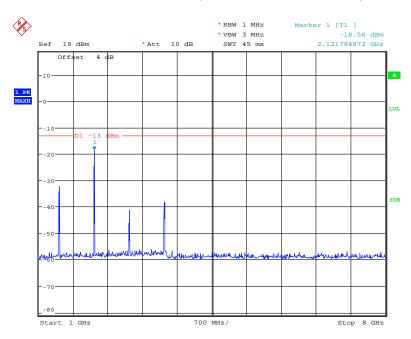


Date: 15.OCT.2017 16:57:48

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

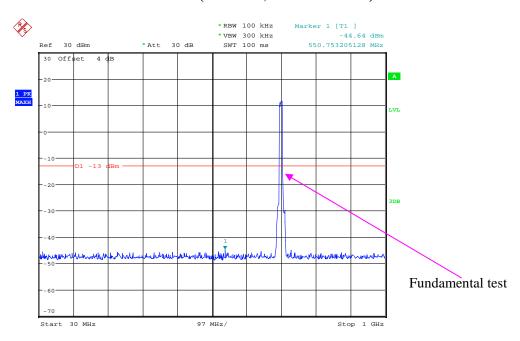

Date: 15.0CT.2017 16:56:42

1 GHz – 8 GHz (10.0 MHz, Middle Channel)

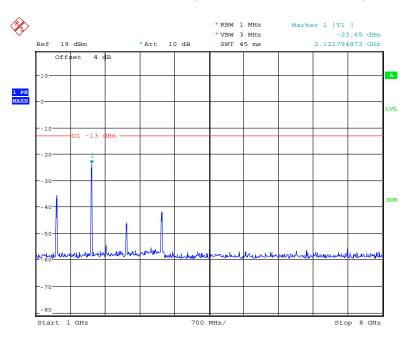

Date: 15.OCT.2017 16:57:37

Report No.: RSZ171011001-00B

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-10-27.

EUT operation mode: Transmitting

Report No.: RSZ171011001-00B

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ **10 GHz**:

Cellular Band (Part 22H)

	Receiver Turntable		Rx Antenna		Substituted			Absolute	FCC Part 22H	
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	WCDMA Mode, Middle channel									
400.27	34.25	154	1.6	Н	-33	0.67	0	-33.67	-13	20.67
400.27	33.45	219	1.0	V	-33.8	0.67	0	-34.47	-13	21.47
1673.20	51.53	96	1.5	Н	-55.5	1.30	9.10	-47.70	-13	34.70
1673.20	53.33	141	2.3	V	-53.1	1.30	9.10	-45.30	-13	32.30
2509.80	51.91	78	1.9	Н	-51.6	2.60	9.30	-44.90	-13	31.90
2509.80	47.32	50	1.1	V	-55.6	2.60	9.30	-48.90	-13	35.90
3346.40	44.65	345	1.8	Н	-55.7	1.50	9.60	-47.60	-13	34.60
3346.40	45.38	281	1.2	V	-55.0	1.50	9.60	-46.90	-13	33.90

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

- Receiver Tur		Turntable	Rx An	tenna	Substituted			Absolute	FCC Part 24E	
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
WCDMA Mode Band II, Middle channel										
400.27	33.29	111	1.5	Н	-33.9	0.67	0	-34.57	-13	21.57
400.27	32.14	333	2.2	V	-35.1	0.67	0	-35.77	-13	22.77
3760.00	42.11	71	2.0	Н	-59.1	1.50	9.70	-50.90	-13	37.90
3760.00	42.45	257	2.4	V	-58.3	1.50	9.70	-50.10	-13	37.10

30 MHz ~ 20 GHz:

AWS Band (Part 27)

Receiver Turntable		Rx Antenna		Substituted			Absolute	FCC Part 27		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
WCDMA Mode Band IV, Middle channel										
400.27	35.12	344	1.4	Н	-32.1	0.67	0	-32.77	-13	19.77
400.27	34.16	297	2.2	V	-33.1	0.67	0	-33.77	-13	20.77
3465.20	43.03	249	2.4	Н	-57.4	1.50	9.70	-49.20	-13	36.20
3465.20	44.37	291	1.8	V	-56.8	1.50	9.70	-48.60	-13	35.60

Frequency	Receiver	Turntable	Rx Antenna			Substitute	d	Absolute		
(MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
					Band 2					
	•		Test fro	equency	range:30 N	$Mz \sim 20$ (GHz			
399.88	32.15	229	1.7	Н	-35.1	0.67	0	-35.77	-13	22.77
399.88	33.45	12	2.2	V	-33.8	0.67	0	-34.47	-13	21.47
3760.00	42.81	227	2.3	Н	-58.4	1.50	9.70	-50.20	-13	37.20
3760.00	43.22	123	1.1	V	-57.5	1.50	9.70	-49.30	-13	36.30
Band 4										
Test frequency range:30 MHz ~ 18 GHz										
399.88	32.45	192	1.7	Н	-34.8	0.67	0	-35.47	-13	21.47
399.88	33.78	274	1.3	V	-33.5	0.67	0	-34.17	-13	21.17
3465.00	43.08	320	2.2	Н	-57.3	1.50	9.70	-49.10	-13	36.10
3465.00	44.67	262	1.9	V	-56.5	1.50	9.70	-48.30	-13	35.30
					Band 12					
			Test fre	equency	range: 30 N	MHz ~ 10 (GHz			
399.88	32.24	261	2.0	Н	-35	0.67	0	-35.67	-13	22.67
399.88	33.64	221	2.1	V	-33.6	0.67	0	-34.27	-13	21.27
1415.00	46.99	42	1.2	Н	-60.8	1.60	8.30	-54.10	-13	41.10
1415.00	48.05	165	1.0	V	-60.0	1.60	8.30	-53.30	-13	40.30
2122.50	48.92	43	1.9	Н	-53.2	1.30	8.80	-45.70	-13	32.70
2122.50	41.72	245	2.0	V	-61.2	1.30	8.80	-53.70	-13	40.70

Note:

1) Absolute Level = Substituted Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

Report No.: RSZ171011001-00B

FCC § 22.917 (a); § 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.


According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) dB$.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency



Test Data

Environmental Conditions


Temperature:	24~25°C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Kobe Li from 2017-10-12 to 2017-12-15.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

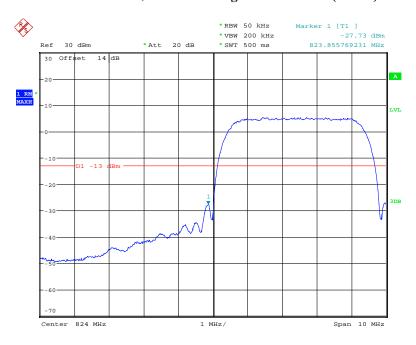


Date: 12.0CT.2017 21:23:36

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

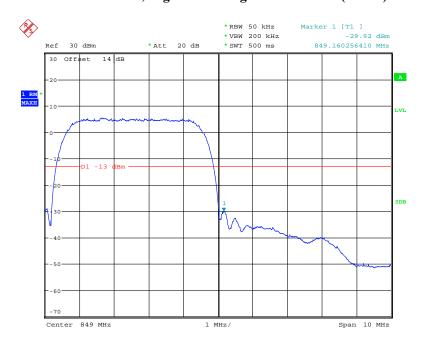


Date: 12.OCT.2017 21:26:17

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

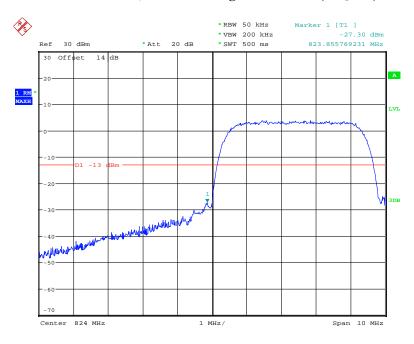


Date: 12.OCT.2017 21:14:56

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

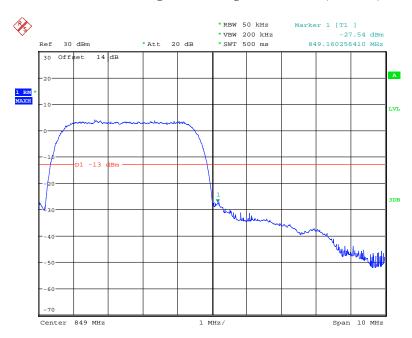


Date: 12.OCT.2017 21:50:08

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

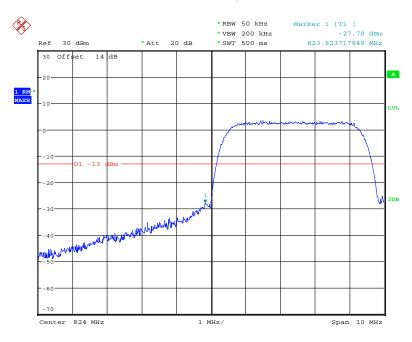


Date: 12.OCT.2017 21:18:15

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

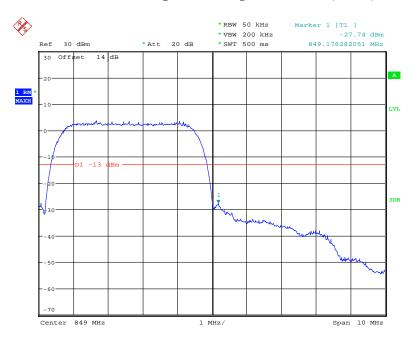


Date: 12.OCT.2017 21:17:36

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

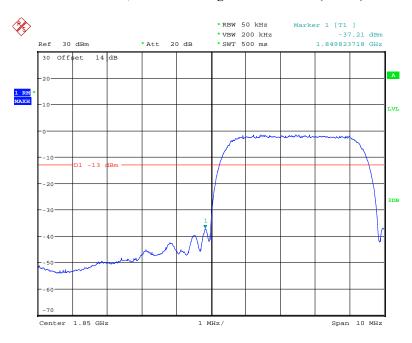


Date: 12.0CT.2017 21:54:38

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

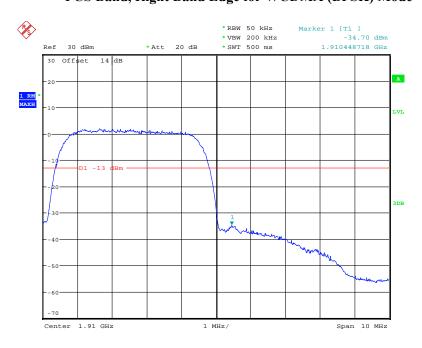


Date: 12.0CT.2017 21:55:07

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

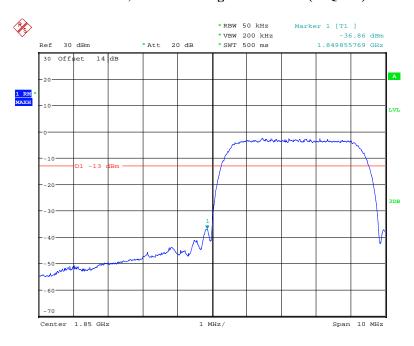


Date: 12.OCT.2017 22:01:40

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

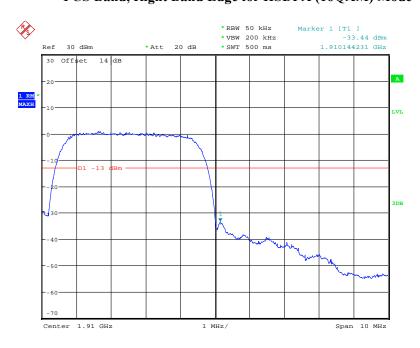


Date: 12.0CT.2017 22:00:29

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

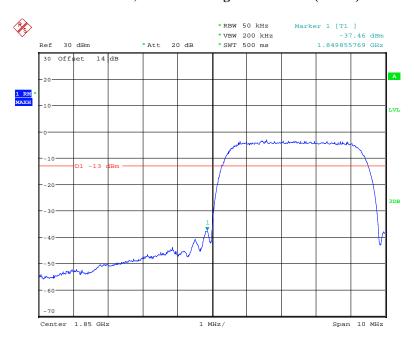


Date: 12.OCT.2017 22:03:09

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

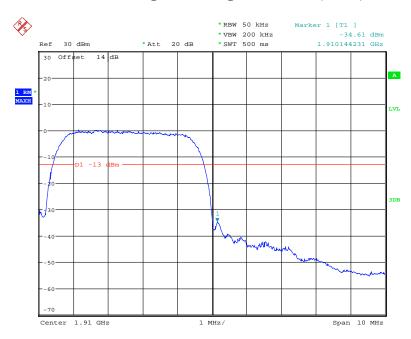


Date: 12.OCT.2017 22:06:21

AWS Band, Left Band Edge for WCDMA (BPSK) Mode

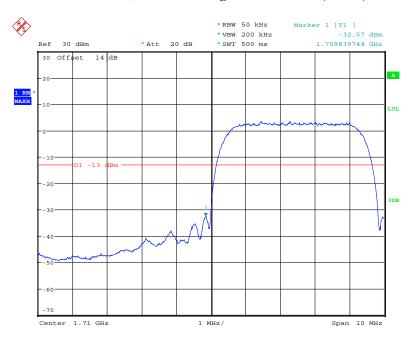


Date: 12.0CT.2017 21:30:56

AWS Band, Right Band Edge for WCDMA (BPSK) Mode

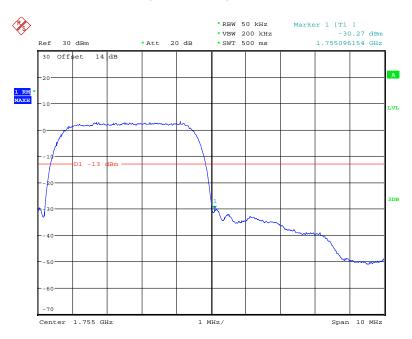


Date: 12.0CT.2017 21:32:53

AWS Band, Left Band Edge for HSDPA (16QAM) Mode

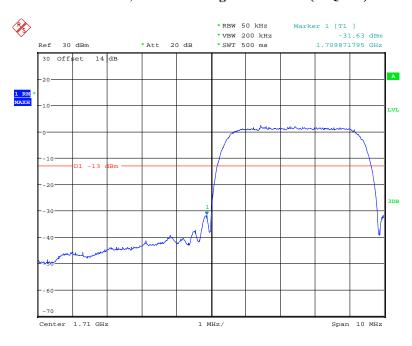


Date: 12.OCT.2017 21:44:37

AWS Band, Right Band Edge for HSDPA (16QAM) Mode

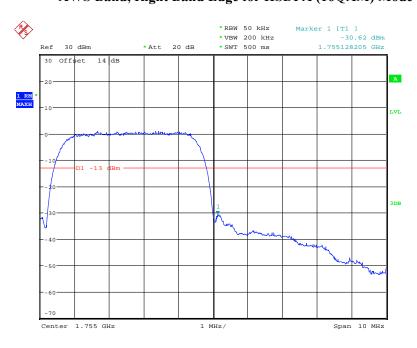

Date: 12.0CT.2017 21:45:11

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

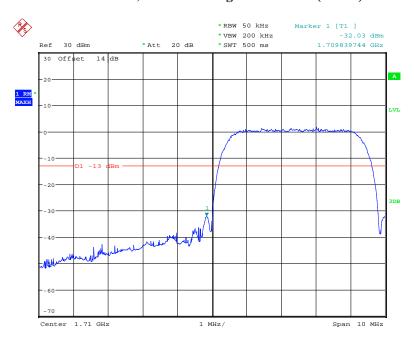

Date: 12.OCT.2017 21:42:05


AWS Band, Right Band Edge for HSUPA (BPSK) Mode



Date: 12.OCT.2017 21:41:17


Band 2:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

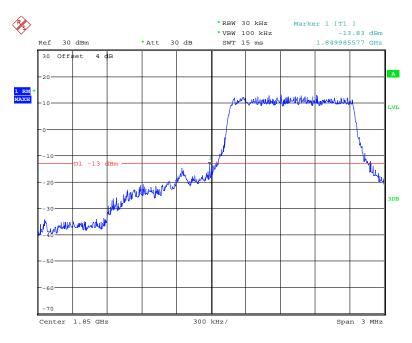


Date: 15.0CT.2017 16:21:03

QPSK (1.4 MHz, FULL RB) - Right Band Edge

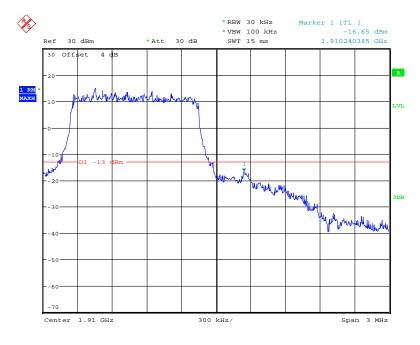


Date: 15.OCT.2017 16:21:33

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

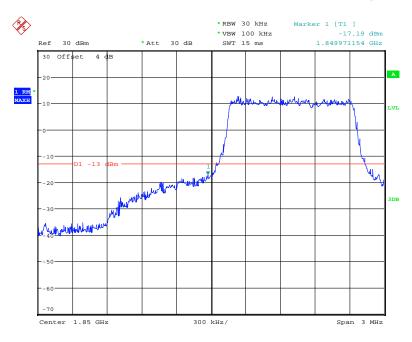


Date: 15.0CT.2017 16:20:36

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

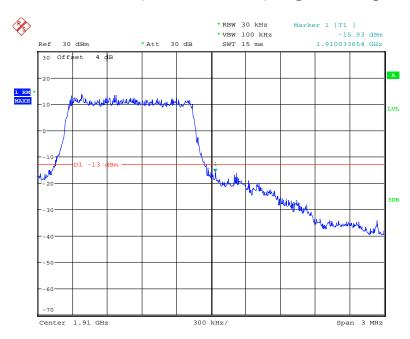


Date: 15.OCT.2017 16:22:03

QPSK (3.0 MHz, FULL RB) - Left Band Edge

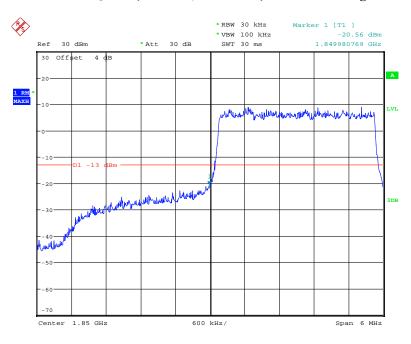


Date: 15.OCT.2017 16:24:28

QPSK (3.0 MHz, FULL RB) - Right Band Edge

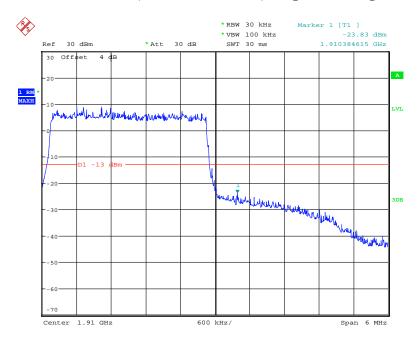


Date: 15.OCT.2017 16:23:05

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

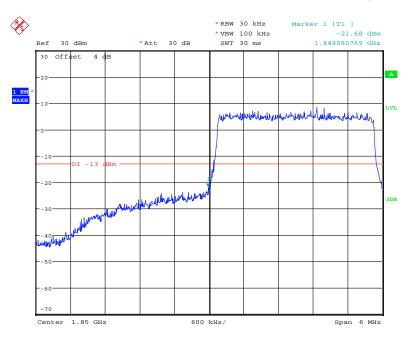


Date: 15.0CT.2017 16:23:54

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

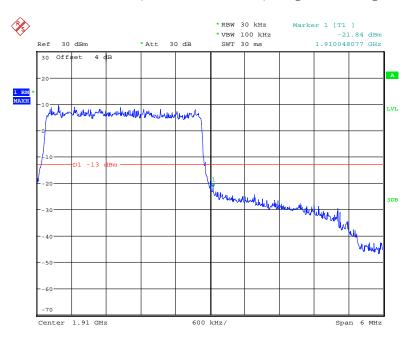


Date: 15.OCT.2017 16:22:41

QPSK (5.0 MHz, FULL RB) - Left Band Edge

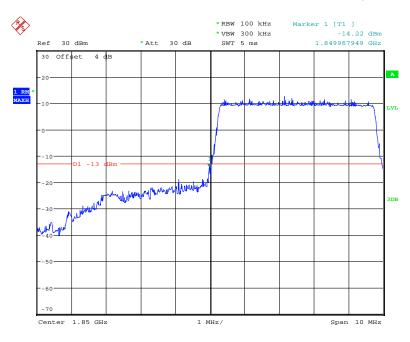


Date: 15.0CT.2017 16:25:06

QPSK (5.0 MHz, FULL RB) - Right Band Edge

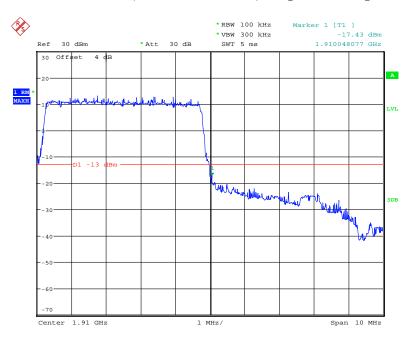


Date: 15.OCT.2017 16:25:51

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

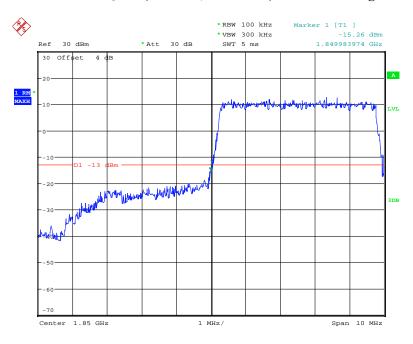


Date: 15.0CT.2017 16:25:25

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

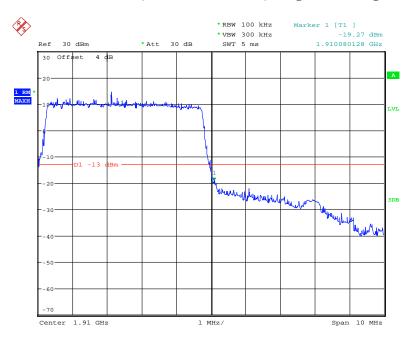


Date: 15.OCT.2017 16:26:46

QPSK (10.0 MHz, FULL RB) - Left Band Edge

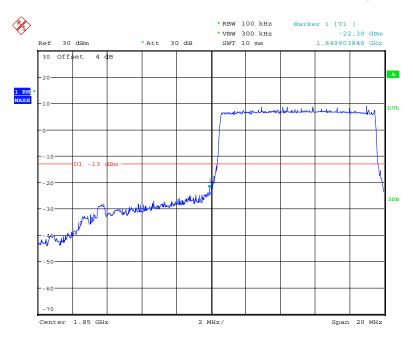


Date: 15.0CT.2017 16:28:40

QPSK (10.0 MHz, FULL RB) - Right Band Edge

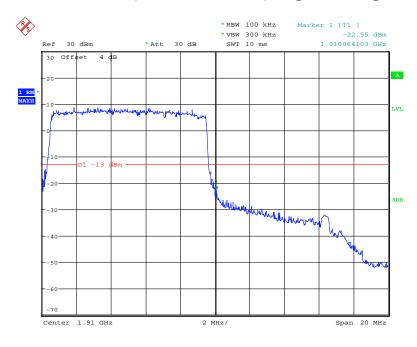


Date: 15.OCT.2017 16:28:01

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

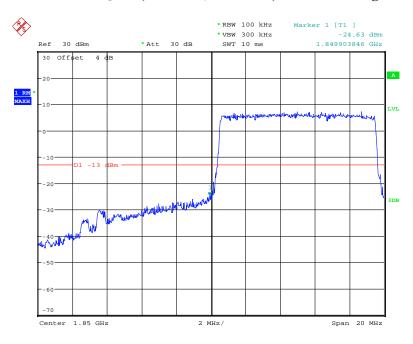


Date: 15.0CT.2017 16:28:59

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

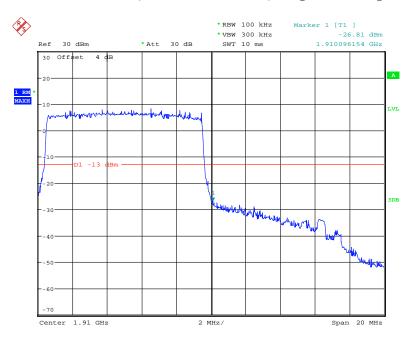


Date: 15.OCT.2017 16:27:19

QPSK (15.0 MHz, FULL RB) - Left Band Edge

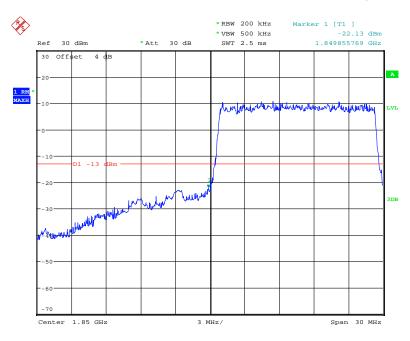


Date: 15.0CT.2017 16:29:56

QPSK (15.0 MHz, FULL RB) - Right Band Edge

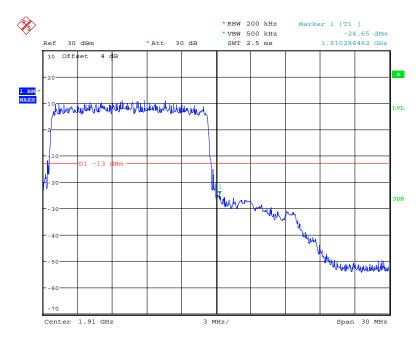


Date: 15.OCT.2017 16:31:15

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

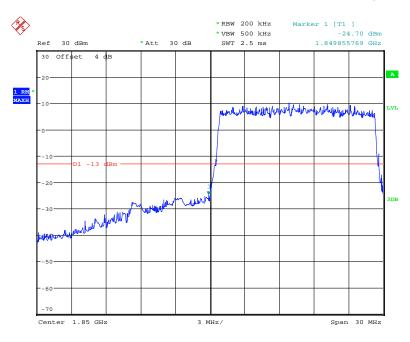


Date: 15.0CT.2017 16:30:21

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

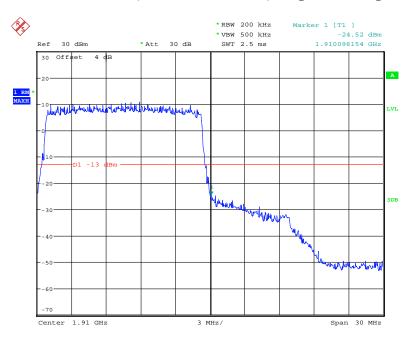


Date: 15.OCT.2017 16:30:59

QPSK (20.0 MHz, FULL RB) - Left Band Edge

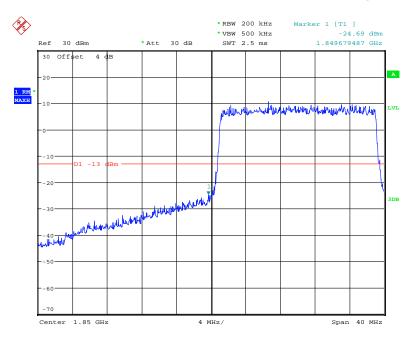


Date: 15.0CT.2017 16:33:04

QPSK (20.0 MHz, FULL RB) - Right Band Edge

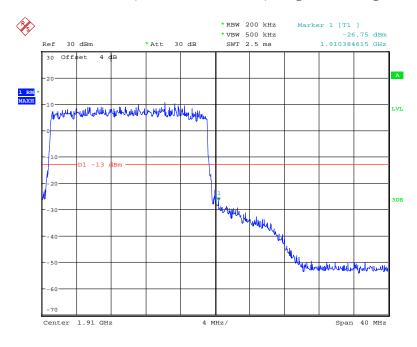


Date: 15.OCT.2017 16:31:37

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

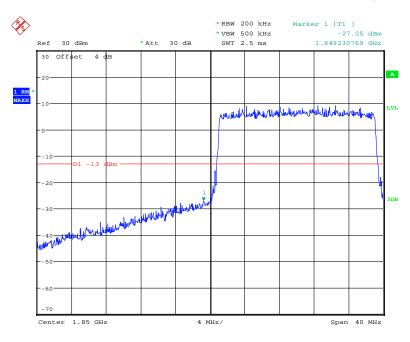

Date: 15.OCT.2017 16:32:39


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

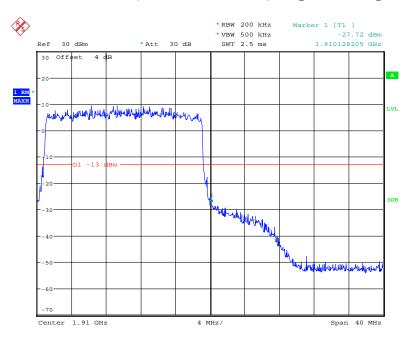

Date: 15.OCT.2017 16:32:07


Band 4:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

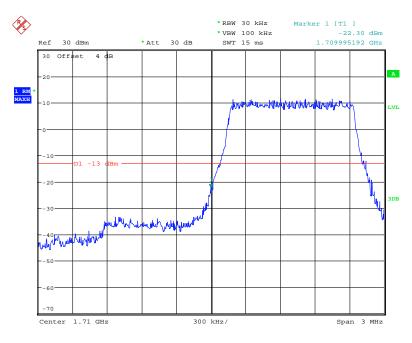


Date: 15.0CT.2017 16:34:55

QPSK (1.4 MHz, FULL RB) - Right Band Edge

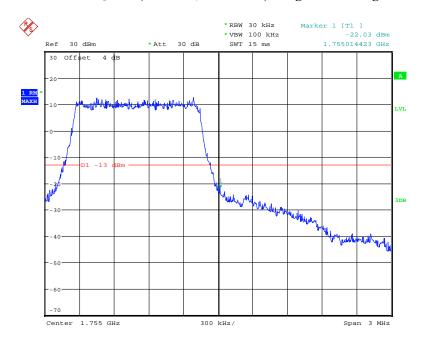


Date: 15.0CT.2017 16:35:20

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

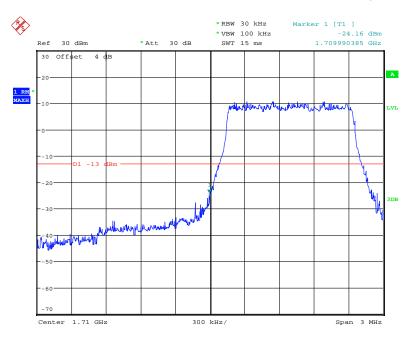


Date: 15.0CT.2017 16:34:32

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

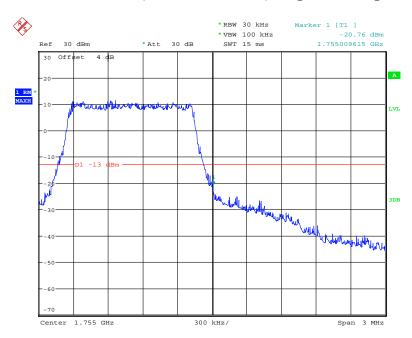


Date: 15.OCT.2017 16:35:42

QPSK (3.0 MHz, FULL RB) - Left Band Edge

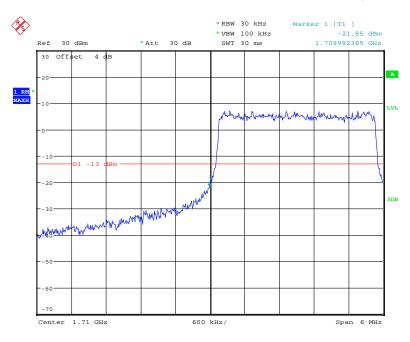


Date: 13.DEC.2017 21:49:50

QPSK (3.0 MHz, FULL RB) - Right Band Edge

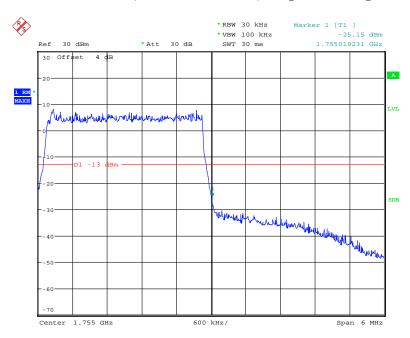


Date: 15.OCT.2017 16:36:19

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

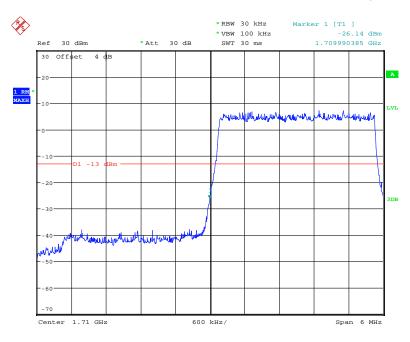


Date: 15.OCT.2017 16:38:04

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

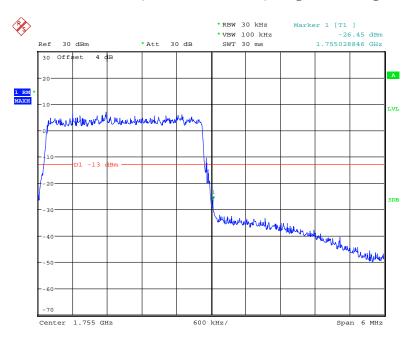


Date: 15.OCT.2017 16:36:45

QPSK (5.0 MHz, FULL RB) - Left Band Edge

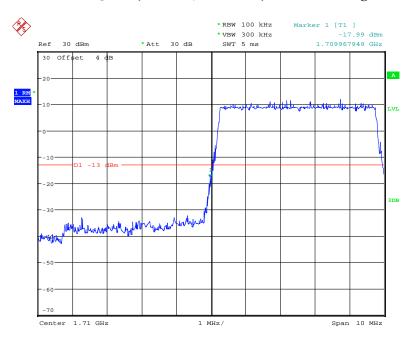


Date: 15.0CT.2017 16:39:08

QPSK (5.0 MHz, FULL RB) - Right Band Edge

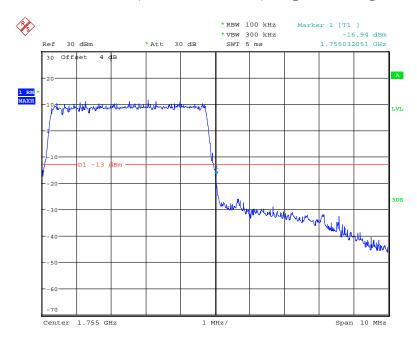


Date: 15.OCT.2017 16:39:36

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

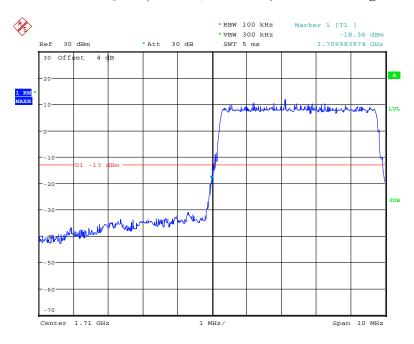


Date: 15.0CT.2017 16:38:47

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

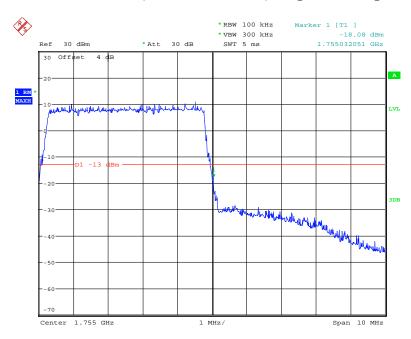


Date: 15.OCT.2017 16:39:54

QPSK (10.0 MHz, FULL RB) - Left Band Edge

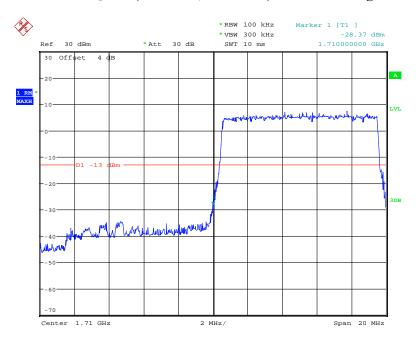


Date: 15.OCT.2017 16:41:03

QPSK (10.0 MHz, FULL RB) - Right Band Edge

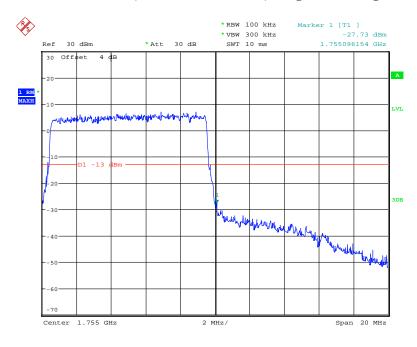


Date: 15.OCT.2017 16:40:36

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

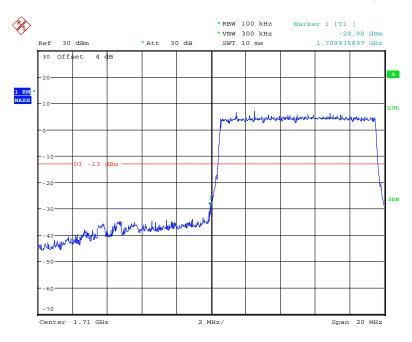


Date: 15.0CT.2017 16:41:26

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

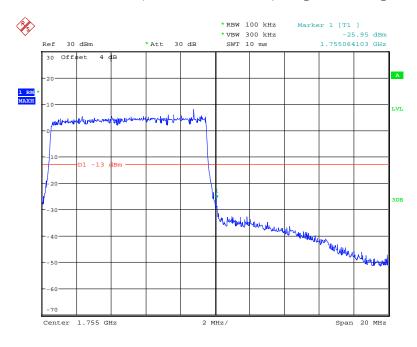


Date: 15.OCT.2017 16:40:20

QPSK (15.0 MHz, FULL RB) - Left Band Edge

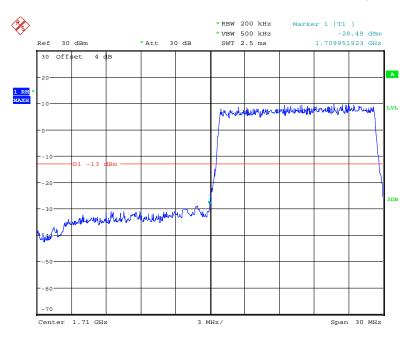


Date: 15.0CT.2017 16:42:13

QPSK (15.0 MHz, FULL RB) - Right Band Edge

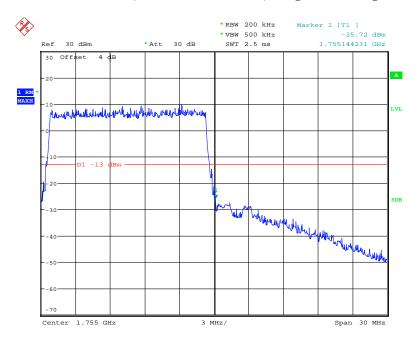


Date: 15.OCT.2017 16:44:19

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

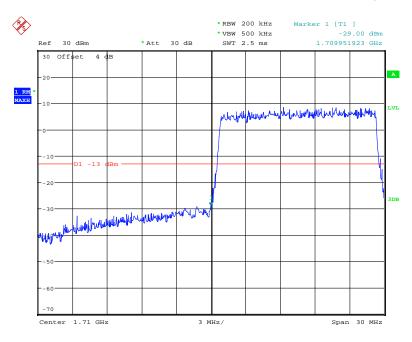


Date: 15.OCT.2017 16:42:42

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

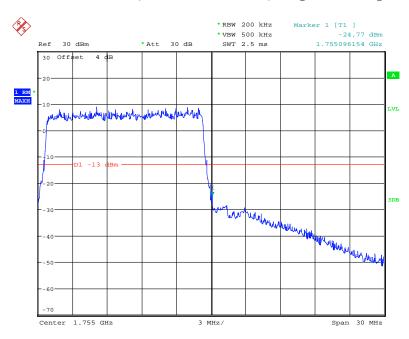


Date: 15.OCT.2017 16:43:49

QPSK (20.0 MHz, FULL RB) - Left Band Edge

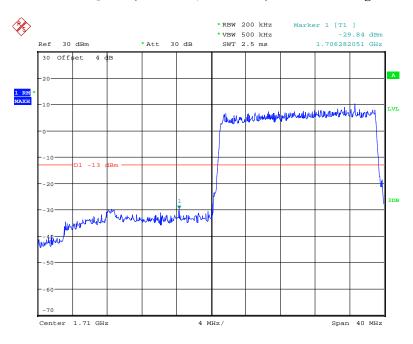


Date: 15.0CT.2017 16:46:13

QPSK (20.0 MHz, FULL RB) - Right Band Edge

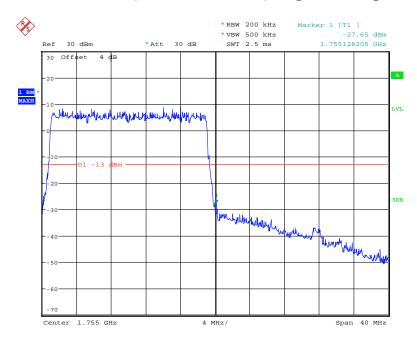


Date: 15.OCT.2017 16:44:45

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

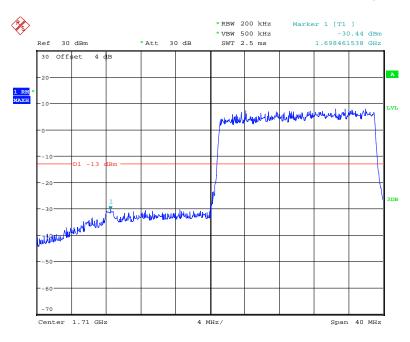

Date: 15.OCT.2017 16:45:39


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

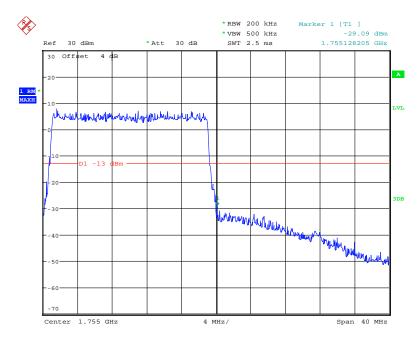

Date: 15.OCT.2017 16:45:11


Band 12:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

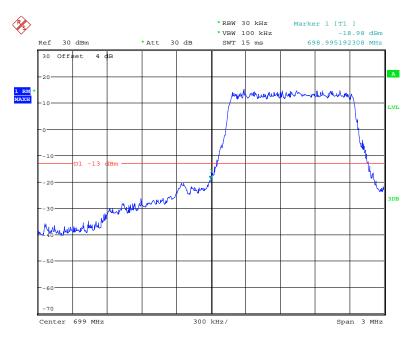


Date: 15.OCT.2017 16:14:56

QPSK (1.4 MHz, FULL RB) - Right Band Edge

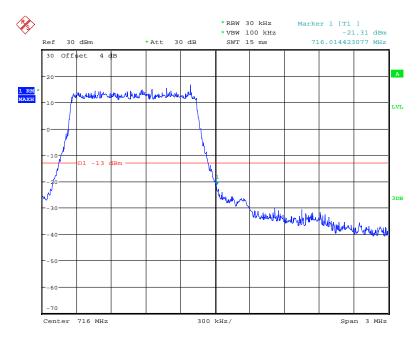


Date: 15.0CT.2017 16:15:21

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

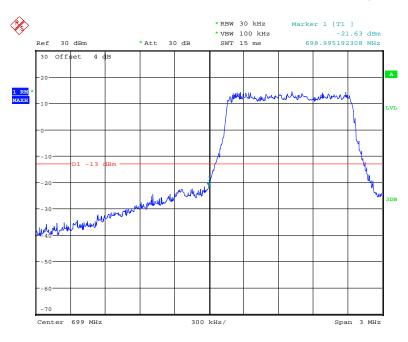


Date: 15.0CT.2017 16:14:24

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

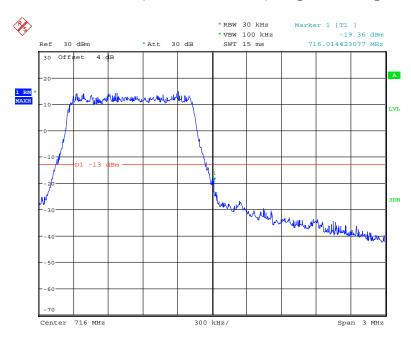


Date: 15.OCT.2017 16:15:41

QPSK (3.0 MHz, FULL RB) - Left Band Edge

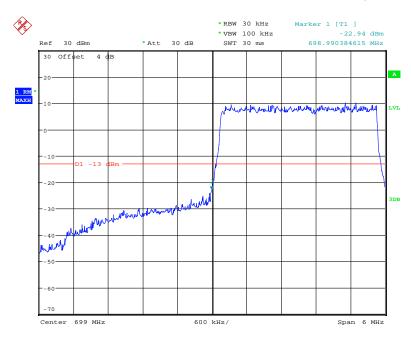


Date: 15.0CT.2017 16:13:48

QPSK (3.0 MHz, FULL RB) - Right Band Edge

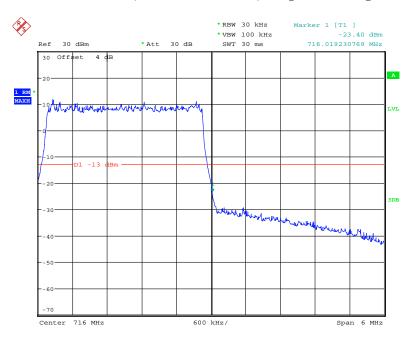


Date: 15.OCT.2017 16:11:49

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

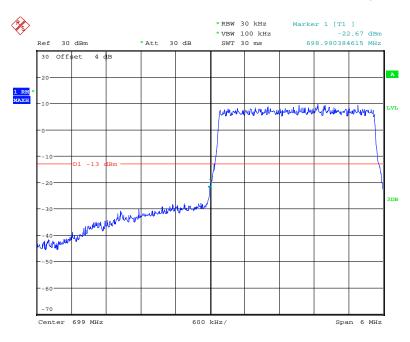


Date: 15.OCT.2017 16:13:19

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

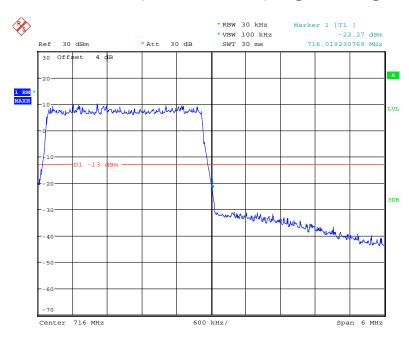


Date: 15.OCT.2017 16:12:47

QPSK (5.0 MHz, FULL RB) - Left Band Edge

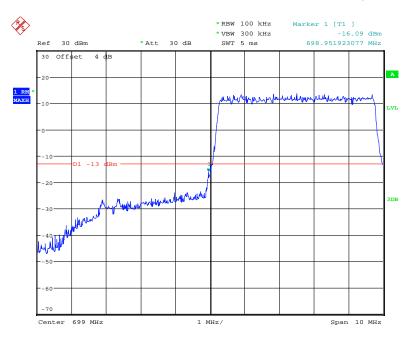


Date: 15.0CT.2017 16:17:15

QPSK (5.0 MHz, FULL RB) - Right Band Edge

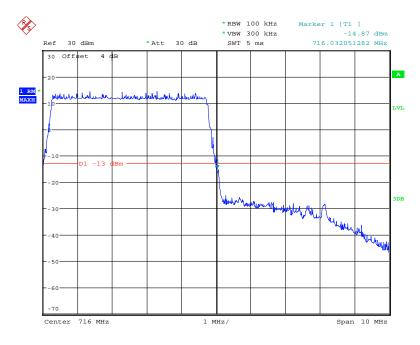


Date: 15.OCT.2017 16:16:40

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

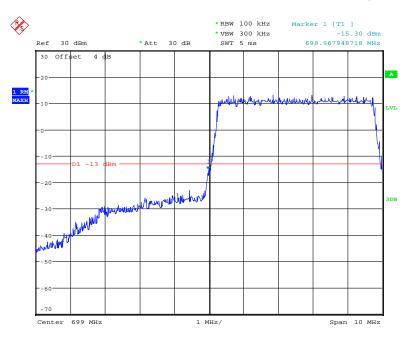


Date: 15.0CT.2017 16:17:35

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

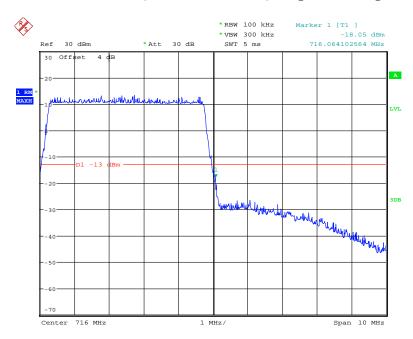


Date: 15.OCT.2017 16:16:15

QPSK (10.0 MHz, FULL RB) - Left Band Edge

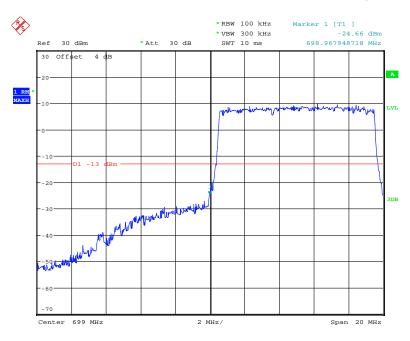


Date: 15.0CT.2017 16:18:30

QPSK (10.0 MHz, FULL RB) - Right Band Edge

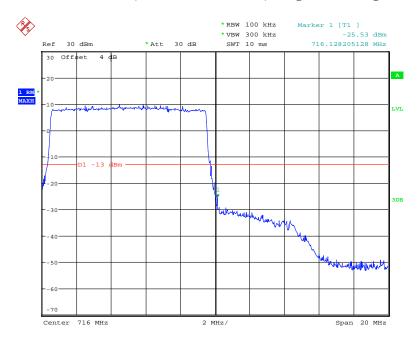


Date: 15.OCT.2017 16:19:02

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

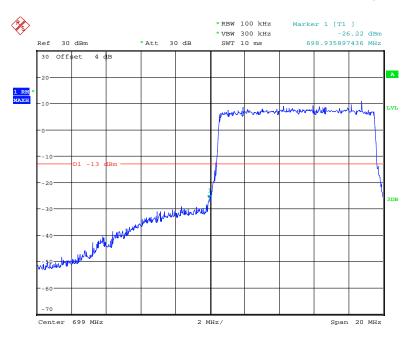

Date: 15.0CT.2017 16:18:06

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

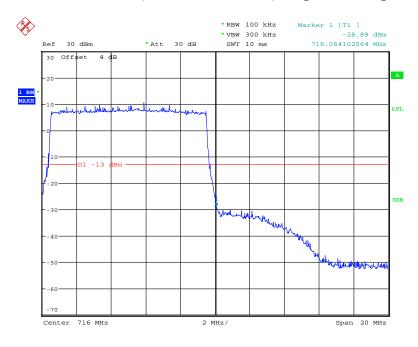

Date: 15.OCT.2017 16:19:34

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tole	erance for '	Transmitters	in the	Public	Mobile Servic	es
----------------	--------------	--------------	--------	--------	---------------	----

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-10-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Report No.: RSZ171011001-00B

Cellular Band (Part 22H)

WCDMA Mode

	Middle Channel, f _o =836.6MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30		2	0.002391	2.5		
-20		-1	-0.001195	2.5		
-10		-3	-0.003586	2.5		
0	120	1	0.001195	2.5		
10		2	0.002391	2.5		
20		0	0.000000	2.5		
30		-1	-0.001195	2.5		
40		3	0.003586	2.5		
50		1	0.001195	2.5		
25	V min.= 102	4	0.004781	2.5		
25	V max.= 138	6	0.007172	2.5		

PCS Band (Part 24E)

WCDMA Mode

	Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		2	0.001064	pass		
-20		-1	-0.000532	pass		
-10		2	0.001064	pass		
0		-2	-0.001064	pass		
10	120	-3	-0.001596	pass		
20		2	0.001064	pass		
30		-1	-0.000532	pass		
40		4	0.002128	pass		
50		5	0.002660	pass		
25	V min.= 102	3	0.001596	pass		
	V max.= 138	6	0.003191	pass		

AWS Band (Part 27)

WCDMA Mode

	Middle Channel, f ₀ =1732.6MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		3	0.00173	pass		
-20		1	0.00058	pass		
-10		2	0.00115	pass		
0		-3	-0.00173	pass		
10	120	0	0.00000	pass		
20		1	0.00058	pass		
30		-2	-0.00115	pass		
40		3	0.00173	pass		
50		4	0.00231	pass		
25	V min.= 102	5	0.00289	pass		
25	V max.= 138	8	0.00462	pass		

LTE: QPSK:

Band 2:

	QPSK 10.0 MHz Middle Channel, f ₀ =1880MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		2	0.001064	pass		
-20		-4	-0.002128	pass		
-10		2	0.001064	pass		
0		-3	-0.001596	pass		
10	120	-1	-0.000532	pass		
20		1	0.000532	pass		
30		-2	-0.001064	pass		
40		3	0.001596	pass		
50		6	0.003191	pass		
20	V min.= 102	5	0.002660	pass		
20	V max.= 138	9	0.004787	pass		

QPSK 10.0 MHz Middle Channel, f _o =1732.5 MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		2	0.00115	pass	
-20] [1	0.00058	pass	
-10] [-1	-0.00058	pass	
0	1	1	0.00058	pass	
10	120	0	0.00000	pass	
20] [1	0.00058	pass	
30	1	-2	-0.00115	pass	
40	1	2	0.00115	pass	
50		4	0.00231	pass	
20	V min.= 102	6	0.00346	pass	
20	V max.= 138	9	0.00519	pass	

Band 12:

	QPSK 10.0 MHz Middle Channel, f ₀ =707.5 MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		3	0.00424	pass		
-20		2	0.00283	pass		
-10]	4	0.00566	pass		
0		-1	-0.00141	pass		
10	120	2	0.00283	pass		
20		1	0.00141	pass		
30]	-2	-0.00283	pass		
40		4	0.00566	pass		
50		6	0.00848	pass		
20	V min.= 102	4	0.00566	pass		
20	V max.= 138	9	0.01273	pass		

Report No.: RSZ171011001-00B

16QAM:

Band 2:

	16QAM 10.0 MHz Middle Channel, f ₀ =1880MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		1	0.000532	1		
-20		2	0.001064	2		
-10		-1	-0.000532	-1		
0		1	0.000532	1		
10	120	-2	-0.001064	-2		
20		-1	-0.000532	-1		
30		2	0.001064	2		
40		-2	-0.001064	-2		
50		-1	-0.000532	-1		
20	V min.= 102	2	0.001064	pass		
20	V max.= 138	-1	-0.000532	pass		

Band 4:

	16QAM 10.0 MHz Middle Channel, f ₀ =1732.5 MHz					
Temperature (°C)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		1	0.000577	pass		
-20		-1	-0.000577	pass		
-10		-2	-0.001154	pass		
0		-1	-0.000577	pass		
10	120	2	0.001154	pass		
20		1	0.000577	pass		
30		-1	-0.000577	pass		
40		2	0.001154	pass		
50		-2	-0.001154	pass		
20	V min.= 102	2	0.001154	pass		
20	V max.= 138	1	0.000577	pass		

	16QAM 10.0 MHz Middle Channel, f _o =707.5 MHz					
Temperature (℃)	Voltage Supplied (Vac)	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		3	0.004240	pass		
-20		1	0.001413	pass		
-10		2	0.002827	pass		
0		-1	-0.001413	pass		
10	120	1	0.001413	pass		
20		3	0.004240	pass		
30		-2	-0.002827	pass		
40		2	0.002827	pass		
50		1	0.001413	pass		
20	V min.= 102	1	0.001413	pass		
20	V max.= 138	2	0.002827	pass		

***** END OF REPORT *****

Report No.: RSZ171011001-00B