



**FCC CFR47 PART 15 SUBPART C**

**Bluetooth Low Energy**

**CERTIFICATION TEST REPORT**

**FOR**

**AIRWAY CLEARANCE SYSTEM**

**PRODUCT NAME: PMACS1WI**

**FCC ID: 2AJKO-PMACS1WI**

**REPORT NUMBER: 4787592605-E2V2**

**ISSUE DATE: DEC 26, 2016**

*Prepared for*

**Hill-Rom Services Private Limited  
1 Yishun Avenue 7, 768923, Singapore**

*Prepared by*

**UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433**



Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u>          | <u>Revised By</u> |
|-------------|-------------------|---------------------------|-------------------|
| V1          | 12/21/16          | Initial issue             | Junwhan Lee       |
| V2          | 12/26/16          | Addressed TCB's questions | Junwhan Lee       |

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b>                 | <b>5</b>  |
| <b>2. TEST METHODOLOGY</b>                            | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION</b>                | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY</b>                 | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION                 | 6         |
| 4.2. SAMPLE CALCULATION                               | 6         |
| 4.3. MEASUREMENT UNCERTAINTY                          | 6         |
| <b>5. EQUIPMENT UNDER TEST</b>                        | <b>7</b>  |
| 5.1. DESCRIPTION OF EUT                               | 7         |
| 5.2. MAXIMUM OUTPUT POWER                             | 7         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS                | 7         |
| 5.4. WORST-CASE CONFIGURATION AND MODE                | 7         |
| 5.5. DESCRIPTION OF TEST SETUP                        | 8         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT</b>              | <b>10</b> |
| <b>7. MEASUREMENT METHODS</b>                         | <b>11</b> |
| <b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS</b> | <b>11</b> |
| 8.1. ON TIME AND DUTY CYCLE RESULTS                   | 11        |
| <b>9. SUMMARY TABLE</b>                               | <b>12</b> |
| <b>10. ANTENNA PORT TEST RESULTS</b>                  | <b>13</b> |
| 10.1. 6 dB BANDWIDTH                                  | 13        |
| 10.2. 99% BANDWIDTH                                   | 15        |
| 10.3. OUTPUT POWER                                    | 17        |
| 10.4. AVERAGE POWER                                   | 19        |
| 10.5. PSD   | 20        |
| 10.6. CONDUCTED SPURIOUS EMISSIONS                    | 22        |
| <b>11. RADIATED TEST RESULTS</b>                      | <b>26</b> |
| 11.1. LIMITS AND PROCEDURE                            | 26        |
| 11.2. TRANSMITTER ABOVE 1 GHz                         | 28        |
| 11.3. WORST-CASE BELOW 1 GHz                          | 38        |

---

|            |  |           |
|------------|--|-----------|
| <b>12.</b> | <b>AC POWER LINE CONDUCTED EMISSIONS .....</b> | <b>40</b> |
| <b>13.</b> | <b>SETUP PHOTOS .....</b>                      | <b>45</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Hill-Rom Services Private Limited  
**EUT DESCRIPTION:** Airway Clearance System  
**PRODUCT NAME:** PMACS1WI  
**SERIAL NUMBER:** PREDVM0036 (RADIATED & CONDUCTED)  
**DATE TESTED:** OCT 07, 2016 - DEC 21, 2016

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass         |

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 218 Maeyeong-ro                     |           |
|-------------------------------------|-----------|
| <input checked="" type="checkbox"/> | Chamber 1 |
| <input type="checkbox"/>            | Chamber 2 |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 2.32 dB     |
| Radiated Disturbance, Below 1GHz      | 4.14 dB     |
| Radiated Disturbance, Above 1 GHz     | 5.97 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Airway Clearance System with DTS/UNII a/b/g/n and BT/BLE features.  
This test report addresses the DTS (BLE) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

| Frequency Range [MHz] | Mode | Power Mode | Output Power [dBm] | Output Power [mW] |
|-----------------------|------|------------|--------------------|-------------------|
| 2402 - 2480           | BLE  | Peak       | 4.54               | 2.85              |
|                       |      | Average    | 4.03               | 2.53              |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an Chip antenna, with a maximum gain of 0.5 dBi

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |  |               |               |        |
|------------------------|--|---------------|---------------|--------|
| Description            | Manufacturer                               | Model         | Serial Number | FCC ID |
| Adapter                | SHENZHEN<br>MEGMEET<br>ELECTRICAL CO., LTD | MANGO120-24CK | 8801631000045 | N/A    |

### I/O CABLES


| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | Mini-DIN       | Shielded   | 1.2m             | N/A     |

### TEST SETUP

The EUT is a stand-alone unit during the tests.  
Test software exercised the EUT to enable BLE mode.



**SETUP DIAGRAM FOR TESTS**

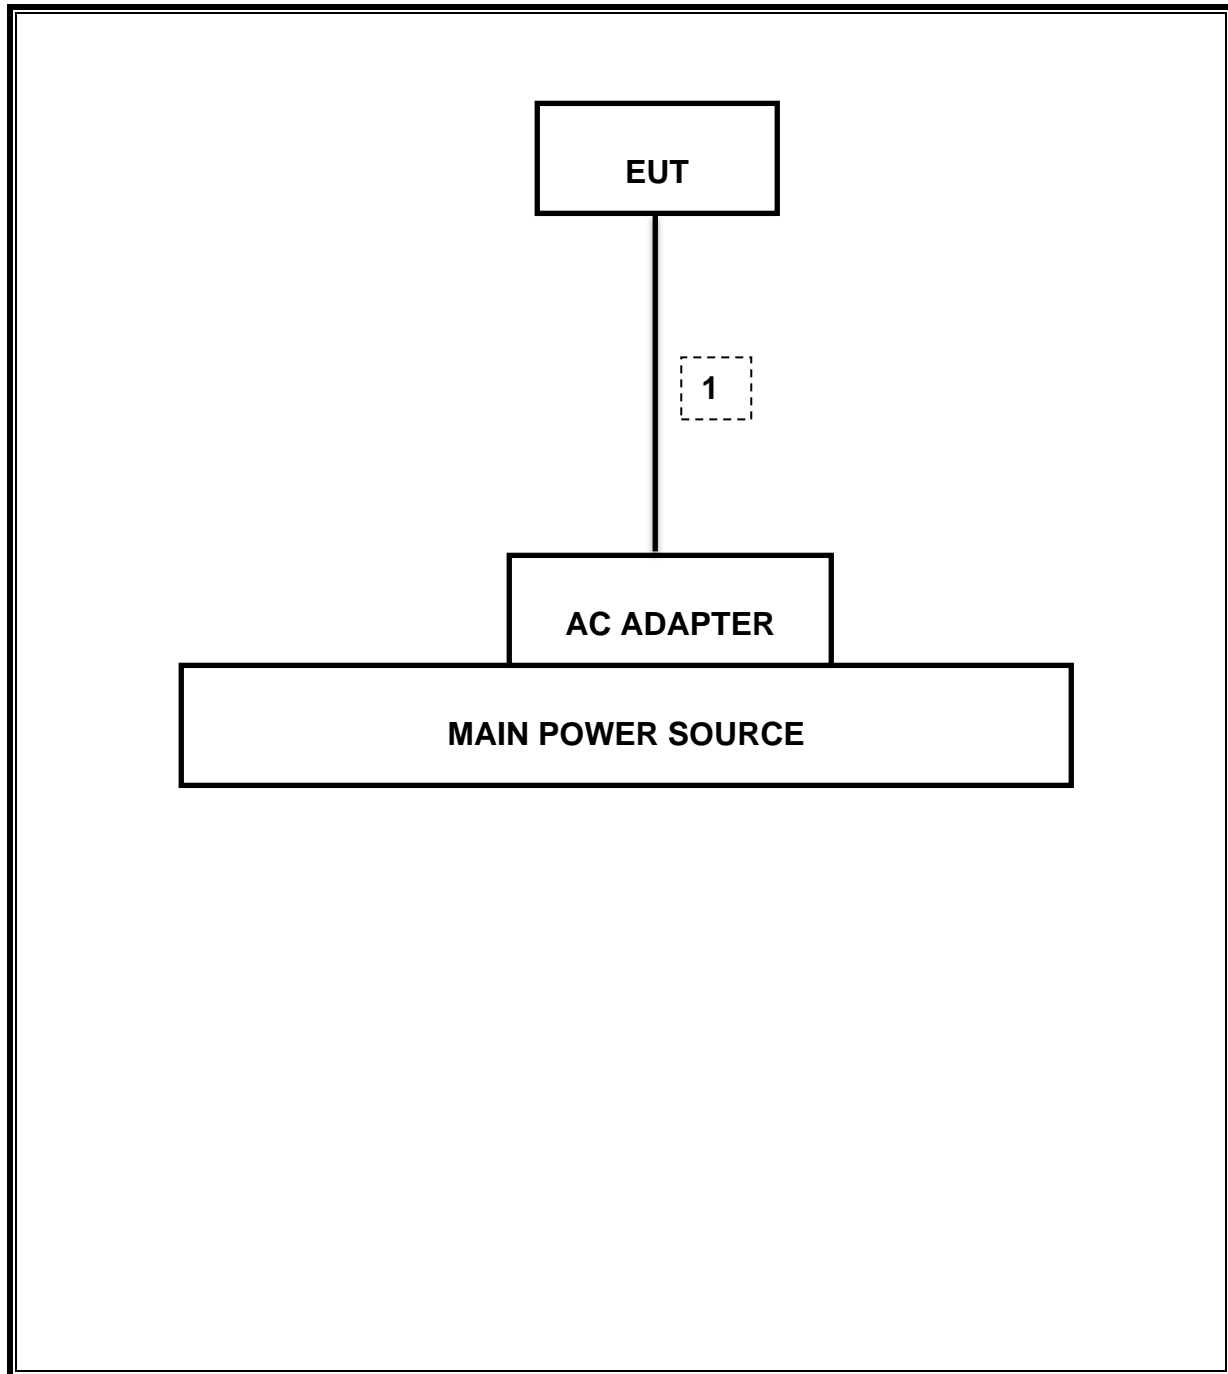

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List        |               |                        |             |          |
|----------------------------|---------------|------------------------|-------------|----------|
| Description                | Manufacturer  | Model                  | S/N         | Cal Due  |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK   | VULB9163               | 749         | 04-25-17 |
| Antenna, Horn, 18 GHz      | ETS           | 3115                   | 00161451    | 05-17-17 |
| Antenna, Horn, 18 GHz      | ETS           | 3117                   | 00168724    | 06-17-17 |
| Antenna, Horn, 18 GHz      | ETS           | 3117                   | 00168717    | 06-17-17 |
| Antenna, Horn, 40 GHz      | ETS           | 3116C                  | 00166155    | 11-30-17 |
| Antenna, Horn, 40 GHz      | ETS           | 3116C-PA               | 00168841    | 12-15-17 |
| Preamplifier, 1000 MHz     | Sonoma        | 310N                   | 341282      | 08-17-17 |
| Preamplifier, 1000 MHz     | Sonoma        | 310N                   | 351741      | 08-16-17 |
| Preamplifier               | ETS           | 3115-PA                | 00167475    | 08-17-17 |
| Preamplifier, 18 GHz       | Miteq         | AFS42-00101800-25-S-42 | 1896138     | 08-16-17 |
| Spectrum Analyzer, 44 GHz  | Agilent / HP  | N9030A                 | MY54170614  | 08-17-17 |
| Spectrum Analyzer, 44 GHz  | Agilent / HP  | N9030A                 | MY54490312  | 08-16-17 |
| Bluetooth Tester           | TESCOM        | TC-3000C               | 3000C000546 | 08-18-17 |
| Average Power Sensor       | R&S           | NRZ-Z91                | 102681      | 08-16-17 |
| Average Power Sensor       | Agilent / HP  | U2000                  | MY54270007  | 08-17-17 |
| EMI Test Receive, 40 GHz   | R&S           | ESU40                  | 100439      | 08-17-17 |
| EMI Test Receive, 40 GHz   | R&S           | ESU40                  | 100457      | 08-16-17 |
| EMI Test Receive, 3 GHz    | R&S           | ESR3                   | 101832      | 08-16-17 |
| Attenuator / Switch driver | HP            | 11713A                 | 3748A04272  | N/A      |
| Low Pass Filter 5GHz       | Micro-Tronics | LPS17541               | 009         | 08-17-17 |
| Low Pass Filter 5GHz       | Micro-Tronics | LPS17541               | 015         | 08-16-17 |
| High Pass Filter 3GHz      | Micro-Tronics | HPM17543               | 010         | 08-17-17 |
| High Pass Filter 3GHz      | Micro-Tronics | HPM17543               | 015         | 08-16-17 |
| High Pass Filter 6GHz      | Micro-Tronics | HPM17542               | 009         | 08-17-17 |
| High Pass Filter 6GHz      | Micro-Tronics | HPM17542               | 016         | 08-16-17 |
| LISN                       | R&S           | ENV-216                | 101836      | 08-16-17 |
| LISN                       | R&S           | ENV-216                | 101837      | 08-16-17 |
| Attenuator                 | PASTERNAK     | PE7087-10              | A009        | 08-16-17 |
| Antenna, Loop, 9kHz-30MHz  | R&S           | HFH2-Z2                | 100418      | 11-25-17 |

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r05: Measurement Procedure §9.1.1 is used for peak power and §10.2 PKPSD is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None: for reporting purposes only.

### 8.1. ON TIME AND DUTY CYCLE RESULTS

| Mode          | ON Time<br>B<br>[msec] | Period<br>[msec] | Duty Cycle<br>x<br>[linear] | Duty<br>Cycle<br>[%] | Duty Cycle<br>Correction Factor<br>[dB] | 1/T<br>Minimum VBW<br>[kHz] |
|---------------|------------------------|------------------|-----------------------------|----------------------|---|-----------------------------|
| 2400MHz Bands |                        |                  |                             |                      |   |                             |
| BLE           | 0.386                  | 0.647            | 0.598                       | 59.8%                | 2.24                                    | 2.589                       |

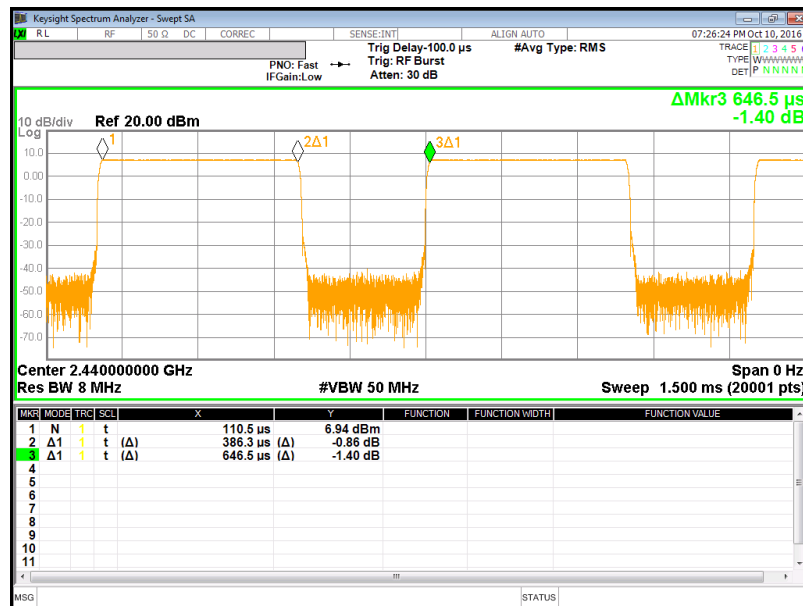

## 9. SUMMARY TABLE

| FCC Part Section   | Test Description                        | Test Limit | Test Condition       | Test Result | Worst Case        |
|--------------------|---|------------|----------------------|-------------|-------------------|
| 15.247 (a)(2)      | Occupied Band width (6dB)               | >500KHz    | Conducted            | Pass        | 687.7 kHz         |
| 2.1051, 15.247 (d) | Band Edge / Conducted Spurious Emission | -20dBc     |                      | Pass        | -51.7 dBm         |
| 15.247             | TX conducted output power               | <30dBm     |                      | Pass        | 4.542 dBm (Peak)  |
| 15.247             | PSD                                     | <8dBm      |                      | Pass        | -11.44 dBm (Peak) |
| 15.207 (a)         | AC Power Line conducted emissions       | Section 10 | Power Line conducted | Pass        | 48.55 dBuV (Qp)   |
| 15.205, 15.209     | Radiated Spurious Emission              | < 54dBuV/m | Radiated             | Pass        | 50.14 dBuV/m (Av) |

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### RESULTS

| Channel | Frequency<br>[MHz] | 6 dB Bandwidth<br>[kHz] | Minimum Limit<br>[kHz] |
|---------|--------------------|-------------------------|------------------------|
| Low     | 2402               | 689.5                   | 500.0                  |
| Mid     | 2440               | 687.7                   | 500.0                  |
| High    | 2480               | 690.9                   | 500.0                  |
| Worst   |                    | 687.7                   | 500.0                  |

# 6 dB BANDWIDTH PLOTS

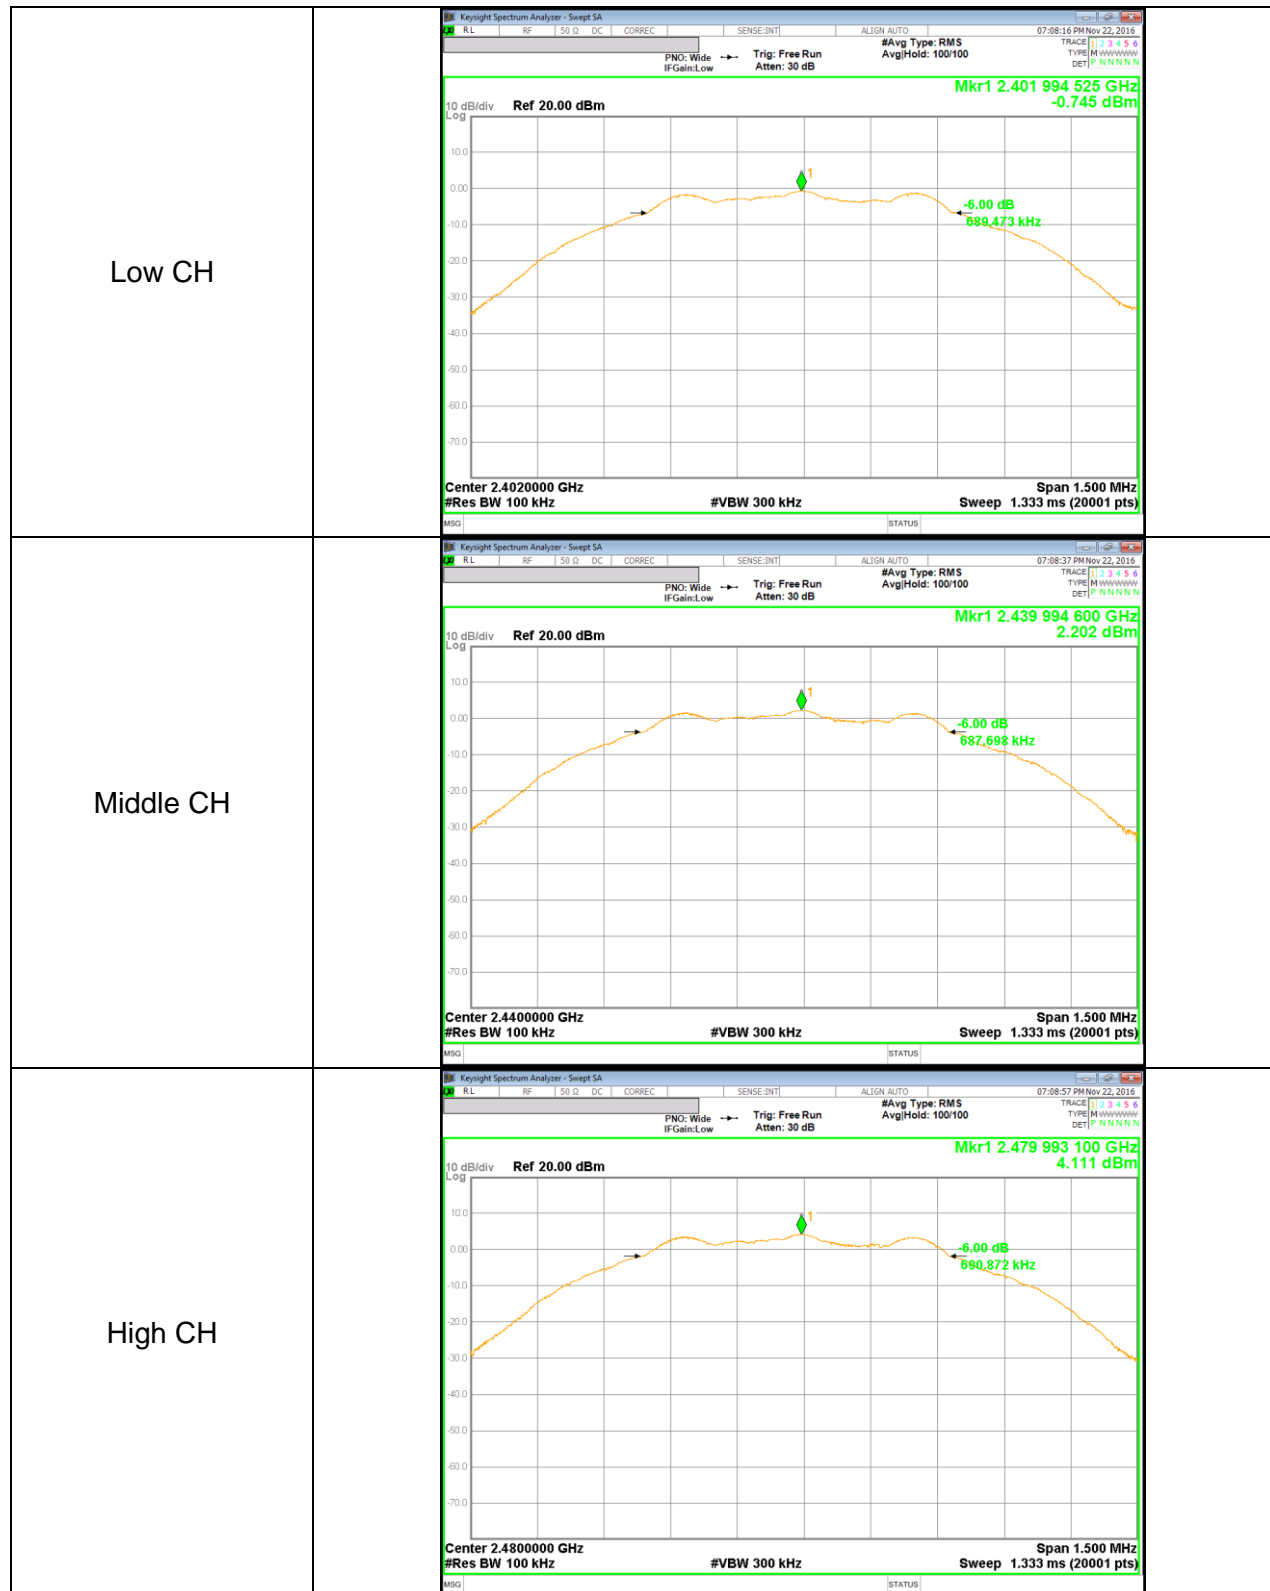

## 10.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.




### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### RESULTS

| Channel | Frequency<br>[MHz] | 99% Bandwidth<br>[MHz] |
|---------|--------------------|------------------------|
| Low     | 2402               | 1.043                  |
| Mid     | 2440               | 1.033                  |
| High    | 2480               | 1.032                  |
| Worst   |                    | 1.043                  |

**99% BANDWIDTH PLOTS**
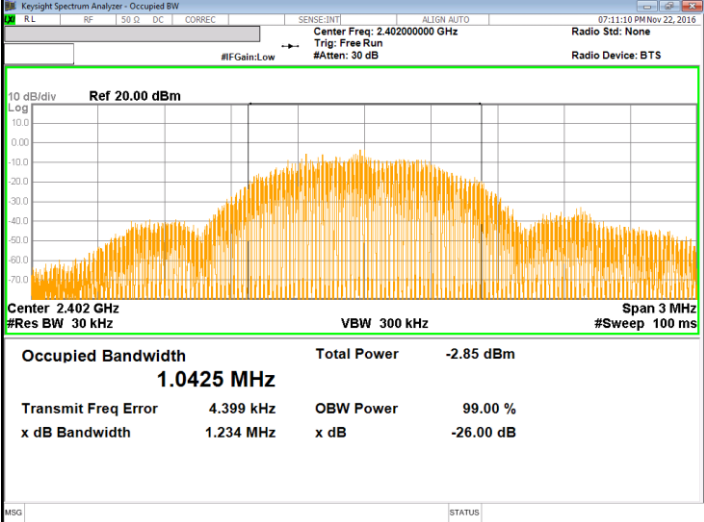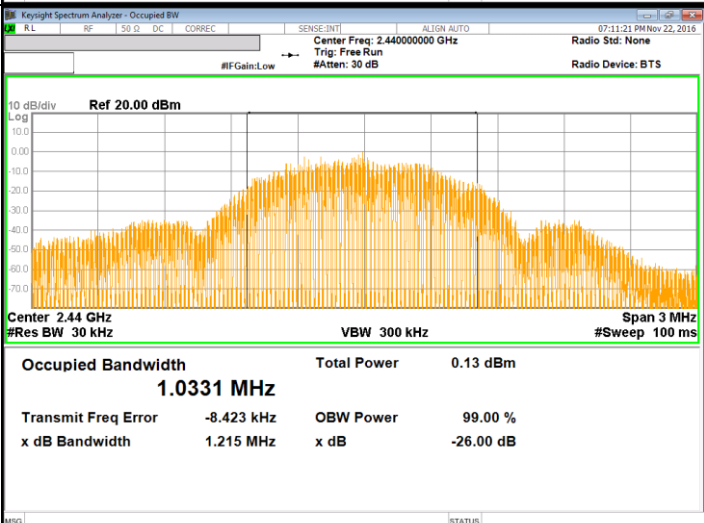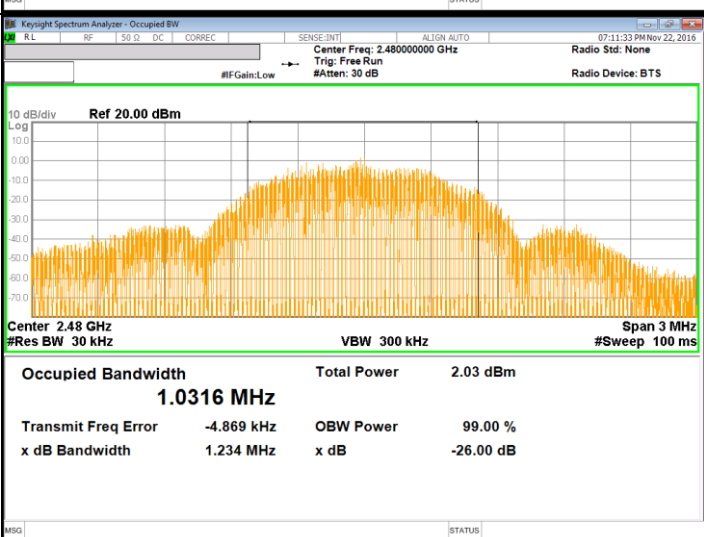
|                  |  |
|------------------|--|
| <p>Low CH</p>    |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.402 GHz Span 3 MHz<br/>#Res BW 30 kHz VBW 300 kHz #Sweep 100 ms</p> <p>Occupied Bandwidth 1.0425 MHz<br/>Total Power -2.85 dBm<br/>Transmit Freq Error 4.399 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 1.234 MHz x dB -26.00 dB</p>  |
| <p>Middle CH</p> |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.440000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.44 GHz Span 3 MHz<br/>#Res BW 30 kHz VBW 300 kHz #Sweep 100 ms</p> <p>Occupied Bandwidth 1.0331 MHz<br/>Total Power 0.13 dBm<br/>Transmit Freq Error -8.423 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 1.215 MHz x dB -26.00 dB</p>  |
| <p>High CH</p>   |  <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.48 GHz Span 3 MHz<br/>#Res BW 30 kHz VBW 300 kHz #Sweep 100 ms</p> <p>Occupied Bandwidth 1.0316 MHz<br/>Total Power 2.03 dBm<br/>Transmit Freq Error -4.869 kHz<br/>OBW Power 99.00 %<br/>x dB Bandwidth 1.234 MHz x dB -26.00 dB</p> |



### 10.3. OUTPUT POWER

#### LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


#### TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r05 under section 9.1.1 utilizing spectrum analyzer.

#### RESULTS

| Channel | Frequency<br>[MHz] | Peak Power Reading<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|---------|--------------------|-----------------------------|----------------|----------------|
| Low     | 2402               | -0.286                      | 30.000         | -30.286        |
| Mid     | 2440               | 2.647                       | 30.000         | -27.353        |
| High    | 2480               | 4.542                       | 30.000         | -25.458        |
| Worst   |                    | 4.542                       |                | -25.458        |

## OUTPUT POWER PLOTS

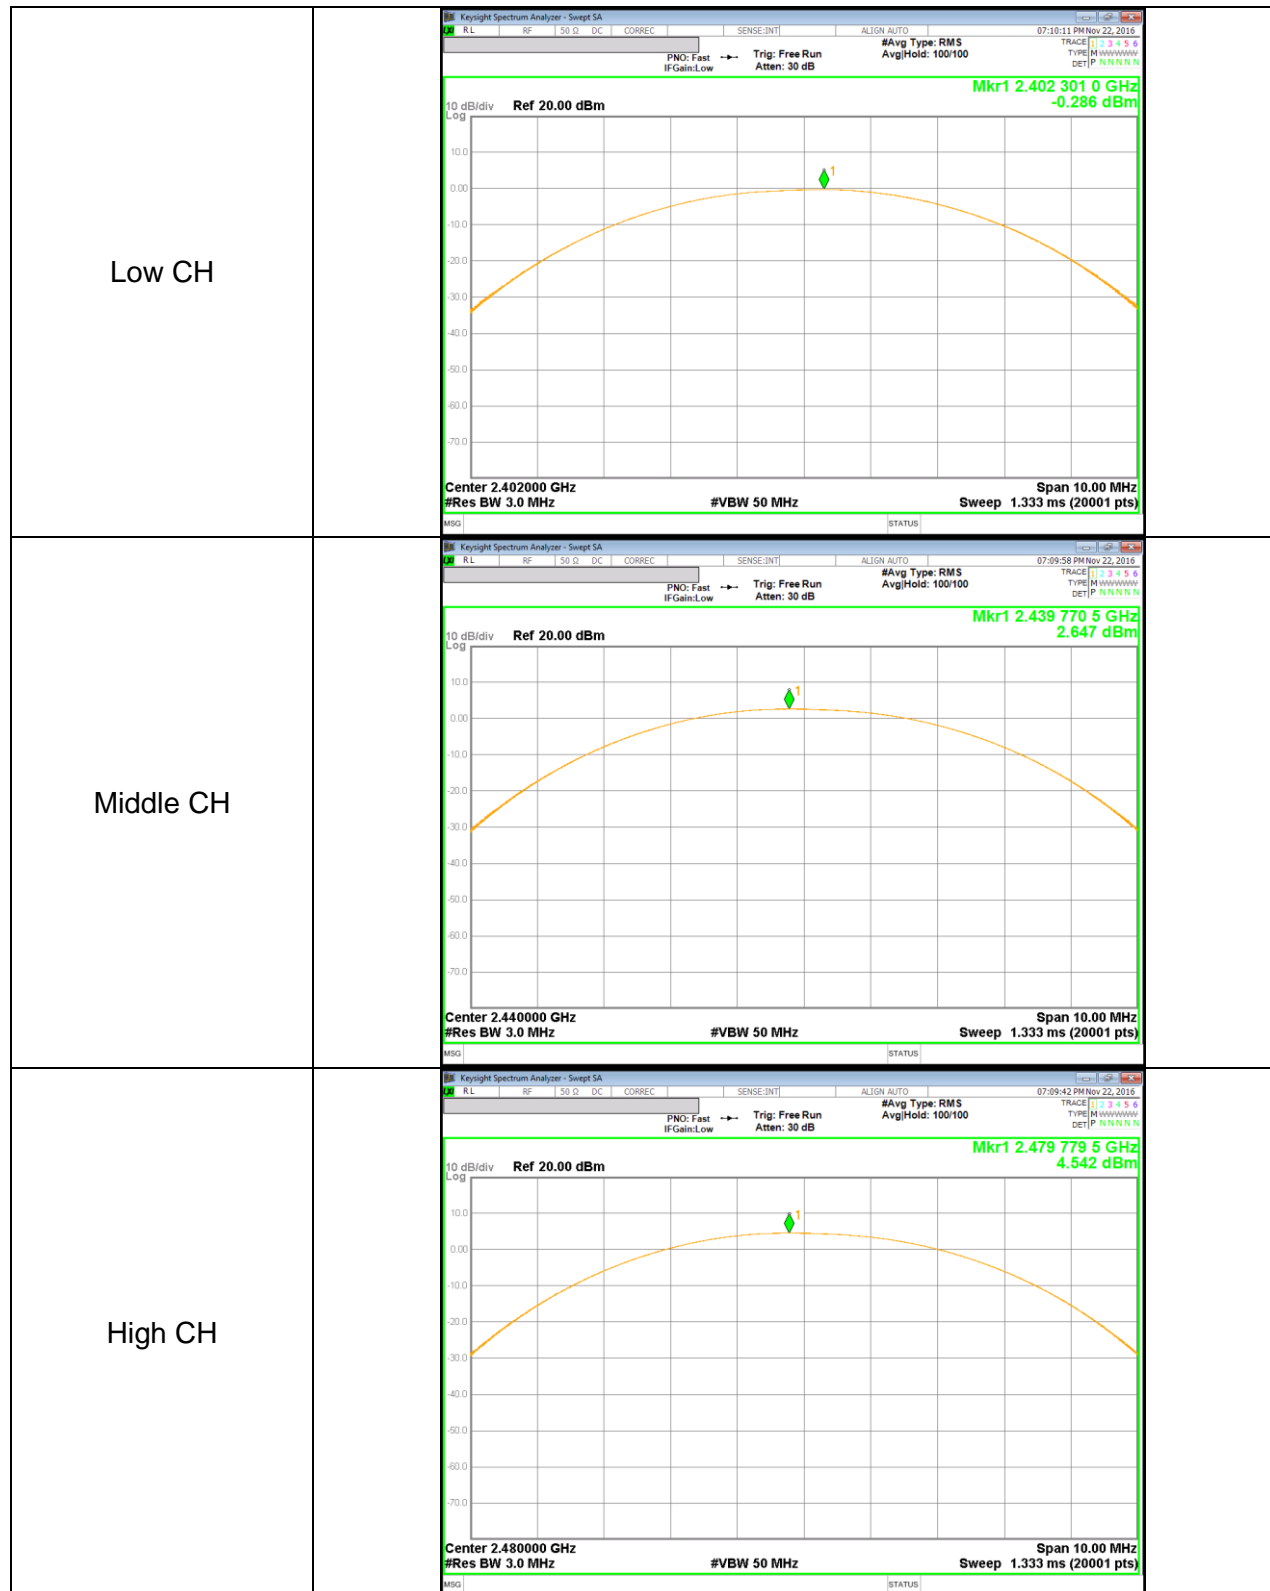

## 10.4. AVERAGE POWER

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency<br>[MHz] | AV power<br>[dBm] | AV power<br>[mW] |
|---------|--------------------|-------------------|------------------|
| Low     | 2402               | -0.86             | 0.82             |
| Middle  | 2440               | 2.13              | 1.63             |
| High    | 2480               | 4.03              | 2.53             |

## 10.5. PSD

### LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r05

### RESULTS

| Channel | Frequency<br>[MHz] | PSD<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|---------|--------------------|--------------|----------------|----------------|
| Low     | 2402               | -16.32       | 8.00           | -24.32         |
| Mid     | 2440               | -13.32       | 8.00           | -21.32         |
| High    | 2480               | -11.44       | 8.00           | -19.44         |

Low CH

Middle CH

High CH

Keysight Spectrum Analyzer - Swept SA

RL RF 50  $\Omega$  DC CORREC SENSE INT ALIGN AUTO 07:14:16 PM Nov 22, 2016

PNO: Wide IF Gain: Low Trig: Free Run Atten: 20 dB #Avg Type: RMS Avg/Hold: 100/100

Ref 10.00 dBm

10 dB/div Log

Mkr1 2.401 967 71 GHz -16.318 dBm

Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.564 MHz Sweep 50.67 ms (20001 pts)

MSG STATUS

Keysight Spectrum Analyzer - Swept SA

RL RF 50  $\Omega$  DC CORREC SENSE INT ALIGN AUTO 07:14:45 PM Nov 22, 2016

PNO: Wide IF Gain: Low Trig: Free Run Atten: 20 dB #Avg Type: RMS Avg/Hold: 100/100

Ref 10.00 dBm

10 dB/div Log

Mkr1 2.439 966 76 GHz -13.318 dBm

Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.550 MHz Sweep 49.33 ms (20001 pts)

MSG STATUS

Keysight Spectrum Analyzer - Swept SA

RL RF 50  $\Omega$  DC CORREC SENSE INT ALIGN AUTO 07:13:01 PM Nov 22, 2016

PNO: Wide IF Gain: Low Trig: Free Run Atten: 20 dB #Avg Type: RMS Avg/Hold: 100/100

Ref 10.00 dBm

10 dB/div Log

Mkr1 2.479 966 19 GHz -11.440 dBm

Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.547 MHz Sweep 49.33 ms (20001 pts)

MSG STATUS

## **10.6. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

## RESULTS

### BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL

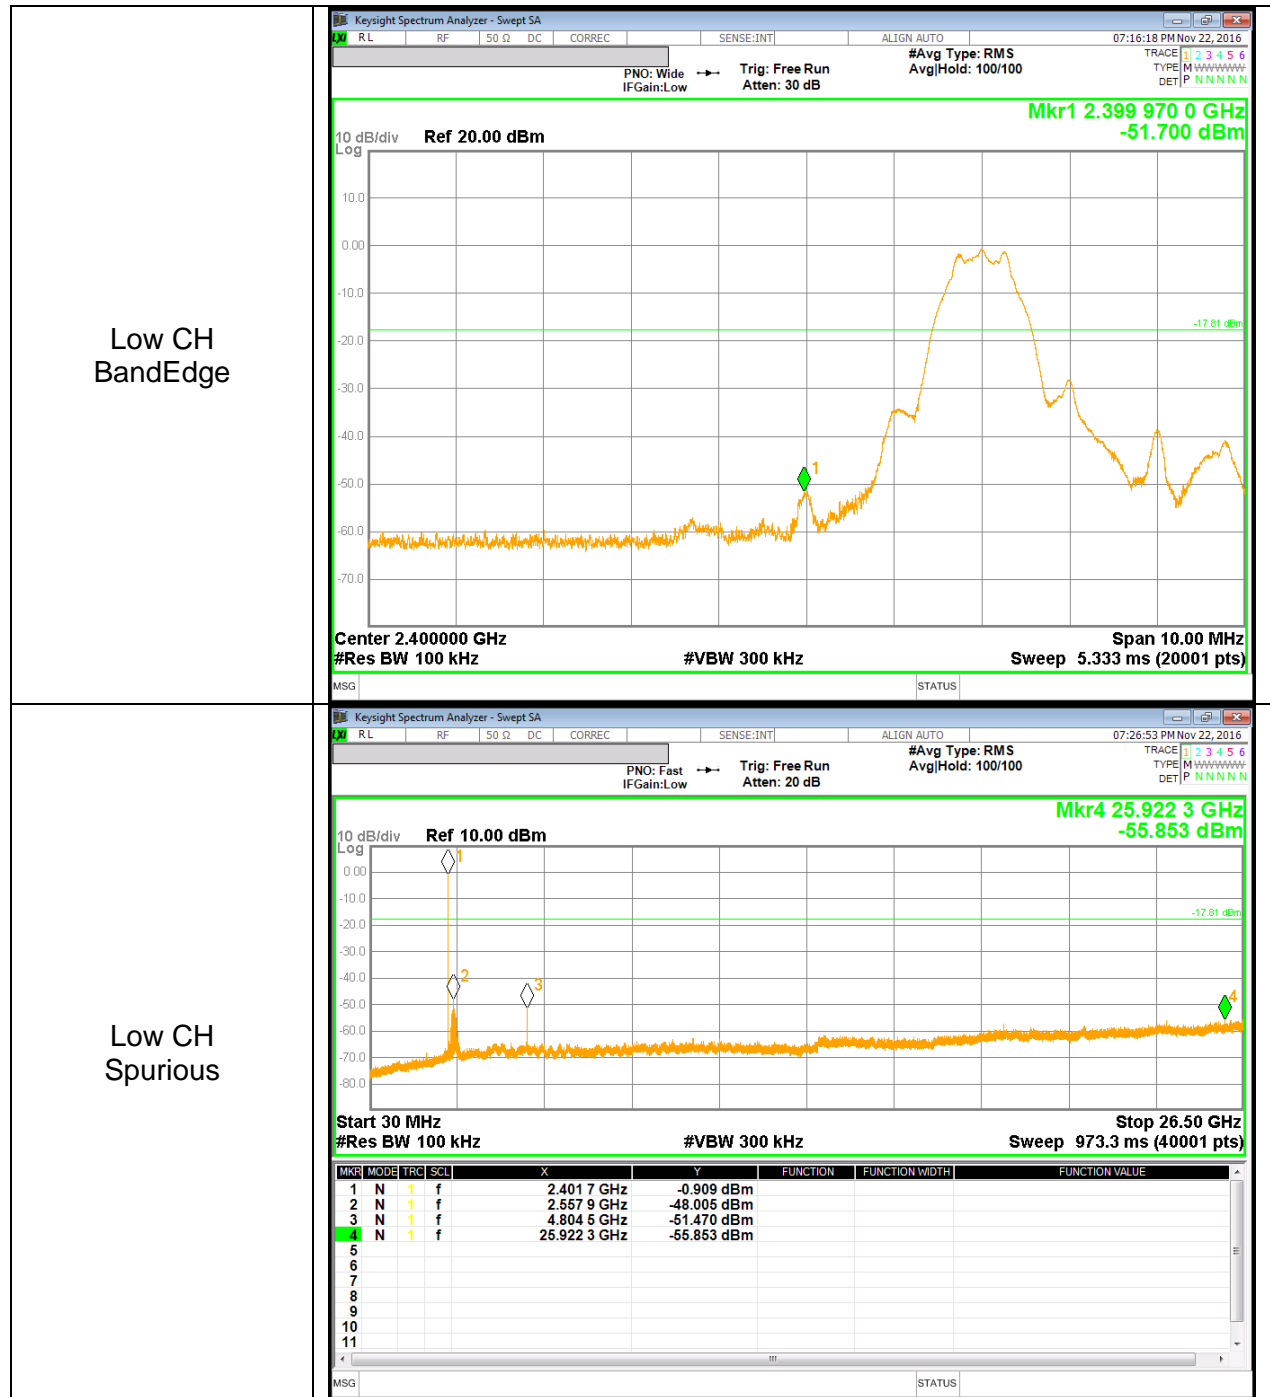


# **SPURIOUS EMISSIONS, MID CHANNEL**

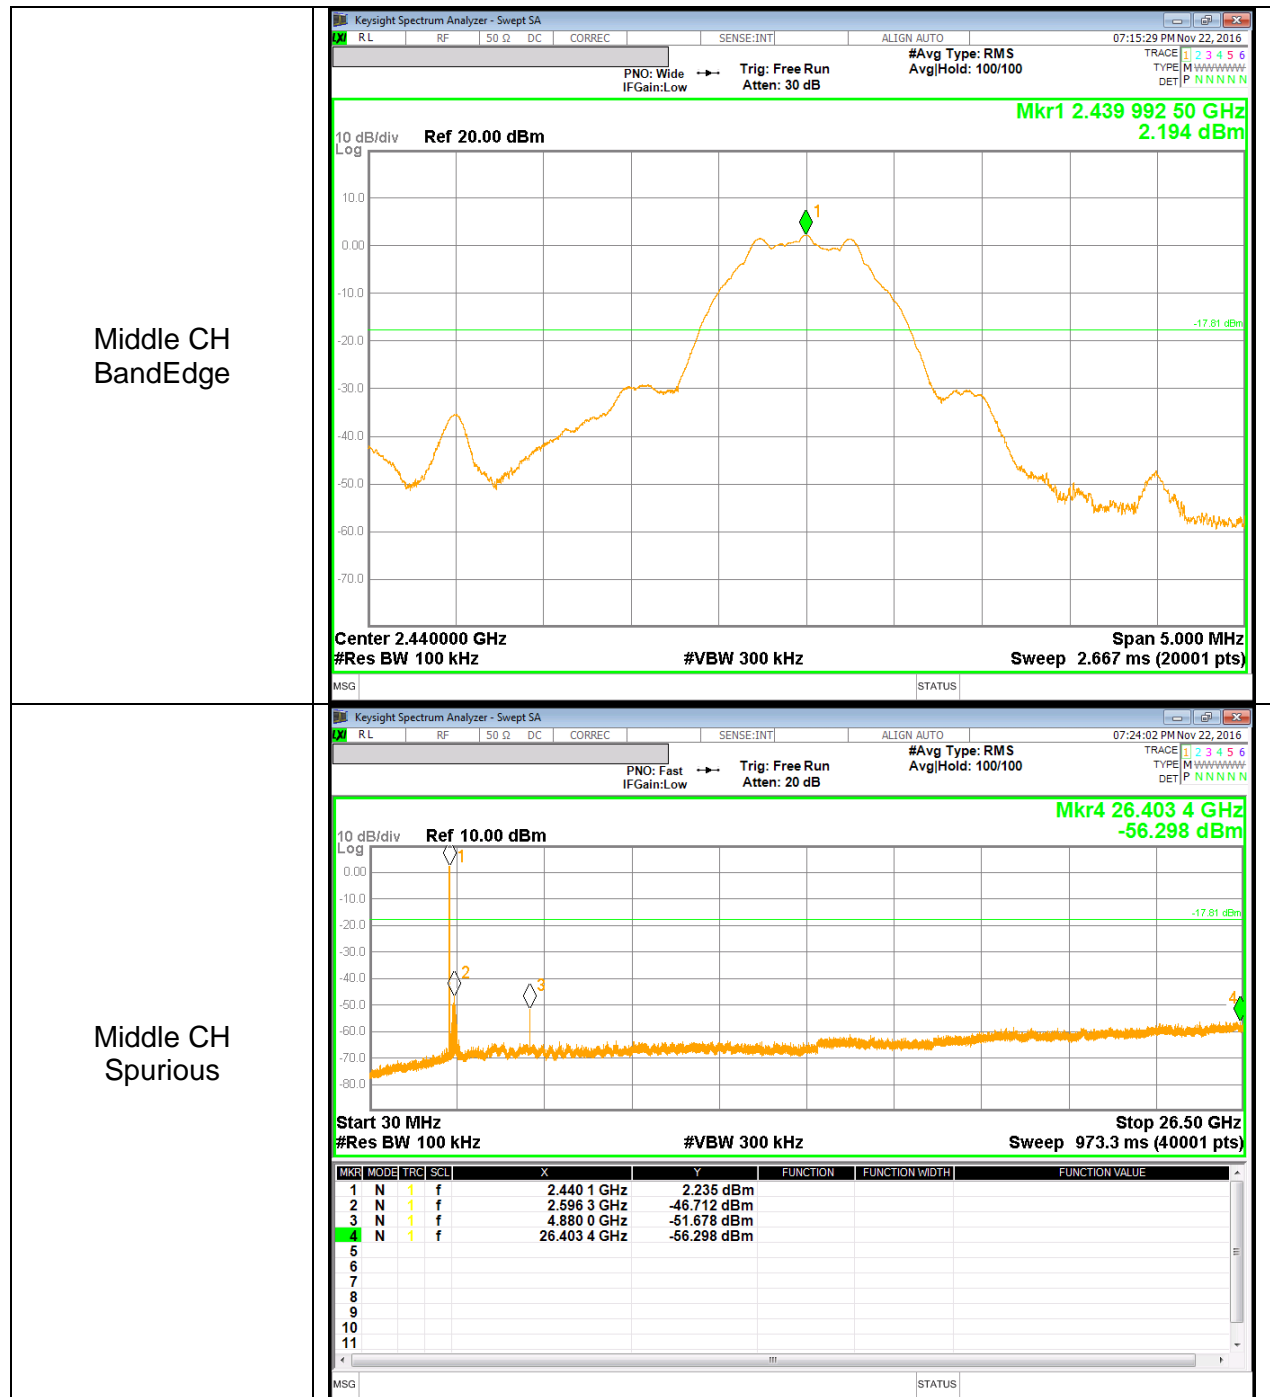



**SPURIOUS EMISSIONS, HIGH CHANNEL**

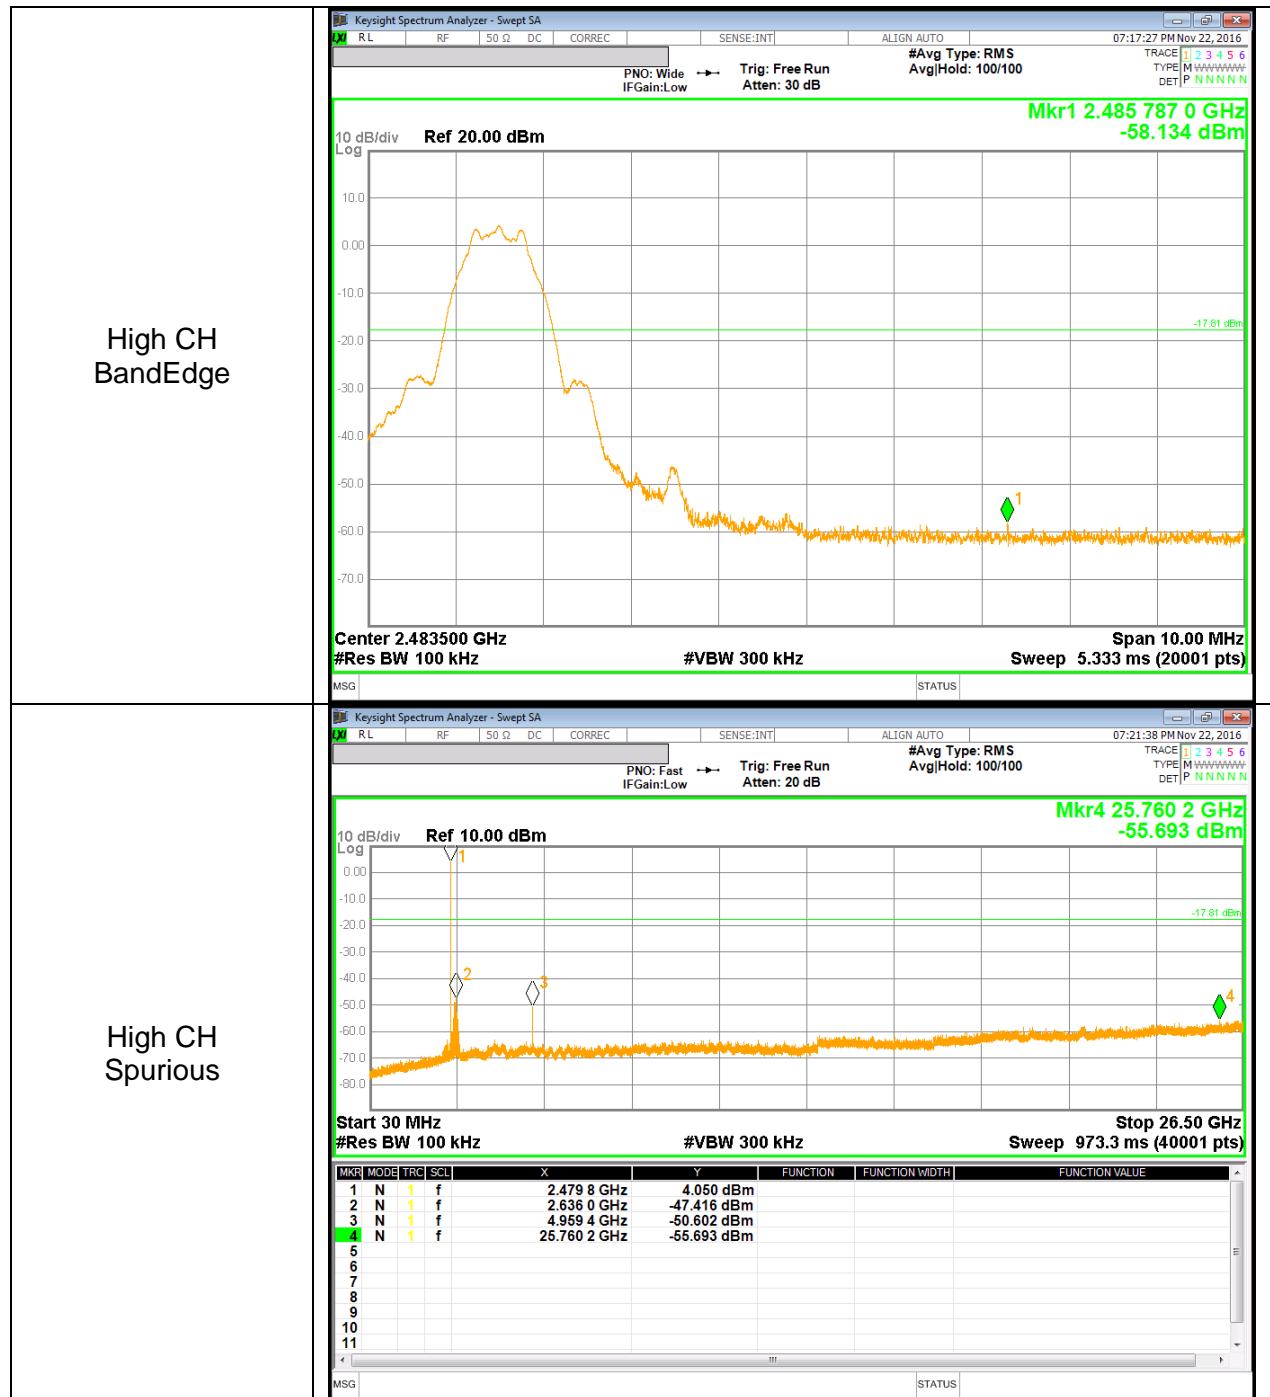

## 11. RADIATED TEST RESULTS

### 11.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

| Limits for radiated disturbance of an intentional radiator |                 |                          |
|--|-----------------|--------------------------|
| Frequency range (MHz)                                      | Limits (µV/m)   | Measurement Distance (m) |
| 0.009 – 0.490  | 2400 / F (kHz)  | 300                      |
| 0.490 – 1.705  | 24000 / F (kHz) | 30                       |
| 1.705 – 30.0   | 30              | 30                       |
| 30 – 88  | 100**           | 3                        |
| 88 - 216   | 150**           | 3                        |
| 216 – 960  | 200**           | 3                        |
| Above 960  | 500             | 3                        |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions)  
Duty cycle factor =  $10 \log(1/x)$ . For this sample:  $DCF = 10 \log(1/0.598) = 2.24 \text{ dB}$   
(Spectrum Analyzer round it up to 2.24dB)

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.

Formula for converting the field strength from uV/m to dBuV/m is:  
Limit (dBuV/m) =  $20 \log \text{limit (uV/m)}$

## 11.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

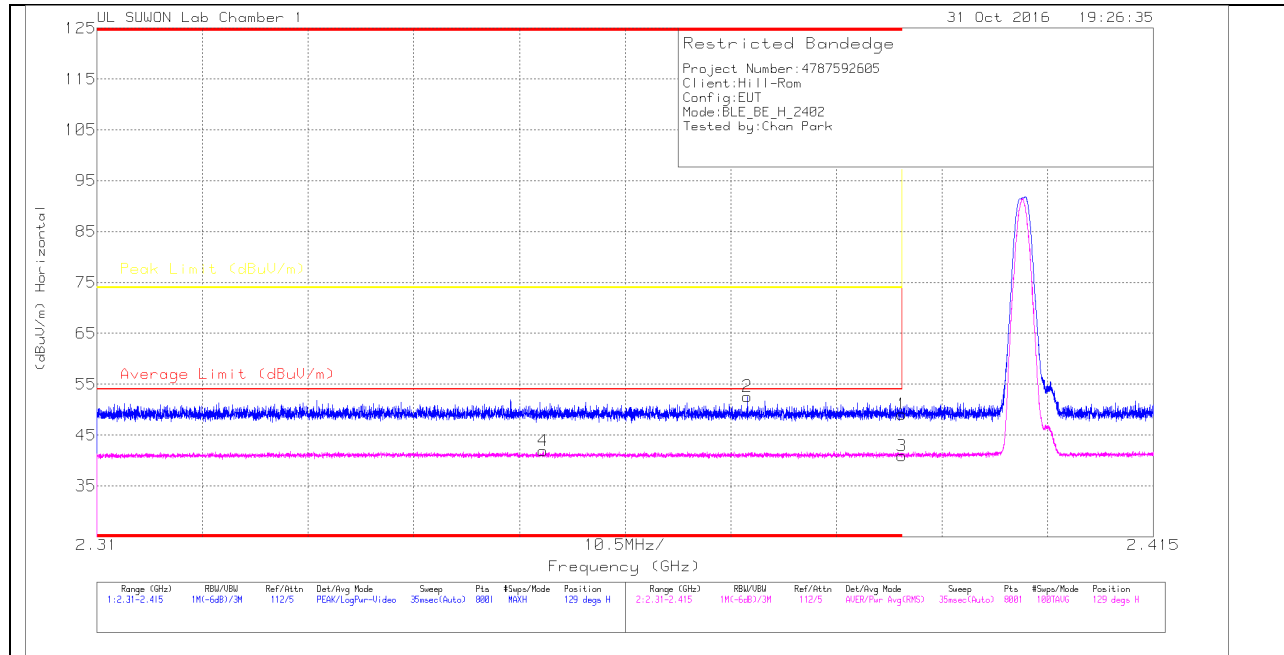

### HORIZONTAL DATA

#### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(001687 17)_150619 | Path_2 | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 46.25                | Pk  |                        | -29    | 0            | 49.05                      | -                      | -           | 74                  | -24.95         | 129            | 149         | H        |
| 2      | * 2.375         | 49.81                | Pk  |                        | -29    | 0            | 52.61                      | -                      | -           | 74                  | -21.39         | 129            | 149         | H        |
| 3      | * 2.39          | 35.92                | RMS |                        | -29    | 2.24         | 40.96                      | 54                     | -13.04      | -                   | -              | 129            | 149         | H        |
| 4      | * 2.354         | 36.93                | RMS |                        | -29    | 2.24         | 41.87                      | 54                     | -12.13      | -                   | -              | 129            | 149         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## VERTICAL PEAK AND AVERAGE PLOT

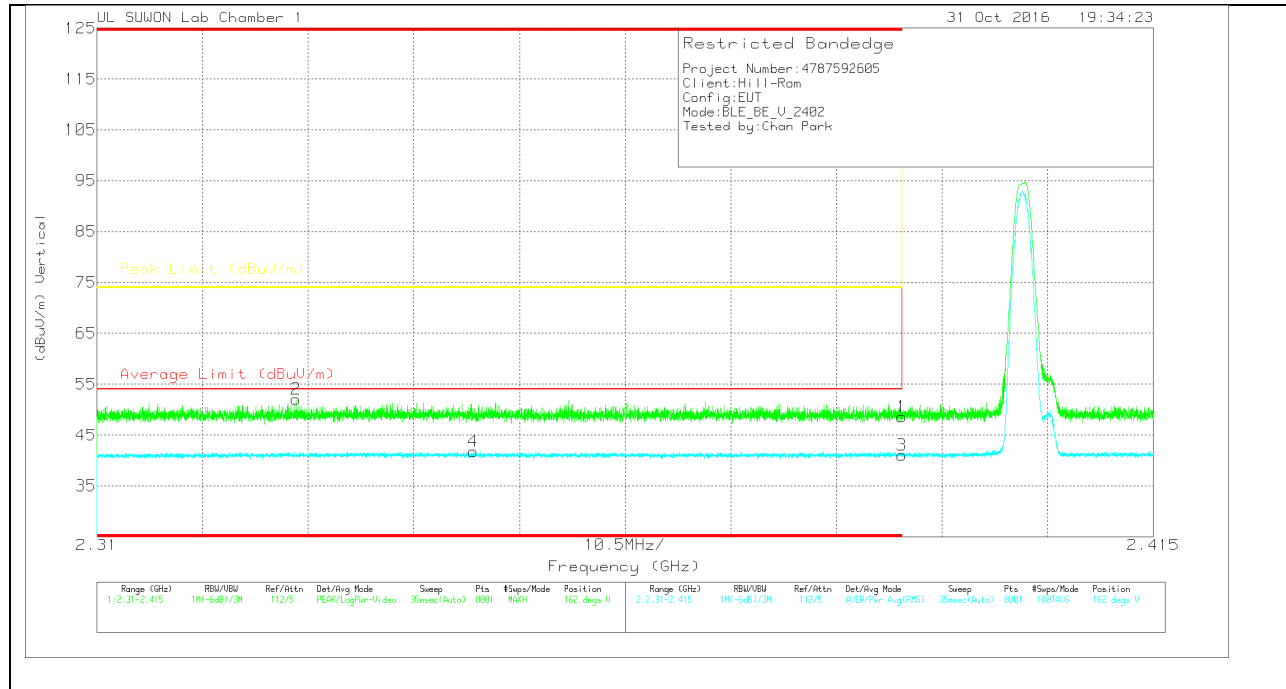

## VERTICAL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(001687 17)_150619 | Path_2 | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 45.74                | Pk  | 31.8                   | -29    | 0            | 48.54                      | -                      | -           | 74                  | -25.46         | 162            | 136         | V        |
| 2      | * 2.33          | 49.34                | Pk  | 31.7                   | -29    | 0            | 52.04                      | -                      | -           | 74                  | -21.96         | 162            | 136         | V        |
| 3      | * 2.39          | 36.02                | RMS | 31.8                   | -29    | 2.24         | 41.06                      | 54                     | -12.94      | -                   | -              | 162            | 136         | V        |
| 4      | * 2.347         | 36.86                | RMS | 31.7                   | -29    | 2.24         | 41.8                       | 54                     | -12.2       | -                   | -              | 162            | 136         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

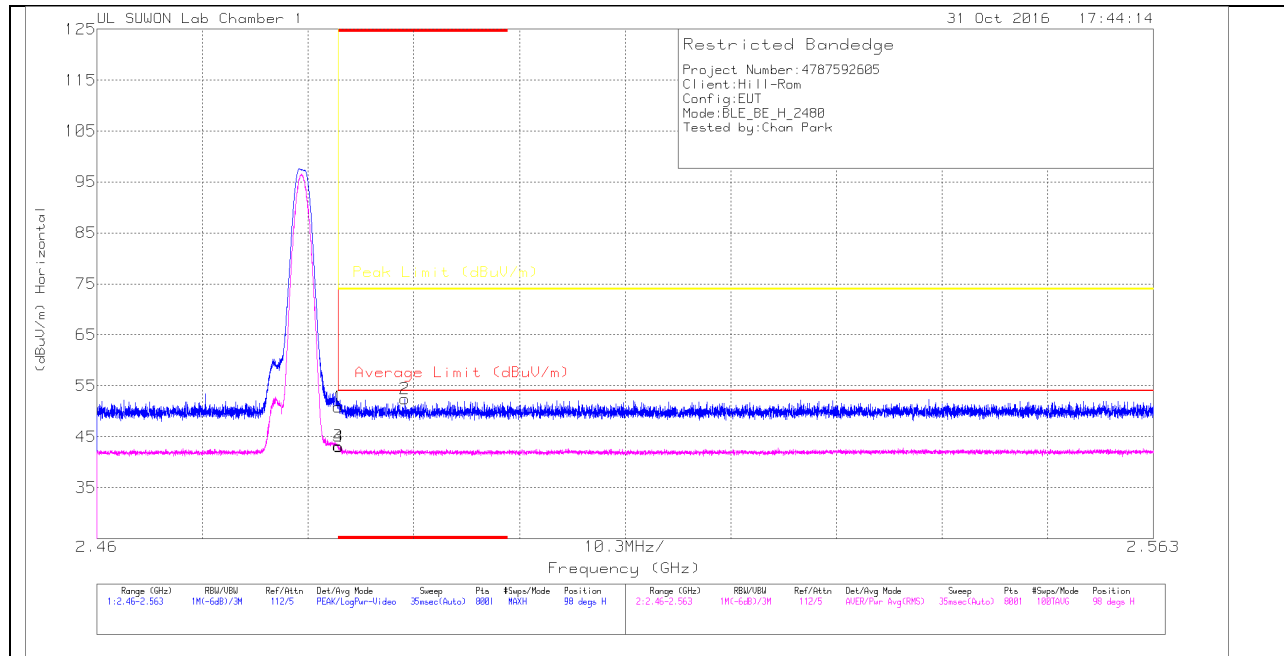

### HORIZONTAL DATA

#### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117/001687 171_150619 | Path_2 | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 47.07                | Pk  | 32                     | -28.3  | 0            | 50.77                      | -                      | -           | 74                  | -23.23         | 98             | 169         | H        |
| 2      | * 2.49          | 48.68                | Pk  | 32                     | -28.3  | 0            | 52.38                      | -                      | -           | 74                  | -21.62         | 98             | 169         | H        |
| 3      | * 2.484         | 37.22                | RMS | 32                     | -28.3  | 2.24         | 43.16                      | 54                     | -10.84      | -                   | -              | 98             | 169         | H        |
| 4      | * 2.484         | 37.07                | RMS | 32                     | -28.3  | 2.24         | 43.01                      | 54                     | -10.99      | -                   | -              | 98             | 169         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

## VERTICAL PEAK AND AVERAGE PLOT

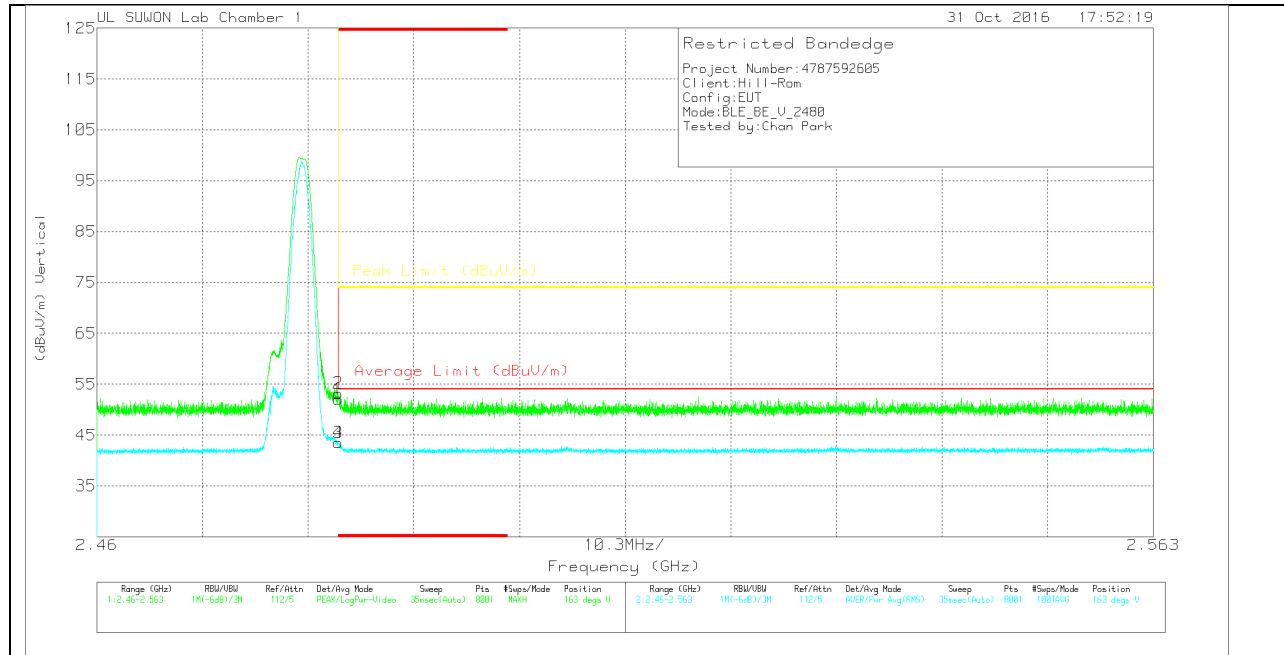

## VERTICAL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117/001687 171_150619 | Path_2 | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 48.33                | Pk  | 32                     | -28.3  | 0            | 52.03                      | -                      | -           | 74                  | -21.97         | 163            | 146         | V        |
| 2      | * 2.484         | 49.53                | Pk  | 32                     | -28.3  | 0            | 53.23                      | -                      | -           | 74                  | -20.77         | 163            | 146         | V        |
| 3      | * 2.484         | 37.59                | RMS | 32                     | -28.3  | 2.24         | 43.53                      | 54                     | -10.47      | -                   | -              | 163            | 146         | V        |
| 4      | * 2.484         | 37.63                | RMS | 32                     | -28.3  | 2.24         | 43.57                      | 54                     | -10.43      | -                   | -              | 163            | 146         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

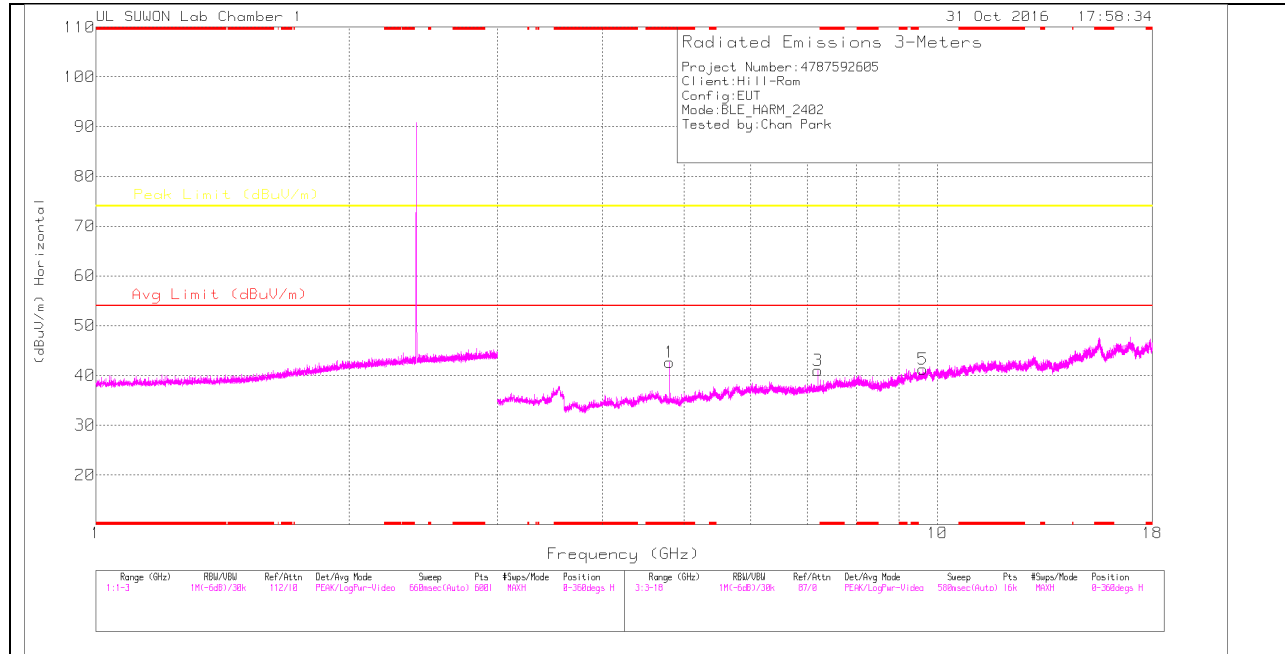

### LOW CHANNEL VERTICAL

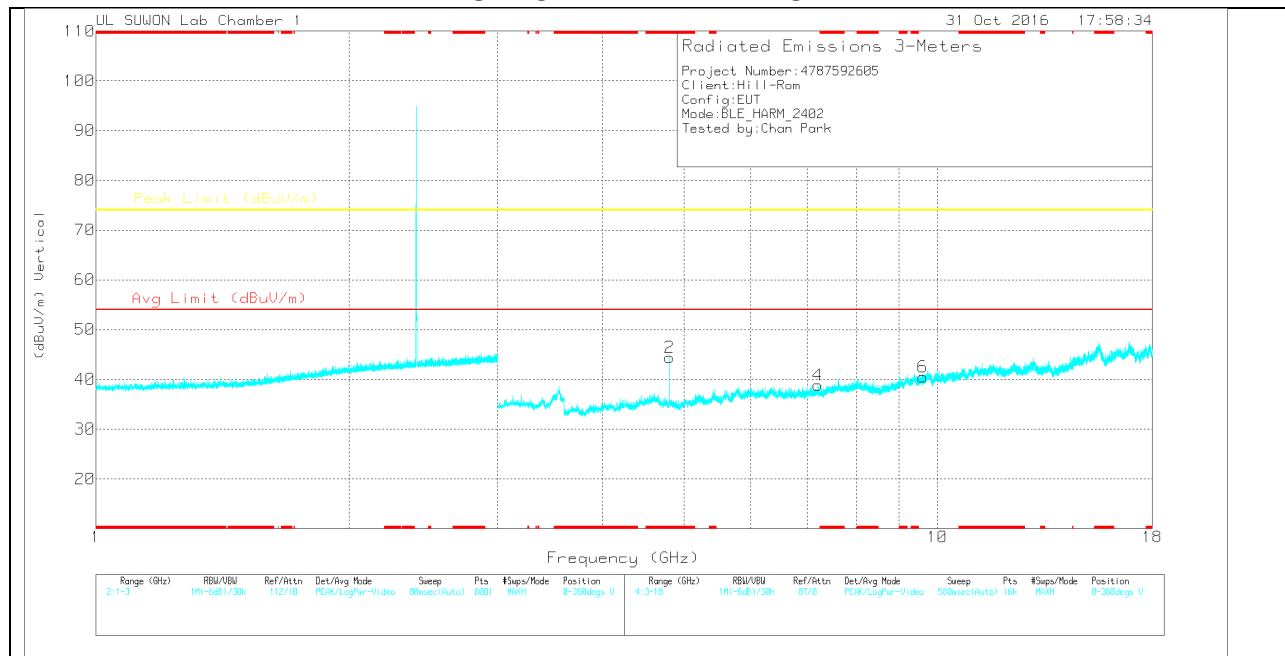

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



## LOW CHANNEL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(001687 17)_150619 | Path_3 | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1      | * 4.804         | 42.43                | PK  | 34                     | -33.8  | 0            | 42.63                      | -                  | -           | 74                  | -31.37      | 0-360          | 250         | H        |
| 3      | 7.205           | 36.14                | PK  | 35.7                   | -30.8  | 0            | 41.04                      | -                  | -           | 74                  | -32.96      | 0-360          | 250         | H        |
| 5      | 9.608           | 31.55                | PK  | 37                     | -27.3  | 0            | 41.25                      | -                  | -           | 74                  | -32.75      | 0-360          | 250         | H        |
| 2      | * 4.805         | 44.17                | PK  | 34                     | -33.8  | 0            | 44.37                      | -                  | -           | 74                  | -29.63      | 0-360          | 150         | V        |
| 4      | 7.206           | 33.98                | PK  | 35.7                   | -30.8  | 0            | 38.88                      | -                  | -           | 74                  | -35.12      | 0-360          | 250         | V        |
| 6      | 9.604           | 30.75                | PK  | 37                     | -27.3  | 0            | 40.45                      | -                  | -           | 74                  | -33.55      | 0-360          | 250         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

### Radiated Emissions


| Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117(0016 8717)_150 619 | Path_3 | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|-------------------------|--------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| * 4.804         | 51.43                | PK2  | 34                      | -33.8  | 0            | 51.63                      | -                  | -           | 74                  | -22.37      | 183            | 113         | H        |
| * 4.804         | 43.78                | MAv1 | 34                      | -33.8  | 2.24         | 46.22                      | 54                 | -7.78       | -                   | -           | 183            | 113         | H        |
| 7.206           | 46.08                | PK2  | 35.7                    | -30.8  | 0            | 50.98                      | -                  | -           | 74                  | -23.02      | 130            | 153         | H        |
| * 4.804         | 53.31                | PK2  | 34                      | -33.8  | 0            | 53.51                      | -                  | -           | 74                  | -20.49      | 170            | 105         | V        |
| * 4.804         | 47.51                | MAv1 | 34                      | -33.8  | 2.24         | 49.95                      | 54                 | -4.05       | -                   | -           | 170            | 105         | V        |
| 7.206           | 44.98                | PK2  | 35.7                    | -30.8  | 0            | 49.88                      | -                  | -           | 74                  | -24.12      | 207            | 100         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

## MID CHANNEL HORIZONTAL

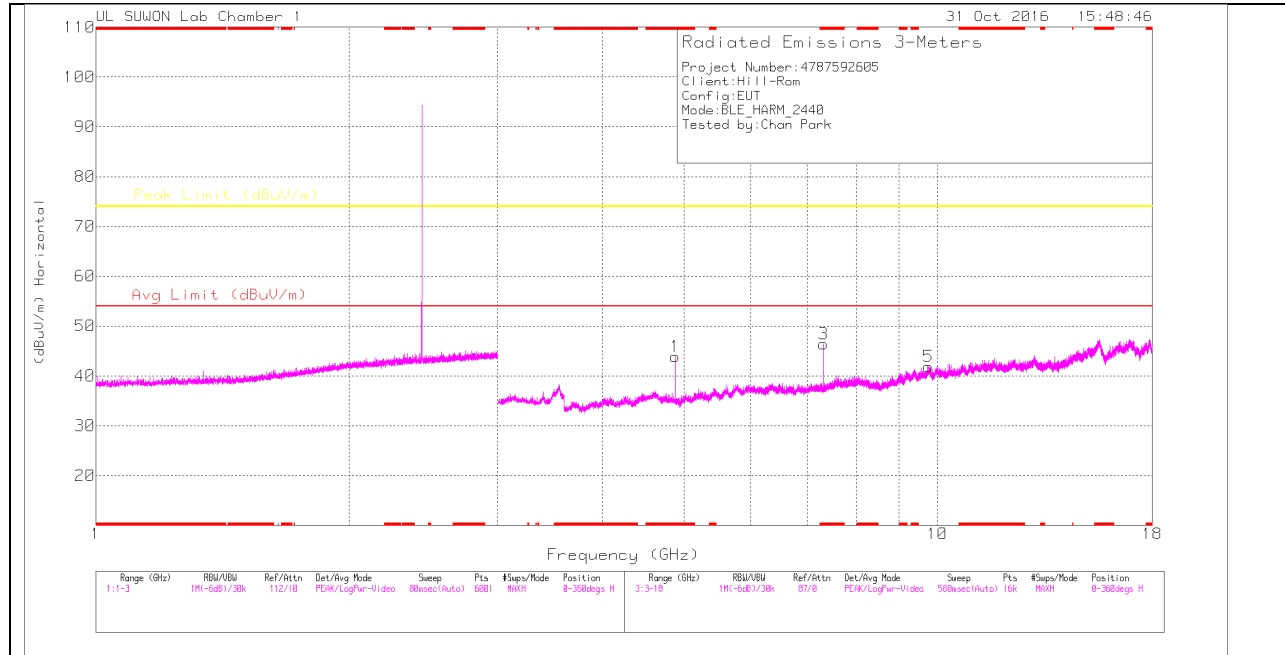

## MID CHANNEL VERTICAL

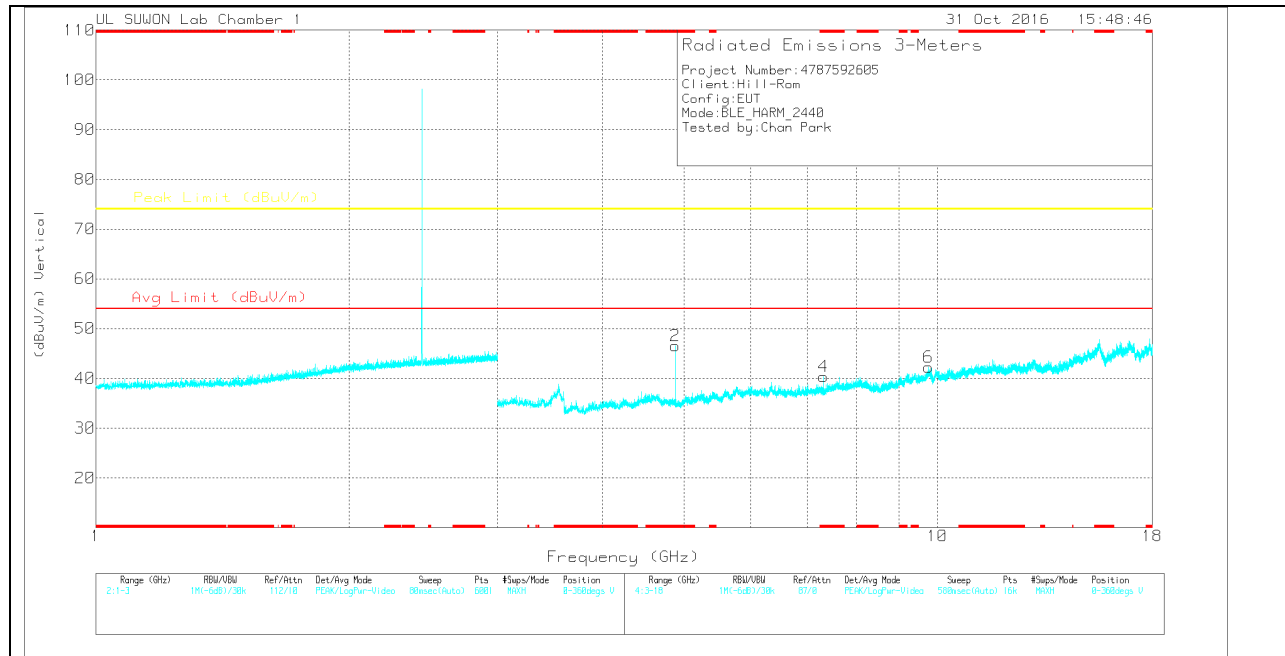

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(001687 17)_150619 | Path_3 | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1      | * 4.88          | 43.9                 | PK  | 34                     | -34    | 0            | 43.9                       | -                  | -           | 74                  | -30.1       | 0-360          | 150         | H        |
| 3      | * 7.32          | 41.52                | PK  | 35.8                   | -30.9  | 0            | 46.42                      | -                  | -           | 74                  | -27.58      | 0-360          | 250         | H        |
| 5      | 9.764           | 31.23                | PK  | 37.2                   | -26.6  | 0            | 41.83                      | -                  | -           | 74                  | -32.17      | 0-360          | 150         | H        |
| 2      | * 4.88          | 46.61                | PK  | 34                     | -34    | 0            | 46.61                      | -                  | -           | 74                  | -27.39      | 0-360          | 150         | V        |
| 4      | * 7.319         | 35.47                | PK  | 35.8                   | -30.9  | 0            | 40.37                      | -                  | -           | 74                  | -33.63      | 0-360          | 150         | V        |
| 6      | 9.764           | 31.71                | PK  | 37.2                   | -26.6  | 0            | 42.31                      | -                  | -           | 74                  | -31.69      | 0-360          | 150         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

### Radiated Emissions


| Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117(0016 8717)_150 619 | Path_3 | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|-------------------------|--------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| * 4.88          | 52.52                | PK-U | 34                      | -34    | 0            | 52.52                      | -                  | -           | 74                  | -21.48      | 188            | 158         | H        |
| * 4.88          | 45.49                | MAV1 | 34                      | -34    | 2.24         | 47.73                      | 54                 | -6.27       | -                   | -           | 188            | 158         | H        |
| * 7.319         | 48.7                 | PK-U | 35.8                    | -30.9  | 0            | 53.6                       | -                  | -           | 74                  | -20.4       | 128            | 141         | H        |
| * 7.319         | 40.8                 | MAV1 | 35.8                    | -30.9  | 2.24         | 47.94                      | 54                 | -6.06       | -                   | -           | 128            | 141         | H        |
| * 4.879         | 53.34                | PK-U | 34                      | -34    | 0            | 53.34                      | -                  | -           | 74                  | -20.66      | 83             | 170         | V        |
| * 4.88          | 47.9                 | MAV1 | 34                      | -34    | 2.24         | 50.14                      | 54                 | -3.86       | -                   | -           | 83             | 170         | V        |
| * 7.319         | 46.53                | PK-U | 35.8                    | -30.9  | 0            | 51.43                      | -                  | -           | 74                  | -22.57      | 109            | 227         | V        |
| * 7.319         | 36.78                | MAV1 | 35.8                    | -30.9  | 2.24         | 43.92                      | 54                 | -10.08      | -                   | -           | 109            | 227         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

## HIGH CHANNEL HORIZONTAL

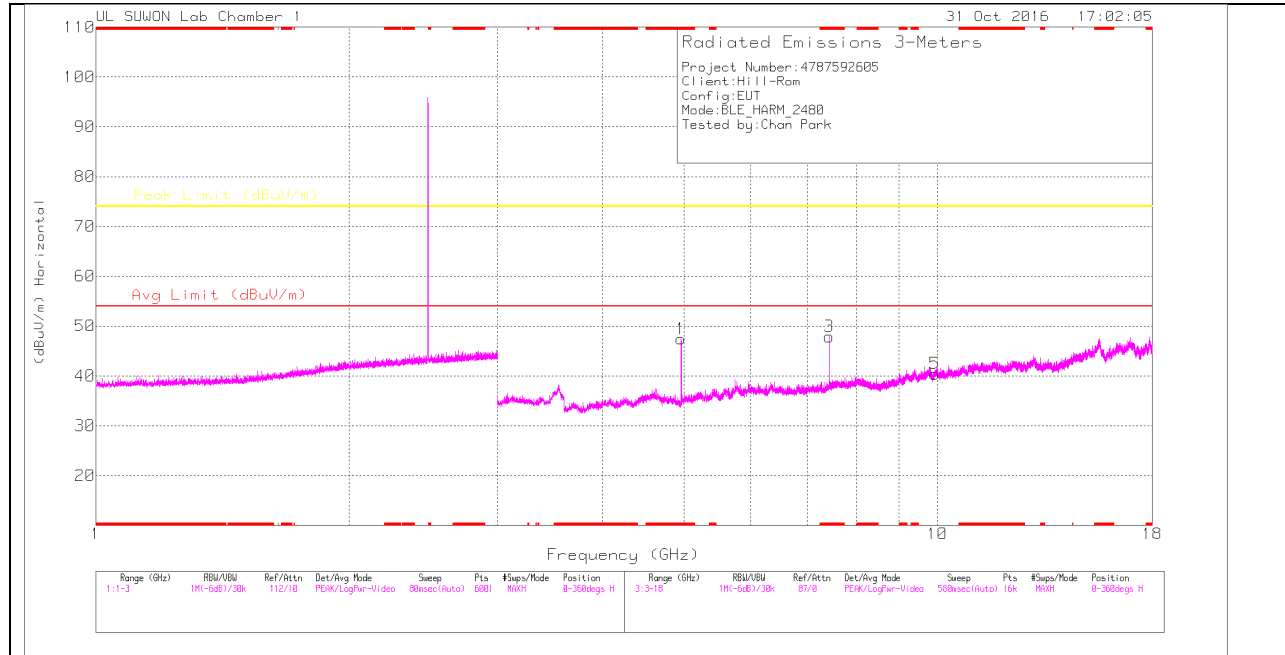

## HIGH CHANNEL VERTICAL

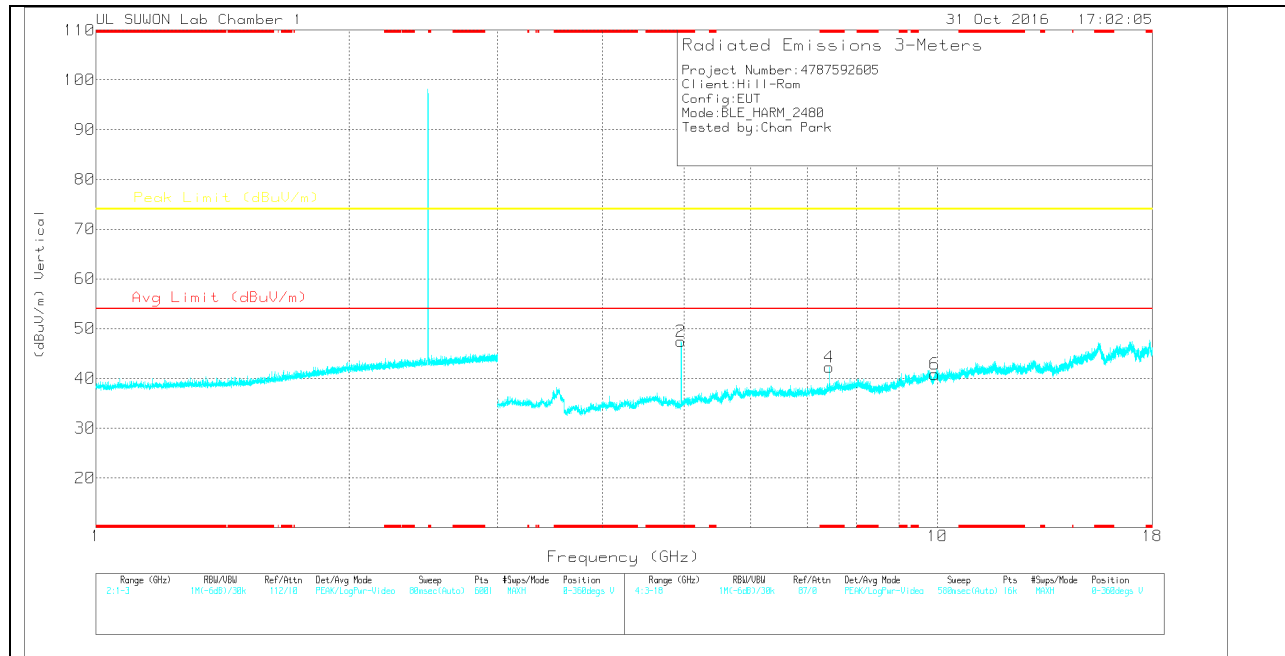

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(001687 17)_150619 | Path_3 | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|--------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1      | * 4.959         | 47.48                | PK  | 34                     | -34    | 0            | 47.48                      | -                  | -           | 74                  | -26.52      | 0-360          | 150         | H        |
| 3      | * 7.44          | 42.79                | PK  | 35.8                   | -30.7  | 0            | 47.89                      | -                  | -           | 74                  | -26.11      | 0-360          | 250         | H        |
| 5      | 9.92            | 30.23                | PK  | 37.4                   | -27.2  | 0            | 40.43                      | -                  | -           | 74                  | -33.57      | 0-360          | 150         | H        |
| 2      | * 4.959         | 47.47                | PK  | 34                     | -34    | 0            | 47.47                      | -                  | -           | 74                  | -26.53      | 0-360          | 150         | V        |
| 4      | * 7.441         | 37.14                | PK  | 35.8                   | -30.7  | 0            | 42.24                      | -                  | -           | 74                  | -31.76      | 0-360          | 150         | V        |
| 6      | 9.918           | 30.71                | PK  | 37.4                   | -27.3  | 0            | 40.81                      | -                  | -           | 74                  | -33.19      | 0-360          | 150         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117(0016 8717)_150 619 | Path_3 | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|-------------------------|--------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| * 4.959         | 53.77                | PK-U | 34                      | -34    | 0            | 53.77                      | -                  | -           | 74                  | -20.23      | 175            | 159         | H        |
| * 4.96          | 46.94                | MAV1 | 34                      | -34    | 2.24         | 49.18                      | 54                 | -4.82       | -                   | -           | 175            | 159         | H        |
| * 7.439         | 49.93                | PK-U | 35.8                    | -30.7  | 0            | 55.03                      | -                  | -           | 74                  | -18.97      | 128            | 232         | H        |
| * 7.44          | 41.67                | MAV1 | 35.8                    | -30.7  | 2.24         | 49.01                      | 54                 | -4.99       | -                   | -           | 128            | 232         | H        |
| * 4.96          | 53                   | PK-U | 34                      | -34    | 0            | 53                         | -                  | -           | 74                  | -21         | 80             | 174         | V        |
| * 4.96          | 47.49                | MAV1 | 34                      | -34    | 2.24         | 49.73                      | 54                 | -4.27       | -                   | -           | 80             | 174         | V        |
| * 7.439         | 47.36                | PK-U | 35.8                    | -30.7  | 0            | 52.46                      | -                  | -           | 74                  | -21.54      | 60             | 167         | V        |
| * 7.439         | 38.41                | MAV1 | 35.8                    | -30.7  | 2.24         | 45.75                      | 54                 | -8.25       | -                   | -           | 60             | 167         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average


## 11.3. WORST-CASE BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

#### HORIZONTAL PLOT

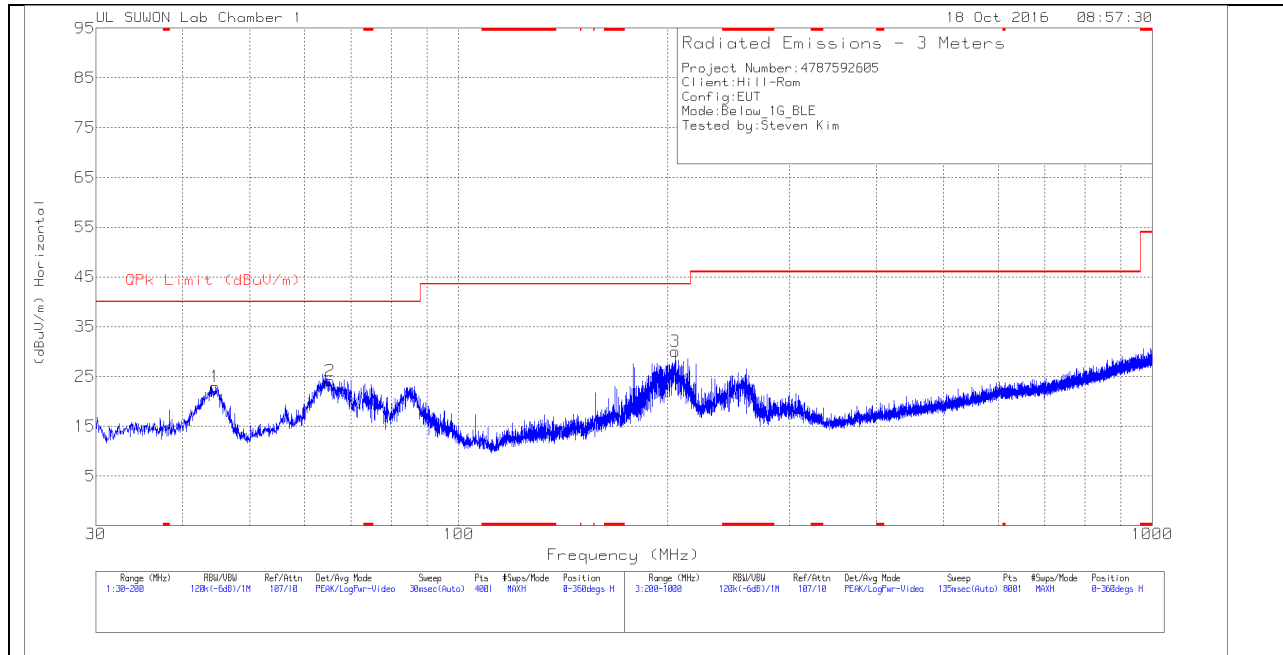

#### VERTICAL PLOT

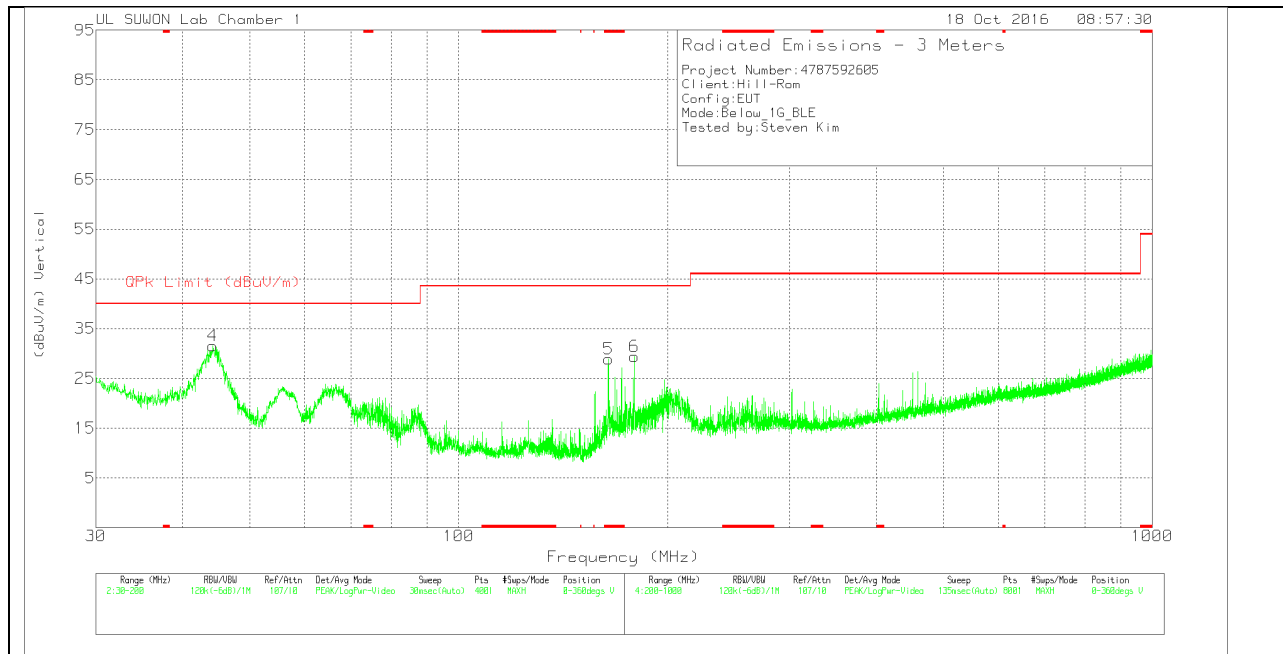

## BELOW 1 GHz TABLE

### Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | VULB9163-750 | Bi-Log | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|--------------|--------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 44.5775         | 39.64                | Pk  | 13.5         | -30.2  | 22.94                      | 40                 | -17.06      | 0-360          | 400         | H        |
| 2      | 65.2325         | 42.92                | Pk  | 11.1         | -29.9  | 24.12                      | 40                 | -15.88      | 0-360          | 200         | H        |
| 4      | 44.2375         | 48.36                | Pk  | 13.4         | -30.2  | 31.56                      | 40                 | -8.44       | 0-360          | 100         | V        |
| 5      | * 164.385       | 48.65                | Pk  | 8.7          | -28.5  | 28.85                      | 43.52              | -14.67      | 0-360          | 200         | V        |
| 6      | 179.26          | 48.33                | Pk  | 9.4          | -28.3  | 29.43                      | 43.52              | -14.09      | 0-360          | 200         | V        |
| 3      | 205.1           | 46.75                | Pk  | 11.4         | -28.1  | 30.05                      | 43.52              | -13.47      | 0-360          | 100         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

## 12. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.



## RESULTS

### 6 WORST EMISSIONS

#### LINE 1 PLOT

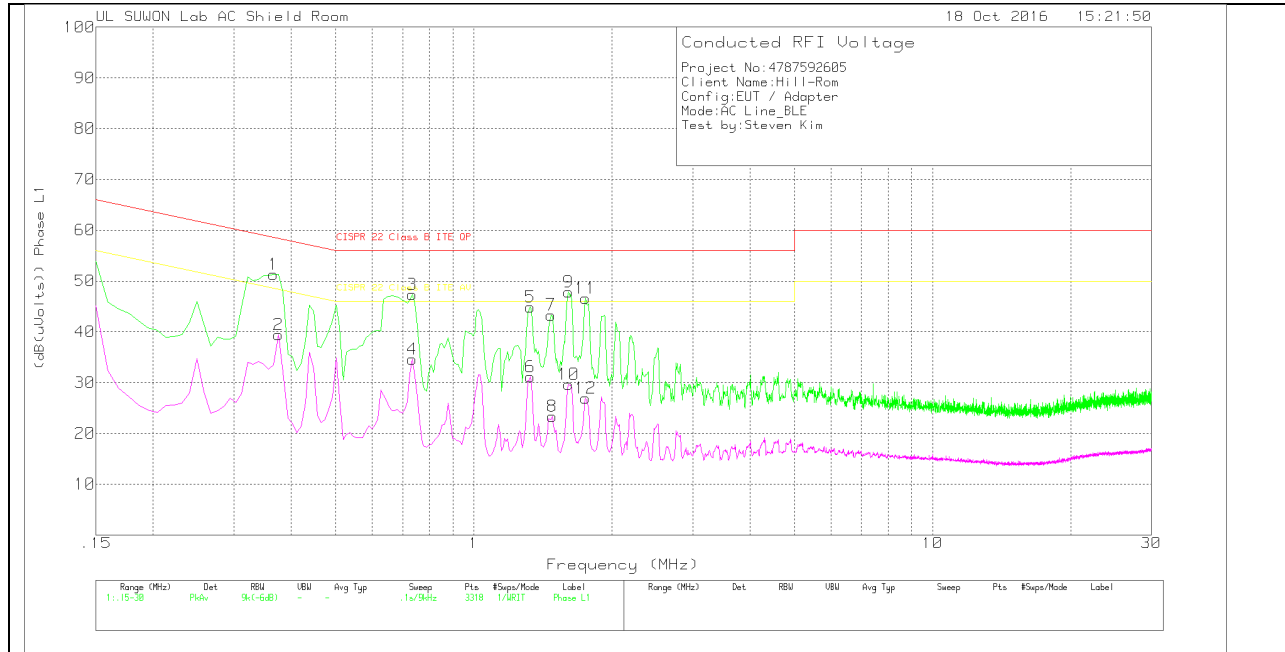

## LINE 1 RESULTS

### Trace Markers

Phase L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_w<br>ith ex-<br>cord_L1 | CE Shield Room | Corrected Reading (dB(uVolts)) | CISPR 22 Class B ITE QP | Margin (dB) | CISPR 22 Class B ITE AV | Margin (dB) |
|--------|-----------------|----------------------|-----|--------------------------------|----------------|--------------------------------|-------------------------|-------------|-------------------------|-------------|
| 1      | .366            | 41.42                | Pk  | 9.9                            | 0              | 51.32                          | 58.59                   | -7.27       | -                       | -           |
| 2      | .375            | 29.51                | Av  | 9.9                            | 0              | 39.41                          | -                       | -           | 48.39                   | -8.98       |
| 3      | .735            | 37.4                 | Pk  | 9.9                            | 0              | 47.3                           | 56                      | -8.7        | -                       | -           |
| 4      | .735            | 24.7                 | Av  | 9.9                            | 0              | 34.6                           | -                       | -           | 46                      | -11.4       |
| 5      | 1.329           | 34.96                | Pk  | 9.8                            | .1             | 44.86                          | 56                      | -11.14      | -                       | -           |
| 6      | 1.329           | 21.26                | Av  | 9.8                            | .1             | 31.16                          | -                       | -           | 46                      | -14.84      |
| 7      | 1.473           | 33.42                | Pk  | 9.8                            | .1             | 43.32                          | 56                      | -12.68      | -                       | -           |
| 8      | 1.482           | 13.48                | Av  | 9.8                            | .1             | 23.38                          | -                       | -           | 46                      | -22.62      |
| 9      | 1.608           | 38.05                | Pk  | 9.7                            | .1             | 47.85                          | 56                      | -8.15       | -                       | -           |
| 10     | 1.608           | 19.84                | Av  | 9.7                            | .1             | 29.64                          | -                       | -           | 46                      | -16.36      |
| 11     | 1.752           | 36.8                 | Pk  | 9.7                            | .1             | 46.6                           | 56                      | -9.4        | -                       | -           |
| 12     | 1.752           | 17.12                | Av  | 9.7                            | .1             | 26.92                          | -                       | -           | 46                      | -19.08      |

Pk - Peak detector

Av - Average detection


### Quasi-Peak Emissions

Phase L1 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_wit<br>h ex-cord_L1 | CE Shield Room | Corrected Reading (dB(uVolts)) | CISPR 22 Class B ITE QP | Margin (dB) | CISPR 22 Class B ITE AV | Margin (dB) |
|-----------------|----------------------|-----|----------------------------|----------------|--------------------------------|-------------------------|-------------|-------------------------|-------------|
| .3669           | 38.65                | Qp  | 9.9                        | 0              | 48.55                          | 58.57                   | -10.02      | -                       | -           |
| .7386           | 32.76                | Qp  | 9.9                        | 0              | 42.66                          | 56                      | -13.34      | -                       | -           |
| 1.6044          | 32.76                | Qp  | 9.7                        | .1             | 42.56                          | 56                      | -13.44      | -                       | -           |
| 1.7484          | 31.15                | Qp  | 9.7                        | .1             | 40.95                          | 56                      | -15.05      | -                       | -           |

Qp - Quasi-Peak detector

## LINE 2 PLOT

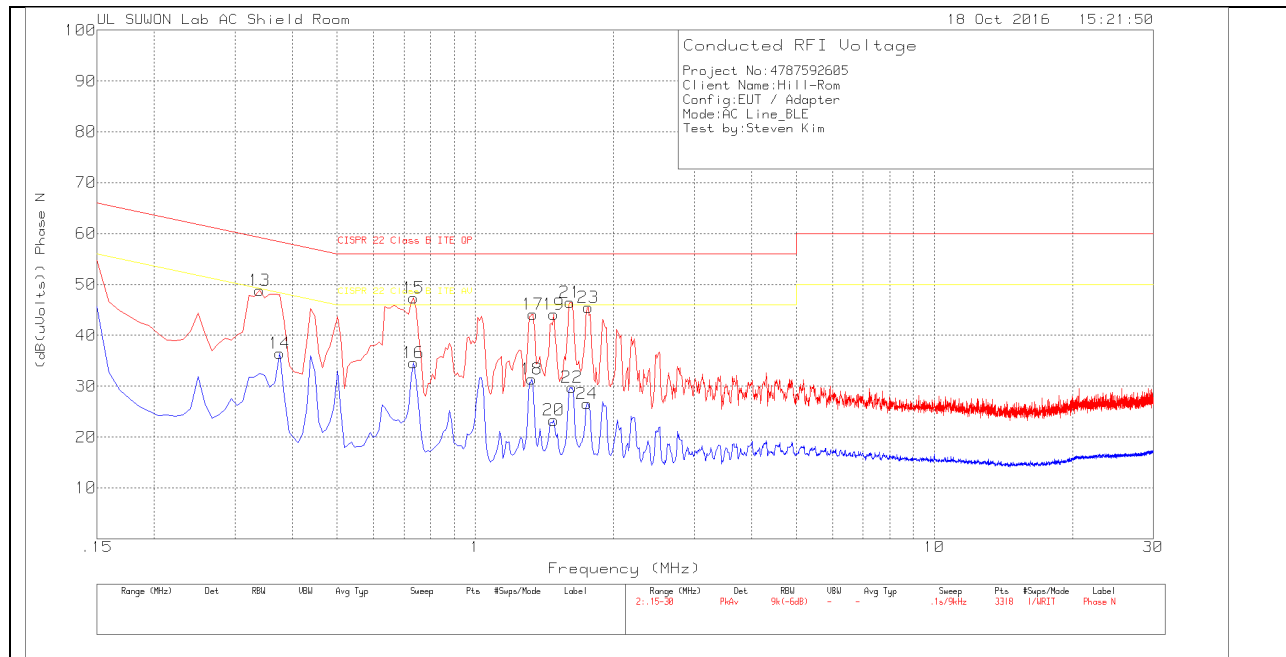

## LINE 2 RESULTS

### Trace Markers

Phase N .15 - 30MHz

| Marker | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Det | 101837_w<br>ith ex-<br>cord_N | CE Shield<br>Room | Corrected<br>Reading<br>(dB(uVolts<br>) | CISPR 22<br>Class B ITE<br>QP | Margin<br>(dB) | CISPR 22<br>Class B ITE<br>AV | Margin<br>(dB) |
|--------|--------------------|----------------------------|-----|-------------------------------|-------------------|---|-------------------------------|----------------|-------------------------------|----------------|
| 13     | .339               | 39.01                      | Pk  | 9.8                           | 0                 | 48.81                                   | 59.23                         | -10.42         | -                             | -              |
| 14     | .375               | 26.57                      | Av  | 9.9                           | 0                 | 36.47                                   | -                             | -              | 48.39                         | -11.92         |
| 15     | .735               | 37.47                      | Pk  | 9.9                           | 0                 | 47.37                                   | 56                            | -8.63          | -                             | -              |
| 16     | .735               | 24.71                      | Av  | 9.9                           | 0                 | 34.61                                   | -                             | -              | 46                            | -11.39         |
| 17     | 1.338              | 34.24                      | Pk  | 9.8                           | .1                | 44.14                                   | 56                            | -11.86         | -                             | -              |
| 18     | 1.329              | 21.53                      | Av  | 9.8                           | .1                | 31.43                                   | -                             | -              | 46                            | -14.57         |
| 19     | 1.482              | 34.22                      | Pk  | 9.8                           | .1                | 44.12                                   | 56                            | -11.88         | -                             | -              |
| 20     | 1.482              | 13.39                      | Av  | 9.8                           | .1                | 23.29                                   | -                             | -              | 46                            | -22.71         |
| 21     | 1.608              | 36.73                      | Pk  | 9.7                           | .1                | 46.53                                   | 56                            | -9.47          | -                             | -              |
| 22     | 1.626              | 19.97                      | Av  | 9.7                           | .1                | 29.77                                   | -                             | -              | 46                            | -16.23         |
| 23     | 1.761              | 35.68                      | Pk  | 9.7                           | .1                | 45.48                                   | 56                            | -10.52         | -                             | -              |
| 24     | 1.752              | 16.72                      | Av  | 9.7                           | .1                | 26.52                                   | -                             | -              | 46                            | -19.48         |

Pk - Peak detector

Av - Average detection

### Quasi-Peak Emissions

Phase N .15 - 30MHz

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Det | 101837_wit<br>h ex-cord_N | CE Shield<br>Room | Corrected<br>Reading<br>(dB(uVolts)) | CISPR 22<br>Class B ITE<br>QP | Margin<br>(dB) | CISPR 22<br>Class B ITE<br>AV | Margin<br>(dB) |
|--------------------|----------------------------|-----|---------------------------|-------------------|--------------------------------------|-------------------------------|----------------|-------------------------------|----------------|
| .7305              | 32.62                      | Qp  | 9.9                       | 0                 | 42.52                                | 56                            | -13.48         | -                             | -              |
| 1.6044             | 31.69                      | Qp  | 9.7                       | .1                | 41.49                                | 56                            | -14.51         | -                             | -              |

Qp - Quasi-Peak detector