FCC RF Test Report

APPLICANT : FIH International Co., Ltd.

EQUIPMENT: GSM/WCDMA/LTE Mobile Phone

BRAND NAME : Nokia MODEL NAME : TA-1060

FCC ID : 2AJOTTA-1060

STANDARD : FCC Part 15 Subpart C §15.247

CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Oct. 26, 2017 and testing was completed on Dec. 04, 2017. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.

No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 1 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

TABLE OF CONTENTS

1.1 1.2 1.3 1.4 1.5	Applicant	5
1.3 1.4 1.5	Product Feature of Equipment Under Test Product Specification of Equipment Under Test	5
1.4 1.5	Product Specification of Equipment Under Test	
1.5	·	=
	NATION OF SELECT	6
1.6	Modification of EU I	6
	Testing Location	7
1.7	Applicable Standards	8
TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1	Descriptions of Test Mode	g
2.2	Test Mode	10
2.3	Connection Diagram of Test System	11
2.4	Support Unit used in test configuration and system	12
2.5	EUT Operation Test Setup	12
2.6	Measurement Results Explanation Example	13
TEST	RESULT	14
3.1	Number of Channel Measurement	14
3.2	Hopping Channel Separation Measurement	16
3.3	Dwell Time Measurement	23
3.4	20dB Bandwidth Measurement	26
3.5	Peak Output Power Measurement	33
3.6	Conducted Band Edges Measurement	35
3.7	Conducted Spurious Emission Measurement	42
3.8	·	
3.9	AC Conducted Emission Measurement	58
3.10	Antenna Requirements	62
LIST	OF MEASURING EQUIPMENT	63
UNC	ERTAINTY OF EVALUATION	64
	1.6 1.7 TEST 2.1 2.2 2.3 2.4 2.5 2.6 TEST 3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8 3.9 3.10 LIST	1.6 Testing Location

APPENDIX A. RADIATED SPURIOUS EMISSION

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 2 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7O2602-01A	Rev. 01	Initial issue of report	Dec. 13, 2017

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 3 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.30 dB at 30.00 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.41 dB at 0.175 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 4 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

1 General Description

1.1 Applicant

FIH International Co., Ltd.

No.18, Tongji zhonglu, Beijing Economic&Technological Development Area

1.2 Manufacturer

HMD Global Oy

Karaportti 2 02610 Espoo FINLAND

1.3 Product Feature of Equipment Under Test

Product Feature					
Equipment	GSM/WCDMA/LTE Mobile Phone				
Brand Name	Nokia				
Model Name	TA-1060				
FCC ID	2AJOTTA-1060				
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v2.1+EDR/ Bluetooth v4.2 LE				
HW Version	HW0241				
SW Version	000C_0_14A				
EUT Stage	Identical Prototype				

Report No.: FR7O2602-01A

Remark:

- 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- 2. This is a variant report for TA-1060, the difference between TA-1047(FCC ID: 2AJOTTA-1047) and TA-1060(FCC ID: 2AJOTTA-1060) is change dual SIM card to single SIM card. Spot check measurements were performed on the subject device for radiated spurious emission, the test result were consistent with Sporton Report Number FR7O2602A, FCC ID: 2AJOTTA-1047, so all the test cases were leveraged on reference report.

 Sporton International (Kunshan) Inc.
 Page Number
 : 5 of 64

 TEL: +86-512-57900158
 Report Issued Date
 : Dec. 13, 2017

 FAX: +86-512-57900958
 Report Version
 : Rev. 01

FCC ID: 2AJOTTA-1060 Report Template No.: BU5-FR15CBT Version 2.0

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Frequency Range 2402 MHz ~ 2480 MHz				
Number of Channels	79			
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78			
Maximum Output Power to Antenna	Bluetooth BR(1Mbps): 5.45 dBm (0.0035 W) Bluetooth EDR (2Mbps): 4.78 dBm (0.0030 W) Bluetooth EDR (3Mbps): 4.98 dBm (0.0031 W)			
Antenna Type / Gain	PIFA Antenna with gain 0.13 dBi			
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK			

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

Sporton International (Kunshan) Inc.
TEL: +86-512-57900158

FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 6 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No. : FR7O2602-01A

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

Test Site	Sporton International (Kunshan) Inc.			
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL: +86-512-57900158 FAX: +86-512-57900958			
Test Site No.	Sporton S	Site No.	FCC Test Firm Registration No.	
	TH01-KS	CO01-KS	630927	

Note: The test site complies with ANSI C63.4 2014 requirement.

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. is CN5019

Test Site	Sporton International (Shenzhen) Inc.			
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China			
	TEL: +86-755-3320-2398 Sporton Site No.	FCC Test Firm Registration No.		
Test Site No.	03CH04-SZ	577730		

Note: The test site complies with ANSI C63.4 2014 requirement.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 7 of 64

Report Issued Date : Dec. 13, 2017

Report Version : Rev. 01

Report No.: FR7O2602-01A

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 8 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 2.0

Report No.: FR7O2602-01A

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

		В	luetooth RF Output Pow	er
Channel	Frequency		Data Rate / Modulation	
Chamilei		GFSK	π/4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	5.20 dBm	4.46 dBm	4.69 dBm
Ch39	2441MHz	5.45 dBm	4.78 dBm	4.98 dBm
Ch78	2480MHz	5.39 dBm	4.60 dBm	4.81 dBm

Remark:

- 1. All the test data for each data rate were verified, but only the worst case was reported.
- 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 9 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

	Summary table of Test Cases					
	Data Rate / Modulation					
Test Item	Bluetooth BR 1Mbps	Bluetooth EDR 2Mbps	Bluetooth EDR 3Mbps			
	GFSK	π/4-DQPSK	8-DPSK			
Conducted	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz			
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz			
Test Cases	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz			
	Bluetooth BR 1Mbps GFSK					
Radiated		Mode 1: CH00_2402 MHz				
Test Cases	Mode 2: CH39_2441 MHz					
	Mode 3: CH78_2480 MHz					
AC						
AC Conducted	Mode 1 :GSM850 Idle + Blu (Charging from Ada	uetooth Link + WLAN Link(2.4	G) + Earphone + USB Cable			

Remark:

- 1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.
- 2. For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable.


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 10 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01


Report No.: FR7O2602-01A

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

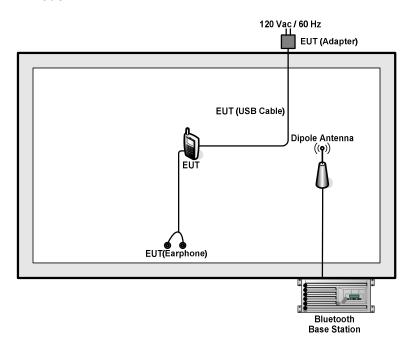

<AC Conducted Emission Mode>

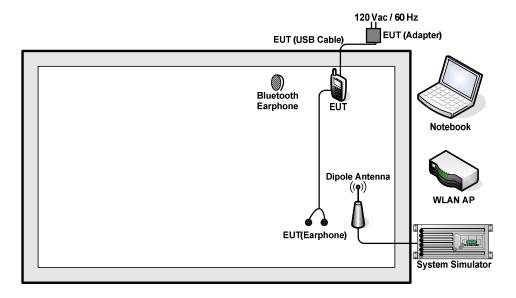

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 11 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	BT Base Station	R&S	СВТ	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Notebook	Lenovo	G480	PRC4	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
5.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11		shielded cable DC O/P1.8m , Unshielded AC I/P1.8m
6.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 12 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.5 dB.

Offset(dB) = RF cable loss(dB). = 5.5 (dB)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 13 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 2.0

Report No.: FR7O2602-01A

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

- 1. The testing follows ANSI C63.10-2013 clause 7.8.3.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- Use the following spectrum analyzer settings: Span = the frequency band of operation;
 RBW = 300kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. The number of hopping frequency used is defined as the number of total channel.
- 7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup



3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 14 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

Number of Hopping Channel Plot on Channel 00 - 78

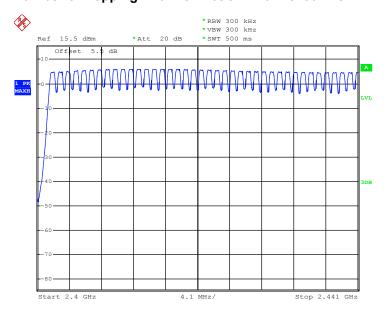

Date: 24.NOV.2017 20:01:10

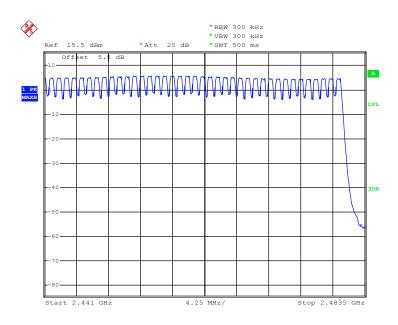

Date: 24.NOV.2017 20:06:46

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 15 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Report No.: FR7O2602-01A

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.2.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- 5. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels;
 - RBW = 300kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. Measure and record the results in the test report.

3.2.4 Test Setup



 Sporton International (Kunshan) Inc.
 Page Number
 : 16 of 64

 TEL: +86-512-57900158
 Report Issued Date
 : Dec. 13, 2017

 FAX: +86-512-57900958
 Report Version
 : Rev. 01


FCC ID: 2AJOTTA-1060 Report Template No.: BU5-FR15CBT Version 2.0

3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.6453	Pass
39	2441	1.002	0.6453	Pass
78	2480	1.002	0.6347	Pass

Channel Separation Plot on Channel 00 - 01

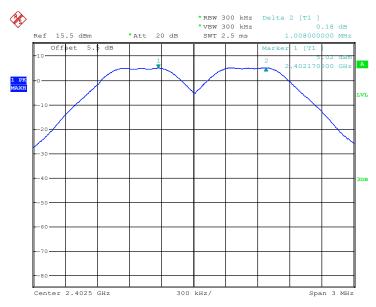


Date: 24.NOV.2017 19:33:33

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 17 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01


Report No.: FR7O2602-01A

Channel Separation Plot on Channel 39 - 40

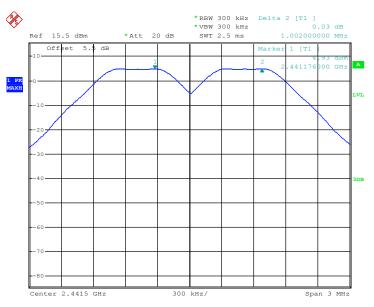

Date: 24.NOV.2017 19:34:12

Channel Separation Plot on Channel 77 - 78

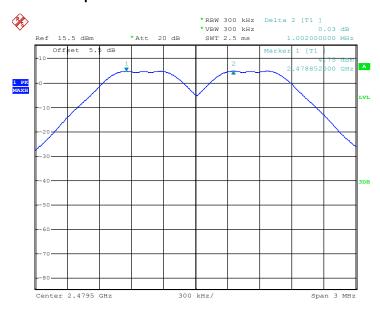

Date: 24.NOV.2017 19:34:51

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 18 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No. : FR7O2602-01A

Test Mode :	2Mbps	Temperature :	21 ~ 25 ℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8440	Pass
39	2441	1.002	0.8440	Pass
78	2480	1.008	0.8320	Pass

Channel Separation Plot on Channel 00 - 01

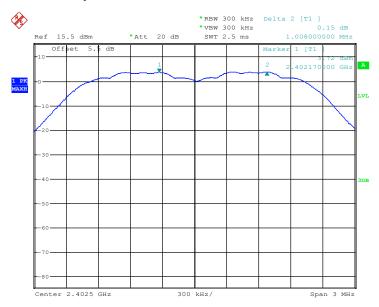


Date: 24.NOV.2017 19:35:30

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 19 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01


Report No.: FR7O2602-01A

Channel Separation Plot on Channel 39 - 40

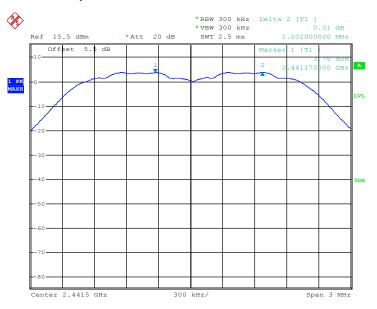

Date: 24.NOV.2017 19:36:13

Channel Separation Plot on Channel 77 - 78

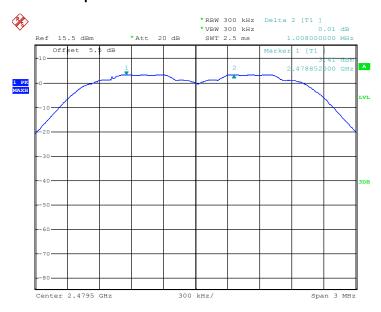

Date: 24.NOV.2017 19:40:25

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 20 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No. : FR7O2602-01A

Test Mode :	3Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8280	Pass
39	2441	1.008	0.8360	Pass
78	2480	1.008	0.8280	Pass

Channel Separation Plot on Channel 00 - 01

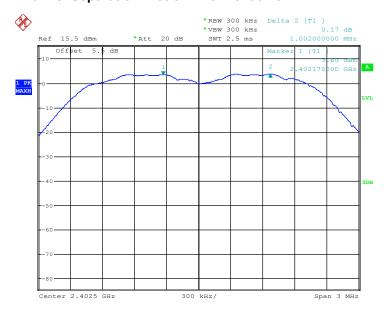


Date: 24.NOV.2017 19:41:51

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 21 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01


Report No. : FR7O2602-01A

Channel Separation Plot on Channel 39 - 40

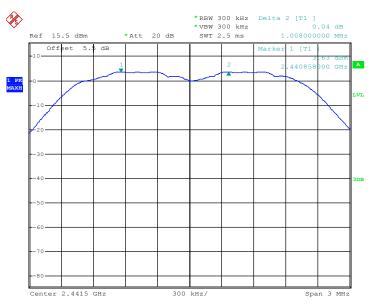

Date: 24.NOV.2017 19:42:31

Channel Separation Plot on Channel 77 - 78

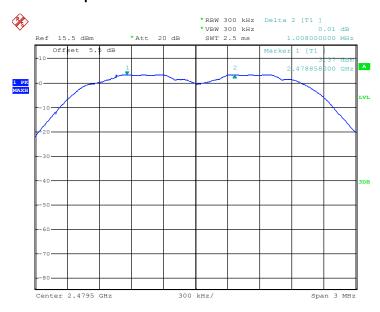

Date: 24.NOV.2017 19:43:11

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 22 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No. : FR7O2602-01A

3.3 Dwell Time Measurement

3.3.1 **Limit of Dwell Time**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 **Test Procedures**

- 1. The testing follows ANSI C63.10-2013 clause 7.8.4.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
- Measure and record the results in the test report. 6.

3.3.4 Test Setup



Sporton International (Kunshan) Inc. Page Number TEL: +86-512-57900158 Report Issued Date: Dec. 13, 2017 FAX: +86-512-57900958

FCC ID: 2AJOTTA-1060

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 2.0

: 23 of 64

Report No.: FR7O2602-01A

3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

Mode	Channel	Hops Over Occupancy Time(hops)	IIMA	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.8783	0.31	0.4	Pass
AFH	20	53.34	2.8783	0.15	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
 With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
 Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- 2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4×20) (s), Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
- 3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 24 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

Package Transfer Time Plot

Report No.: FR7O2602-01A

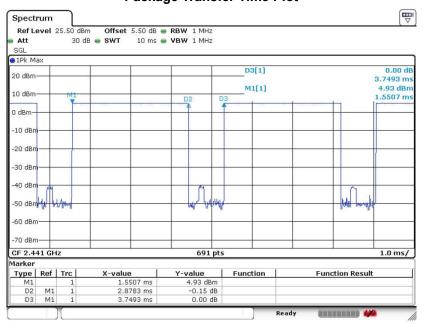

Date: 24.NOV.2017 22:14:16

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 25 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
 Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
 RBW ≥ 1% of the 20 dB bandwidth; VBW ≥ RBW; Sweep = auto; Detector function = peak;
 Trace = max hold.
- 5. Measure and record the results in the test report.

3.4.4 Test Setup



Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 26 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01


Report No.: FR7O2602-01A

3.4.5 Test Result of 20dB Bandwidth

Test Mode:	1Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.968
39	2441	0.968
78	2480	0.952


20 dB Bandwidth Plot on Channel 00

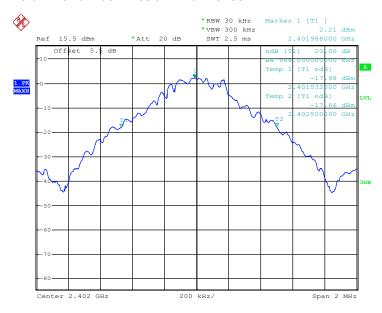

Date: 24.NOV.2017 19:43:39


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 27 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

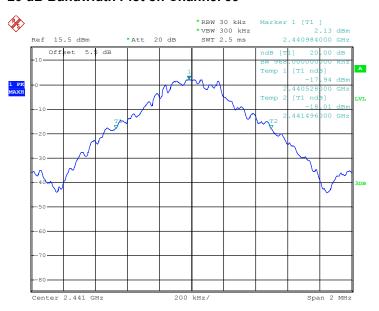

Date: 24.NOV.2017 19:43:59

20 dB Bandwidth Plot on Channel 78

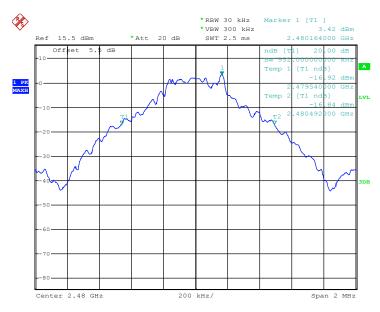

Date: 24.NOV.2017 19:44:19


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 28 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

Test Mode :	2Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.266
39	2441	1.266
78	2480	1.248

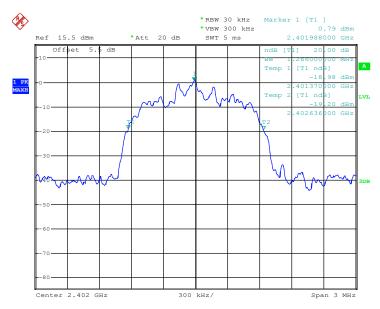

Date: 24.NOV.2017 19:44:44


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 29 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

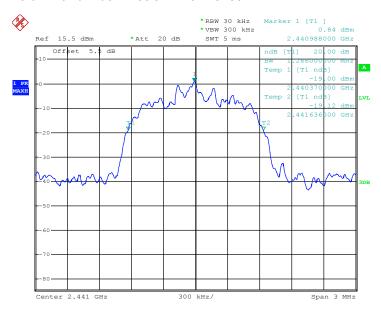

Date: 24.NOV.2017 19:45:07

20 dB Bandwidth Plot on Channel 78

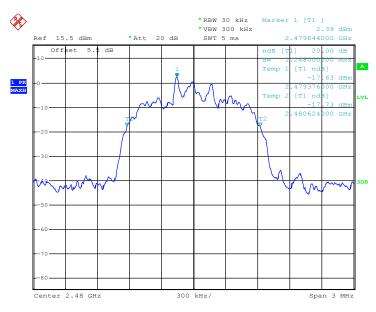

Date: 24.NOV.2017 19:45:20


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 30 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

Test Mode :	3Mbps	Temperature :	21 ~ 25 ℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.242
39	2441	1.254
78	2480	1.242

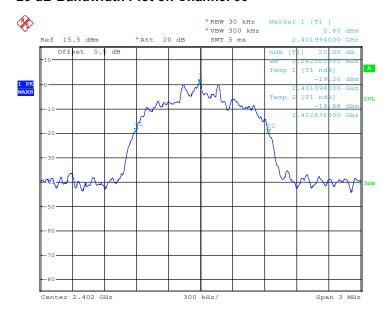

Date: 24.NOV.2017 19:45:37


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 31 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

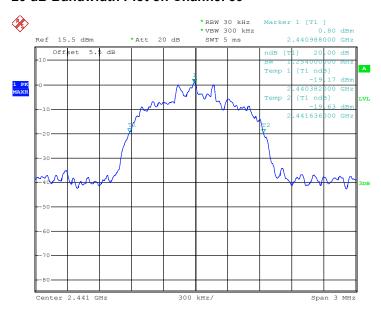

Date: 24.NOV.2017 19:45:54

20 dB Bandwidth Plot on Channel 78

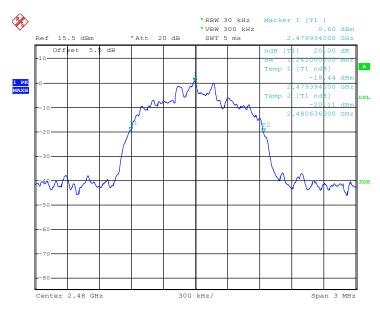

Date: 24.NOV.2017 19:46:17

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 32 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.5.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power with cable loss and record the results in the test report.
- 5. Measure and record the results in the test report.

3.5.4 Test Setup



TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 33 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

		RF Power (dBm)			
Channel	Frequency	GFSK	Max. Limits	Dogg/Egil	
	(MHz)	1 Mbps	(dBm)	Pass/Fail	
00	2402	5.20	20.97	Pass	
39	2441	5.45	20.97	Pass	
78	2480	5.39	20.97	Pass	

Test Mode :	2Mbps	Temperature :	21 ~ 25 ℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

	F	RF Power (dBm)			
Channel	Frequency (MHz)	π/4-DQPSK	Max. Limits	Pass/Fail	
		2 Mbps	(dBm)		
00	2402	4.46	20.97	Pass	
39	2441	4.78	20.97	Pass	
78	2480	4.60	20.97	Pass	

Test Mode :	3Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

	Frequency (MHz)	RF Power (dBm)			
Channel		8-DPSK	Max. Limits	Pass/Fail	
		3 Mbps			
00	2402	4.69	20.97	Pass	
39	2441	4.98	20.97	Pass	
78	2480	4.81	20.97	Pass	

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 34 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.6.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
- 4. Enable hopping function of the EUT and then repeat step 2. and 3.
- 5. Measure and record the results in the test report.

3.6.4 Test Setup




Page Number : 35 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Channel :	00 and 78	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

Low Band Edge Plot on Channel 00

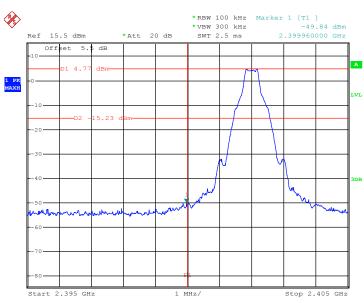

Date: 24.NOV.2017 19:47:11

High Band Edge Plot on Channel 78

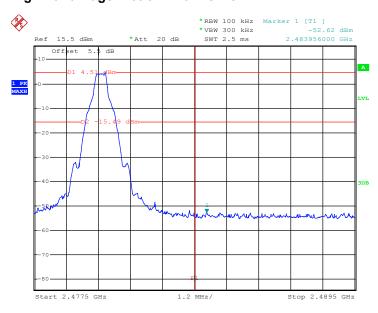

Date: 24.NOV.2017 19:48:02


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 36 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	2Mbps	Temperature :	21 ~ 25℃
Test Channel :	00 and 78	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

Low Band Edge Plot on Channel 00

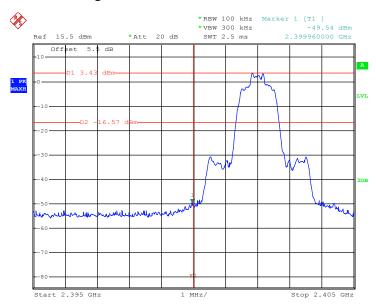

Date: 24.NOV.2017 19:48:54

High Band Edge Plot on Channel 78

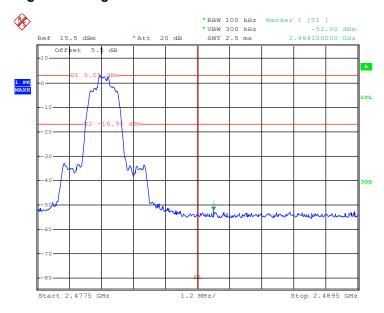

Date: 24.NOV.2017 19:49:45


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 37 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	3Mbps	Temperature :	21 ~ 25℃
Test Channel :	00 and 78	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

Low Band Edge Plot on Channel 00

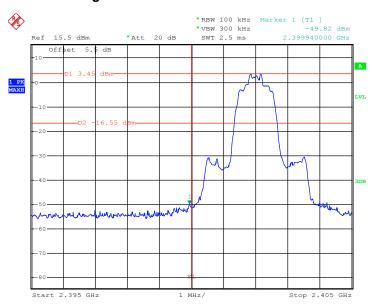

Date: 24.NOV.2017 19:50:37

High Band Edge Plot on Channel 78

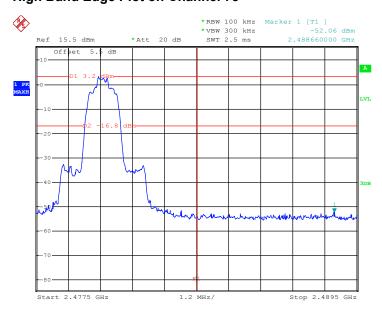

Date: 24.NOV.2017 19:51:29

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 38 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

1Mbps Hopping Mode Low Band Edge Plot

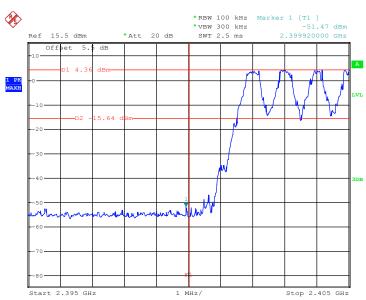

Date: 24.NOV.2017 20:07:59

1Mbps Hopping Mode High Band Edge Plot

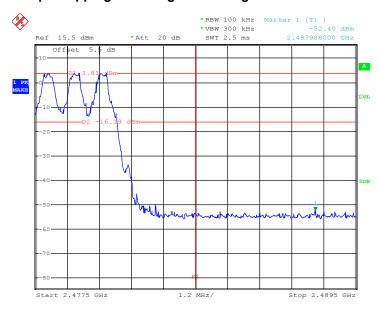

Date: 24.NOV.2017 20:09:20


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 39 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	2Mbps	Temperature :	21 ~ 25 ℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

2Mbps Hopping Mode Low Band Edge Plot

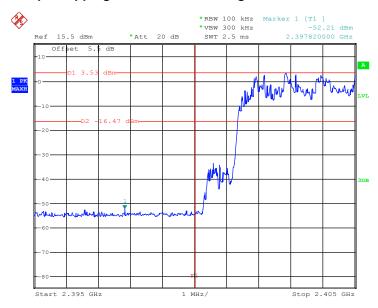

Date: 24.NOV.2017 20:13:25

2Mbps Hopping Mode High Band Edge Plot

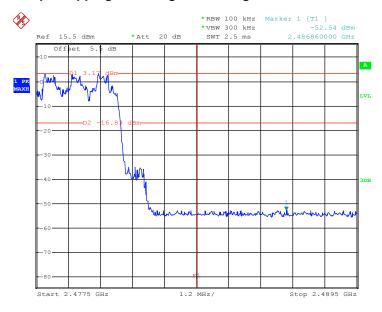

Date: 24.NOV.2017 20:12:17


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 40 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	3Mbps	Temperature :	21 ~ 25 ℃
Test Engineer :	Silent Hai	Relative Humidity :	51 ~ 55%

3Mbps Hopping Mode Low Band Edge Plot

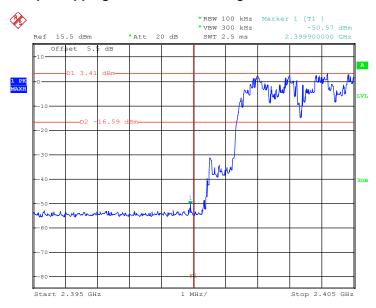

Date: 24.NOV.2017 20:15:12

3Mbps Hopping Mode High Band Edge Plot

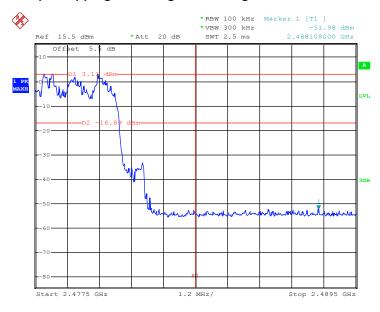

Date: 24.NOV.2017 20:18:53

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 41 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

- 1. The testing follows ANSI C63.10-2013 clause 7.8.8.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
- 5. Measure and record the results in the test report.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup



Sporton International (Kunshan) Inc. TEL: +86-512-57900158


FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 42 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Channel :	00	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

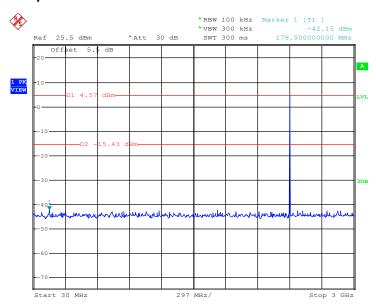

Date: 24.NOV.2017 20:23:34

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

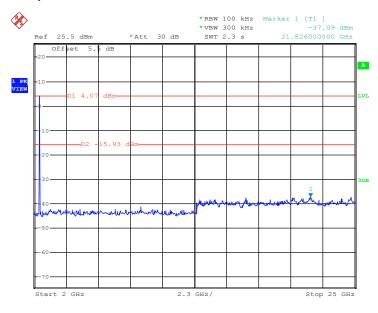

Date: 24.NOV.2017 20:23:56

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 43 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

Report Version : Rev. 01
Report Template No.: BU5-FR15CBT Version 2.0


Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Channel :	39	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

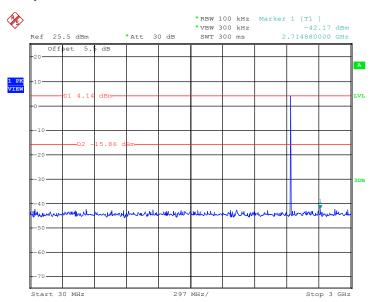

Date: 24.NOV.2017 20:25:16

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

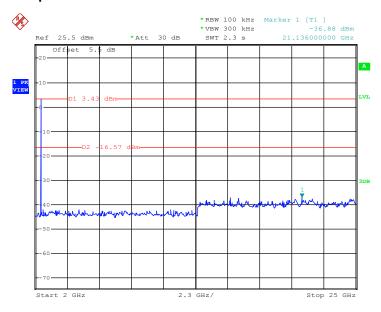

Date: 24.NOV.2017 20:25:37


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 44 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	1Mbps	Temperature :	21 ~ 25℃
Test Channel :	78	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

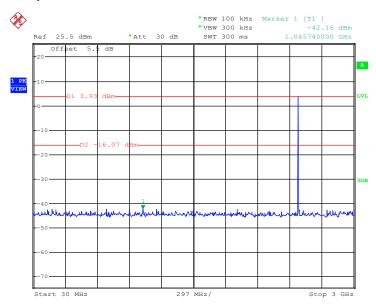

Date: 24.NOV.2017 20:28:37

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

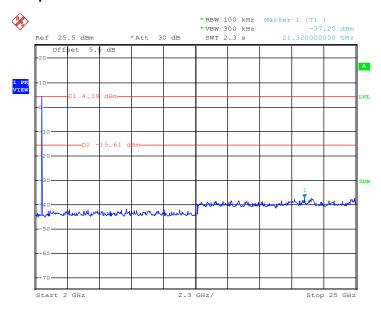

Date: 24.NOV.2017 20:28:58


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 45 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	2Mbps	Temperature :	21 ~ 25℃
Test Channel :	00	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

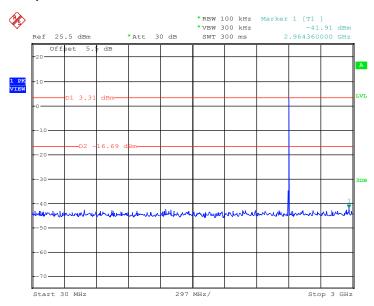

Date: 24.NOV.2017 20:31:11

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

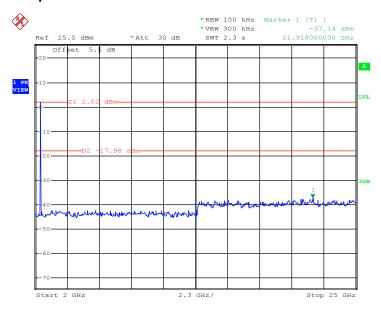

Date: 24.NOV.2017 20:31:33


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 46 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	2Mbps	Temperature :	21 ~ 25℃
Test Channel :	39	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

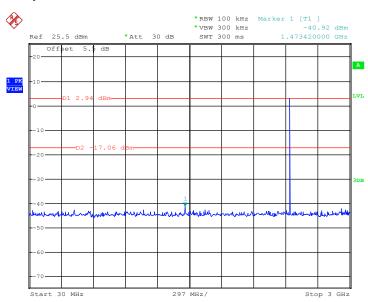

Date: 24.NOV.2017 20:38:19

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

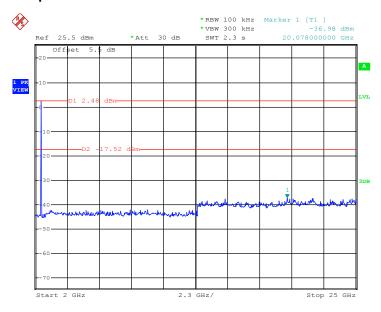

Date: 24.NOV.2017 20:38:41


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 47 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	2Mbps	Temperature :	21 ~ 25℃
Test Channel :	78	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

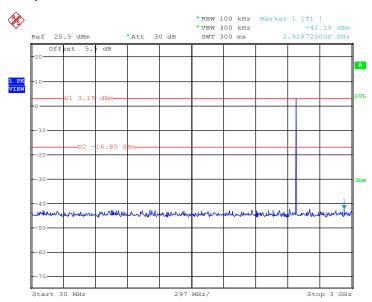

Date: 24.NOV.2017 20:44:53

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

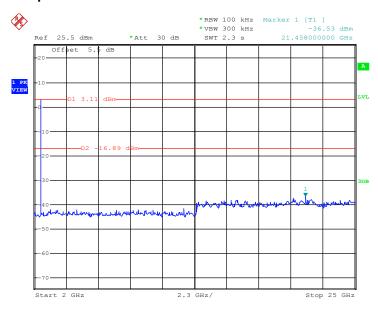

Date: 24.NOV.2017 20:45:15


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 48 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	3Mbps	Temperature :	21 ~ 25℃
Test Channel :	00	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

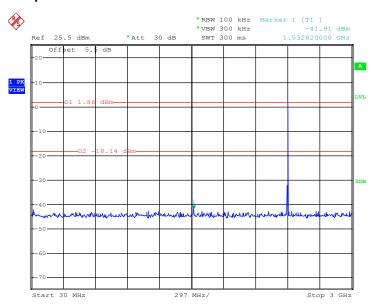

Date: 24.NOV.2017 20:51:41

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

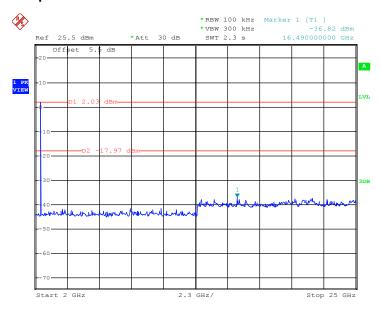

Date: 24.NOV.2017 20:52:02


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 49 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	3Mbps	Temperature :	21 ~ 25℃
Test Channel :	39	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

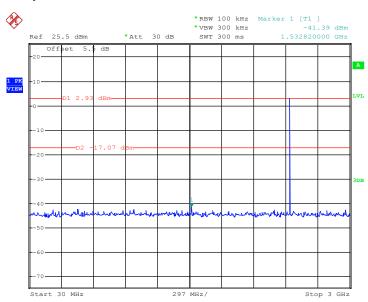

Date: 24.NOV.2017 20:59:12

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

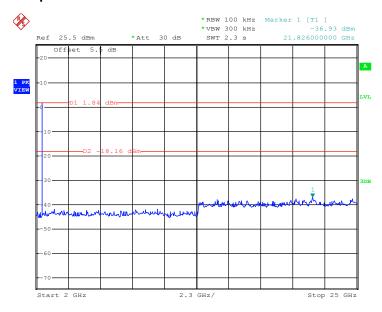

Date: 24.NOV.2017 20:59:34


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 50 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A


Test Mode :	3Mbps	Temperature :	21 ~ 25℃
Test Channel :	78	Relative Humidity :	51 ~ 55%
		Test Engineer :	Silent Hai

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

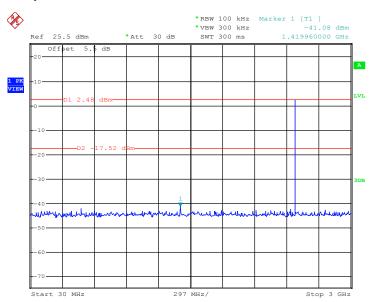

Date: 24.NOV.2017 20:57:34

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

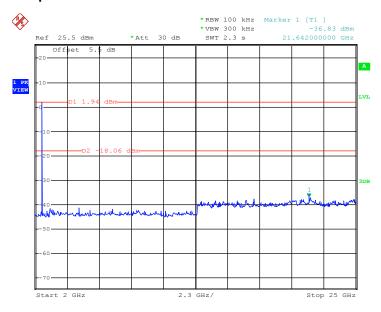

Date: 24.NOV.2017 20:57:56

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 51 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 52 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.8.3 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 4. Set to the maximum power setting and enable the EUT transmit continuously.
- 5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1*L_1+N_2*L_2+...+N_{n-1}*LN_{n-1}+N_n*L_n$
 - Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
 - Average Emission Level = Peak Emission Level + 20*log(Duty cycle)
- 6. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Page Number : 53 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.8.4 Test Setup

For radiated emissions below 30MHz




For radiated emissions from 30MHz to 1GHz



TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 54 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

For radiated emissions above 1GHz

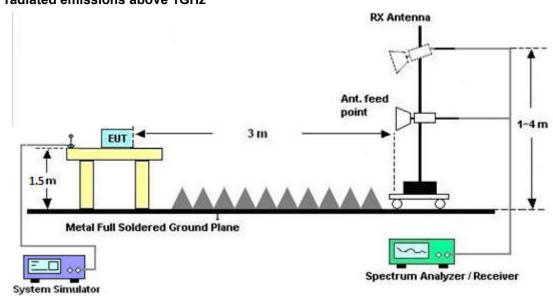

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 55 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01


Report No.: FR7O2602-01A

3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

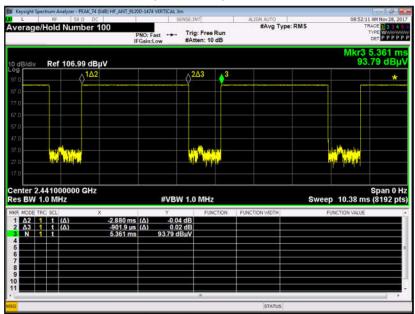

DH5 on time (Count Pulses) Plot on Channel 39

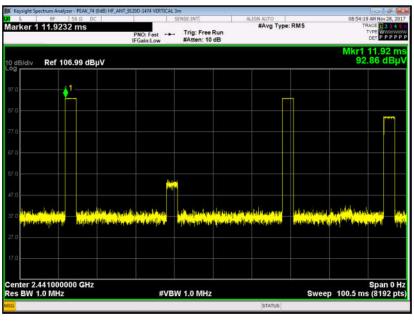

Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
- 2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
- 3. DH5 has the highest duty cycle worst case and is reported.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 56 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

 $2.88 \text{ ms } \times 20 \text{ channels} = 57.6 \text{ ms}$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. [100ms / 57.6ms] = 2 hops

Thus, the maximum possible ON time:

2.88 ms x 2 = 5.76 ms

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

 $20 \times log(5.76 \text{ ms/}100\text{ms}) = -24.79 \text{ dB}$

3.8.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

Page Number : 57 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Eroquency of emission (MUz)	Conducted limit (dBμV)					
Frequency of emission (MHz)	Quasi-peak	Average				
0.15-0.5	66 to 56*	56 to 46*				
0.5-5	56	46				
5-30	60	50				

^{*}Decreases with the logarithm of the frequency.

3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 **Test Procedures**

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Sporton International (Kunshan) Inc. Page Number TEL: +86-512-57900158 Report Issued Date: Dec. 13, 2017 FAX: +86-512-57900958

FCC ID: 2AJOTTA-1060

Report Version : Rev. 01


Report Template No.: BU5-FR15CBT Version 2.0

: 58 of 64

Report No.: FR7O2602-01A


Report No.: FR7O2602-01A

3.9.4 Test Setup

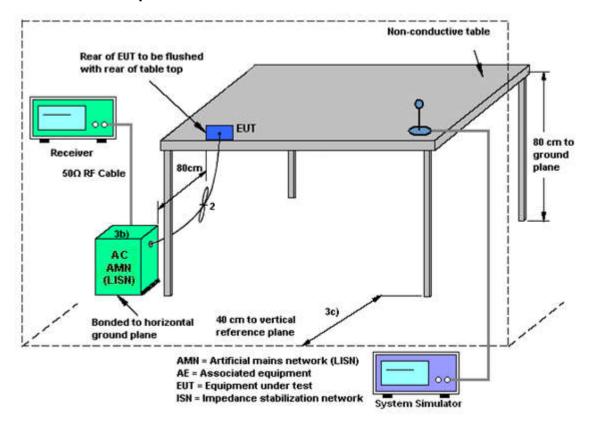

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 59 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

3.9.5 Test Result of AC Conducted Emission

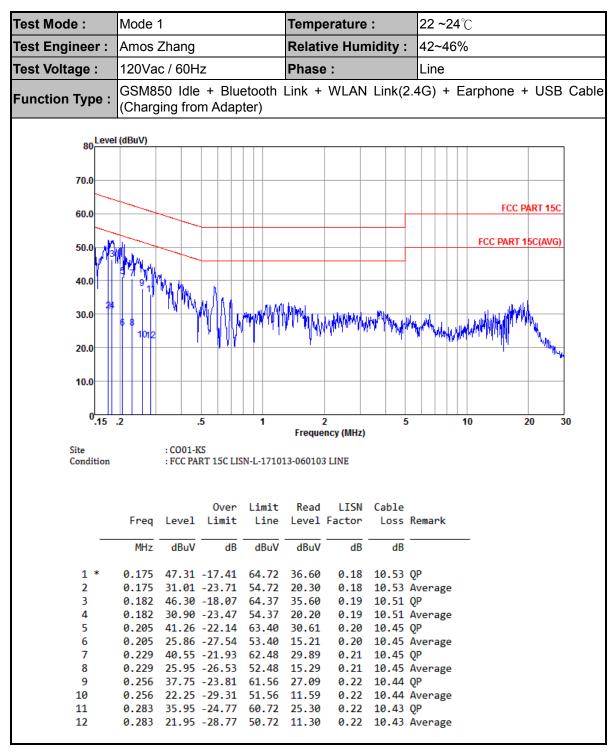

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 60 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A




Test Mode: Mode 1 Temperature: 22 ~24°C

Test Engineer: Amos Zhang Relative Humidity: 42~46%

Test Voltage: 120Vac / 60Hz Phase: Neutral

Function Type: GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter)

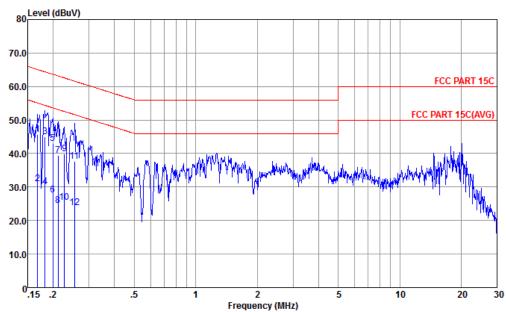

 Site
 : C001-KS

 Condition
 : FCC PART 15C LISN-N-171013-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.168	45.63	-19.45	65.08	34.80	0.28	10.55	QP
2	0.168	31.03	-24.05	55.08	20.20	0.28	10.55	Average
3 *	0.182	45.09	-19.28	64.37	34.30	0.28	10.51	QP
4	0.182	29.99	-24.38	54.37	19.20	0.28	10.51	Average
5	0.200	43.04	-20.58	63.62	32.30	0.28	10.46	QP
6	0.200	27.64	-25.98	53.62	16.90	0.28	10.46	Average
7	0.212	39.33	-23.81	63.14	28.60	0.28	10.45	QP
8	0.212	24.53	-28.61	53.14	13.80	0.28	10.45	Average
9	0.227	39.93	-22.64	62.57	29.20	0.28	10.45	QP
10	0.227	25.33	-27.24	52.57	14.60	0.28	10.45	Average
11	0.255	37.62	-23.98	61.60	26.90	0.28	10.44	QP
12	0.255	23.92	-27.68	51.60	13.20	0.28	10.44	Average

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 61 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 62 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 2.0

Report No.: FR7O2602-01A

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 12, 2017	Nov. 24, 2017~ Nov. 28, 2017	Oct. 11, 2018	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	May 25, 2017	Nov. 24, 2017~ Nov. 28, 2017	May 24, 2018	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GH z	Jan. 19, 2017	Nov. 24, 2017~ Nov. 28, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Nov. 24, 2017~ Nov. 28, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Apr. 20, 2017	Nov. 28, 2017	Apr. 19, 2018	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Apr. 20, 2017	Nov. 28, 2017	Apr. 19, 2018	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2017	Nov. 28, 2017	May 13, 2018	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 16, 2017	Nov. 28, 2017	May 15, 2018	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-147 4	1GHz~18GHz	Jan. 12, 2017	Nov. 28, 2017	Jan. 11, 2018	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBE CK	BBHA9170	9170#679	15GHz~40GHz	May 17, 2017	Nov. 28, 2017	May 16, 2018	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 19, 2017	Nov. 28, 2017	Oct. 18, 2018	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P- R	1989346	1GHz~18GHz	Jul. 27, 2017	Nov. 28, 2017	Jul. 26, 2018	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35- HG	1988315	18GHz~40GHz	Jul. 27, 2017	Nov. 28, 2017	Jul. 26, 2018	Radiation (03CH04-SZ
Amplifier	Agilent Technologies	83017A	MY532701 56	500MHz~26.5G Hz	Apr. 20, 2017	Nov. 28, 2017	Apr. 19, 2018	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Nov. 28, 2017	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 28, 2017	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 28, 2017	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	Dec. 04, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Dec. 04, 2017	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Dec. 04, 2017	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Dec. 04, 2017	Oct. 11, 2018	Conduction (CO01-KS)

NCR: No Calibration Required

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : 63 of 64
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Magazina Uncortainty for a Layal of Confidence	
Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.3dB
01 93 % (0 = 20C(y))	

Report No. : FR7O2602-01A

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of Confidence	5.1dB
of 95% $(U = 2Uc(y))$	5. IUB

<u>Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)</u>

Measuring Uncertainty for a Level of Confidence	5.0dB
of 95% (U = 2Uc(y))	3.0GB

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence	5.1dB
of 95% (U = 2Uc(y))	3. IUB

 Sporton International (Kunshan) Inc.
 Page Number
 : 64 of 64

 TEL: +86-512-57900158
 Report Issued Date
 : Dec. 13, 2017

 FAX: +86-512-57900958
 Report Version
 : Rev. 01

FCC ID: 2AJOTTA-1060 Report Template No.: BU5-FR15CBT Version 2.0

Appendix A. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

ВТ	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2385.285	45.44	-28.56	74	42.23	27.37	4.78	28.94	397	22	Р	Н
		2385.285	20.65	-33.35	54	-	-	-	-	397	22	Α	Н
DT	*	2402	91.25	-	-	87.98	27.43	4.78	28.94	397	22	Р	Н
BT CH00	*	2402	66.46	-	-	-	-	-	-	397	22	Α	Н
2402MHz		2380.665	45.6	-28.4	74	42.45	27.37	4.72	28.94	279	330	Р	V
2402111112		2380.665	20.81	-33.19	54	-	-	-	-	279	330	Α	V
	*	2402	96.03	-	-	92.76	27.43	4.78	28.94	279	330	Р	V
	*	2402	71.24	-	-	-	-	-	-	279	330	Α	V
		2365.72	45.23	-28.77	74	42.15	27.3	4.72	28.94	374	32	Р	Н
		2365.72	20.44	-33.56	54	-	-	-	-	374	32	Α	Н
	*	2441	92.71	-	-	89.23	27.61	4.82	28.95	374	32	Р	Н
	*	2441	67.92	-	-	-	-	-	-	374	32	Α	Н
		2486.84	47.47	-26.53	74	43.83	27.74	4.85	28.95	374	32	Р	Н
BT		2486.84	22.68	-31.32	54	-	-	-	-	374	32	Α	Н
CH 39 2441MHz		2351.16	45.25	-28.75	74	42.23	27.24	4.72	28.94	270	307	Р	٧
244 HVIF1Z		2351.16	20.46	-33.54	54	-	-	-	-	270	307	Α	V
	*	2441	96.98	-	-	93.5	27.61	4.82	28.95	270	307	Р	V
	*	2441	72.19	-	-	-	-	-	-	270	307	Α	٧
		2495.45	45.91	-28.09	74	42.21	27.8	4.85	28.95	270	307	Р	V
		2495.45	21.12	-32.88	54	-	-	-	-	270	307	Α	V

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : A1 of A6
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A



	*	2480	90.09	-	-	86.45	27.74	4.85	28.95	400	31	Р	Н
	*	2480	65.3	-	-	-	-	-	-	400	31	Α	Н
		2493.52	46.25	-27.75	74	42.55	27.8	4.85	28.95	400	31	Р	Н
BT		2493.52	21.46	-32.54	54	-	_	-	-	400	31	Α	Н
CH 78 2480MHz	*	2480	95.09	-	-	91.45	27.74	4.85	28.95	259	304	Р	V
240UWITIZ	*	2480	70.3	-	-	-	-	-	-	259	304	Α	٧
		2486.68	46	-28	74	42.36	27.74	4.85	28.95	259	304	Р	V
		2486.68	21.21	-32.79	54	-	_	-	-	259	304	Α	V
1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													

All results are PASS against Peak and Average limit line.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060

Page Number : A2 of A6 Report Issued Date: Dec. 13, 2017 Report Version : Rev. 01

Report No.: FR7O2602-01A

2.4GHz 2400~2483.5MHz BT (Harmonic @ 3m)

ВТ	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Doak	Pol
ы	Note	riequelicy	Level	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)		(P/A)	1
		4804	40.96	-33.04	74	62.19	31.44	5.55	58.22	151	219	Р	Н
BT		4804	16.17	-37.83	54	-	-	-	-	151	219	Α	Н
CH 00		4804	40.28	-33.72	74	61.51	31.44	5.55	58.22	151	219	Р	V
2402MHz		4804	15.49	-38.51	54	-	-	-	-	151	219	Α	V
		4882	39.72	-34.28	74	60.45	31.61	5.76	58.1	150	258	Р	Н
		4882	14.93	-39.07	54	-	-	-	-	150	258	Α	Н
		7323	43.36	-30.64	74	57.78	36.19	7.26	57.87	148	360	Р	Н
ВТ		7323	18.57	-35.43	54	-	-	-	-	148	360	Α	Н
CH 39 2441MHz		4882	40.94	-33.06	74	61.67	31.61	5.76	58.1	148	360	Р	٧
		4882	16.15	-37.85	54	-	-	-	-	148	360	Α	٧
		7323	43.93	-30.07	74	58.35	36.19	7.26	57.87	148	360	Р	٧
		7323	19.14	-34.86	54	-	-	-	-	148	360	Α	٧
		4960	39.27	-34.73	74	59.45	31.82	5.96	57.96	118	289	Р	Н
		4960	14.48	-39.52	54	-	-	-	-	118	289	Α	Н
		7440	44.29	-29.71	74	58.27	36.34	7.17	57.49	148	360	Р	Н
BT		7440	19.5	-34.5	54	-	-	-	-	148	360	Α	Н
CH 78 2480MHz		4960	38.96	-35.04	74	59.14	31.82	5.96	57.96	148	360	Р	V
		4960	14.17	-39.83	54	-	-	-	-	148	360	Α	V
		7440	43.71	-30.29	74	57.69	36.34	7.17	57.49	148	360	Р	V
		7440	18.92	-35.08	54	-	-	-	-	148	360	Α	V

Remark

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : A3 of A6
Report Issued Date : Dec. 13, 2017

Report No.: FR7O2602-01A

Report Version : Rev. 01
Report Template No.: BU5-FR15CBT Version 2.0

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

Emission below 1GHz

2.4GHz BT (LF)

вт	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		30	26.63	-13.37	40	33.45	24.9	0.25	31.97	100	141	Р	Н
		106.63	20.28	-23.22	43.5	34.19	16.7	1.09	31.7	-	-	Р	Н
		288.99	20.13	-25.87	46	30.35	19.18	1.82	31.22	-	-	Р	Н
		387.93	24.64	-21.36	46	32.07	21.61	2.15	31.19	-	-	Р	Н
		636.25	27.42	-18.58	46	29.75	26.12	2.79	31.24	-	-	Р	Н
2.4GHz		760.41	29.42	-16.58	46	29.78	27.78	3.06	31.2	-	-	Р	Н
BT LF		30	26.7	-13.3	40	33.52	24.9	0.25	31.97	100	254	Р	V
LI		104.69	20.98	-22.52	43.5	35.02	16.59	1.08	31.71	-	-	Р	V
		318.09	20.66	-25.34	46	30.08	19.86	1.94	31.22	-	-	Р	V
		466.5	25.84	-20.16	46	31.48	23.29	2.34	31.27	-	-	Р	V
		778.84	29.09	-16.91	46	29.04	28.12	3.11	31.18	-	-	Р	V
		989.33	31.02	-22.98	54	28.44	30.37	3.54	31.33	-	-	Р	V

Remark 2.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : A4 of A6
Report Issued Date : Dec. 13, 2017

Report No.: FR7O2602-01A

Report Version : Rev. 01

^{1.} No other spurious found.

^{2.} All results are PASS against limit line.

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any							
	unwanted emissions shall not exceed the level of the fundamental frequency.							
!	Test result is over limit line.							
P/A	Peak or Average							
H/V	Horizontal or Vertical							

Sporton International (Kunshan) Inc. TEL: +86-512-57900158

FAX: +86-512-57900958 FCC ID: 2AJOTTA-1060 Page Number : A5 of A6
Report Issued Date : Dec. 13, 2017
Report Version : Rev. 01

Report No.: FR7O2602-01A

A calculation example for radiated spurious emission is shown as below:

Report No.: FR7O2602-01A

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

1. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

 Sporton International (Kunshan) Inc.
 Page Number
 : A6 of A6

 TEL: +86-512-57900158
 Report Issued Date
 : Dec. 13, 2017

 FAX: +86-512-57900958
 Report Version
 : Rev. 01

FCC ID : 2AJOTTA-1060 Report Template No.: BU5-FR15CBT Version 2.0