FCC RF Test Report

APPLICANT : HMD Global Oy EQUIPMENT : Smart Phone

BRAND NAME : Nokia MODEL NAME : TA-1046

FCC ID : 2AJOTTA-1046

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Dec. 07, 2017 and testing was completed on Mar. 10, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 1 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

1190

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAF	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Product Feature of Equipment Under Test	5
	1.4	Modification of EUT	5
	1.5	Testing Location	6
	1.6	Applicable Standards	6
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	7
	2.3	Support Unit used in test configuration	
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	8
3	CON	DUCTED TEST RESULT	9
	3.1	Measuring Instruments	9
	3.2	Test Setup	9
	3.3	Test Result of Conducted Test	
	3.4	Conducted Output Power and ERP/EIRP	
	3.5	Peak-to-Average Ratio	
	3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.7	Conducted Band Edge	
	3.8	Conducted Spurious Emission	
	3.9	Frequency Stability	
4		IATED TEST ITEMS	
	4.1	Measuring Instruments	
	4.2	Test Setup	
	4.3	Test Result of Radiated Test	
	4.4	Field Strength of Spurious Radiation Measurement	
5	LIST	OF MEASURING EQUIPMENT	18
6	UNC	ERTAINTY OF EVALUATION	19
ΑP	PEND	IX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	IX B. TEST RESULTS OF RADIATED TEST	

APPENDIX C. TEST SETUP PHOTOGRAPHS

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 2 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report No.: FG7D0706A

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG7D0706A	Rev. 01	Initial issue of report	Mar. 15, 2018

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 3 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	\$2.1049 3.6		Reporting Only	PASS	-
3.7	\$2.1051 3.7		< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 3.8 §22.917(a) Conducted Emission §24.238(a)		< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355 §2.1055	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235	Tomporatare a voltage	Within Authorized Band		
4.4	§2.1053 Field Strength of Spurious Radiation		< 43+10log ₁₀ (P[Watts])	PASS	Under limit 18.80 dB at 2544.000 MHz

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 4 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

1 **General Description**

1.1 Applicant

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.2 Manufacturer

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS

GOIN, VODIN, VETE, Blackootti, VVITTE-4012 002.110/g/ii, VVITTOOTI2 002.110/ii/do, IVI O, dila Giveo				
Product specification subjective to this standard				
WWAN: PIFA Antenna				
	WLAN: PIFA Antenna			
Antenna Type	Bluetooth: PIFA Antenna			
	NFC: Single Loop Antenna			
	GPS/GLONASS/BDS: PIFA Antenna			

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIONAL INC. TEL: 886-3-327-3456

FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 5 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report No.: FG7D0706A

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FG7D0706A

Test Site	SPORTON INTERNATIONAL INC.
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,
Took Cita Lagation	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.
Test Site Location	TEL: +886-3-327-3456
	FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
rest site No.	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd.,
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.
lest Site Location	TEL: +886-3-327-0868
	FAX: +886-3-327-0855
Took Site No	Sporton Site No.
Test Site No.	03CH12-HY

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA-603-E
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 Report Issued Date: Mar. 15, 2018 FAX: 886-3-328-4978 Report Version FCC ID: 2AJOTTA-1046

Report Template No.: BU5-FG22/24/27 Version 2.0

Page Number

: 6 of 19

: Rev. 01

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


- 1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
- 2. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes								
Band	Radiated TCs	Conducted TCs						
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link						
GSINI 650	■ EDGE class 8 Link	■ EDGE class 8 Link						
CCM 4000	■ GPRS class 8 Link	■ GPRS class 8 Link						
GSM 1900	■ EDGE class 8 Link	■ EDGE class 8 Link						
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link						
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link						

2.2 Connection Diagram of Test System

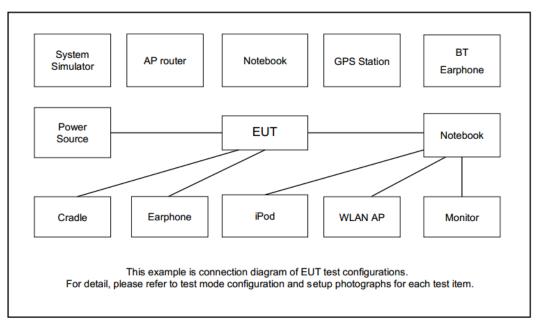

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 7 of 19
Report Issued Date : Mar. 15, 2018

Report No.: FG7D0706A

Report Version : Rev. 01

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.2 + 10 = 14.2 (dB)

2.5 Frequency List of Low/Middle/High Channels

Frequency List						
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest		
GSM850	Channel	128	189	251		
GSIVIOSU	Frequency	824.2	836.4	848.8		
WCDMA	Channel	4132	4182	4233		
Band V	Frequency	826.4	836.4	846.6		
GSM1900	Channel	512	661	810		
GSW1900	Frequency	1850.2	1880.0	1909.8		
WCDMA	Channel	9262	9400	9538		
Band II	Frequency	1852.4	1880.0	1907.6		

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 8 of 19
Report Issued Date : Mar. 15, 2018

Report No.: FG7D0706A

Report Version : Rev. 01

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

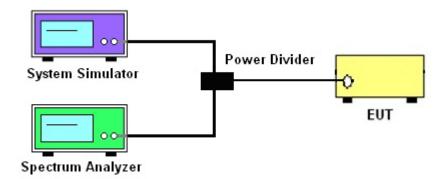

3.2.3 Frequency Stability

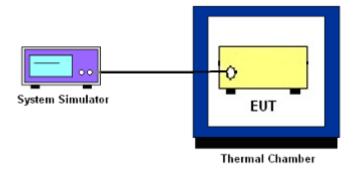

3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 9 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report No.: FG7D0706A

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 10 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
- 6. Record the maximum PAPR level associated with a probability of 0.1%.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 11 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v03 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- 6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 13 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 14 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 15 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

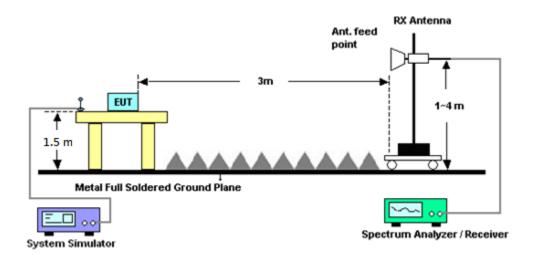

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 16 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report No.: FG7D0706A

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v03 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 26, 2017	Feb. 08, 2018~ Mar. 04, 2018	Jun. 25, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 16, 2016	Feb. 08, 2018~ Mar. 04, 2018	Nov. 15, 2018	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;Cu rrent:0~5A	Nov. 22, 2016	Feb. 08, 2018~ Mar. 04, 2018	Nov. 21, 2018	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 09, 2017	Feb. 08, 2018~ Mar. 04, 2018	Aug. 08, 2018	Conducted (TH03-HY)
Amplifier	MITEQ	TTA1840- 35-HG	1871923	18GHz~40GHz,V SWR : 2.5:1 max	Jul. 18, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Jul. 17, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0 602	30MHz~1GHz	Oct. 14, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Oct. 13, 2018	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Nov. 22, 2019	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 25, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Dec. 24, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Oct. 19, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Mar. 22, 2018	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 15, 2018	Feb. 08, 2018 ~ Mar. 10, 2018	Jan. 14, 2019	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800	2025787	1GHZ~18GHZ	Feb. 13, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Feb. 12, 2019	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0ST	SN1	1.2 GHz High Pass	Jul. 17, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Jul. 16, 2018	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2G Low Pass	Mar. 24, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Mar. 23, 2018	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 08, 2018 ~ Mar. 10, 2018	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Feb. 08, 2018 ~ Mar. 10, 2018	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 08, 2018 ~ Mar. 10, 2018	N/A	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 27, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Apr. 26, 2018	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 15, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Mar. 14, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	BBHA 9120 D 1212	1GHz ~ 18GHz	Mar. 17, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Mar. 16, 2018	Radiation (03CH12-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Feb. 08, 2018 ~ Mar. 10, 2018	Jan. 14, 2019	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Feb. 08, 2018 ~ Mar. 10, 2018	Nov. 26, 2018	Radiation (03CH12-HY)
Test Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Feb. 08, 2018 ~ Mar. 10, 2018	N/A	Radiation (03CH12-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 18 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report No.: FG7D0706A



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.36
Confidence of 95% (U = 2Uc(y))	3.30

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.70
Confidence of 95% (U = 2Uc(y))	3.70

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	2.00
Confidence of 95% (U = 2Uc(y))	3.98

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: 2AJOTTA-1046 Page Number : 19 of 19
Report Issued Date : Mar. 15, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

	Conducted Power (*Unit: dBm)						
Band		GSM850		GSM1900			
Channel	128	189	251	512	661	810	
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8	
GSM	32.94	33.13	33.27	29.41	29.37	29.54	
GPRS class 8	32.95	33.14	33.28	29.42	29.39	29.56	
GPRS class 10	28.42	28.72	28.92	27.64	27.68	27.69	
GPRS class 11	27.31	27.25	27.42	26.44	26.45	26.47	
GPRS class 12	26.77	26.94	26.87	25.23	25.27	25.26	
EGPRS class 8	25.32	25.39	25.49	24.66	24.69	24.78	
EGPRS class 10	24.19	24.27	24.36	23.68	23.78	23.71	
EGPRS class 11	23.09	23.15	23.41	22.78	22.59	22.85	
EGPRS class 12	21.07	21.14	21.17	21.53	21.55	21.63	

Conducted Power (*Unit: dBm)						
Band	V	VCDMA Band	and V WCDMA Band II			П
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.18	22.22	22.42	22.80	22.64	22.73
HSDPA Subtest-1	21.23	21.24	21.40	21.80	21.60	21.69
HSDPA Subtest-2	21.03	21.08	21.15	21.35	21.14	21.24
HSDPA Subtest-3	20.73	20.78	20.97	21.36	21.15	21.22
HSDPA Subtest-4	20.73	20.80	20.97	21.36	21.16	21.24
HSUPA Subtest-1	21.16	21.22	21.40	21.79	21.60	21.70
HSUPA Subtest-2	19.20	19.26	19.45	19.79	19.64	19.73
HSUPA Subtest-3	20.18	20.25	20.41	20.81	20.62	20.71
HSUPA Subtest-4	19.20	19.23	19.44	19.80	19.60	19.70
HSUPA Subtest-5	21.19	21.22	21.40	21.78	21.61	21.71

A2 GSM

Peak-to-Average Ratio


Mode	GSN	Limit: 13dB	
Mod.	GPRS class 8 EDGE class 8		Result
Lowest CH	0.48	3.24	
Middle CH	0.48	3.36	PASS
Highest CH	0.48	3.32	

Report No.: FG7D0706A


Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.48	3.12	
Middle CH	0.44	3.08	PASS
Highest CH	0.44	3.28	

SPORTON INTERNATIONAL INC. Page Number : A2-1 of 15

CC RF Test Report Report No. : FG7D0706A

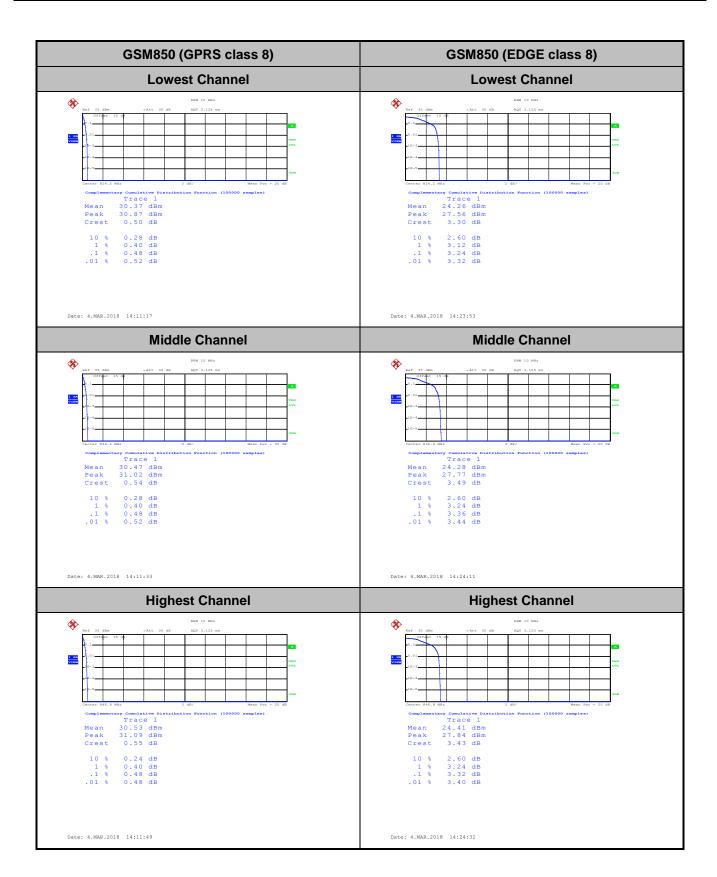

FCC RF Test Report Report No.: FG7D0706A GSM1900 (GPRS class 8) GSM1900 (EDGE class 8)

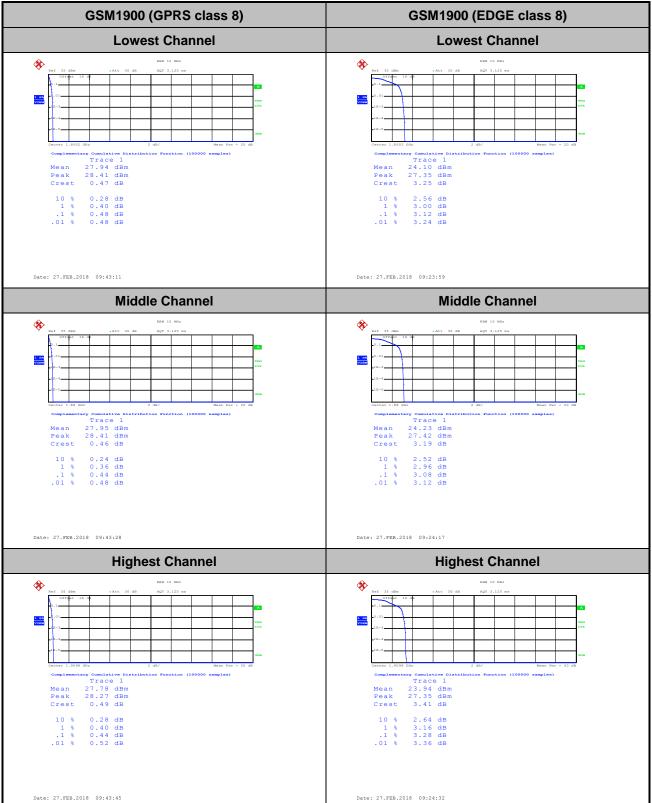


26dB Bandwidth


Mode	GSM850		
Mod.	GPRS class 8	EDGE class 8	
Lowest CH 0.309		0.301	
Middle CH	0.304	0.304	
Highest CH	0.315	0.297	


Report No.: FG7D0706A

Mode	GSM1900		
Mod.	GPRS class 8 EDGE class 8		
Lowest CH	0.309	0.303	
Middle CH	0.310	0.296	
Highest CH	0.310	0.295	

SPORTON INTERNATIONAL INC. Page Number : A2-4 of 15



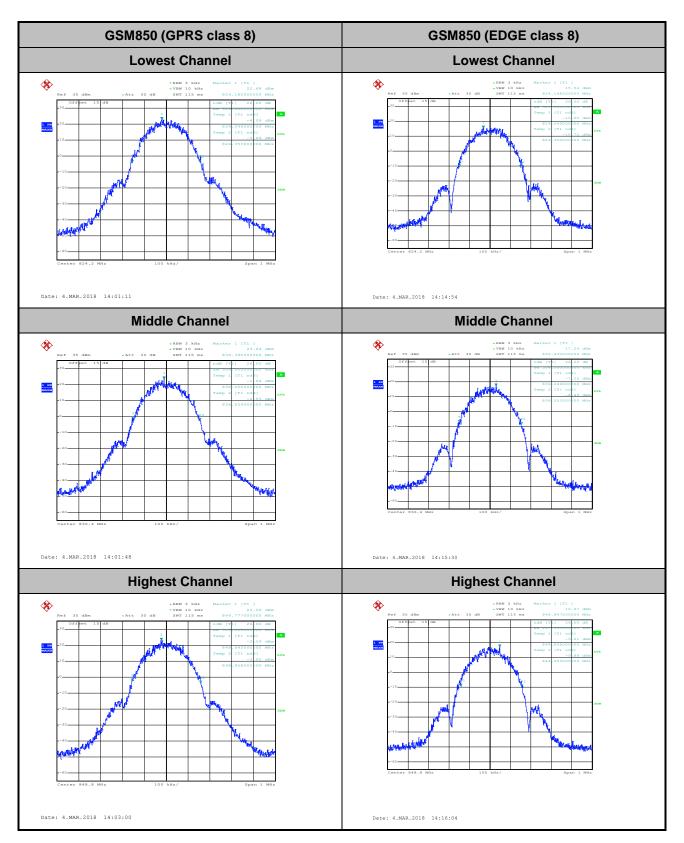

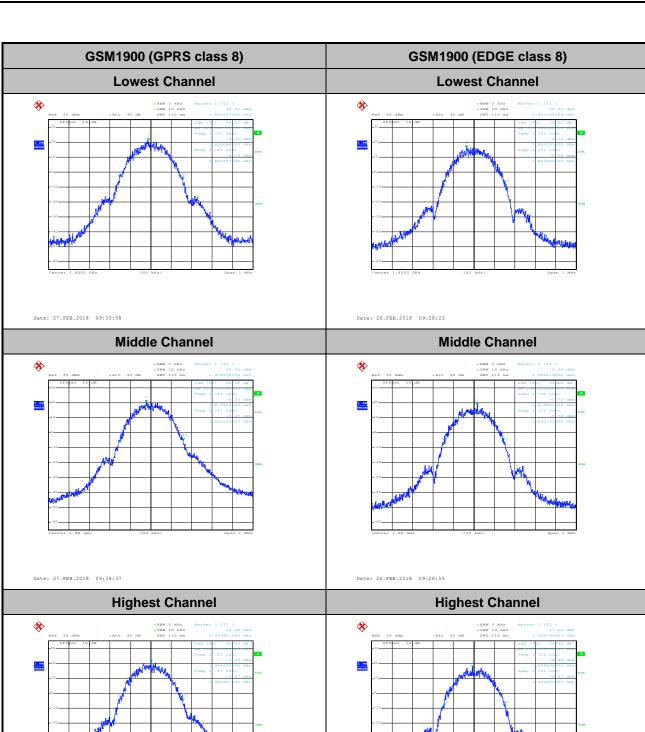

Date: 27.FEB.2018 09:35:09

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Date: 26.FEB.2018 09:29:46

Occupied Bandwidth


Mode	GSM850		
Mod.	GPRS class 8 EDGE class 8		
Lowest CH	0.242	0.244	
Middle CH	0.245	0.246	
Highest CH	0.244	0.250	

Report No.: FG7D0706A


Mode	GSM1900		
Mod.	GPRS class 8 EDGE class 8		
Lowest CH	0.248	0.244	
Middle CH	0.245	0.248	
Highest CH	0.247	0.245	

SPORTON INTERNATIONAL INC. Page Number : A2-7 of 15


CC RF Test Report No.: FG7D0706A

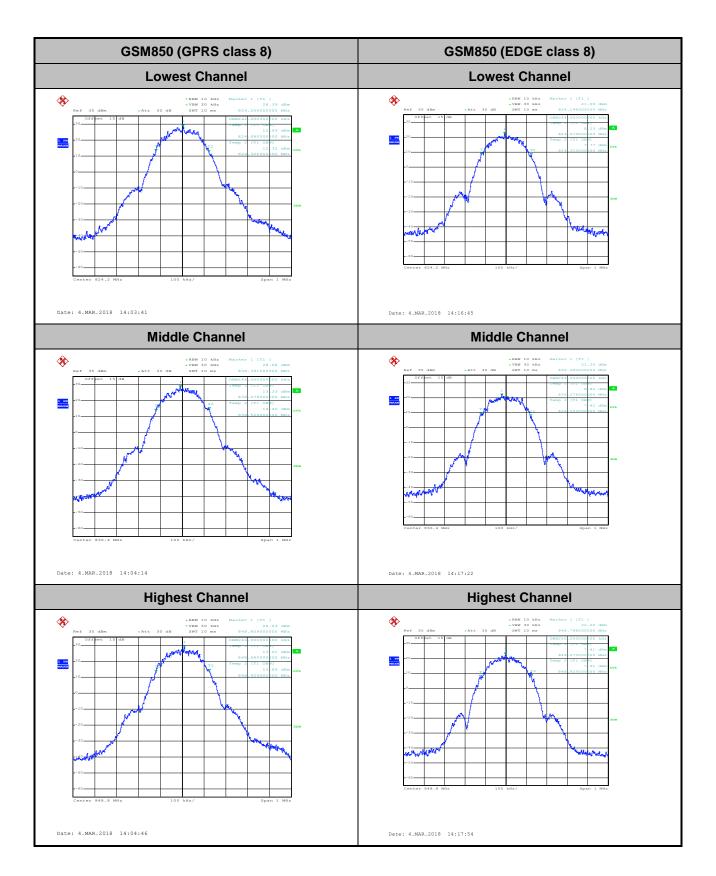

Report No.: FG7D0706A

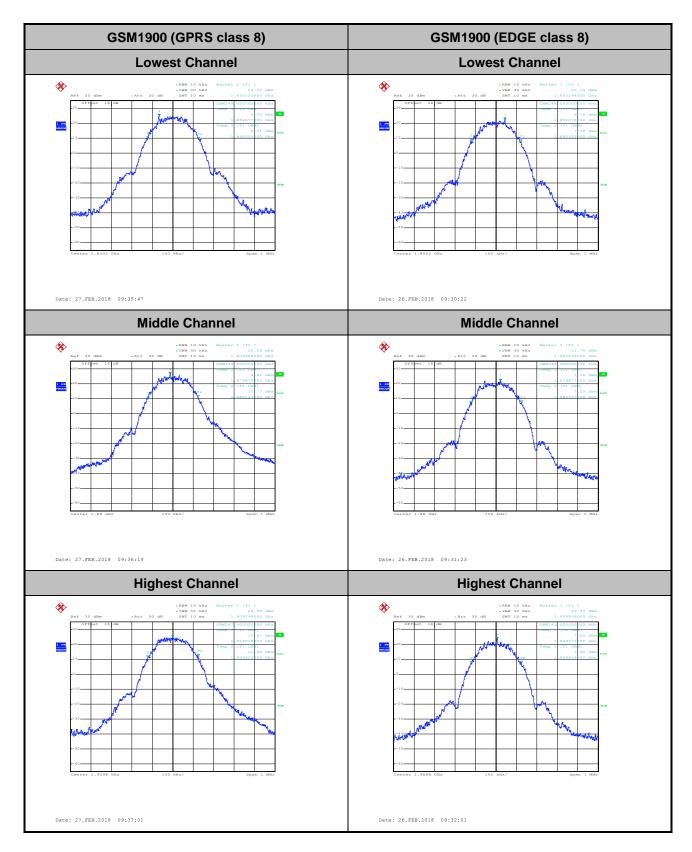

Conducted Band Edge

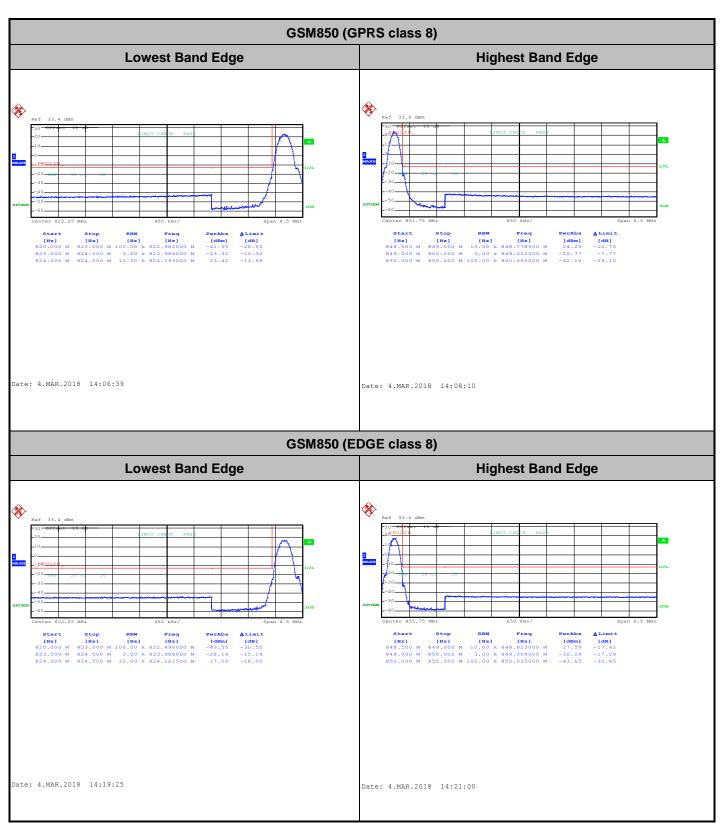


TEL: 886-3-327-3456 FAX: 886-3-328-4978

GSM1900 (GPRS class 8) **Lowest Band Edge Highest Band Edge %** Date: 27.FEB.2018 09:38:47 Date: 27.FEB.2018 09:40:19 GSM1900 (EDGE class 8) **Lowest Band Edge Highest Band Edge** Date: 27.FEB.2018 09:16:33 Date: 27.FEB.2018 09:18:05


TEL: 886-3-327-3456 FAX: 886-3-328-4978

Conducted Spurious Emission

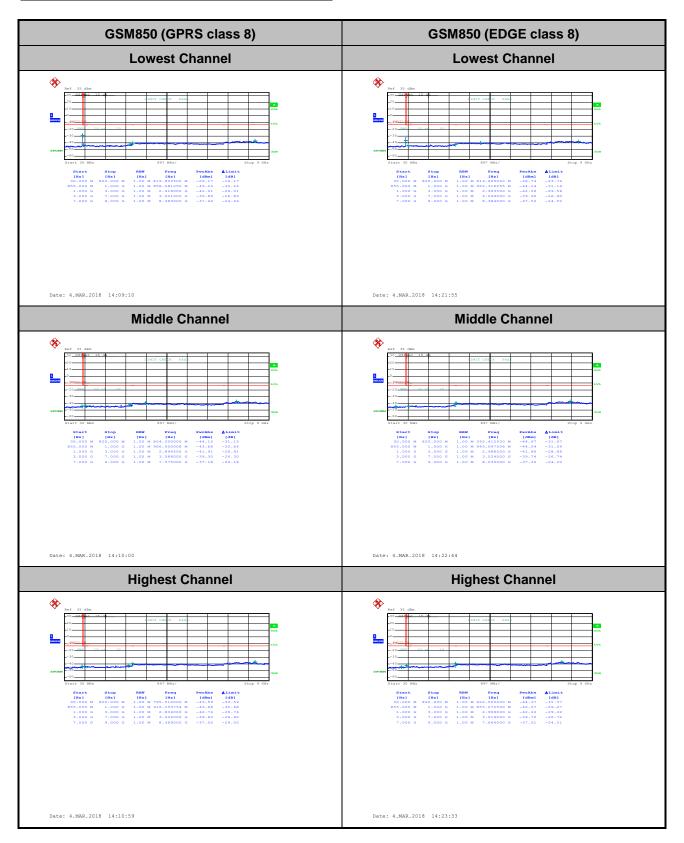

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report No.: FG7D0706A GSM1900 (GPRS class 8) GSM1900 (EDGE class 8) **Lowest Channel Lowest Channel** * Date: 27.FEB.2018 09:41:12 Date: 27.FEB.2018 09:28:05 **Middle Channel Middle Channel %** Date: 27.FEB.2018 09:42:01 Date: 27.FEB.2018 09:29:01 **Highest Channel Highest Channel** * *

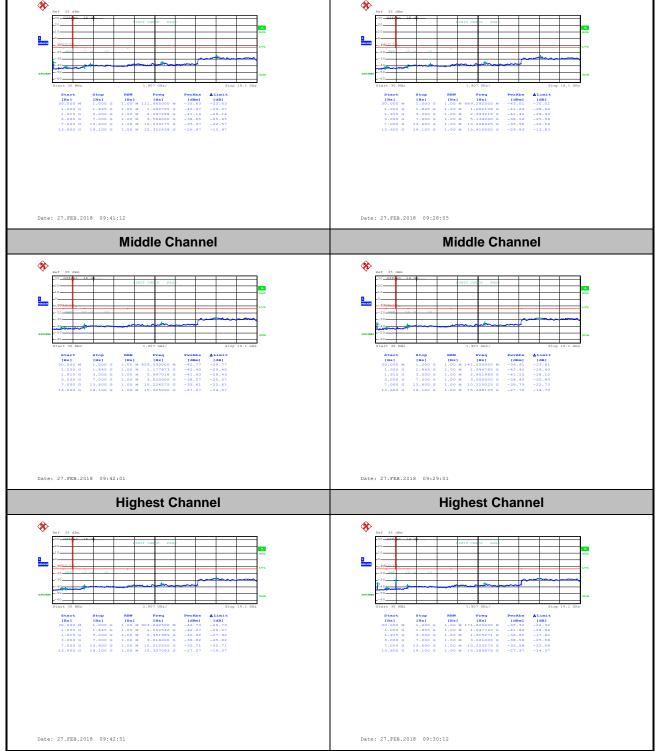

Frequency Stability

Test Conditions	Middle Channel	GSM850	GSM850	Limit
		(GPRS class 8)	(EDGE class 8)	2.5ppm
Temperature (°C)	Voltage (Volt)	Deviatio	on (ppm)	Result
50	Normal Voltage	0.0012	0.0299	
40	Normal Voltage	0.0072	0.0311	
30	Normal Voltage	0.0036	0.0012	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0060	0.0036	
0	Normal Voltage	0.0155	0.0048	DAGG
-10	Normal Voltage	0.0084	0.0012	PASS
-20	Normal Voltage	0.0167	0.0060	
-30	Normal Voltage	0.0418	0.0072	
20	Maximum Voltage	0.0036	0.0012	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0048	0.0036	

Report No.: FG7D0706A

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation	(ppm)	Result
50	Normal Voltage	0.0037	0.0037	
40	Normal Voltage	0.0021	0.0032	
30	Normal Voltage	0.0032	0.0016	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0016	0.0112	
0	Normal Voltage	0.0005	0.0101	DACC
-10	Normal Voltage	0.0048	0.0085	PASS
-20	Normal Voltage	0.0053	0.0069	
-30	Normal Voltage	0.0207	0.0074	
20	Maximum Voltage	0.0021	0.0037	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0032	0.0005	

Report No.: FG7D0706A

Note:

- 1. Normal Voltage = 3.8 V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
- 2. The frequency fundamental emissions stay within the authorized frequency block .

A3 WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.16	2.40	
Middle CH	2.92	3.04	PASS
Highest CH	3.04	2.04	

Report No.: FG7D0706A

SPORTON INTERNATIONAL INC. Page Number : A3-1 of 10

FCC RF Test Report Report No.: FG7D0706A WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel** * * Mean Peak Crest Mean Peak Crest

10 % 1.80 dB 1 % 2.68 dB .1 % 3.16 dB .01 % 3.36 dB


Date: 8.FEB.2018 10:22:57

Date: 26.FEB.2018 09:18:02

*

Middle Channel

Date: 8.FEB.2018 10:23:10



Middle Channel

Date: 26.FEB.2018 09:18:15

Highest Channel

*

Date: 8.FEB.2018 10:23:24

Highest Channel



Date: 26.FEB.2018 09:18:29


26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.71	4.73
Middle CH	4.70	4.72
Highest CH	4.70	4.80

Report No.: FG7D0706A

SPORTON INTERNATIONAL INC. Page Number : A3-3 of 10

CC RF Test Report No. : FG7D0706A

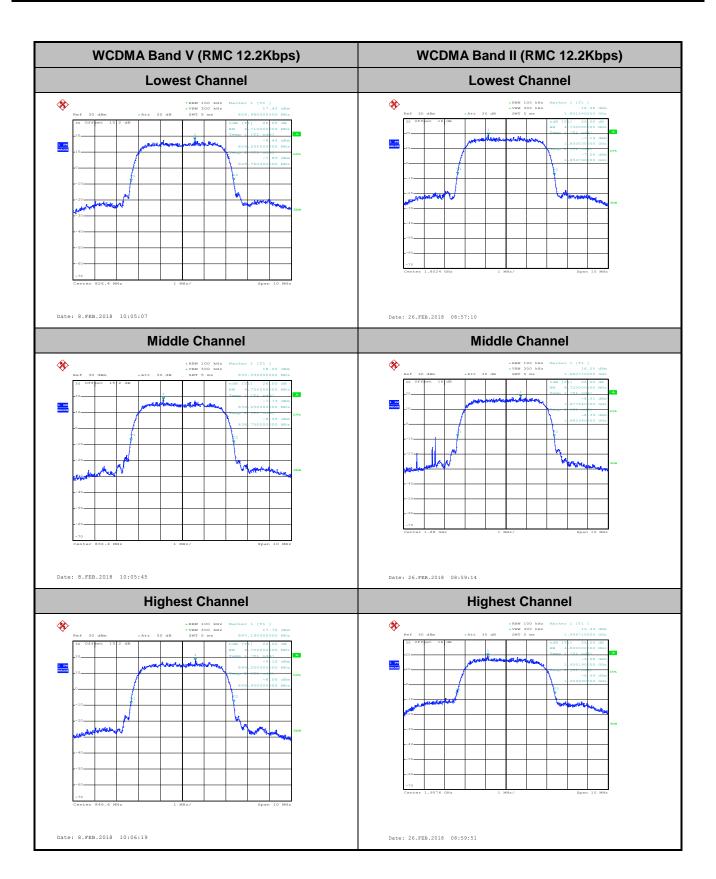


Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.16	4.15
Middle CH	4.15	4.14
Highest CH	4.13	4.19


Report No.: FG7D0706A


SPORTON INTERNATIONAL INC. Page Number : A3-5 of 10

Report No.: FG7D0706A

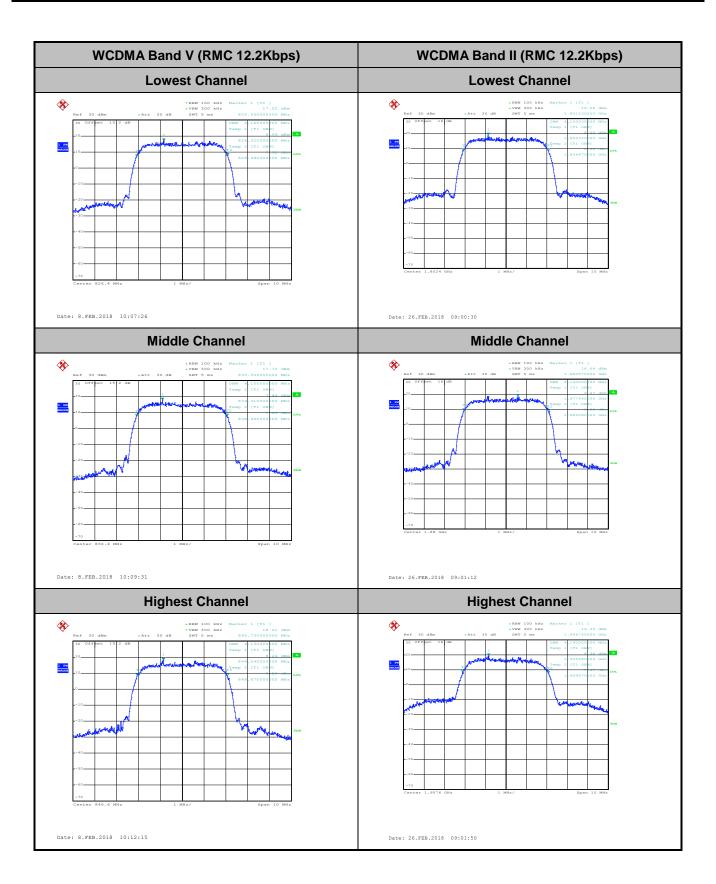


Conducted Band Edge

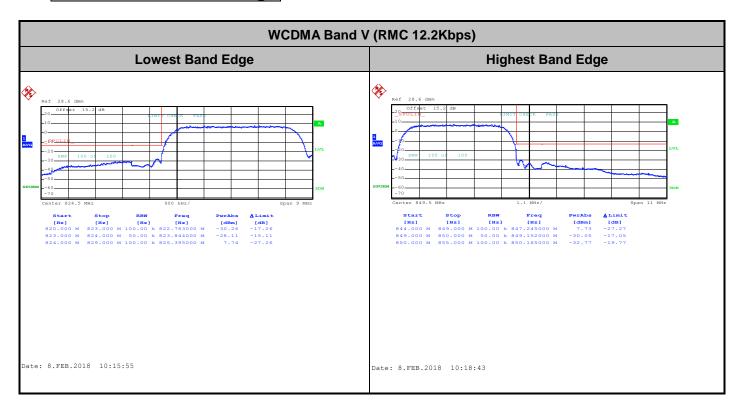

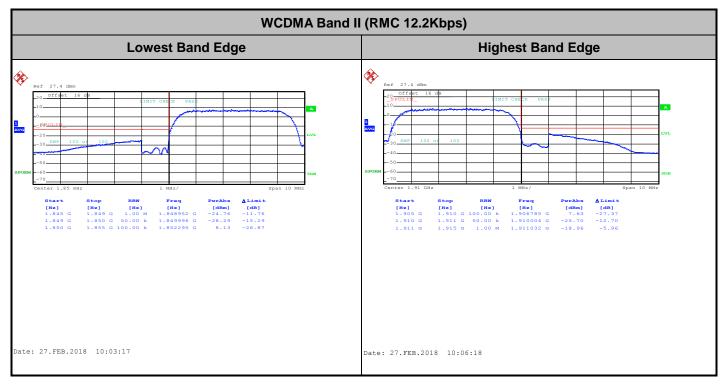

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Conducted Spurious Emission

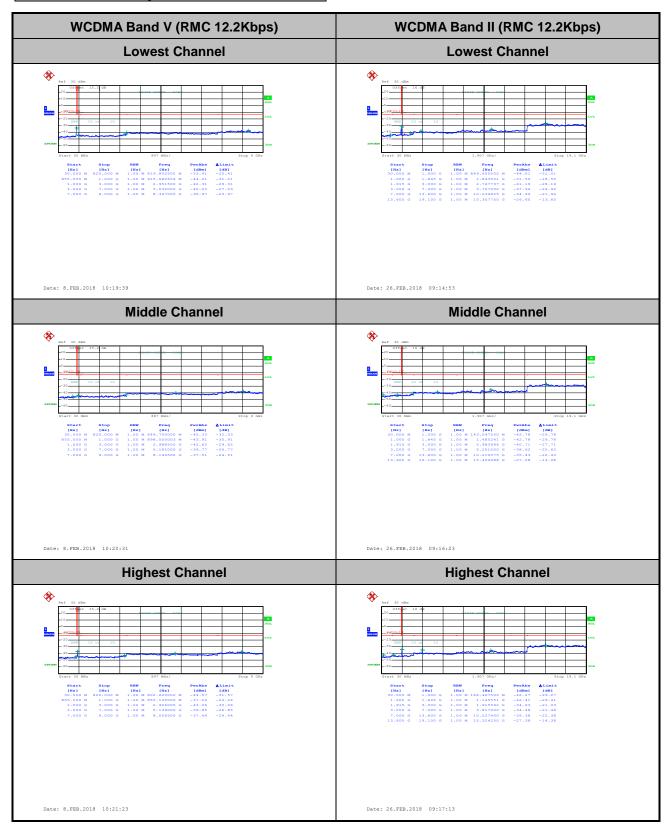

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0060	
40	Normal Voltage	0.0024	
30	Normal Voltage	0.0048	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0084	
0	Normal Voltage	0.0072	D4.00
-10	Normal Voltage	0.0132	PASS
-20	Normal Voltage	0.0108	
-30	Normal Voltage	0.0143	
20	Maximum Voltage	0.0096	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0084	

Report No.: FG7D0706A

: A3-9 of 10

Test Conditions	tions Middle Channel (RMC 12.2Kbps)		
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0016	
40	Normal Voltage	0.0021	
30	Normal Voltage	0.0080	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0037	
0	Normal Voltage	0.0080	DACC
-10	Normal Voltage	0.0048	PASS
-20	Normal Voltage	0.0043	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0027	

Report No.: FG7D0706A

Note:

- 1. Normal Voltage = 3.8V.; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.

SPORTON INTERNATIONAL INC. Page Number : A3-10 of 10

Appendix B. Test Results of ERP/EIRP and Radiated Test

Report No. : FG7D0706A

ERP/EIRP

Channel	Mode	Cond	ucted	El	RP	
Chamilei	Wode	Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)	
Lowest	GSM850	32.95	1.9724	27.94	0.6223	
Middle	GPRS class 8	33.14	2.0606	28.13	0.6501	
Highest	GT - LC = -2.86 dB	33.28	2.1281	28.27	0.6714	
Lowest	GSM850	25.32	0.3404	20.31	0.1074	
Middle	EDGE class 8	25.39	0.3459	20.38	0.1091	
Highest	GT - LC = -2.86 dB	25.49	0.3540	20.48	0.1117	
Lowest	WCDMA Band V	22.18	0.1652	17.17	0.0521	
Middle	RMC 12.2Kbps	22.22	0.1667	17.21	0.0526	
Highest	GT - LC = -2.86 dB	22.42	0.1746	17.41	0.0551	
Limit	ERP < 7W	Re	sult	PASS		

Channel	Mode	Cond	ucted	EI	RP
Chamilei	lviode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	29.42	0.8750	29.75	0.9441
Middle	GPRS class 8	29.39	0.8690	29.72	0.9376
Highest	(GT - LC = 0.33 dB)	29.56	0.9036	29.89	0.9750
Lowest	GSM1900	24.66	0.2924	24.99	0.3155
Middle	EDGE class 8	24.69	0.2944	25.02	0.3177
Highest	(GT - LC = 0.33 dB)	24.78	0.3006	25.11	0.3243
Lowest	WCDMA Band II	22.80	0.1905	23.13	0.2056
Middle	RMC 12.2Kbps	22.64	0.1837	22.97	0.1982
Highest	(GT - LC = 0.33 dB)	22.73	0.1875	23.06	0.2023
Limit	EIRP < 2W	Re	sult	PA	SS

Radiated Spurious Emission

Part22H GPRS 850

				Mode 1_	GPRS 850				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1648	-60.17	-13	-47.17	-69.58	-65.56	1.23	8.76	Н
	2472	-36.37	-13	-23.37	-48.86	-43.26	1.44	10.48	Н
	4120	-57.02	-13	-44.02	-72.22	-64.88	2.09	12.10	Н
									Н
									Н
Lowest									Н
Lowest	1648	-61.52	-13	-48.52	-69.95	-66.91	1.23	8.76	V
	2472	-39.60	-13	-26.60	-51.76	-46.49	1.44	10.48	V
	4120	-58.84	-13	-45.84	-74.01	-66.70	2.09	12.10	V
									V
									V
									V
	1672	-62.31	-13	-49.31	-71.53	-67.78	1.24	8.85	Н
	2512	-33.11	-13	-20.11	-45.56	-40.03	1.44	10.51	Н
	4184	-53.98	-13	-40.98	-69.16	-61.86	2.07	12.10	Н
									Н
									Н
Middle									Н
ivildale	1672	-62.64	-13	-49.64	-71.17	-68.11	1.24	8.85	V
	2512	-38.14	-13	-25.14	-50.28	-45.06	1.44	10.51	V
	4184	-56.76	-13	-43.76	-71.9	-64.64	2.07	12.10	V
									V
									V
									V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B2-1 of 12

1									
	1696	-61.54	-13	-48.54	-70.68	-67.09	1.24	8.94	Н
	2544	-31.80	-13	-18.80	-44.29	-38.74	1.44	10.54	Н
	4240	-51.19	-13	-38.19	-66.69	-59.09	2.05	12.10	Н
									Н
									Н
									Н
Highest	1696	-60.16	-13	-47.16	-68.76	-65.71	1.24	8.94	V
	2544	-35.18	-13	-22.18	-47.45	-42.12	1.44	10.54	V
	4240	-55.41	-13	-42.41	-70.94	-63.31	2.05	12.10	V
									V
									V
									V

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part22H EDGE 850

	Mode 2_EDGE 850											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	1648	-62.40	-13	-49.40	-71.81	-67.79	1.23	8.76	Н			
	2472	-37.52	-13	-24.52	-50.01	-44.41	1.44	10.48	Н			
	4120	-57.18	-13	-44.18	-72.38	-65.04	2.09	12.10	Н			
									Н			
									Н			
Lowest									Н			
Lowest	1648	-63.76	-13	-50.76	-72.19	-69.15	1.23	8.76	V			
	2472	-40.67	-13	-27.67	-52.83	-47.56	1.44	10.48	V			
	4120	-59.09	-13	-46.09	-74.26	-66.95	2.09	12.10	V			
									V			
									V			
									V			
	1672	-63.01	-13	-50.01	-72.23	-68.48	1.24	8.85	Н			
	2512	-33.30	-13	-20.30	-45.75	-40.22	1.44	10.51	Н			
	4184	-54.18	-13	-41.18	-69.36	-62.06	2.07	12.10	Н			
									Н			
									Н			
Middle									Н			
ivildale	1672	-64.07	-13	-51.07	-72.6	-69.54	1.24	8.85	V			
	2512	-37.03	-13	-24.03	-49.17	-43.95	1.44	10.51	V			
	4184	-56.23	-13	-43.23	-71.37	-64.11	2.07	12.10	V			
									V			
									V			
									V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

			1			•	•		•
	1696	-63.26	-13	-50.26	-72.4	-68.81	1.24	8.94	Н
	2544	-32.79	-13	-19.79	-45.28	-39.73	1.44	10.54	Н
	4240	-52.64	-13	-39.64	-68.14	-60.54	2.05	12.10	Н
									Н
									Н
I.P. Level									Н
Highest	1696	-63.37	-13	-50.37	-71.97	-68.92	1.24	8.94	V
	2544	-34.08	-13	-21.08	-46.35	-41.02	1.44	10.54	V
	4240	-55.08	-13	-42.08	-70.61	-62.98	2.05	12.10	V
									V
									V
									V

TEL: 886-3-327-3456 FAX: 886-3-328-4978 : B2-4 of 12

Part22H_WCDMA850

				WCD	MA 850				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1656	-64.36	-13	-51.36	-73.68	-69.77	1.23	8.79	Н
	2480	-39.11	-13	-26.11	-51.6	-46.01	1.44	10.48	Н
	4136	-57.84	-13	-44.84	-73.04	-65.70	2.09	12.10	Н
									Н
									Н
Lowest									Н
Lowest	1656	-65.18	-13	-52.18	-73.67	-70.59	1.23	8.79	V
	2480	-41.45	-13	-28.45	-53.61	-48.35	1.44	10.48	V
	4136	-59.51	-13	-46.51	-74.68	-67.37	2.09	12.10	V
									V
									V
									V
	1672	-64.50	-13	-51.50	-73.72	-69.97	1.24	8.85	Н
	2504	-37.33	-13	-24.33	-49.76	-44.24	1.44	10.50	Н
	4176	-55.23	-13	-42.23	-70.41	-63.11	2.07	12.10	Н
									Н
									Н
N 41 - 1 - 11 -									Н
Middle	1672	-64.65	-13	-51.65	-73.18	-70.12	1.24	8.85	V
	2504	-40.97	-13	-27.97	-53.04	-47.88	1.44	10.50	V
	4176	-58.39	-13	-45.39	-73.53	-66.27	2.07	12.10	V
									V
			_						V
									V

TEL: 886-3-327-3456 FAX: 886-3-328-4978

				1	1	1		1	
	1696	-64.29	-13	-51.29	-73.43	-69.84	1.24	8.94	Н
	2544	-36.94	-13	-23.94	-49.43	-43.88	1.44	10.54	Н
	4232	-56.08	-13	-43.08	-71.48	-63.97	2.06	12.10	Н
									Н
									Н
l limb a at									Н
Highest	1696	-64.68	-13	-51.68	-73.28	-70.23	1.24	8.94	V
	2544	-39.56	-13	-26.56	-51.83	-46.50	1.44	10.54	V
	4232	-58.91	-13	-45.91	-74.31	-66.80	2.06	12.10	V
									V
									V
	_								V

TEL: 886-3-327-3456 FAX: 886-3-328-4978 : B2-6 of 12

Part24E_GPRS1900

	GPRS 1900											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	3700	-51.77	-13	-38.77	-67.15	-62.08	1.97	12.28	Н			
	5548	-36.30	-13	-23.30	-54.2	-46.42	2.14	12.27	Н			
	9251	-46.54	-13	-33.54	-71.97	-56.42	2.22	12.10	Н			
									Н			
									Н			
Lowest									Н			
Lowest	3700	-53.42	-13	-40.42	-68.34	-63.73	1.97	12.28	V			
	5548	-38.02	-13	-25.02	-55.93	-48.14	2.14	12.27	V			
	9251	-49.13	-13	-36.13	-73.56	-59.01	2.22	12.10	V			
									V			
									V			
									V			
	3756	-50.89	-13	-37.89	-66.32	-61.13	2.00	12.25	Н			
	5639	-37.44	-13	-24.44	-55.35	-47.71	2.12	12.39	Н			
	7520	-53.95	-13	-40.95	-74.36	-61.91	2.11	10.07	Н			
									Н			
									Н			
Middle									Н			
Middle	3756	-45.48	-13	-32.48	-60.41	-55.72	2.00	12.25	V			
	5639	-38.10	-13	-25.10	-55.98	-48.37	2.12	12.39	V			
	7520	-53.78	-13	-40.78	-74.37	-61.74	2.11	10.07	V			
									V			
									V			
									V			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B2-7 of 12

	1				•		•		
	3819	-55.66	-13	-42.66	-71.18	-65.83	2.04	12.21	Н
	5730	-38.23	-13	-25.23	-56.48	-48.65	2.10	12.52	Н
	9552	-48.84	-13	-35.84	-74.01	-58.55	2.09	11.80	Н
									Н
									Н
I Pakasa									Н
Highest	3819	-57.34	-13	-44.34	-72.35	-67.51	2.04	12.21	V
	5730	-36.31	-13	-23.31	-54.54	-46.73	2.10	12.52	V
	9552	-49.01	-13	-36.01	-73.14	-58.72	2.09	11.80	V
									V
									V
									V

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part24E_EDGE1900

EDGE 1900											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	3700	-49.39	-13	-36.39	-64.77	-59.70	1.97	12.28	Н		
	5548	-39.24	-13	-26.24	-57.14	-49.36	2.14	12.27	Н		
	7400	-54.02	-13	-41.02	-74.3	-62.02	2.18	10.18	Н		
	9251	-48.19	-13	-35.19	-73.62	-58.07	2.22	12.10	Н		
									Н		
									Н		
Lowest									Н		
Lowest	3700	-51.52	-13	-38.52	-66.44	-61.83	1.97	12.28	V		
	5548	-36.85	-13	-23.85	-54.76	-46.97	2.14	12.27	V		
	7400	-54.42	-13	-41.42	-74.59	-62.42	2.18	10.18	V		
	9251	-48.27	-13	-35.27	-72.7	-58.15	2.22	12.10	V		
									V		
									V		
									V		
	3756	-50.92	-13	-37.92	-66.35	-61.16	2.00	12.25	Н		
	5639	-38.06	-13	-25.06	-55.97	-48.33	2.12	12.39	Н		
	9398	-45.57	-13	-32.57	-71.15	-55.33	2.16	11.92	Н		
									Н		
									Н		
N 4: -L-II -									Н		
Middle	3756	-48.17	-13	-35.17	-63.1	-58.41	2.00	12.25	V		
	5639	-36.24	-13	-23.24	-54.12	-46.51	2.12	12.39	V		
	9398	-47.93	-13	-34.93	-72.58	-57.69	2.16	11.92	V		
									V		
									V		
									V		

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B2-9 of 12

	1		1				•		
	3819	-46.63	-13	-33.63	-62.15	-56.80	2.04	12.21	Н
	5730	-34.75	-13	-21.75	-53	-45.17	2.10	12.52	Н
	9552	-47.20	-13	-34.20	-72.37	-56.91	2.09	11.80	Н
									Н
									Н
									Н
Highest	3819	-55.04	-13	-42.04	-70.05	-65.21	2.04	12.21	V
	5730	-34.85	-13	-21.85	-53.08	-45.27	2.10	12.52	V
	9552	-48.22	-13	-35.22	-72.35	-57.93	2.09	11.80	V
									V
									V
									V

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part24E_WCDMA1900

WCDMA 1900											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	3704	-46.85	-13	-33.85	-62.23	-57.15	1.98	12.28	Н		
	5557	-56.67	-13	-43.67	-74.55	-66.81	2.14	12.28	Н		
	7409	-54.31	-13	-41.31	-74.6	-62.30	2.17	10.16	Н		
									Н		
									Н		
Lowest									Н		
Lowest	3704	-48.81	-13	-35.81	-63.73	-59.11	1.98	12.28	V		
	5557	-56.86	-13	-43.86	-74.75	-67.00	2.14	12.28	V		
	7409	-54.41	-13	-41.41	-74.58	-62.40	2.17	10.16	V		
									V		
									V		
									V		
	3760	-49.86	-13	-36.86	-65.28	-60.10	2.01	12.24	Н		
	5640	-49.56	-13	-36.56	-67.47	-59.83	2.12	12.40	Н		
	7520	-53.39	-13	-40.39	-73.8	-61.35	2.11	10.07	Н		
									Н		
									Н		
NAC LUI.									Н		
Middle	3760	-53.22	-13	-40.22	-68.15	-63.46	2.01	12.24	V		
	5640	-57.38	-13	-44.38	-75.26	-67.65	2.12	12.40	V		
	7520	-53.29	-13	-40.29	-73.88	-61.25	2.11	10.07	V		
									V		
									V		
									V		

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

				1	1	ı		ı	1
	3815	-41.72	-13	-28.72	-57.23	-51.90	2.03	12.21	Н
	5722	-56.61	-13	-43.61	-74.86	-67.02	2.10	12.51	Н
	7630	-53.80	-13	-40.80	-74.51	-62.15	2.11	10.47	Н
									Н
									Н
Llimboot									Н
Highest	3815	-44.47	-13	-31.47	-59.48	-54.65	2.03	12.21	V
	5722	-56.12	-13	-43.12	-74.35	-66.53	2.10	12.51	V
	7630	-53.49	-13	-40.49	-74.1	-61.84	2.11	10.47	V
									V
									V
									V

TEL: 886-3-327-3456 FAX: 886-3-328-4978