



FCC RF Test Report

APPLICANT : HMD Global Oy
EQUIPMENT : Smart Phone
BRAND NAME : NOKIA
MODEL NAME : TA-1038
FCC ID : 2AJOTTA-1038
STANDARD : 47 CFR Part 2, 24(E), 27(L), 27(M), 27(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 18, 2017 and completely tested on Feb. 14, 2017. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	9
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System.....	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example.....	12
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and ERP/EIRP	17
3.5 Peak-to-Average Ratio	18
3.6 Occupied Bandwidth.....	19
3.7 Conducted Band Edge	20
3.8 Conducted Spurious Emission	22
3.9 Frequency Stability	23
4 RADIATED TEST ITEMS	24
4.1 Measuring Instruments	24
4.2 Test Setup	24
4.3 Test Result of Radiated Test	24
4.4 Radiated Spurious Emission	25
5 LIST OF MEASURING EQUIPMENT	27
6 UNCERTAINTY OF EVALUATION	28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(c)(10)	Effective Radiated Power (Band 12) (Band 17)	ERP < 3 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)(Band 38)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 12) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38)	§27.53(m)(4)		
3.8	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 12) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)(Band 38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 12) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 15.30 dB at 7772.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)(Band 38)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.2 Manufacturer

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	NOKIA
Model Name	TA-1038
FCC ID	2AJOTTA-1038
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+/DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20 WLAN5GHz 802.11a/n HT20/HT40 Bluetooth v3.0+EDR / Bluetooth v4.0 LE/ Bluetooth v4.1 LE / Bluetooth v4.2 LE
IMEI Code	Conducted: 356805080001425/356805080001433 for LTE Band 2 / 4 / 12 / 17 356805080000385/356805080000393 for LTE Band 38 3568040800002186 for LTE Band 7 Radiation: 356805080001268/356805080001276
HW Version	DVT1.5
SW Version	000C_1_26A
EUT Stage	Production Unit



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 23.47 dBm LTE Band 4 : 24.18 dBm LTE Band 7 : 24.18 dBm LTE Band 12 : 22.40 dBm LTE Band 17 : 22.40 dBm LTE Band 38 : 23.49 dBm
Antenna Gain	LTE Band 2 : 3.04 dBi LTE Band 4 : 2.65 dBi LTE Band 7 : 1.90 dBi LTE Band 12 : -1.14 dBi LTE Band 17 : -0.18 dBi LTE Band 38 : 1.22 dBi
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M09G7D	-	0.4467	1M10W7D	-	0.3681
3	1851.5 ~ 1908.5	2M75G7D	-	0.4345	2M74W7D	-	0.3597
5	1852.5 ~ 1907.5	4M52G7D	-	0.4457	4M51W7D	-	0.3648
10	1855.0 ~ 1905.0	9M11G7D	0.0037	0.4436	9M07W7D	-	0.3648
15	1857.5 ~ 1902.5	13M5G7D	-	0.4436	13M6W7D	-	0.3681
20	1860.0 ~ 1900.0	18M5G7D	-	0.4477	18M4W7D	-	0.3715
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09G7D	-	0.4710	1M10W7D	-	0.3873
3	1711.5 ~ 1753.5	2M73G7D	-	0.4613	2M73W7D	-	0.3802
5	1712.5 ~ 1752.5	4M52G7D	-	0.4699	4M52W7D	-	0.3837
10	1715.0 ~ 1750.0	9M07G7D	0.0032	0.4710	9M03W7D	-	0.3926
15	1717.5 ~ 1747.5	13M5G7D	-	0.4764	13M5W7D	-	0.3945
20	1720.0 ~ 1745.0	18M5G7D	-	0.4819	18M5W7D	-	0.3990
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M51G7D	-	0.3990	4M51W7D	-	0.3243
10	2505.0 ~ 2565.0	9M05G7D	0.0024	0.3908	9M03W7D	-	0.3199
15	2507.5 ~ 2562.5	13M5G7D	-	0.3972	13M5W7D	-	0.3273
20	2510.0 ~ 2560.0	18M4G7D	-	0.4055	18M5W7D	-	0.3319



LTE Band 12		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	699.7 ~ 715.3	1M10G7D	-	0.0811	1M10W7D	-	0.0721
3	700.5 ~ 714.5	2M75G7D	-	0.0800	2M73W7D	-	0.0713
5	701.5 ~ 713.5	4M53G7D	-	0.0815	4M54W7D	-	0.0728
10	704.0 ~ 711.0	9M07G7D	0.0107	0.0811	9M07W7D	-	0.0723
LTE Band 17		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	706.5 ~ 713.5	4M53G7D	-	0.1016	4M51W7D	-	0.0906
10	709.0 ~ 711.0	9M07G7D	0.0044	0.1005	9M09W7D	-	0.0902
LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M52G7D	-	0.2931	4M52W7D	-	0.2371
10	2575.0 ~ 2615.0	9M07G7D	0.0026	0.2911	9M01W7D	-	0.2350
15	2577.5 ~ 2612.5	13M5G7D	-	0.2938	13M4W7D	-	0.2360
20	2580.0 ~ 2610.0	18M5G7D	-	0.2958	18M5W7D	-	0.2371



1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 24(E), 27(L), 27(M), 27(H)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2							v	v	v	v		v	v	v
	4							v	v	v	v		v	v	v
	7	-	-					v	v	v	v		v	v	v
	12				v	-	-	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v
	38	-	-					v	v	v	v		v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	12	v	v	v	v	-	-	v	v				v	v	v
	17	-	-	v	v	-	-	v	v				v	v	v
	38	-	-	v	v	v	v	v	v				v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v		v	v	v
	17	-	-	v	v	-	-	v	v	v	v		v	v	v
	38	-	-	v	v	v	v	v	v	v	v		v	v	v



Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	12	v	v	v	v	-	-	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v
Frequency Stability	2				v			v					v		v
	4				v			v					v		v
	7	-	-		v			v					v		v
	12				v	-	-	v					v		v
	17	-	-		v	-	-	v					v		v
	38	-	-		v			v					v		v
E.R.P./ E.I.R.P.	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	12	v	v	v	v	-	-	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	v	v	v			v		
	4	v	v	v	v	v	v	v	v	v			v		
	7	-	-	v	v	v	v	v	v	v			v		
	12	v	v	v	v	-	-	v	v	v			v		
	17	-	-	v	v	-	-	v	v	v			v		
	38	-	-	v	v	v	v	v	v	v			v		
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														



2.2 Connection Diagram of Test System

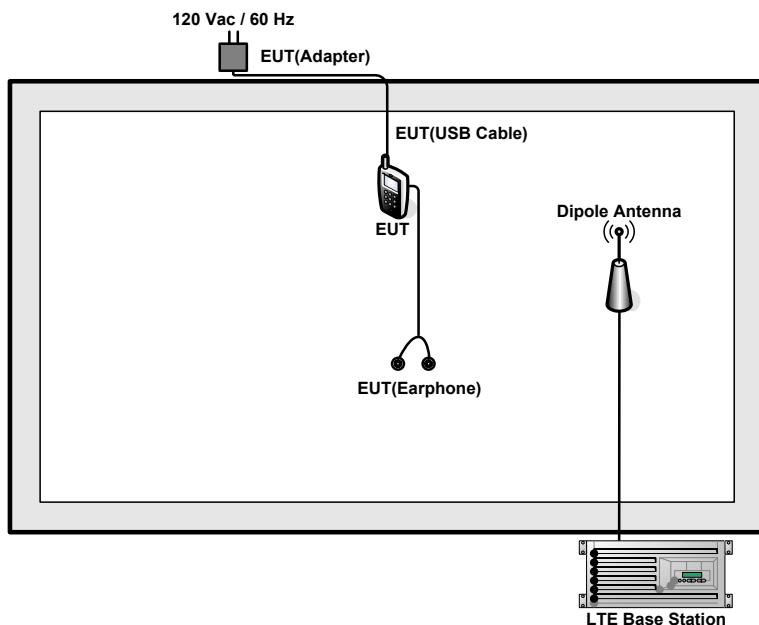

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 4.85 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 4.85 (dB)



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5



LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

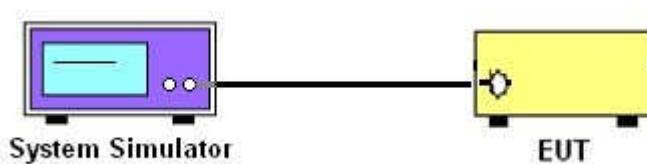

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

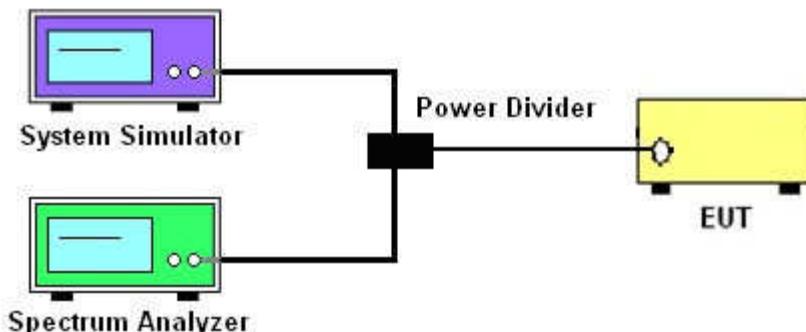

3.2.3 Frequency Stability

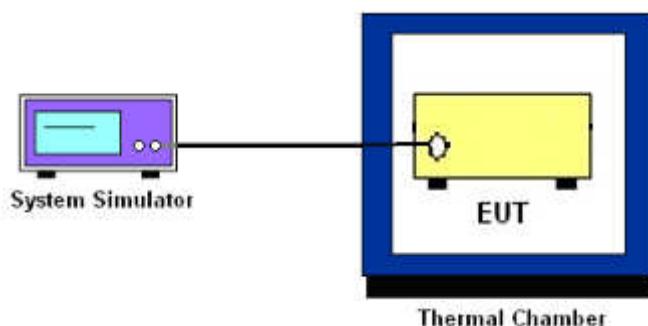

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12 and Band 17.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7 and Band 38.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for LTE Band 38. Duty factor = $10 \log(1/x)$, where x is the measured duty cycle.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13 \text{ dBm}. \end{aligned}$$

10. For LTE Band 7, 38, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For Band 7,38:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor for LTE Band 38. Duty factor = $10 \log(1/x)$, where x is the measured duty cycle
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
12. For Band 7, 38
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20 \pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

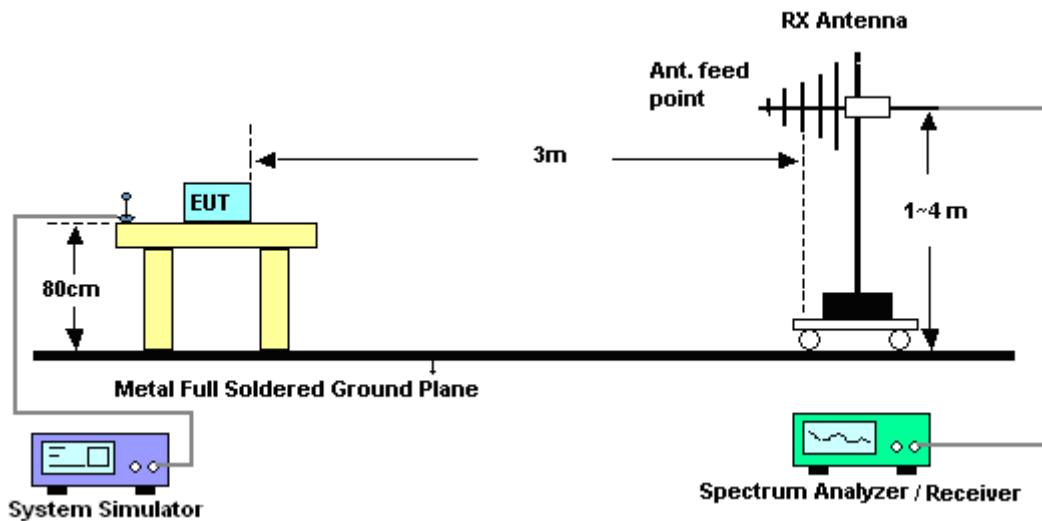

4.2.2 For radiated test above 1GHz

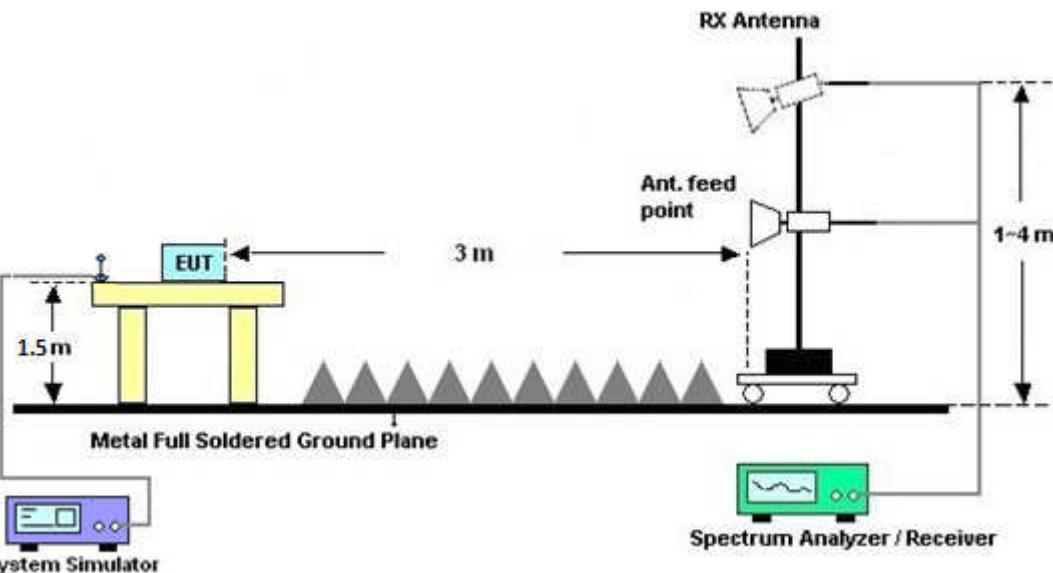

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 38

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For LTE Band 12,17

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is derived from $43 + 10\log(P) \text{ dB}$ below the transmitter power $P(\text{Watts})$
 $= P(\text{W}) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13 \text{ dBm.}$
13. For Band 7, 38:
The limit line is derived from $55 + 10\log(P) \text{ dB}$ below the transmitter power $P(\text{Watts})$
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
 $ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jan. 20, 2017~Feb. 14, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Jan. 20, 2017~Feb. 14, 2017	Oct. 12, 2017	Conducted (TH01-KS)
Base Station	R&S	CMW500	132725	LTE Full Band	Jan. 19, 2017	Jan. 20, 2017~Feb. 14, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Jan. 23, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Jan. 23, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Jan. 23, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Jan. 23, 2017	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Jan. 23, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
High Gain Amplifier	MITEQ	AMF-7D-00 101800-30-1	1943529	1GHz~18GHz	Jan. 19, 2017	Jan. 23, 2017	Jan. 18, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Oct. 13, 2016	Jan. 23, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Jan. 23, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 23, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 23, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 23, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.47	23.41	23.36
20	1	49		23.23	23.29	23.30
20	1	99		23.22	23.28	23.31
20	50	0		22.50	22.44	22.48
20	50	24		22.41	22.37	22.42
20	50	50		22.38	22.42	22.40
20	100	0		22.43	22.39	22.41
20	1	0		22.66	22.53	22.54
20	1	49	16-QAM	22.45	22.47	22.42
20	1	99		22.37	22.49	22.52
20	50	0		21.41	21.34	21.34
20	50	24		21.28	21.30	21.37
20	50	50		21.24	21.29	21.42
20	100	0		21.27	21.28	21.36
15	1	0	QPSK	23.43	23.36	23.30
15	1	37		23.29	23.34	23.39
15	1	74		23.22	23.28	23.37
15	36	0		22.48	22.44	22.42
15	36	20		22.42	22.40	22.45
15	36	39		22.38	22.40	22.48
15	75	0		22.40	22.41	22.46
15	1	0		22.62	22.50	22.47
15	1	37	16-QAM	22.48	22.52	22.50
15	1	74		22.36	22.50	22.52
15	36	0		21.40	21.32	21.31
15	36	20		21.33	21.31	21.41
15	36	39		21.24	21.30	21.43
15	75	0		21.32	21.31	21.40



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.43	23.31	23.32
	1	25		23.30	23.28	23.33
	1	49		23.21	23.24	23.33
	25	0		22.42	22.37	22.44
	25	12		22.37	22.36	22.49
	25	25		22.35	22.35	22.49
	50	0		22.41	22.40	22.53
10	1	0	16-QAM	22.58	22.48	22.48
	1	25		22.48	22.47	22.52
	1	49		22.36	22.45	22.48
	25	0		21.38	21.29	21.39
	25	12		21.33	21.28	21.41
	25	25		21.26	21.29	21.42
	50	0		21.36	21.31	21.43
5	1	0	QPSK	23.40	23.29	23.36
	1	12		23.40	23.32	23.45
	1	24		23.24	23.22	23.32
	12	0		22.46	22.38	22.47
	12	7		22.43	22.37	22.46
	12	13		22.43	22.37	22.45
	25	0		22.42	22.35	22.43
5	1	0	16-QAM	22.58	22.46	22.49
	1	12		22.54	22.47	22.55
	1	24		22.40	22.39	22.46
	12	0		21.41	21.31	21.44
	12	7		21.39	21.30	21.44
	12	13		21.38	21.31	21.44
	25	0		21.36	21.28	21.40



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.34	23.25	23.30
	1	8		23.33	23.27	23.34
	1	14		23.25	23.19	23.29
	8	0		22.44	22.37	22.44
	8	4		22.44	22.34	22.44
	8	7		22.43	22.33	22.44
	15	0		22.45	22.35	22.47
3	1	0	16-QAM	22.52	22.39	22.44
	1	8		22.50	22.41	22.50
	1	14		22.43	22.41	22.44
	8	0		21.45	21.32	21.45
	8	4		21.43	21.32	21.46
	8	7		21.42	21.31	21.46
	15	0		21.38	21.30	21.45
1.4	1	0	QPSK	23.37	23.26	23.33
	1	3		23.44	23.35	23.41
	1	5		23.32	23.25	23.34
	3	0		23.45	23.37	23.46
	3	1		23.42	23.32	23.44
	3	3		23.41	23.32	23.41
	6	0		22.46	22.38	22.45
1.4	1	0	16-QAM	22.52	22.40	22.51
	1	3		22.62	22.49	22.57
	1	5		22.46	22.42	22.46
	3	0		22.40	22.31	22.38
	3	1		22.38	22.30	22.37
	3	3		22.36	22.27	22.35
	6	0		21.47	21.36	21.49



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	24.15	24.16	24.18
	1	49		24.02	24.04	24.04
	1	99		23.99	23.97	23.91
	50	0		23.20	23.21	23.22
	50	24		23.13	23.15	23.13
	50	50		23.10	23.10	23.07
	100	0		23.13	23.12	23.14
20	1	0	16-QAM	23.30	23.29	23.36
	1	49		23.18	23.22	23.25
	1	99		23.14	23.15	23.06
	50	0		22.14	22.16	22.20
	50	24		22.08	22.11	22.12
	50	50		22.05	22.06	22.04
	100	0		22.09	22.09	22.10
15	1	0	QPSK	24.10	24.10	24.13
	1	37		24.08	24.10	24.07
	1	74		23.96	23.97	23.91
	36	0		23.14	23.17	23.17
	36	20		23.10	23.14	23.10
	36	39		23.10	23.12	23.06
	75	0		23.13	23.13	23.13
15	1	0	16-QAM	23.26	23.23	23.31
	1	37		23.21	23.25	23.25
	1	74		23.13	23.17	23.06
	36	0		22.10	22.12	22.15
	36	20		22.07	22.10	22.10
	36	39		22.05	22.08	22.03
	75	0		22.09	22.09	22.10



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	24.08	24.08	24.06
	1	25		24.02	24.01	23.98
	1	49		23.96	23.97	23.91
	25	0		23.10	23.13	23.09
	25	12		23.08	23.09	23.05
	25	25		23.07	23.09	23.05
	50	0		23.13	23.15	23.11
10	1	0	16-QAM	23.23	23.21	23.29
	1	25		23.18	23.18	23.17
	1	49		23.10	23.12	23.05
	25	0		22.07	22.07	22.06
	25	12		22.03	22.05	22.02
	25	25		22.01	22.05	22.01
	50	0		22.07	22.09	22.07
5	1	0	QPSK	24.02	24.04	23.96
	1	12		24.04	24.07	24.02
	1	24		23.90	23.94	23.87
	12	0		23.12	23.14	23.08
	12	7		23.10	23.11	23.06
	12	13		23.08	23.11	23.05
	25	0		23.06	23.09	23.03
5	1	0	16-QAM	23.18	23.17	23.15
	1	12		23.19	23.19	23.16
	1	24		23.08	23.09	23.00
	12	0		22.09	22.10	22.06
	12	7		22.08	22.07	22.04
	12	13		22.05	22.07	22.02
	25	0		22.03	22.04	21.99



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.95	23.95	23.89
	1	8		23.96	23.99	23.91
	1	14		23.90	23.92	23.86
	8	0		23.09	23.09	23.05
	8	4		23.08	23.07	23.03
	8	7		23.07	23.08	23.01
	15	0		23.08	23.09	23.04
3	1	0	16-QAM	23.12	23.12	23.07
	1	8		23.13	23.15	23.07
	1	14		23.06	23.09	23.01
	8	0		22.11	22.09	22.06
	8	4		22.08	22.09	22.03
	8	7		22.08	22.08	22.01
	15	0		22.06	22.05	22.01
1.4	1	0	QPSK	23.96	23.99	23.91
	1	3		24.05	24.07	24.00
	1	5		23.95	23.96	23.89
	3	0		24.07	24.08	24.03
	3	1		24.04	24.05	24.00
	3	3		24.03	24.04	23.98
	6	0		23.08	23.09	23.04
1.4	1	0	16-QAM	23.14	23.13	23.03
	1	3		23.23	23.19	23.17
	1	5		23.11	23.09	23.03
	3	0		23.02	23.03	22.95
	3	1		23.00	22.99	22.93
	3	3		22.97	22.96	22.91
	6	0		22.11	22.13	22.05



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	24.09	24.18	24.05
	1	49		24.01	23.77	24.01
	1	99		23.77	23.97	23.96
	50	0		23.18	23.20	23.19
	50	24		23.16	23.08	23.18
	50	50		23.05	23.08	23.14
	100	0		23.16	23.19	23.17
20	1	0	16-QAM	22.91	23.31	23.22
	1	49		23.15	23.06	23.17
	1	99		23.26	23.25	23.14
	50	0		22.11	22.20	22.14
	50	24		22.12	22.19	22.11
	50	50		22.15	22.22	22.13
	100	0		22.10	22.18	22.11
15	1	0	QPSK	23.46	23.86	24.05
	1	37		23.77	23.68	24.04
	1	74		24.09	23.89	23.86
	36	0		22.76	22.97	23.17
	36	20		23.01	22.99	23.14
	36	39		23.16	23.01	23.15
	75	0		23.04	23.06	23.17
15	1	0	16-QAM	22.67	23.13	23.19
	1	37		23.04	23.01	23.22
	1	74		23.23	23.25	23.13
	36	0		21.95	22.20	22.12
	36	20		22.11	22.18	22.10
	36	39		22.11	22.19	22.10
	75	0		22.11	22.19	22.10



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.26	23.65	24.02
	1	25		23.53	23.63	23.97
	1	49		23.74	23.62	23.69
	25	0		22.61	22.91	23.11
	25	12		22.84	22.94	23.10
	25	25		23.00	22.97	23.10
	50	0		22.85	23.00	23.15
10	1	0	16-QAM	22.48	22.99	23.15
	1	25		22.83	22.96	23.09
	1	49		23.05	23.02	23.01
	25	0		21.80	22.13	22.06
	25	12		21.96	22.13	22.04
	25	25		22.06	22.15	22.03
	50	0		22.01	22.16	22.08
5	1	0	QPSK	23.70	24.11	23.99
	1	12		23.39	23.67	23.89
	1	24		23.86	23.98	24.00
	12	0		22.68	23.04	23.08
	12	7		22.66	22.95	23.13
	12	13		22.74	22.96	23.13
	25	0		22.71	23.02	23.12
5	1	0	16-QAM	22.95	23.21	23.07
	1	12		22.72	22.96	23.14
	1	24		23.04	23.15	23.00
	12	0		21.86	22.16	22.03
	12	7		21.85	22.15	22.04
	12	13		21.92	22.14	22.05
	25	0		21.92	22.13	22.03



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.37	22.38	22.35
	1	25		22.34	22.31	22.32
	1	49		22.33	22.34	22.25
	25	0		21.38	21.39	21.35
	25	12		21.34	21.36	21.33
	25	25		21.32	21.34	21.33
	50	0		21.33	21.35	21.33
10	1	0	16-QAM	21.81	21.77	21.78
	1	25		21.79	21.85	21.85
	1	49		21.88	21.82	21.69
	25	0		20.36	20.35	20.37
	25	12		20.36	20.37	20.39
	25	25		20.40	20.43	20.35
	50	0		20.38	20.36	20.37
5	1	0	QPSK	22.29	22.31	22.30
	1	12		22.40	22.38	22.29
	1	24		22.30	22.32	22.19
	12	0		21.42	21.44	21.38
	12	7		21.43	21.43	21.34
	12	13		21.44	21.44	21.32
	25	0		21.33	21.34	21.26
5	1	0	16-QAM	21.84	21.77	21.79
	1	12		21.89	21.91	21.70
	1	24		21.76	21.82	21.64
	12	0		20.52	20.46	20.40
	12	7		20.49	20.47	20.34
	12	13		20.46	20.50	20.33
	25	0		20.38	20.37	20.29



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.21	22.26	22.16
	1	8		22.31	22.32	22.18
	1	14		22.27	22.25	22.13
	8	0		21.42	21.40	21.29
	8	4		21.40	21.42	21.28
	8	7		21.41	21.41	21.30
	15	0		21.35	21.35	21.26
3	1	0	16-QAM	21.70	21.68	21.59
	1	8		21.82	21.80	21.61
	1	14		21.72	21.75	21.60
	8	0		20.57	20.48	20.37
	8	4		20.53	20.51	20.34
	8	7		20.53	20.50	20.36
	15	0		20.43	20.39	20.27
1.4	1	0	QPSK	22.26	22.27	22.15
	1	3		22.38	22.38	22.25
	1	5		22.29	22.28	22.14
	3	0		22.36	22.36	22.23
	3	1		22.32	22.32	22.23
	3	3		22.31	22.32	22.21
	6	0		21.37	21.34	21.25
1.4	1	0	16-QAM	21.81	21.75	21.57
	1	3		21.87	21.87	21.67
	1	5		21.84	21.78	21.58
	3	0		21.55	21.52	21.36
	3	1		21.51	21.49	21.35
	3	3		21.50	21.47	21.33
	6	0		20.53	20.48	20.36



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.29	22.29	22.26
	1	25		22.34	22.35	22.32
	1	49		22.27	22.26	22.25
	25	0		21.33	21.37	21.36
	25	12		21.31	21.34	21.33
	25	25		21.31	21.33	21.32
	50	0		21.32	21.34	21.33
10	1	0	16-QAM	21.75	21.76	21.74
	1	25		21.84	21.85	21.88
	1	49		21.72	21.70	21.71
	25	0		20.33	20.34	20.36
	25	12		20.37	20.38	20.39
	25	25		20.42	20.37	20.39
	50	0		20.37	20.33	20.34
5	1	0	QPSK	22.30	22.29	22.29
	1	12		22.38	22.40	22.32
	1	24		22.30	22.29	22.20
	12	0		21.40	21.41	21.37
	12	7		21.39	21.41	21.35
	12	13		21.41	21.43	21.34
	25	0		21.33	21.33	21.28
5	1	0	16-QAM	21.75	21.79	21.79
	1	12		21.86	21.90	21.70
	1	24		21.81	21.77	21.66
	12	0		20.42	20.47	20.39
	12	7		20.40	20.47	20.38
	12	13		20.45	20.48	20.36
	25	0		20.33	20.36	20.30



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.49	23.45	23.48
	1	49		23.41	23.36	23.38
	1	99		23.46	23.42	22.95
	50	0		22.52	22.49	22.49
	50	24		22.50	22.47	22.45
	50	50		22.49	22.48	22.28
	100	0		22.50	22.47	22.03
20	1	0	16-QAM	22.53	22.51	22.09
	1	49		22.47	22.46	22.23
	1	99		22.29	22.50	22.31
	50	0		21.46	21.45	21.49
	50	24		21.44	21.45	21.46
	50	50		21.46	21.46	21.26
	100	0		21.45	21.44	21.45
15	1	0	QPSK	23.44	23.45	23.46
	1	37		23.44	23.42	23.45
	1	74		23.45	23.42	23.43
	36	0		22.52	22.49	22.50
	36	20		22.52	22.49	22.50
	36	39		22.52	22.50	22.30
	75	0		22.49	22.48	22.51
15	1	0	16-QAM	22.28	22.48	22.50
	1	37		22.47	22.50	22.51
	1	74		22.46	22.46	22.50
	36	0		21.20	21.39	21.41
	36	20		21.21	21.41	21.42
	36	39		21.18	21.40	21.21
	75	0		21.45	21.44	21.49



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.42	23.41	23.41
	1	25		23.19	23.40	22.96
	1	49		22.94	23.37	23.40
	25	0		22.46	22.45	22.48
	25	12		22.23	22.44	22.25
	25	25		22.23	22.45	22.07
	50	0		22.24	22.49	22.52
10	1	0	16-QAM	22.46	22.47	22.47
	1	25		22.23	22.46	22.49
	1	49		22.22	22.43	22.04
	25	0		20.96	21.41	21.48
	25	12		21.20	21.41	21.23
	25	25		21.42	21.44	21.27
	50	0		21.46	21.44	21.47
5	1	0	QPSK	23.35	23.40	23.42
	1	12		23.39	23.40	23.45
	1	24		23.28	23.32	23.36
	12	0		22.45	22.47	22.51
	12	7		22.45	22.46	22.50
	12	13		22.47	22.47	22.51
	25	0		22.46	22.44	22.48
5	1	0	16-QAM	22.42	22.45	22.51
	1	12		22.44	22.47	22.53
	1	24		22.48	22.43	22.53
	12	0		21.36	21.38	21.44
	12	7		21.36	21.38	21.44
	12	13		21.38	21.39	21.47
	25	0		21.38	21.42	21.47

**ERP/EIRP**

LTE Band 2 ($G_T - L_C = 3.04 \text{ dB}$) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	23.45	23.37	23.46	23.33	23.27	23.34	23.40	23.32	23.45
Conducted Power (Watts)	0.2213	0.2173	0.2218	0.2153	0.2123	0.2158	0.2188	0.2148	0.2213
EIRP(dBm)	26.49	26.41	26.50	26.37	26.31	26.38	26.44	26.36	26.49
EIRP(Watts)	0.4457	0.4375	0.4467	0.4335	0.4276	0.4345	0.4406	0.4325	0.4457

LTE Band 2 ($G_T - L_C = 3.04 \text{ dB}$) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	23.43	23.31	23.32	23.43	23.36	23.30	23.47	23.41	23.36
Conducted Power (Watts)	0.2203	0.2143	0.2148	0.2203	0.2168	0.2138	0.2223	0.2193	0.2168
EIRP(dBm)	26.47	26.35	26.36	26.47	26.40	26.34	26.51	26.45	26.40
EIRP(Watts)	0.4436	0.4315	0.4325	0.4436	0.4365	0.4305	0.4477	0.4416	0.4365



LTE Band 2 ($G_T - L_C = 3.04 \text{ dB}$) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	22.62	22.49	22.57	22.52	22.39	22.44	22.58	22.46	22.49
Conducted Power (Watts)	0.1828	0.1774	0.1807	0.1786	0.1734	0.1754	0.1811	0.1762	0.1774
EIRP(dBm)	25.66	25.53	25.61	25.56	25.43	25.48	25.62	25.50	25.53
EIRP(Watts)	0.3681	0.3573	0.3639	0.3597	0.3491	0.3532	0.3648	0.3548	0.3573

LTE Band 2 ($G_T - L_C = 3.04 \text{ dB}$) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	22.58	22.48	22.48	22.62	22.50	22.47	22.66	22.53	22.54
Conducted Power (Watts)	0.1811	0.1770	0.1770	0.1828	0.1778	0.1766	0.1845	0.1791	0.1795
EIRP(dBm)	25.62	25.52	25.52	25.66	25.54	25.51	25.70	25.57	25.58
EIRP(Watts)	0.3648	0.3565	0.3565	0.3681	0.3581	0.3556	0.3715	0.3606	0.3614



LTE Band 4 ($G_T - L_C = 2.65 \text{ dB}$) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
		24.07	24.08	24.03	23.96	23.99	23.91	24.04	24.07
Conducted Power (dBm)									
Conducted Power (Watts)	0.2553	0.2559	0.2529	0.2489	0.2506	0.2460	0.2535	0.2553	0.2523
EIRP(dBm)	26.72	26.73	26.68	26.61	26.64	26.56	26.69	26.72	26.67
EIRP(Watts)	0.4699	0.4710	0.4656	0.4581	0.4613	0.4529	0.4667	0.4699	0.4645

LTE Band 4 ($G_T - L_C = 2.65 \text{ dB}$) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
		24.08	24.08	24.06	24.10	24.10	24.13	24.15	24.16
Conducted Power (dBm)									
Conducted Power (Watts)	0.2559	0.2559	0.2547	0.2570	0.2570	0.2588	0.2600	0.2606	0.2618
EIRP(dBm)	26.73	26.73	26.71	26.75	26.75	26.78	26.80	26.81	26.83
EIRP(Watts)	0.4710	0.4710	0.4688	0.4732	0.4732	0.4764	0.4786	0.4797	0.4819



LTE Band 4 ($G_T - L_C = 2.65 \text{ dB}$) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
		23.23	23.19	23.17	23.13	23.15	23.07	23.19	23.16
Conducted Power (dBm)	0.2104	0.2084	0.2075	0.2056	0.2065	0.2028	0.2084	0.2084	0.2070
EIRP(dBm)	25.88	25.84	25.82	25.78	25.80	25.72	25.84	25.84	25.81
EIRP(Watts)	0.3873	0.3837	0.3819	0.3784	0.3802	0.3733	0.3837	0.3837	0.3811

LTE Band 4 ($G_T - L_C = 2.65 \text{ dB}$) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
		23.23	23.21	23.29	23.26	23.23	23.31	23.30	23.29
Conducted Power (dBm)	0.2104	0.2094	0.2133	0.2118	0.2104	0.2143	0.2138	0.2133	0.2168
EIRP(dBm)	25.88	25.86	25.94	25.91	25.88	25.96	25.95	25.94	26.01
EIRP(Watts)	0.3873	0.3855	0.3926	0.3899	0.3873	0.3945	0.3936	0.3926	0.3990



LTE Band 7 ($G_T - L_C = 1.90 \text{ dB}$) QPSK									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
Conducted Power (dBm)	23.70	24.11	23.99	23.26	23.65	24.02	24.09	23.89	23.86
Conducted Power (Watts)	0.2344	0.2576	0.2506	0.2118	0.2317	0.2523	0.2564	0.2449	0.2432
EIRP(dBm)	25.60	26.01	25.89	25.16	25.55	25.92	25.99	25.79	25.76
EIRP(Watts)	0.3631	0.3990	0.3882	0.3281	0.3589	0.3908	0.3972	0.3793	0.3767

LTE Band 7 ($G_T - L_C = 1.90 \text{ dB}$) QPSK			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency (MHz)	2510	2535	2560
Conducted Power (dBm)	24.09	24.18	24.05
Conducted Power (Watts)	0.2564	0.2618	0.2541
EIRP(dBm)	25.99	26.08	25.95
EIRP(Watts)	0.3972	0.4055	0.3936



LTE Band 7 ($G_T - L_C = 1.90 \text{ dB}$) 16QAM									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
Conducted Power (dBm)	22.95	23.21	23.07	22.48	22.99	23.15	23.23	23.25	23.13
Conducted Power (Watts)	0.1972	0.2094	0.2028	0.1770	0.1991	0.2065	0.2104	0.2113	0.2056
EIRP(dBm)	24.85	25.11	24.97	24.38	24.89	25.05	25.13	25.15	25.03
EIRP(Watts)	0.3055	0.3243	0.3141	0.2742	0.3083	0.3199	0.3258	0.3273	0.3184

LTE Band 7 ($G_T - L_C = 1.90 \text{ dB}$) 16QAM			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency (MHz)	2510	2535	2560
Conducted Power (dBm)	22.91	23.31	23.22
Conducted Power (Watts)	0.1954	0.2143	0.2099
EIRP(dBm)	24.81	25.21	25.12
EIRP(Watts)	0.3027	0.3319	0.3251



LTE Band 12 ($G_T - L_c = -1.14 \text{ dB}$) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	23017 (Low)	23095 (Mid)	23173 (High)	23025 (Low)	23095 (Mid)	23165 (High)	23035 (Low)	23095 (Mid)	23155 (High)
	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
Frequency (MHz)	22.38	22.38	22.25	22.31	22.32	22.18	22.40	22.38	22.29
Conducted Power (dBm)	0.1730	0.1730	0.1679	0.1702	0.1706	0.1652	0.1738	0.1730	0.1694
Conducted Power (Watts)	19.09	19.09	18.96	19.02	19.03	18.89	19.11	19.09	19.00
ERP(dBm)	0.0811	0.0811	0.0787	0.0798	0.0800	0.0774	0.0815	0.0811	0.0794
ERP(Watts)									

LTE Band 12 ($G_T - L_c = -1.14 \text{ dB}$) QPSK			
Bandwidth	10M		
Channel	23060 (Low)	23095 (Mid)	23130 (High)
	704	707.5	711
Conducted Power (dBm)	22.37	22.38	22.35
Conducted Power (Watts)	0.1726	0.1730	0.1718
ERP(dBm)	19.08	19.09	19.06
ERP(Watts)	0.0809	0.0811	0.0805



LTE Band 12 ($G_T - L_C = -1.14 \text{ dB}$) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	23017	23095	23173	23025	23095	23165	23035	23095	23155
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
Conducted Power (dBm)	21.87	21.87	21.67	21.82	21.80	21.61	21.89	21.91	21.70
Conducted Power (Watts)	0.1538	0.1538	0.1469	0.1521	0.1514	0.1449	0.1545	0.1552	0.1479
ERP(dBm)	18.58	18.58	18.38	18.53	18.51	18.32	18.60	18.62	18.41
ERP(Watts)	0.0721	0.0721	0.0689	0.0713	0.0710	0.0679	0.0724	0.0728	0.0693

LTE Band 12 ($G_T - L_C = -1.14 \text{ dB}$) 16QAM			
Bandwidth	10M		
Channel	23060	23095	23130
	(Low)	(Mid)	(High)
Frequency (MHz)	704	707.5	711
Conducted Power (dBm)	21.88	21.82	21.69
Conducted Power (Watts)	0.1542	0.1521	0.1476
ERP(dBm)	18.59	18.53	18.40
ERP(Watts)	0.0723	0.0713	0.0692



LTE Band 17 ($G_T - L_C = -0.18 \text{ dB}$) QPSK						
Bandwidth	5M			10M		
Channel	23755	23790	23825	23780	23790	23800
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	706.5	710	713.5	709	710	711
Conducted Power (dBm)	22.38	22.40	22.32	22.34	22.35	22.32
Conducted Power (Watts)	0.1730	0.1738	0.1706	0.1714	0.1718	0.1706
ERP(dBm)	20.05	20.07	19.99	20.01	20.02	19.99
ERP(Watts)	0.1012	0.1016	0.0998	0.1002	0.1005	0.0998

LTE Band 17 ($G_T - L_C = -0.18 \text{ dB}$) 16QAM						
Bandwidth	5M			10M		
Channel	23755	23790	23825	23780	23790	23800
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	706.5	710	713.5	709	710	711
Conducted Power (dBm)	21.86	21.90	21.70	21.84	21.85	21.88
Conducted Power (Watts)	0.1535	0.1549	0.1479	0.1528	0.1531	0.1542
ERP(dBm)	19.53	19.57	19.37	19.51	19.52	19.55
ERP(Watts)	0.0897	0.0906	0.0865	0.0893	0.0895	0.0902



LTE Band 38 ($G_T - L_C = 1.22 \text{ dB}$) QPSK									
Bandwidth	5M			10M			15M		
Channel	37775 (Low)	38000 (Mid)	38225 (High)	37800 (Low)	38000 (Mid)	38200 (High)	37825 (Low)	38000 (Mid)	38175 (High)
	2572.5	2595	2617.5	2575	2595	2615	2577.5	2595	2612.5
Conducted Power (dBm)	23.39	23.40	23.45	23.42	23.41	23.41	23.44	23.45	23.46
Conducted Power (Watts)	0.2183	0.2188	0.2213	0.2198	0.2193	0.2193	0.2208	0.2213	0.2218
EIRP(dBm)	24.61	24.62	24.67	24.64	24.63	24.63	24.66	24.67	24.68
EIRP(Watts)	0.2891	0.2897	0.2931	0.2911	0.2904	0.2904	0.2924	0.2931	0.2938

LTE Band 38 ($G_T - L_C = 1.22 \text{ dB}$) QPSK			
Bandwidth	20M		
Channel	37850 (Low)	38000 (Mid)	38150 (High)
	2580	2595	2610
Conducted Power (dBm)	23.49	23.45	23.48
Conducted Power (Watts)	0.2234	0.2213	0.2228
EIRP(dBm)	24.71	24.67	24.70
EIRP(Watts)	0.2958	0.2931	0.2951



LTE Band 38 ($G_T - L_C = 1.22 \text{ dB}$) 16QAM									
Bandwidth	5M			10M			15M		
Channel	37775	38000	38225	37800	38000	38200	37825	38000	38175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2572.5	2595	2617.5	2575	2595	2615	2577.5	2595	2612.5
Conducted Power (dBm)	22.48	22.43	22.53	22.23	22.46	22.49	22.47	22.50	22.51
Conducted Power (Watts)	0.1770	0.1750	0.1791	0.1671	0.1762	0.1774	0.1766	0.1778	0.1782
EIRP(dBm)	23.70	23.65	23.75	23.45	23.68	23.71	23.69	23.72	23.73
EIRP(Watts)	0.2344	0.2317	0.2371	0.2213	0.2333	0.2350	0.2339	0.2355	0.2360

LTE Band 38 ($G_T - L_C = 1.22 \text{ dB}$) 16QAM			
Bandwidth	20M		
Channel	37850	38000	38150
	(Low)	(Mid)	(High)
Frequency (MHz)	2580	2595	2610
Conducted Power (dBm)	22.53	22.51	22.09
Conducted Power (Watts)	0.1791	0.1782	0.1618
EIRP(dBm)	23.75	23.73	23.31
EIRP(Watts)	0.2371	0.2360	0.2143

**Peak-to-Average Ratio**

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.97	4.46	4.96	5.36	PASS
Middle CH	3.97	4.84	4.90	5.77	
Highest CH	3.83	4.61	4.81	5.57	

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.62	4.67	4.78	5.51	PASS
Middle CH	3.30	4.70	4.49	5.57	
Highest CH	3.36	4.78	4.67	5.59	


Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.06	4.93	5.04	5.83	PASS
Middle CH	4.32	4.81	4.81	5.77	
Highest CH	4.35	4.78	4.93	5.68	


Mode	LTE Band 12 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.65	6.26	6.46	6.96	PASS
Middle CH	5.22	6.41	6.58	7.07	
Highest CH	5.80	6.35	6.78	7.01	





Mode	LTE Band 17 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.88	6.46	6.58	7.10	PASS
Middle CH	5.22	6.46	6.20	7.19	
Highest CH	5.22	6.55	6.06	7.19	


Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.54	5.13	5.36	6.32	PASS
Middle CH	5.57	5.94	5.13	5.91	
Highest CH	4.67	5.19	5.25	5.80	

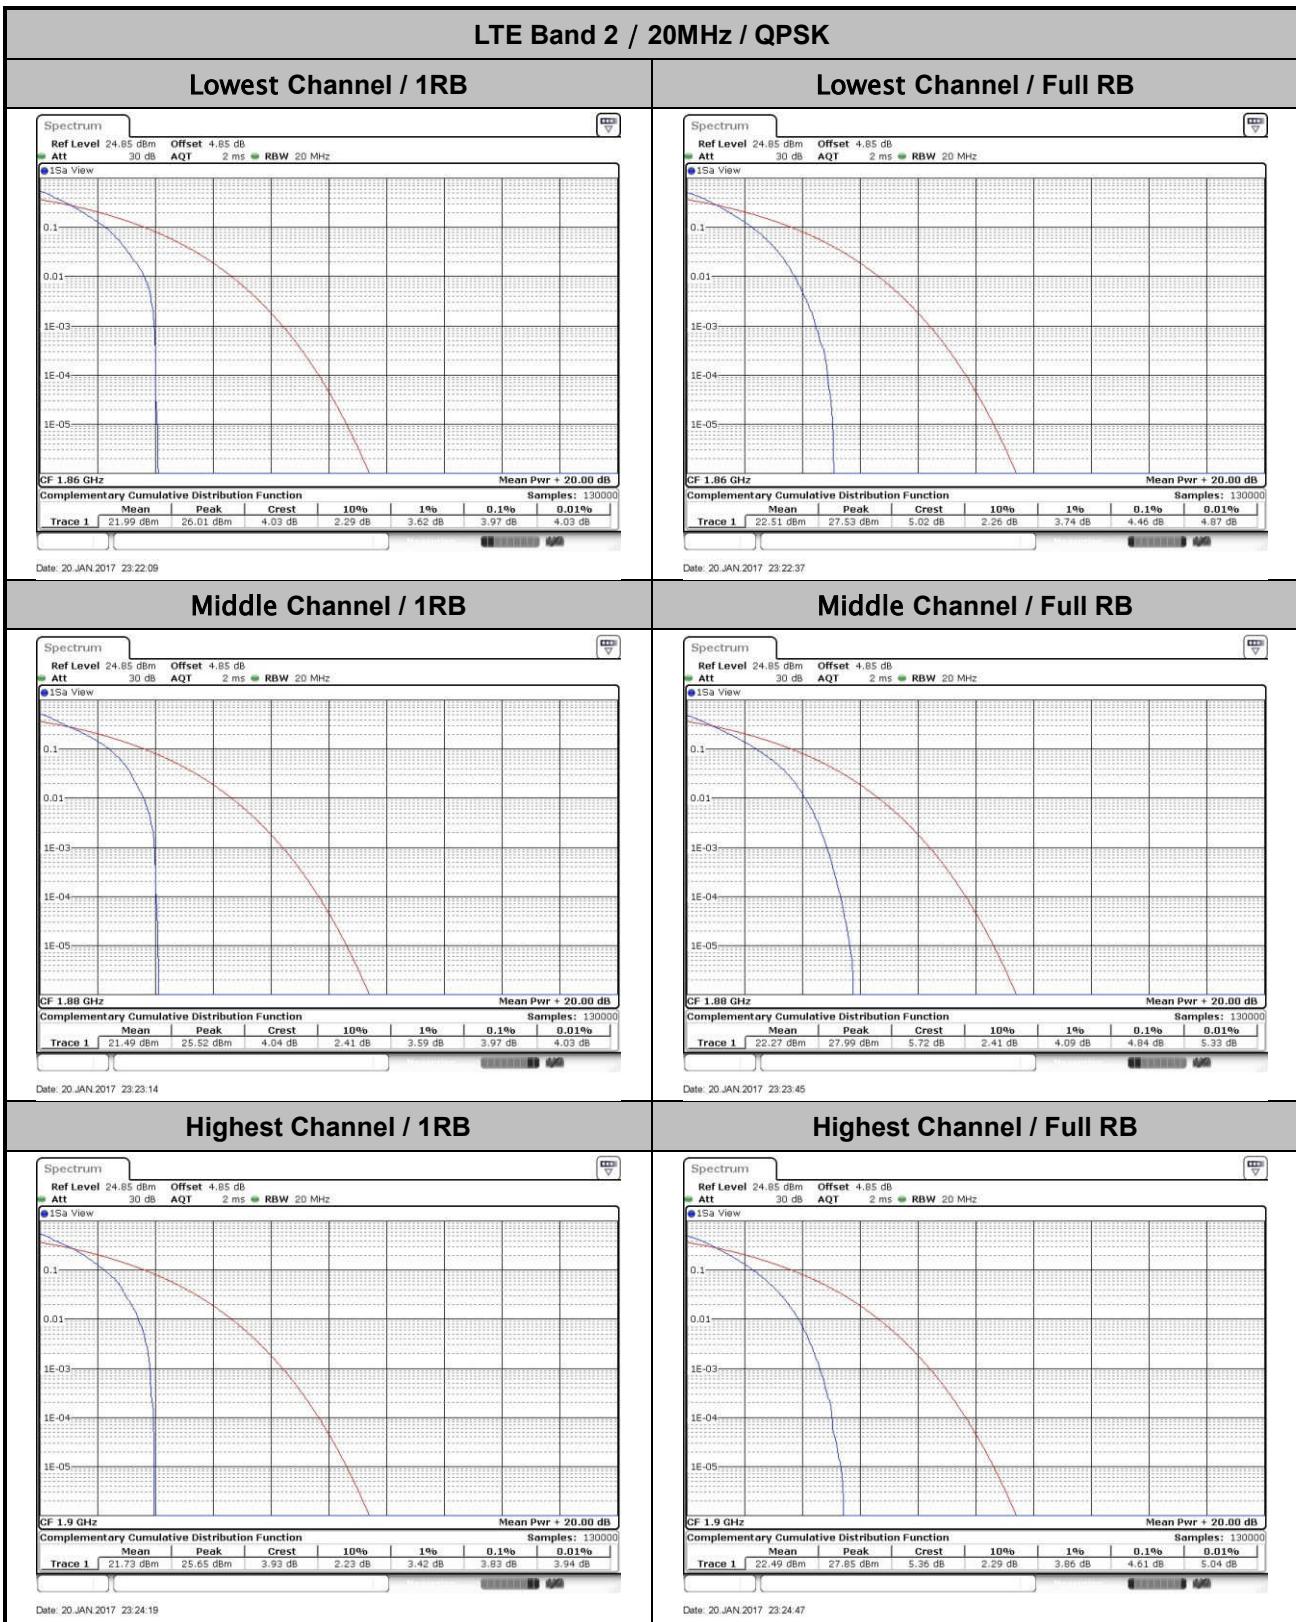


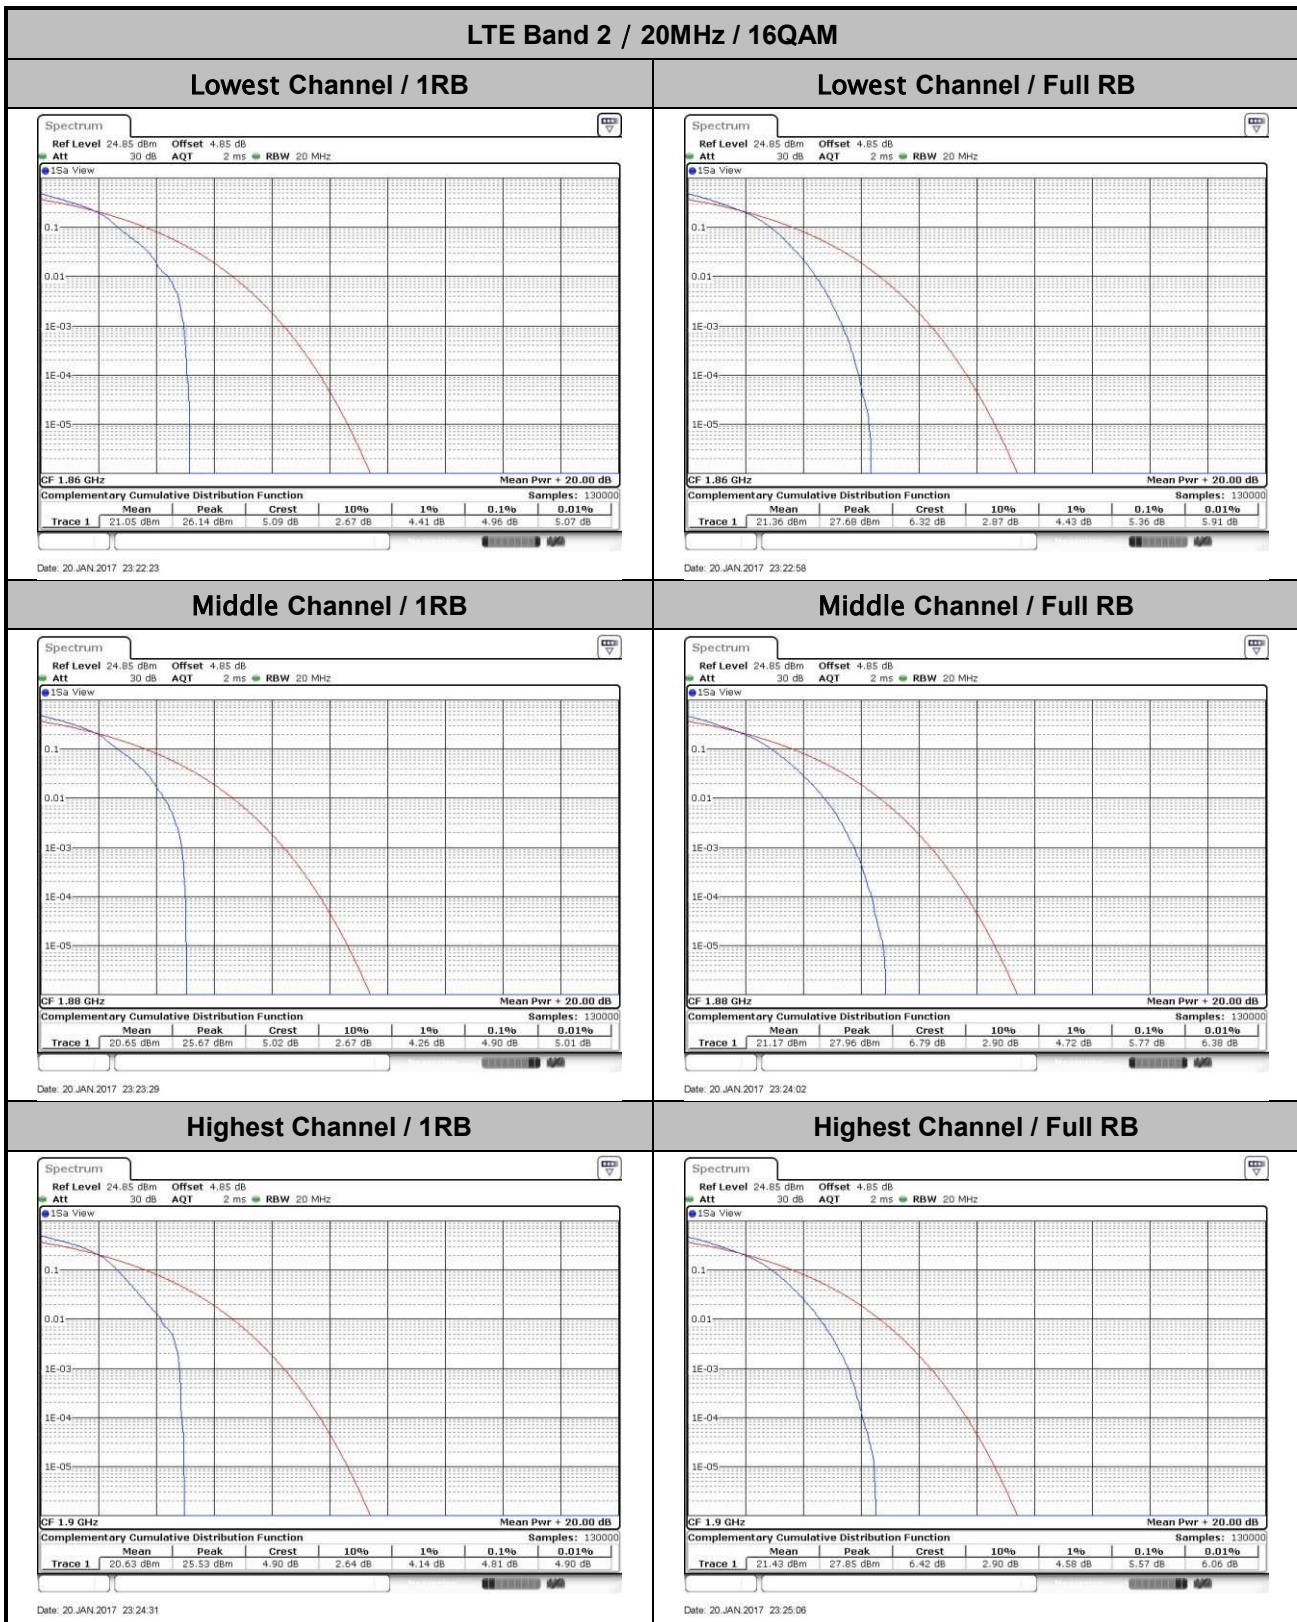


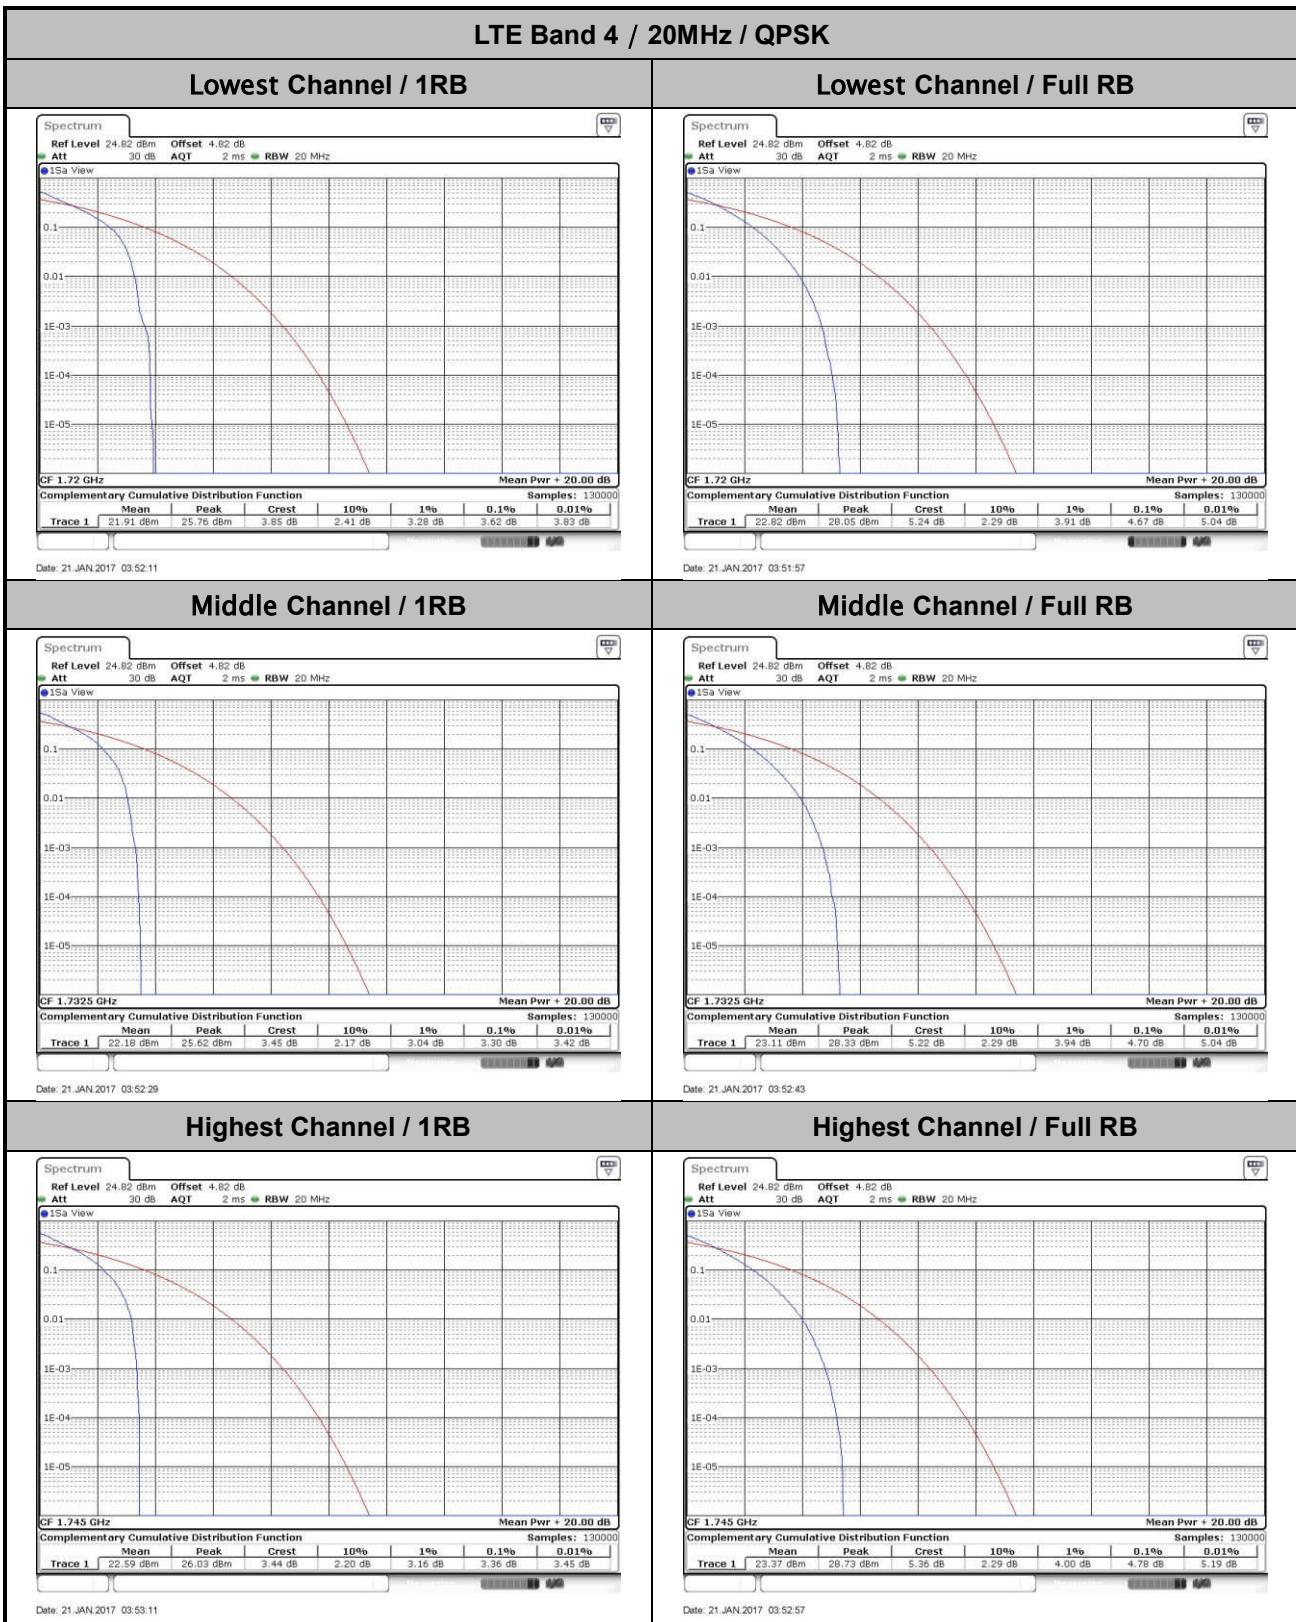


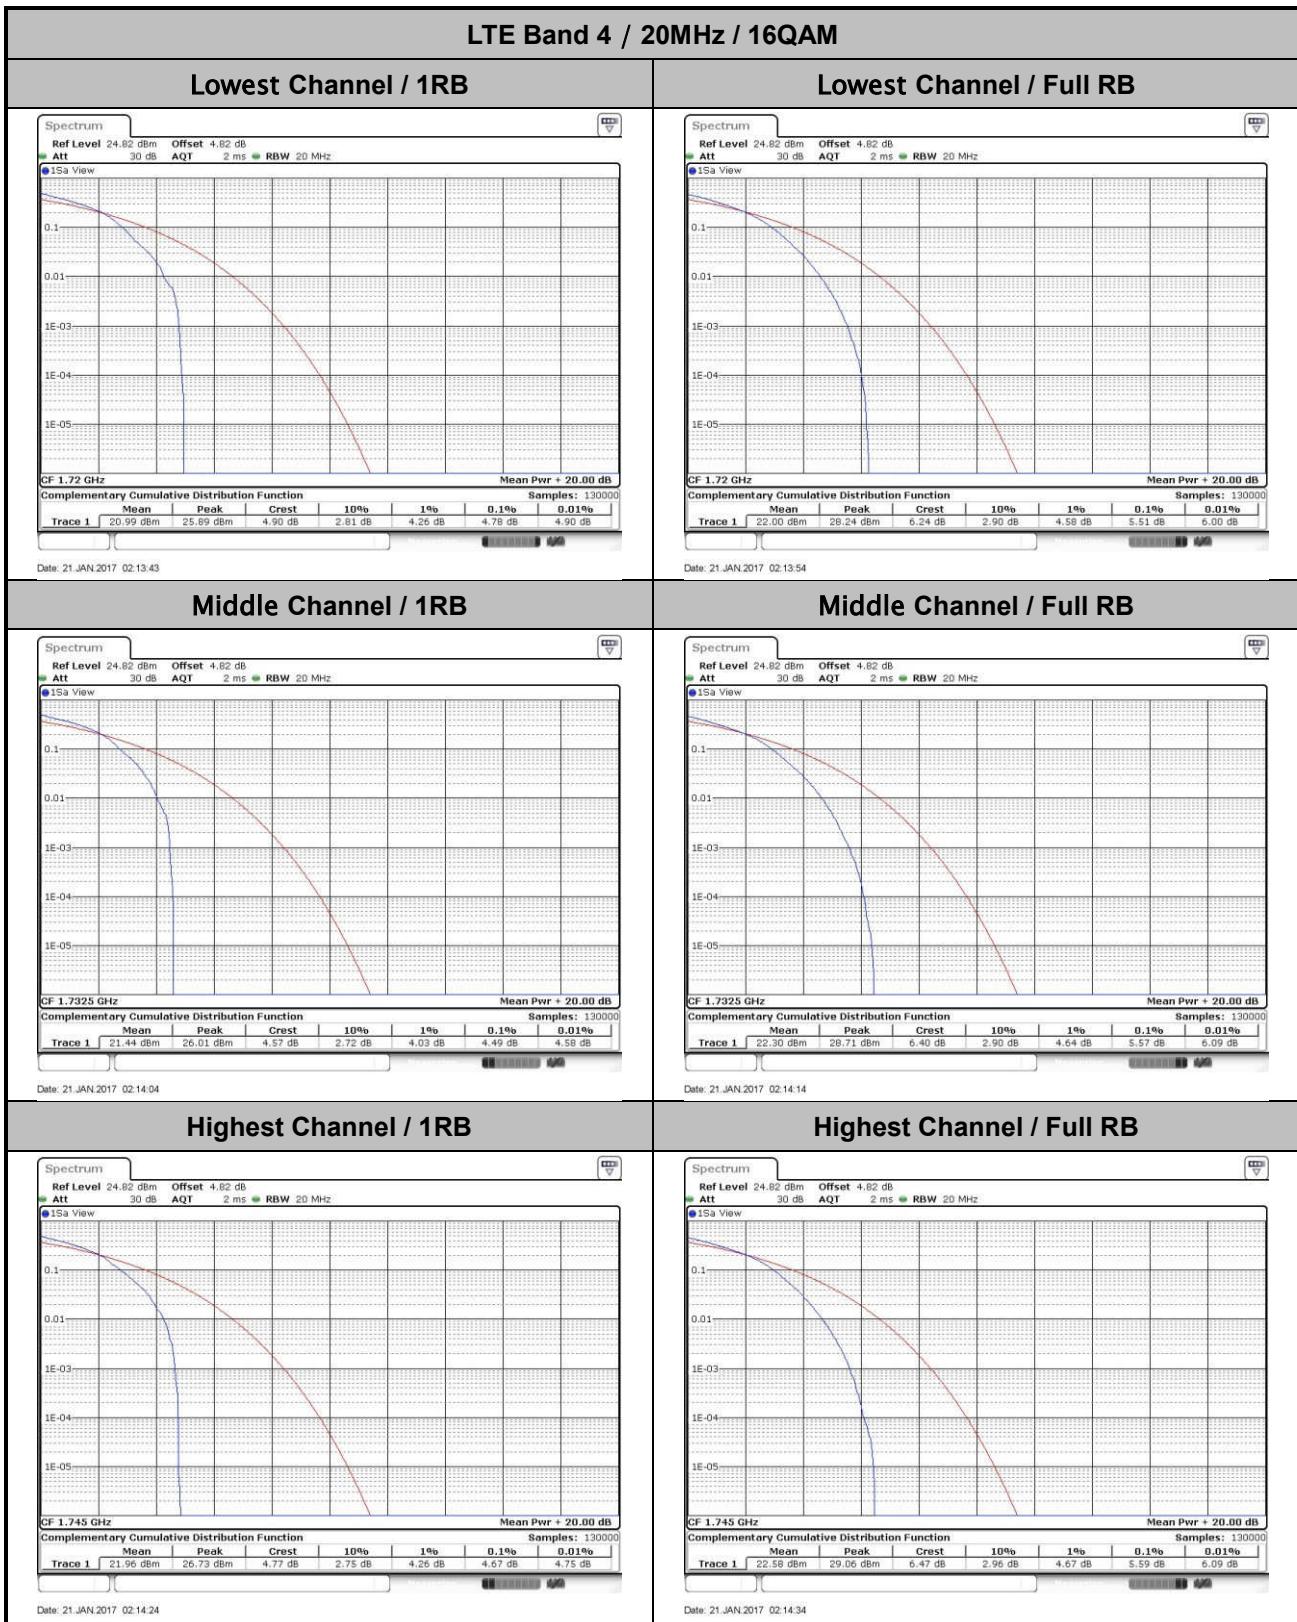


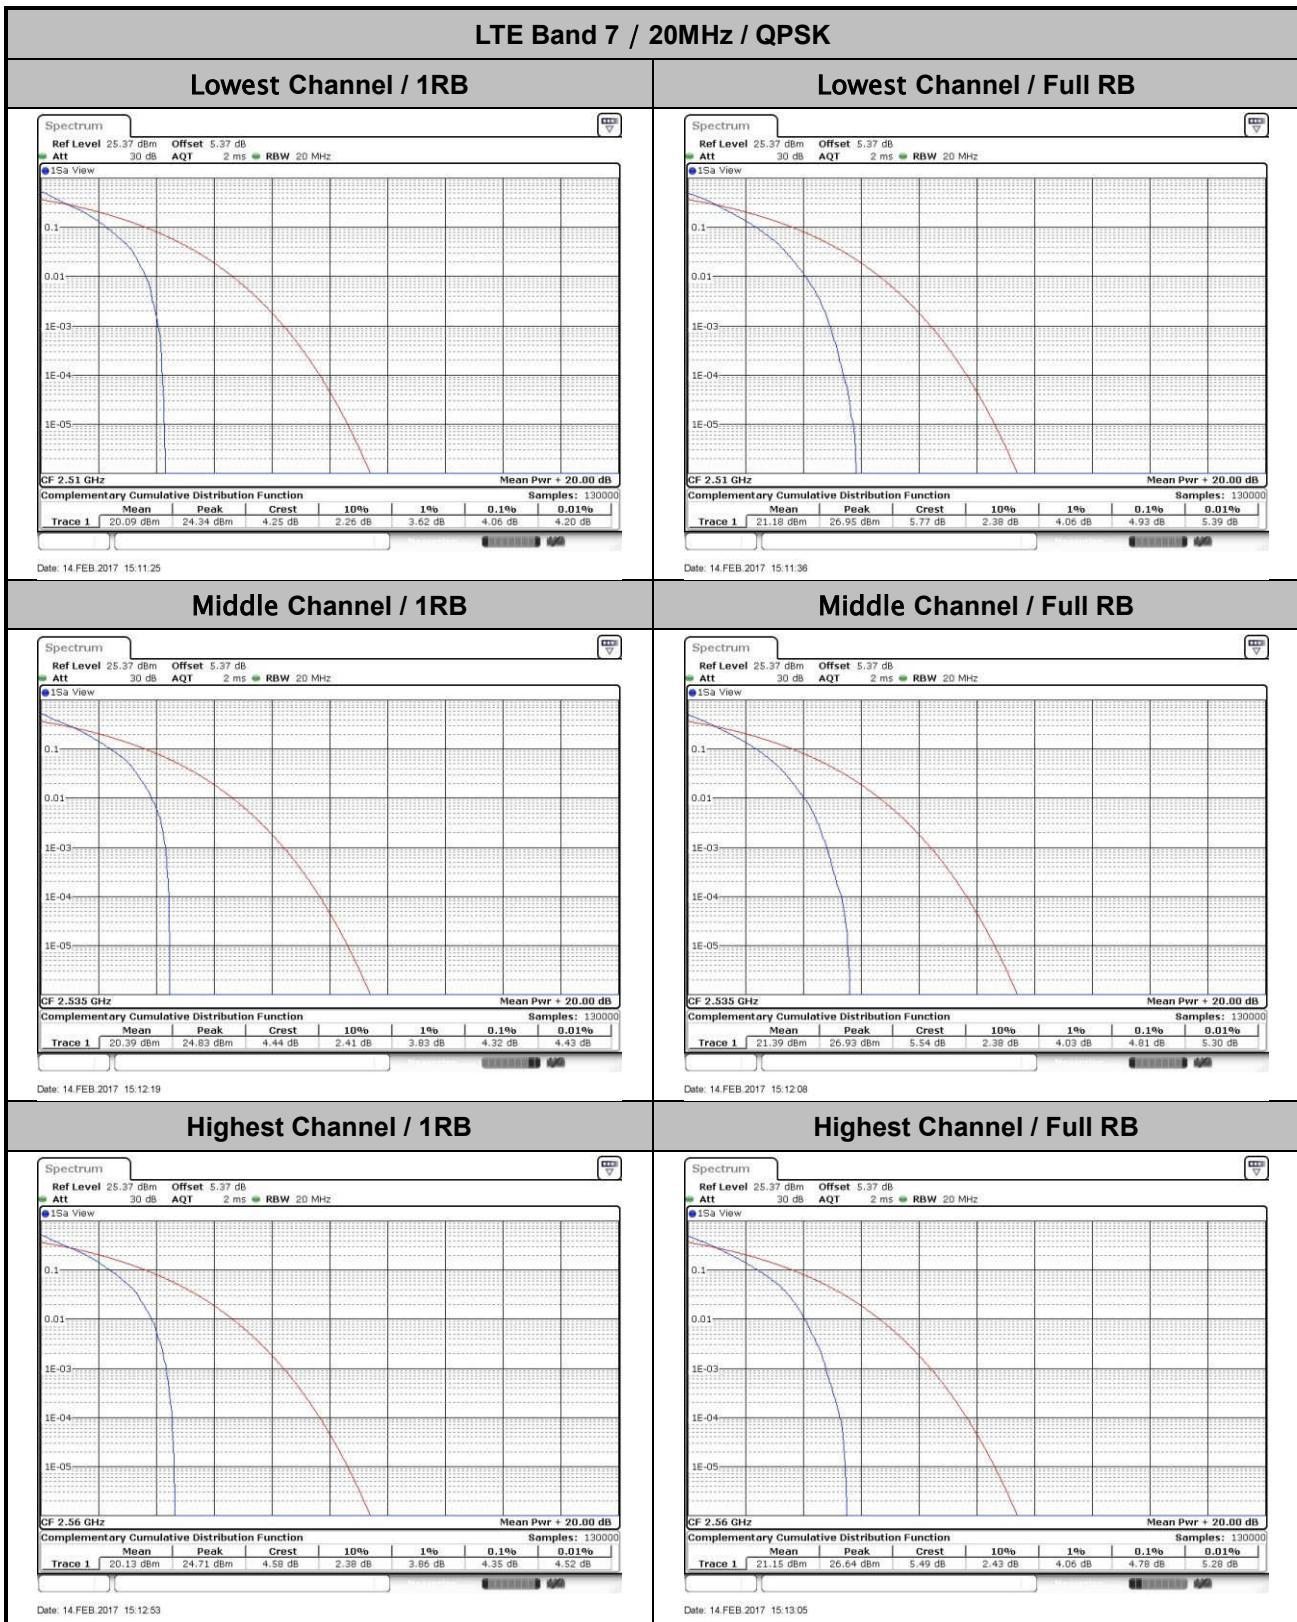


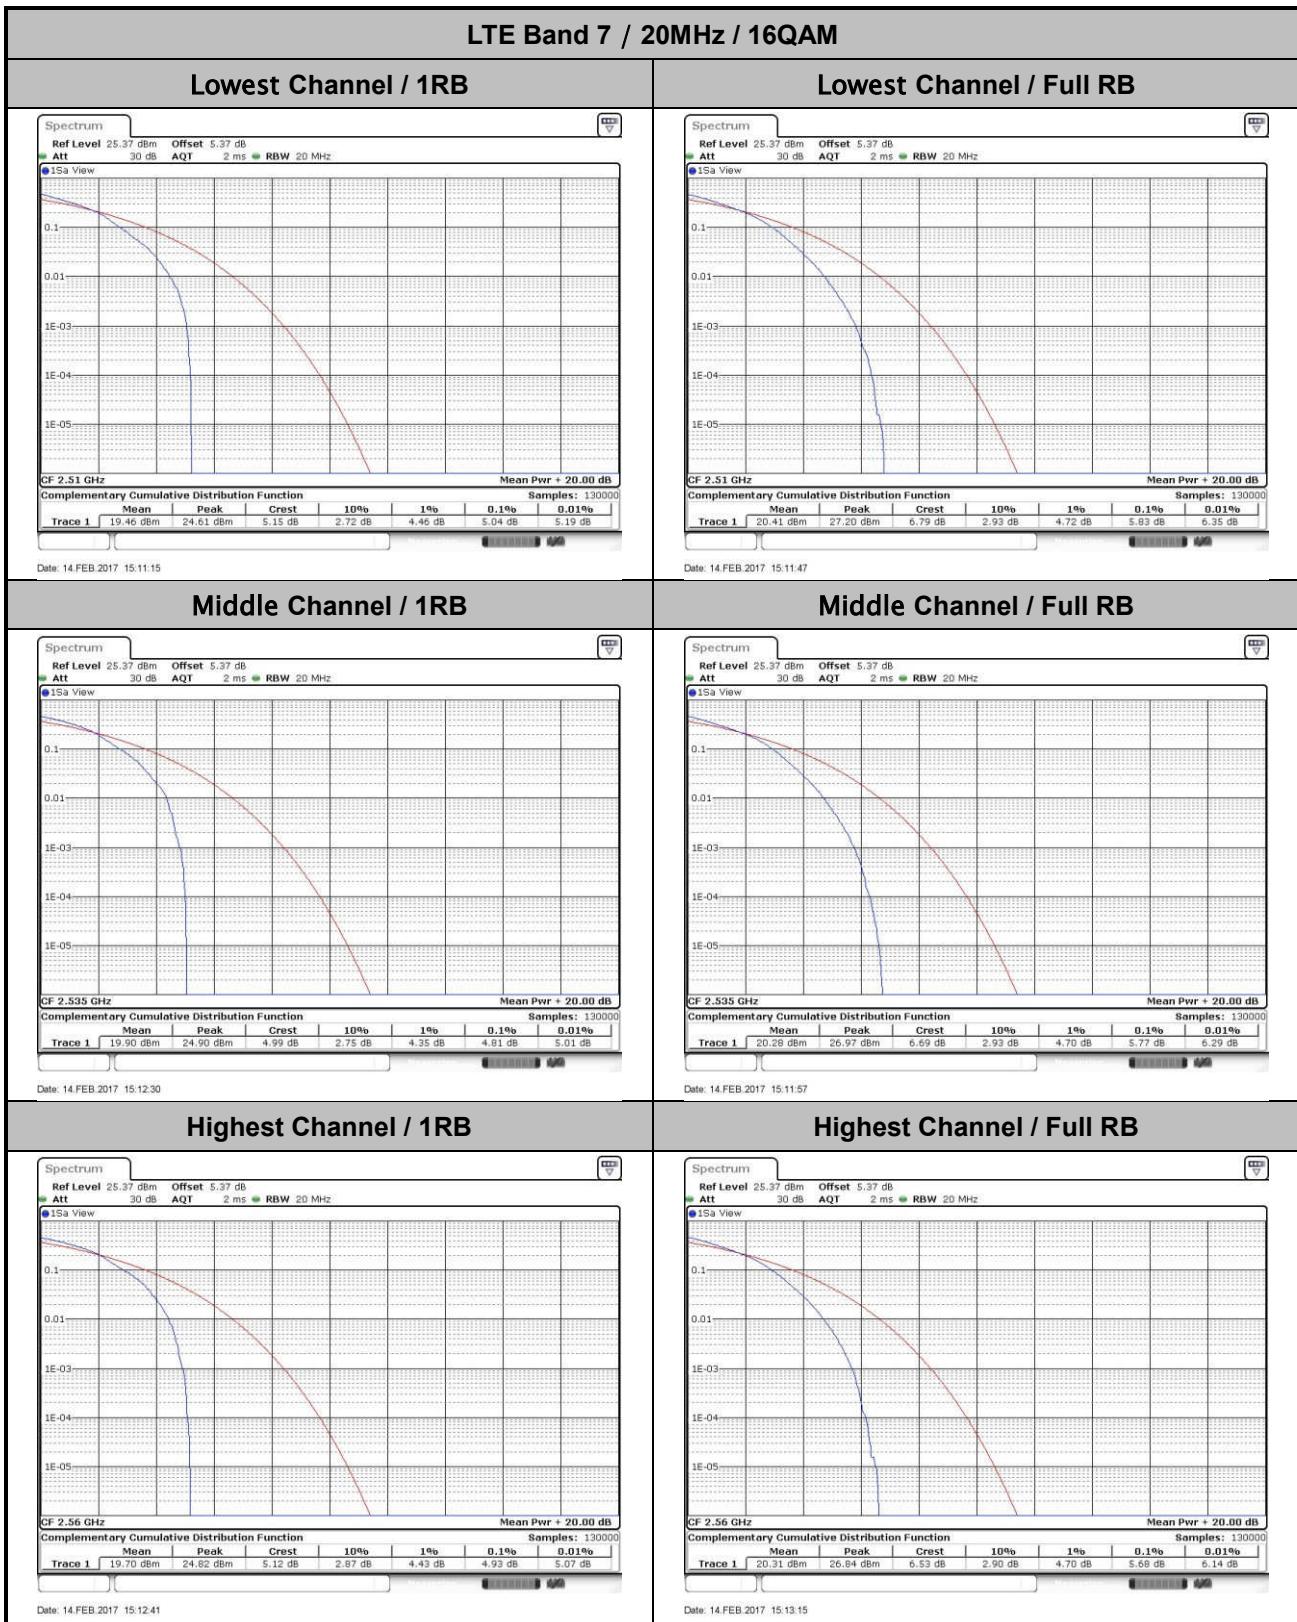


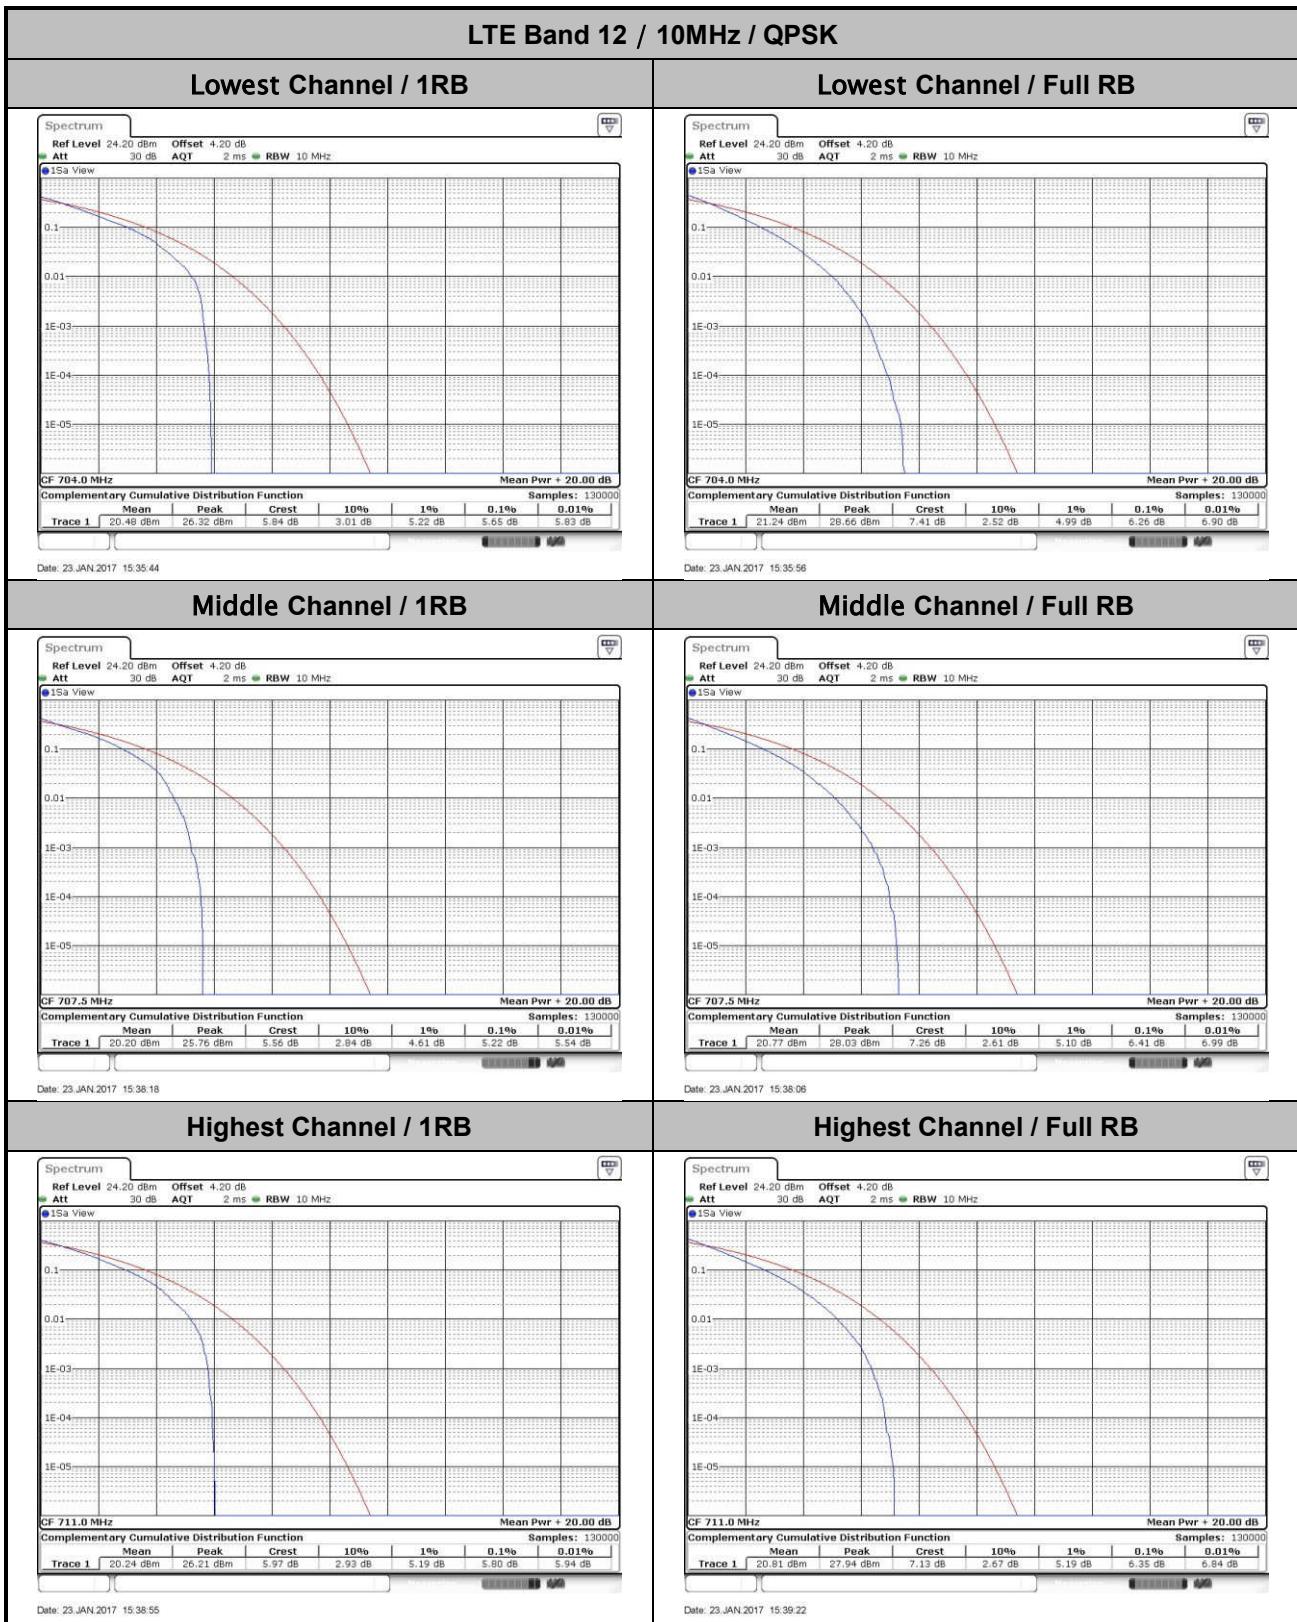


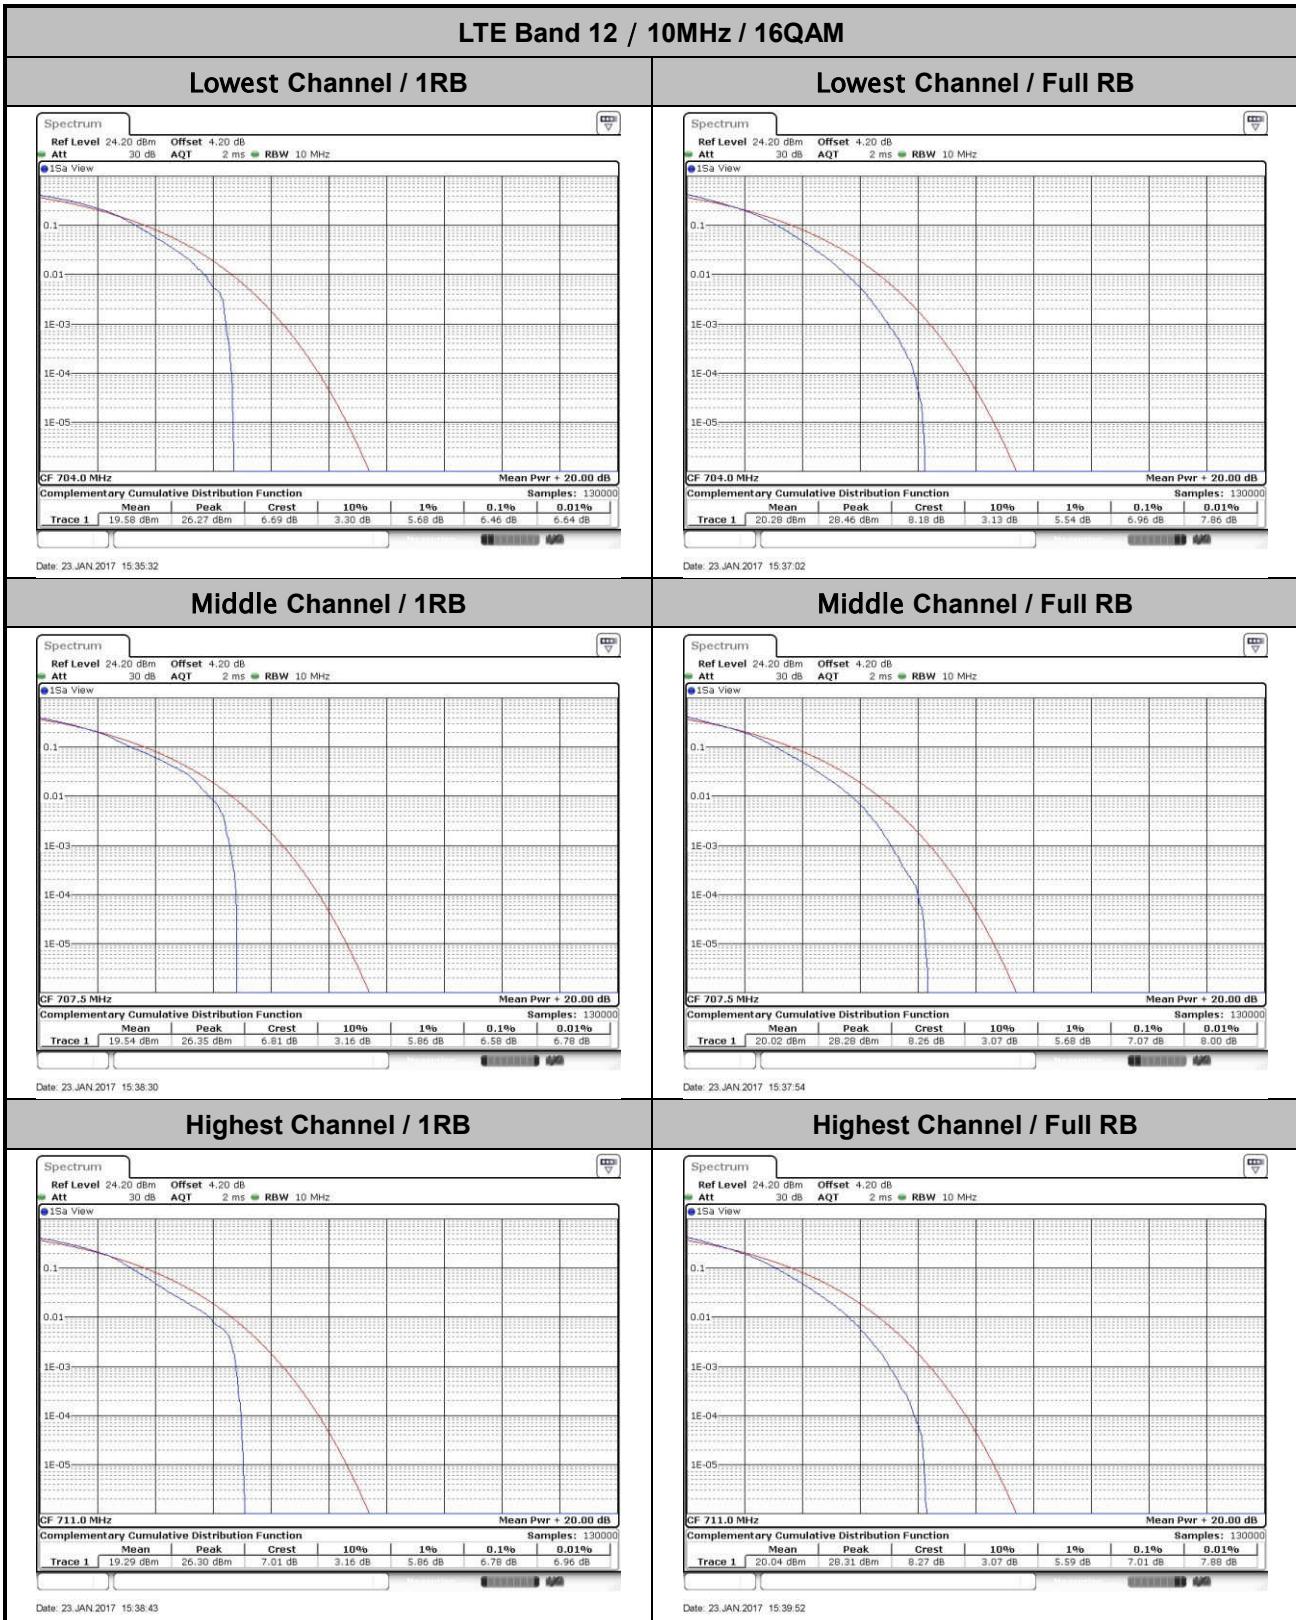

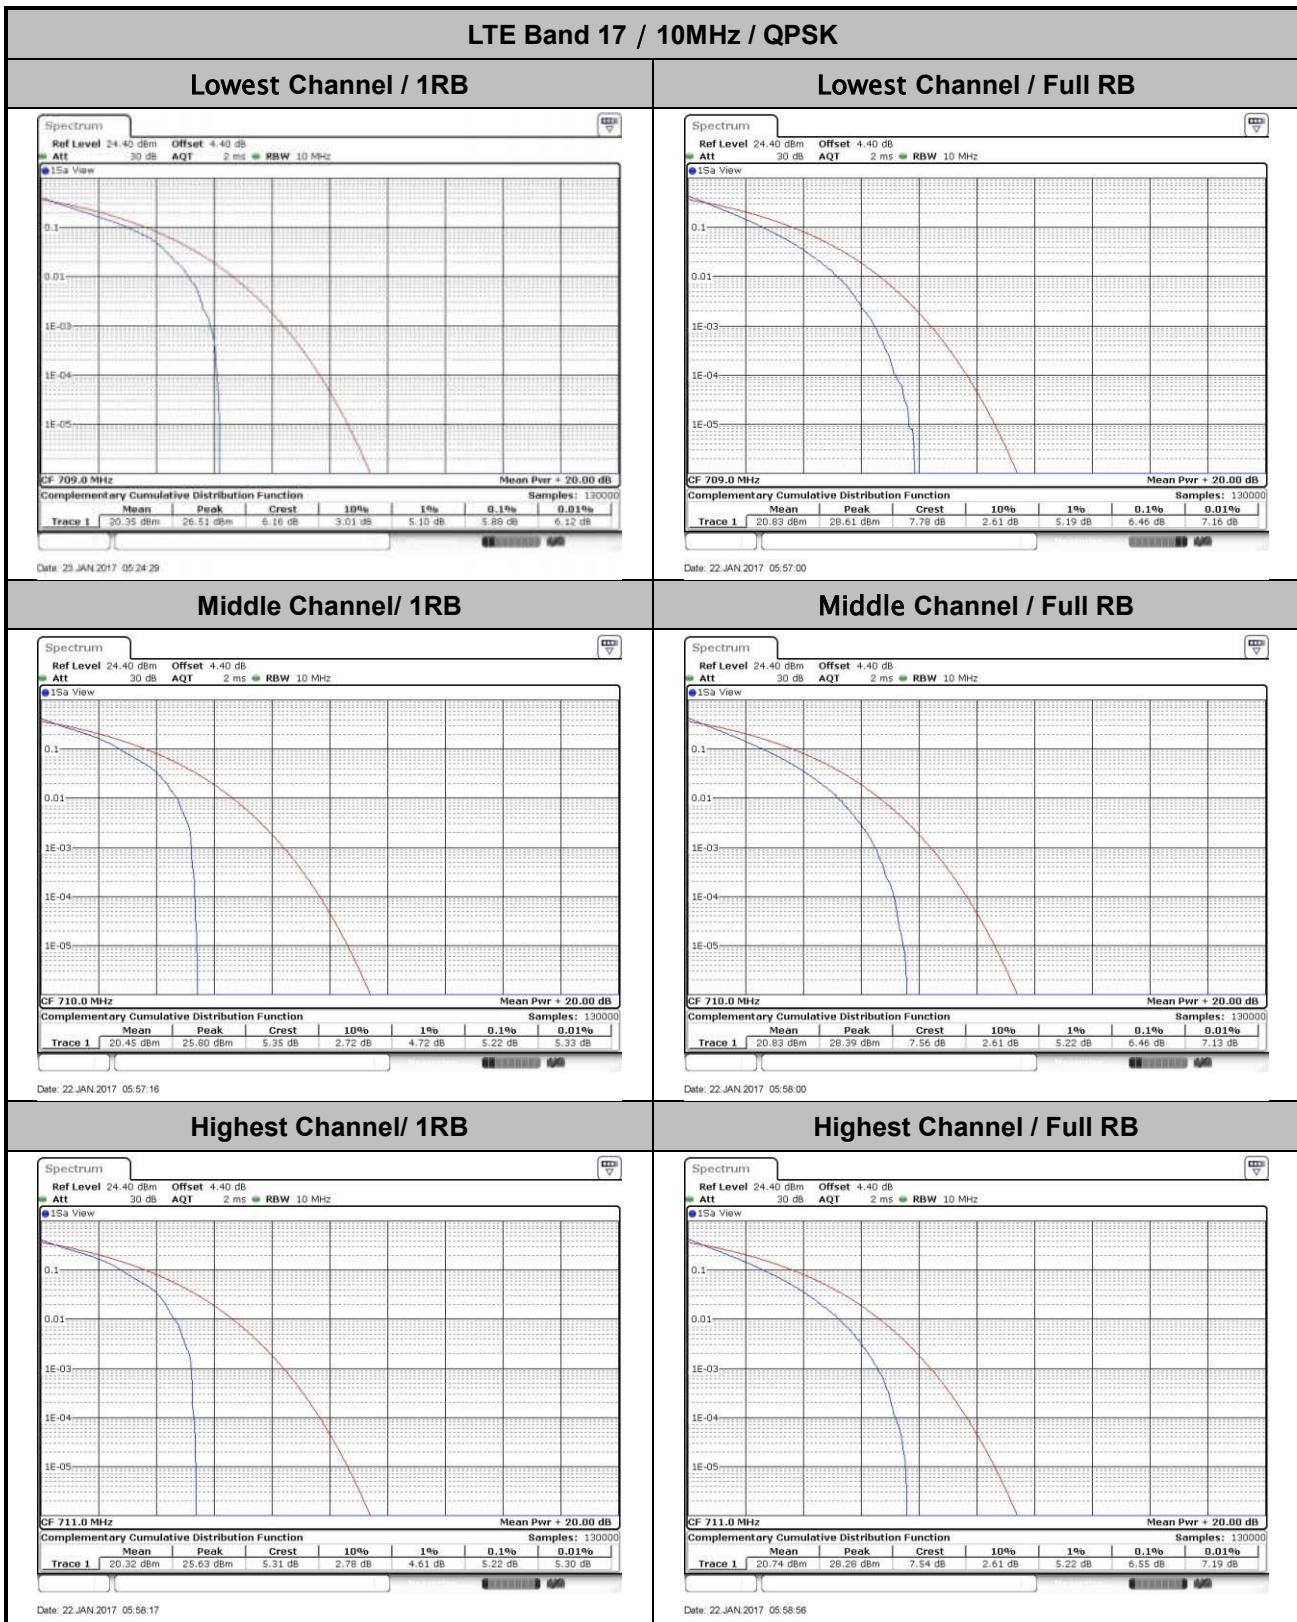

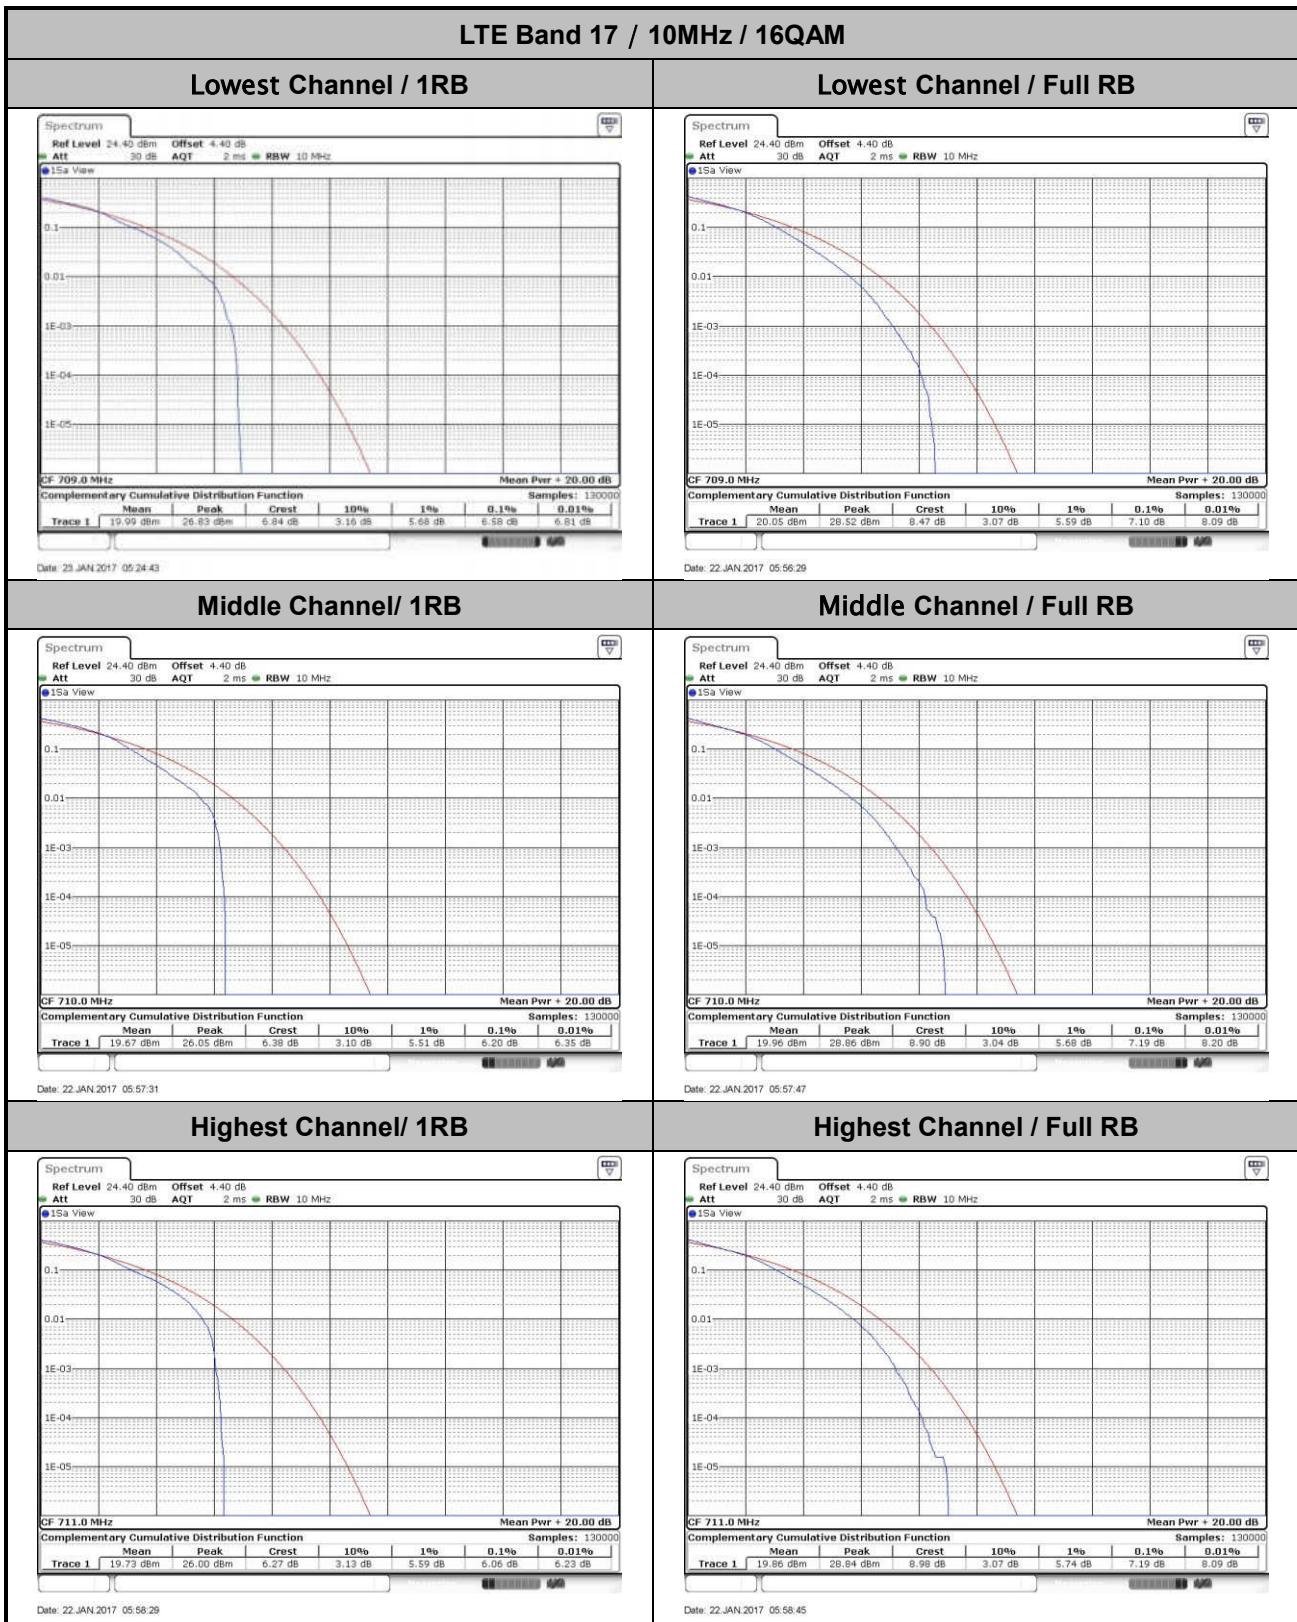

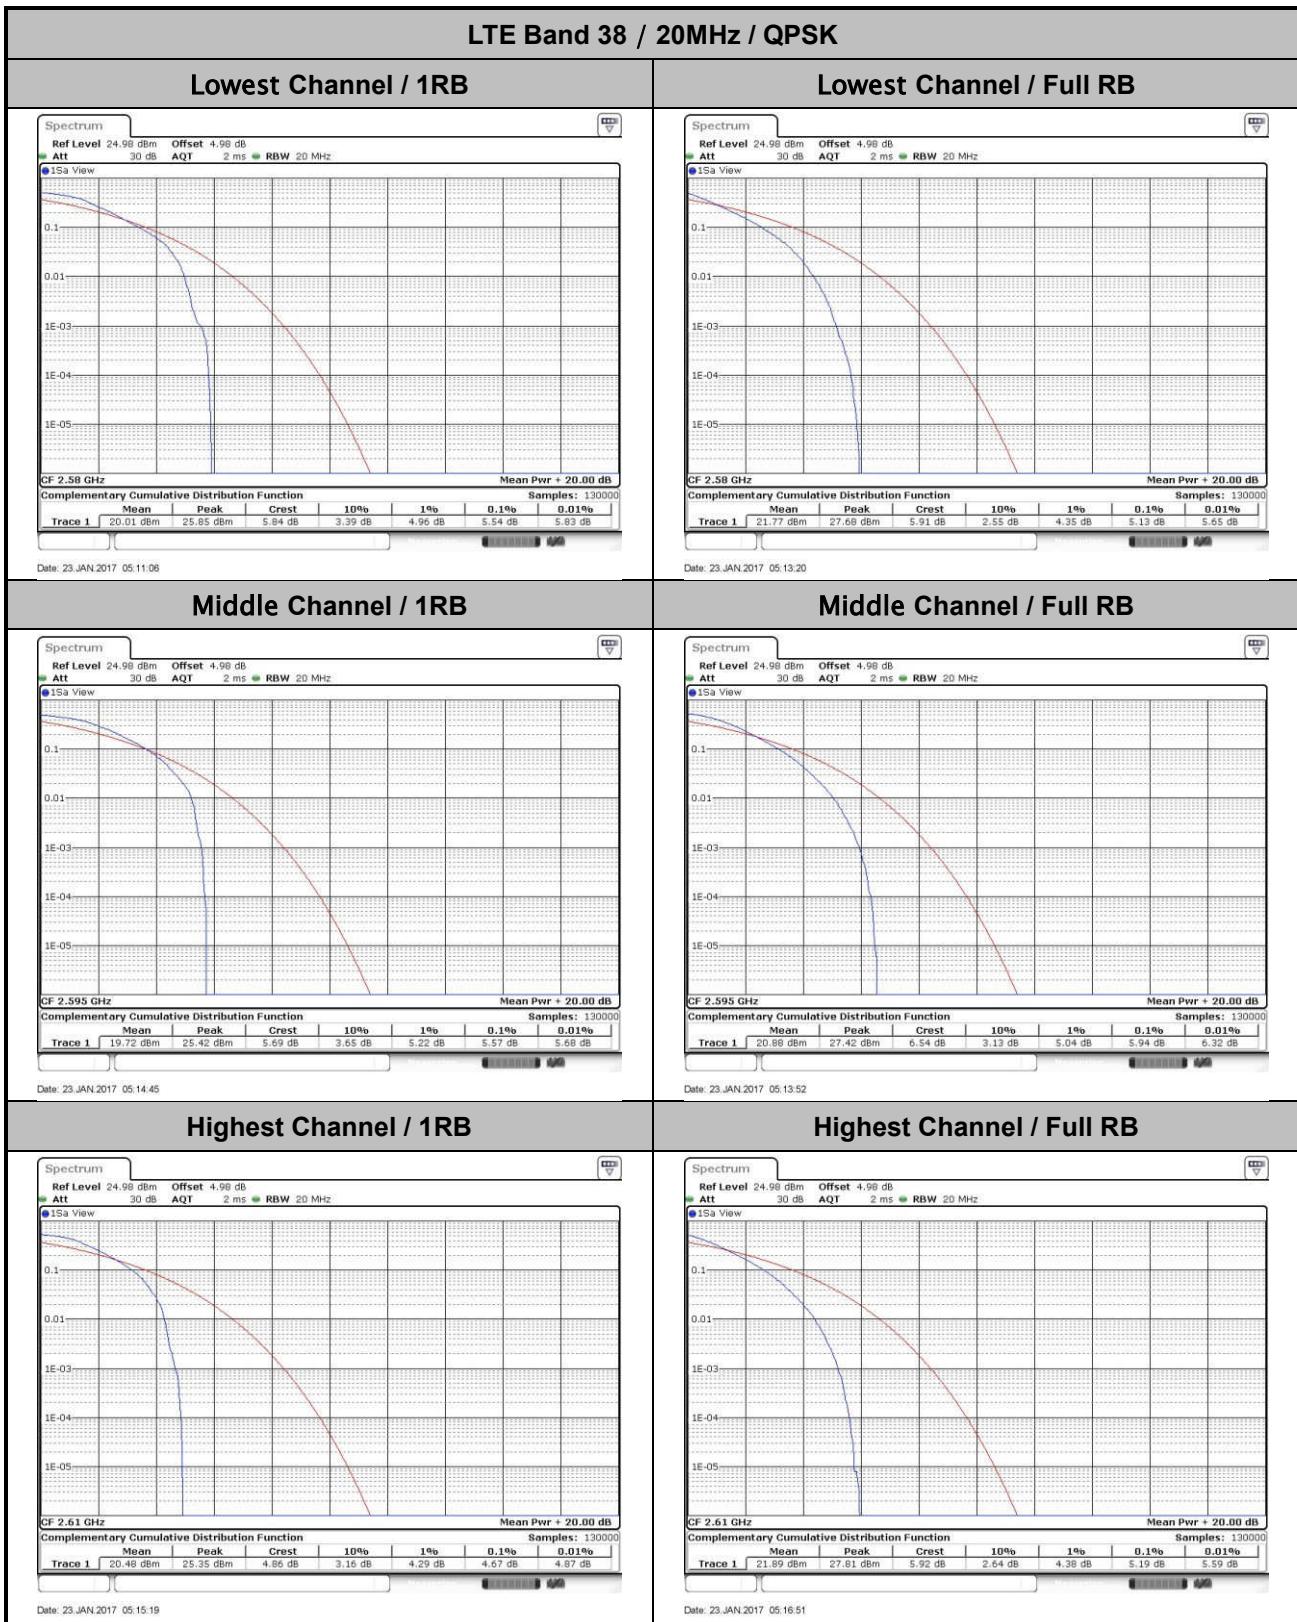

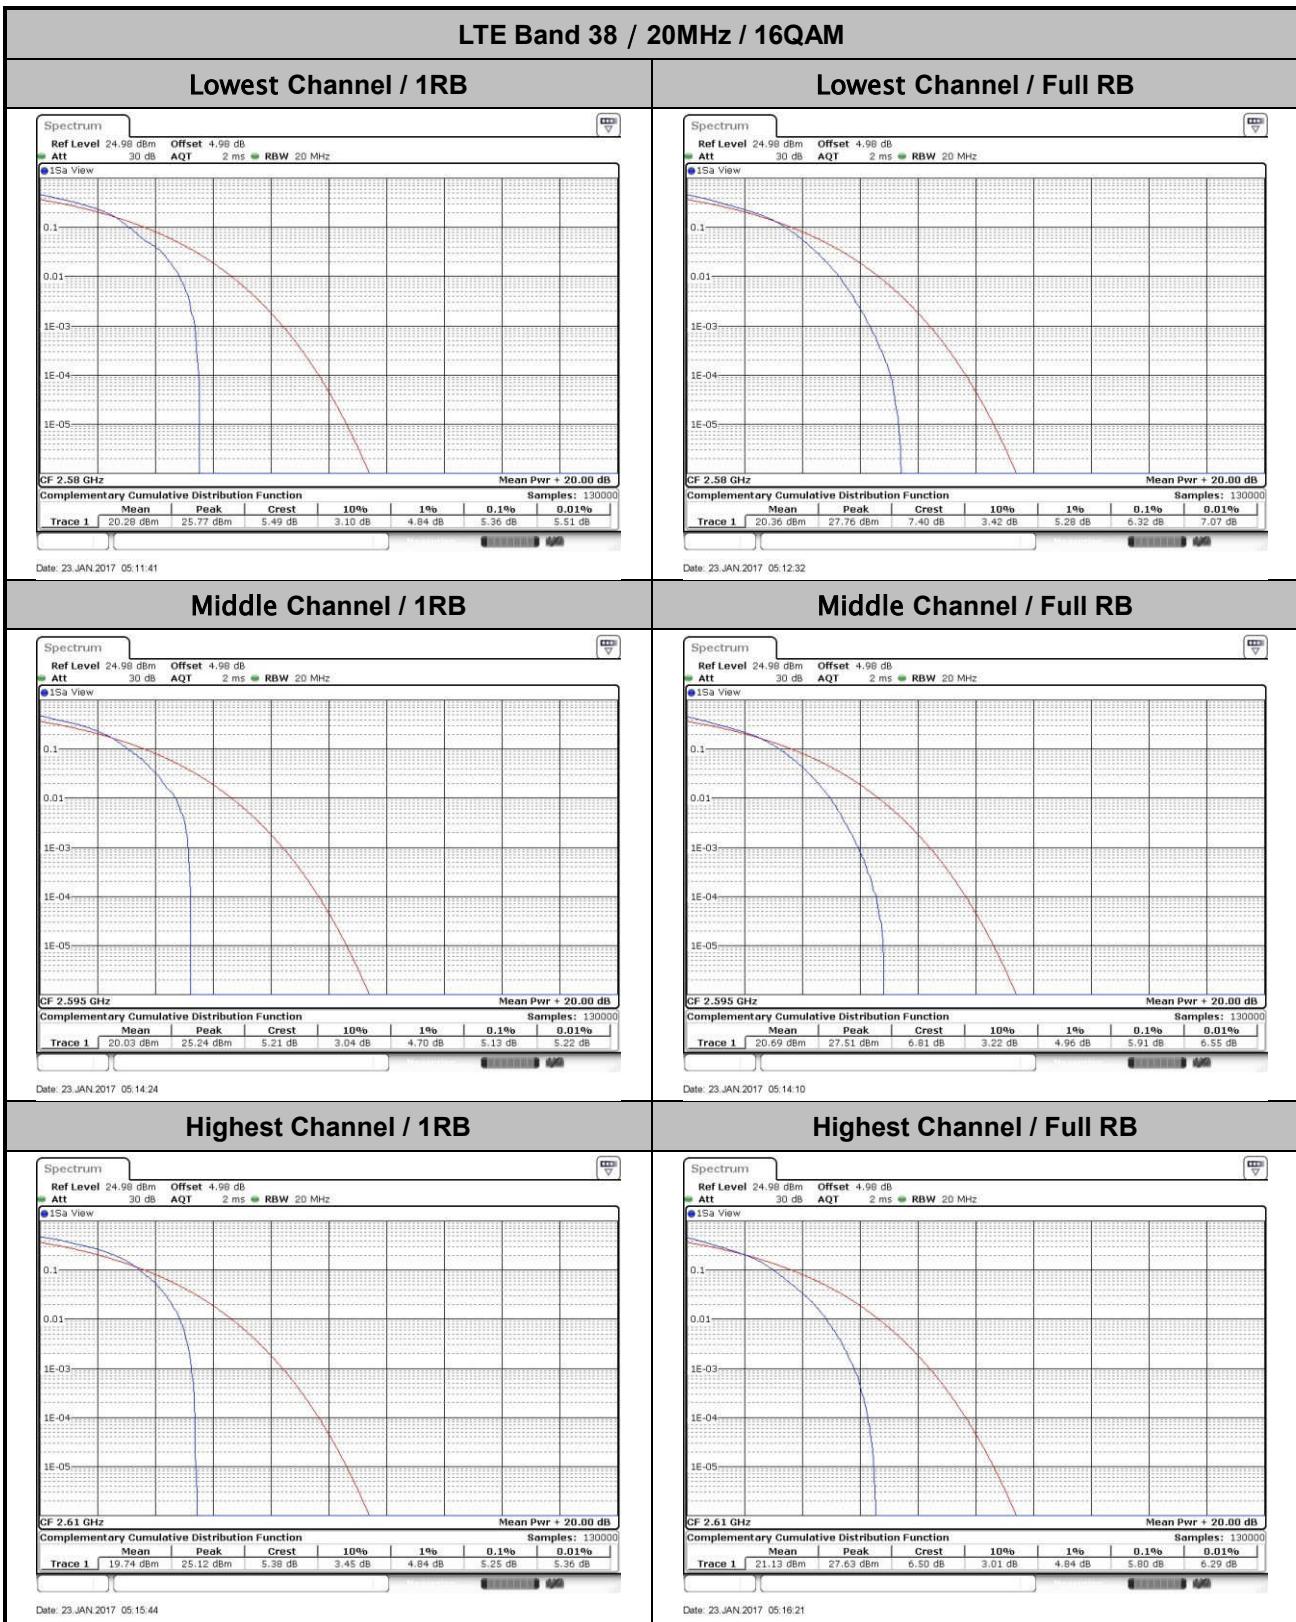

**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.25	3.02	2.96	5.02	4.97	9.71	9.69	14.75	14.51	20.46	20.46
Middle CH	1.26	1.27	3.00	2.98	5.01	4.96	9.77	9.77	14.69	14.45	20.22	20.22
Highest CH	1.26	1.27	3.00	3.01	5.09	5.03	9.93	9.69	14.45	14.54	20.06	20.10

Mode	LTE Band 4 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.24	1.27	2.99	2.99	4.95	4.92	9.83	9.83	14.45	14.63	20.46	20.10
Middle CH	1.25	1.27	2.99	3.01	4.97	4.99	10.09	9.71	14.30	14.33	20.22	20.30
Highest CH	1.26	1.26	2.99	3.01	4.86	4.98	10.09	9.79	14.36	14.45	20.26	20.26

Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.95	5.03	9.81	9.85	14.69	14.24	20.10	20.22
Middle CH	-	-	-	-	5.04	4.98	9.91	9.91	14.51	14.48	20.30	20.10
Highest CH	-	-	-	-	4.89	4.98	9.87	9.81	14.54	14.63	20.22	20.42

Mode	LTE Band 12 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.26	1.28	2.97	3.00	4.94	4.97	9.65	9.89	-	-	-	-
Middle CH	1.26	1.29	3.03	2.97	5.11	5.02	9.91	9.97	-	-	-	-
Highest CH	1.27	1.25	3.01	3.00	5.05	4.86	9.91	10.01	-	-	-	-



Mode	LTE Band 17 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.96	4.98	9.91	9.85	-	-	-	-
Middle CH	-	-	-	-	5.01	5.04	9.71	10.01	-	-	-	-
Highest CH	-	-	-	-	5.10	5.00	9.93	9.97	-	-	-	-

Mode	LTE Band 38 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.95	4.83	9.77	9.77	14.21	14.57	20.14	20.18
Middle CH	-	-	-	-	4.81	4.86	9.65	9.71	14.39	14.33	20.26	20.10
Highest CH	-	-	-	-	5.02	4.99	9.67	9.61	14.15	14.54	20.14	20.14

