FCC RF Test Report

APPLICANT: FIH International Co., Ltd.

EQUIPMENT: GSM/WCDMA/LTE Mobile Phone

BRAND NAME : Nokia MODEL NAME : TA-1071

FCC ID : 2AJOTTA-1071

STANDARD : FCC 47 CFR Part 2, 22(H)

CLASSIFICATION: Licensed Non-Broadcast Transmitter Held to Ear

(TNE)

The product was received on Nov. 14, 2018 and testing was completed on Feb. 05, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI/TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 1 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report No.: FG7N1101-03A

Report Template No.: BU5-FG22 Version 1.2

TABLE OF CONTENTS

RE	VISIO	ON HISTORY	3
SU	MMA	RY OF TEST RESULT	
1	GEN	ERAL DESCRIPTION	Į.
•	1.1	Applicant	
	1.1	Manufacturer	
	1.3	Product Feature of Equipment Under Test	
	1.4	Product Specification of Equipment Under Test	
	1.5	Modification of EUT	
	1.6	Maximum ERP Power, Frequency Tolerance, and Emission Designator	
	1.7	Testing Location	
	1.8	Applicable Standards	
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	
	2.1	Test Mode	
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration	10
	2.4	Measurement Results Explanation Example	10
3	CON	IDUCTED TEST RESULT	11
	3.1	Measuring Instruments	11
	3.2	Test Setup	11
	3.3	Test Result of Conducted Test	11
	3.4	Conducted Output Power and ERP	
	3.5	Peak-to-Average Ratio	
	3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.7	Conducted Band Edge	
	3.8	Conducted Spurious Emission	
	3.9	Frequency Stability	1 <i>i</i>
4		NATED TEST ITEMS	
	4.1	Measuring Instruments	
	4.2	Test Setup	
	4.3	Test Result of Radiated Test	
	4.4	Field Strength of Spurious Radiation Measurement	19
5	LIST	OF MEASURING EQUIPMENT	20
6	UNC	ERTAINTY OF EVALUATION	21
		DIX A. TEST RESULTS OF CONDUCTED TEST	
ΑF	PEND	DIX B. TEST RESULTS OF RADIATED TEST	

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 2 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG7N1101-03A	Rev. 01	Initial issue of report	Feb. 14, 2018

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 3 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

SUMMARY OF TEST RESULT

Report Section	FUCERINA Description		Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.5	N/A	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Band Edge Meas- urement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
4.4	§2.1053 §22.917(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 43.96 dB at 2510.000 MHz

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 4 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

1 General Description

1.1 Applicant

FIH International Co., Ltd.

No.18, Tongji zhonglu, Beijing Economic&Technological Development Area

1.2 Manufacturer

HMD Global Oy

Karaportti 2 02610 Espoo FINLAND

1.3 Product Feature of Equipment Under Test

Product Feature					
Equipment	GSM/WCDMA/LTE Mobile Phone				
Brand Name	Nokia				
Model Name	TA-1071				
FCC ID	2AJOTTA-1071				
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+ (16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE				
HW Version	HW0241				
SW Version	0.1803.11.03				
EUT Stage	Identical Prototype				

Report No.: FG7N1101-03A

Remark:

- **1.** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- 2. This is a variant report for TA-1071, the difference between TA-1048(FCC ID: 2AJOTTA-1048) and TA-1071(FCC ID: 2AJOTTA-1071) is change dual SIM card to single SIM card. According to the change, only the worst cases were verified, all the other test results were leveraged from original report which can be referred to Sporton Report Number FG7N1101-02A for model TA-1048.

 Sporton International (Kunshan) Inc.
 Page Number
 : 5 of 21

 TEL: +86-512-57900158
 Report Issued Date
 : Feb. 14, 2018

 FAX: +86-512-57900958
 Report Version
 : Rev. 01

FCC ID : 2AJOTTA-1071 Report Template No.: BU5-FG22 Version 1.2

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification						
Ty Fraguency	WCDMA:					
Tx Frequency	Band V: 826.4 MHz ~ 846.6 MHz					
Dy Fraguency	WCDMA:					
Rx Frequency	Band V: 871.4 MHz ~ 891.6 MHz					
Maximum Output Dawar to Antonno	WCDMA:					
Maximum Output Power to Antenna	Band V: 23.56 dBm					
Antenna Type	PIFA Antenna					
Antenna Gain	Cellular Band: 0.5 dBi					
	WCDMA: BPSK (Uplink)					
Type of Modulation	HSPA: QPSK (Uplink)					
l ypo or modulation	HSPA+ : 16QAM (16QAM uplink is not supported)					
	DC-HSDPA: 64QAM					

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 6 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

1.6 Maximum ERP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Mod- ulation	Maximum ERP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	WCDMA Band V RMC 12.2Kbps	BPSK	0.1552	0.0239 ppm	4M13F9W

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 7 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No is CN5013.

Test Site	Sporton International	Sporton International (Kunshan) Inc.				
T(0)/- 1/	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China					
Test Site Location	TEL: +86-512-57900158 FAX: +86-512-57900958					
Took Cita No	Sporton	Site No.	FCC Test Firm Registration No.			
Test Site No.	TH01-KS	03CH03-KS	630927			

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H)
- ANSI/TIA-603-E
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 8 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for WCDMA Band V.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes							
Band Radiated TCs Conducted TCs							
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					

Sporton International (Kunshan) Inc. TEL: +86-512-57900158

FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 9 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

2.2 Connection Diagram of Test System

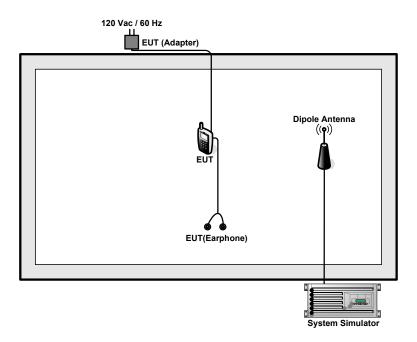

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.1 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.1 + 10 = 14.1 (dB)

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 10 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2


3 **Conducted Test Result**

Measuring Instruments 3.1


See list of measuring instruments of this test report.

3.2 **Test Setup**

3.2.1 **Conducted Output Power**



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and **Conducted Spurious Emission**

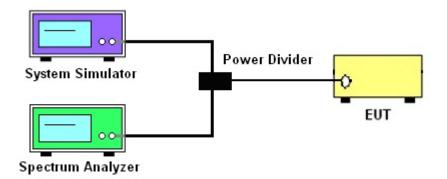

3.2.3 Frequency Stability



3.3 **Test Result of Conducted Test**

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071

Page Number : 11 of 21 Report Issued Date: Feb. 14, 2018 : Rev. 01 Report Version

Report Template No.: BU5-FG22 Version 1.2

3.4 Conducted Output Power and ERP

3.4.1 Description of the Conducted Output Power and ERP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V.

According to KDB 412172 D01 Power Approach,

EIRP = P_T + G_T – L_C , ERP = EIRP -2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

 L_{C} = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

Page Number : 12 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 13 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v03 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
 (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - =P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 15 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

Page Number : 16 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

Page Number : 17 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

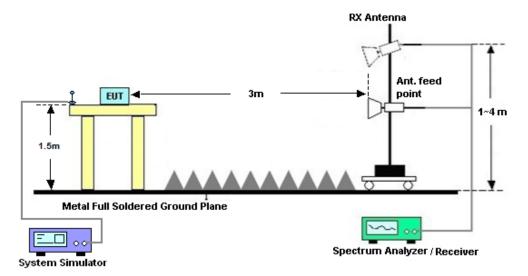

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 18 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v03 Section 5.8 and ANSI/TIA-603-E Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12.ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

```
= P(W) - [43 + 10log(P)] (dB)
```

= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)

= -13dBm.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Jan. 12, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Radio commu- nication ana- lyzer	Anritsu	MT8820C	6201300652	2G/3G/LTE_ full band	Aug. 08, 2017	Jan. 12, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	HZ014011440	-40~+150°C 20%~95%RH	Apr. 18, 2017	Jan. 12, 2018	Apr. 17, 2018	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Feb. 05, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Feb. 05, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Feb. 05, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Feb. 05, 2018	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr. 18, 2017	Feb. 05, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
high gain Am- plifier	MITEQ	AMF-7D-00 101800-30-1	2025788	1GHz~18GHz	Apr. 18, 2017	Feb. 05, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18GHz~40GHz	Oct. 12, 2017	Feb. 05, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 05, 2018	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 05, 2018	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 05, 2018	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 20 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confi-	2.8dB
dence of 95% (U = 2Uc(y))	2.0UB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (II = 2Uc(v))	3.3dB
dence of 95% (U = 2Uc(y))	

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : 21 of 21
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V					
Channel	4132	4182	4233			
Frequency	826.4	836.4	846.6			
AMR 12.2Kbps	23.46	23.55	23.50			
RMC 12.2Kbps	23.47	23.56	23.52			
HSDPA Subtest-1	22.45	22.35	22.45			
HSDPA Subtest-2	22.55	22.39	22.54			
HSDPA Subtest-3	22.09	21.56	22.06			
HSDPA Subtest-4	22.08	21.90	22.07			
DC-HSDPA Subtest-1	22.48	22.34	22.46			
DC-HSDPA Subtest-2	22.51	23.48	22.18			
DC-HSDPA Subtest-3	22.02	21.92	21.88			
DC-HSDPA Subtest-4	22.06	21.88	21.97			
HSUPA Subtest-1	22.29	21.88	22.14			
HSUPA Subtest-2	21.42	21.35	21.16			
HSUPA Subtest-3	21.41	21.35	21.11			
HSUPA Subtest-4	21.50	21.87	21.46			
HSUPA Subtest-5	22.12	22.20	22.12			

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A1 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2



WCDMA Band V (G _T - L _{C=} 0.5 dB)					
Channel	4132	4182	4233		
	(Low)	(Mid)	(High)		
Frequency	826.4	836.4	846.6		
(MHz)	020.4	030.4			
Conducted Power (dBm)	23.47	23.56	23.52		
Conducted Power (Watts)	0.2223	0.2270	0.2249		
ERP(dBm)	21.82	21.91	21.87		
ERP(Watts)	0.1521	0.1552	0.1538		

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A2 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2


Peak-to-Average Ratio

Mode	WCDMA Band V	Limit: 13dB
Mod.	RMC 12.2Kbps	Result
Lowest CH	3.13	
Middle CH	3.10	PASS
Highest CH	3.16	

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A3 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

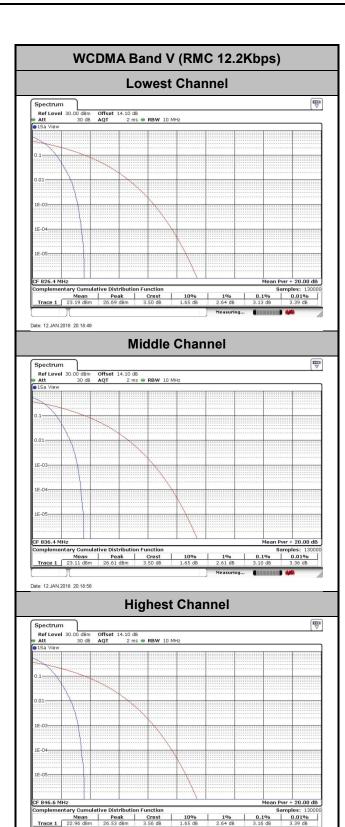

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A4 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

26dB Bandwidth

Mode	WCDMA Band V
Mod.	RMC 12.2Kbps
Lowest CH	4.71
Middle CH	4.72
Highest CH	4.71

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A5 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2



TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A6 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

Occupied Bandwidth

Mode	WCDMA Band V
Mod.	RMC 12.2Kbps
Lowest CH	4.12
Middle CH	4.13
Highest CH	4.11

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A7 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2




Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A8 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

Conducted Band Edge

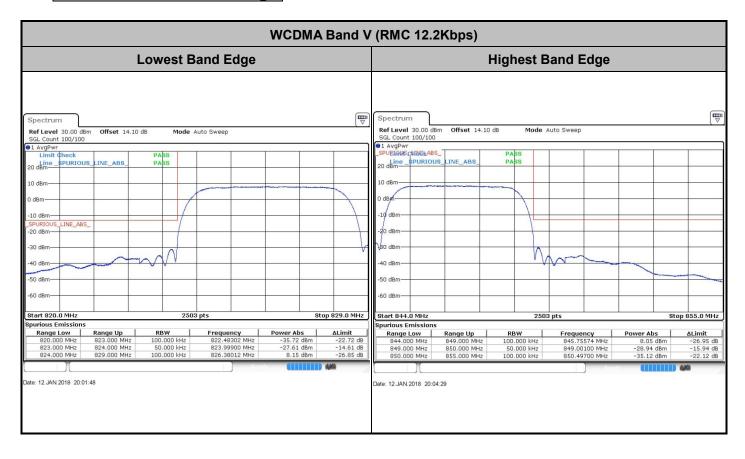


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A9 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

Conducted Spurious Emission

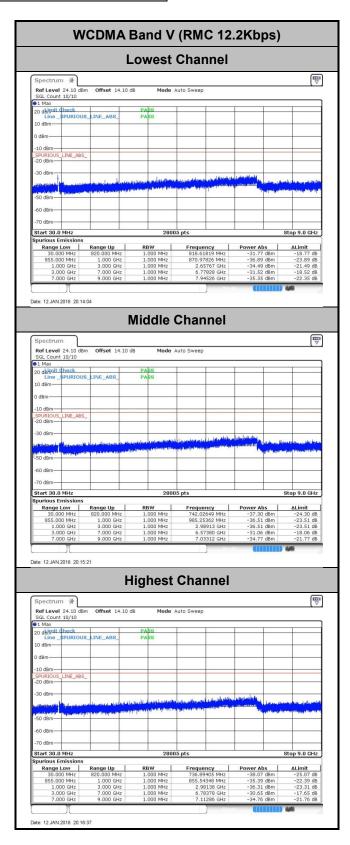

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A10 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0096	
0	Normal Voltage	0.0155	
-10	Normal Voltage	0.0120	PASS
-20	Normal Voltage	0.0155	
-30	Normal Voltage	0.0191	
20	Maximum Voltage	0.0036	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0239	

Note: Normal Voltage = 3.8 V. ; Battery End Point (BEP) = 3.45 V. ; Maximum Voltage = 4.2 V

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : A11 of A11
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-61.96	-13	-48.96	-67.05	-63.87	1.14	5.20	Н
	2510	-56.96	-13	-43.96	-68.07	-59.59	1.12	5.90	Н
	3345	-61.24	-13	-48.24	-71.21	-64.45	1.34	6.70	Н
	1672	-62.08	-13	-49.08	-67.41	-63.99	1.14	5.20	V
	2510	-58.46	-13	-45.46	-68.12	-61.09	1.12	5.90	V
	3345	-60.60	-13	-47.60	-70.73	-63.81	1.34	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AJOTTA-1071 Page Number : B1 of B1
Report Issued Date : Feb. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22 Version 1.2