

FCC Test Report

(PART 27)

Report No.: RF180626C09-3

FCC ID: 2AJOTTA-1085

Test Model: TA-1085

Received Date: Jun. 26, 2018

Test Date: Jul. 02, 2018 ~ Jul. 20, 2018

Issued Date: Jul. 31, 2018

Applicant: HMD Global Oy

Address: Karaportti 2, 02610 Espoo, Finland

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City

33383, Taiwan (R.O.C)

Test Location (2): No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan,

R.O.C

FCC Registration /

427177 / TW0011

Designation Number:





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies



Table of Contents

Re	eleas	e Control Record	4
1	Cer	tificate of Conformity	5
2	Sun	nmary of Test Results	. 6
	2.1	Measurement Uncertainty	6
		Test Site and Instruments	
3	Gen	neral Information	9
	3 1	General Description of EUT	q
		Configuration of System under Test	
		3.2.1 Description of Support Units	
		Test Mode Applicability and Tested Channel Detail	
		EUT Operating Conditions	
		General Description of Applied Standards	
4	Test	t Types and Results	14
	4.1	Output Power Measurement	14
		4.1.1 Limits of Output Power Measurement	
		4.1.2 Test Procedures	14
		4.1.3 Test Setup	
		4.1.4 Test Results	
	4.2	Modulation Characteristics Measurement	
		4.2.1 Limits of Modulation Characteristics	
		4.2.3 Test Procedure	
		4.2.4 Test Results	
	4.3	Frequency Stability Measurement	
		4.3.1 Limits of Frequency Stability Measurement	
		4.3.2 Test Procedure	25
		4.3.3 Test Setup	
		4.3.4 Test Results	
	4.4	Occupied Bandwidth Measurement	
		4.4.1 Limits of Occupied Bandwidth Measurement	
		4.4.3 Test Setup	
		4.4.4 Test Results	
	4.5	Out-of-Band Emissions Measurement	
		4.5.1 Limits of Out-of-Band Emissions Measurement	
		4.5.2 Test Setup	
		4.5.3 Test Procedures	
	4.0	4.5.4 Test Results	
	4.6	Peak to Average Ratio	
		4.6.1 Limits of Peak to Average Ratio Measurement	
		4.6.3 Test Procedures	
		4.6.4 Test Results	
	4.7	Conducted Spurious Emissions	
		4.7.1 Limits of Conducted Spurious Emissions Measurement	
		4.7.2 Test Setup	
		4.7.3 Test Procedure	
	4.0	4.7.4 Test Results	
	4.8	Radiated Emission Measurement	
		4.8.2 Test Procedure	
		4.8.3 Deviation from Test Standard	
		4.8.4 Test Setup	
		·	



4.8.5	5 Test Results			 	88
5 Pictures	of Test Arrangemen	ts		 	118
Appendix -	Information on the	Testing Laborator	ries	 	119



Release Control Record

Issue No.	Description	Date Issued
RF180626C09-3	Original Release	Jul. 31, 2018



1 Certificate of Conformity

Product: Smart Phone

Brand: NOKIA

Test Model: TA-1085

Sample Status: Engineering Sample

Applicant: HMD Global Oy

Test Date: Jul. 02, 2018 ~ Jul. 20, 2018

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Ivonne Wu / Supervisor

Dylan Chiou / Project Engineer



2 Summary of Test Results

	Applied Standard: FCC Part 27 & Part 2							
FCC Clause	Test Item	Result	Remarks					
2.1046 27.50(h)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.					
2.1047	Modulation Characteristics	Pass	Meet the requirement.					
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.					
2.1049	2.1049 Occupied Bandwidth		Meet the requirement of limit.					
	Peak to Average Ratio		Meet the requirement of limit.					
2.1051 27.53(I)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.					
2.1051 27.53(m)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.					
2.1053 27.53(m)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -2.49 dB at 10380.00 MHz.					

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
Radiated Emissions up to 1 GHZ	200 MHz ~ 1000 MHz	2.0224 dB
Redicted Emissions above 4 CUI-	1 GHz ~ 18 GHz	1.0121 dB
Radiated Emissions above 1 GHz	18 GHz ~ 40 GHz	1.1508 dB



2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
HORN Antenna Schwarzbeck	BBHA 9120D	9120D-969	Dec. 12, 2017	Dec. 11, 2018
Fixed Attenuator Woken	00801A1GGAM02Y	NA	May 17, 2018	May 16, 2019
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier Agilent	310N	187226	Jun. 19, 2018	Jun. 18, 2019
Preamplifier Agilent	83017A	MY39501357	Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RF C-SMS-100-SMS- 120+RFC-SMS-1 00-SMS-400)	Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RF C-SMS-100-SMS- 24)	Jun. 19, 2018	Jun. 18, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 28, 2017	Dec. 27, 2018
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2019



Note:	The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA. The test was performed in HsinTien Chamber 1. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.	
	4.	The IC Site Registration No. is IC7450I-1.



3 General Information

3.1 General Description of EUT

Product	Smart Phone				
Brand	NOKIA				
Test Model	TA-1085				
Status of EUT	Engineering Sample				
	5.0 Vdc or 9 Vdc or 12 Vdc (adapter)				
Power Supply Rating	5.0 Vdc (host equipment)				
	3.85 Vdc (Li-ion battery)				
Modulation Type	QPSK, 16QAM				
	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz			
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz			
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz			
Francisco Dange	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz			
Frequency Range	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz			
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz			
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz			
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz			
	LTE Band 7 (Channel Bandwidth: 5 MHz)	179.35 mW			
	LTE Band 7 (Channel Bandwidth: 10 MHz)	180.59 mW			
	LTE Band 7 (Channel Bandwidth: 15 MHz)	181.84 mW			
May FIDD Dawer	LTE Band 7 (Channel Bandwidth: 20 MHz) 183.53 mW				
Max. EIRP Power	LTE Band 38 (Channel Bandwidth: 5 MHz)	199.43 mW			
	LTE Band 38 (Channel Bandwidth: 10 MHz)	200.96 mW			
	LTE Band 38 (Channel Bandwidth: 15 MHz)	202.67 mW			
	LTE Band 38 (Channel Bandwidth: 20 MHz)	204.17 mW			
	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M50W7D			
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M97W7D			
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M5G7D			
Further Buston (co.	LTE Band 7 (Channel Bandwidth: 20 MHz)	17M9W7D			
Emission Designator	LTE Band 38 (Channel Bandwidth: 5 MHz)	4M49W7D			
	LTE Band 38 (Channel Bandwidth: 10 MHz)	8M97W7D			
	LTE Band 38 (Channel Bandwidth: 15 MHz)	13M5G7D			
	LTE Band 38 (Channel Bandwidth: 20 MHz)	17M9G7D			
Automo Torri	LTE Band 7: PIFA Antenna with -0.04 dBi ga	ain			
Antenna Type	LTE Band 38: PIFA Antenna with -0.26 dBi gain				
Accessory Device					
Data Cable Supplied	Refer to Note as below				



Note:


1. There're 2 configurations for the EUT listed as below.

Main Sample: EUT + Battery 1 2nd Sample: EUT + Battery 2


- ♦ Only the worst test data was presented in the report.
- 2. The EUT's accessories list refers to Ext. Pho.
- 3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

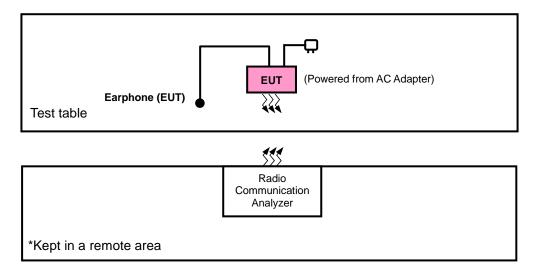

<E.I.R.P. Test>

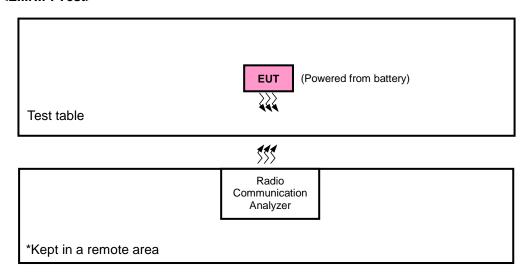

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.



3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

EUT Configure Mode	Description
Α	Main Sample
В	2 nd Sample

SIM	Band	EIRP	Radiated Emission
4	LTE Band 7	Z-plane	Z-axis
'	LTE Band 38	X-plane	Z-axis

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
		20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
_	EIRP	20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
Α	EIRP	20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
Α	Modulation Characteristics	20850 to 21350	21100	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20775 to 21425	20775, 21425	5 MHz	QPSK	1 RB / 0 RB Offset
_	Frequency	20800 to 21400	20800, 21400	10 MHz	QPSK	1 RB / 0 RB Offset
А	Stability	20825 to 21375	20825, 21375	15 MHz	QPSK	1 RB / 0 RB Offset
	-	20850 to 21350	20850, 21350	20 MHz	QPSK	1 RB / 0 RB Offset
		20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
Α	Occupied Bandwidth	20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
		20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
А	Peak to	20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
^	Average Ratio	20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
_	Out-of-Band	20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
Α	Emissions	20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
		20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 0 RB Offset
Α	Conducted	20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 0 RB Offset
^	Emission	20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 0 RB Offset
А	Radiated	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 0 RB Offset
^	Emission	20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
		37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
^		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	EIRP	37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
В		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
Α	Modulation Characteristics	37850 to 38150	38000	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		37775 to 38225	37775, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
Α	Frequency	37800 to 38200	37800, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
_ ^	Stability	37825 to 38175	37825, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
	Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
Α		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
А		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
		37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
Α	Peak to	37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	Average Ratio	37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37775 to 38225	37775, 38225	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
^	Out-of-Band	37800 to 38200	37800, 38200	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
Α	Emissions	37825 to 38175	37825, 38175	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
		37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
Α	Conducted	37800 to 38200	37800, 38000, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
A	Emission	37825 to 38175	37825, 38000, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
Α	Dealists d	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
A	Radiated Emission	37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
В	LIIII33IOII	37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Condition.			
Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	3.85 Vdc	Karl Lee
Modulation Characteristics	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Out-of-Band Emissions	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee / Harry Hsueh



3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2 FCC 47 CFR Part 27 KDB 971168 D01 Power Meas License Digital Systems v03r01 ANSI/TIA/EIA-603-E 2016 ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.



4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that "User stations are limited to 2 watts" and 27.50(i) specific that "Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage."

4.1.2 Test Procedures

EIRP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn.

Conducted Power Measurement:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

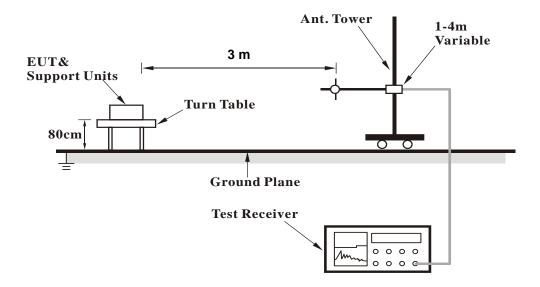

<Radiated Emission above 1 GHz>

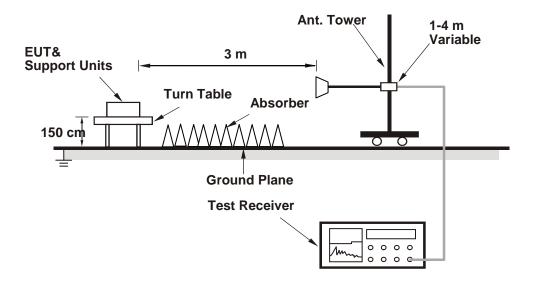

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:





4.1.4 Test Results

Conducted Output Power (dBm)

							LTE B	and 7							
BW	MCS	RB Size	RB Offset	Low	Mid	High	3GPP MPR	BW	MCS	RB Size	RB Offset	Low	Mid	High	3GPP MPR
DVV	Index	Cha		20850	21100	21350	(dB)	DVV	Index		nnel	20825	21100	21375	(dB)
		Frequen	cy (MHz)	2510.0	2535.0	2560.0	(GD)			Frequen	cy (MHz)	2507.5	2535.0	2562.5	(ub)
		1	0	22.54	22.58	22.41	0			1	0	22.42	22.46	22.29	0
		1	50	22.47	22.51	22.34	0		QPSK	1	37	22.35	22.39	22.22	0
		1	99	22.45	22.49	22.32	0			1	74	22.33	22.37	22.20	0
	QPSK	50	0	21.62	21.66	21.49	1			36	0	21.50	21.54	21.37	1
		50	25	21.61	21.65	21.48	1			36	19	21.49	21.53	21.36	1
		50	50	21.59	21.63	21.46	1			36	39	21.47	21.51	21.34	1
20M		100	0	21.60	21.64	21.47	1	15M		75	0	21.48	21.52	21.35	1
ZUIVI		1	0	21.48	21.52	21.35	1	TOW		1	0	21.36	21.40	21.23	1
		1	50	21.41	21.45	21.28	1			1	37	21.29	21.33	21.16	1
	16QAM	1	99	21.39	21.43	21.26	2		1	74	21.27	21.31	21.14	1	
		50	0	20.56	20.60	20.43		16QAM	36	0	20.44	20.48	20.31	2	
		50	25	20.55	20.59	20.42			36	19	20.43	20.47	20.30	2	
		50	50	20.53	20.57	20.40	2			36	39	20.41	20.45	20.28	2
	•	100	0	20.54	20.58	20.41	2			75	0	20.42	20.46	20.29	2
D.W.	MCS	RB Size	RB Offset	Low	Mid	High	3GPP	D 147	MCS	RB Size	RB Offset	Low	Mid	High	3GPP
BW	Index	Cha	nnel	20800	21100	21400	MPR (dB)	BW	Index	Cha	nnel	20775	21100	21425	MPR (dB)
		Frequen	cy (MHz)	2505.0	2535.0	2565.0	(ab)			Frequen	cy (MHz)	2502.5	2535.0	2567.5	(ab)
		1	0	22.33	22.37	22.20	0			1	0	22.19	22.23	22.06	0
		1	24	22.26	22.30	22.13	0			1	12	22.12	22.16	21.99	0
		1	49	22.24	22.28	22.11	0			1	24	22.10	22.14	21.97	0
	QPSK	25	0	21.41	21.45	21.28	1		QPSK	12	0	21.27	21.31	21.14	1
		25	12	21.40	21.44	21.27	1			12	6	21.26	21.30	21.13	1
		25	25	21.38	21.42	21.25	1			12	13	21.24	21.28	21.11	1
			_	04.00	04.40	21.26	1			25	0	21.25	21.29	21.12	1
		50	0	21.39	21.43	21.20									
10M		50 1	0				1	5M		1	0		21.17	21.00	1
10M				21.27	21.31	21.14	1	5M		1		21.13	21.17	21.00	1
10M		1	0					5M		-	0 12 24		21.17 21.10 21.08	21.00 20.93 20.91	
10M	16QAM	1 1 1	0 24	21.27 21.20	21.31 21.24	21.14 21.07	1	5M	16QAM	1	12	21.13 21.06	21.10	20.93	1
10M	16QAM	1 1 1 25	0 24 49	21.27 21.20 21.18	21.31 21.24 21.22	21.14 21.07 21.05	1 1	5M	16QAM	1	12 24	21.13 21.06 21.04	21.10 21.08	20.93 20.91	1
10M	16QAM	1 1 1	0 24 49 0	21.27 21.20 21.18 20.35	21.31 21.24 21.22 20.39	21.14 21.07 21.05 20.22	1 1 2	5M	16QAM	1 1 12	12 24 0	21.13 21.06 21.04 20.21	21.10 21.08 20.25	20.93 20.91 20.08	1 1 2



							LTE B	and 38							
BW	MCS	RB Size	RB Offset	Low	Mid	High	3GPP	BW	MCS	RB Size	RB Offset	Low	Mid	High	3GPP
BW	Index	Cha	nnel	37850	38000	38150	MPR (dB)	BW	Index	Cha	nnel	37825	38000	38175	MPR
		Frequen	cy (MHz)	2580.0	2595.0	2610.0	(ab)			Frequen	cy (MHz)	2577.5	2595.0	2612.5	(dB)
		1	0	22.21	22.19	22.09	0			1	0	22.08	22.06	21.96	0
		1	50	22.18	22.16	22.06	0		QPSK	1	37	22.05	22.03	21.93	0
		1	99	22.14	22.12	22.02	0			1	74	22.01	21.99	21.89	0
	QPSK	50	0	21.20	21.18	21.08	1			36	0	21.07	21.05	20.95	1
		50	25	21.17	21.15	21.05	1			36	19	21.04	21.02	20.92	1
		50	50	21.15	21.13	21.03	1			36	39	21.02	21.00	20.90	1
20M		100	0	21.13	21.11	21.01	1	4514		75	0	21.00	20.98	20.88	1
ZUIVI		1	0	21.19	21.17	21.07	1	15M		1	0	21.06	21.04	20.94	1
		1	50	21.16	21.14	21.04	1			1	37	21.03	21.01	20.91	1
		1	99	21.12	21.10	21.00	1			1	74	20.99	20.97	20.87	1
	16QAM	50	0	20.18	20.16	20.06	2	16QAM	36	0	20.05	20.03	19.93	2	
		50	25	20.15	20.13	20.03			36	19	20.02	20.00	19.90	2	
		50	50	20.13	20.11	20.01			36	39	20.00	19.98	19.88	2	
		100	0	20.11	20.09	19.99	2			75	0	19.98	19.96	19.86	2
BW	MCS	RB Size	RB Offset	Low	Mid	High	3GPP	DW.	MCS	RB Size	RB Offset	Low	Mid	High	3GPP MPR
DVV	Index	Cha	nnel	37800	38000	38200	(dB)	MPR BW	Index	Cha	nnel	37775	38000	38225	(dB)
		Frequen	cy (MHz)	2575.0	2595.0	2615.0	(GB)		Frequen	cy (MHz)	2572.5	2595.0	2617.5	(ub)	
		1	0	22.00	21.98	21.88	0			1	0	21.88	21.86	21.76	0
		1	24	21.97	21.95	21.85	0			1	12	21.85	21.83	21.73	0
		1	49	21.93	21.91	21.81	0			1	24	21.81	21.79	21.69	0
	QPSK	25	0	20.99	20.97	20.87	1		QPSK	12	0	20.87	20.85	20.75	1
		25	12	20.96	20.94	20.84	1			12	6	20.84	20.82	20.72	1
		25	25	20.94	20.92	20.82	1			12	13	20.82	20.80	20.70	1
10M		50	0	20.92	20.90	20.80	1			25	0	20.80	20.78	20.68	1
TOM		1	0	20.98	20.96	20.86	1	5M		1	0	20.86	20.84	20.74	1
		1	24	20.95	20.93	20.83	1			1	12	20.83	20.81	20.71	1
		1	49	20.91	20.89	20.79	1			1	24	20.79	20.77	20.67	1
	16QAM	25	0	19.97	19.95	19.85	2		16QAM	12	0	19.85	19.83	19.73	2
		25	12	19.94	19.92	19.82	2			12	6	19.82	19.80	19.70	2
		25	25	19.92	19.90	19.80	2			12	13	19.80	19.78	19.68	2
		50	0	19.90	19.88	19.78	2			25	0	19.78	19.76	19.66	2



EIRP Power (dBm) Mode A

				LTE Band 7			
			Channel Ba	ndwidth: 5 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	20775	2502.5	-21.77	44.24	22.47	176.52	
	21100	2535.0	-21.66	44.20	22.54	179.35	Н
7	21425	2567.5	-22.30	44.80	22.50	177.87	
Z	20775	2502.5	-27.71	44.19	16.48	44.47	
	21100	2535.0	-27.57	44.09	16.52	44.85	V
	21425	2567.5	-28.01	44.50	16.49	44.56	
			Channel Ba	ndwidth: 5 MHz /	/ 16QAM		
	20775	2502.5	-22.78	44.24	21.46	139.89	
	21100	2535.0	-22.67	44.20	21.53	142.13	Н
_	21425	2567.5	-23.31	44.80	21.49	140.96	
Z	20775	2502.5	-28.71	44.19	15.48	35.33	
	21100	2535.0	-28.59	44.09	15.50	35.47	V
	21425	2567.5	-29.02	44.50	15.48	35.31	

				LTE Band 7			
			Channel Ba	ndwidth: 10 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	20800	2505.0	-21.85	44.34	22.49	177.46	
	21100	2535.0	-21.63	44.20	22.57	180.59	Н
7	21400	2565.0	-22.24	44.72	22.48	177.13	
Z	20800	2505.0	-27.72	44.23	16.51	44.73	
	21100	2535.0	-27.55	44.09	16.54	45.06	V
	21400	2565.0	-27.93	44.41	16.48	44.42	
		(Channel Bar	ndwidth: 10 MHz	/ 16QAM		
	20800	2505.0	-22.86	44.34	21.48	140.64	
	21100	2535.0	-22.64	44.20	21.56	143.12	Н
7	21400	2565.0	-23.26	44.72	21.46	140.06	
Z	20800	2505.0	-28.73	44.23	15.50	35.45	
	21100	2535.0	-28.56	44.09	15.53	35.71	V
	21400	2565.0	-28.95	44.41	15.46	35.12	



				LTE Band 7							
Channel Bandwidth: 15 MHz / QPSK											
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)				
	20825	2507.5	-21.79	44.32	22.53	178.98					
	21100	2535.0	-21.60	44.20	22.60	181.84	Н				
Z	21375	2562.5	-22.34	44.85	22.51	178.16					
	20825	2507.5	-27.44	43.99	16.55	45.21					
	21100	2535.0	-27.51	44.09	16.58	45.48	V				
	21375	2562.5	-27.99	44.51	16.52	44.87					
		(Channel Bar	ndwidth: 15 MHz	/ 16QAM						
	20825	2507.5	-22.80	44.32	21.52	141.84					
	21100	2535.0	-22.60	44.20	21.60	144.44	Н				
Z	21375	2562.5	-23.36	44.85	21.49	140.86					
~	20825	2507.5	-28.45	43.99	15.54	35.83					
	21100	2535.0	-28.52	44.09	15.57	36.04	V				
	21375	2562.5	-29.00	44.51	15.51	35.56					

				LTE Band 7			
			Channel Ba	ndwidth: 20 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	20850.0	2510.0	-21.60	44.16	22.56	180.30	
	21100.0	2535.0	-21.56	44.20	22.64	183.53	Н
Z	21350.0	2560.0	-22.26	44.81	22.55	179.76	
	20850.0	2510.0	-28.20	44.78	16.58	45.50	
	21100.0	2535.0	-27.48	44.09	16.61	45.79	V
	21350.0	2560.0	-28.16	44.72	16.56	45.29	
		(Channel Bar	ndwidth: 20 MHz	/ 16QAM		
	20850.0	2510.0	-22.61	44.16	21.55	142.89	
	21100.0	2535.0	-22.56	44.20	21.64	145.78	Н
Z	21350.0	2560.0	-23.27	44.81	21.54	142.46	
	20850.0	2510.0	-29.21	44.78	15.57	36.06	
	21100.0	2535.0	-28.49	44.09	15.60	36.29	V
	21350.0	2560.0	-29.17	44.72	15.55	35.89	



				LTE Band 38							
Channel Bandwidth: 5 MHz / QPSK											
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)				
	37775	2572.5	-21.24	44.24	23.00	199.43					
	38000	2595.0	-21.24	44.20	22.96	197.56	Н				
l _x	38225	2617.5	-21.88	44.80	22.92	195.93					
^	37775	2572.5	-23.20	44.19	20.99	125.63					
	38000	2595.0	-23.15	44.09	20.94	124.11	V				
	38225	2617.5	-23.59	44.50	20.91	123.28					
			Channel Ba	ndwidth: 5 MHz	/ 16QAM						
	37775	2572.5	-22.26	44.24	21.98	157.69					
	38000	2595.0	-22.24	44.20	21.96	156.93	Н				
X	38225	2617.5	-22.90	44.80	21.90	154.92					
^	37775	2572.5	-24.21	44.19	19.98	99.56					
	38000	2595.0	-24.16	44.09	19.93	98.36	V				
	38225	2617.5	-24.60	44.50	19.90	97.70					

				LTE Band 38			
			Channel Ba	ndwidth: 10 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	37800	2575.0	-21.31	44.34	23.03	200.96	
	38000	2595.0	-21.21	44.20	22.99	198.93	Н
l x	38200	2615.0	-21.78	44.72	22.94	196.92	
_ ^	37800	2575.0	-23.21	44.23	21.02	126.36	
	38000	2595.0	-23.12	44.09	20.97	124.97	V
	38200	2615.0	-23.47	44.41	20.94	124.05	
		(Channel Bar	ndwidth: 10 MHz	/ 16QAM		
	37800	2575.0	-22.31	44.34	22.03	159.62	
	38000	2595.0	-22.22	44.20	21.98	157.65	Н
	38200	2615.0	-22.79	44.72	21.93	156.06	
X	37800	2575.0	-24.23	44.23	20.00	99.91	
	38000	2595.0	-24.14	44.09	19.95	98.81	V
	38200	2615.0	-24.48	44.41	19.93	98.31	



				LTE Band 38			
			Channel Ba	ndwidth: 15 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	37825	2577.5	-21.25	44.32	23.07	202.67	
	38000	2595.0	-21.18	44.20	23.02	200.31	Н
l x	38175	2612.5	-21.88	44.85	22.97	198.06	
_ ^	37825	2577.5	-22.93	43.99	21.06	127.70	
	38000	2595.0	-23.09	44.09	21.00	125.83	V
	38175	2612.5	-23.54	44.51	20.97	125.03	
		(Channel Bar	ndwidth: 15 MHz	/ 16QAM		
	37825	2577.5	-22.26	44.32	22.06	160.62	
	38000	2595.0	-22.19	44.20	22.01	158.74	Н
l _x	38175	2612.5	-22.88	44.85	21.97	157.33	
_ ^	37825	2577.5	-23.94	43.99	20.05	101.20	
	38000	2595.0	-24.10	44.09	19.99	99.72	V
	38175	2612.5	-24.55	44.51	19.96	99.08	

				LTE Band 38			
			Channel Ba	ndwidth: 20 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	37850	2580.0	-21.06	44.16	23.10	204.17	
	38000	2595.0	-21.15	44.20	23.05	201.70	Н
X	38150	2610.0	-21.79	44.81	23.02	200.31	
^	37850	2580.0	-23.70	44.78	21.08	128.23	
	38000	2595.0	-23.05	44.09	21.04	127.00	V
	38150	2610.0	-23.71	44.72	21.01	126.18	
		(Channel Bar	ndwidth: 20 MHz	/ 16QAM		
	37850	2580.0	-22.07	44.16	22.09	161.81	
	38000	2595.0	-22.15	44.20	22.05	160.21	Н
X	38150	2610.0	-22.80	44.81	22.01	158.74	
_ ^	37850	2580.0	-24.71	44.78	20.07	101.62	
	38000	2595.0	-24.05	44.09	20.04	100.88	V
	38150	2610.0	-24.72	44.72	20.00	100.00	



Mode B

				LTE Band 38			
			Channel Ba	ndwidth: 20 MHz	/ QPSK		
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
	37850	2580.0	-21.89	44.16	22.27	168.66	
	38000	2595.0	-21.91	44.20	22.29	169.32	Н
l x	38150	2610.0	-22.51	44.81	22.30	169.71	
_ ^	37850	2580.0	-24.12	44.78	20.66	116.41	
	38000	2595.0	-23.86	44.09	20.23	105.39	V
	38150	2610.0	-23.91	44.72	20.81	120.50	
		(Channel Bar	ndwidth: 20 MHz	/ 16QAM		
	37850	2580.0	-22.89	44.16	21.27	133.97	
	38000	2595.0	-22.87	44.20	21.33	135.74	Н
l x	38150	2610.0	-23.75	44.81	21.06	127.56	
^	37850	2580.0	-25.21	44.78	19.57	90.57	
	38000	2595.0	-24.96	44.09	19.13	81.81	V
	38150	2610.0	-25.01	44.72	19.71	93.54	



4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A

4.2.2 Test Setup




4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.



4.2.4 Test Results

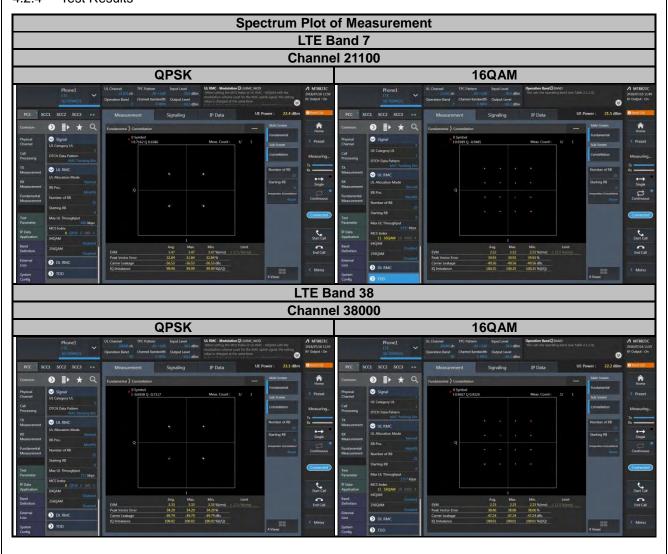



4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that" The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -30 $^{\circ}$ C ~ 50 $^{\circ}$ C.

4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 $^{\circ}$ C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

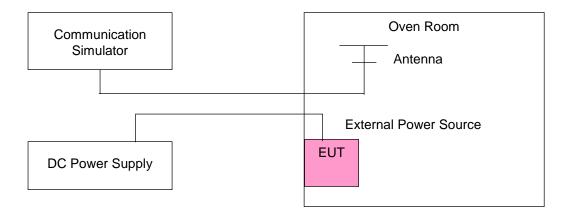



4.3.4 Test Results

Frequency Error vs. Voltage

Voltage					
(Volts)	Low Channel		High Channel		Limit (ppm)
(**************************************	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2502.500002	0.0008	2567.500003	0.0010	2.5
3.27	2502.500001	0.0005	2567.500001	0.0005	2.5
4.42	2502.500002	0.0008	2567.500002	0.0007	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

	or vs. remperature				
		Channel Band	dwidth: 5 MHz		
Temp. (°C)	Low C	hannel	High C	hannel	Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2502.500003	0.0011	2567.500002	0.0006	2.5
-20	2502.500002	0.0007	2567.500003	0.0011	2.5
-10	2502.500004	0.0014	2567.500002	0.0009	2.5
0	2502.500003	0.0010	2567.500001	0.0004	2.5
10	2502.500002	0.0008	2567.500002	0.0007	2.5
20	2502.499999	-0.0005	2567.499996	-0.0015	2.5
30	2502.499998	-0.0010	2567.499999	-0.0005	2.5
40	2502.499998	-0.0007	2567.499999	-0.0004	2.5
50	2502.499997	-0.0012	2567.499998	-0.0007	2.5
55	2502.499997	-0.0013	2567.499997	-0.0013	2.5



Voltage					
(Volts)	Low Channel		High Channel		Limit (ppm)
(10.10)	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2505.000002	0.0008	2565.000003	0.0012	2.5
3.27	2505.000002	0.0009	2565.000001	0.0005	2.5
4.42	2505.000002	0.0008	2565.000001	0.0005	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

		Channel Band	width: 10 MHz		
Temp. (℃)	Low C	hannel	High C	hannel	Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2505.000004	0.0014	2565.000002	0.0006	2.5
-20	2505.000002	0.0008	2565.000001	0.0004	2.5
-10	2505.000004	0.0015	2565.000004	0.0015	2.5
0	2505.000001	0.0004	2565.000001	0.0005	2.5
10	2505.000002	0.0007	2565.000004	0.0015	2.5
20	2504.999996	-0.0015	2564.999998	-0.0007	2.5
30	2504.999997	-0.0010	2564.999999	-0.0004	2.5
40	2504.999997	-0.0010	2564.999997	-0.0013	2.5
50	2504.999996	-0.0016	2564.999998	-0.0008	2.5
55	2504.999997	-0.0013	2564.999998	-0.0008	2.5



Voltage					
(Volts)	Low Channel		High Channel		Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2507.500004	0.0015	2562.500002	0.0006	2.5
3.27	2507.500001	0.0004	2562.500002	0.0009	2.5
4.42	2507.500002	0.0008	2562.500001	0.0005	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

		Channel Band	width: 15 MHz		
Temp. (℃)	Low C	hannel	High C	hannel	Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2507.500002	0.0008	2562.500003	0.0011	2.5
-20	2507.500003	0.0012	2562.500003	0.0013	2.5
-10	2507.500003	0.0010	2562.500003	0.0012	2.5
0	2507.500002	0.0007	2562.500003	0.0011	2.5
10	2507.500002	0.0009	2562.500002	0.0007	2.5
20	2507.499997	-0.0011	2562.499998	-0.0006	2.5
30	2507.499996	-0.0016	2562.499999	-0.0005	2.5
40	2507.499997	-0.0013	2562.499996	-0.0016	2.5
50	2507.499999	-0.0006	2562.499997	-0.0012	2.5
55	2507.499996	-0.0014	2562.499998	-0.0007	2.5



Voltage					
(Volts)	Low Channel		High Channel		Limit (ppm)
(2 .2,	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2510.000003	0.0012	2560.000003	0.0010	2.5
3.27	2510.000003	0.0012	2560.000001	0.0004	2.5
4.42	2510.000004	0.0015	2560.000002	0.0007	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

		Channel Band	width: 20 MHz		
Temp. (℃)	Low C	hannel	High C	hannel	Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2510.000001	0.0005	2560.000001	0.0005	2.5
-20	2510.000002	0.0009	2560.000001	0.0004	2.5
-10	2510.000003	0.0013	2560.000003	0.0012	2.5
0	2510.000003	0.0012	2560.000003	0.0010	2.5
10	2510.000002	0.0007	2560.000001	0.0005	2.5
20	2509.999999	-0.0004	2559.999997	-0.0010	2.5
30	2509.999997	-0.0014	2559.999996	-0.0015	2.5
40	2509.999997	-0.0011	2559.999999	-0.0005	2.5
50	2509.999997	-0.0014	2559.999998	-0.0010	2.5
55	2509.999998	-0.0006	2559.999996	-0.0016	2.5



Voltage					
(Volts)	Low Channel		High Channel		Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2572.500004	0.0014	2617.500002	0.0008	2.5
3.27	2572.500004	0.0014	2617.500003	0.0011	2.5
4.42	2572.500003	0.0012	2617.500002	0.0008	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

		Channel Band	dwidth: 5 MHz		
Temp. (℃)	Low C	hannel	High C	hannel	Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2572.500001	0.0005	2617.500002	0.0006	2.5
-20	2572.500001	0.0005	2617.500001	0.0005	2.5
-10	2572.500004	0.0014	2617.500002	0.0006	2.5
0	2572.500004	0.0015	2617.500004	0.0015	2.5
10	2572.500002	0.0008	2617.500004	0.0014	2.5
20	2572.499996	-0.0014	2617.499998	-0.0008	2.5
30	2572.499997	-0.0012	2617.499998	-0.0006	2.5
40	2572.499997	-0.0012	2617.499997	-0.0010	2.5
50	2572.499997	-0.0012	2617.499997	-0.0013	2.5
55	2572.499999	-0.0005	2617.499998	-0.0009	2.5



Voltage		Channel Bandwidth: 10 MHz					
(Volts)	Low Channel		High Channel		Limit (ppm)		
(12332)	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)			
3.85	2575.000001	0.0005	2615.000002	0.0008	2.5		
3.27	2575.000002	0.0009	2615.000002	0.0009	2.5		
4.42	2575.000003	0.0012	2615.000003	0.0011	2.5		

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

		Channel Band	width: 10 MHz		
Temp. (℃)	Low C	hannel	High C	hannel	Limit (ppm)
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2575.000002	0.0007	2615.000003	0.0012	2.5
-20	2575.000002	0.0008	2615.000003	0.0010	2.5
-10	2575.000002	0.0007	2615.000004	0.0014	2.5
0	2575.000003	0.0013	2615.000004	0.0014	2.5
10	2575.000002	0.0007	2615.000002	0.0007	2.5
20	2574.999999	-0.0005	2614.999997	-0.0013	2.5
30	2574.999997	-0.0013	2614.999997	-0.0013	2.5
40	2574.999998	-0.0010	2614.999997	-0.0010	2.5
50	2574.999999	-0.0005	2614.999997	-0.0012	2.5
55	2574.999997	-0.0010	2614.999999	-0.0005	2.5



Voltage (Volts)					
	Low C	hannel	High C	Limit (ppm)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2577.500003	0.0011	2612.500003	0.0010	2.5
3.27	2577.500004	0.0015	2612.500003	0.0011	2.5
4.42	2577.500001	0.0005	2612.500002	0.0009	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

	·				
Temp. (°C)					
	Low C	hannel	High C	Limit (ppm)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2577.500004	0.0014	2612.500001	0.0005	2.5
-20	2577.500001	0.0004	2612.500004	0.0014	2.5
-10	2577.500004	0.0014	2612.500004	0.0015	2.5
0	2577.500002	0.0007	2612.500003	0.0012	2.5
10	2577.500003	0.0013	2612.500004	0.0014	2.5
20	2577.499997	-0.0011	2612.499997	-0.0013	2.5
30	2577.499998	-0.0008	2612.499998	-0.0009	2.5
40	2577.499999	-0.0005	2612.499998	-0.0007	2.5
50	2577.499997	-0.0013	2612.499998	-0.0010	2.5
55	2577.499997	-0.0013	2612.499998	-0.0006	2.5



Voltage (Volts)					
	Low C	hannel	High C	Limit (ppm)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	2580.000004	0.0015	2610.000003	0.0011	2.5
3.27	2580.000003	0.0011	2610.000002	0.0007	2.5
4.42	2580.000003	0.0010	2610.000003	0.0011	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.42 Vdc.

Temp. (℃)					
	Low C	hannel	High C	Limit (ppm)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2580.000001	0.0004	2610.000003	0.0013	2.5
-20	2580.000003	0.0012	2610.000002	0.0008	2.5
-10	2580.000002	0.0009	2610.000004	0.0014	2.5
0	2580.000002	0.0008	2610.000002	0.0009	2.5
10	2580.000002	0.0007	2610.000004	0.0015	2.5
20	2579.999998	-0.0006	2609.999996	-0.0014	2.5
30	2579.999996	-0.0016	2609.999997	-0.0011	2.5
40	2579.999998	-0.0008	2609.999998	-0.0007	2.5
50	2579.999999	-0.0005	2609.999997	-0.0010	2.5
55	2579.999997	-0.0011	2609.999996	-0.0014	2.5



4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.4.3 Test Setup

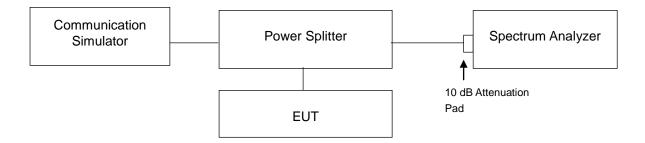




4.4.4 Test Results

LTE Band 7								
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM		(MHz)	QPSK	16QAM	
20775	2502.5	4.4923	4.4956	20800	2505.0	8.9616	8.9689	
21100	2535.0	4.4939	4.4944	21100	2535.0	8.9669	8.9711	
21425	2567.5	4.4926	4.4933	21400	2565.0	8.9628	8.9650	

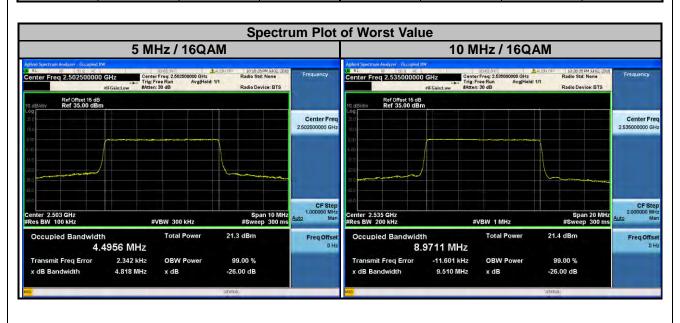




LTE Band 7									
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency	99 % Occupied Bandwidth (MHz)			
		QPSK	16QAM		(MHz)	QPSK	16QAM		
20825	2507.5	13.443	13.438	20850	2510.0	17.908	17.919		
21100	2535.0	13.450	13.439	21100	2535.0	17.914	17.949		
21375	2562.5	13.447	13.438	21350	2560.0	17.900	17.918		

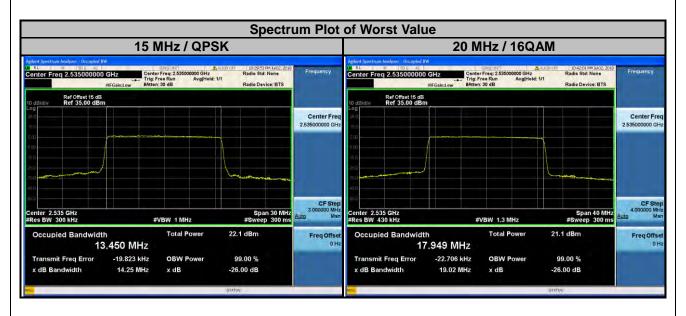




LTE Band 38									
(Channel Band	dwidth: 5 MH	Channel Bandwidth: 10 MHz						
Channel	Frequency (MHz)	99 % Oo Bandwid	ccupied Ith (MHz)	Channel	Frequency	99 % Occupied Bandwidth (MHz)			
		QPSK	16QAM		(MHz)	QPSK	16QAM		
37775	2572.5	4.4902	4.4859	37800	2575.0	8.9522	8.9640		
38000	2595.0	4.4911	4.4879	38000	2595.0	8.9555	8.9591		
38225	2617.5	4.4926	4.4929	38200	2615.0	8.9607	8.9718		

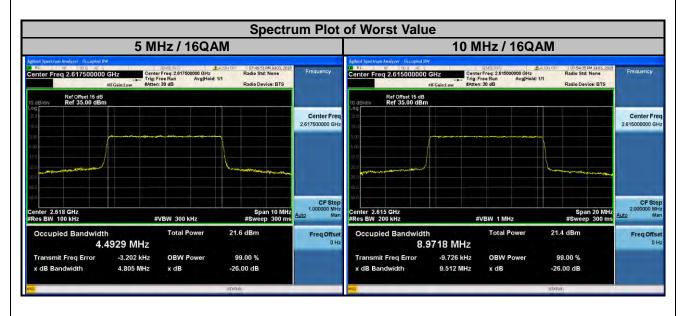



LTE Band 38									
C	hannel Band	width: 15 MF	łz	Channel Bandwidth: 20 MHz					
Channel	Frequency	- Daniaman (mile) (mannal	Frequency	99 % Occupied Bandwidth (MHz)					
	(MHz)	QPSK	16QAM		(MHz)	QPSK	16QAM		
37825	2577.5	13.433	13.426	37850	2580.0	17.883	17.878		
38000	2595.0	13.439	13.429	38000	2595.0	17.894	17.890		
38175	2612.5	13.458	13.450	38150	2610.0	17.932	17.924		

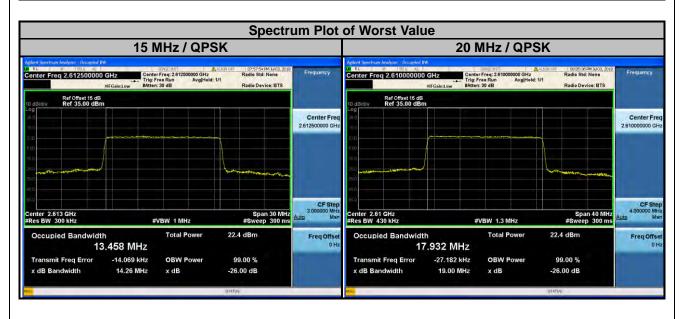




4.5 Out-of-Band Emissions Measurement

4.5.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(I)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.

4.5.2 Test Setup

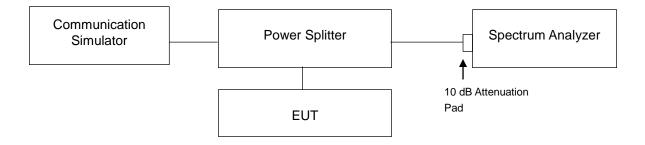


4.5.3 Test Procedures


- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. Record the max. trace plot into the test report.




4.5.4 Test Results

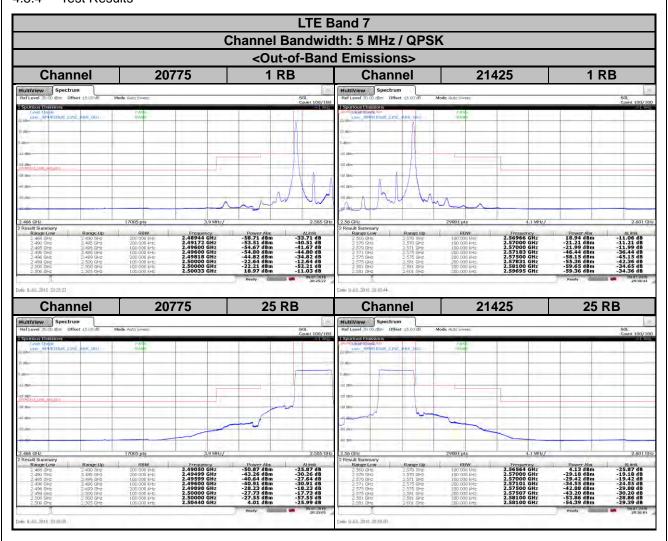




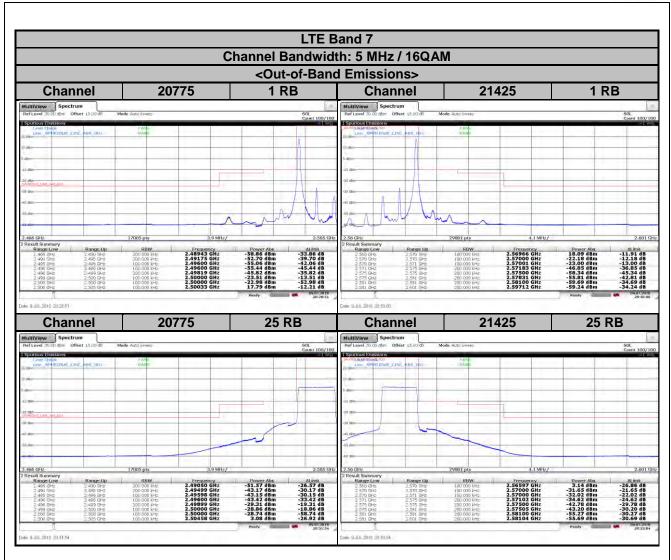




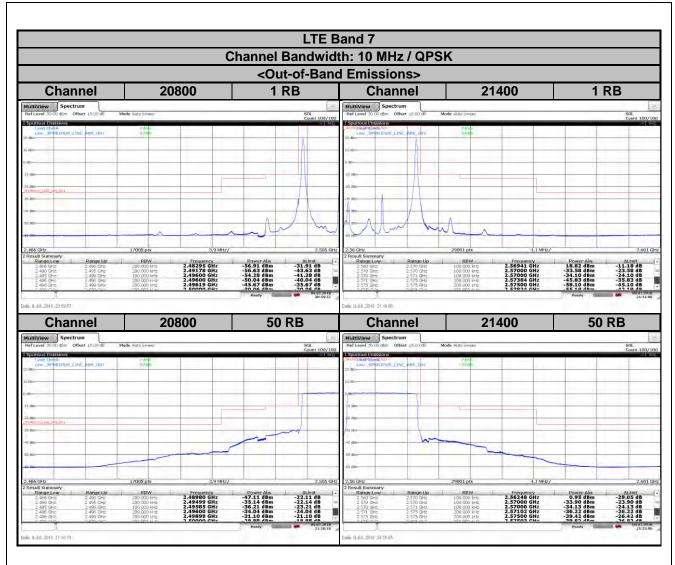




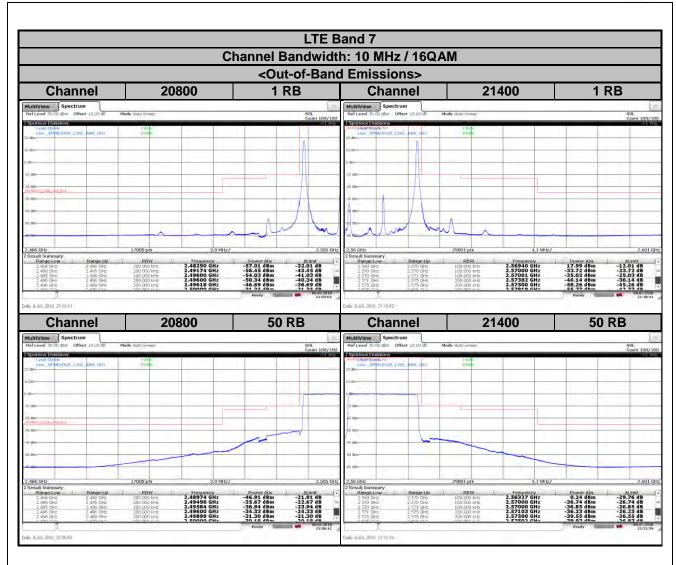




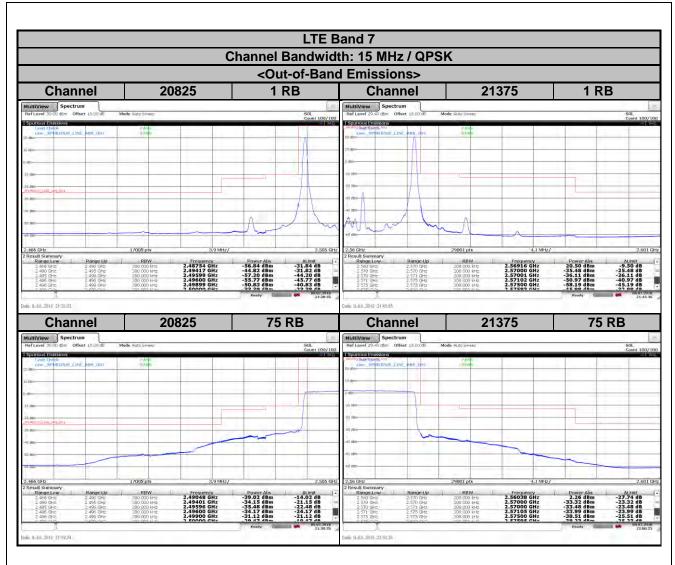




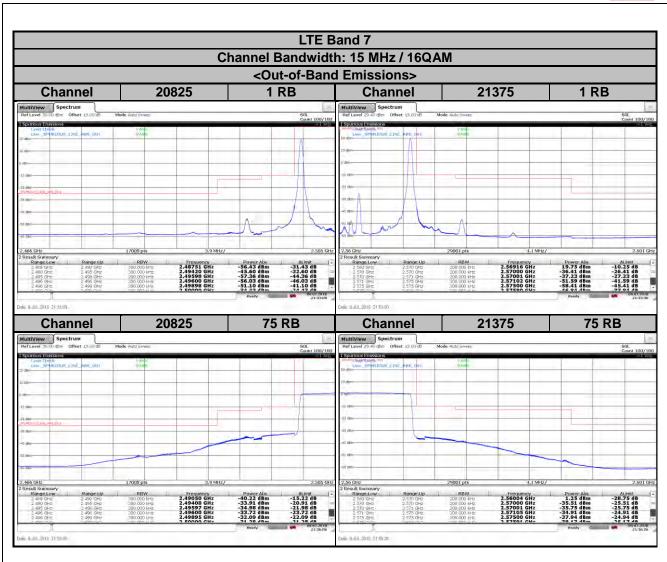




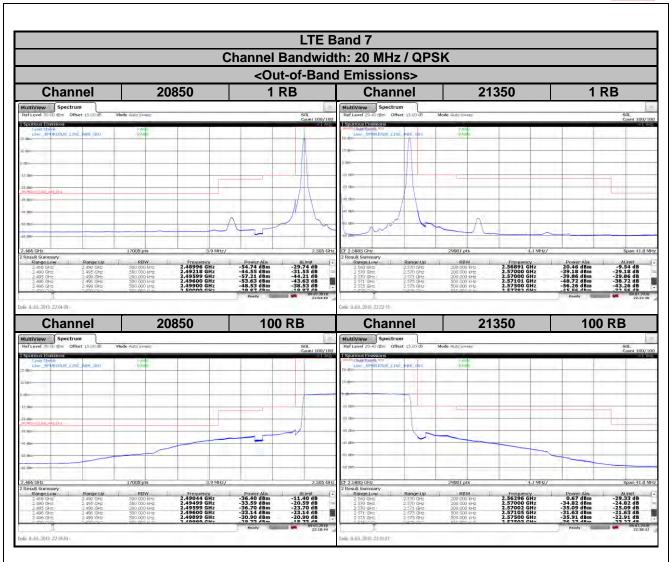




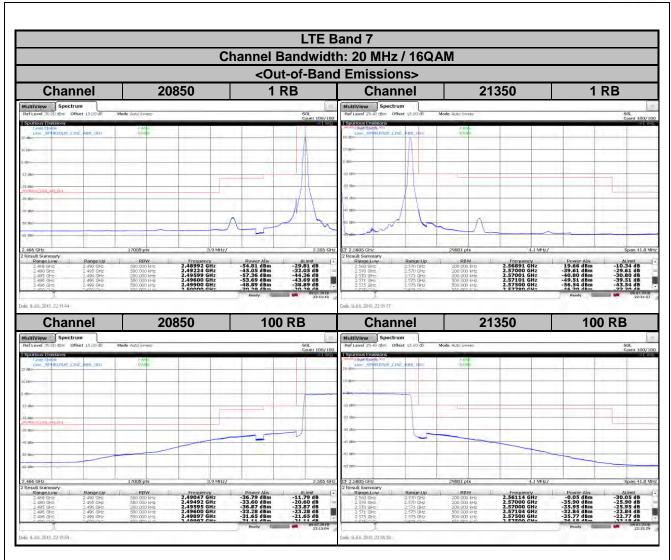



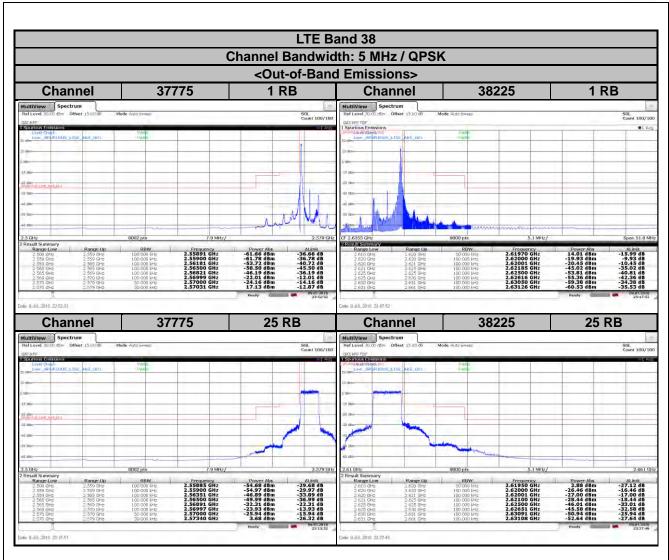




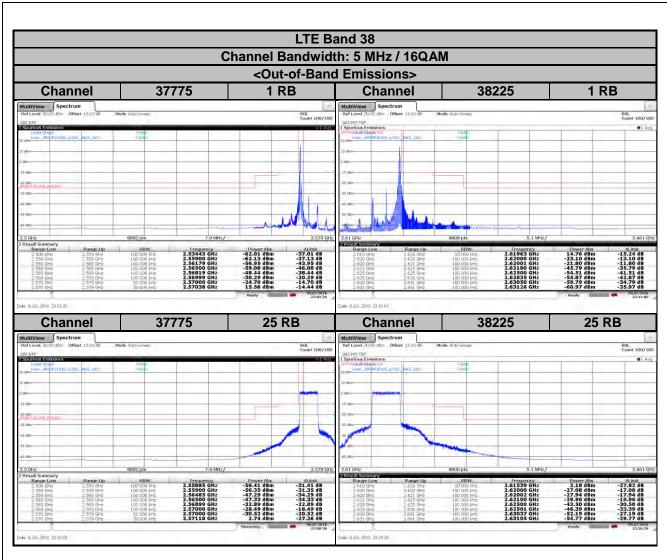





Report Format Version: 6.1.1

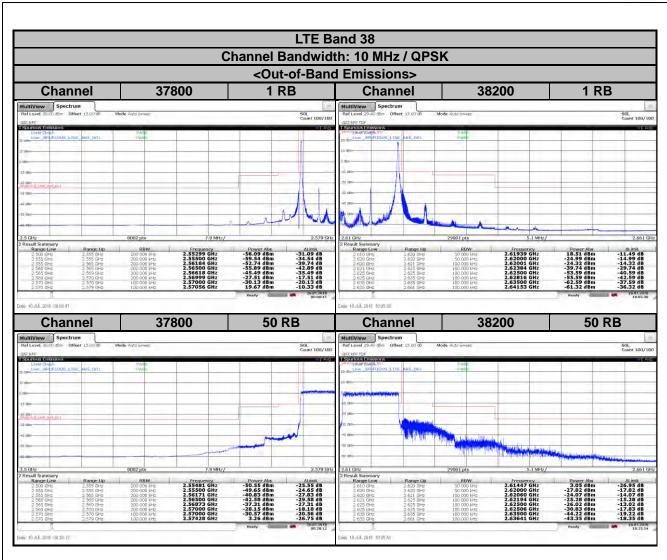




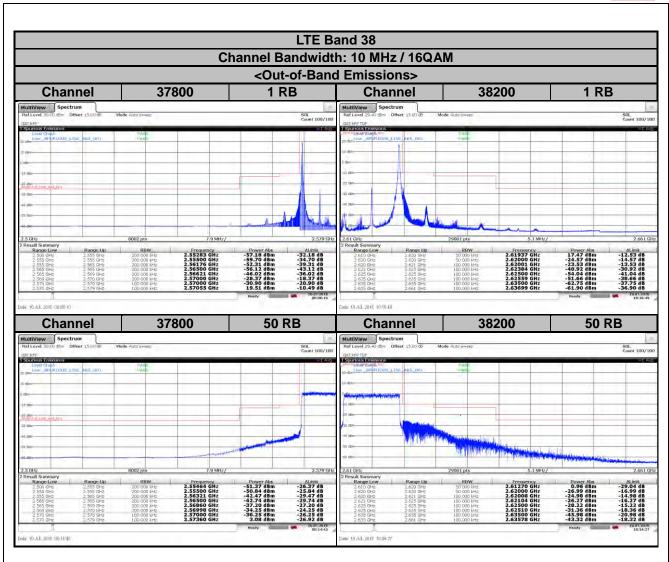



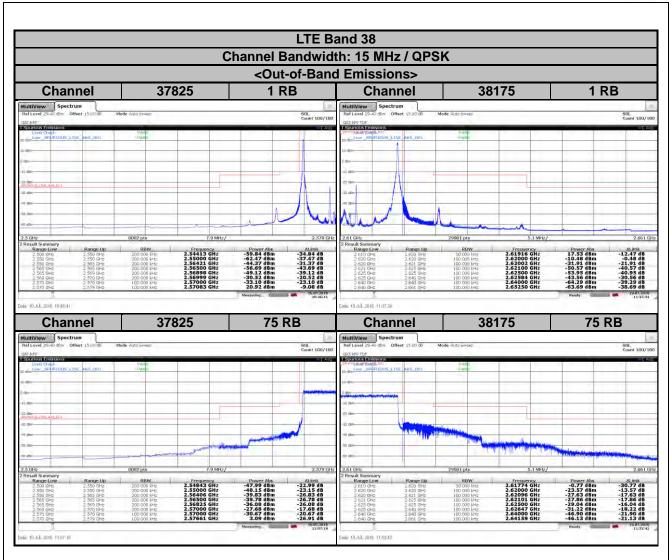




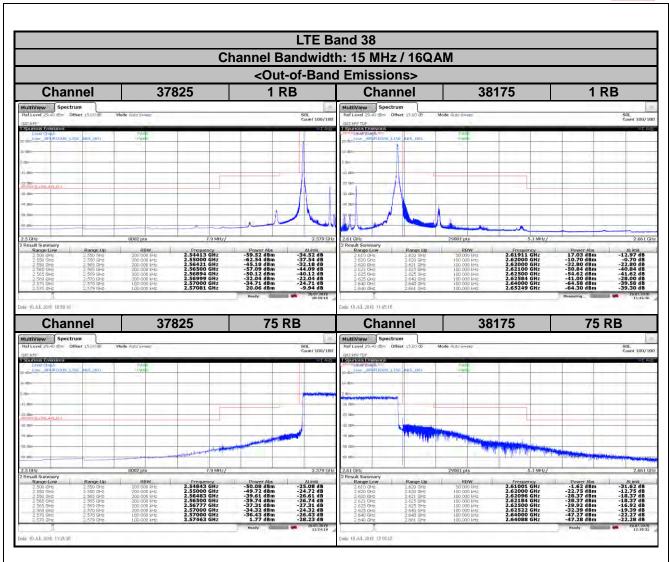




Report Format Version: 6.1.1

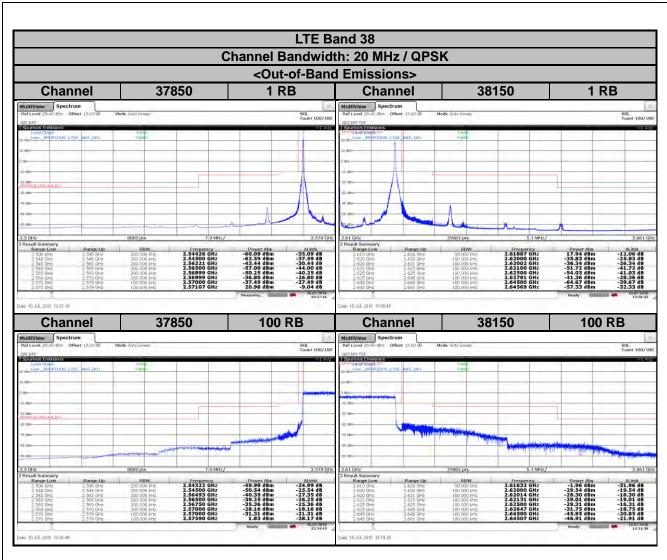



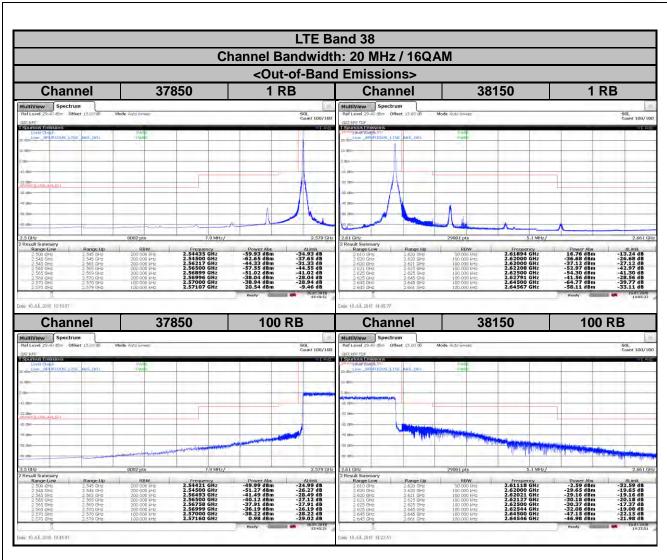




4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

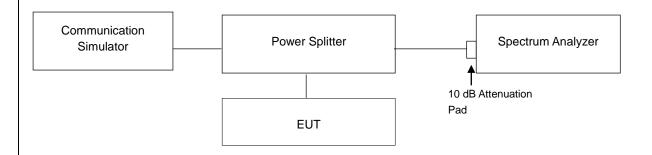

4.6.3 Test Procedures

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Record the maximum PAPR level associated with a probability of 0.1 %.




4.6.4 Test Results

LTE Band 7									
(Channel Band	dwidth: 5 MH	z	Channel Bandwidth: 10 MHz					
Channel	Frequency	Peak to Ave	erage Ratio B)	Channel	Frequency	Peak to Average Ratio (dB)			
	(MHz)	QPSK	16QAM		(MHz)	QPSK	16QAM		
20775	2502.5	4.04	5.80	20800	2505.0	4.00	5.76		
21100	2535.0	3.80	5.58	21100	2535.0	3.59	5.37		
21425	2567.5	3.73	5.44	21400	2565.0	3.66	5.34		






LTE Band 7									
C	hannel Band	width: 15 MF	łz	Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)		erage Ratio B)	Channel	Frequency	Peak to Average Ratio (dB)			
		QPSK	16QAM		(MHz)	QPSK	16QAM		
20825	2507.5	3.98	5.78	20850	2510.0	3.96	5.73		
21100	2535.0	3.56	5.22	21100	2535.0	3.49	5.24		
21375	2562.5	3.80	5.59	21350	2560.0	3.92	5.64		

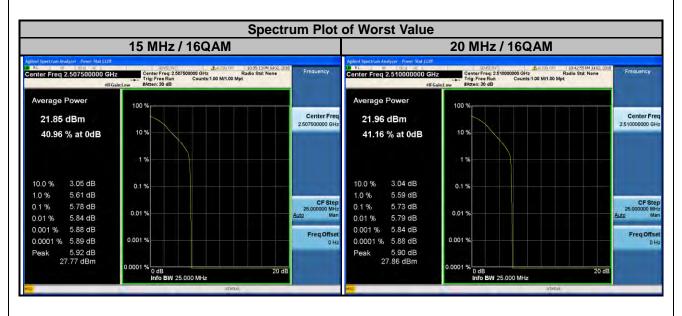




LTE Band 38									
(Channel Band	dwidth: 5 MH	z	Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)		erage Ratio B)	Channel	Frequency	Peak to Average Ratio (dB)			
		QPSK	16QAM		(MHz)	QPSK	16QAM		
37775	2572.5	3.78	5.23	37800	2575.0	4.41	5.59		
38000	2595.0	3.97	6.10	38000	2595.0	4.77	5.92		
38225	2617.5	4.44	5.98	38200	2615.0	5.06	6.24		

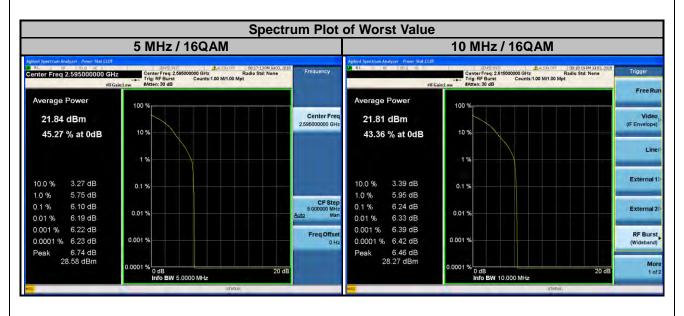



LTE Band 38									
C	hannel Band	width: 15 MF	łz	Channel Bandwidth: 20 MHz					
Channel	Frequency		erage Ratio B)	Channel Frequency (MHz)	Peak to Average Ratio (dB)				
	(MHz)	QPSK	16QAM		(IVITZ)	QPSK	16QAM		
37825	2577.5	3.42	4.68	37850	2580.0	3.48	5.92		
38000	2595.0	3.58	6.10	38000	2595.0	3.53	6.13		
38175	2612.5	4.56	6.51	38150	2610.0	4.14	6.27		

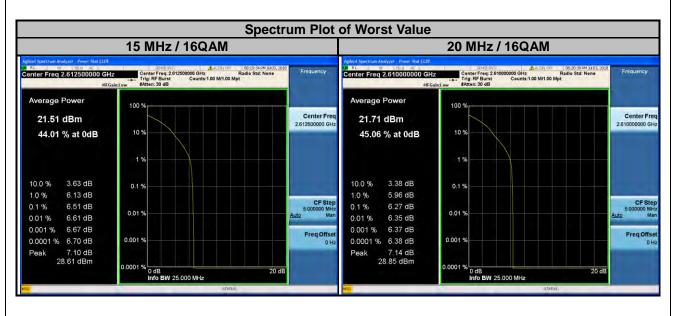




4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least 55 +10 log10(P) dB. The limit of emission is equal to -25 dBm.

4.7.2 Test Setup

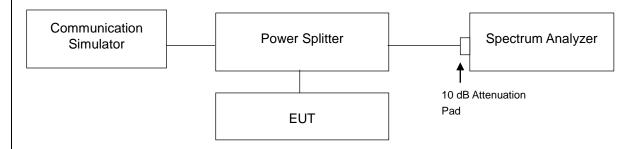

4.7.3 Test Procedure


- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range from 9 kHz to 1 GHz, 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- c. Measuring frequency range from 1 GHz to 27 GHz, 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.



4.7.4 Test Results

-105-

Start 3 GHz

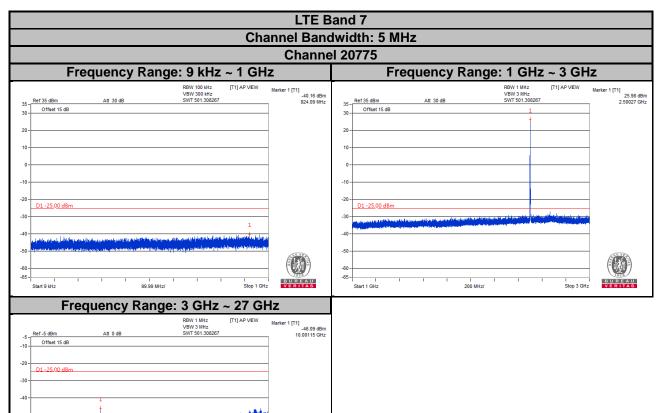


BUREAU

Stop 27 GHz

1 2.4 GHz/



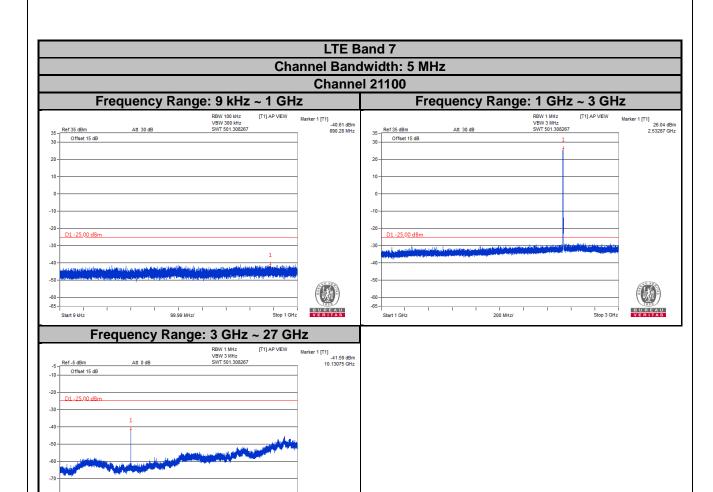


BUREAU

2.4 GHz/

-105-

Start 3 GHz



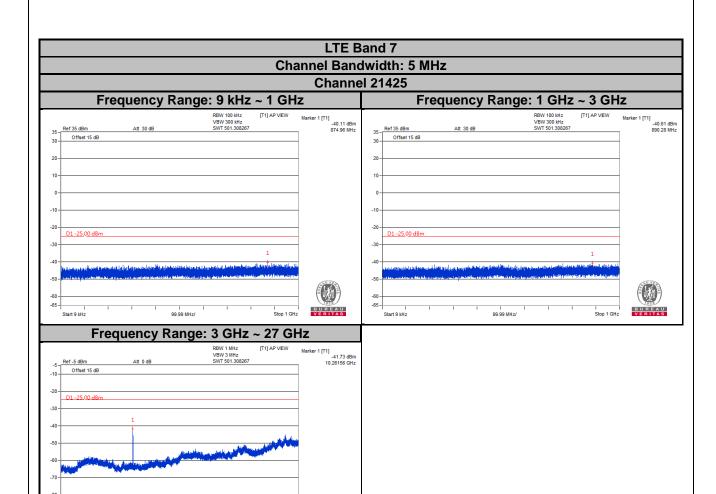


BUREAU

2.4 GHz/


-105-

Start 3 GHz



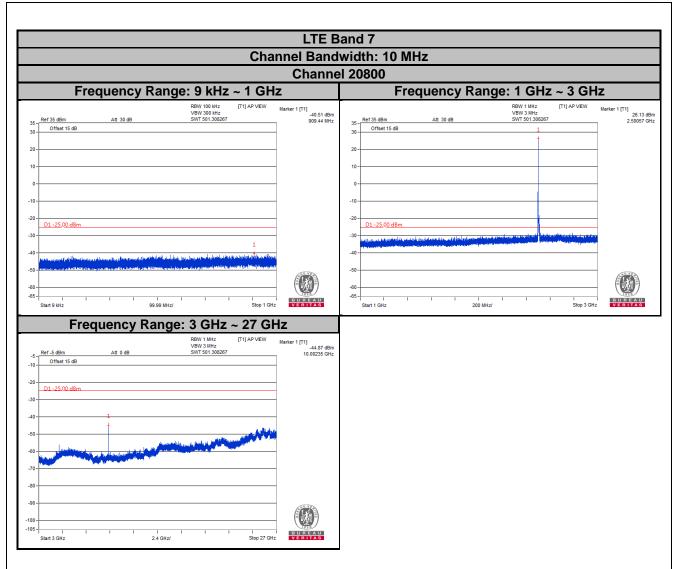




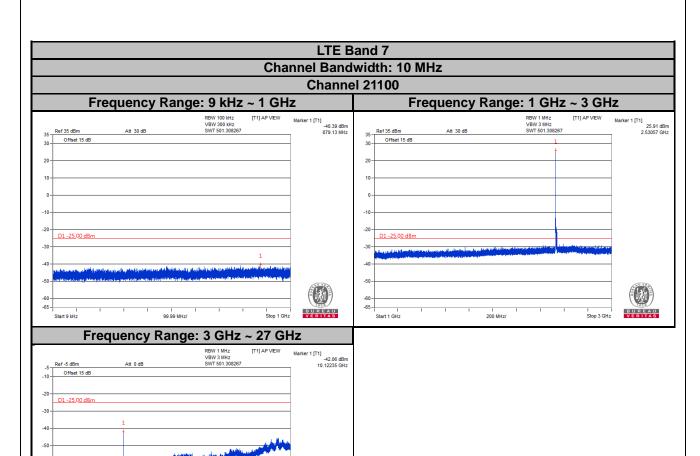

1 2.4 GHz/

Start 3 GHz




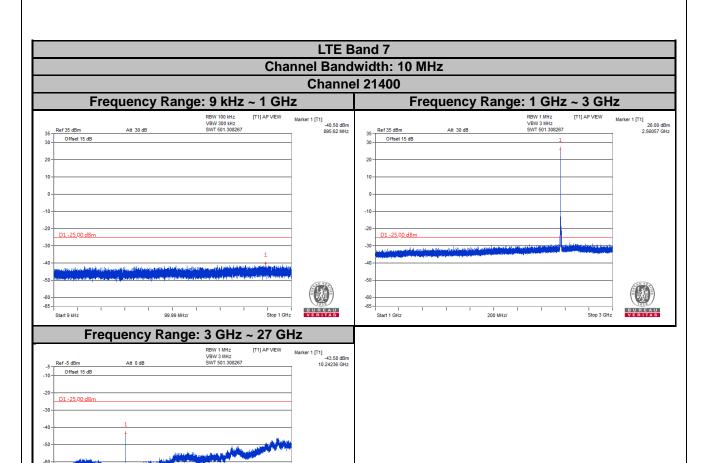


1 2.4 GHz/

Start 3 GHz



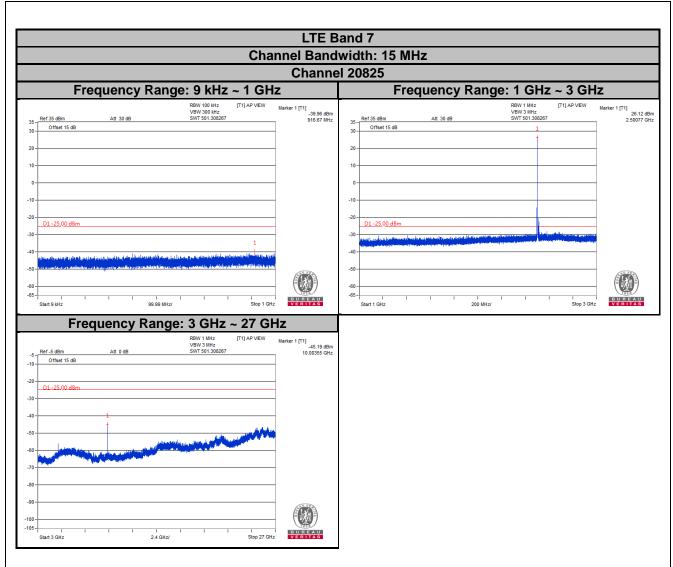




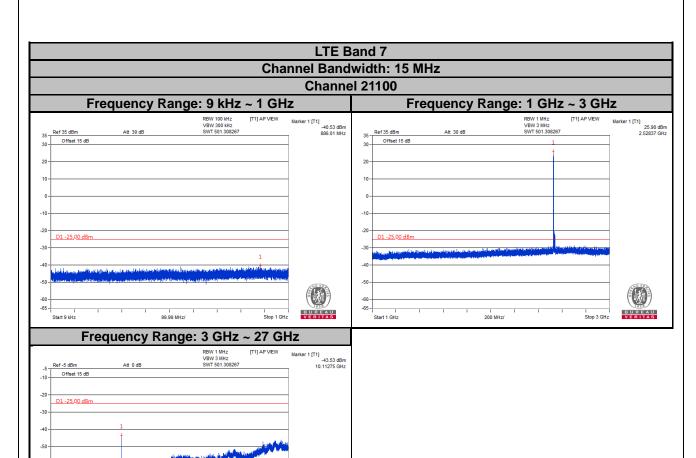

1 2.4 GHz/

Start 3 GHz




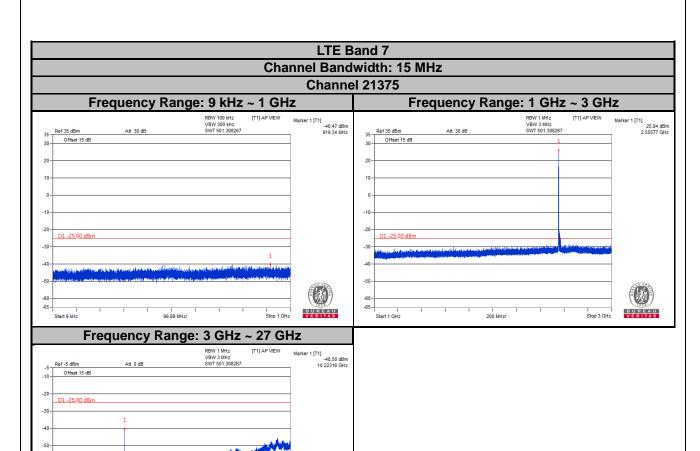


1 2.4 GHz/

Start 3 GHz



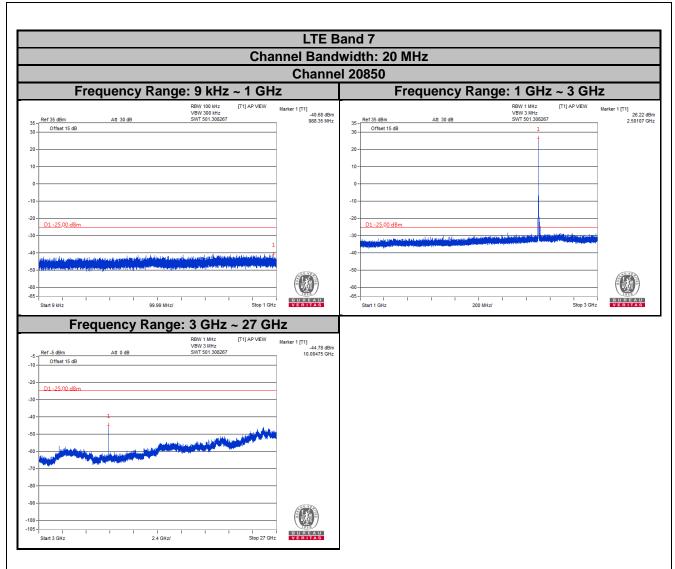




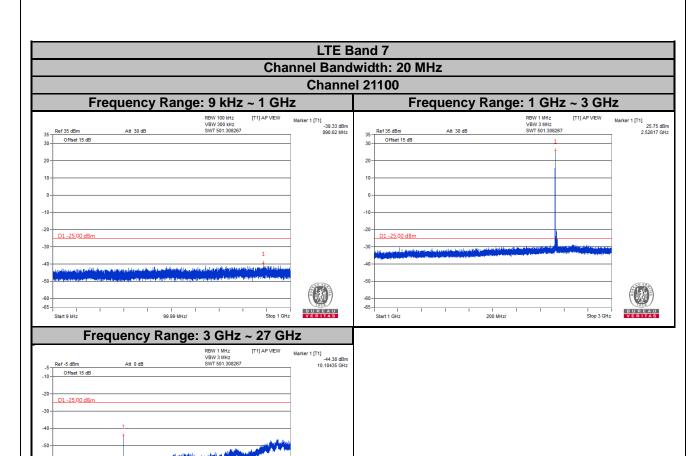

1 2.4 GHz/

Start 3 GHz



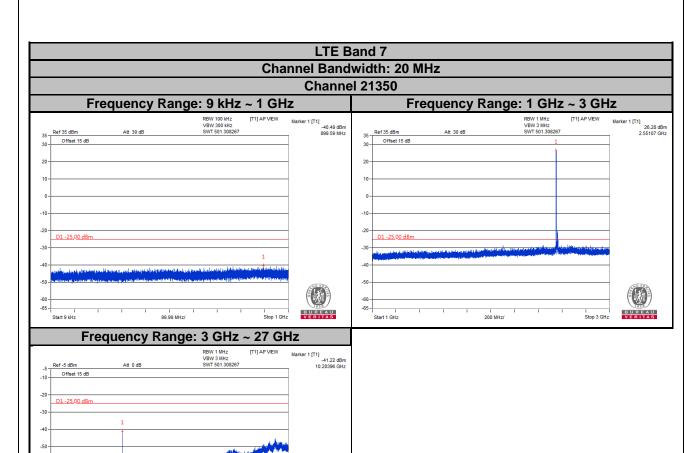


Stop 27 GHz

1 2.4 GHz/


Start 3 GHz

BUREAU




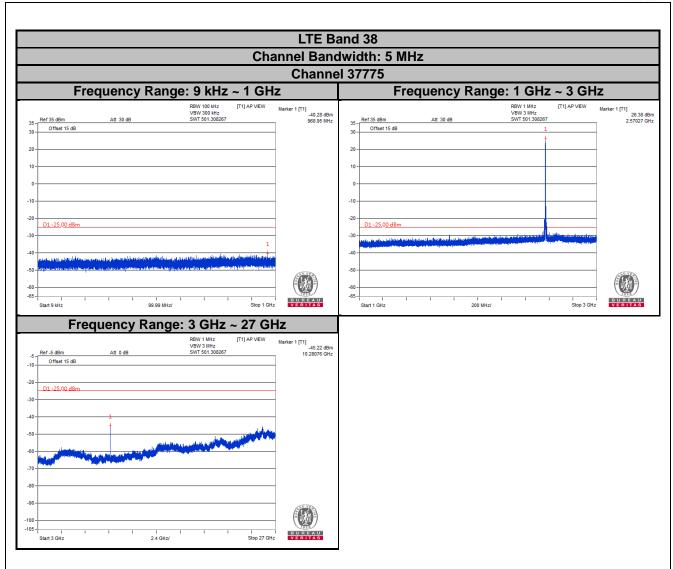




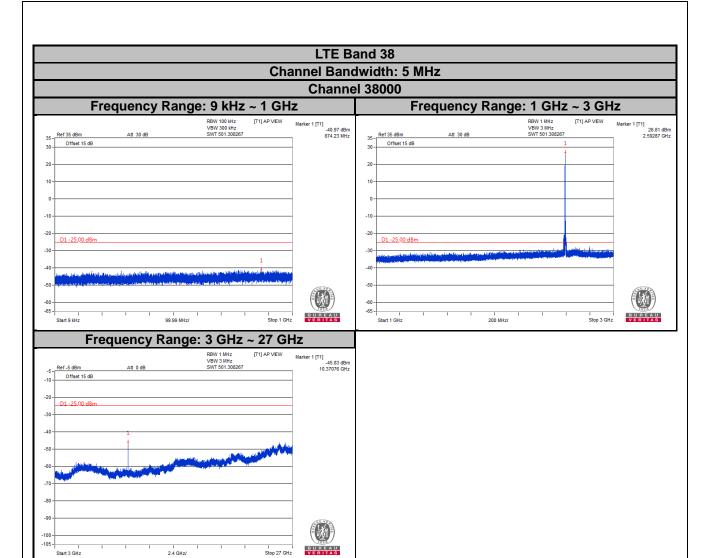




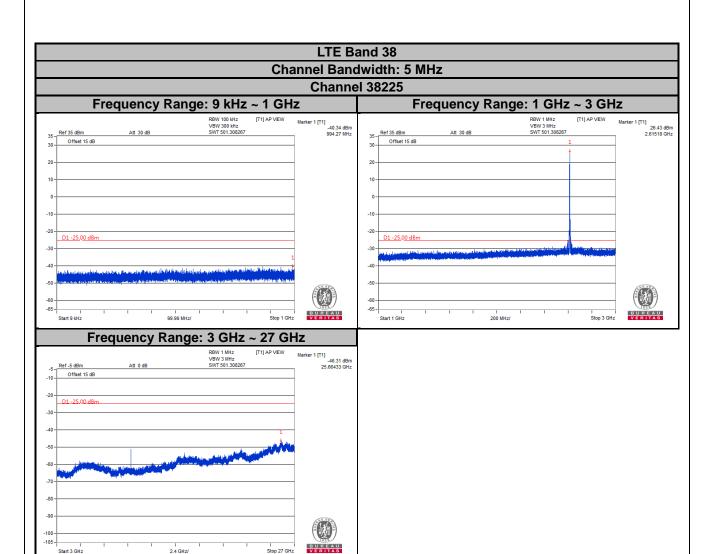




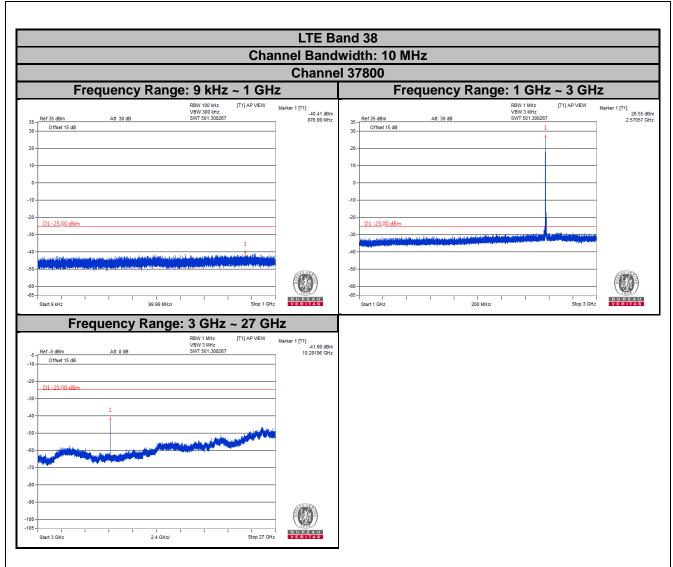




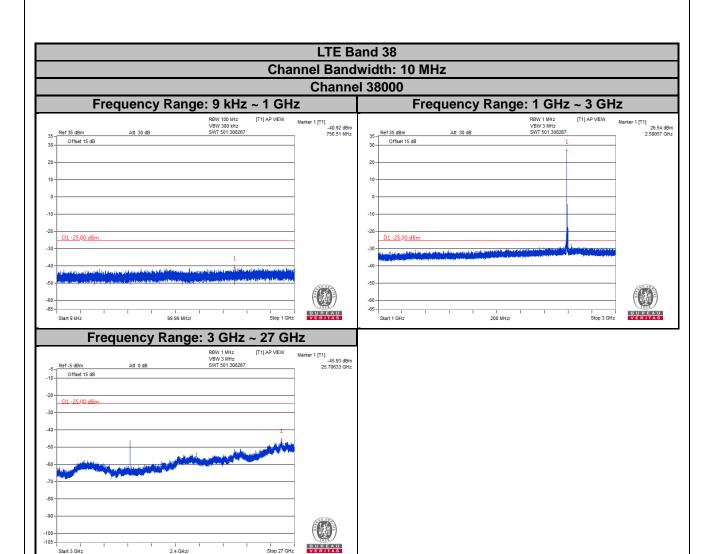




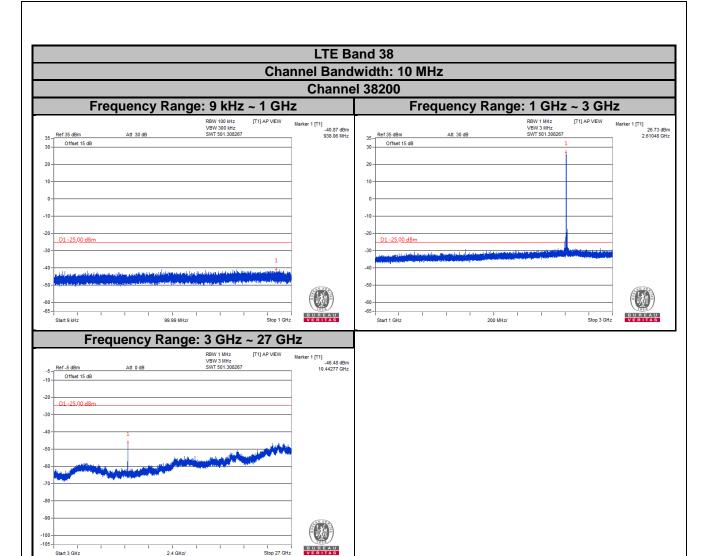




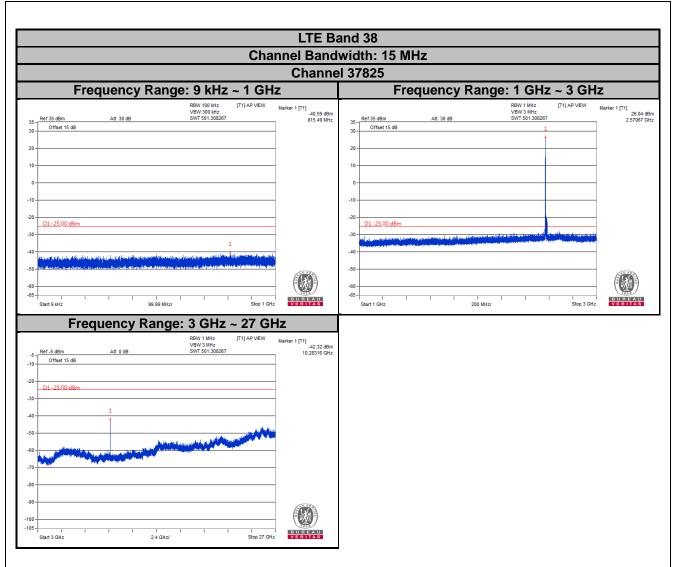




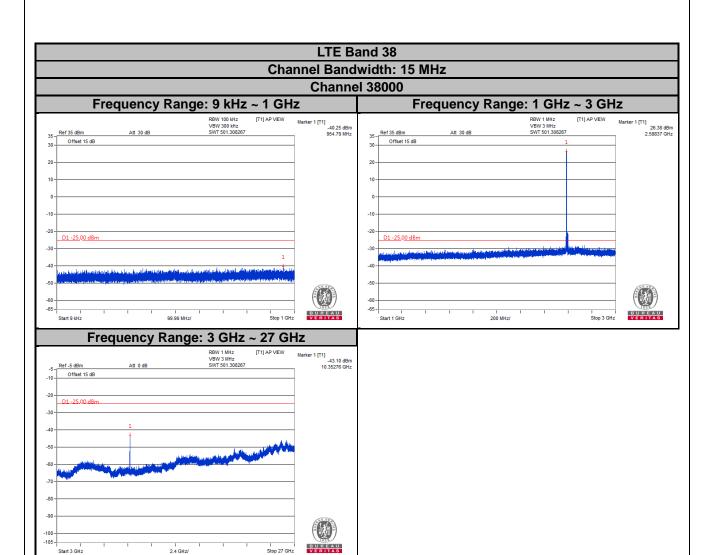




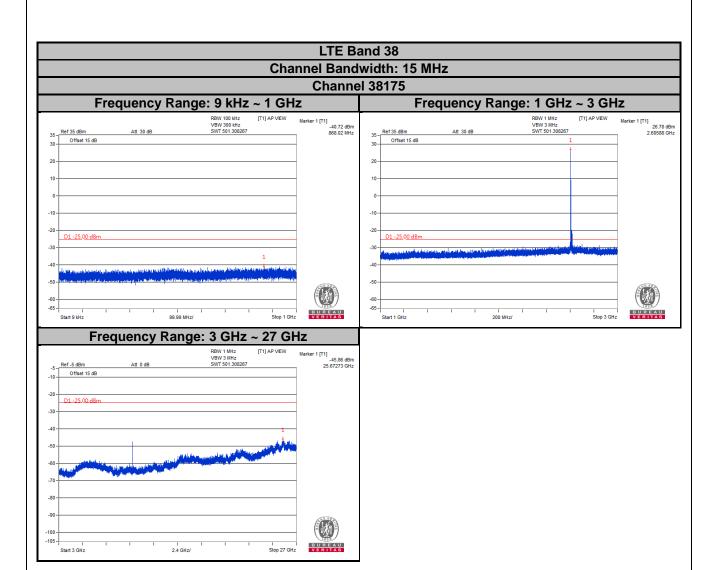



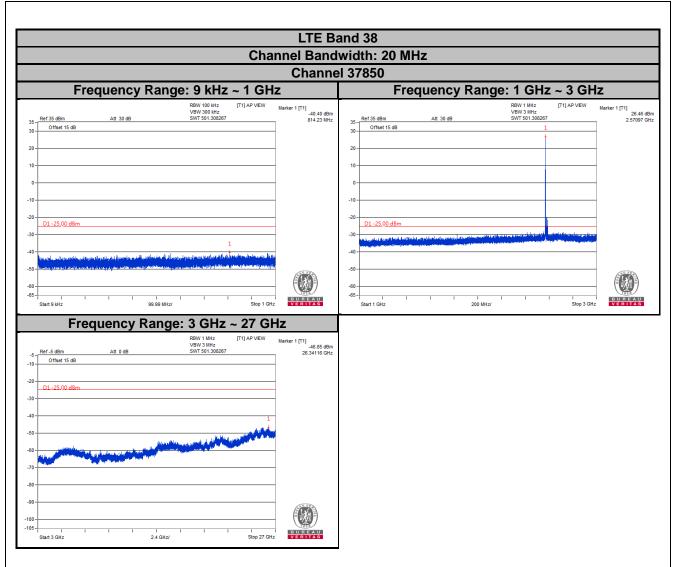



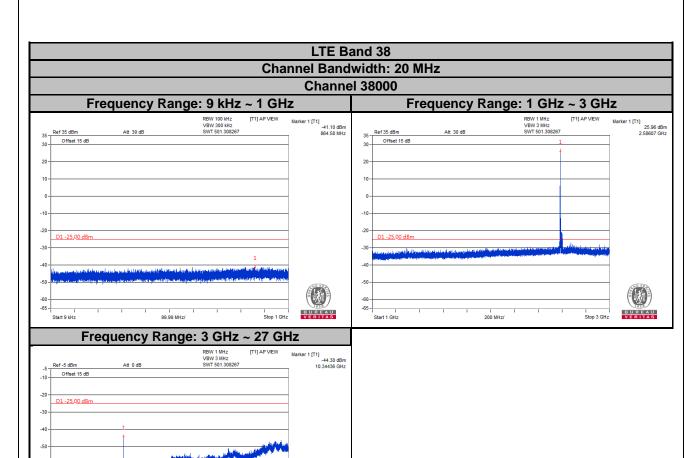


Stop 27 GHz

1 2.4 GHz/

Start 3 GHz

BUREAU



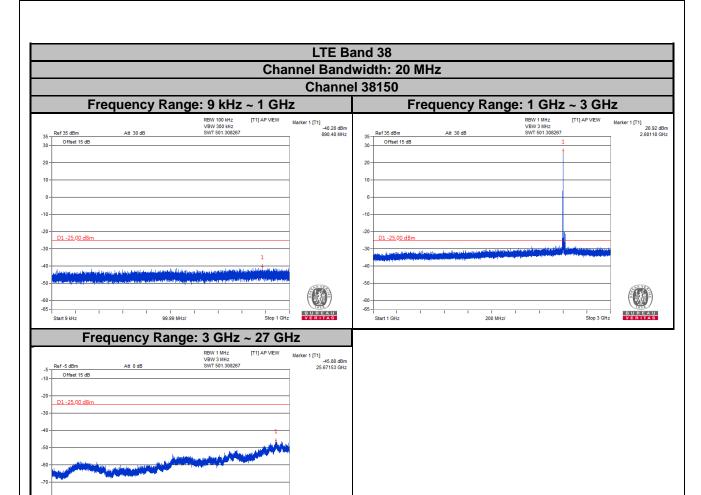

Stop 27 GHz

1 2.4 GHz/

Start 3 GHz

BUREAU



4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least 55 +10 log10(P) dB. The limit of emission is equal to -25 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power 2.15 dB.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

Report No.: RF180626C09-3 Page No. 86 / 119 Report Format Version: 6.1.1




4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

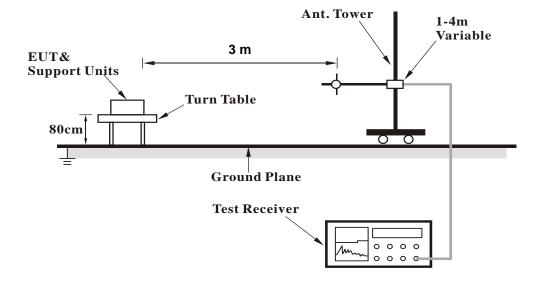

<Radiated Emission above 1 GHz>

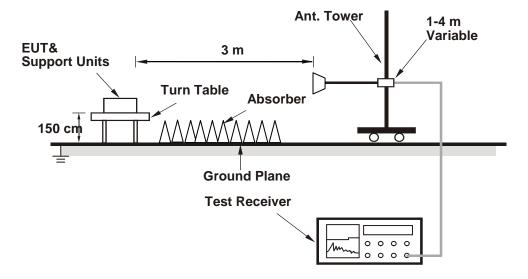

For the actual test configuration, please refer to the attached file (Test Setup Photo).



4.8.5 Test Results

Mode A


LTE Band 7

Channel Bandwidth: 5 MHz / QPSK

Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

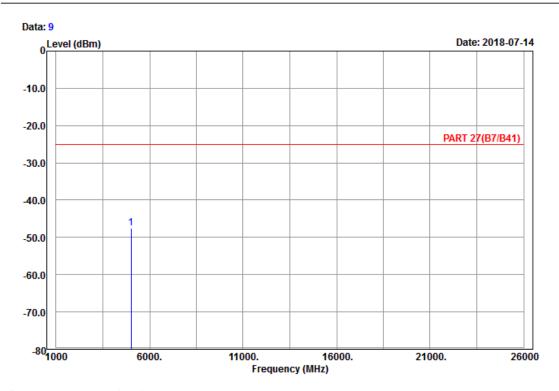

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 7_Link_CH20775

Tested by: Harry Hsueh


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 pp 5005.00 -47.51 -67.09 -25.00 -22.51 19.58 Peak





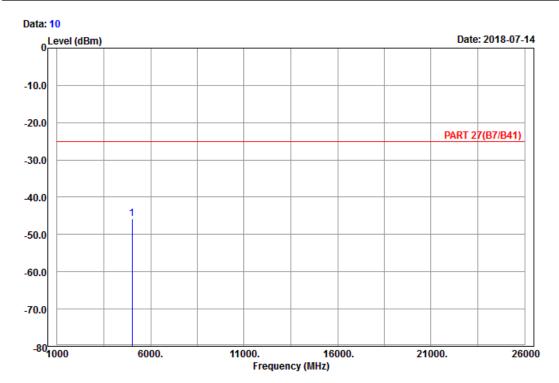

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 7_Link_CH20775

Tested by: Harry Hsueh

Read Limit Over Freq Level Level Line Limit Factor Remark

MHz dBm dBm dB dB


1 pp 5005.00 -45.78 -65.36 -25.00 -20.78 19.58 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

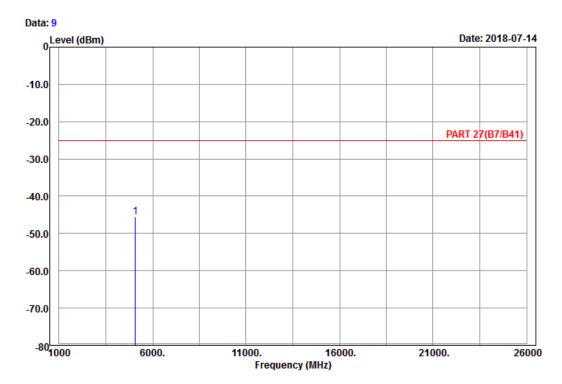

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 7_Link_CH21100

Tested by: Harry Hsueh


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dB dB

1 pp 5070.00 -45.52 -64.91 -25.00 -20.52 19.39 Peak





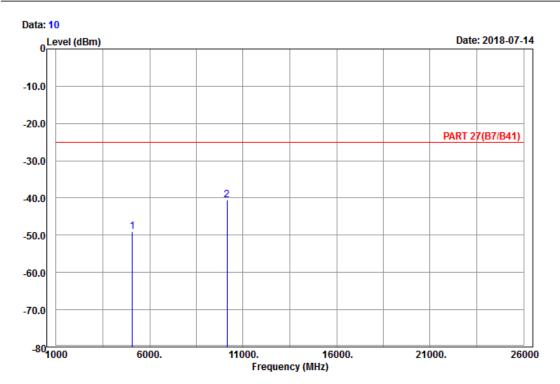

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 7_Link_CH21100

Tested by: Harry Hsueh

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 5070.00 -49.14 -68.53 -25.00 -24.14 19.39 Peak 2 pp 10140.00 -40.59 -67.01 -25.00 -15.59 26.42 Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

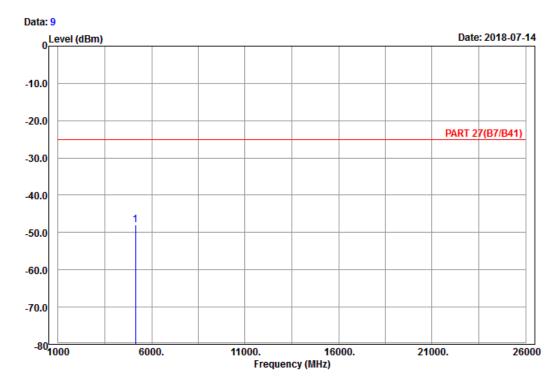

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 7_Link_CH21425

Tested by: Harry Hsueh


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 pp 5135.00 -47.97 -67.78 -25.00 -22.97 19.81 Peak





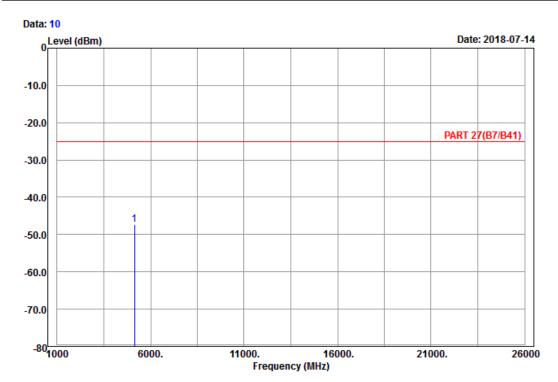

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 7_Link_CH21425

Tested by: Harry Hsueh

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 pp 5135.00 -47.40 -67.21 -25.00 -22.40 19.81 Peak



Channel Bandwidth: 20 MHz / QPSK Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

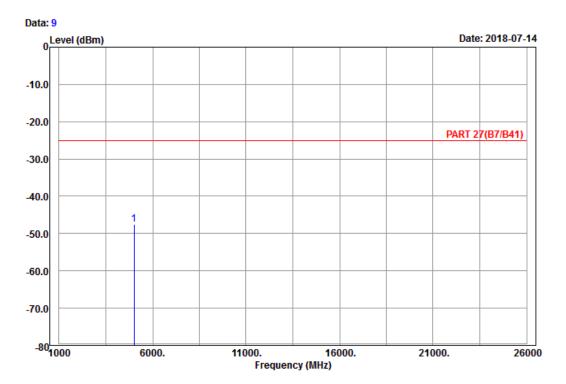

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 7_Link_CH20850

Tested by: Harry Hsueh


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 pp 5020.00 -47.43 -66.51 -25.00 -22.43 19.08 Peak





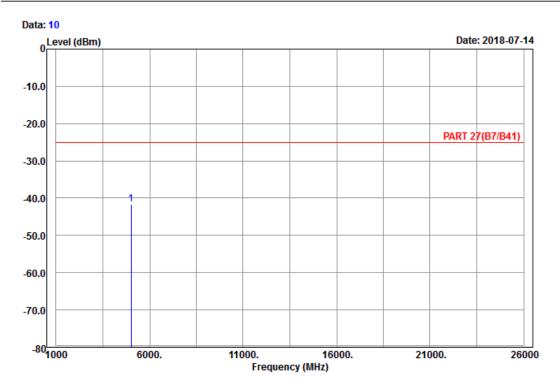

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 7_Link_CH20850

Tested by: Harry Hsueh

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dB dB


1 pp 5020.00 -41.57 -60.65 -25.00 -16.57 19.08 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

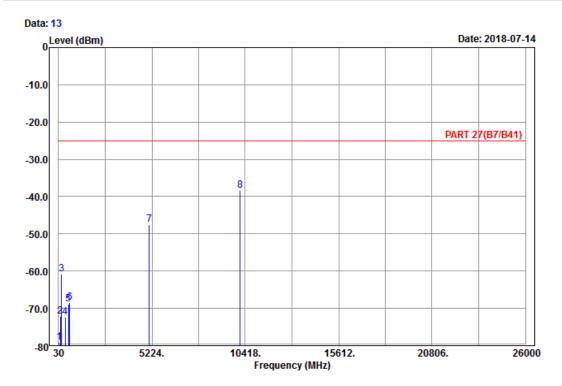

Site : 966 chamber 1


Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 7_Link_CH21100

Tested by: Harry Hsueh

		. ,					
			Read	Limit	0ver		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	55.11	-79.22	-65.16	-13.00	-66.22	-14.06	Peak
2	138.27	-72.20	-64.51	-13.00	-59.20	-7.69	Peak
3	197.13	-60.83	-54.78	-13.00	-47.83	-6.05	Peak
4	410.60	-72.33	-69.36	-13.00	-59.33	-2.97	Peak
5	586.30	-68.86	-68.72	-13.00	-55.86	-0.14	Peak
6	659.80	-68.38	-68.20	-13.00	-55.38	-0.18	Peak
7	5070.00	-47.56	-66.95	-25.00	-22.56	19.39	Peak
8 pp	10140.00	-38.34	-64.76	-25.00	-13.34	26.42	Peak





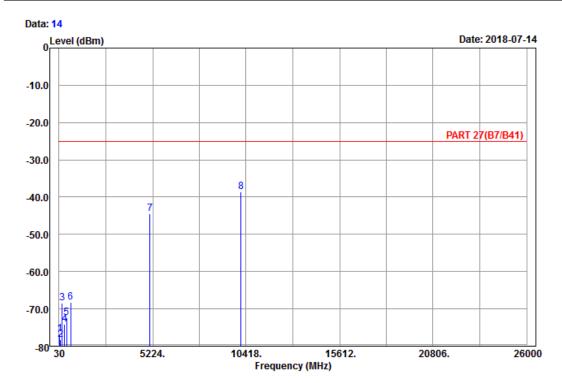

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 7_Link_CH21100

Tested by: Harry Hsueh


	Freq	Level	Read Level	Limit Line		Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	70.77	-76.66	-64.06	-13.00	-63.66	-12.60	Peak
2	113.97	-78.21	-69.58	-13.00	-65.21	-8.63	Peak
3	189.30	-68.54	-62.82	-13.00	-55.54	-5.72	Peak
4	342.70	-74.21	-68.74	-13.00	-61.21	-5.47	Peak
5	453.30	-72.27	-68.34	-13.00	-59.27	-3.93	Peak
6	682.20	-68.21	-67.92	-13.00	-55.21	-0.29	Peak
7	5070.00	-44.37	-63.76	-25.00	-19.37	19.39	Peak
8 pp	10140.00	-38.62	-65.04	-25.00	-13.62	26.42	Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

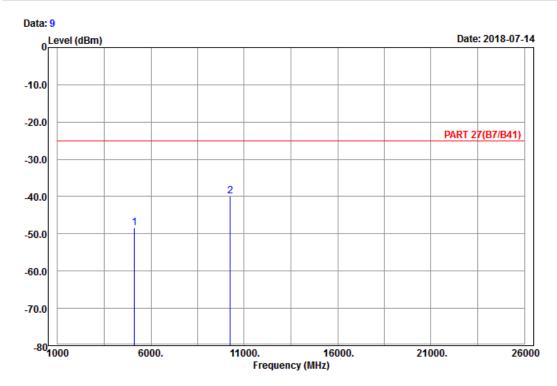

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 7_Link_CH21350

Tested by: Harry Hsueh


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5120.00 -48.36 -68.07 -25.00 -23.36 19.71 Peak 2 pp 10240.00 -39.94 -66.48 -25.00 -14.94 26.54 Peak





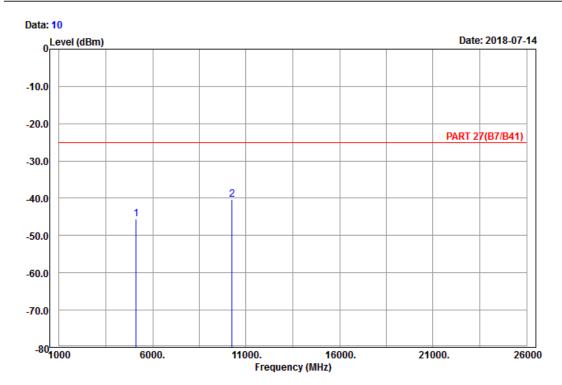

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 7_Link_CH21350

Tested by: Harry Hsueh

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5120.00 -45.63 -65.34 -25.00 -20.63 19.71 Peak 2 pp 10240.00 -40.42 -66.96 -25.00 -15.42 26.54 Peak




LTE Band 38

Channel Bandwidth: 5 MHz / QPSK

Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

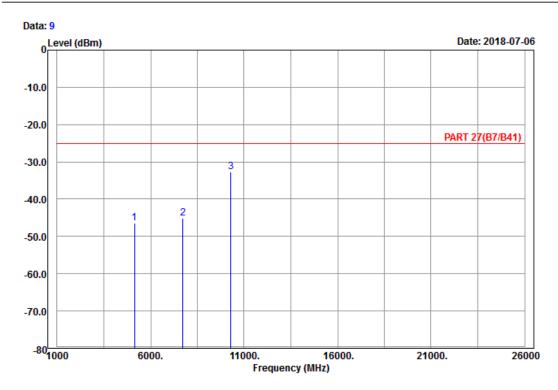

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH37775

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5145.00 -46.44 -66.25 -25.00 -21.44 19.81 Peak 2 7717.50 -45.14 -68.33 -25.00 -20.14 23.19 Peak 3 pp 10290.00 -32.61 -59.23 -25.00 -7.61 26.62 Peak





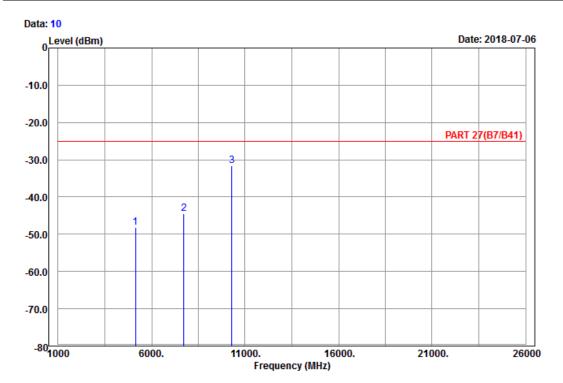

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH37775

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 5145.00 -48.11 -67.92 -25.00 -23.11 19.81 Peak 2 7717.50 -44.42 -67.61 -25.00 -19.42 23.19 Peak 3 pp 10290.00 -31.50 -58.12 -25.00 -6.50 26.62 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

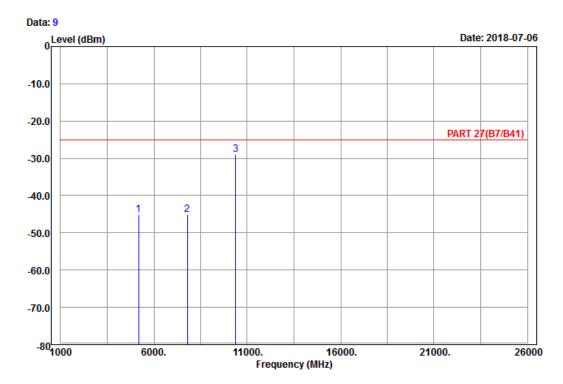

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH38000

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dB dB dB

1 5190.00 -45.04 -65.16 -25.00 -20.04 20.12 Peak 2 7785.00 -45.16 -68.49 -25.00 -20.16 23.33 Peak 3 pp 10380.00 -29.07 -55.81 -25.00 -4.07 26.74 Peak





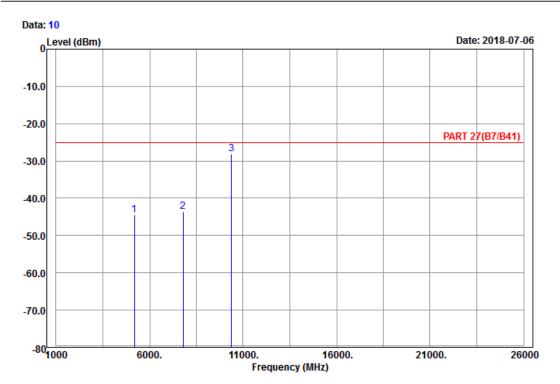

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH38000

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 5190.00 -44.36 -64.48 -25.00 -19.36 20.12 Peak 2 7785.00 -43.49 -66.82 -25.00 -18.49 23.33 Peak 3 pp 10380.00 -28.01 -54.75 -25.00 -3.01 26.74 Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

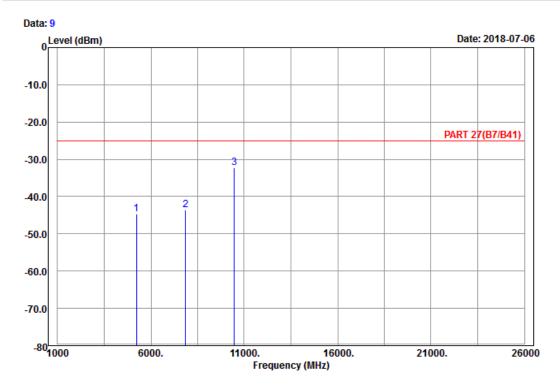

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH38225

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5235.00 -44.79 -64.95 -25.00 -19.79 20.16 Peak 2 7852.50 -43.58 -67.04 -25.00 -18.58 23.46 Peak 3 pp 10470.00 -32.35 -59.01 -25.00 -7.35 26.66 Peak





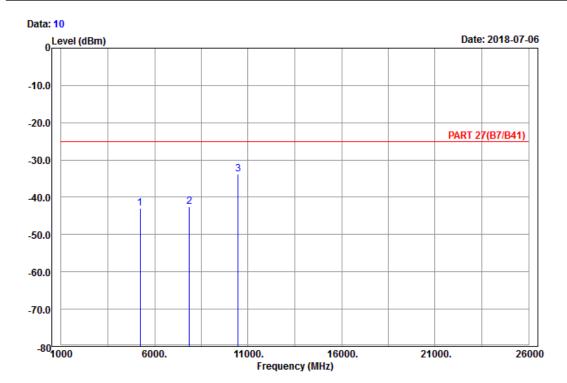

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH38225

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 5235.00 -43.04 -63.20 -25.00 -18.04 20.16 Peak 2 7852.50 -42.59 -66.05 -25.00 -17.59 23.46 Peak 3 pp 10470.00 -33.77 -60.43 -25.00 -8.77 26.66 Peak



Channel Bandwidth: 20 MHz / QPSK Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

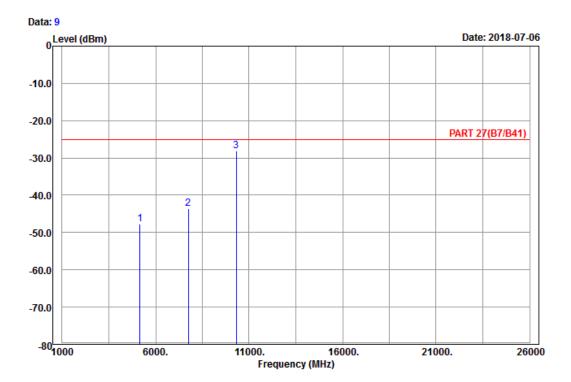

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH37850

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB dB

1 5160.00 -47.71 -67.63 -25.00 -22.71 19.92 Peak 2 7740.00 -43.63 -66.86 -25.00 -18.63 23.23 Peak 3 pp 10320.00 -28.11 -54.78 -25.00 -3.11 26.67 Peak





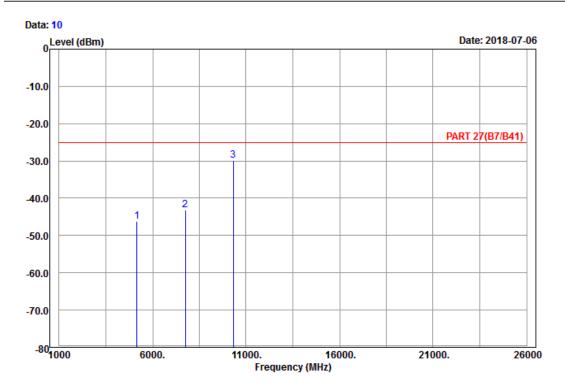

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH37850

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 5160.00 -46.10 -66.02 -25.00 -21.10 19.92 Peak 2 7740.00 -43.08 -66.31 -25.00 -18.08 23.23 Peak 3 pp 10320.00 -29.97 -56.64 -25.00 -4.97 26.67 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

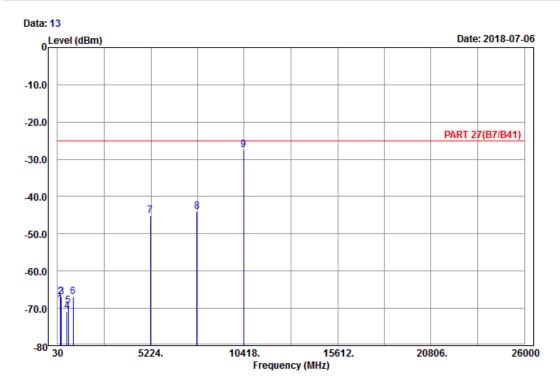

Site : 966 chamber 1


Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH38000

Tested by: Karl Lee

			Read	Limit	0ver		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	170.13	-68.96	-62.25	-25.00	-43.96	-6.71	Peak
2	207.66	-66.85	-60.77	-25.00	-41.85	-6.08	Peak
3	239.52	-66.85	-61.20	-25.00	-41.85	-5.65	Peak
4	568.80	-70.81	-69.91	-25.00	-45.81	-0.90	Peak
5	637.40	-69.38	-69.39	-25.00	-44.38	0.01	Peak
6	892.20	-66.84	-69.51	-25.00	-41.84	2.67	Peak
7	5190.00	-45.16	-65.28	-25.00	-20.16	20.12	Peak
8	7785.00	-43.97	-67.30	-25.00	-18.97	23.33	Peak
9 pr	10380.00	-27.49	-54.23	-25.00	-2.49	26.74	Peak





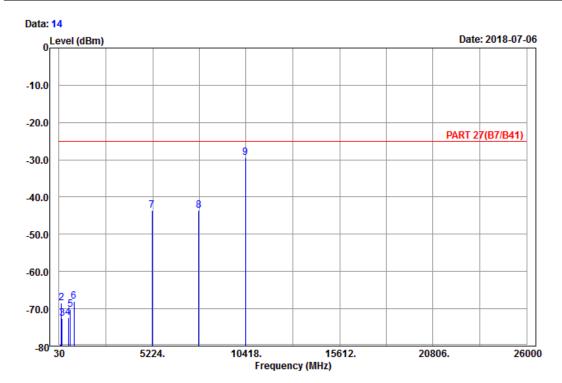

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH38000

Tested by: Karl Lee


				Read	Limit	0ver		
		Freq	Level	Level	Line	Limit	Factor	Remark
	-	MHz	dBm	dBm	dBm	dB	dB	
1		96.96	-82.48	-72.19	-25.00	-57.48	-10.29	Peak
2		159.60	-68.51	-60.84	-25.00	-43.51	-7.67	Peak
3		204.69	-72.49	-66.37	-25.00	-47.49	-6.12	Peak
4		534.50	-72.38	-69.58	-25.00	-47.38	-2.80	Peak
5		657.00	-70.21	-70.04	-25.00	-45.21	-0.17	Peak
6		860.00	-68.11	-69.86	-25.00	-43.11	1.75	Peak
7		5190.00	-43.55	-63.67	-25.00	-18.55	20.12	Peak
8		7785.00	-43.63	-66.96	-25.00	-18.63	23.33	Peak
9	pp	10380.00	-29.48	-56.22	-25.00	-4.48	26.74	Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

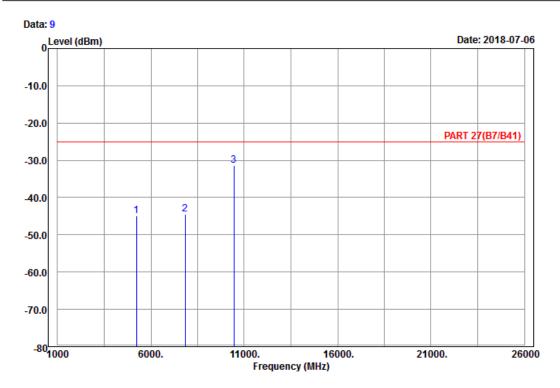

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH38150

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dB dB dB

1 5220.00 -44.99 -65.13 -25.00 -19.99 20.14 Peak 2 7830.00 -44.40 -67.80 -25.00 -19.40 23.40 Peak 3 pp 10440.00 -31.41 -58.12 -25.00 -6.41 26.71 Peak





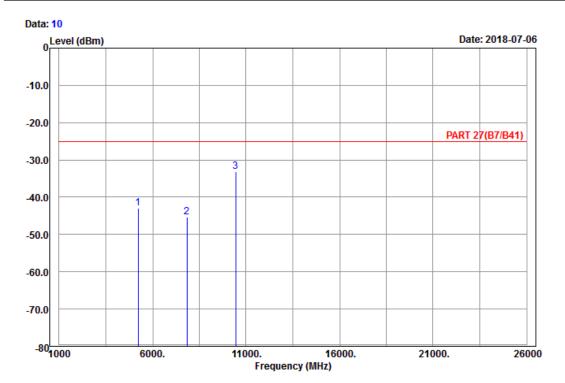

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH38150

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5220.00 -42.89 -63.03 -25.00 -17.89 20.14 Peak 2 7830.00 -45.42 -68.82 -25.00 -20.42 23.40 Peak 3 pp 10440.00 -33.11 -59.82 -25.00 -8.11 26.71 Peak



Mode B


LTE Band 38

Channel Bandwidth: 20 MHz / QPSK

Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

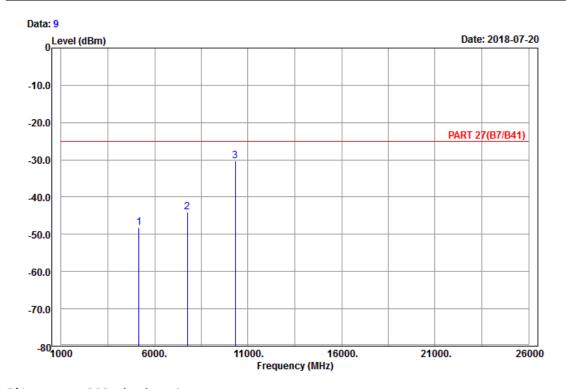

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH37850

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5160.00 -48.21 -68.13 -25.00 -23.21 19.92 Peak 2 7740.00 -44.00 -67.23 -25.00 -19.00 23.23 Peak 3 pp 10320.00 -30.22 -56.89 -25.00 -5.22 26.67 Peak





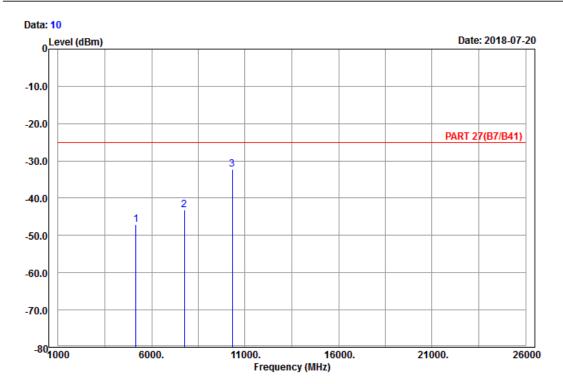

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH37850

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB


1 5160.00 -47.15 -67.07 -25.00 -22.15 19.92 Peak 2 7740.00 -43.23 -66.46 -25.00 -18.23 23.23 Peak 3 pp 10320.00 -32.25 -58.92 -25.00 -7.25 26.67 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

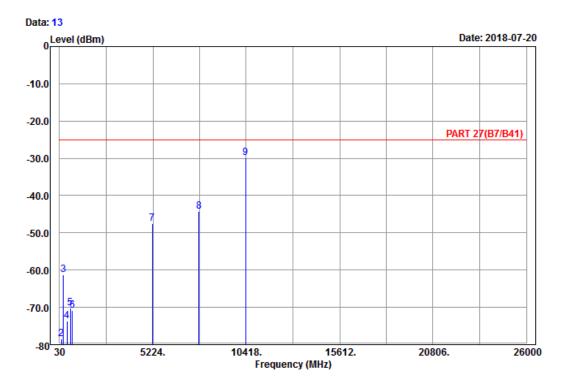

Site : 966 chamber 1


Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH38000

Tested by: Karl Lee

			Read	Limit	0ver		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	75.36	-83.91	-71.73	-25.00	-58.91	-12.18	Peak
2	127.47	-78.47	-70.64	-25.00	-53.47	-7.83	Peak
3	233.58	-61.33	-55.60	-25.00	-36.33	-5.73	Peak
4	437.20	-73.62	-70.05	-25.00	-48.62	-3.57	Peak
5	634.60	-70.28	-70.32	-25.00	-45.28	0.04	Peak
6	745.20	-70.93	-69.71	-25.00	-45.93	-1.22	Peak
7	5190.00	-47.58	-67.70	-25.00	-22.58	20.12	Peak
8	7785.00	-44.21	-67.54	-25.00	-19.21	23.33	Peak
9 pp	10380.00	-29.95	-56.69	-25.00	-4.95	26.74	Peak





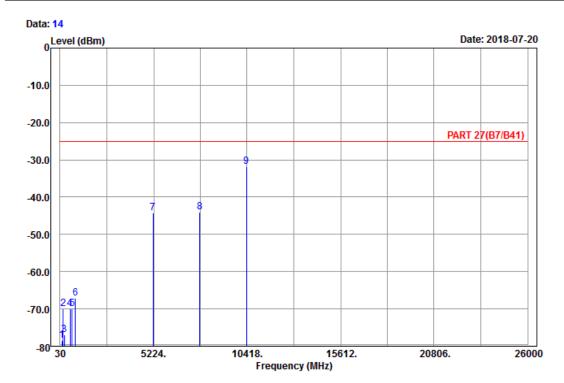

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH38000

Tested by: Karl Lee


				Read	Limit	Over		
		Freq	Level	Level	Line	Limit	Factor	Remark
	-	MHz	dBm	dBm	dBm	dB	dB	
1		129.63	-78.42	-70.77	-25.00	-53.42	-7.65	Peak
2		196.05	-70.04	-64.04	-25.00	-45.04	-6.00	Peak
3		258.96	-76.93	-71.34	-25.00	-51.93	-5.59	Peak
4		591.20	-69.87	-69.94	-25.00	-44.87	0.07	Peak
5		697.60	-69.97	-69.61	-25.00	-44.97	-0.36	Peak
6		878.90	-67.15	-69.43	-25.00	-42.15	2.28	Peak
7		5190.00	-44.25	-64.37	-25.00	-19.25	20.12	Peak
8		7785.00	-43.99	-67.32	-25.00	-18.99	23.33	Peak
9	pp	10380.00	-31.78	-58.52	-25.00	-6.78	26.74	Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

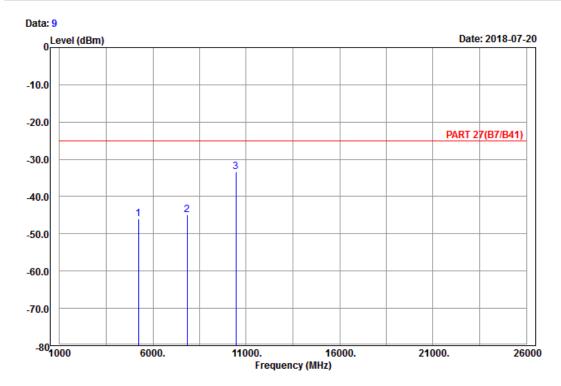

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal Remark : LTE_Band 38_Link_CH38150

Tested by: Karl Lee


Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5220.00 -45.90 -66.04 -25.00 -20.90 20.14 Peak 2 7830.00 -45.00 -68.40 -25.00 -20.00 23.40 Peak 3 pp 10440.00 -33.25 -59.96 -25.00 -8.25 26.71 Peak





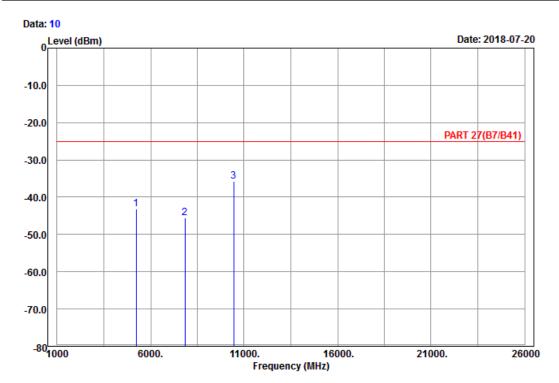

Site : 966 chamber 1

Condition: PART 27(B7/B41) Vertical Remark : LTE_Band 38_Link_CH38150

Tested by: Karl Lee

Read Limit Over
Freq Level Level Line Limit Factor Remark

MHz dBm dBm dBm dB dB

1 5220.00 -43.21 -63.35 -25.00 -18.21 20.14 Peak 2 7830.00 -45.65 -69.05 -25.00 -20.65 23.40 Peak 3 pp 10440.00 -35.85 -62.56 -25.00 -10.85 26.71 Peak



5 Pictures of Test Arrangements
Please refer to the attached file (Test Setup Photo).



Appendix - Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-2-26052180 Fax: 886-2-26051924 Tel: 886-3-6668565 Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---