



# FCC RF Test Report

**APPLICANT** : HMD Global Oy  
**EQUIPMENT** : Smart Phone  
**BRAND NAME** : Nokia  
**MODEL NAME** : TA-1055  
**FCC ID** : 2AJOTTA-1055  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

This is a variant report. The product was received on Dec. 07, 2017 and testing was completed on Mar. 05, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

---

Reviewed by: Joseph Lin / Supervisor

---

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**

---

**SPORTON INTERNATIONAL INC.**

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID: 2AJOTTA-1055

Page Number : 1 of 27

Report Issued Date : Mar. 16, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.4



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT .....	5
1.5 Testing Location .....	6
1.6 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	9
2.6 Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement .....	11
3.2 Maximum Conducted Output Power Measurement .....	14
3.3 Power Spectral Density Measurement .....	15
3.4 Unwanted Emissions Measurement .....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Automatically Discontinue Transmission .....	24
3.7 Antenna Requirements.....	25
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>26</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>27</b>
<b>APPENDIX A. CONDUCTED TEST RESULTS</b>	
<b>APPENDIX B. AC CONDUCTED EMISSION TEST RESULT</b>	
<b>APPENDIX C. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS</b>	
<b>APPENDIX E. DUTY CYCLE PLOTS</b>	
<b>APPENDIX F. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7D0706-01F	Rev. 01	Initial issue of report	Mar. 16, 2018



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 10.85 dB at 32.970 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.74 dB at 0.195 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-
<b>Remark:</b> This is a variant report which can be referred Product Equality Declaration. Since the test result is not affected by the changes, the FR7D0706-01F test report reuses test data from the FR7D0706F test report.					

# 1 General Description

## 1.1 Applicant

HMD Global Oy  
Karaportti 2, 02610 Espoo, Finland

## 1.2 Manufacturer

HMD Global Oy  
Karaportti 2, 02610 Espoo, Finland

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS

Product specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: Single Loop Antenna GPS/GLONASS/BDS: PIFA Antenna

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH12-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : LTE Band 38 Idle + Bluetooth Link + WLAN (5GHz) Link + Color Bar + Earphone 2 + USB Cable 1 (Charging from Adapter 3)
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter 1, Earphone 1, and USB Cable 1	

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-



## 2.3 Connection Diagram of Test System



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility "QRCT" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup

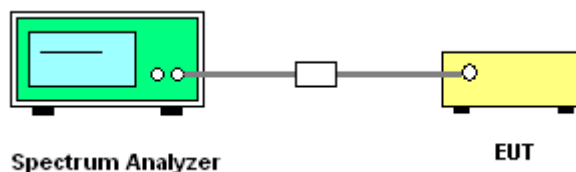

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

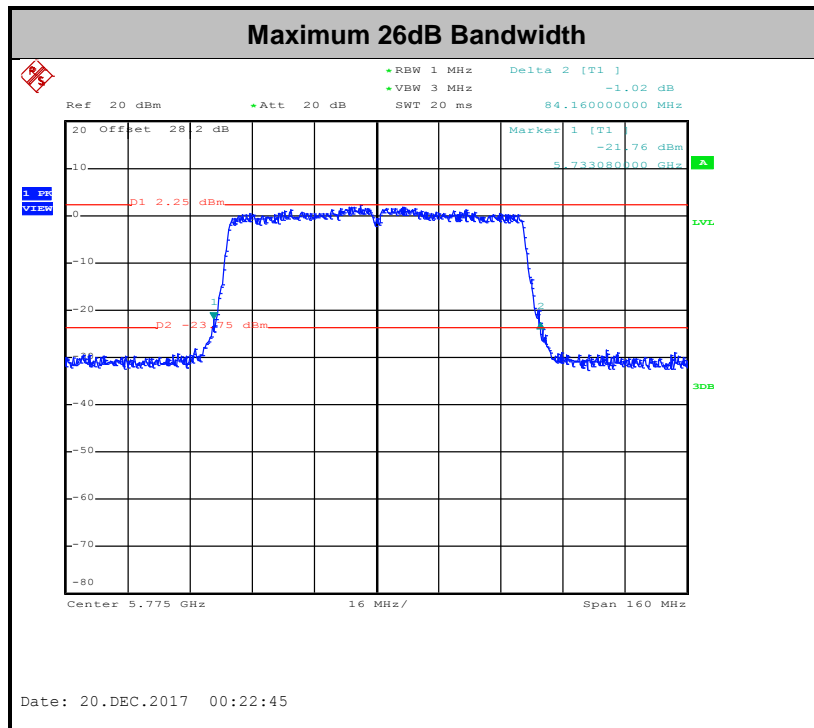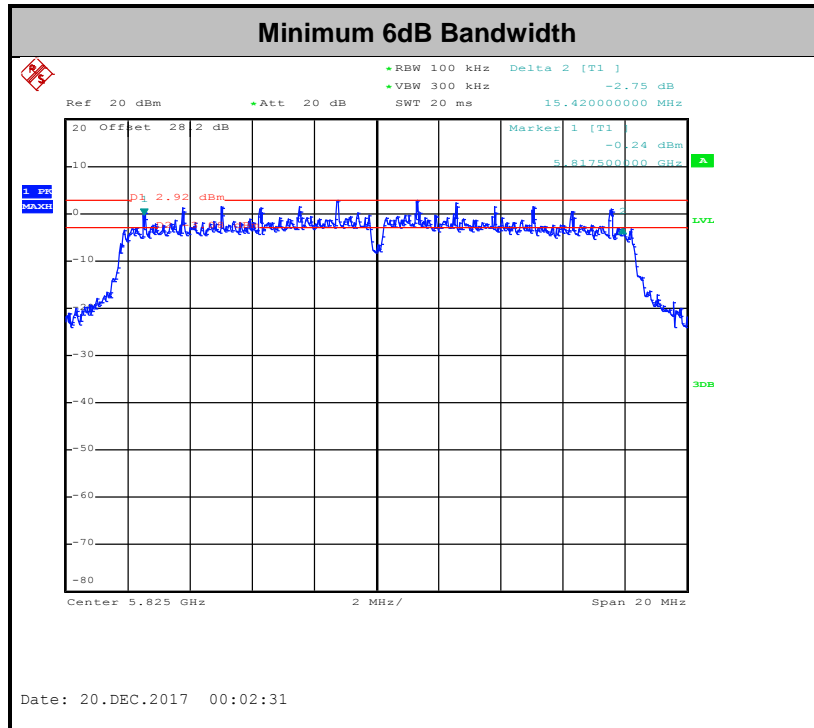

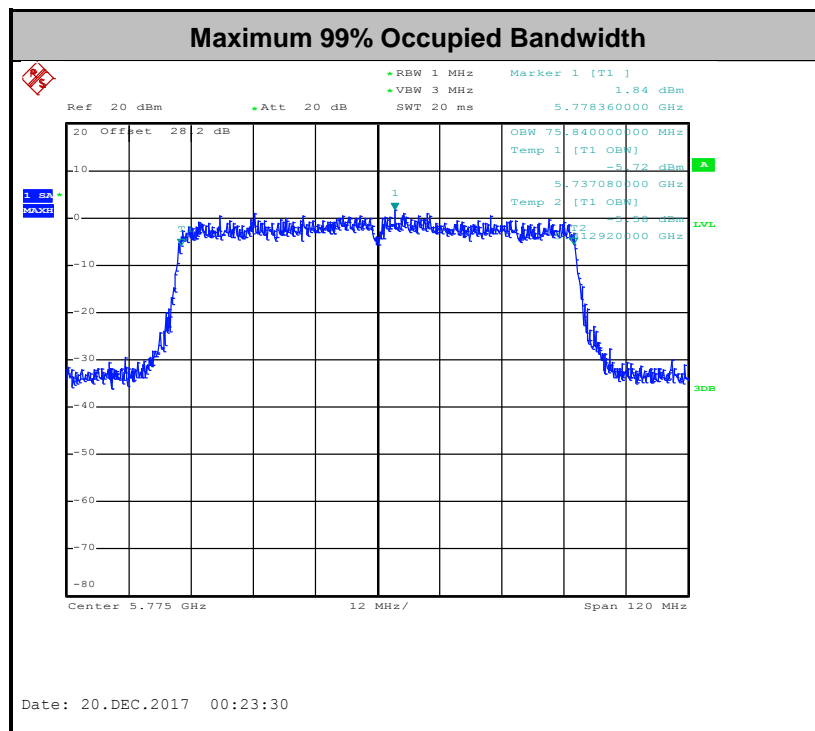

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

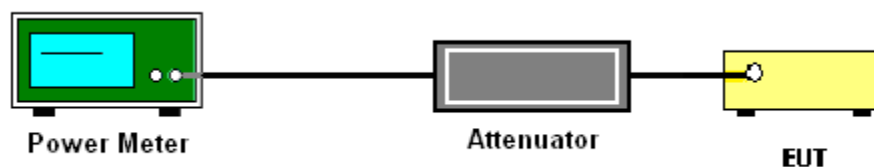

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.3.3 Test Procedures**


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section F) Maximum power spectral density.

##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

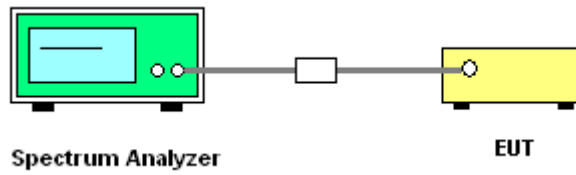

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

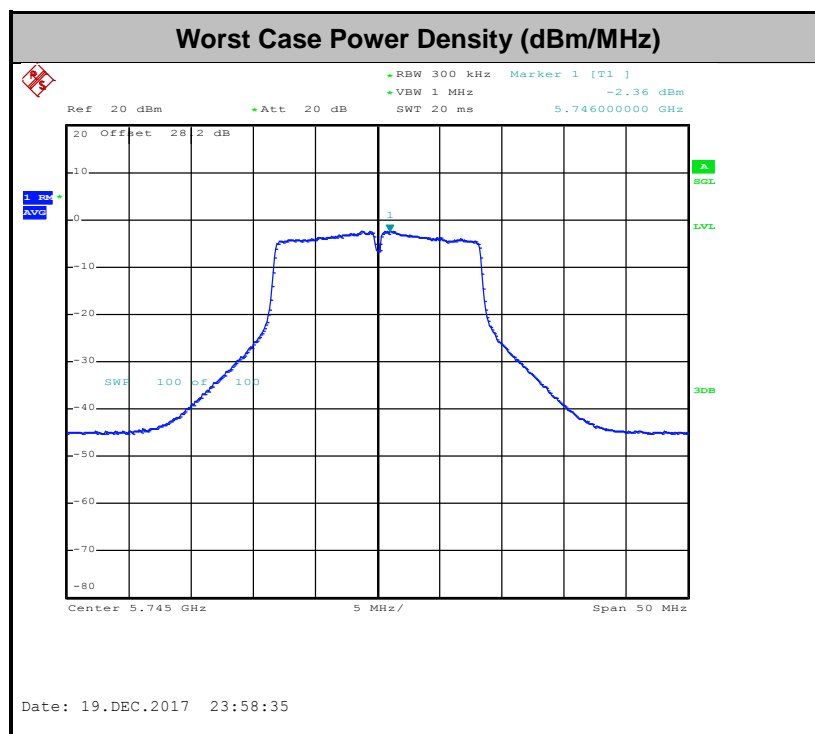





### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold




(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- $RBW = 1 \text{ MHz}$
  - $VBW = 10 \text{ Hz}$ , when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
  3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
  4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
  5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
  6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
  7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

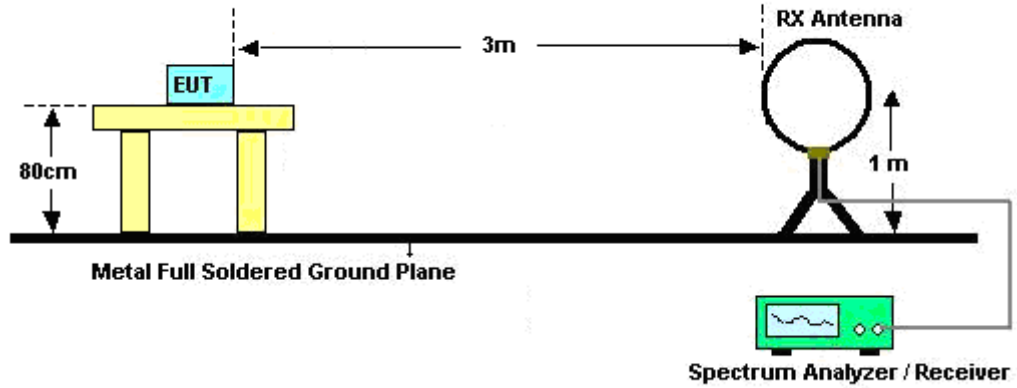

For radiated emissions from 30MHz to 1GHz

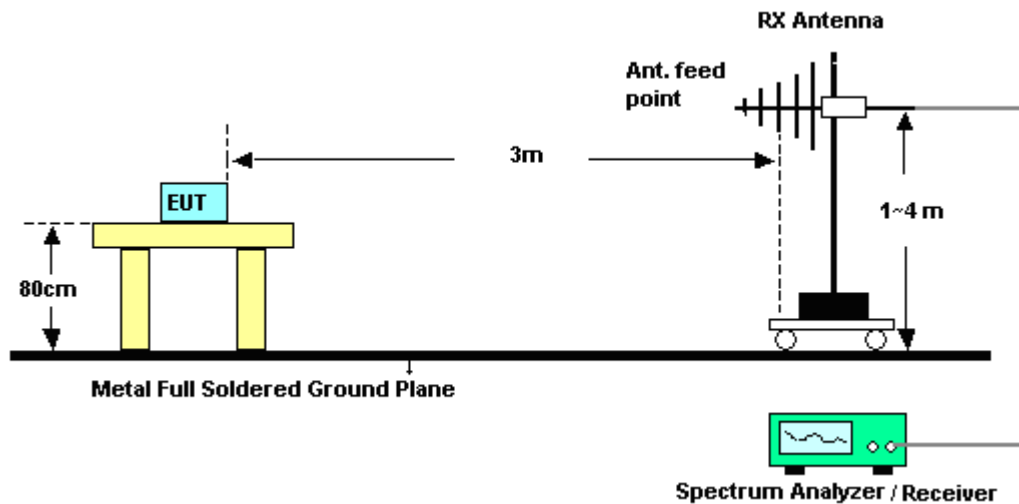

**For radiated emissions above 1GHz**

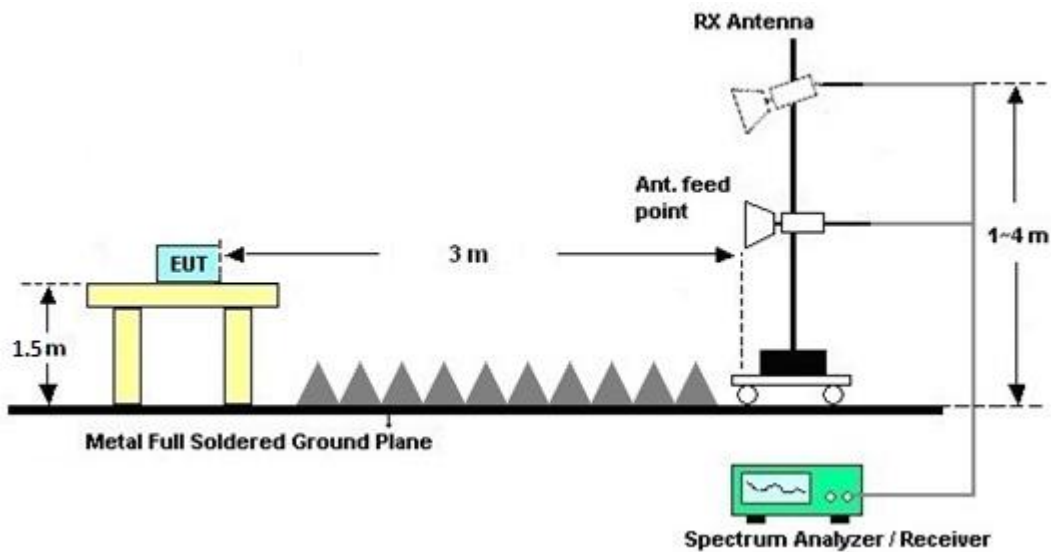

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

### 3.4.7 Duty Cycle

Please refer to Appendix E.

### 3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

## 3.5 AC Conducted Emission Measurement

### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

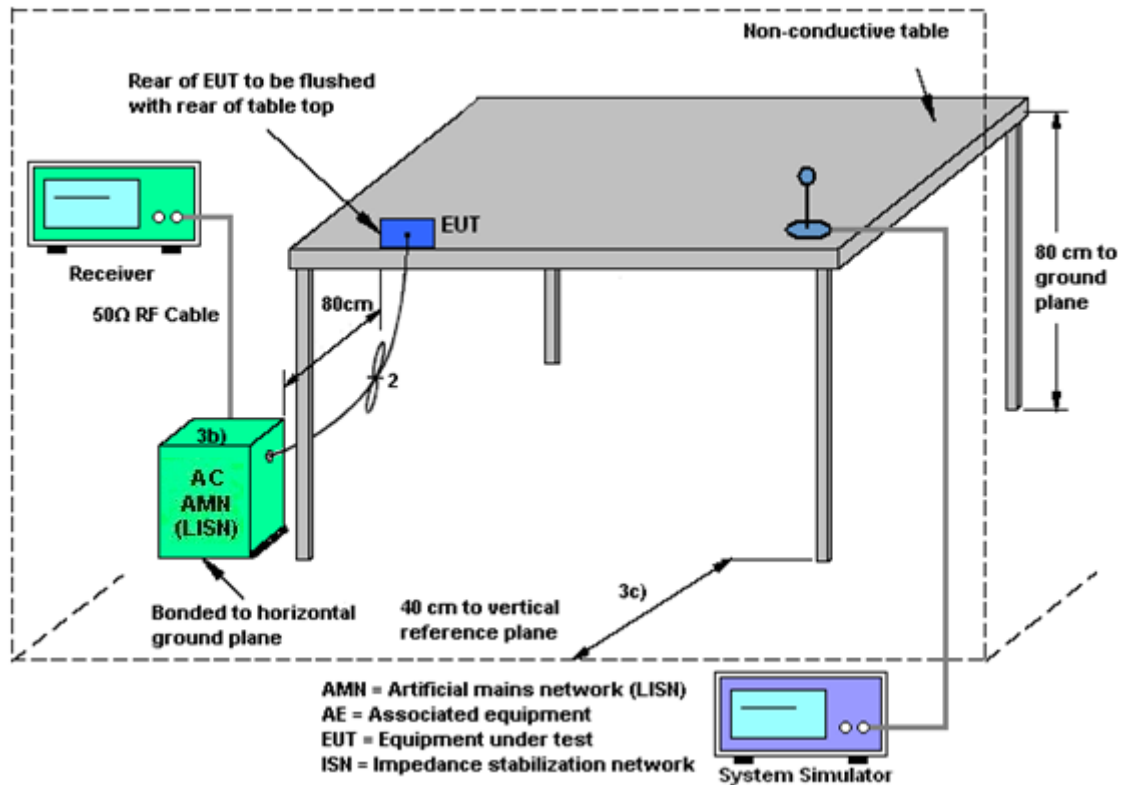

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.





## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	Dec.12, 2017~ Dec. 20, 2017	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz	Sep. 07, 2017	Dec.12, 2017~ Dec. 20, 2017	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Dec.12, 2017~ Dec. 20, 2017	Jun. 19, 2018	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 05, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Mar. 05, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Mar. 05, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2017	Mar. 05, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 05, 2018	N/A	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Dec. 18, 2017~ Dec. 20, 2017	Jul. 17, 2018	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Dec. 18, 2017~ Dec. 20, 2017	Oct. 19, 2018	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 23, 2016	Dec. 18, 2017~ Dec. 20, 2017	Dec. 22, 2017	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Dec. 18, 2017~ Dec. 20, 2017	Oct. 19, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2017	Dec. 18, 2017~ Dec. 20, 2017	Mar. 22, 2018	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800	2025787	1GHz~18GHz	Feb. 13, 2017	Dec. 18, 2017~ Dec. 20, 2017	Feb. 12, 2018	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 12, 2017	Dec. 18, 2017~ Dec. 20, 2017	Jan. 11, 2018	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 23, 2017	Dec. 18, 2017~ Dec. 20, 2017	Mar. 22, 2018	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Dec. 18, 2017~ Dec. 20, 2017	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Dec. 18, 2017~ Dec. 20, 2017	N/A	Radiation (03CH12-HY)
Attenuator	Fairview Microwave	SA18S5W-10	n/a	10db	Mar. 24, 2017	Dec. 18, 2017~ Dec. 20, 2017	Mar. 23, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 27, 2017	Dec. 18, 2017~ Dec. 20, 2017	Apr. 26, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&04	30MHz to 1GHz	Jan. 07, 2017	Dec. 18, 2017~ Dec. 20, 2017	Jan. 06, 2018	Radiation (03CH12-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7
--	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1
--	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
--	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7
--	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Shiming Liu/Derek Hsu	Temperature:	21~25	°C
Test Date:	2017/12/12~2017/12/20	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV									
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.60	25.08	15.66	0.5	Pass
11a	6Mbps	1	157	5785	17.50	24.89	15.78	0.5	Pass
11a	6Mbps	1	165	5825	17.45	23.28	15.42	0.5	Pass
HT20	MCS 0	1	149	5745	18.60	25.20	16.74	0.5	Pass
HT20	MCS 0	1	157	5785	18.55	25.41	16.02	0.5	Pass
HT20	MCS 0	1	165	5825	18.80	25.40	16.02	0.5	Pass
HT40	MCS 0	1	151	5755	36.60	41.52	36.28	0.5	Pass
HT40	MCS 0	1	159	5795	36.60	42.00	35.68	0.5	Pass
VHT80	MCS 0	1	155	5775	75.84	84.16	75.04	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.20	13.99	30.00	-5.26		Pass
11a	6Mbps	1	157	5785	0.20	13.95	30.00	-5.26		Pass
11a	6Mbps	1	165	5825	0.20	13.76	30.00	-5.26		Pass
HT20	MCS 0	1	149	5745	0.22	12.97	30.00	-5.26		Pass
HT20	MCS 0	1	157	5785	0.22	12.85	30.00	-5.26		Pass
HT20	MCS 0	1	165	5825	0.22	12.62	30.00	-5.26		Pass
HT40	MCS 0	1	151	5755	0.36	12.92	30.00	-5.26		Pass
HT40	MCS 0	1	159	5795	0.36	12.89	30.00	-5.26		Pass
VHT20	MCS 0	1	149	5745	0.25	10.97	30.00	-5.26		Pass
VHT20	MCS 0	1	157	5785	0.25	10.93	30.00	-5.26		Pass
VHT20	MCS 0	1	165	5825	0.25	10.60	30.00	-5.26		Pass
VHT40	MCS 0	1	151	5755	0.39	10.90	30.00	-5.26		Pass
VHT40	MCS 0	1	159	5795	0.39	10.81	30.00	-5.26		Pass
VHT80	MCS 0	1	155	5775	0.70	10.96	30.00	-5.26		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.20	2.22	0.06	30.00	-5.26	Pass
11a	6Mbps	1	157	5785	0.20	2.22	-0.10	30.00	-5.26	Pass
11a	6Mbps	1	165	5825	0.20	2.22	-0.45	30.00	-5.26	Pass
HT20	MCS 0	1	149	5745	0.22	2.22	-1.31	30.00	-5.26	Pass
HT20	MCS 0	1	157	5785	0.22	2.22	-1.57	30.00	-5.26	Pass
HT20	MCS 0	1	165	5825	0.22	2.22	-1.87	30.00	-5.26	Pass
HT40	MCS 0	1	151	5755	0.36	2.22	-4.38	30.00	-5.26	Pass
HT40	MCS 0	1	159	5795	0.36	2.22	-4.64	30.00	-5.26	Pass
VHT80	MCS 0	1	155	5775	0.70	2.22	-9.29	30.00	-5.26	Pass



## **Appendix B. AC Conducted Emission Test Results**


<b>Test Engineer :</b>	Shareef Yu	<b>Temperature :</b>	21~23°C
		<b>Relative Humidity :</b>	53~56%



## EUT Information

Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

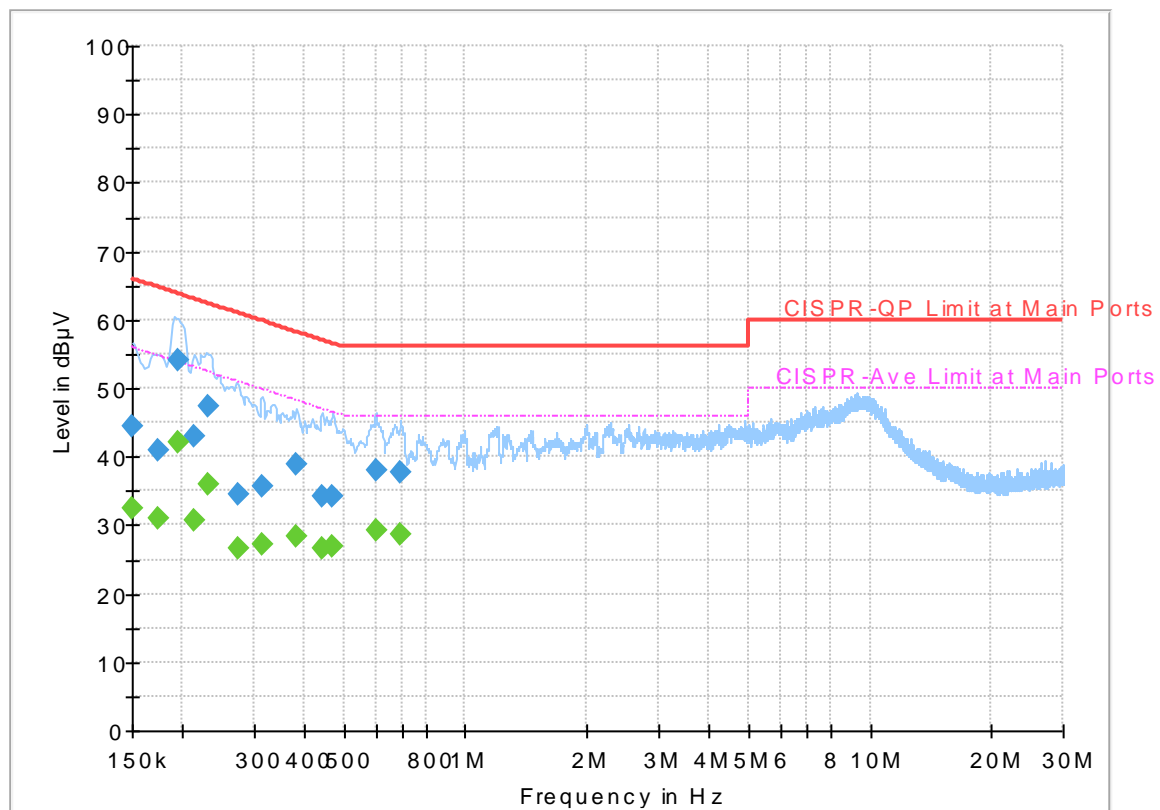

## Final\_Result


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	32.38	56.00	23.62	L1	OFF	19.5
0.150000	44.52	---	66.00	21.48	L1	OFF	19.5
0.174750	---	30.99	54.73	23.74	L1	OFF	19.5
0.174750	40.89	---	64.73	23.84	L1	OFF	19.5
0.195000	---	42.23	53.82	11.59	L1	OFF	19.5
0.195000	54.08	---	63.82	9.74	L1	OFF	19.5
0.213000	---	30.69	53.09	22.40	L1	OFF	19.5
0.213000	43.08	---	63.09	20.01	L1	OFF	19.5
0.231000	---	35.82	52.41	16.59	L1	OFF	19.5
0.231000	47.35	---	62.41	15.06	L1	OFF	19.5
0.273750	---	26.68	51.00	24.32	L1	OFF	19.5
0.273750	34.45	---	61.00	26.55	L1	OFF	19.5
0.314250	---	27.08	49.86	22.78	L1	OFF	19.5
0.314250	35.53	---	59.86	24.33	L1	OFF	19.5
0.384000	---	28.49	48.19	19.70	L1	OFF	19.5
0.384000	38.76	---	58.19	19.43	L1	OFF	19.5
0.442500	---	26.47	47.02	20.55	L1	OFF	19.5
0.442500	34.34	---	57.02	22.68	L1	OFF	19.5
0.469500	---	26.79	46.52	19.73	L1	OFF	19.5
0.469500	34.21	---	56.52	22.31	L1	OFF	19.5
0.600000	---	29.15	46.00	16.85	L1	OFF	19.5

<b>0.600000</b>	<b>37.87</b>	<b>---</b>	<b>56.00</b>	<b>18.13</b>	<b>L1</b>	<b>OFF</b>	<b>19.5</b>
<b>0.690000</b>	<b>---</b>	<b>28.71</b>	<b>46.00</b>	<b>17.29</b>	<b>L1</b>	<b>OFF</b>	<b>19.5</b>
<b>0.690000</b>	<b>37.70</b>	<b>---</b>	<b>56.00</b>	<b>18.30</b>	<b>L1</b>	<b>OFF</b>	<b>19.5</b>

## EUT Information

Test Mode : Mode 1  
Test Voltage : 120Vac/60Hz  
Phase : Neutral

Full Spectrum

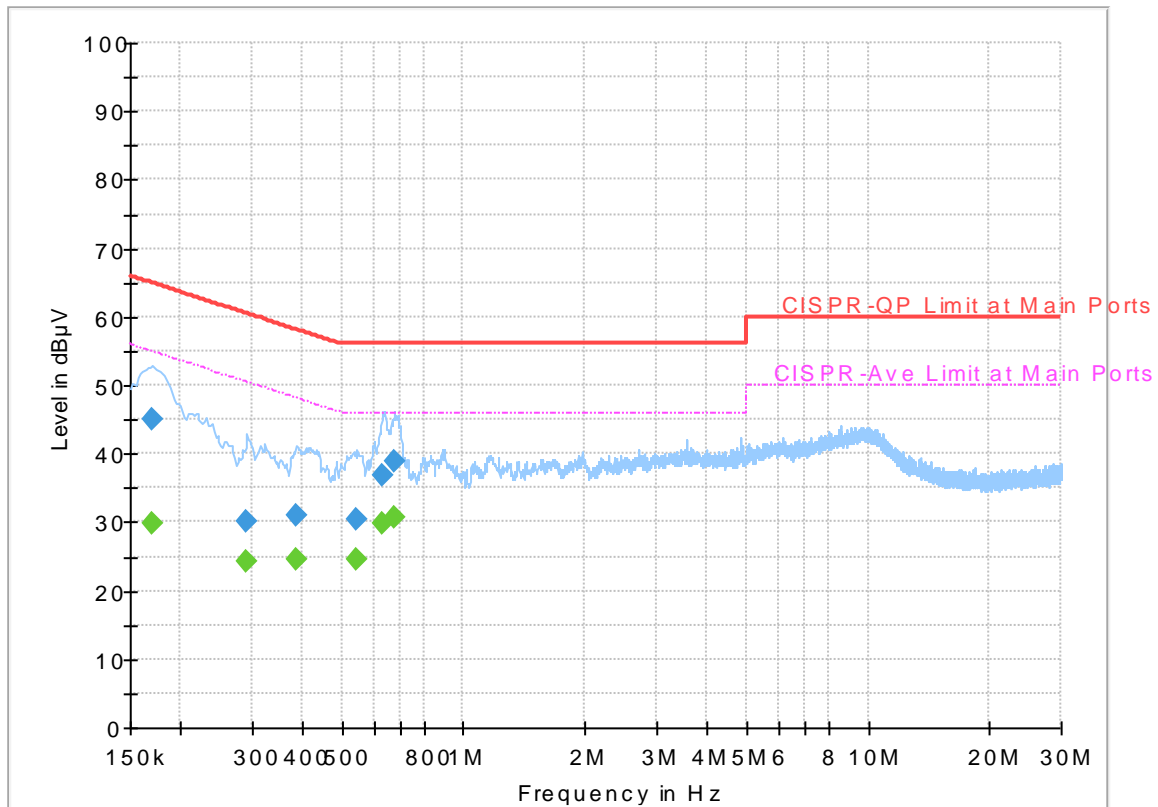

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170250	---	29.91	54.95	25.04	N	OFF	19.5
0.170250	45.04	---	64.95	19.91	N	OFF	19.5
0.291750	---	24.18	50.47	26.29	N	OFF	19.5
0.291750	30.17	---	60.47	30.30	N	OFF	19.5
0.386250	---	24.63	48.14	23.51	N	OFF	19.5
0.386250	30.99	---	58.14	27.15	N	OFF	19.5
0.546000	---	24.49	46.00	21.51	N	OFF	19.5
0.546000	30.51	---	56.00	25.49	N	OFF	19.5
0.633750	---	29.77	46.00	16.23	N	OFF	19.5
0.633750	36.96	---	56.00	19.04	N	OFF	19.5
0.676500	---	30.56	46.00	15.44	N	OFF	19.5
0.676500	38.98	---	56.00	17.02	N	OFF	19.5



## Appendix C. Radiated Spurious Emission

Test Engineer :	Watt Tseng, Nick Yu, and Karl Hou	Temperature :	23~24°C
		Relative Humidity :	65~67%

### Band 4 - 5725~5850MHz

#### WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 149 5745MHz		5606.2	49.84	-18.36	68.2	42.35	32.14	6.34	30.99	114	67	P	H
		5699.6	53.21	-51.7	104.91	45.59	32.27	6.36	31.01	114	67	P	H
		5718.4	54.8	-55.55	110.35	47.14	32.31	6.37	31.02	114	67	P	H
		5722.8	55.16	-62.02	117.18	47.5	32.31	6.37	31.02	114	67	P	H
	*	5745	104.38	-	-	96.7	32.34	6.37	31.03	114	67	P	H
	*	5745	93.3	-	-	85.62	32.34	6.37	31.03	114	67	A	H
													H
													H
		5638.4	49.11	-19.09	68.2	41.57	32.19	6.35	31	287	110	P	V
		5697.8	51.84	-51.74	103.58	44.22	32.27	6.36	31.01	287	110	P	V
		5717.4	54.11	-55.96	110.07	46.48	32.29	6.36	31.02	287	110	P	V
		5722.4	56.1	-60.17	116.27	48.44	32.31	6.37	31.02	287	110	P	V
	*	5745	105.19	-	-	97.51	32.34	6.37	31.03	287	110	P	V
	*	5745	94.1	-	-	86.42	32.34	6.37	31.03	287	110	A	V
													V
													V



WIFI	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 157 5785MHz		5626	49.24	-18.96	68.2	41.72	32.17	6.34	30.99	100	64	P	H
		5677.8	49.73	-39.08	88.81	42.15	32.24	6.35	31.01	100	64	P	H
		5713.6	50.18	-58.83	109.01	42.55	32.29	6.36	31.02	100	64	P	H
		5721.8	50.55	-64.35	114.9	42.89	32.31	6.37	31.02	100	64	P	H
	*	5785	104.81	-	-	97.09	32.39	6.38	31.05	100	64	P	H
	*	5785	93.71	-	-	85.99	32.39	6.38	31.05	100	64	A	H
		5854.8	50.24	-61.02	111.26	42.37	32.51	6.42	31.06	100	64	P	H
		5863.8	50.4	-57.93	108.33	42.53	32.51	6.43	31.07	100	64	P	H
		5898.6	50.37	-37.33	87.7	42.43	32.56	6.46	31.08	100	64	P	H
		5945.4	50.25	-17.95	68.2	42.23	32.63	6.48	31.09	100	64	P	H
													H
													H
		5616.2	49.6	-18.6	68.2	42.08	32.17	6.34	30.99	301	109	P	V
		5698.2	49.79	-54.08	103.87	42.17	32.27	6.36	31.01	301	109	P	V
		5715.2	49.9	-59.56	109.46	42.27	32.29	6.36	31.02	301	109	P	V
		5723.6	50.51	-68.5	119.01	42.85	32.31	6.37	31.02	301	109	P	V
	*	5785	105.03	-	-	97.31	32.39	6.38	31.05	301	109	P	V
	*	5785	94.01	-	-	86.29	32.39	6.38	31.05	301	109	A	V
		5851.4	51.05	-67.96	119.01	43.21	32.48	6.42	31.06	301	109	P	V
		5859.6	50.52	-58.99	109.51	42.66	32.51	6.42	31.07	301	109	P	V
		5887.8	50.3	-45.4	95.7	42.38	32.56	6.44	31.08	301	109	P	V
		5941	50.16	-18.04	68.2	42.14	32.63	6.48	31.09	301	109	P	V
													V
													V



WIFI	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 165 5825MHz	*	5825	105.12	-	-	97.32	32.46	6.39	31.05	114	65	P	H
	*	5825	94	-	-	86.2	32.46	6.39	31.05	114	65	A	H
		5854	53.46	-59.62	113.08	45.59	32.51	6.42	31.06	114	65	P	H
		5868.8	55.3	-51.63	106.93	47.43	32.51	6.43	31.07	114	65	P	H
		5883.4	51.41	-47.55	98.96	43.52	32.53	6.44	31.08	114	65	P	H
		5933.2	50.62	-17.58	68.2	42.63	32.6	6.48	31.09	114	65	P	H
													H
													H
	*	5825	105.13	-	-	97.33	32.46	6.39	31.05	327	112	P	V
	*	5825	94.04	-	-	86.24	32.46	6.39	31.05	327	112	A	V
		5852.8	51.33	-64.49	115.82	43.49	32.48	6.42	31.06	327	112	P	V
		5860.2	54.18	-55.16	109.34	46.32	32.51	6.42	31.07	327	112	P	V
		5905.2	51	-31.81	82.81	43.04	32.58	6.46	31.08	327	112	P	V
		5942.8	50.47	-17.73	68.2	42.45	32.63	6.48	31.09	327	112	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 149 5745MHz		11490	47.67	-26.33	74	62.62	40.11	9.82	65.39	100	0	P	H
		17235	50.62	-17.58	68.2	60.62	41.54	12.09	64.27	100	0	P	H
													H
													H
		11490	47.55	-26.45	74	62.5	40.11	9.82	65.39	100	0	P	V
		17235	51.17	-17.03	68.2	61.17	41.54	12.09	64.27	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	48.44	-25.56	74	63.51	39.93	9.86	65.37	100	0	P	H
		17355	49.75	-18.45	68.2	59.08	41.96	12.19	64.11	100	0	P	H
													H
													H
		11570	47.93	-26.07	74	63	39.93	9.86	65.37	100	0	P	V
		17355	48.99	-19.21	68.2	58.32	41.96	12.19	64.11	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	47.88	-26.12	74	63.04	39.77	9.9	65.34	100	0	P	H
		17475	47.68	-20.52	68.2	56.34	42.38	12.29	63.95	100	0	P	H
													H
													H
		11650	48.18	-25.82	74	63.34	39.77	9.9	65.34	100	0	P	V
		17475	47.92	-20.28	68.2	56.58	42.38	12.29	63.95	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Band 4 5725~5850MHz

## WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		5635.2	49.14	-19.06	68.2	41.6	32.19	6.35	31	110	63	P	H
		5697	53.11	-49.88	102.99	45.49	32.27	6.36	31.01	110	63	P	H
		5713.6	54.39	-54.62	109.01	46.76	32.29	6.36	31.02	110	63	P	H
		5720.2	54.49	-56.77	111.26	46.83	32.31	6.37	31.02	110	63	P	H
	*	5755	99.9	-	-	92.2	32.36	6.37	31.03	110	63	P	H
	*	5755	89.15	-	-	81.45	32.36	6.37	31.03	110	63	A	H
		5853	51.35	-64.01	115.36	43.51	32.48	6.42	31.06	110	63	P	H
		5870.6	50.04	-56.39	106.43	42.15	32.53	6.43	31.07	110	63	P	H
		5905	50.36	-32.6	82.96	42.4	32.58	6.46	31.08	110	63	P	H
		5933.4	50.74	-17.46	68.2	42.75	32.6	6.48	31.09	110	63	P	H
													H
													H
		5625.2	50.03	-18.17	68.2	42.51	32.17	6.34	30.99	285	111	P	V
		5697	54.6	-48.39	102.99	46.98	32.27	6.36	31.01	285	111	P	V
		5712.4	54.33	-54.34	108.67	46.7	32.29	6.36	31.02	285	111	P	V
		5722	55.72	-59.64	115.36	48.06	32.31	6.37	31.02	285	111	P	V
	*	5755	100.03	-	-	92.33	32.36	6.37	31.03	285	111	P	V
	*	5755	89.42	-	-	81.72	32.36	6.37	31.03	285	111	A	V
		5852.8	51.29	-64.53	115.82	43.45	32.48	6.42	31.06	285	111	P	V
		5856.8	49.83	-60.47	110.3	41.96	32.51	6.42	31.06	285	111	P	V
		5903	49.55	-34.89	84.44	41.61	32.56	6.46	31.08	285	111	P	V
		5928.4	50.56	-17.64	68.2	42.58	32.6	6.47	31.09	285	111	P	V
													V
													V





WIFI	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 159 5795MHz		5647.2	49.43	-18.77	68.2	41.89	32.19	6.35	31	113	67	P	H
		5663.2	50.16	-27.84	78	42.6	32.22	6.35	31.01	113	67	P	H
		5719.2	50.23	-60.35	110.58	42.57	32.31	6.37	31.02	113	67	P	H
		5724.6	52.21	-69.08	121.29	44.55	32.31	6.37	31.02	113	67	P	H
	*	5795	99.74	-	-	92	32.41	6.38	31.05	113	67	P	H
	*	5795	89.27	-	-	81.53	32.41	6.38	31.05	113	67	A	H
		5853	55.15	-60.21	115.36	47.31	32.48	6.42	31.06	113	67	P	H
		5858.4	54.61	-55.24	109.85	46.75	32.51	6.42	31.07	113	67	P	H
		5876.6	51.91	-52.1	104.01	44.02	32.53	6.43	31.07	113	67	P	H
		5936	50.02	-18.18	68.2	42.03	32.6	6.48	31.09	113	67	P	H
													H
													H
		5643.2	49.43	-18.77	68.2	41.89	32.19	6.35	31	294	110	P	V
		5653.6	49.76	-21.11	70.87	42.19	32.22	6.35	31	294	110	P	V
		5717.6	50.08	-60.05	110.13	42.42	32.31	6.37	31.02	294	110	P	V
		5725	50.22	-71.98	122.2	42.56	32.31	6.37	31.02	294	110	P	V
	*	5795	100.35	-	-	92.61	32.41	6.38	31.05	294	110	P	V
	*	5795	89.8	-	-	82.06	32.41	6.38	31.05	294	110	A	V
		5850.8	55.91	-64.47	120.38	48.07	32.48	6.42	31.06	294	110	P	V
		5860	55.04	-54.36	109.4	47.18	32.51	6.42	31.07	294	110	P	V
		5876	51.54	-52.92	104.46	43.65	32.53	6.43	31.07	294	110	P	V
		5946.6	50.67	-17.53	68.2	42.65	32.63	6.48	31.09	294	110	P	V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 155 5775MHz		5648.2	49.48	-18.72	68.2	41.94	32.19	6.35	31	100	61	P	H
		5695	51.76	-49.75	101.51	44.14	32.27	6.36	31.01	100	61	P	H
		5715.6	54.92	-54.65	109.57	47.29	32.29	6.36	31.02	100	61	P	H
		5724.2	54.36	-66.02	120.38	46.7	32.31	6.37	31.02	100	61	P	H
	*	5775	94.27	-	-	86.54	32.39	6.38	31.04	100	61	P	H
	*	5775	83.17	-	-	75.44	32.39	6.38	31.04	100	61	A	H
		5851.2	52.71	-66.75	119.46	44.87	32.48	6.42	31.06	100	61	P	H
		5860.2	51.47	-57.87	109.34	43.61	32.51	6.42	31.07	100	61	P	H
		5888.8	50.21	-44.75	94.96	42.29	32.56	6.44	31.08	100	61	P	H
		5933.8	50.35	-17.85	68.2	42.36	32.6	6.48	31.09	100	61	P	H
													H
													H
		5644.8	49.37	-18.83	68.2	41.83	32.19	6.35	31	301	110	P	V
		5698.8	50.65	-53.67	104.32	43.03	32.27	6.36	31.01	301	110	P	V
		5717.6	54.04	-56.09	110.13	46.38	32.31	6.37	31.02	301	110	P	V
		5724.8	55.05	-66.69	121.74	47.39	32.31	6.37	31.02	301	110	P	V
	*	5775	95.36	-	-	87.63	32.39	6.38	31.04	301	110	P	V
	*	5775	84.14	-	-	76.41	32.39	6.38	31.04	301	110	A	V
		5851.6	52.82	-65.73	118.55	44.98	32.48	6.42	31.06	301	110	P	V
		5862.4	52.87	-55.86	108.73	45	32.51	6.43	31.07	301	110	P	V
		5904.4	50.17	-33.24	83.41	42.23	32.56	6.46	31.08	301	110	P	V
		5927.4	50.35	-17.85	68.2	42.37	32.6	6.47	31.09	301	110	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11n HT40 LF		68.34	20.57	-19.43	40	38.07	12.2	0.68	30.43	-	-	P	H
		103.98	27.51	-15.99	43.5	40.78	16.27	0.8	30.39	-	-	P	H
		178.77	24.42	-19.08	43.5	38.42	15.04	1.09	30.3	-	-	P	H
		505.8	26.12	-19.88	46	30.13	23.9	1.8	29.78	-	-	P	H
		645.8	28.56	-17.44	46	29.72	26.3	2.02	29.6	-	-	P	H
		875.4	33.05	-12.95	46	30.69	29.02	2.39	29.2	100	0	P	H
													H
													H
													H
													H
													H
													H
		32.97	29.15	-10.85	40	35.91	23.01	0.48	30.22	100	0	P	V
		109.38	26.21	-17.29	43.5	39.01	16.75	0.8	30.39	-	-	P	V
		135.3	26.42	-17.08	43.5	38.54	17.22	0.95	30.35	-	-	P	V
		476.4	26.35	-19.65	46	30.98	23.38	1.77	29.84	-	-	P	V
		687.1	29.13	-16.87	46	30.1	26.34	2.13	29.55	-	-	P	V
		746.6	31.45	-14.55	46	30.71	27.87	2.21	29.44	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>H</b> orizontal or <b>V</b> ertical

**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots



Test Engineer :	Watt Tseng, Nick Yu, and Karl Hou	Temperature :	23~24°C
		Relative Humidity :	65~67%

### Note symbol

-L	Low channel location
-R	High channel location

### Band 4 - 5725~5850MHz




### WIFI 802.11a (Band Edge @ 3m)

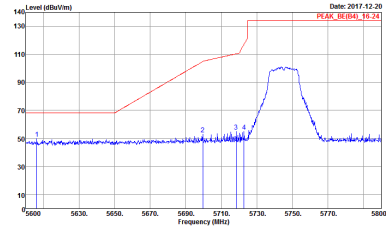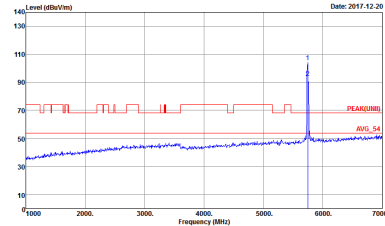WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11a CH149 5745MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00_10-24) 3m HORN_91200_1328 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000Hz SW1:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK(0000) 3m HORN_91200_1328 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000Hz SW1:Auto</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11a CH149 5745MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE(94)_16-24 3m HORN_5120D_1328 VERTICAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_UNI(1) 3m HORN_5120D_1328 VERTICAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto</p></div>

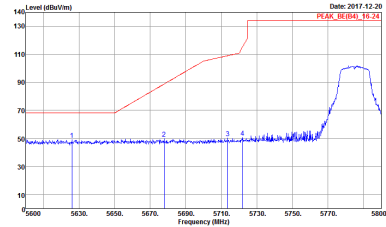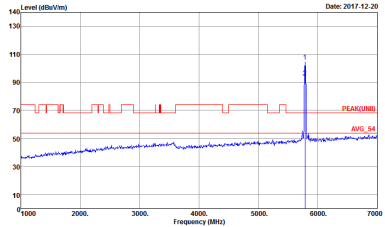
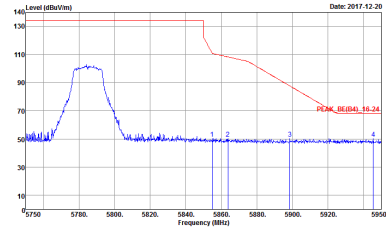


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11a CH157 5785MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_UNE11 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto</p></div>
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto</p></div>	Left blank

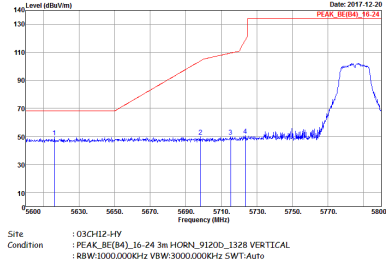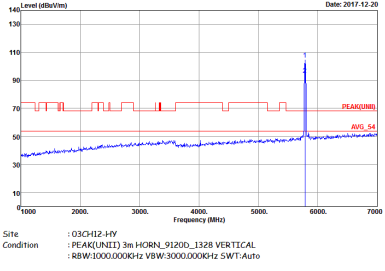
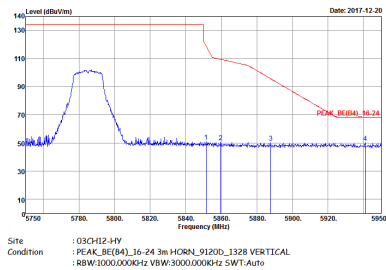


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11a CH157 5785MHz	
	Vertical	Fundamental
Peak		
Peak		Left blank

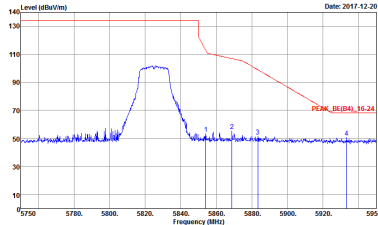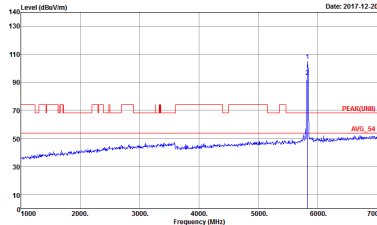




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11a CH165 5825MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_5120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK_UNI(1) 3m HORN_5120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto</p></div>


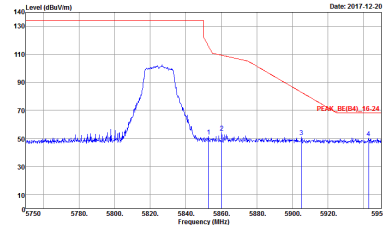
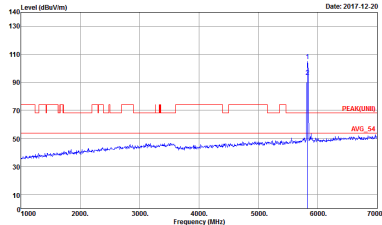





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11a CH165 5825MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_5120D_1328 VERTICAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Site : 03CH12-HY Condition : PEAK(UMB) 3m HORN_5120D_1328 VERTICAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto</p></div>






Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)

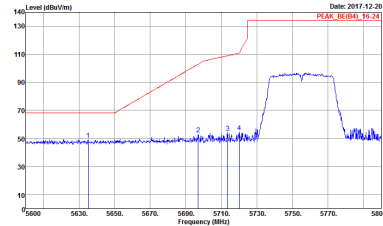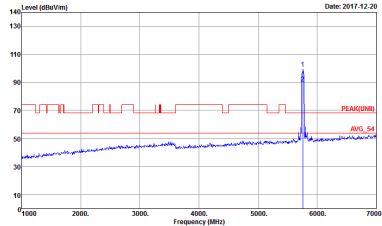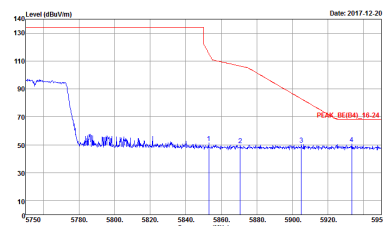WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11n HT40 CH151 5755MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH12-HY : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>	 <p>Site Condition : 03CH12-HY : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>
Peak	 <p>Site Condition : 03CH12-HY : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>	Left blank

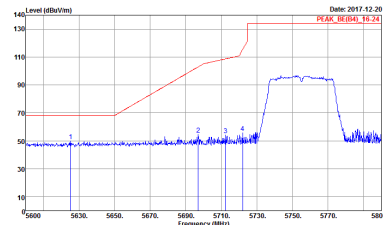
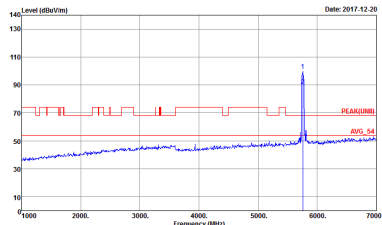
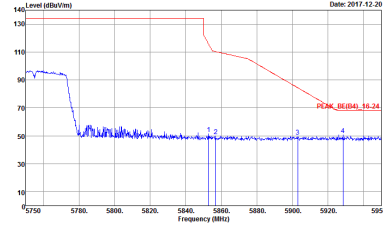
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11n HT40 CH151 5755MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK_UNI1 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

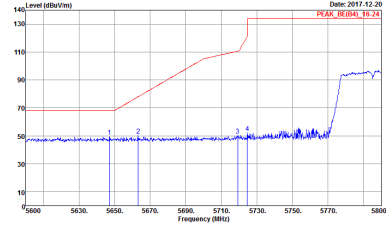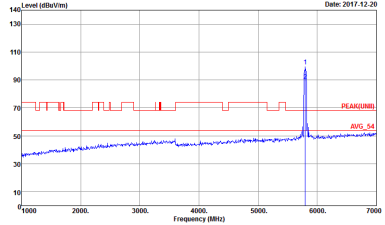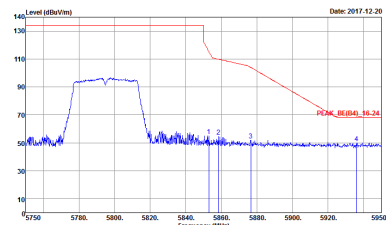WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11n HT40 CH159 5795MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK(00)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

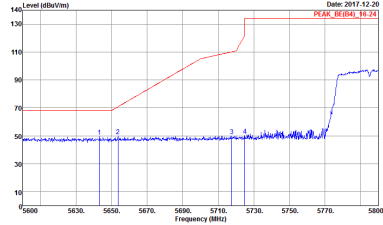
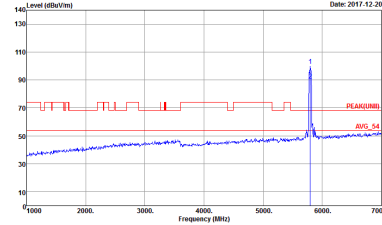
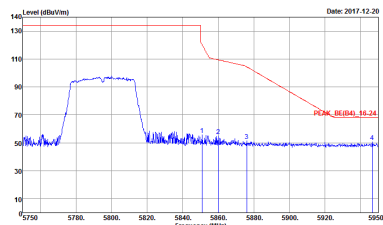
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11n HT40 CH159 5795MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK(00)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p>	Left blank



Band 4 5725~5850MHz  
WIFI 802.11ac VHT80 (Band Edge @ 3m)

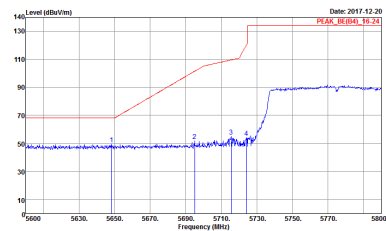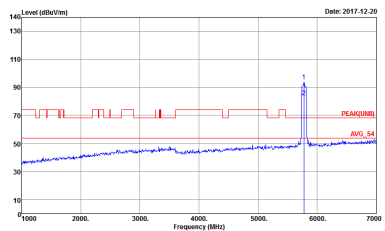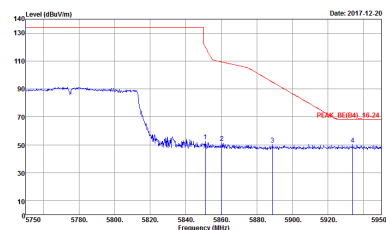WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11ac VHT80 CH155 5775MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH12-1HY : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p>	 <p>Site Condition : 03CH12-1HY : PEAK_U(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p>
Peak	 <p>Site Condition : 03CH12-1HY : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto</p>	Left blank

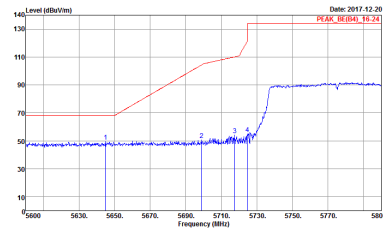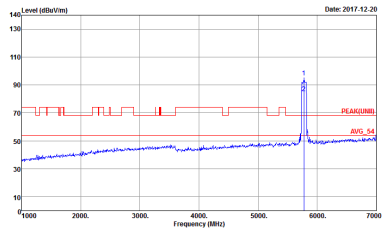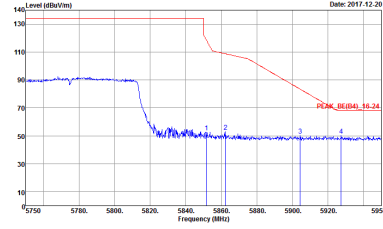



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
	802.11ac VHT80 CH155 5775MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK(00)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(00)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank





Band 4 - 5725~5850MHz  
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
	802.11a CH149 5745MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_91200_1328 VERTICAL Detector : Peak</p>

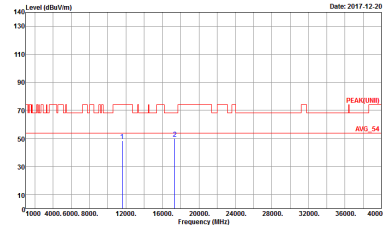
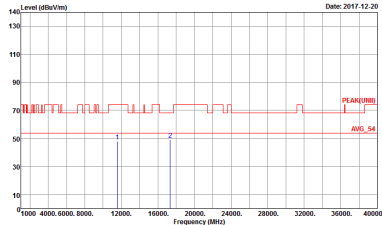


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
	802.11a CH157 5785MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1328 VERTICAL Detector : Peak</p>

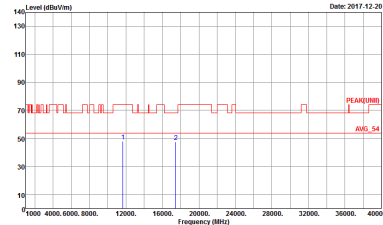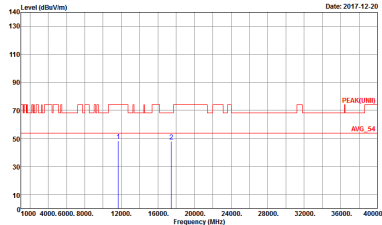

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
	802.11a CH165 5825MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1328 VERTICAL Detector : Peak</p>


**Emission below 1GHz**  
**5GHz WIFI 802.11n HT40 (LF)**

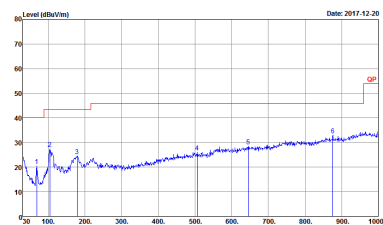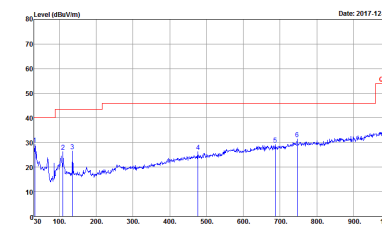WIFI	5GHz 5725~5850MHz	
	802.11n HT40 LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH12-HY  Condition : QP 3m BILO6_6111D_37059 HORIZONTAL  Detector : Peak</p>	 <p>Site : 03CH12-HY  Condition : QP 3m BILO6_6111D_37059 VERTICAL  Detector : Peak</p>


## Appendix E. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
802.11a	95.49	2032.00	0.49	1kHz	0.20
5GHz 802.11n HT20	95.16	1888.00	0.53	1kHz	0.22
5GHz 802.11n HT40	92.03	924.00	1.08	3kHz	0.36
5GHz 802.11ac VHT20	94.40	1888.00	0.530	1kHz	0.25
5GHz 802.11ac VHT40	91.34	928.00	1.078	3kHz	0.39
5GHz 802.11ac VHT80	85.08	456.00	2.19	3kHz	0.70


### 802.11a

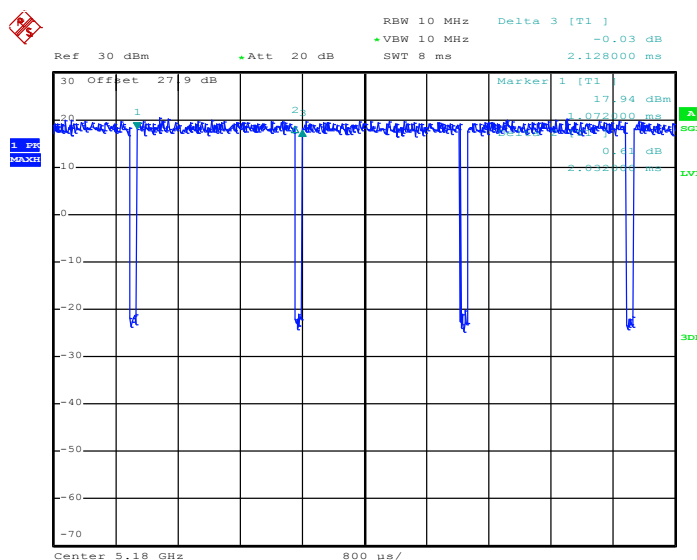

Date: 12.DEC.2017 22:20:49

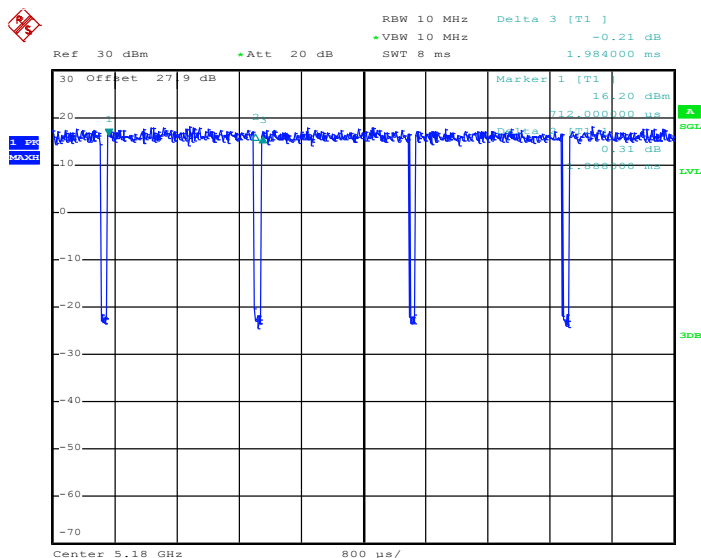
**802.11n HT20**


Date: 12.DEC.2017 22:37:23

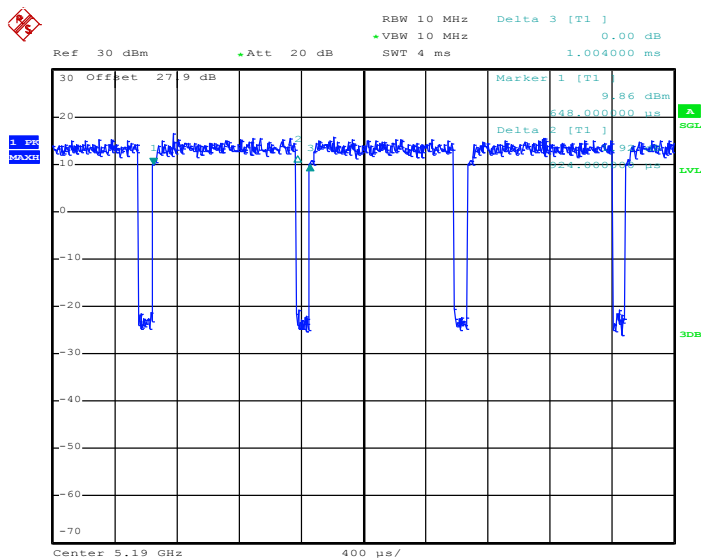**802.11n HT40**


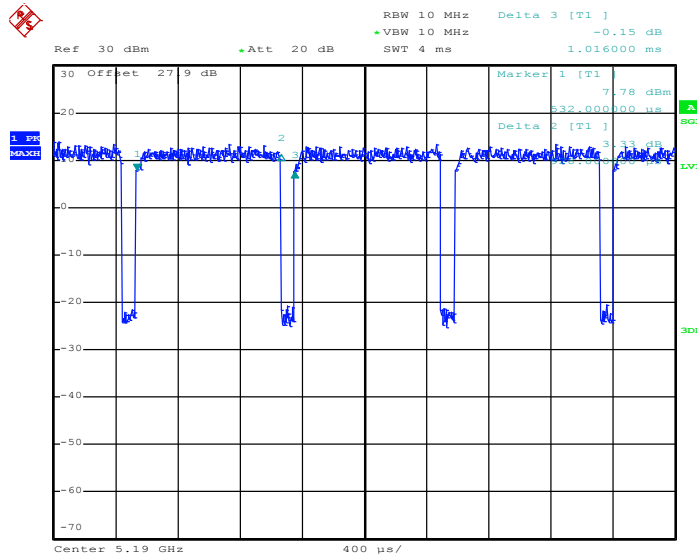
Date: 12.DEC.2017 22:48:44

## 802.11ac VHT20

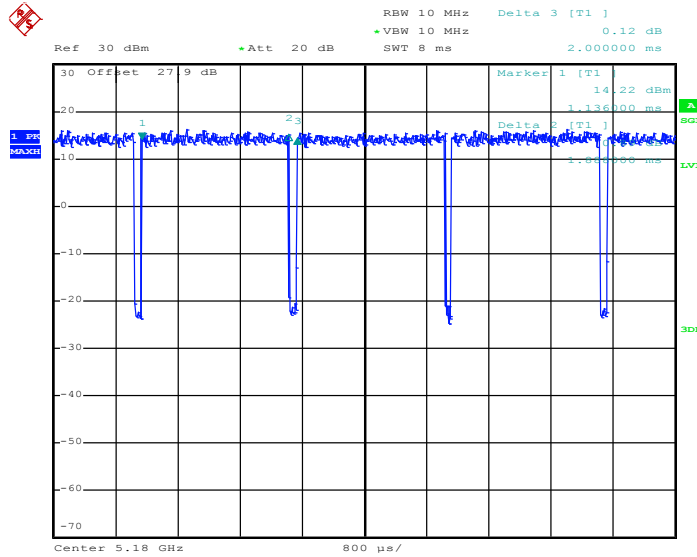

Date: 12.DEC.2017 22:43:06

## 802.11ac VHT40




Date: 12.DEC.2017 22:54:18





802.11ac VHT80

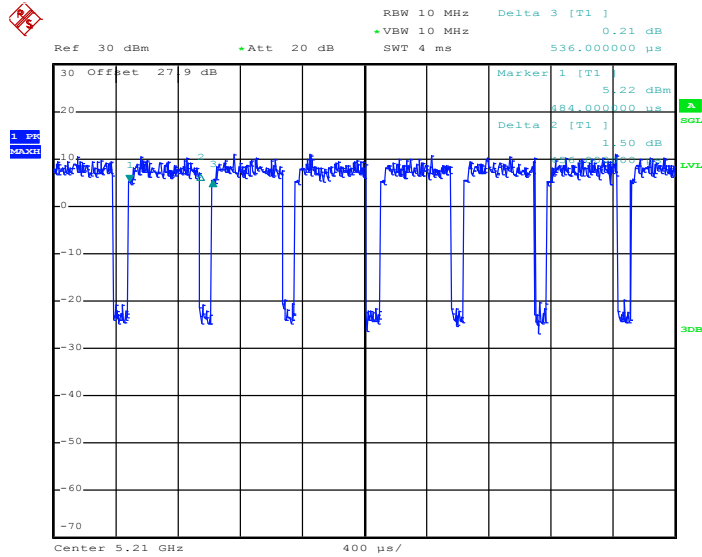

Date: 12.DEC.2017 23:00:35