

Report No.: FR791338-01A



FCC RADIO TEST REPORT

FCC ID : 2AJZC-9434

Equipment : Electronic Display Device

Model Name : PQ94WIF

Applicant : Leopold Equipment LLC

3350 SW 148th Avenue Suite 110

Miramar, Florida 33027

Standard : FCC Part 15 Subpart C §15.247

The testing was completed on Jul. 17, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Reviewed by: Jones Tsai

SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Appendix E. Duty Cycle Plots

Table of Contents

Report No.: FR791338-01A

His	tory o	f this test reportf	3
Sur	nmary	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Product Specification of Equipment Under Test	5
	1.3	Modification of EUT	5
	1.4	Testing Location	6
	1.5	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Carrier Frequency Channel	7
	2.2	Test Mode	8
	2.3	Connection Diagram of Test System	9
	2.4	Support Unit used in test configuration and system	10
	2.5	EUT Operation Test Setup	10
	2.6	Measurement Results Explanation Example	10
3	Test	Result	11
	3.1	Number of Channel Measurement	11
	3.2	Hopping Channel Separation Measurement	13
	3.3	Dwell Time Measurement	19
	3.4	20dB and 99% Bandwidth Measurement	21
	3.5	Output Power Measurement	32
	3.6	Conducted Band Edges Measurement	33
	3.7	Conducted Spurious Emission Measurement	40
	3.8	Radiated Band Edges and Spurious Emission Measurement	50
	3.9	AC Conducted Emission Measurement	
	3.10	Antenna Requirements	56
4	List o	of Measuring Equipment	57
5	Unce	rtainty of Evaluation	59
App	endix	x A. Conducted Test Results	
App	endix	x B. AC Conducted Emission Test Result	
App	endix	x C. Radiated Spurious Emission	
App	endix	x D. Radiated Spurious Emission Plots	

TEL: 886-3-327-3456 Page Number : 2 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

History of this test report

Report No.: FR791338-01A

Report No.	Version	Description	Issued Date
FR791338-01A	01	Initial issue of report	Jul. 20, 2018

TEL: 886-3-327-3456 Page Number : 3 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Summary of Test Result

Report No.: FR791338-01A

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(1)	Number of Channels	Pass
3.2	15.247(a)(1)	Hopping Channel Separation	Pass
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass
3.4	15.247(a)(1)	20dB Bandwidth	Pass
3.4	3.4 2.1049 99% Occupied Bandwidth		Reporting only
3.5 15.247(b)(1) Peak Output		Peak Output Power	Pass
3.6	3.6 15.247(d) Conducted Band Edges		Pass
3.7	3.7 15.247(d) Conducted Spurious Emission		Pass
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass
3.9	3.9 15.207 AC Conducted Emission		Pass
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass

Reviewed by: Joseph Lin Report Producer: Polly Tsai

TEL: 886-3-327-3456 Page Number : 4 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

1 General Description

1.1 Product Feature of Equipment Under Test

	Product Feature
Equipment	Electronic Display Device
Model Name	PQ94WIF
FCC ID	2AJZC-9434
ELIT cumparts Dadies application	WLAN 11b/g/n HT20
EUT supports Radios application	Bluetooth BR/EDR

Report No.: FR791338-01A

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz			
Number of Channels	79			
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78			
	Bluetooth BR(1Mbps) : 8.53 dBm (0.0071 W)			
Maximum Output Power to Antenna	Bluetooth EDR (2Mbps) : 8.31 dBm (0.0068 W)			
	Bluetooth EDR (3Mbps) : 8.38 dBm (0.0069 W)			
	Bluetooth BR(1Mbps) : 0.956MHz			
99% Occupied Bandwidth	Bluetooth EDR (2Mbps) : 1.208MHz			
	Bluetooth EDR (3Mbps) : 1.180MHz			
Antenna Type / Gain	Fixed Internal Antenna type with gain 3.23 dBi			
	Bluetooth BR (1Mbps) : GFSK			
Type of Modulation	Bluetooth EDR (2Mbps) : π /4-DQPSK			
	Bluetooth EDR (3Mbps) : 8-DPSK			

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 Page Number : 5 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FR791338-01A

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978			
Test Site No.	Sporton	Site No.		
lest site NO.	TH05-HY	CO05-HY		

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855		
Test Site No.	Sporton Site No. 03CH15-HY		

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

TEL: 886-3-327-3456 Page Number : 6 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
2400-2483.5 MHz	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FR15CBT Version 2.1

Page Number : 7 of 59 Issued Date : Jul. 20, 2018

Report No.: FR791338-01A

Report Version : 01

2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

Report No.: FR791338-01A

b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


		Summary table of Test Cases						
	Data Rate / Modulation							
Test Item	Bluetooth BR 1Mbps	Bluetooth BR 1Mbps Bluetooth EDR 2Mbps						
	GFSK	π/4-DQPSK	8-DPSK					
Conducted	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz					
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz					
Test Cases	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz					
		Bluetooth BR 1Mbps GFSK						
Radiated	Mode 1: CH00_2402 MHz							
Test Cases	Mode 2: CH39_2441 MHz							
	Mode 3: CH78_2480 MHz							
AC								
Conducted	ble (Charginig from Adapter)							
Emission								

Remark: For radiated test cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.

TEL: 886-3-327-3456 Page Number: 8 of 59
FAX: 886-3-328-4978 Issued Date: Jul. 20, 2018

2.3 Connection Diagram of Test System


<Bluetooth Tx Mode>

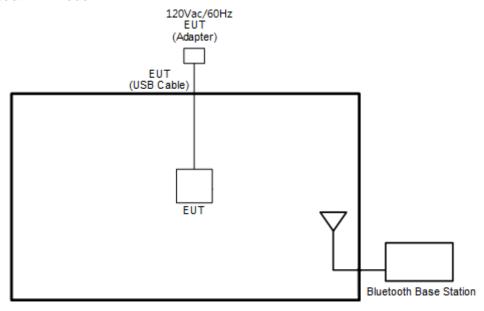

Report No.: FR791338-01A

: 01

<AC Conducted Emission Mode>

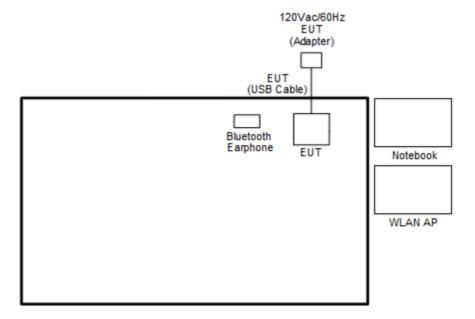

TEL: 886-3-327-3456 Page Number : 9 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU		AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

Report No.: FR791338-01A

2.5 EUT Operation Test Setup

The RF test items, utility "CMD" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 10 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Report No.: FR791338-01A

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

- 1. The testing follows ANSI C63.10-2013 clause 7.8.3.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- Use the following spectrum analyzer settings: Span = the frequency band of operation;
 RBW = 300kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. The number of hopping frequency used is defined as the number of total channel.
- 7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup




TEL: 886-3-327-3456 Page Number : 11 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.

Number of Hopping Channel Plot on Channel 00 - 78

Report No.: FR791338-01A

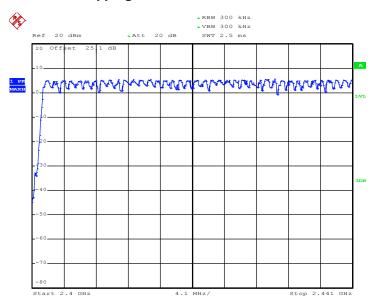

Date: 6.JUL.2018 00:44:47

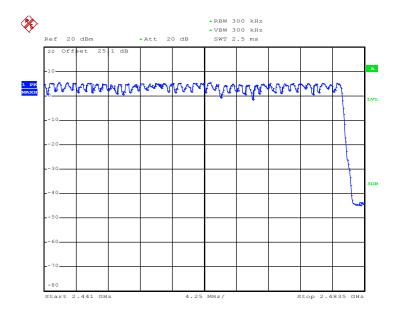

Date: 6.JUL.2018 00:45:24

TEL: 886-3-327-3456 Page Number : 12 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Report No.: FR791338-01A

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.2.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- Use the following spectrum analyzer settings:
 Span = wide enough to capture the peaks of two adjacent channels;
 RBW = 300kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. Measure and record the results in the test report.

3.2.4 Test Setup




3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 13 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<1Mbps>


Channel Separation Plot on Channel 00 - 01

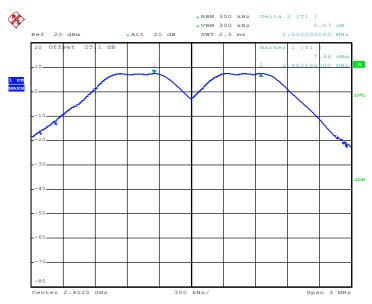

Report No.: FR791338-01A

Date: 6.JUL.2018 00:43:46


Channel Separation Plot on Channel 39 - 40

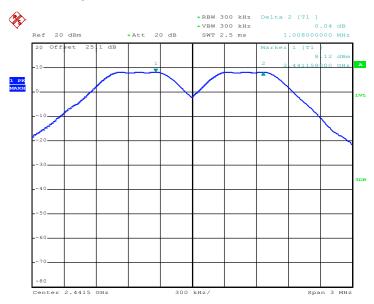

Date: 6.JUL.2018 01:04:37

TEL: 886-3-327-3456 Page Number : 14 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Channel Separation Plot on Channel 77 - 78

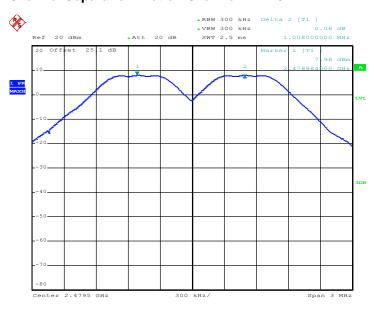


Report No.: FR791338-01A

Date: 6.JUL.2018 01:05:58

<2Mbps>


Channel Separation Plot on Channel 00 - 01

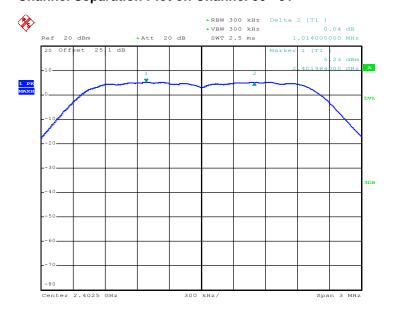

Date: 6.JUL.2018 01:23:30

TEL: 886-3-327-3456 Page Number : 15 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


Channel Separation Plot on Channel 39 - 40

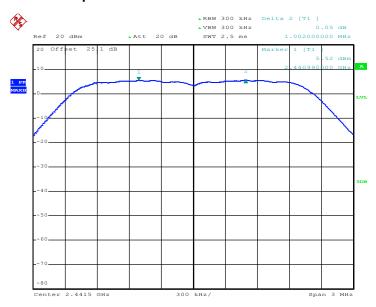

Report No.: FR791338-01A

Date: 6.JUL.2018 01:36:07

Channel Separation Plot on Channel 77 - 78

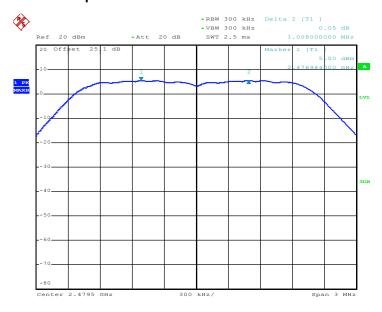


Date: 6.JUL.2018 01:47:16

TEL: 886-3-327-3456 Page Number : 16 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<3Mbps>


Channel Separation Plot on Channel 00 - 01

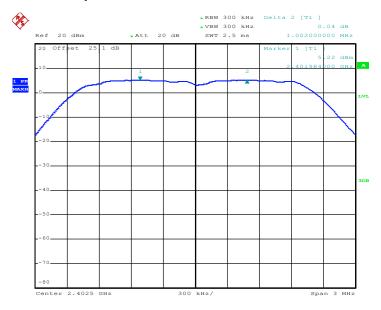

Report No.: FR791338-01A

Date: 6.JUL.2018 02:07:33


Channel Separation Plot on Channel 39 - 40

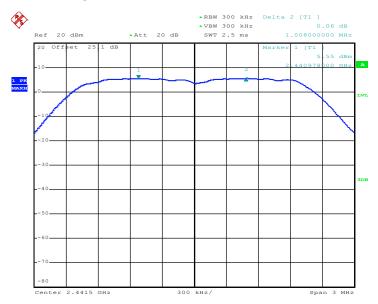

Date: 6.JUL.2018 02:09:04

TEL: 886-3-327-3456 Page Number : 17 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Channel Separation Plot on Channel 77 - 78

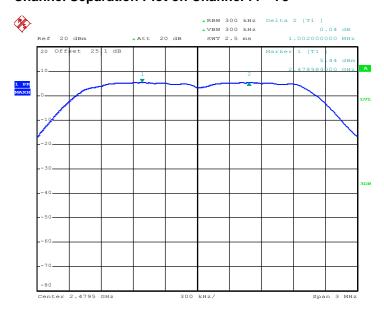

Report No.: FR791338-01A

Date: 6.JUL.2018 02:22:56

TEL: 886-3-327-3456 Page Number : 18 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Report No.: FR791338-01A

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.4.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
- 6. Measure and record the results in the test report.

3.3.4 Test Setup




3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 19 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Package Transfer Time Plot

Report No.: FR791338-01A

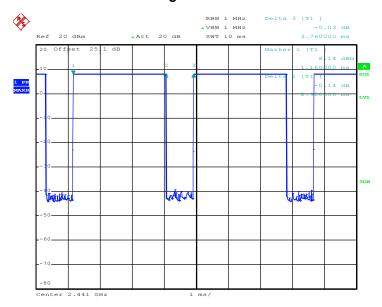

Date: 26.JUN.2018 04:36:52

Remark:

- **1.** In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
- **2.** In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4×20) (s), Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
- 3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

TEL: 886-3-327-3456 Page Number : 20 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.


3.4.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Report No.: FR791338-01A

- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
 - Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
 - RBW ≥ 1% of the 20 dB bandwidth; VBW ≥ RBW; Sweep = auto; Detector function = peak;
 - Trace = \max hold.
- 5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
 - Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
 - RBW ≥ 1-5% of the 99% bandwidth; VBW ≥ 3 * RBW; Sweep = auto; Detector function = peak;
 - Trace = max hold.
- 6. Measure and record the results in the test report.

3.4.4 Test Setup




3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 21 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<1Mbps>


20 dB Bandwidth Plot on Channel 00

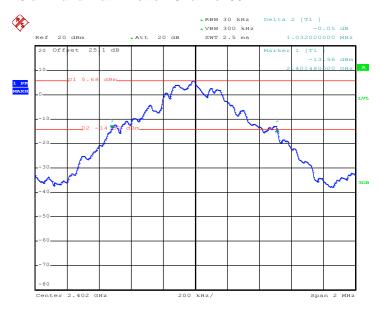

Report No.: FR791338-01A

Date: 6.JUL.2018 00:54:55


20 dB Bandwidth Plot on Channel 39

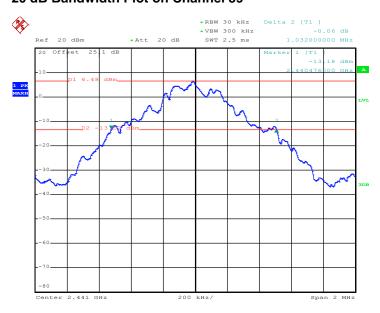

Date: 6.JUL.2018 01:01:13

TEL: 886-3-327-3456 Page Number : 22 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

20 dB Bandwidth Plot on Channel 78

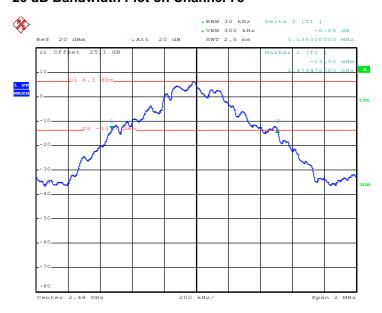


Report No.: FR791338-01A

Date: 6.JUL.2018 01:08:01

<2Mbps>


20 dB Bandwidth Plot on Channel 00

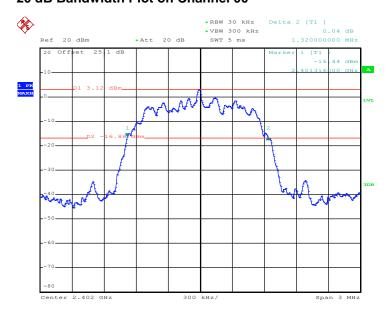

Date: 6.JUL.2018 01:24:22

TEL: 886-3-327-3456 Page Number : 23 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


20 dB Bandwidth Plot on Channel 39

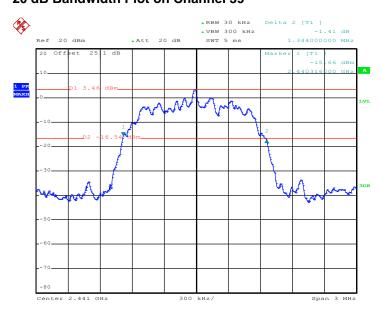

Report No.: FR791338-01A

Date: 6.JUL.2018 01:35:10

20 dB Bandwidth Plot on Channel 78

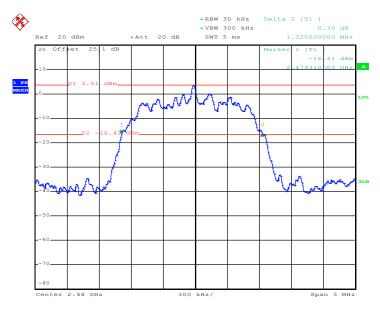


Date: 6.JUL.2018 02:30:55

TEL: 886-3-327-3456 Page Number : 24 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

NLAB. FCC RADIO TEST REPORT

<3Mbps>


20 dB Bandwidth Plot on Channel 00

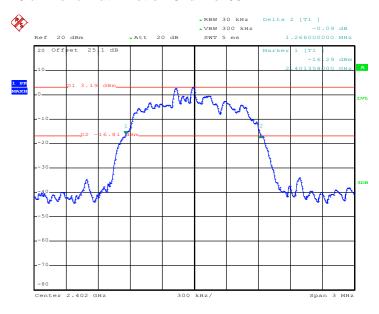

Report No.: FR791338-01A

Date: 6.JUL.2018 02:04:46


20 dB Bandwidth Plot on Channel 39

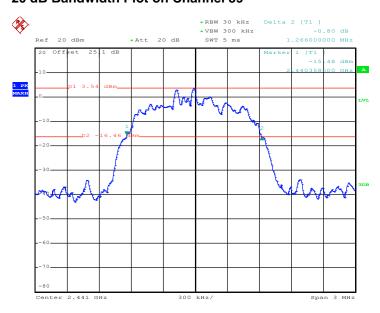

Date: 6.JUL.2018 02:10:21

TEL: 886-3-327-3456 Page Number : 25 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

20 dB Bandwidth Plot on Channel 78

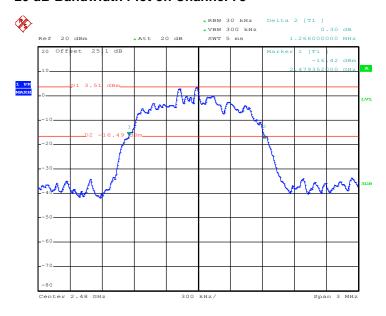

Report No.: FR791338-01A

Date: 6.JUL.2018 02:30:00


TEL: 886-3-327-3456 Page Number : 26 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>

99% Occupied Bandwidth Plot on Channel 00

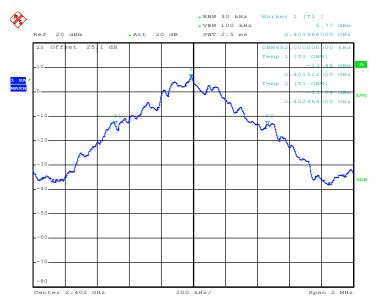


Report No.: FR791338-01A

Date: 6.JUL.2018 00:51:43

TEL: 886-3-327-3456 Page Number : 27 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


99% Occupied Bandwidth Plot on Channel 39

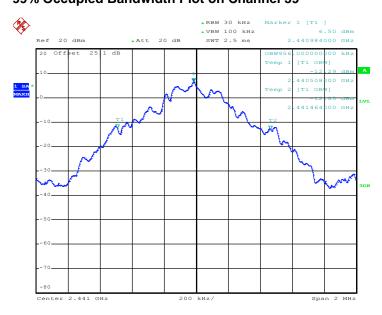

Report No.: FR791338-01A

Date: 6.JUL.2018 00:57:52

99% Occupied Bandwidth Plot on Channel 78

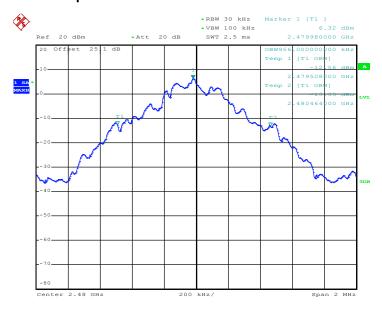


Date: 6.JUL.2018 01:12:10

TEL: 886-3-327-3456 Page Number : 28 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

C RADIO TEST REPORT Report No.: FR791338-01A


<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

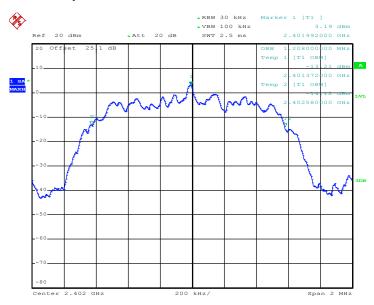

Date: 6.JUL.2018 01:25:35


99% Occupied Bandwidth Plot on Channel 39

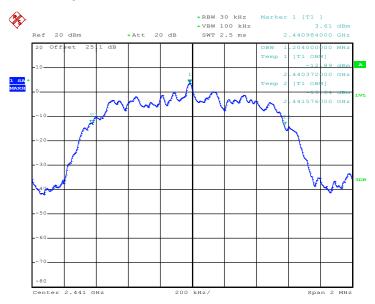

Date: 6.JUL.2018 01:33:37

TEL: 886-3-327-3456 Page Number : 29 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

99% Occupied Bandwidth Plot on Channel 78

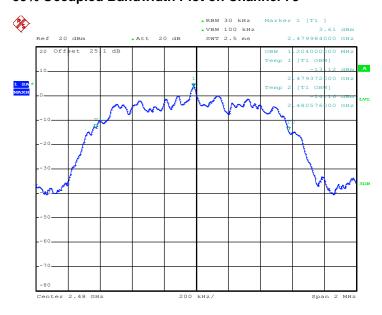


Report No.: FR791338-01A

Date: 6.JUL.2018 01:40:32

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

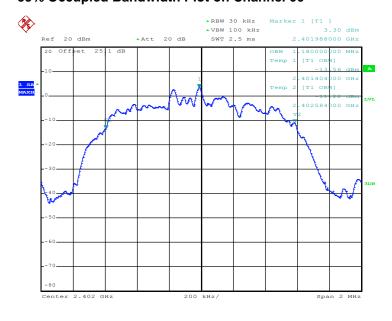

Date: 6.JUL.2018 01:54:45

TEL: 886-3-327-3456 Page Number: 30 of 59
FAX: 886-3-328-4978 Issued Date: Jul. 20, 2018


99% Occupied Bandwidth Plot on Channel 39

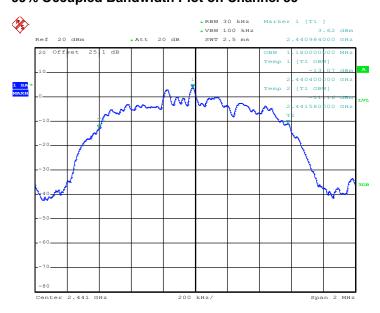

Report No.: FR791338-01A

Date: 6.JUL.2018 02:11:08

99% Occupied Bandwidth Plot on Channel 78

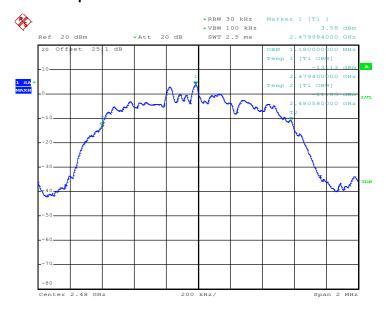

Date: 6.JUL.2018 02:16:08

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

TEL: 886-3-327-3456 Page Number : 31 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.

Report No.: FR791338-01A

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.5.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power with cable loss and record the results in the test report.
- 5. Measure and record the results in the test report.

3.5.4 Test Setup



3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 32 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

Report No.: FR791338-01A

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 7.8.6.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
- 4. Enable hopping function of the EUT and then repeat step 2. and 3.
- 5. Measure and record the results in the test report.

3.6.4 Test Setup




TEL: 886-3-327-3456 Page Number: 33 of 59
FAX: 886-3-328-4978 Issued Date: Jul. 20, 2018

3.6.5 Test Result of Conducted Band Edges

<1Mbps>


Low Band Edge Plot on Channel 00

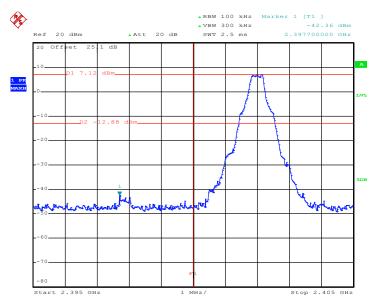

Report No.: FR791338-01A

Date: 6.JUL.2018 00:54:02

High Band Edge Plot on Channel 78

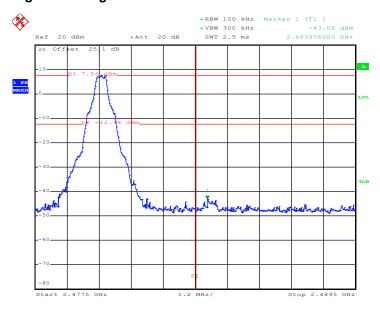


Date: 6.JUL.2018 01:09:49

TEL: 886-3-327-3456 Page Number : 34 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<2Mbps>


Low Band Edge Plot on Channel 00

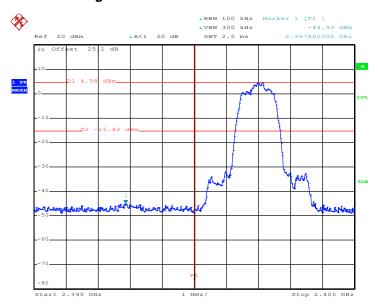

Report No.: FR791338-01A

Date: 6.JUL.2018 01:24:42

High Band Edge Plot on Channel 78

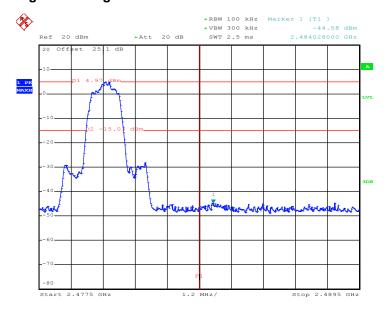


Date: 6.JUL.2018 01:42:52

TEL: 886-3-327-3456 Page Number : 35 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<3Mbps>


Low Band Edge Plot on Channel 00

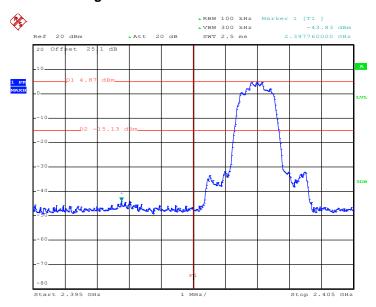

Report No.: FR791338-01A

Date: 6.JUL.2018 01:57:27

High Band Edge Plot on Channel 78

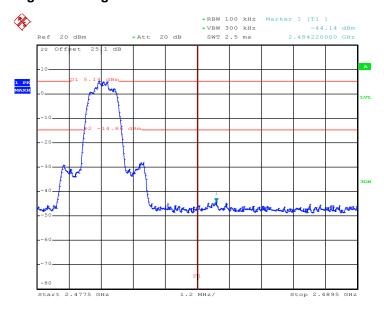


Date: 6.JUL.2018 02:15:16

TEL: 886-3-327-3456 Page Number : 36 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.6.6 Test Result of Conducted Hopping Mode Band Edges

<1Mbps>


Hopping Mode Low Band Edge Plot

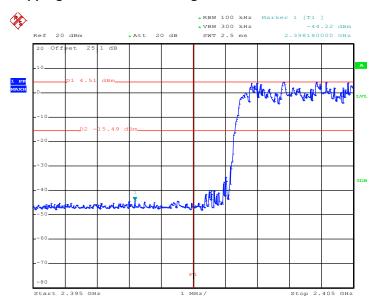

Report No.: FR791338-01A

Date: 6.JUL.2018 00:46:58

Hopping Mode High Band Edge Plot

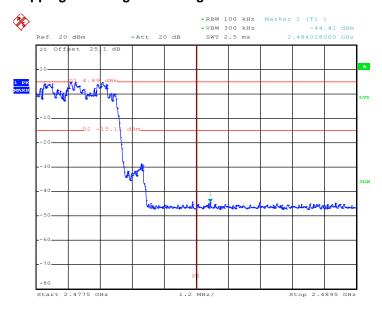


Date: 6.JUL.2018 00:49:21

TEL: 886-3-327-3456 Page Number : 37 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<2Mbps>


Hopping Mode Low Band Edge Plot

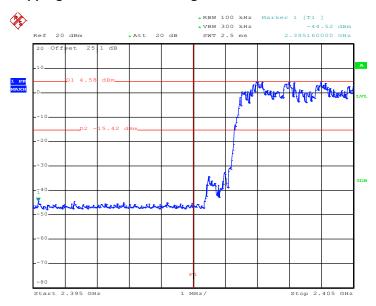

Report No.: FR791338-01A

Date: 6.JUL.2018 01:20:43

Hopping Mode High Band Edge Plot

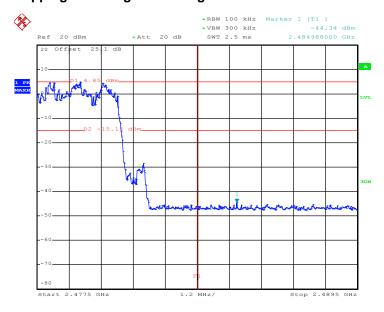


Date: 6.JUL.2018 01:18:54

TEL: 886-3-327-3456 Page Number : 38 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

CC RADIO TEST REPORT Report No. : FR791338-01A


<3Mbps>

Hopping Mode Low Band Edge Plot

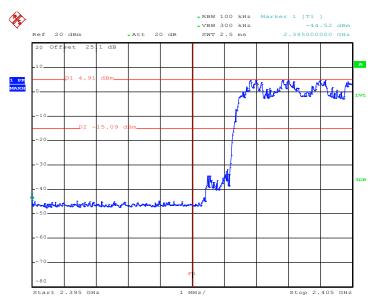

Date: 6.JUL.2018 01:51:52

Hopping Mode High Band Edge Plot

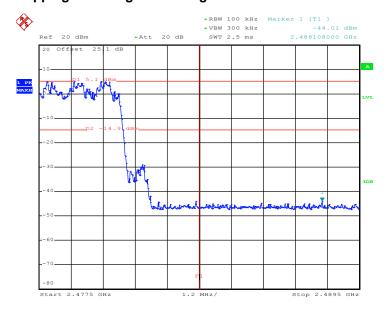

Date: 6.JUL.2018 01:49:23

TEL: 886-3-327-3456 Page Number : 39 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

Report No.: FR791338-01A


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

- 1. The testing follows ANSI C63.10-2013 clause 7.8.8.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
- 5. Measure and record the results in the test report.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup




TEL: 886-3-327-3456 Page Number : 40 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.7.5 Test Result of Conducted Spurious Emission

<1Mbps>


CSE Plot on Ch 00 between 30MHz ~ 3 GHz

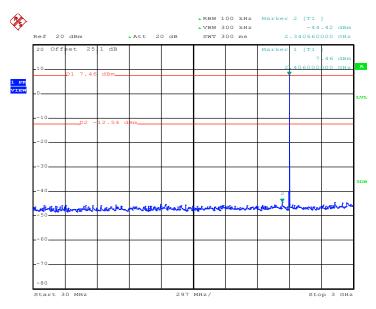

Report No.: FR791338-01A

Date: 6.JUL.2018 00:52:50


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

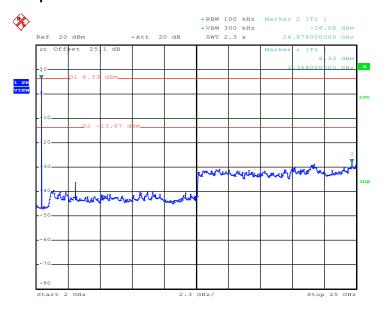

Date: 6.JUL.2018 00:53:24

TEL: 886-3-327-3456 Page Number : 41 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


CSE Plot on Ch 39 between 30MHz ~ 3 GHz

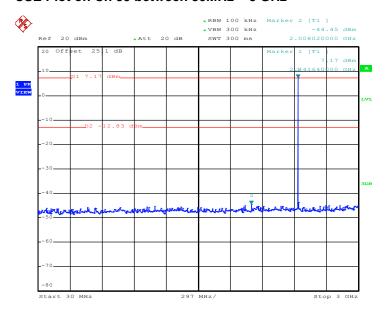

Report No.: FR791338-01A

Date: 6.JUL.2018 00:58:23


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

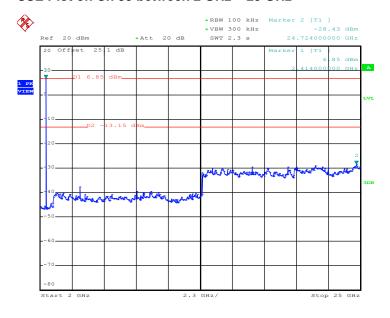

Date: 6.JUL.2018 01:00:28

TEL: 886-3-327-3456 Page Number : 42 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


CSE Plot on Ch 78 between 30MHz ~ 3 GHz

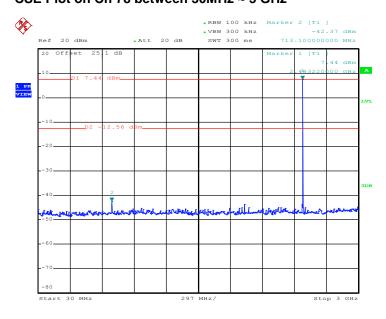

Report No.: FR791338-01A

Date: 6.JUL.2018 01:13:06

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

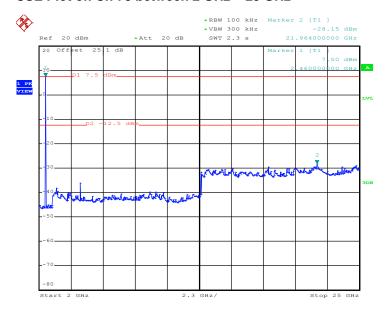


Date: 6.JUL.2018 01:15:08

TEL: 886-3-327-3456 Page Number : 43 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

CC RADIO TEST REPORT Report No. : FR791338-01A


<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

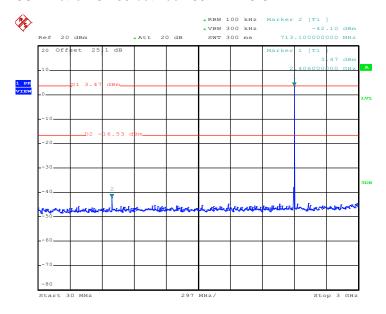

Date: 6.JUL.2018 01:26:42


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

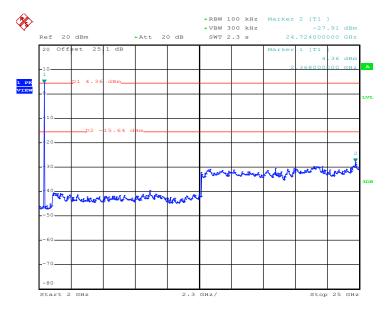

Date: 6.JUL.2018 01:28:54

TEL: 886-3-327-3456 Page Number : 44 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


CSE Plot on Ch 39 between 30MHz ~ 3 GHz

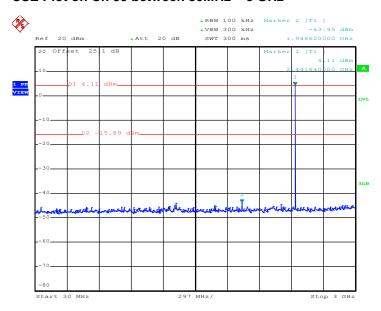

Report No.: FR791338-01A

Date: 17.JUL.2018 03:20:47


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

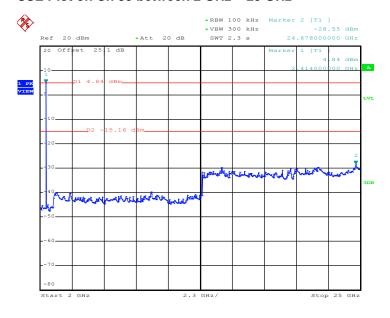

Date: 17.JUL.2018 03:21:21

TEL: 886-3-327-3456 Page Number : 45 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


CSE Plot on Ch 78 between 30MHz ~ 3 GHz

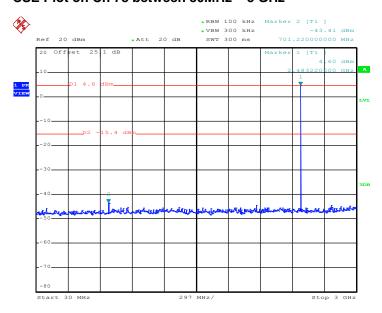

Report No.: FR791338-01A

Date: 6.JUL.2018 01:41:29

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

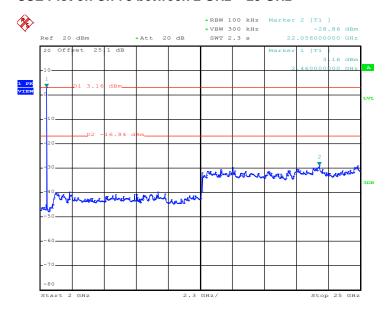


Date: 6.JUL.2018 01:42:31

TEL: 886-3-327-3456 Page Number : 46 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

<3Mbps>


CSE Plot on Ch 00 between 30MHz ~ 3 GHz

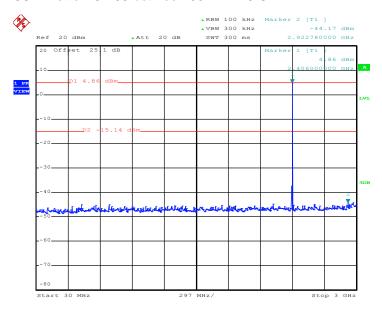

Report No.: FR791338-01A

Date: 6.JUL.2018 01:55:54


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

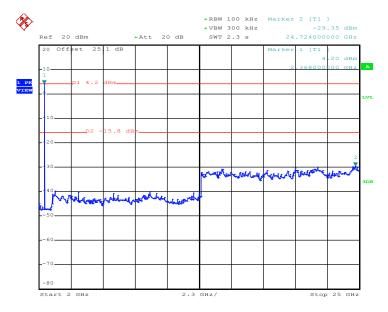

Date: 6.JUL.2018 01:57:06

TEL: 886-3-327-3456 Page Number : 47 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


CSE Plot on Ch 39 between 30MHz ~ 3 GHz

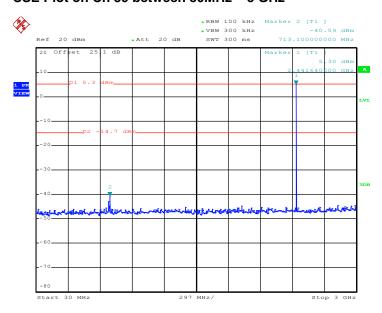

Report No.: FR791338-01A

Date: 6.JUL.2018 02:11:57


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

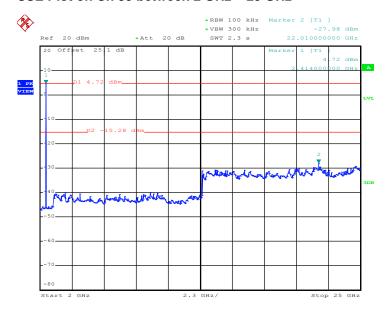

Date: 6.JUL.2018 02:12:26

TEL: 886-3-327-3456 Page Number : 48 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


CSE Plot on Ch 78 between 30MHz ~ 3 GHz

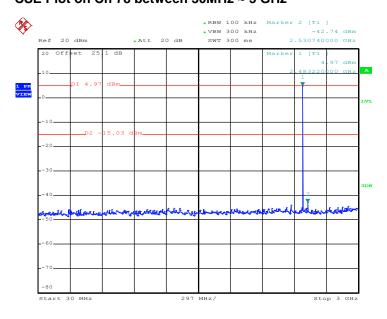

Report No.: FR791338-01A

Date: 17.JUL.2018 03:22:42

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

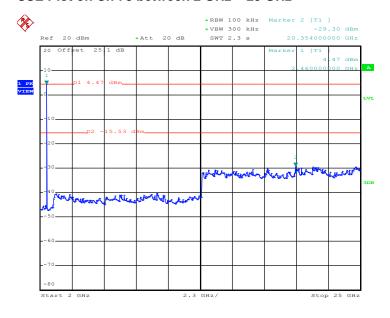

Date: 17.JUL.2018 03:23:11

TEL: 886-3-327-3456 Page Number : 49 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Report No.: FR791338-01A

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.

TEL: 886-3-327-3456 Page Number : 50 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.

Report No.: FR791338-01A

- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 4. Set to the maximum power setting and enable the EUT transmit continuously.
- 5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).

Duty cycle = On time/100 milliseconds

On time = $N_1*L_1+N_2*L_2+...+N_{n-1}*LN_{n-1}+N_n*L_n$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log(Duty cycle)

- 6. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
- 8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

TEL: 886-3-327-3456 Page Number : 51 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018


3.8.4 Test Setup

For radiated emissions below 30MHz




Report No.: FR791338-01A

For radiated emissions from 30MHz to 1GHz

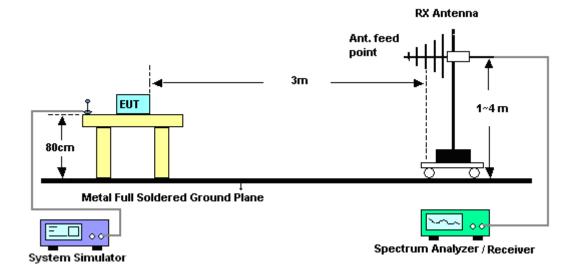

TEL: 886-3-327-3456 Page Number : 52 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

For radiated emissions above 1GHz

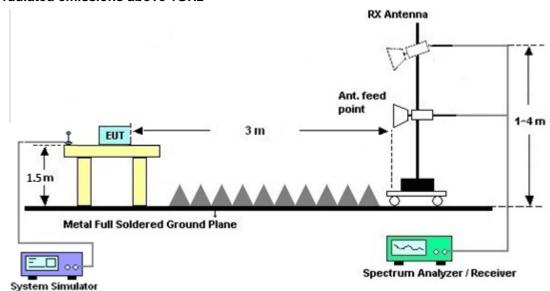

Report No.: FR791338-01A

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.8.7 Duty Cycle

Please refer to Appendix E.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

TEL: 886-3-327-3456 Page Number : 53 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR791338-01A

Eroquency of emission (MUz)	Conducted limit (dBμV)			
Frequency of emission (MHz)	Quasi-peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	60	50		

^{*}Decreases with the logarithm of the frequency.

3.9.2 Measuring Instruments


See list of measuring equipment of this test report.

3.9.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

TEL: 886-3-327-3456 Page Number : 54 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.9.4 Test Setup

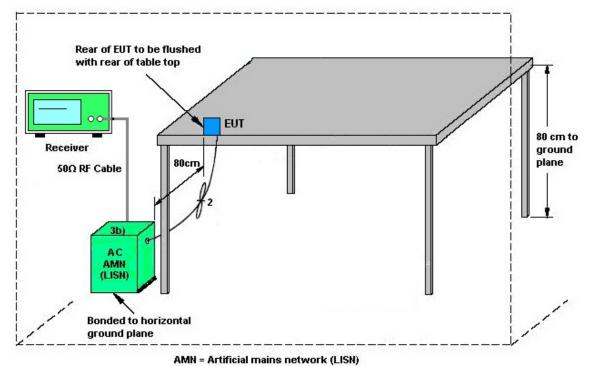

Report No.: FR791338-01A

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 55 of 59 FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

Report No.: FR791338-01A

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TEL: 886-3-327-3456 Page Number : 56 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 20, 2017	Jun. 30, 2018~ Jul. 17, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 20, 2017	Jun. 30, 2018~ Jul. 17, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2017	Jun. 30, 2018~ Jul. 17, 2018	Nov. 20, 2018	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 06, 2017	Jun. 30, 2018~ Jul. 17, 2018	Oct. 05, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	Jun. 30, 2018~ Jul. 17, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 30, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 30, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 30, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 30, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 30, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 30, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jul. 06, 2018~ Jul. 13, 2018	Nov. 22, 2018	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	Apr. 16, 2018	Jul. 06, 2018~ Jul. 13, 2018	Apr. 15, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 26, 2017	Jul. 06, 2018~ Jul. 13, 2018	Dec. 25, 2018	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0800N1D01N- 06	41912&05	30MHz to 1GHz	Jan. 10, 2018	Jul. 06, 2018~ Jul. 13, 2018	Jan. 09, 2019	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY541300 85	20Hz ~ 8.4GHz	Oct. 31, 2017	Jul. 06, 2018~ Jul. 13, 2018	Oct. 30, 2018	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-162 0	1G~18GHz	Oct. 03, 2017	Jul. 06, 2018~ Jul. 13, 2018	Oct. 02, 2018	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY532701 95	1GHz~26.5GHz	Aug. 21, 2017	Jul. 06, 2018~ Jul. 13, 2018	Aug. 20, 2018	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY501801 36	3Hz~44GHz	Apr. 25, 2018	Jul. 06, 2018~ Jul. 13, 2018	Apr. 24, 2019	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 06, 2018~ Jul. 13, 2018	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 06, 2018~ Jul. 13, 2018	N/A	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Jul. 06, 2018~ Jul. 13, 2018	Nov. 26, 2018	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jul. 06, 2018~ Jul. 13, 2018	N/A	Radiation (03CH15-HY)

Report No.: FR791338-01A

TEL: 886-3-327-3456 Page Number : 57 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
	HUBER +	SUCOFLEX	MY36980/					
RF Cable	SUHNER /	104 /	4,	20MU- 10U-	Mar. 15, 2018	Jul. 06, 2018~	Mar. 14, 2019	Radiation
	MTJ	000000-MT18	MY9838/4	30MHz~1GHz		Jul. 13, 2018		(03CH15-HY)
	Cooperation	A-100	PE, D3210					
	HUBER +	SUCOFLEX	MY36980/					
RF Cable	SUHNER /	104 /	4,	1GHz~18GHz	Hz Mar. 15, 2018	Jul. 06, 2018~	Mar. 44, 2040	Radiation
Kr Cable	MTJ	000000-MT18	MY9838/4	IGHZ~IOGHZ		Jul. 13, 2018	Mar. 14, 2019	(03CH15-HY)
	Cooperation	A-100	PE, D3210					
RF Cable	HUBER +	SUCOFLEX	505134/2	30M~40GHz	Oct. 17, 2017	Jul. 06, 2018~	Oct 16 2019	Radiation
Kr Cable	SUHNER	102	303134/2	30IVI~40GHZ	Oct. 17, 2017	Jul. 13, 2018	Oct. 16, 2018	(03CH15-HY)

TEL: 886-3-327-3456 Page Number : 58 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7
01.93% (0 = 20C(y))	

Report No.: FR791338-01A

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	F 2
of 95% (U = 2Uc(y))	5.2

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	EE
of 95% (U = 2Uc(y))	5.5

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

	-
Measuring Uncertainty for a Level of Confidence	5.2
of 95% (U = 2Uc(y))	5.2

TEL: 886-3-327-3456 Page Number : 59 of 59
FAX: 886-3-328-4978 Issued Date : Jul. 20, 2018

Report Number : FR791338-01A

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kai Liao	Temperature:	21~25	°C
Test Date:	2018/6/30 ~ 2016/7/17	Relative Humidity:	51~54	%

TEST RESULTS DATA 20dB and 99% Occupied Bandwidth and Hopping Channel Separation

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	1.032	0.952	1.002	0.6880	Pass
DH	1Mbps	1	39	2441	1.032	0.956	1.008	0.6880	Pass
DH	1Mbps	1	78	2480	1.036	0.956	1.008	0.6907	Pass
2DH	2Mbps	1	0	2402	1.320	1.208	1.014	0.8800	Pass
2DH	2Mbps	1	39	2441	1.344	1.204	1.002	0.8960	Pass
2DH	2Mbps	1	78	2480	1.320	1.204	1.008	0.8800	Pass
3DH	3Mbps	1	0	2402	1.266	1.180	1.002	0.8440	Pass
3DH	3Mbps	1	39	2441	1.266	1.180	1.008	0.8440	Pass
3DH	3Mbps	1	78	2480	1.266	1.180	1.002	0.8440	Pass

TEST RESULTS DATA

Dwell Time

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

TEST RESULTS DATA Peak Power Table

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
	0	1	8.02	20.97	Pass
DH1	39	1	8.37	20.97	Pass
	78	1	8.53	20.97	Pass
	0	1	8.08	20.97	Pass
2DH1	39	1	8.31	20.97	Pass
	78	1	8.22	20.97	Pass
	0	1	8.37	20.97	Pass
3DH1	39	1	8.33	20.97	Pass
	78	1	8.38	20.97	Pass

TEST RESULTS DATA

Average Power Table (Reporting Only)

DH	CH.	NTX	Average Power	Duty Factor
Dii	5	IVIX	(dBm)	(dB)
	0	1	7.52	5.16
DH1	39	1	7.96	5.16
	78	1	7.95	5.16
	0	1	5.27	5.07
2DH1	39	1	5.38	5.07
	78	1	5.46	5.07
	0	1	5.27	5.07
3DH1	39	1	5.38	5.07
	78	1	5.46	5.07

<u>TEST RESULTS DATA</u> Number of Hopping Frequency

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Kai Chun Chu	Temperature :	25~27℃
	Nai-Criuri Criu	Relative Humidity:	50~52%

Report No.: FR791338-01A

TEL: 886-3-327-3456 Page Number: B1 of B1

EUT Information


 Report NO :
 791338-01

 Test Mode :
 Mode 1

 Test Voltage :
 120Vac/60Hz

Phase: Line

Full Spectrum

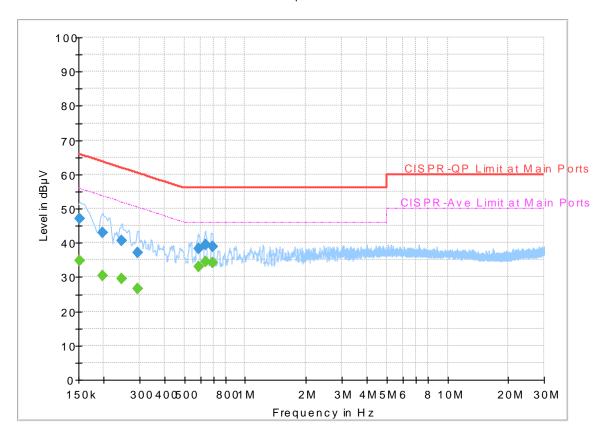


Final_Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)			(dB)
0.152250		34.85	55.88	21.03	L1	OFF	19.5
0.152250	47.11	-	65.88	18.77	L1	OFF	19.5
0.197250		30.49	53.73	23.24	L1	OFF	19.5
0.197250	42.89		63.73	20.84	L1	OFF	19.5
0.244500		29.58	51.94	22.36	L1	OFF	19.5
0.244500	40.66		61.94	21.28	L1	OFF	19.5
0.294000		26.50	50.41	23.91	L1	OFF	19.5
0.294000	37.01		60.41	23.40	L1	OFF	19.5
0.588750		33.14	46.00	12.86	L1	OFF	19.5
0.588750	38.40		56.00	17.60	L1	OFF	19.5
0.636000		34.63	46.00	11.37	L1	OFF	19.6
0.636000	39.55		56.00	16.45	L1	OFF	19.6
0.687750		34.33	46.00	11.67	L1	OFF	19.6
0.687750	38.94		56.00	17.06	L1	OFF	19.6

EUT Information

Report NO: 791338-01
Test Mode: Mode 1
Test Voltage: 120Vac/60Hz
Phase: Neutral

Full Spectrum

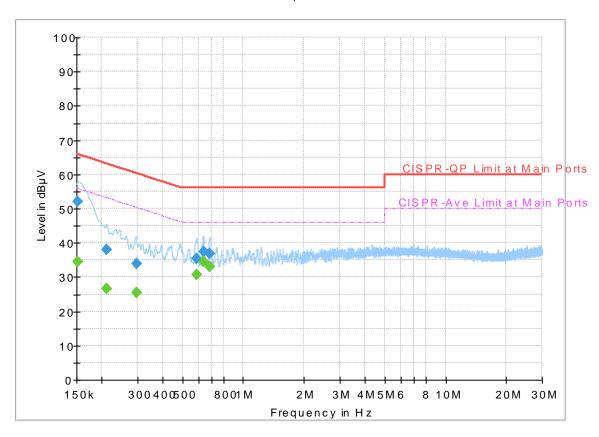

Final Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)			(dB)
0.152250		34.48	55.88	21.40	N	OFF	19.5
0.152250	52.01		65.88	13.87	N	OFF	19.5
0.210750		26.67	53.18	26.51	N	OFF	19.5
0.210750	37.97	-	63.18	25.21	N	OFF	19.5
0.296250		25.40	50.35	24.95	N	OFF	19.5
0.296250	33.81		60.35	26.54	N	OFF	19.5
0.588750		30.56	46.00	15.44	N	OFF	19.5
0.588750	35.46		56.00	20.54	N	OFF	19.5
0.636000		34.49	46.00	11.51	N	OFF	19.6
0.636000	37.47		56.00	18.53	N	OFF	19.6
0.683250		33.03	46.00	12.97	N	OFF	19.6
0.683250	36.82		56.00	19.18	N	OFF	19.6

Appendix C. Radiated Spurious Emission

Toot Engineer	Watt Tseng, Lance Chiang, and Karl Hou	Temperature :	22~26°C
Test Engineer :	wall iselig, Lance Chiang, and Karriou	Relative Humidity :	52~56%

Report No.: FR791338-01A

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

ВТ	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2354.205	45.69	-28.31	74	43.56	27.21	5.8	30.88	250	40	Р	Н
		2354.205	20.93	-33.07	54	-	-	-	-	-	-	Α	Н
DT	*	2402	105.25	-	-	102.92	27.31	5.87	30.85	250	40	Р	Н
BT CH00	*	2402	80.49	ı	-	-	-	-	-	-	-	Α	Н
2402MHz		2354.31	44.58	-29.42	74	42.45	27.21	5.8	30.88	116	273	Р	V
2402111112		2354.31	19.82	-34.18	54	-	-	-	-	-	-	Α	V
	*	2402	103.99	1	-	101.66	27.31	5.87	30.85	116	273	Р	V
	*	2402	79.23	1	-	-	-	-	-	-	-	Α	V
		2384.62	43.46	-30.54	74	41.21	27.26	5.85	30.86	249	39	Р	Н
		2384.62	18.7	-35.3	54	-	-	-	-	-	-	Α	Н
	*	2441	106.55	-	-	103.99	27.46	5.93	30.83	249	39	Р	Н
	*	2441	81.79	-	-	-	-	-	-	-	-	Α	Н
		2488.94	49.63	-24.37	74	46.86	27.6	5.99	30.82	249	39	Р	Н
BT		2488.94	24.87	-29.13	54	-	-	-	-	-	-	Α	Н
CH 39 2441MHz		2389.38	43.95	-30.05	74	41.65	27.31	5.85	30.86	138	273	Р	V
244 I IVI MZ		2389.38	19.19	-34.81	54	-	-	-	-	-	-	Α	V
	*	2441	105.47	-	-	102.91	27.46	5.93	30.83	138	273	Р	V
	*	2441	80.71	-	-	-	-	-	-	-	-	Α	٧
		2493.07	45.66	-28.34	74	42.87	27.6	6	30.81	138	273	Р	٧
		2493.07	20.9	-33.1	54	-	-	-	-	-	-	Α	٧

TEL: 886-3-327-3456 Page Number: C1 of C6



FCC RADIO TEST REPORT

	*	2480	106.95	-	-	104.24	27.55	5.98	30.82	273	34	Р	Н
	*	2480	82.19	-	-	-	-	-	-	-	-	Α	Н
		2484.16	53.18	-20.82	74	50.46	27.55	5.99	30.82	273	34	Р	Н
BT		2484.16	28.42	-25.58	54	-	-	-	-	-	-	Α	Н
CH 78 2480MHz	*	2480	103.81	-	-	101.1	27.55	5.98	30.82	100	272	Р	٧
2400WITIZ	*	2480	79.05	-	-	-	-	-	-	-	-	Α	V
		2484.36	50.19	-23.81	74	47.47	27.55	5.99	30.82	100	272	Р	٧
		2484.36	25.43	-28.57	54	-	-	-	-	-	-	Α	٧
Remark	No other spurious found. All results are PASS against Peak and Average limit line.												

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Report No. : FR791338-01A

2.4GHz 2400~2483.5MHz

Report No.: FR791338-01A

BT (Harmonic @ 3m)

вт	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
ВТ		4804	60.31	-13.69	74	79.13	31.32	8.44	58.58	100	0	Р	Н
CH 00		4804	35.55	-18.45	54	-	-	-	-	-	-	Α	Н
2402MHz		4804	54.67	-19.33	74	73.49	31.32	8.44	58.58	100	0	Р	V
2402WITI2		4804	29.91	-24.09	54	-	-	-	-	-	-	Α	٧
		4882	59.9	-14.1	74	78.32	31.46	8.67	58.55	100	0	Р	Н
		4882	35.14	-18.86	54	-	-	-	-	-	-	Α	Н
		7323	42.17	-31.83	74	53.59	36.12	11.27	58.81	100	0	Р	Н
BT		7323	17.41	-36.59	54	-	-	-	-	-	-	Α	Н
CH 39 2441MHz		4882	53.43	-20.57	74	71.85	31.46	8.67	58.55	100	0	Р	٧
		4882	28.67	-25.33	54	-	-	-	-	-	-	Α	٧
		7323	42.33	-31.67	74	53.75	36.12	11.27	58.81	100	0	Р	٧
		7323	17.57	-36.43	54	-	-	-	-	-	-	Α	٧
		4960	56.39	-17.61	74	74.38	31.63	8.9	58.52	100	0	Р	Н
		4960	31.63	-22.37	54	-	-	-	-	-	-	Α	Н
		7440	42.66	-31.34	74	53.61	36.39	11.33	58.67	100	0	Р	Н
BT		7440	17.9	-36.1	54	-	-	-	-	-	-	Α	Н
CH 78 2480MHz		4960	51.71	-22.29	74	69.7	31.63	8.9	58.52	100	0	Р	٧
2400WIFI2		4960	26.95	-27.05	54	-	-	-	-	-	-	Α	٧
		7440	42.41	-31.59	74	53.36	36.39	11.33	58.67	100	0	Р	٧
		7440	17.65	-36.35	54	-	-	-	-	-	-	Α	٧
Remark	1. No	other spurious	s found.										

TEL: 886-3-327-3456 Page Number : C3 of C6

All results are PASS against Peak and Average limit line.

Emission below 1GHz

Report No.: FR791338-01A

2.4GHz BT (LF)

вт	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		85.08	25.53	-14.47	40	42.73	14.15	1.23	32.58	-	-	Р	Н
		114.24	26.98	-16.52	43.5	40.9	17.3	1.35	32.57	-	-	Р	Н
		197.94	28.35	-15.15	43.5	44.04	14.98	1.87	32.54	-	1	Р	Н
		624.8	28.19	-17.81	46	31.28	26.36	3.1	32.55	-	1	Р	Н
0.4011		785.1	36.16	-9.84	46	36.83	28.13	3.46	32.26	-	1	Р	Н
2.4GHz		888	36.83	-9.17	46	35.67	29.21	3.71	31.76	100	0	Р	Н
BT LF		58.08	28.14	-11.86	40	47.63	12.15	0.97	32.61	-	1	Р	V
Li		154.2	24.76	-18.74	43.5	38.81	16.87	1.63	32.55	-	-	Р	V
		233.04	37.86	-8.14	46	50.6	17.85	1.95	32.54	100	0	Р	V
		580	27.66	-18.34	46	31.1	26.11	3.02	32.57	-	-	Р	V
		641.6	34	-12	46	36.84	26.57	3.13	32.54	-	-	Р	V
		785.1	36.73	-9.27	46	37.4	28.13	3.46	32.26	-	-	Р	V
Remark		o other spurious		mit line	1		1		1	1		1	

TEL: 886-3-327-3456 Page Number : C4 of C6

Note symbol

Report No. : FR791338-01A

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions
	shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

TEL: 886-3-327-3456 Page Number : C5 of C6

A calculation example for radiated spurious emission is shown as below:

Report No.: FR791338-01A

ВТ	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
вт		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 00													
2402MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

- 1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
- 2. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

TEL: 886-3-327-3456 Page Number : C6 of C6

Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Watt Tseng, Lance Chiang, and Karl Hou	Temperature :	22~26°C
		Relative Humidity :	52~56%

Report No.: FR791338-01A

Note symbol

-L	Low channel location
-R	High channel location


2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)


ВТ	2.4GHz 2400~2483.5MHz Band Edge @ 3m		
ANT	BT CH00 2402MHz		
1	Horizontal	Fundamental	
Peak	100 100	100.00 1	

TEL: 886-3-327-3456 Page Number: D1 of D10


BT 2.4GHz 2400~2483.5MHz Band Edge @ 3m

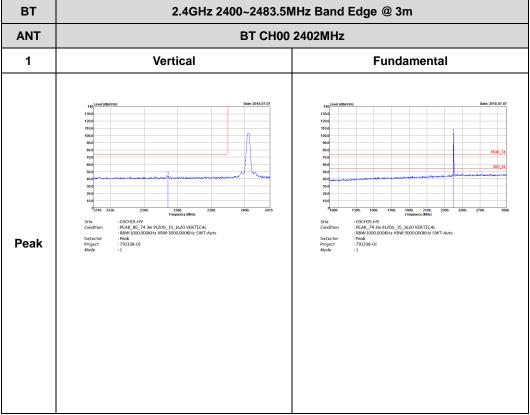


TEL: 886-3-327-3456 Page Number: D2 of D10

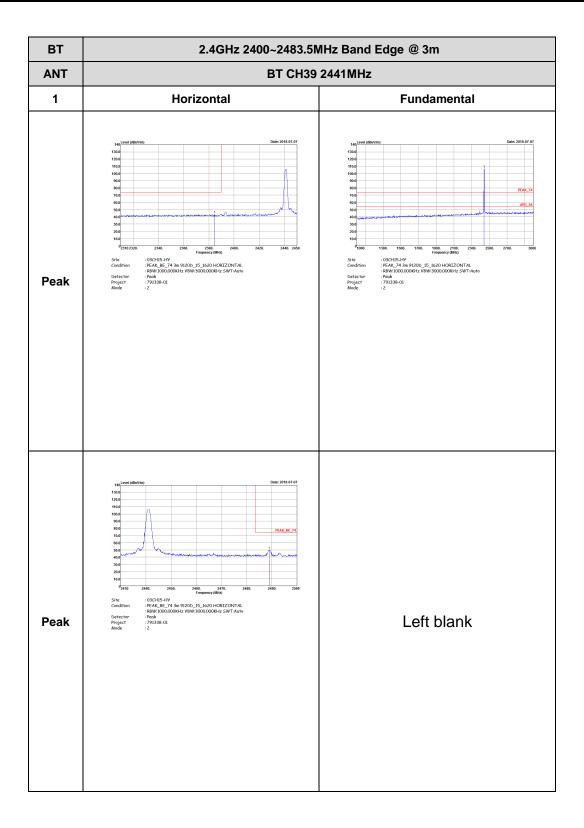

: D3 of D10 TEL: 886-3-327-3456 Page Number

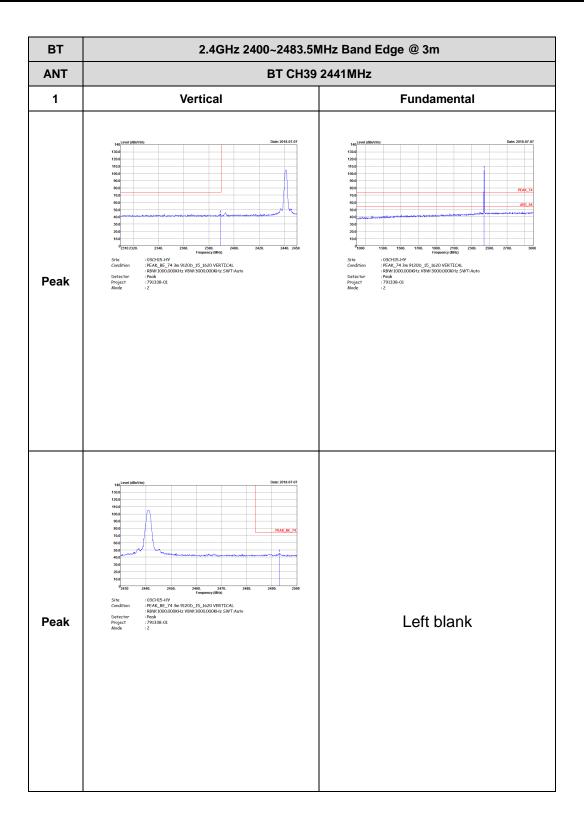


: D4 of D10 TEL: 886-3-327-3456 Page Number

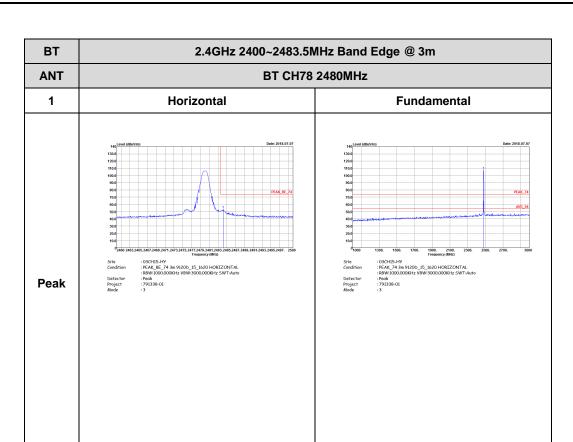

TEL: 886-3-327-3456 Page Number: D5 of D10



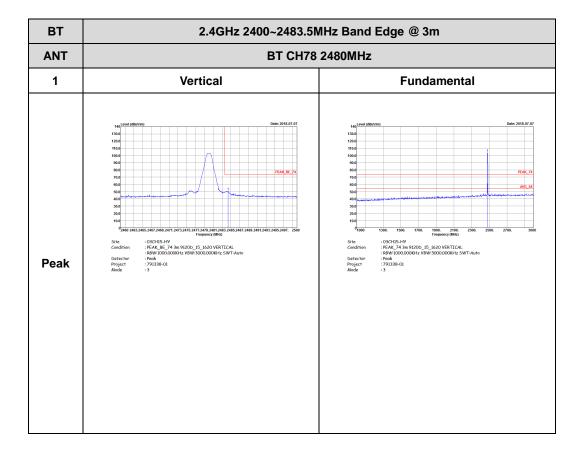


TEL: 886-3-327-3456 Page Number: D6 of D10

2.4GHz 2400~2483.5MHz

Report No.: FR791338-01A


BT (Harmonic @ 3m)

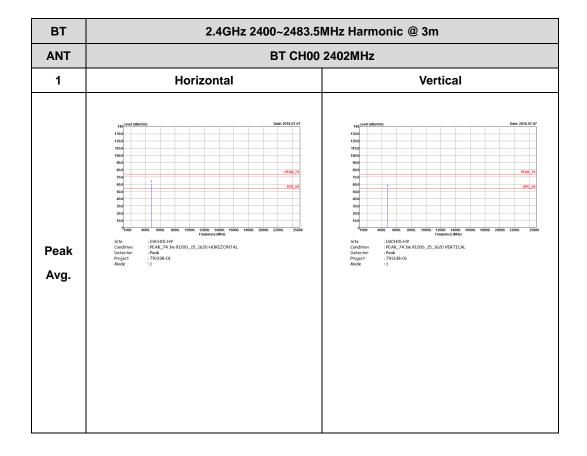

TEL: 886-3-327-3456 Page Number: D7 of D10

Report No.: FR791338-01A


TEL: 886-3-327-3456 Page Number: D8 of D10

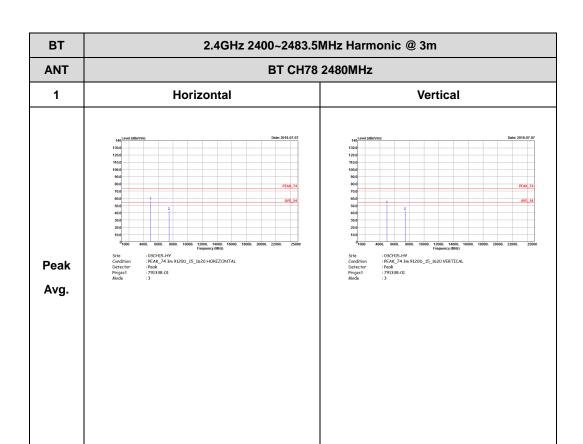

TEL: 886-3-327-3456 Page Number : D9 of D10

Emission below 1GHz 2.4GHz BT (LF)

Report No.: FR791338-01A

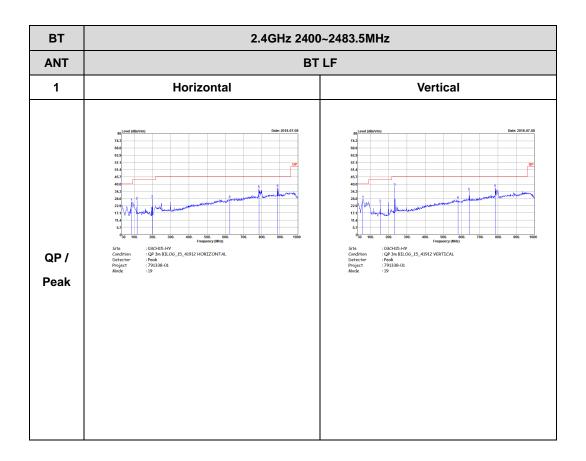


TEL: 886-3-327-3456 Page Number : D10 of D10




Appendix E. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

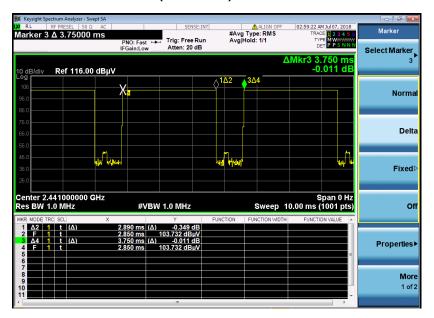

on time (Count Pulses) Plot on Channel 39

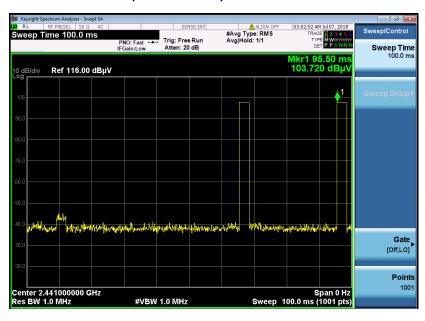

Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.89 / 100 = 5.78 %
- 2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.76 dB
- 3. DH5 has the highest duty cycle worst case and is reported.

TEL: 886-3-327-3456 Page Number : E-1 of 2



FCC RADIO TEST REPORT

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

2.89 ms x 20 channels = 57.8 ms

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. [100ms / 57.6ms] = 2 hops

Thus, the maximum possible ON time:

2.89 ms x 2 = 5.78 ms

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

 $20 \times log(5.78 \text{ ms}/100\text{ms}) = -24.76 \text{ dB}$

——THE END——

Report No.: FR791338-01A

TEL: 886-3-327-3456 Page Number : E-2 of 2 FAX: 886-3-328-4978