### FCC SUBPART C PART 15.247 TEST REPORT

for

**Industrial Wireless Router** 

Model No.: IAR-630-C

FCC ID: 2AK34-IAR630C

of

Applicant: Carl Zeiss Suzhou Co., Ltd.

Address: Modern Industrial Square3-B, No.333 Xing Pu Road,
Suzhou Industrial Park, Suzhou, China(215126)

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC-5107A-1

A2LA Accredited No.: 2732.01





Report No.: W6M21701-16545-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com

FCC ID: 2AK34-IAR630C

### TABLE OF CONTENTS

l	GE	NERAL INFORMATION	2
	1.1	Notes	2
	1.2	TESTING LABORATORY	3
	1.2.	.1 Location	3
	1.2.	.2 Details of accreditation status	3
	1.3	DETAILS OF APPROVAL HOLDER	3
	1.4	APPLICATION DETAILS	4
	1.5	GENERAL INFORMATION OF TEST ITEM	4
	1.6	TEST STANDARDS	6
2	TE	CHNICAL TEST	7
	2.1	SUMMARY OF TEST RESULTS	7
	2.2	TEST ENVIRONMENT	7
	2.3	TEST EQUIPMENT LIST	8
	2.4	GENERAL TEST PROCEDURE	11
3	TE	ST RESULTS (ENCLOSURE)	13
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	14
	3.2	EQUIVALENT ISOTROPIC RADIATED POWER	28
	3.3	RF Exposure Compliance Requirements	28
	3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	29
	3.5	Spurious Emissions (TX)	30
	3.6	RADIATED EMISSION ON THE BAND EDGE	32
	3.7	Minimum 6 dB Bandwidth	41
	3.8	PEAK POWER SPECTRAL DENSITY	54
	3.9	RADIATED EMISSION FROM DIGITAL PART	68
	3.10	POWER LINE CONDUCTED EMISSION	69
	APPEN	NDIX	70

FCC ID: 2AK34-IAR630C

### 1 General Information

#### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

#### Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g/n.

This report is related to FCC Part 15 C (DSSS and OFDM device).

	ester	•
1	COLCI	٠

February 13, 2017 Mark Cheng

Date WTS-Lab. Name Signature

### **Technical responsibility for area of testing:**

February 13, 2017 Kevin Wang

Date WTS Name Signature

FCC ID: 2AK34-IAR630C

### 1.2 Testing laboratory

#### 1.2.1 Location

**OATS** 

No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228 FAX:886-2-2791-5046

#### Company

Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877 Fax : 886-2-66068879

#### 1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

### Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

 Name:
 /.

 Accredited number:
 /.

 Street:
 /.

 Town:
 /.

 Country:
 /.

 Telephone:
 /.

 Fax:
 /.

### 1.3 Details of approval holder

Name: Carl Zeiss Suzhou Co., Ltd.

Street: Modern Industrial Square3-B, No.333 Xing Pu Road,

Suzhou Industrial Park,

Town: Suzhou,

Country: China(215126)
Telephone: + 86-0512-62871388
Fax: + 86-0512-62871366

FCC ID: 2AK34-IAR630C

### 1.4 Application details

Date of receipt of test item: January 24, 2017

Date of test: from January 24, 2017 to February 13, 2017

#### 1.5 General information of Test item

Type of test item: Industrial Wireless Router

Model Number: IAR-630-C
Brand Name: Carl Zeiss

Multi-listing model number: ./.

Photos: see Appendix

**Technical data** 

Frequency band: 2.4 GHz – 2.4835 GHz

802.11b, g, n 20MHz

Frequency (ch 1 or A): 2.412 GHz
Frequency (ch 6 or B): 2.437 GHz
Frequency (ch 11 or C): 2.462 GHz

802.11n 40MHz

Frequency (ch 1 or A): 2.422 GHz
Frequency (ch 4 or B): 2.437 GHz
Frequency (ch 7 or C): 2.452 GHz

Number of Channels: 802.11b, g, n 20MHz: 11

802.11n 40MHz: 7

Operation modes: Duplex

Modulation Type: DSSS / OFDM Fixed point-to-point operation:  $\square$  Yes /  $\square$  No

Type of Antenna: Dipole antenna (ANT0, ANT1)

Antenna gain: 2.15 dBi (ANT0, ANT1)

Directional gain: 5. 16 dBi

FCC ID: 2AK34-IAR630C

According to KDB 662911, Unequal antenna gains, with equal transmit powers. For antenna gains given by  $G_1$ ,  $G_2$ , ...,  $G_N$  dBi. If transmit signals are correlated, then Directional gain

= $10 \log[(10^{G_1/20} + 10^{G_2/20} + ... + 10^{G_N/20})^2/N]$  dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

Each with the same directional gain  $G_{ANT}$ dBi, being driven by  $N_{ANT}$  transmitter outputs of equal power.

Directional gain is to be computed as follows:

If any transmit signals are correlated with each other, Direction gain=  $G_{ANT}$  + 10 log(N<sub>ANT</sub>) dBi

Power supply: DC 15V

Emission designator: Mode A (802.11b): DSSS: 14M0G1D

Mode B (802.11g): OFDM: 16M5D1D

Mode C (802.11n 20MHz): OFDM: 17M7D1D Mode D (802.11n 40MHz): OFDM: 36M4D1D

Host device: none

Classification:

Fixed Device	
Mobile Device (Human Body distance > 20cm)	
Portable Device (Human Body distance < 20cm)	
Modular Radio Device	

Transmitter	Unom
1 i ansimittei	UHOHI

ANT0

Mode A (DSSS)

Power ( ch 1 or A): Conducted: 22.32 dBm Power ( ch 6 or B): Conducted: 23.46 dBm Power ( ch 11 or C): Conducted: 23.10 dBm

Mode B (OFDM)

Power (ch 1 or A): Conducted: 21.85 dBm Power (ch 6 or B): Conducted: 22.04 dBm Power (ch 11 or C): Conducted: 21.86 dBm

Mode C (OFDM)

Power (ch 1 or A): Conducted: 21.95 dBm Power (ch 6 or B): Conducted: 21.33 dBm Power (ch 11 or C): Conducted: 20.92 dBm

Mode D (OFDM)

Power ( ch 1 or A): Conducted: 18.06 dBm Power ( ch 4 or B): Conducted: 17.68 dBm Power ( ch 7 or C): Conducted: 18.44 dBm



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

### ANT1

### Mode A (DSSS)

Power ( ch 1 or A): Conducted: 21.43 dBm Power ( ch 6 or B): Conducted: 20.34 dBm Power ( ch 11 or C): Conducted: 20.29 dBm

Mode B (OFDM)

Power (ch 1 or A): Conducted: 20.21 dBm Power (ch 6 or B): Conducted: 20.07 dBm Power (ch 11 or C): Conducted: 19.08 dBm

Mode C (OFDM)

Power (ch 1 or A): Conducted: 20.35 dBm Power (ch 6 or B): Conducted: 18.99 dBm Power (ch 11 or C): Conducted: 18.74 dBm

Mode D (OFDM)

Power (ch 1 or A): Conducted: 18.07 dBm Power (ch 4 or B): Conducted: 17.89 dBm Power (ch 7 or C): Conducted: 17.51 dBm

Combine	mW			dBm		
Comonie	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
802.11n 20MHz	265.07	215.08	198.41	24.23	23.33	22.98
802.11n 40MHz	128.09	120.13	126.18	21.08	20.80	21.01

#### Manufacturer: (if applicable)

Name: ORing Industrial Networking Corp.

Street: 3F., No.542-2, Zhongzheng Rd., Xindian Dist.,

Town: New Taipei City 23148,

Country: Taiwan (R.O.C)

#### 1.6 Test standards

Technical standard: FCC RULES PART 15 SUBPART C § 15.247 (2015-10)

FCC ID: 2AK34-IAR630C

### 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	×
or	
The deviations as specified in 2.5 were ascertained in the course of the tests	

### 2.2 Test environment

performed.

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Power supply: DC 15 V

Extreme conditions parameters: ./.



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

### 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	ETSTW-CE 001 EMI TEST RECEIVER		842121/013	R&S	2016/5/20	2017/5/19
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function	on Test
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Functio	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2016/7/15	2017/7/14
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2016/9/12	2017/9/11
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2016/8/26	2017/8/25
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2016/5/20	2017/5/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2016/5/25	2017/5/24
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2016/7/4	2017/7/3
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function	on Test
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function	on Test
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2016/6/24	2017/6/23
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2016/6/29	2017/6/28
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2016/3/23	2017/3/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2017/1/17	2018/1/16
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2016/3/28	2017/3/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2016/4/14	2017/4/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-te	st Use
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2016/2/27	2017/2/26
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2016/2/25	2017/2/24
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2016/4/13	2017/4/12
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function	on Test
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function	on Test
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	НР	2016/9/8	2017/9/7
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2016/9/20	2017/9/19
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Functi	on test
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2017/1/12	2018/1/11
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Functi	on test
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2016/5/23	2017/5/22



Registration number: W6M21701-16545-C-1 FCC ID: 2AK34-IAR630C

FCC ID. ZAK.	3 <del>4-</del> 1/AR030C					
ETSTW-RE 125	5GHz Notch filter	5NSL11- 5200/E221.3-O/O	1	K&L Microwave	2016/8/10	2017/8/9
ETSTW-RE 126	5GHz Notch filter	5NSL12- 5800/E221.3-O/O	1	K&L Microwave	2016/8/10	2017/8/9
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2016/2/25	2017/2/24
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2016/8/10	2017/8/9
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2016/8/10	2017/8/9
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-te	st Use
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2016/4/13	2017/4/12
ETSTW-RE 143	Humidity Temperature Meter	TES-1260	110104623	TES	2016/8/19	2017/8/18
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2016/3/31	2017/3/30
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2016/5/4	2017/5/3
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2016/3/4	2017/3/3
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2017/2/2	2018/2/1
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2016/12/15	2017/12/14
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849- 822/851-40 /12+9SS	3	WI	2017/1/12	2018/1/11
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2017/1/12	2018/1/11
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5 -1875.5/1884.5- 32/5SS	3	WI	2017/1/12	2018/1/11
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2017/1/12	2018/1/11
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2016/9/14	2017/9/13
ETSTW-Cable 010	BNC Cable	RGS-142	None	THERMAX	2016/9/12	2017/9/11
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test U	Use NCR
ETSTW-Cable 012	BNC Cable	RGS-400	None	THERMAX	2016/9/12	2017/9/11
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2016/4/22	2017/4/21
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2016/4/7	2017/4/6
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2016/5/13	2017/5/12
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2016/9/20	2017/9/19
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2016/9/20	2017/9/19
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2016/4/7	2017/4/6



Registration number: W6M21701-16545-C-1 FCC ID: 2AK34-IAR630C

ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2016/9/12	2017/9/11
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	

FCC ID: 2AK34-IAR630C

#### 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a 50μH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $dB\mu V$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS

33  $20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} \text{ @3m}$ 

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

FCC ID: 2AK34-IAR630C

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = 20 log (dwell time/T)

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

### 3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	×	×	
Equivalent isotropically radiated Power	15.247(b)(3)	×	×	
Spurious Emissions radiated – Transmitter	15.247(c):	×	×	
operating	15.209			
Band Edge Measurement	15.247(c)	×	×	
Minimum 6 dB Bandwidth	15.247(d)	×	×	
Peak Power Spectral Density	15.247(e)	×	×	
Radiated Emission from Digital Part	15.109			
Power Line Conducted Emission	15.207			

### Note:

- 1. This EUT incorporates a MIMO function with IEEE 802.11b, 802.11g, and 802.11n. Physically, this EUT includes two transmitters and two receivers with two incoherent streams. This device uses multiplexing and also employ cyclic delay diversity to improve range and throughput, and this device simultaneously operates on two adjacent channels.
- 2. This EUT is 2\*2 spatial MIMO (2Tx&2Rx) without beam forming function. That operates dual chain configuration. The Pre-test was performed to determine the worst case mode from all possible combinations between all available modulations, data rates, bandwidths, and spatial stream modes.
- 3. The detail of chosen mode for full testing are as below:

Mode	Available	Chosen	Modulation	Modulation	Data Rate
Mode	channel	Channel	Technology	Type	(Mbps)
802.11b	1 to 11	1,6,11	DSSS	DBPSK,	1
				DQPSK, CCK	
802.11g	1 to 11	1,6,11	OFDM	BPSK, QPSK,	6
		, ,		16QAM,	
				64QAM	
802.11n (20MHz)	1 to 11	1,6,11	OFDM	BPSK, QPSK,	6.5
,		, ,		16QAM,	
				64QAM	
802.11n (40MHz)	1 to 7	1,4,7	OFDM	BPSK, QPSK,	13.5
				16QAM,	
				64QAM	


FCC ID: 2AK34-IAR630C

### 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

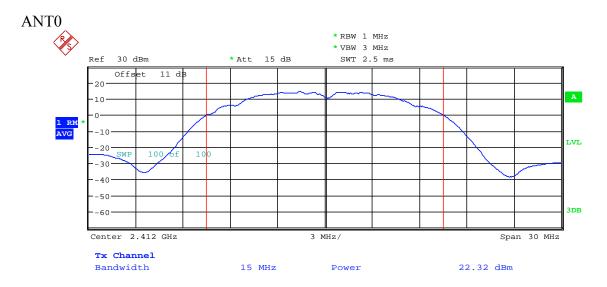


MAX OUTPUT POWER 802.11B CH01 Date: 24.JAN.2017 13:29:05




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

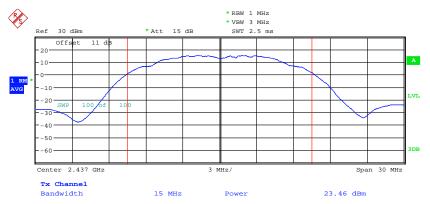


MAX OUTPUT POWER 802.11B CH06 Date: 24.JAN.2017 13:30:47

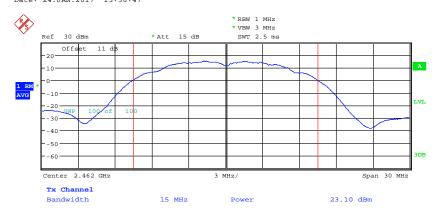


MAX OUTPUT POWER 802.11B CH11 Date: 24.JAN.2017 13:31:30

Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

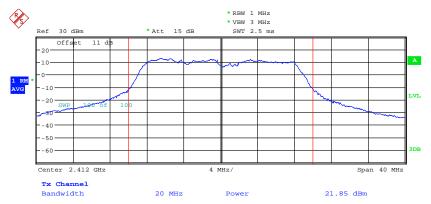

MAX OUTPUT POWER 802.11G CH01 Date: 24.JAN.2017 13:32:34

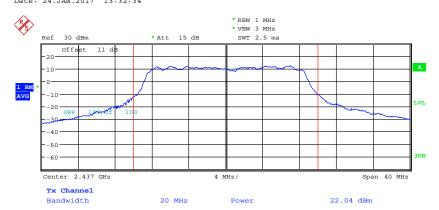


MAX OUTPUT POWER 802.11G CH06 Date: 24.JAN.2017 13:33:43



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

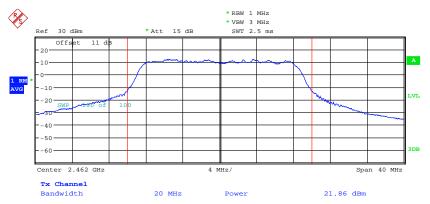

MAX OUTPUT POWER 802.11G CH11 Date: 24.JAN.2017 13:35:40




MAX OUTPUT POWER 802.11N 20MHZ CH01 Date: 24.JAN.2017 13:37:27



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

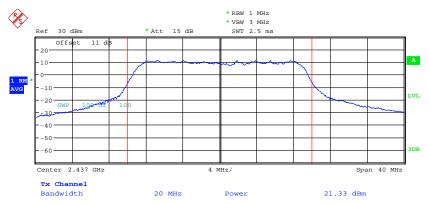

MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 24.JAN.2017 13:40:19




MAX OUTPUT POWER 802.11N 20MHZ CH11 Date: 24.JAN.2017 13:41:09




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

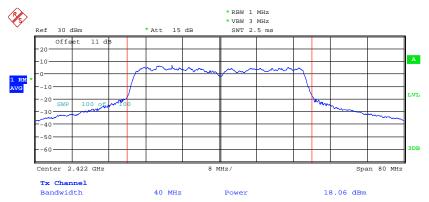

MAX OUTPUT POWER 802.11N 40MHZ CH01 Date: 24.JAN.2017 13:55:21

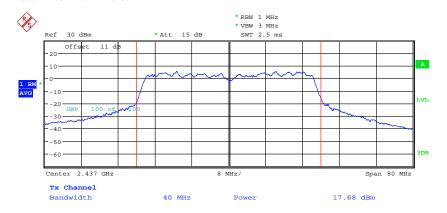

MAX OUTPUT POWER 802.11N 40MHZ CH04 Date: 24.JAN.2017 13:52:18




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C



MAX OUTPUT POWER 802.11N 40MHZ CH07 Date: 24.JAN.2017 13:53:41

#### ANT1

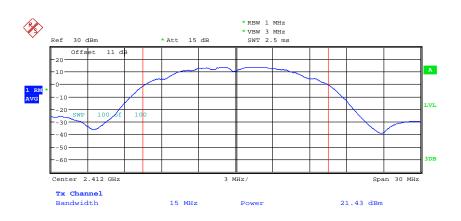


MAX OUTPUT POWER 802.11B CH01 Date: 24.JAN.2017 14:04:32

Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C



MAX OUTPUT POWER 802.11B CH06 Date: 24.JAN.2017 14:05:15

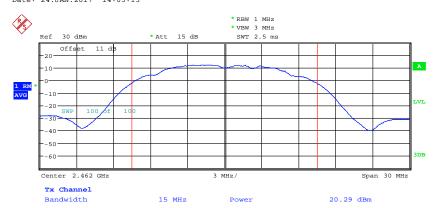


MAX OUTPUT POWER 802.11B CH11 Date: 24.JAN.2017 14:06:20




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

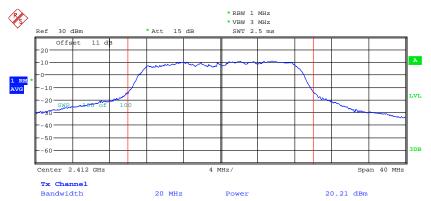

MAX OUTPUT POWER 802.11G CH01 Date: 24.JAN.2017 14:09:36

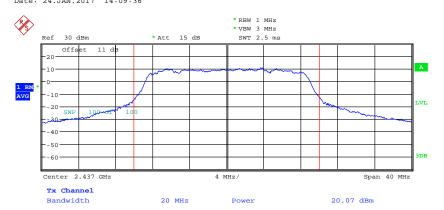


MAX OUTPUT POWER 802.11G CH06 Date: 24.JAN.2017 14:10:49




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

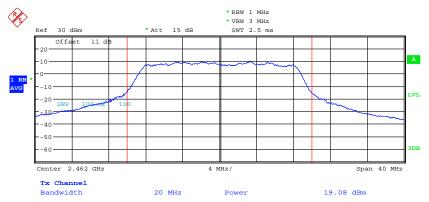

MAX OUTPUT POWER 802.11G CH11 Date: 24.JAN.2017 14:12:29

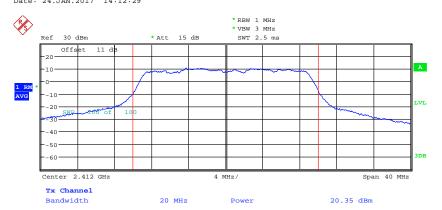


MAX OUTPUT POWER 802.11N 20MHZ CH01
Date: 24.JAN.2017 14:13:54




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

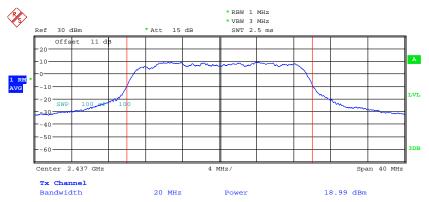

MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 24.JAN.2017 14:14:49

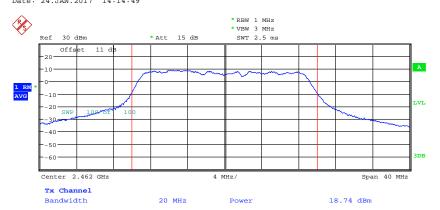

MAX OUTPUT POWER 802.11N 20MHZ CH11 Date: 24.JAN.2017 14:15:27




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C



MAX OUTPUT POWER 802.11N 40MHZ CH01

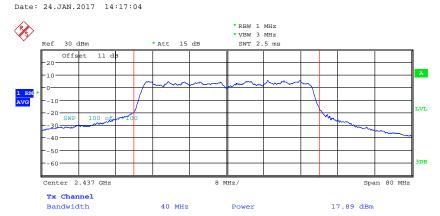


MAX OUTPUT POWER 802.11N 40MHZ CH04
Date: 24.JAN.2017 14:21:42



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

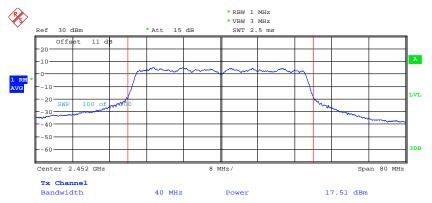

MAX OUTPUT POWER 802.11N 40MHZ CH07 Date: 24.JAN.2017 14:24:08

ANT0		mW			dBm		
ANIU	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High	
802.11n 20MHz	156.68	135.83	123.59	21.95	21.33	20.92	
802.11n 40MHz	63.97	58.61	69.82	18.06	17.68	18.44	
ANT1		mW			dBm		
ANTI	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	20.92	
802.11n 20MHz	108.39	79.25	74.82	20.35	18.99	18.74	
802.11n 40MHz	64.12	61.52	56.36	18.07	17.89	17.51	
Combine		mW			dBm		
Combine	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High	
802.11n 20MHz	265.07	215.08	198.41	24.23	23.33	22.98	
802.11n 40MHz	128.09	120.13	126.18	21.08	20.80	21.01	



FCC ID: 2AK34-IAR630C

#### Limits:

Frequency	Power			
MHz	dBm			
902 - 928	30			
2400 – 2483.5	30			
5725 - 5850	30			

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider \$15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2AK34-IAR630C

### 3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power

EIRP = 24.23 dBm

Limit: EIRP = +36 dBm for Antenna gain <6 dBi

Test equipment used: ETSTW-RE 055

### 3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

$$S = \frac{PG}{4 \pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain

Item	Unit	Value	Remarks
P	mW	264.8500	Peak value
D	dB		
AG	dBi	5.16	
G		3.2810	Calculated Value
R	cm	20	Assumed value
S	mW/cm <sup>2</sup>	0.1729	Calculated value

#### Limits:

Limit for General Population / Uncontrolled Exposure					
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )				
1500 – 100.000	1.0				

FCC ID: 2AK34-IAR630C

#### 3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq 1$  GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
(MHz) 30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.

FCC ID: 2AK34-IAR630C

### 3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

#### Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Note: No duty cycle correction was added to the reading of EUT.

FCC ID: 2AK34-IAR630C

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

#### Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

#### Summary table with radiated data of the test plots

Model: IAR-630-C Date: -- °C Mode: Temperature: Engineer: Humidity: -- % Polarization: Table Ant. Result Frequency Reading Factor Limit Margin Detector Degree High (MHz) (dBuV) (dB) (dBuV/m) (dBuV/m) (dB) (Deg.) (cm)

Frequency		ding uV)	Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)

#### Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement:  $30\text{-}1000 \text{ MHz} = \pm 3.30 \text{ dB}$ ,  $1\text{-}18 \text{ GHz} = \pm 2.28 \text{ dB}$ ,  $18\text{-}40 \text{ GHz} = \pm 2.19 \text{ dB}$ ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. See attached diagrams in appendix.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018


FCC ID: 2AK34-IAR630C

### 3.6 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

#### ANT0

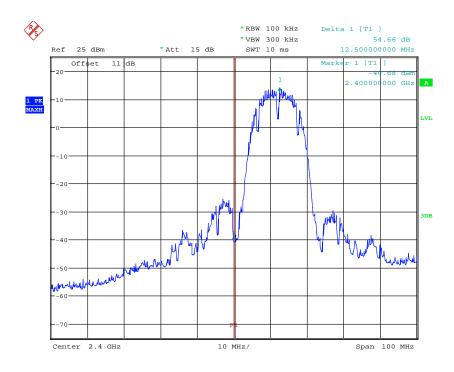


BANDEDGE 802.11B CH01
Date: 24.JAN.2017 13:29:24




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

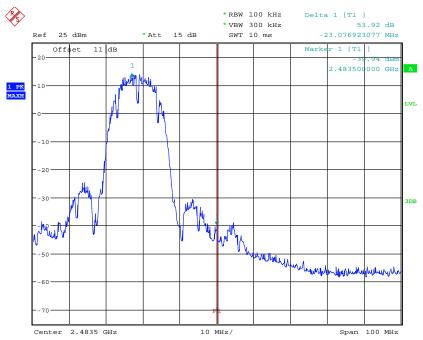

BANDEDGE 802.11B CH11
Date: 24.JAN.2017 13:31:49

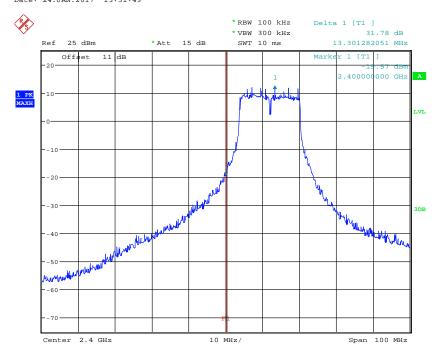


BANDEDGE 802.11G CH01
Date: 24.JAN.2017 13:32:53




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

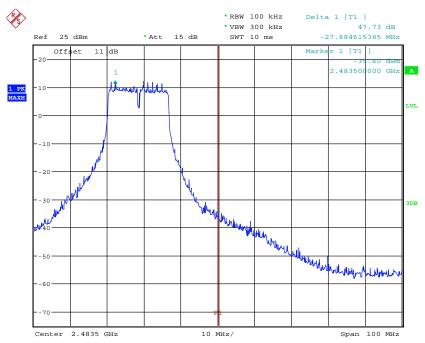

BANDEDGE 802.11G CH11
Date: 24.JAN.2017 13:35:59

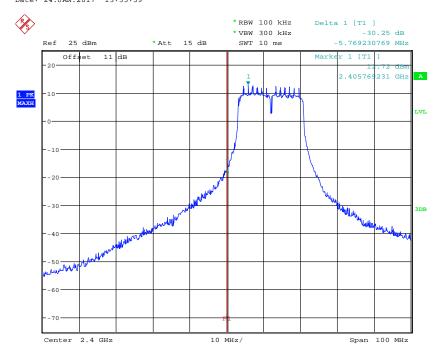


BANDEDGE 802.11N 20MHZ CH01
Date: 24.JAN.2017 13:39:52




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

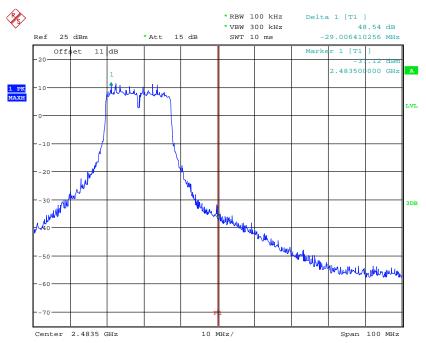

BANDEDGE 802.11N 20MHZ CH11 Date: 24.JAN.2017 13:41:28

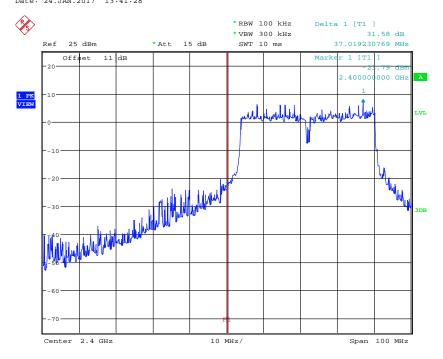


BANDEDGE 802.11N 40MHZ CH01 Date: 24.JAN.2017 14:19:55




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

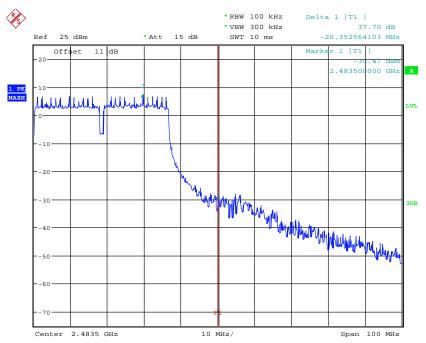

BANDEDGE 802.11N 40MHZ CH07 Date: 24.JAN.2017 13:54:03

#### ANT1

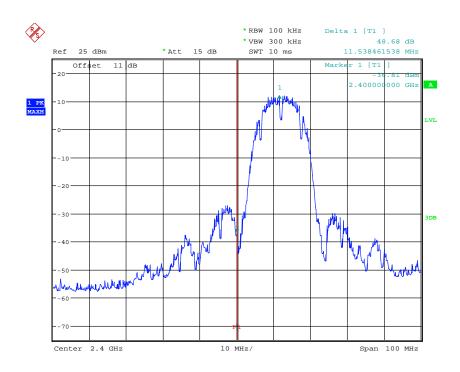


BANDEDGE 802.11B CH01
Date: 24.JAN.2017 14:04:51




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

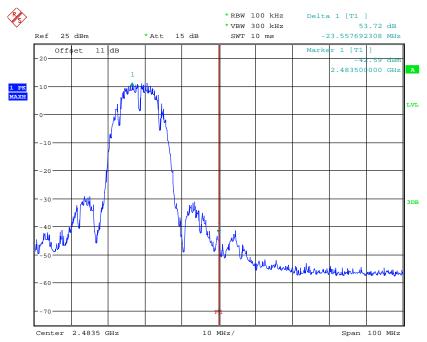

BANDEDGE 802.11B CH11
Date: 24.JAN.2017 14:06:38

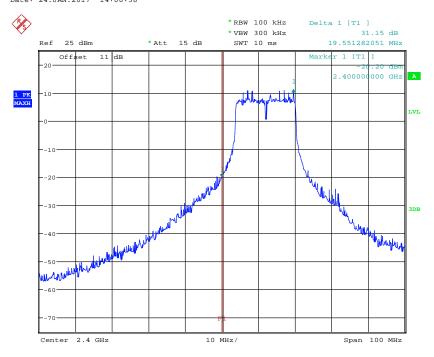


BANDEDGE 802.11G CH01
Date: 24.JAN.2017 14:09:55




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

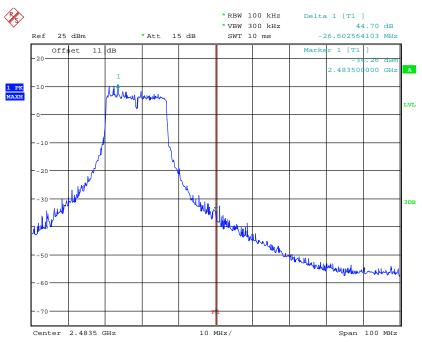

BANDEDGE 802.11G CH11
Date: 24.JAN.2017 14:12:48

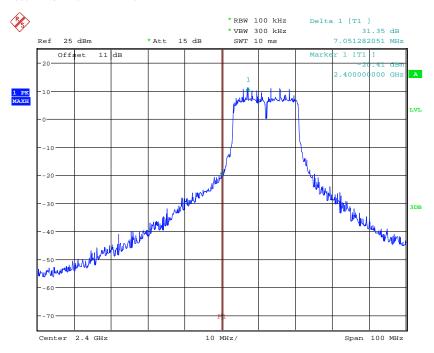


BANDEDGE 802.11N 20MHZ CH01 Date: 24.JAN.2017 14:14:13




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

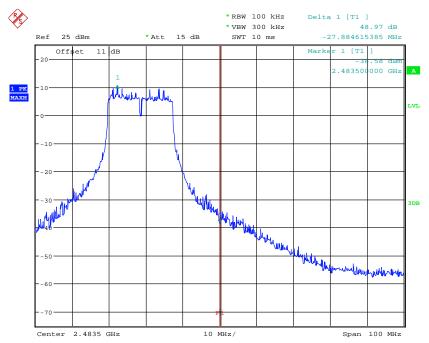

BANDEDGE 802.11N 20MHZ CH11 Date: 24.JAN.2017 14:15:46

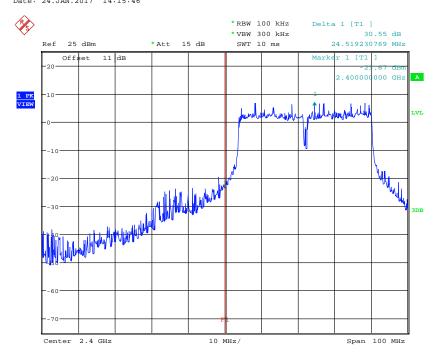


BANDEDGE 802.11N 40MHZ CH01 Date: 24.JAN.2017 14:19:01



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

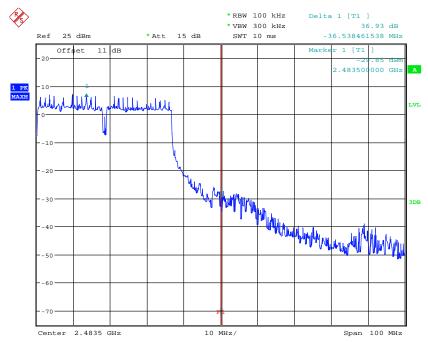

BANDEDGE 802.11N 40MHZ CH07 Date: 24.JAN.2017 14:24:30

#### Limit:

Frequency Range / MHz	Limit
902 –928	
2400 – 2483.5	- 20 dB
5725 - 5850	


Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2AK34-IAR630C

#### 3.7 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

#### ANT0

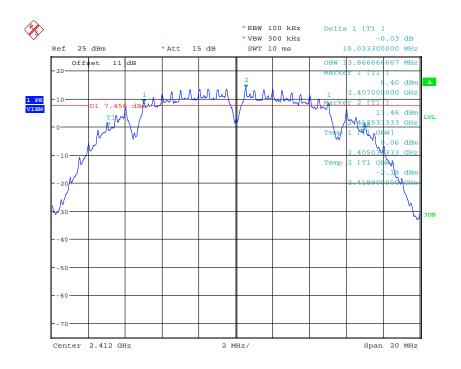


6DB BANDWIDTH 802.11B CH01 Date: 24.JAN.2017 13:29:12




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

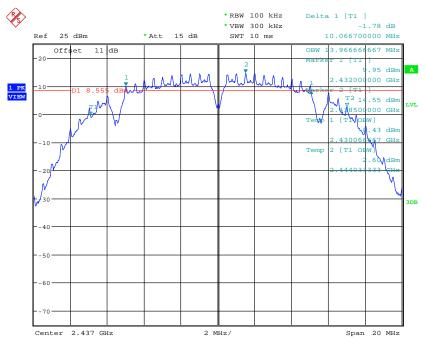

6DB BANDWIDTH 802.11B CH06
Date: 24.JAN.2017 13:30:54

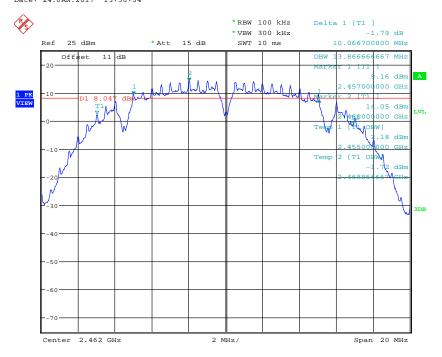


6DB BANDWIDTH 802.11B CH11 Date: 24.JAN.2017 13:31:37




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

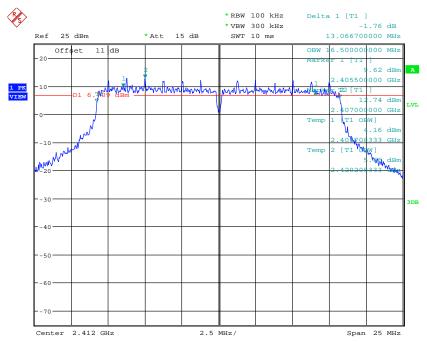

6DB BANDWIDTH 802.11G CH01
Date: 24.JAN.2017 13:32:41

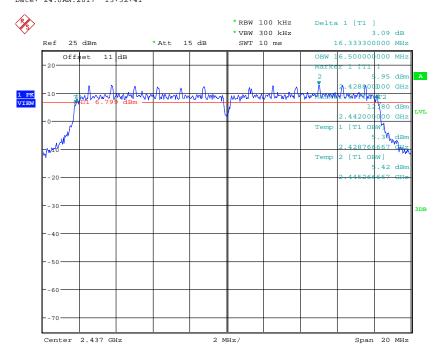


6DB BANDWIDTH 802.11G CH06
Date: 24.JAN.2017 13:33:50




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

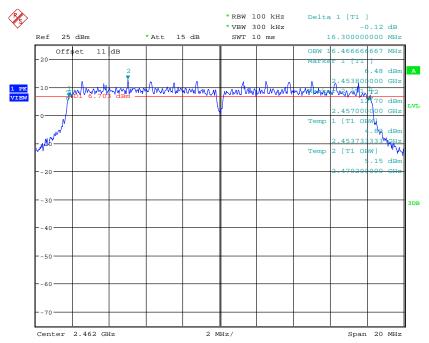

6DB BANDWIDTH 802.11G CH11
Date: 24.JAN.2017 13:35:47

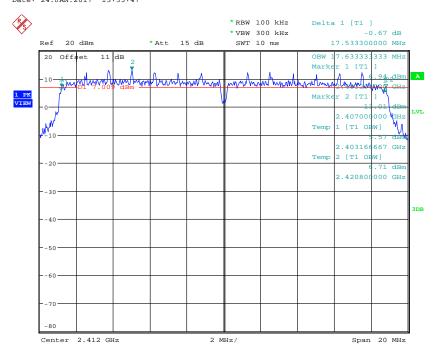


6DB BANDWIDTH 802.11N 20MHZ CH01 Date: 24.JAN.2017 13:37:34




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

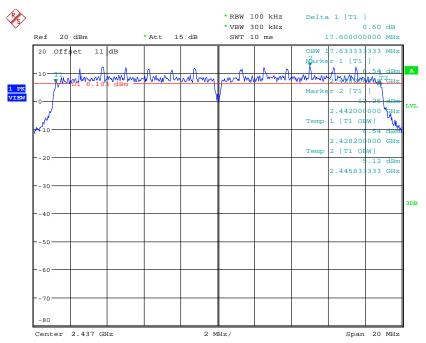

6DB BANDWIDTH 802.11N 20MHZ CH06 Date: 24.JAN.2017 13:40:26

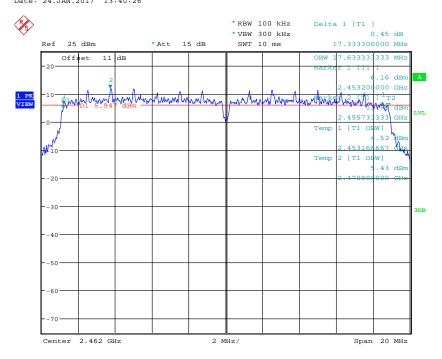


6DB BANDWIDTH 802.11N 20MHZ CH11 Date: 24.JAN.2017 13:41:16




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

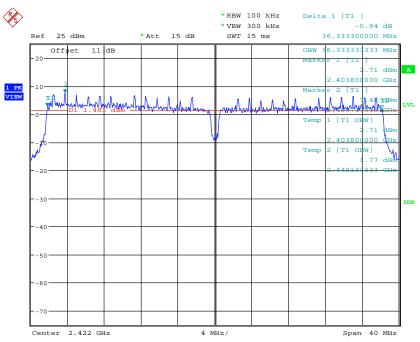

6DB BANDWIDTH 802.11N 40MHZ CH01 Date: 24.JAN.2017 13:55:28

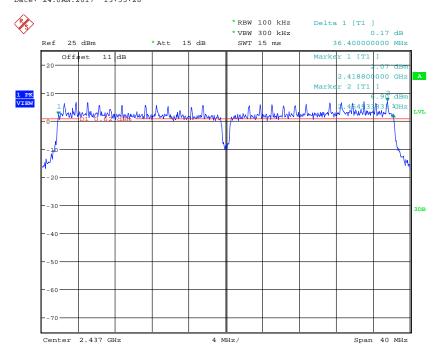


6DB BANDWIDTH 802.11N 40MHZ CH04 Date: 24.JAN.2017 13:52:24




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

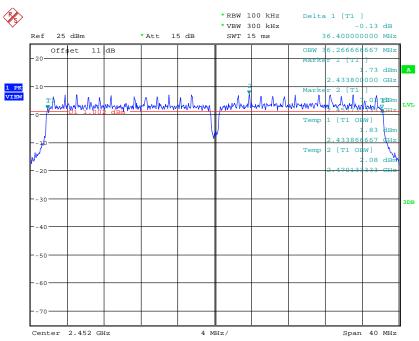

6DB BANDWIDTH 802.11N 40MHZ CH07 Date: 24.JAN.2017 13:53:48

#### ANT1

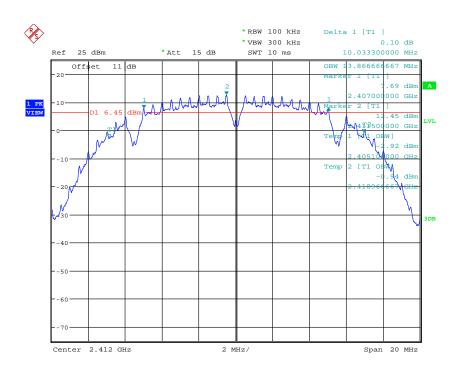


6DB BANDWIDTH 802.11B CH01 Date: 24.JAN.2017 14:04:39




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

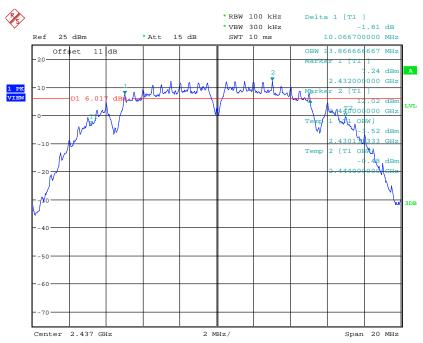

6DB BANDWIDTH 802.11B CH06
Date: 24.JAN.2017 14:05:22

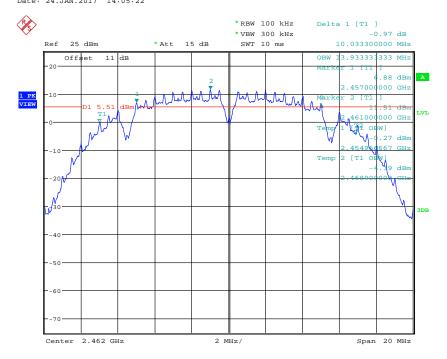


6DB BANDWIDTH 802.11B CH11
Date: 24.JAN.2017 14:06:26




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

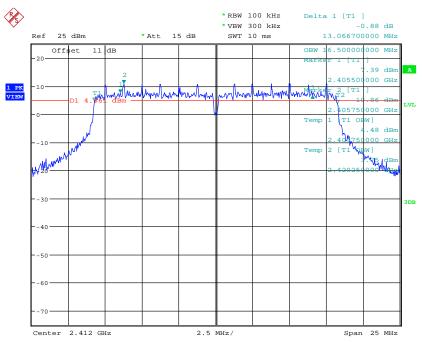

6DB BANDWIDTH 802.11G CH01 Date: 24.JAN.2017 14:09:43

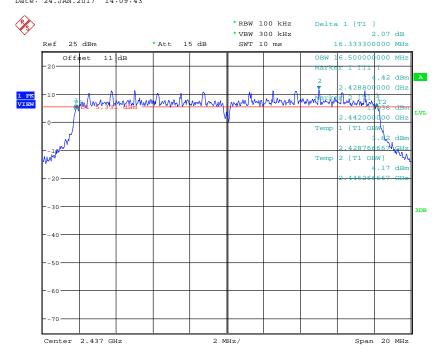


6DB BANDWIDTH 802.11G CH06 Date: 24.JAN.2017 14:10:56




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

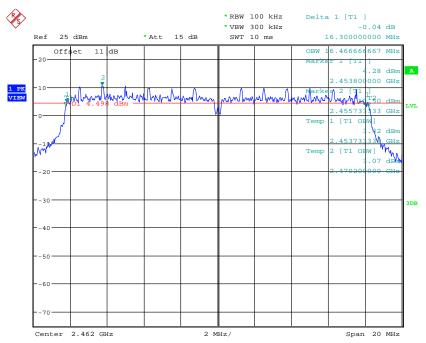

6DB BANDWIDTH 802.11G CH11
Date: 24.JAN.2017 14:12:36

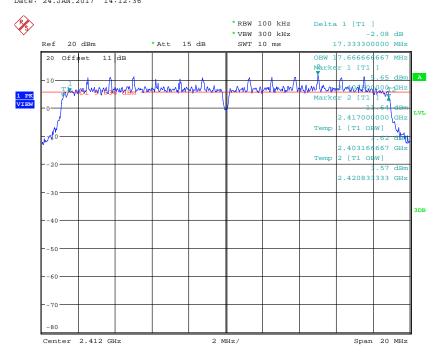


6DB BANDWIDTH 802.11N 20MHZ CH01 Date: 24.JAN.2017 14:14:01




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

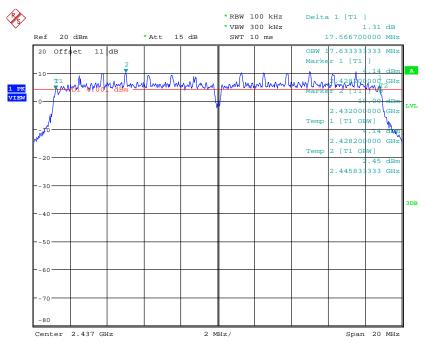

6DB BANDWIDTH 802.11N 20MHZ CH06 Date: 24.JAN.2017 14:14:56

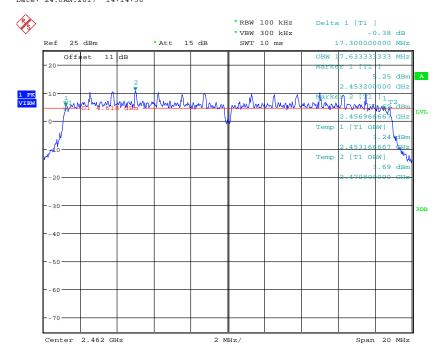


6DB BANDWIDTH 802.11N 20MHZ CH11 Date: 24.JAN.2017 14:15:34




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

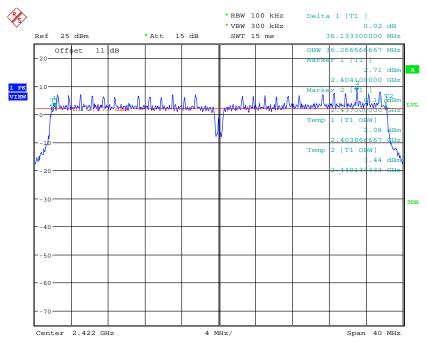

6DB BANDWIDTH 802.11N 40MHZ CH01 Date: 24.JAN.2017 14:17:11

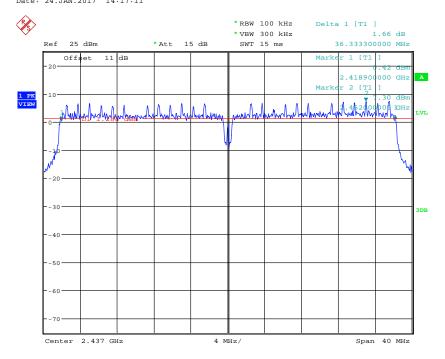


6DB BANDWIDTH 802.11N 40MHZ CH04 Date: 24.JAN.2017 14:21:48



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

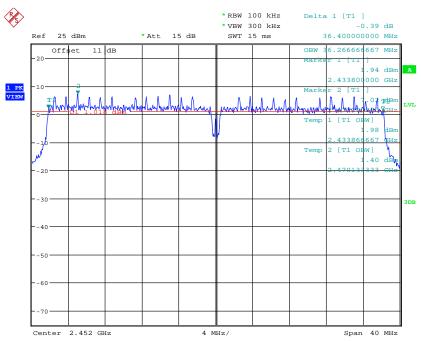

6DB BANDWIDTH 802.11N 40MHZ CH07 Date: 24.JAN.2017 14:24:15

#### **Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050.



FCC ID: 2AK34-IAR630C

#### 3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.


ANT0	mW			dBm			
ANTO	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High	
802.11n 20MHz	0.562	0.63	0.571	-2.50	-2.01	-2.43	
802.11n 40MHz	0.147	0.178	0.171	-8.32	-7.50	-7.68	
ANT1	mW			dBm			
ANTI	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High	
802.11n 20MHz	0.624	0.312	0.385	-2.05	-5.06	-4.14	
802.11n 40MHz	0.424	0.296	0.319	-3.73	-5.29	-4.96	
Combine		mW			dBm		
Comone	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High	
802.11n 20MHz	1.186	0.942	0.956	0.74	-0.26	-0.20	
802.11n 40MHz	0.571	0.474	0.49	-2.43	-3.24	-3.10	




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

ANT0

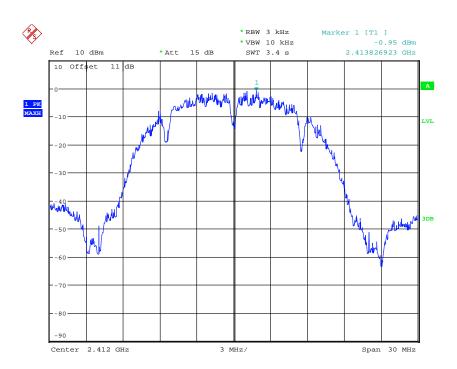

POWER DENSITY 802.11B CH01
Date: 24.JAN.2017 13:29:20

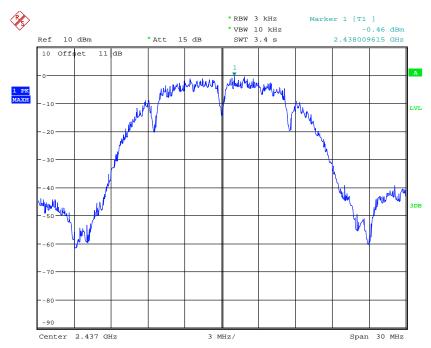

POWER DENSITY 802.11B CH06
Date: 24.JAN.2017 13:31:02




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C



POWER DENSITY 802.11B CH11
Date: 24.JAN.2017 13:31:45

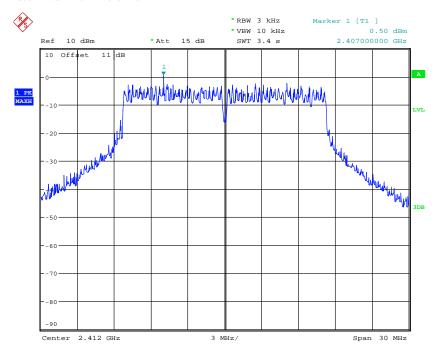


POWER DENSITY 802.11G CH01
Date: 24.JAN.2017 13:32:49




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

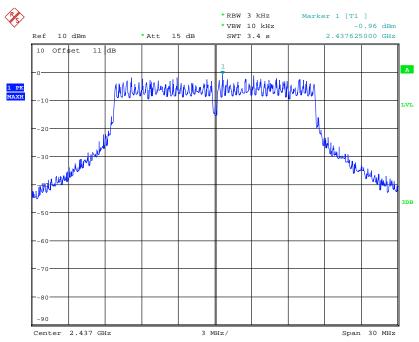

POWER DENSITY 802.11G CH06
Date: 24.JAN.2017 13:33:58

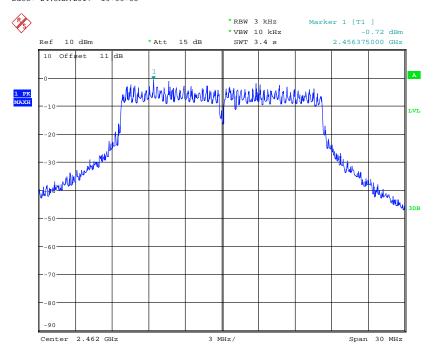


POWER DENSITY 802.11G CH11
Date: 24.JAN.2017 13:35:55




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

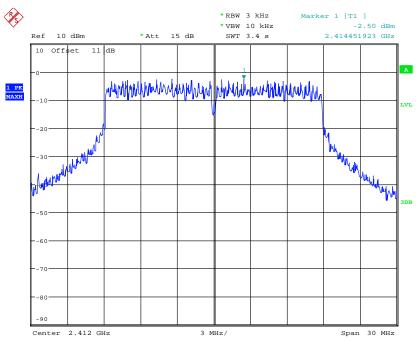

POWER DENSITY 802.11N 20MHZ CH01 Date: 24.JAN.2017 13:37:42

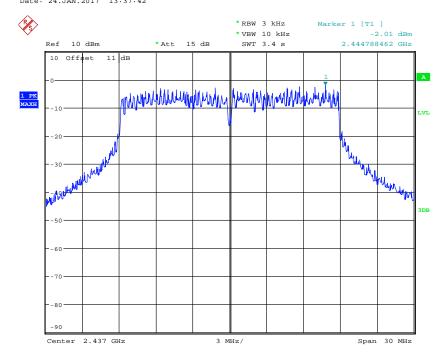


POWER DENSITY 802.11N 20MHZ CH06 Date: 24.JAN.2017 13:40:34




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

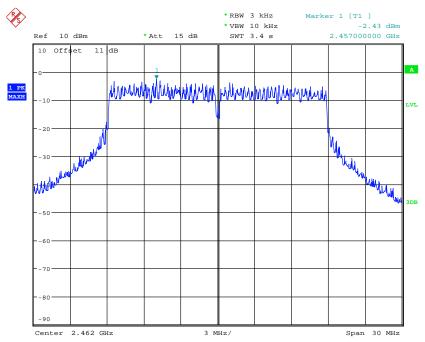

POWER DENSITY 802.11N 20MHZ CH11 Date: 24.JAN.2017 13:41:24

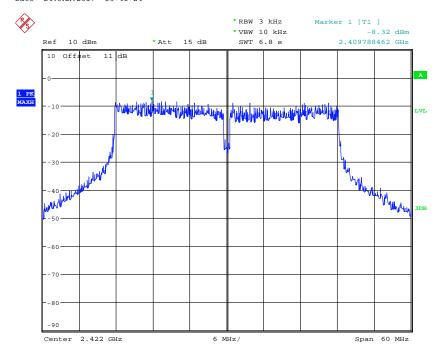


POWER DENSITY 802.11N 40MHZ CH01 Date: 24.JAN.2017 13:55:39




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

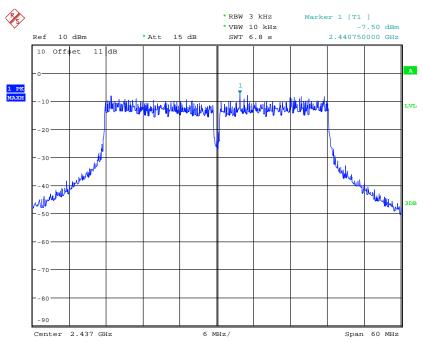

POWER DENSITY 802.11N 40MHZ CH04 Date: 24.JAN.2017 13:52:35

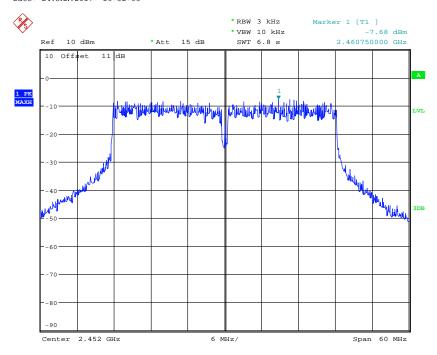


POWER DENSITY 802.11N 40MHZ CH07 Date: 24.JAN.2017 13:53:59



Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

ANT1

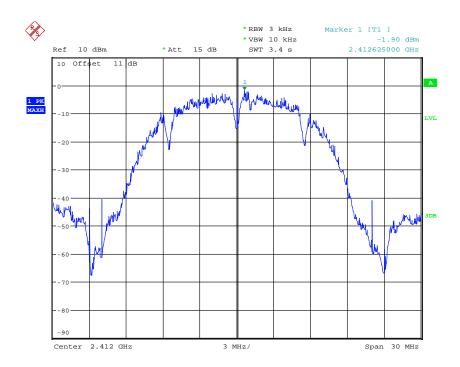

POWER DENSITY 802.11B CH01
Date: 24.JAN.2017 14:04:47




POWER DENSITY 802.11B CH06
Date: 24.JAN.2017 14:05:30




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

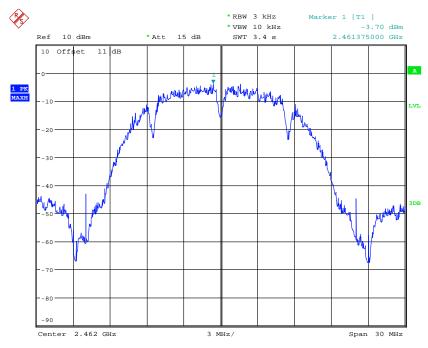

POWER DENSITY 802.11B CH11
Date: 24.JAN.2017 14:06:34

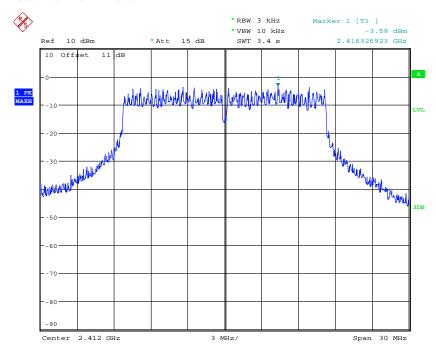


POWER DENSITY 802.11G CH01
Date: 24.JAN.2017 14:09:51




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

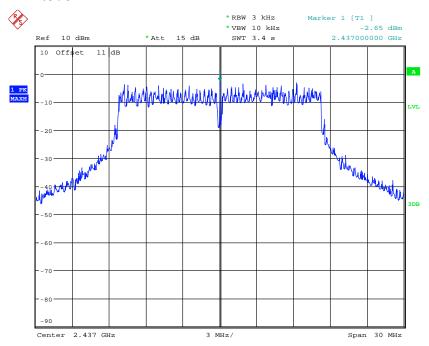

POWER DENSITY 802.11G CH06
Date: 24.JAN.2017 14:11:04

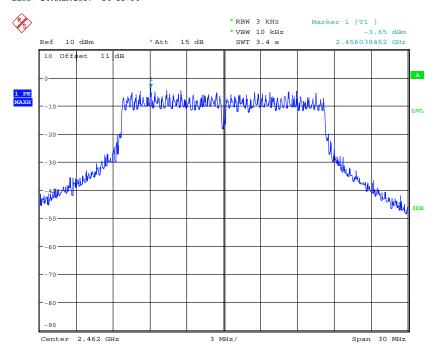


POWER DENSITY 802.11G CH11
Date: 24.JAN.2017 14:12:44




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

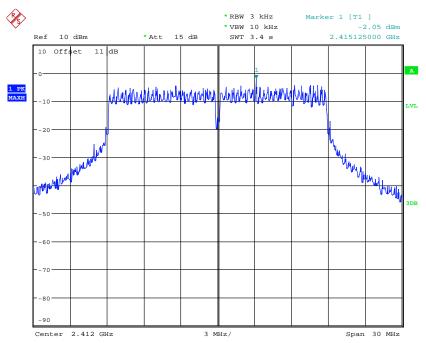

POWER DENSITY 802.11N 20MHZ CH01 Date: 24.JAN.2017 14:14:09

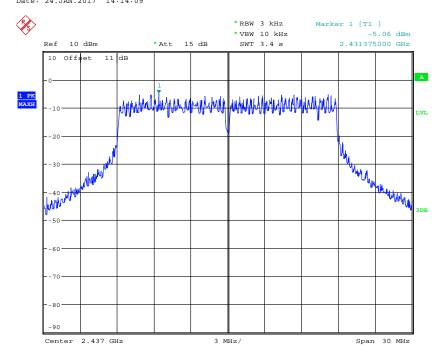


POWER DENSITY 802.11N 20MHZ CH06
Date: 24.JAN.2017 14:15:04




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

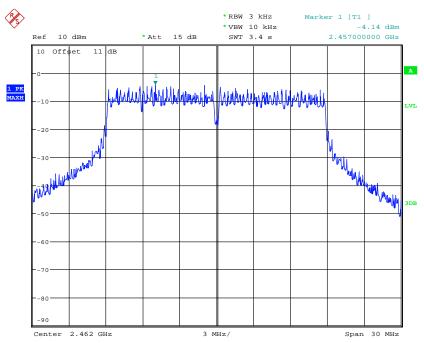

POWER DENSITY 802.11N 20MHZ CH11 Date: 24.JAN.2017 14:15:42

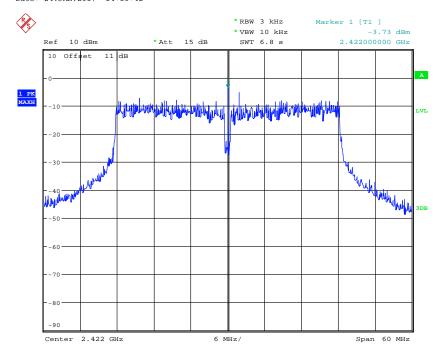


POWER DENSITY 802.11N 40MHZ CH01 Date: 24.JAN.2017 14:17:22




Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C

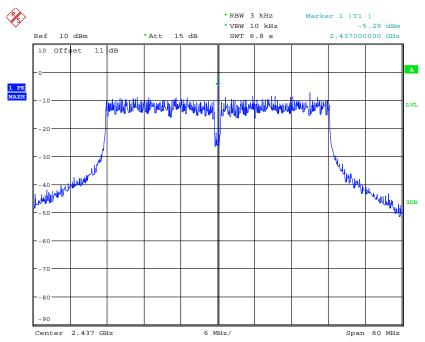

POWER DENSITY 802.11N 40MHZ CH04
Date: 24.JAN.2017 14:21:59

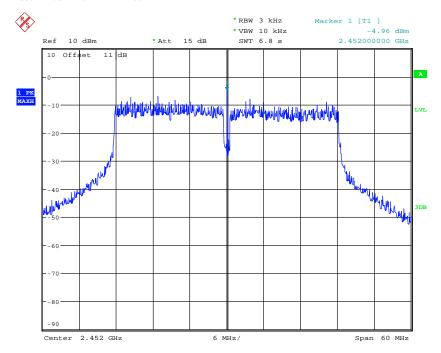

POWER DENSITY 802.11N 40MHZ CH07 Date: 24.JAN.2017 14:24:26



FCC ID: 2AK34-IAR630C

#### **Limits:**

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2AK34-IAR630C

#### 3.9 Radiated Emission from Digital Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission	Field Strength	Field Strength
(MHz)	(microvolts/meter)	(dBmicrovolts/meter)
30 – 88	100	40.0
88 - 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 004, ETSTW-RE 030 ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147

Explanation: The test results are listed in the separated test report no.: W6M21701-16545-P-15B.



FCC ID: 2AK34-IAR630C

#### 3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Model: Mode: Polarization:	IAR-630-	Tem	e: perature: imidity:	  	°C %	Eng	gineer:	
Frequency		ding uV)	Factor (dB)		sult uV)		nit uV)	Margin
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)
		1	1				-	-
		I	I				I	-
		i	i				1	-

		. •	
ואט	0117	ation:	•
1 ( ) (		ancon	

Frequency		ding uV)	Factor (dB)		sult uV)		mit uV)	Margin
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)
				-				
				1				

#### Note:

- 1. The formula of measured value as: Test Result = Reading + Correction Factor
- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty =  $\pm 0.74$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. Up Line: QP Limit Line, Down Line: Ave Limit Line.
- 7. This test is not required because the EUT uses DC power supply.

#### **Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)		
	Quasi Peak	Average	
0.15-0.5	66 to 56	56 to 46	
0.5-5	56	46	
5-30	60	50	

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 028.

FCC ID: 2AK34-IAR630C

#### **Appendix**

#### Measurement diagrams

Spurious Emissions radiated\_TX

FCC ID: 2AK34-IAR630C


#### **Appendix**

#### Measurement diagrams

Spurious Emissions radiated\_TX\_ANT0



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

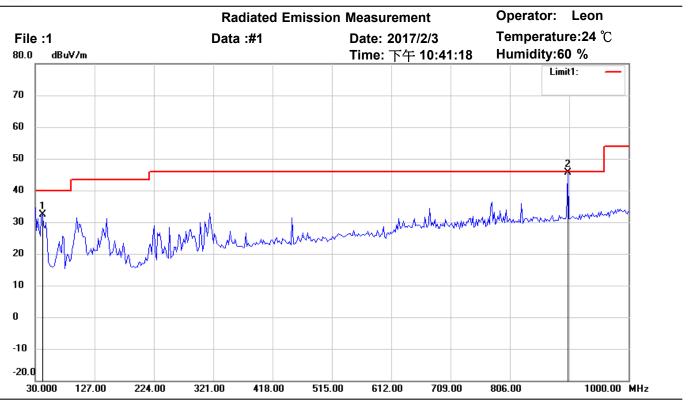

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	40.80	peak	-8.33	32.47	40.00	150	60	-7.53	
*	900.8617	41.62	QP	3.93	45.55	46.00	150	195	-0.45	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

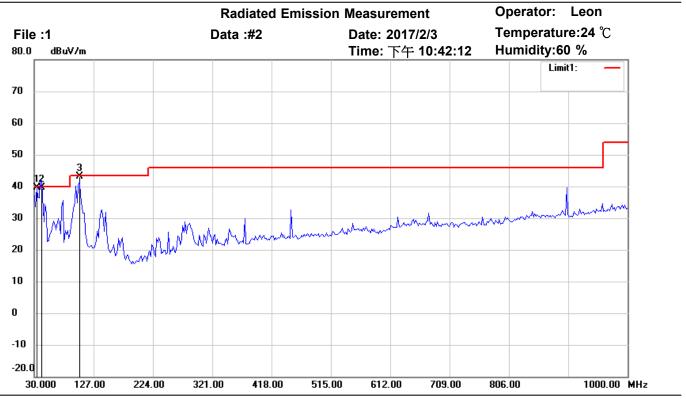

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	33.8878	47.01	QP	-7.41	39.60	40.00	150	235	-0.40	
	41.6633	47.91	QP	-8.33	39.58	40.00	150	160	-0.42	
*	103.8677	51.72	QP	-8.51	43.21	43.50	150	70	-0.29	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

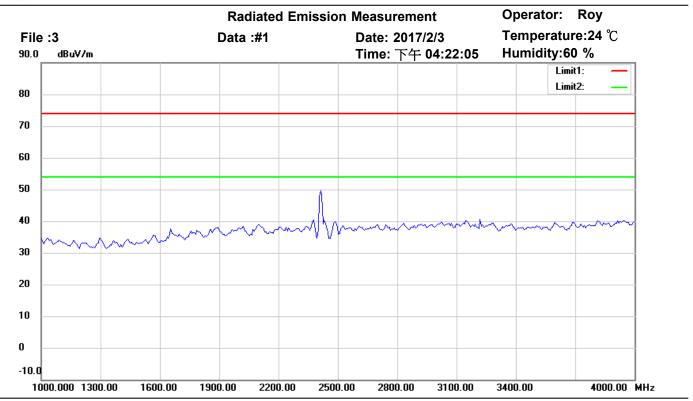

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

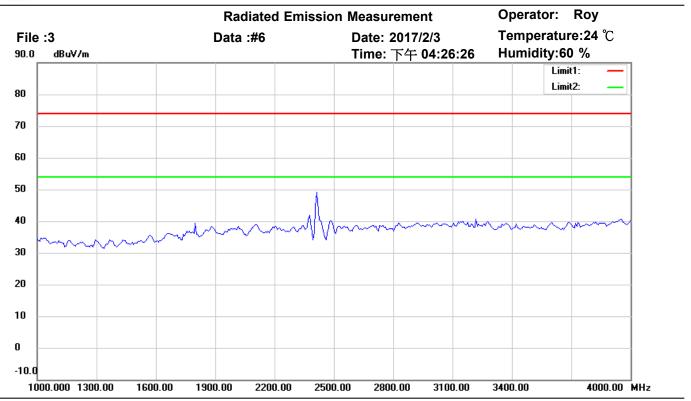

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

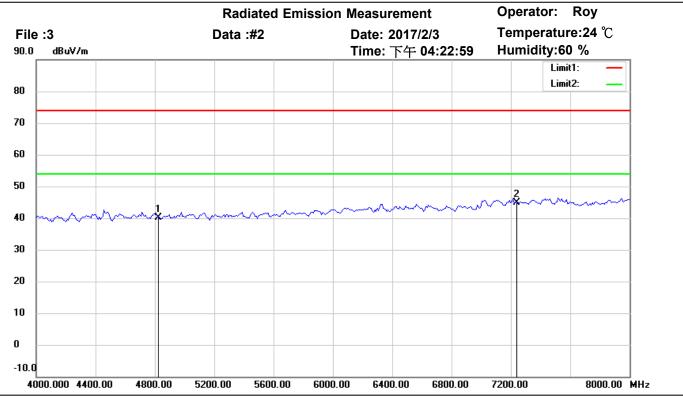

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.59	peak	-0.57	40.02	74.00	150	315	-33.98	
*	7236.000	40.54	peak	4.29	44.83	74.00	150	90	-29.17	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

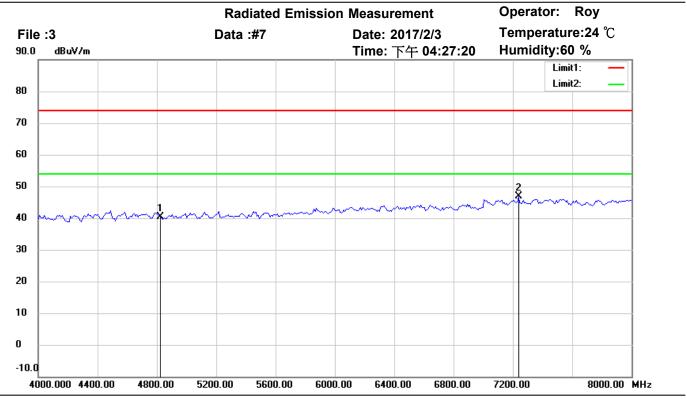

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.88	peak	-0.57	40.31	74.00	150	160	-33.69	
*	7236.000	42.66	peak	4.29	46.95	74.00	150	35	-27.05	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

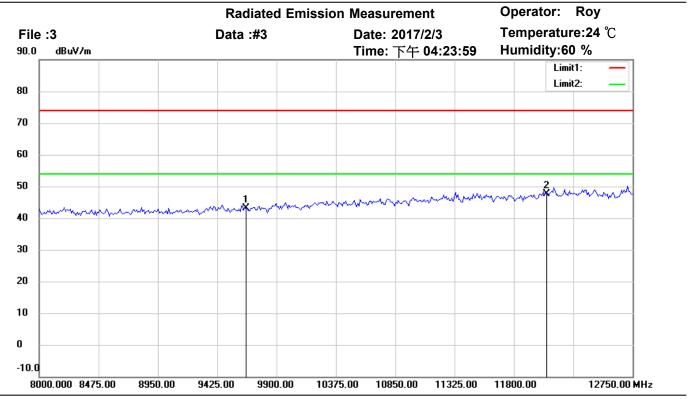

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.57	peak	7.51	43.08	74.00	150	200	-30.92	
*	12060.000	34.36	peak	13.18	47.54	74.00	150	80	-26.46	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

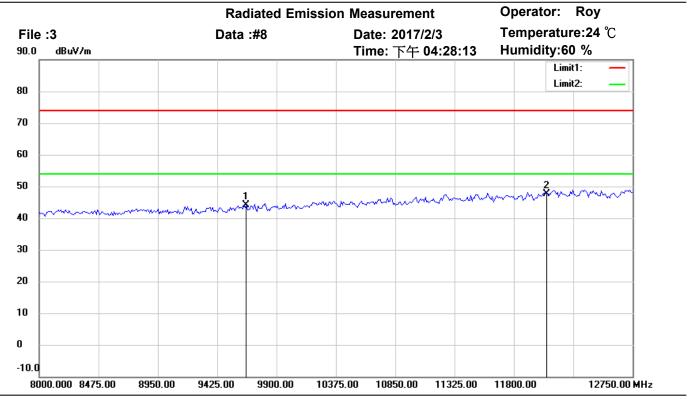

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	36.56	peak	7.51	44.07	74.00	150	175	-29.93	
*	12060.000	34.54	peak	13.18	47.72	74.00	150	100	-26.28	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

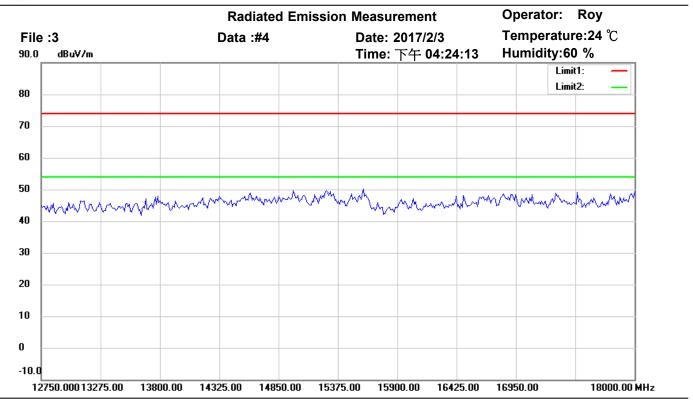

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	l
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

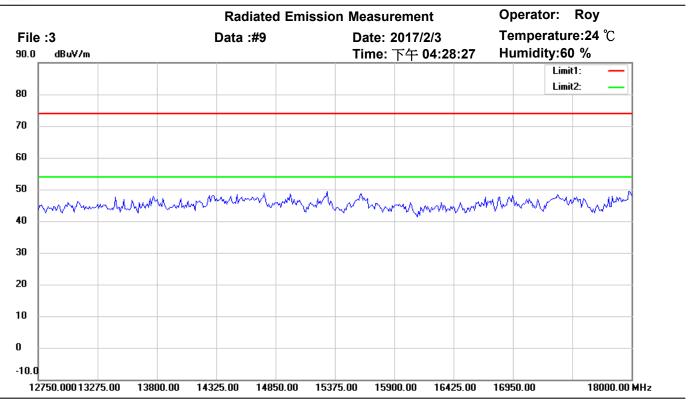

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

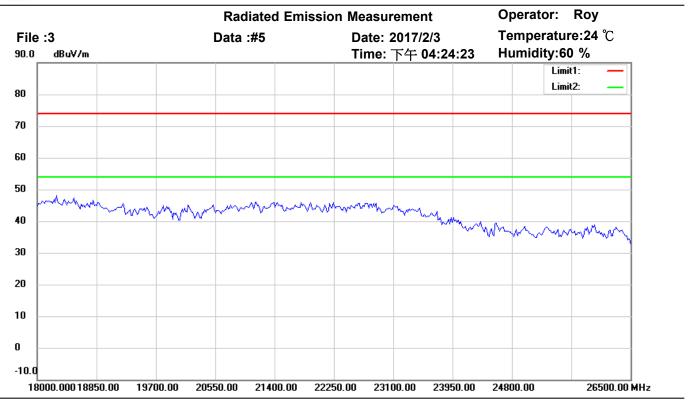

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

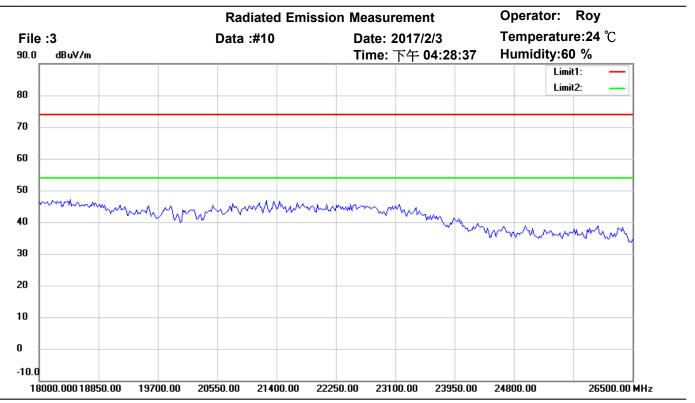

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

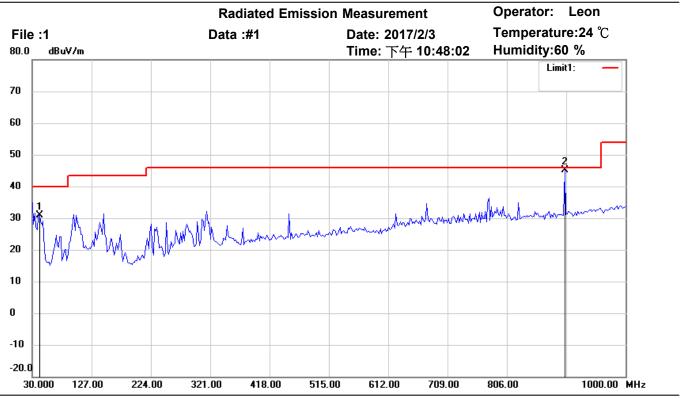

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.24	peak	-8.33	30.91	40.00	150	70	-9.09	
*	900.8617	41.18	QP	3.93	45.11	46.00	150	155	-0.89	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

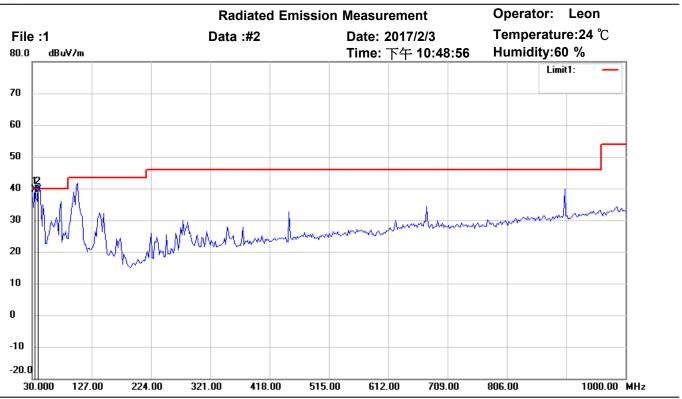

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.10	QP	-7.41	39.69	40.00	150	40	-0.31	
	39.7194	47.79	QP	-8.15	39.64	40.00	150	175	-0.36	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

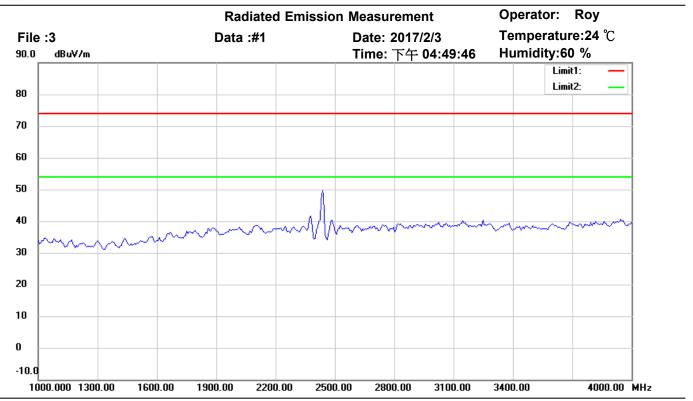

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

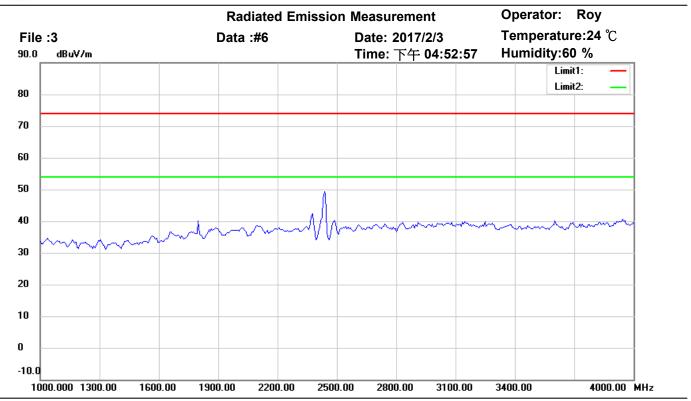

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

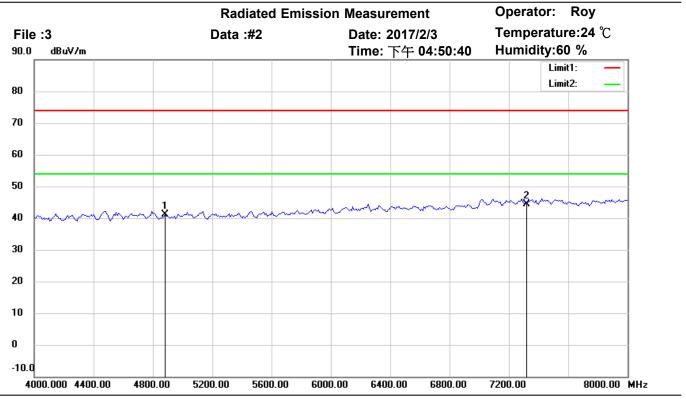

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.51	peak	-0.50	41.01	74.00	150	335	-32.99	
*	7311.000	40.01	peak	4.43	44.44	74.00	150	280	-29.56	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

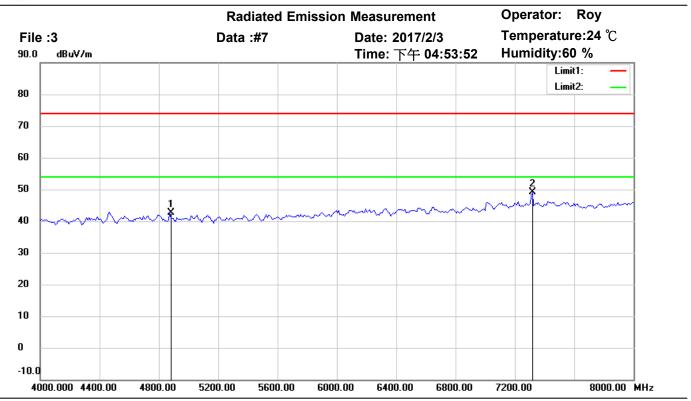

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	43.06	peak	-0.50	42.56	74.00	150	320	-31.44	
*	7318.637	44.60	peak	4.48	49.08	74.00	150	75	-24.92	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

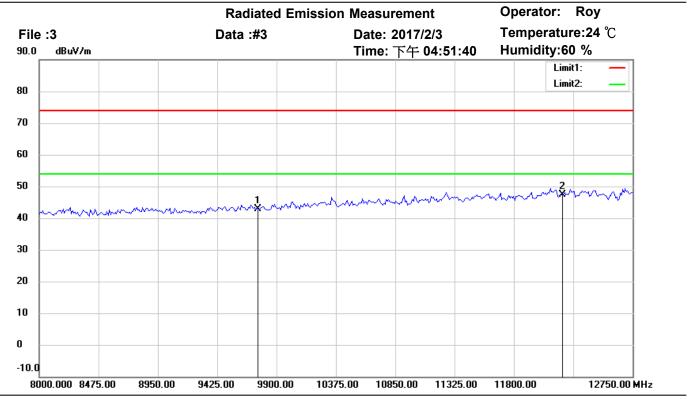

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.37	peak	7.49	42.86	74.00	150	315	-31.14	
*	12185.000	33.66	peak	13.82	47.48	74.00	150	140	-26.52	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

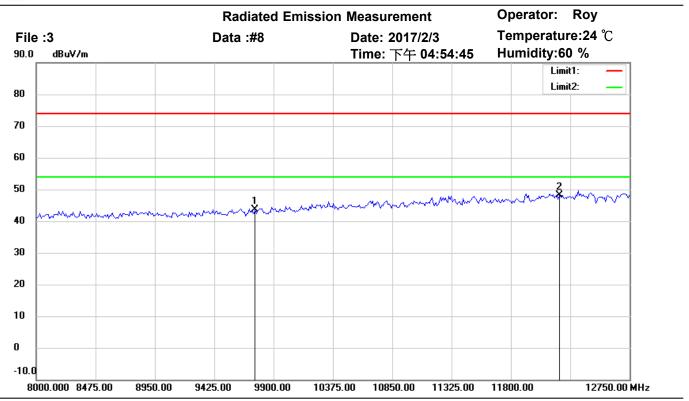

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	36.23	peak	7.49	43.72	74.00	150	115	-30.28	
*	12185.000	34.32	peak	13.82	48.14	74.00	150	240	-25.86	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

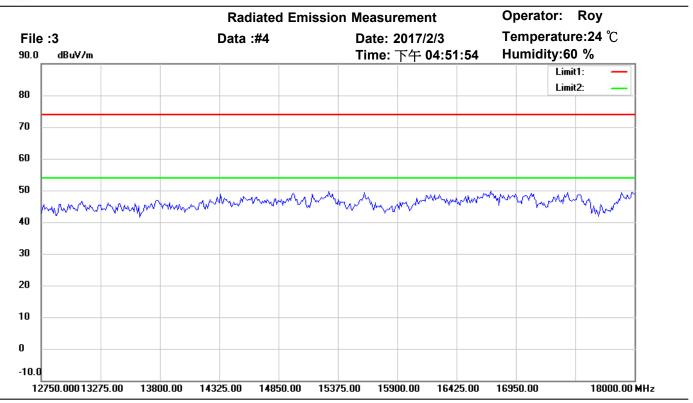

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

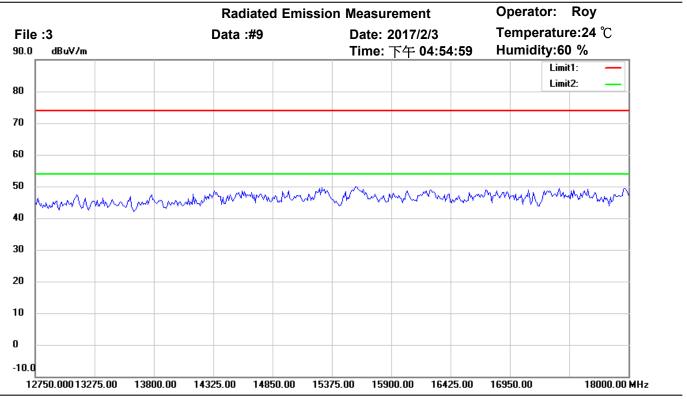

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

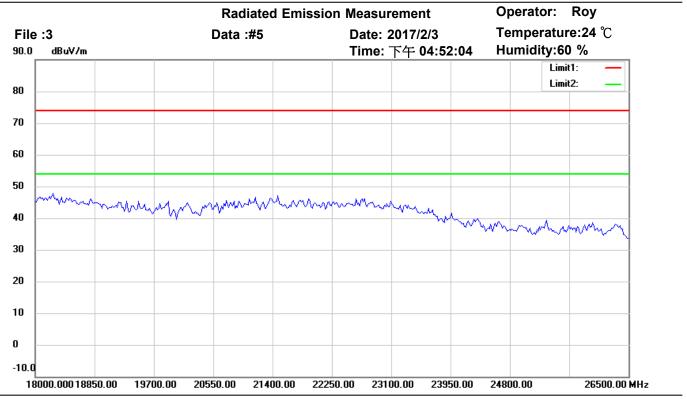

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

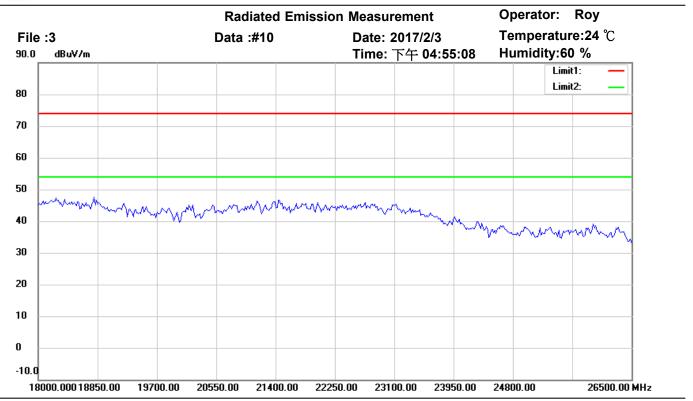

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

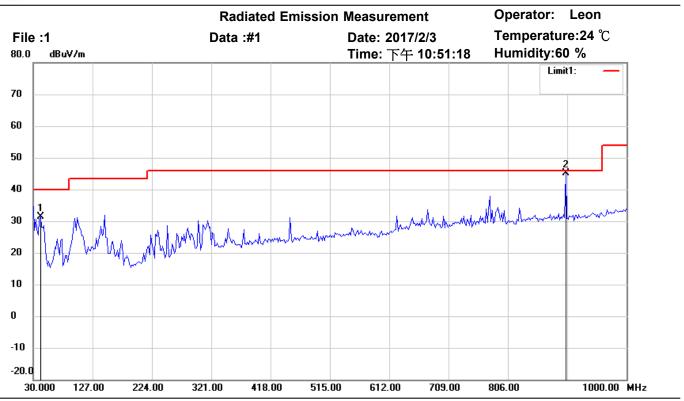

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.79	peak	-8.33	31.46	40.00	150	90	-8.54	
*	900.8617	41.12	QP	3.93	45.05	46.00	150	25	-0.95	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

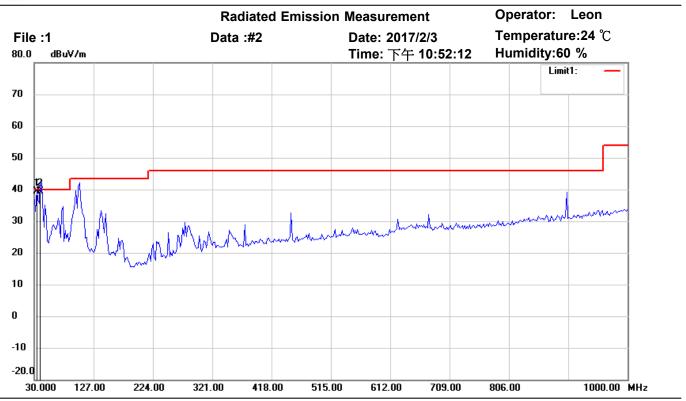

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	33.8878	46.75	QP	-7.41	39.34	40.00	150	125	-0.66	
*	39.7194	47.63	QP	-8.15	39.48	40.00	150	60	-0.52	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

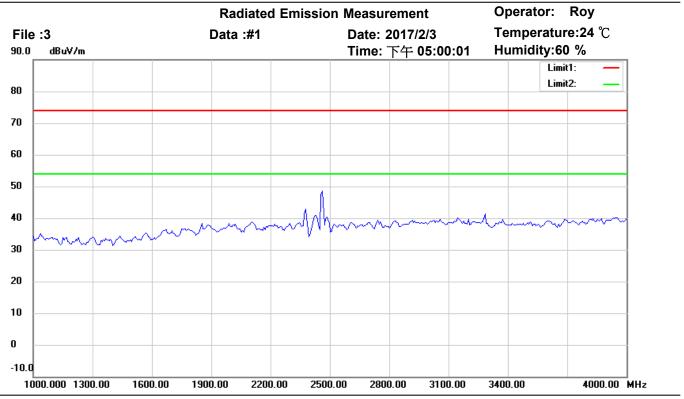

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

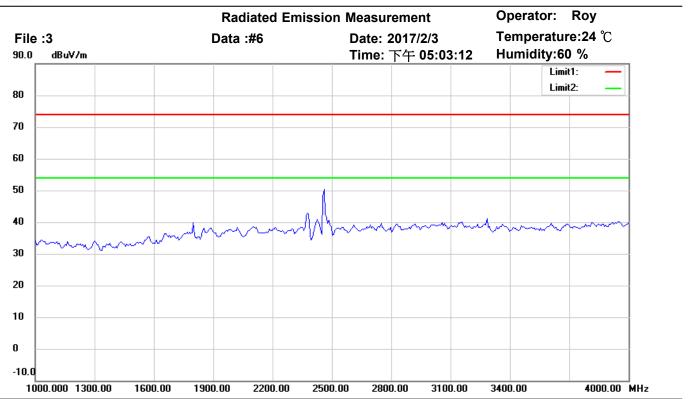

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

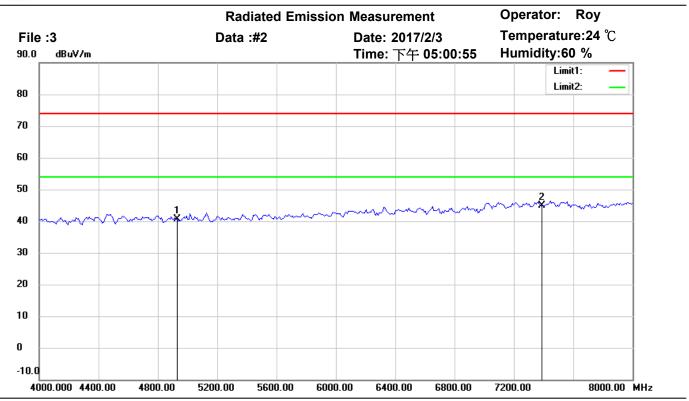

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	41.01	peak	-0.33	40.68	74.00	150	70	-33.32	
*	7386.000	39.88	peak	4.93	44.81	74.00	150	290	-29.19	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

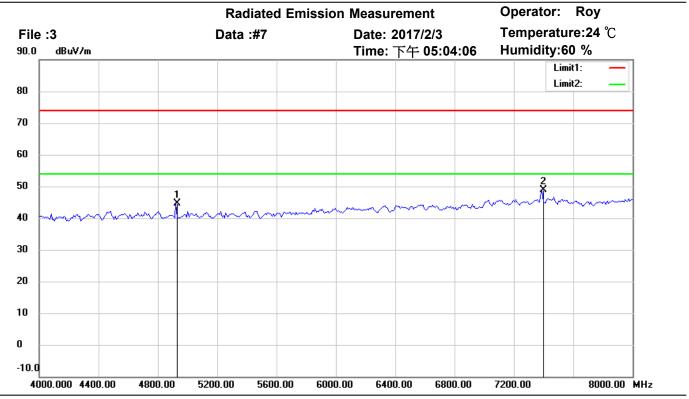

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	45.01	peak	-0.34	44.67	74.00	150	85	-29.33	
*	7390.782	43.86	peak	4.96	48.82	74.00	150	320	-25.18	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

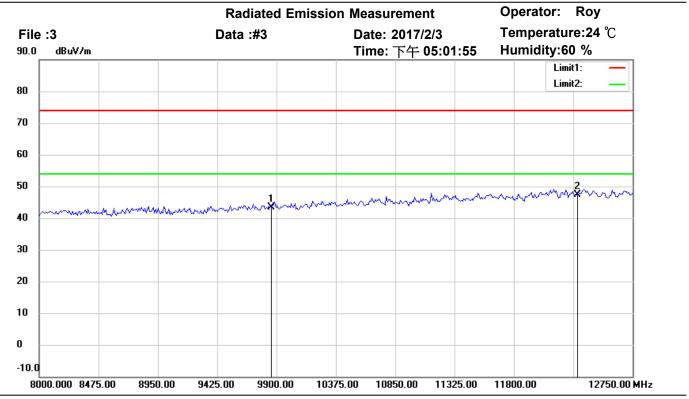

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.80	peak	7.68	43.48	74.00	150	335	-30.52	
*	12310.000	34.14	peak	13.25	47.39	74.00	150	140	-26.61	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

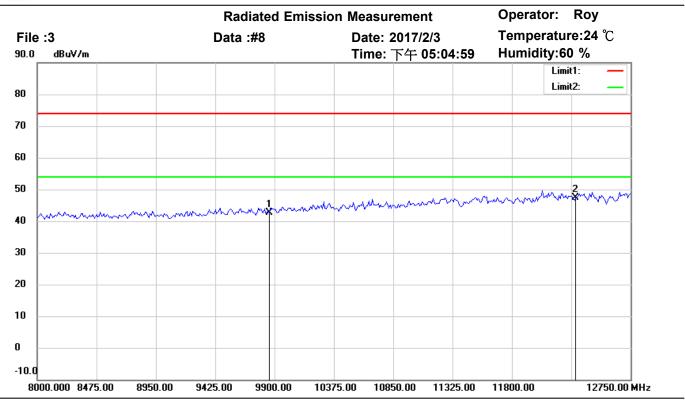

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.87	peak	7.68	42.55	74.00	150	35	-31.45	
*	12310.000	34.03	peak	13.25	47.28	74.00	150	255	-26.72	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

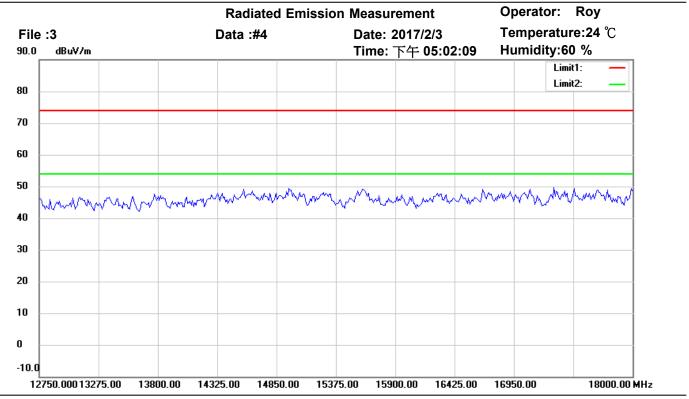

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

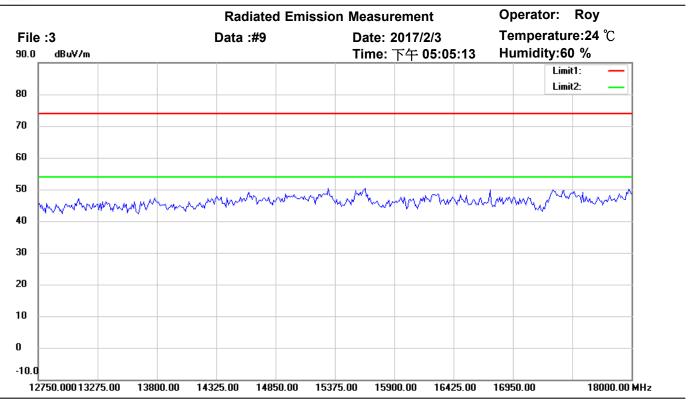

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

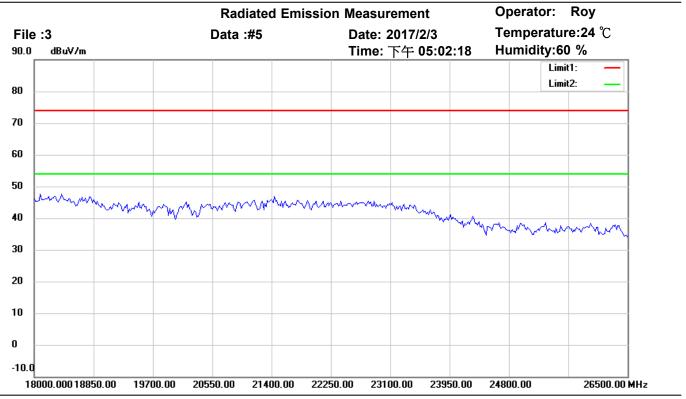

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

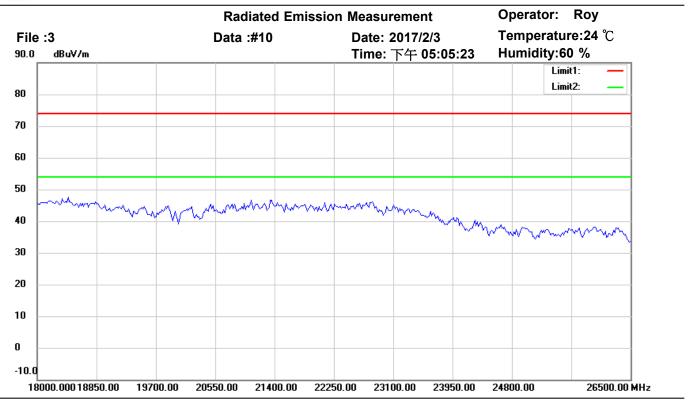

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

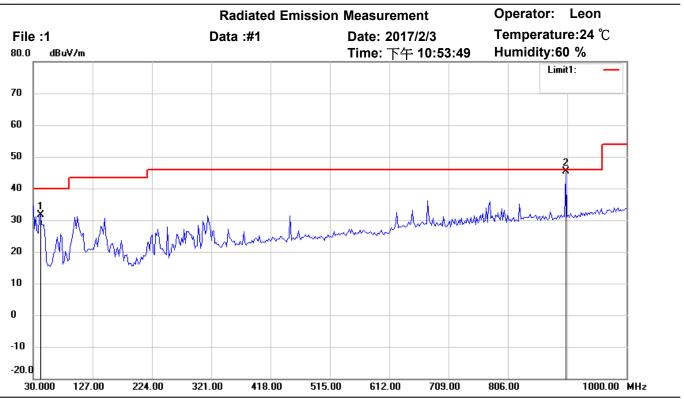

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.90	peak	-8.33	31.57	40.00	150	40	-8.43	
*	900.8617	41.36	QP	3.93	45.29	46.00	150	175	-0.71	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

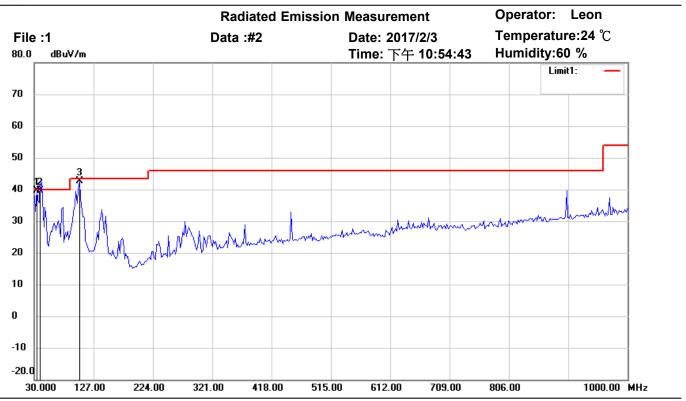

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.03	QP	-7.41	39.62	40.00	150	195	-0.38	
	39.7194	47.66	QP	-8.15	39.51	40.00	150	60	-0.49	
	103.8676	51.26	QP	-8.51	42.75	43.50	150	260	-0.75	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

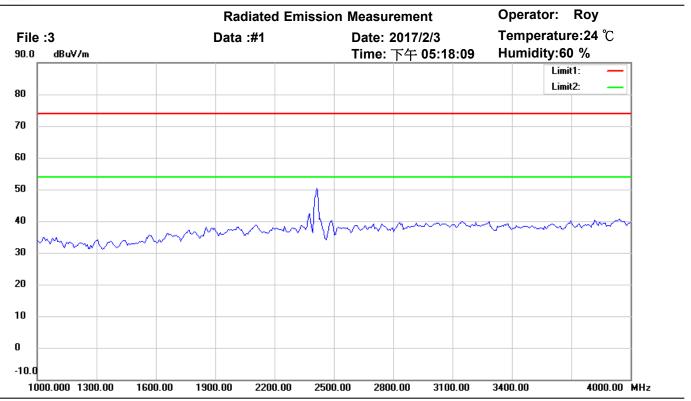

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

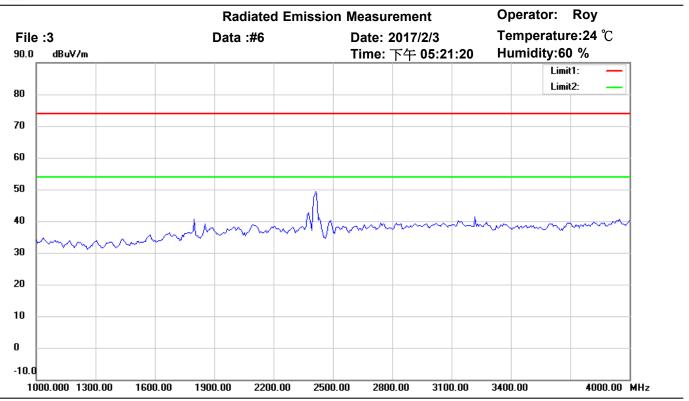

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

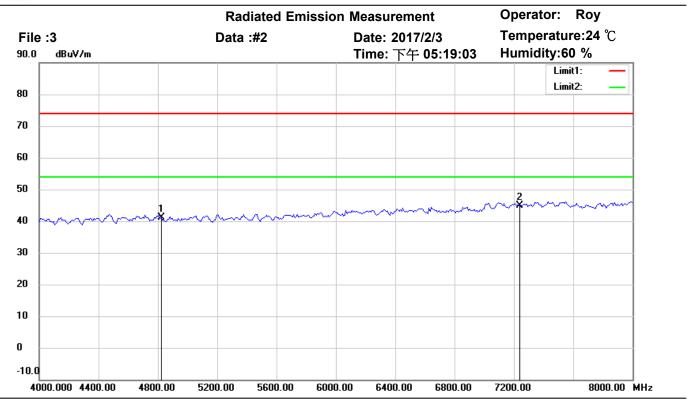

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.79	peak	-0.57	41.22	74.00	150	80	-32.78	
*	7236.000	40.53	peak	4.29	44.82	74.00	150	255	-29.18	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

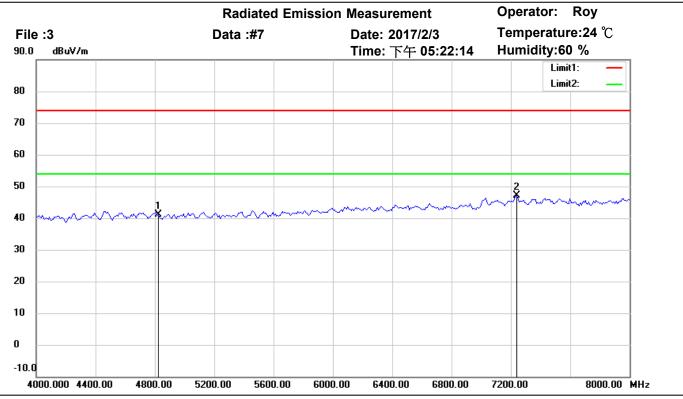

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.76	peak	-0.57	41.19	74.00	150	285	-32.81	
*	7236.000	42.85	peak	4.29	47.14	74.00	150	230	-26.86	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

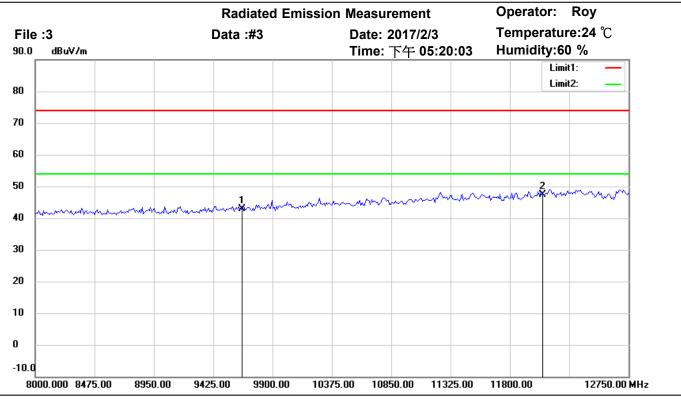

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.41	peak	7.51	42.92	74.00	150	130	-31.08	
*	12060.000	34.24	peak	13.18	47.42	74.00	150	65	-26.58	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

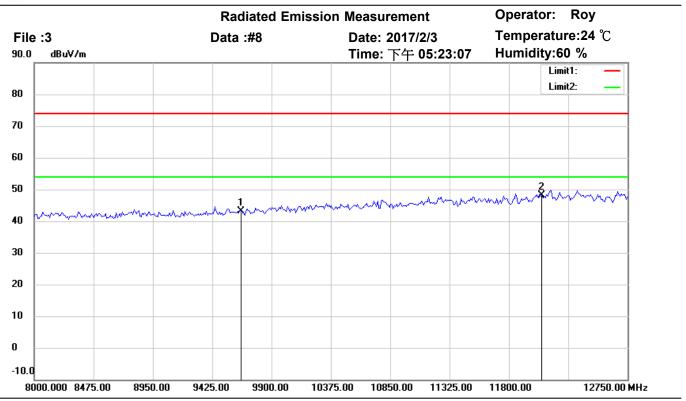

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.59	peak	7.51	43.10	74.00	150	155	-30.90	
*	12060.000	34.95	peak	13.18	48.13	74.00	150	130	-25.87	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

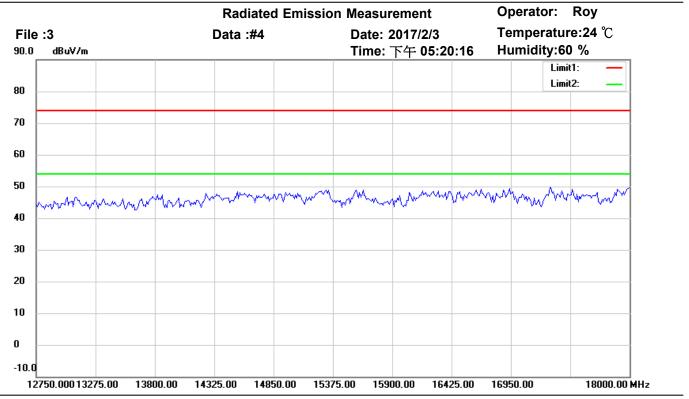

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

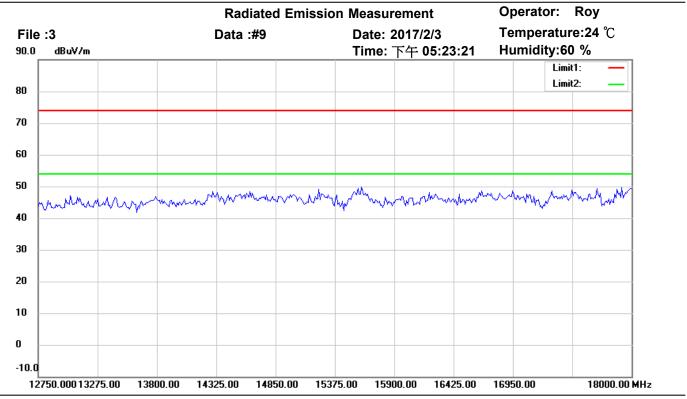

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

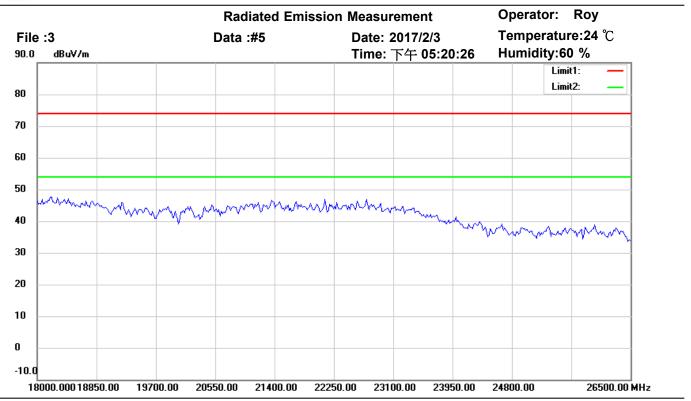

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

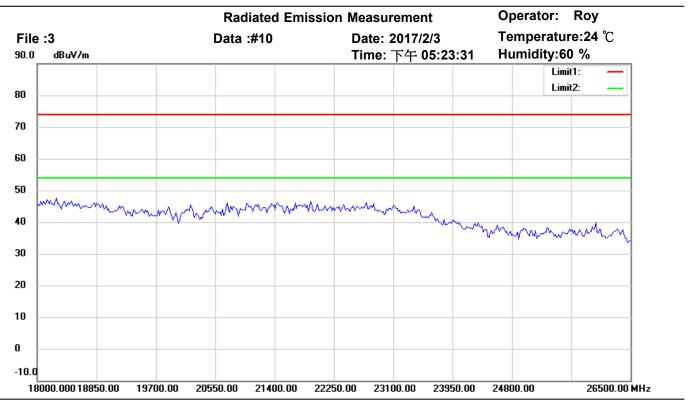

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

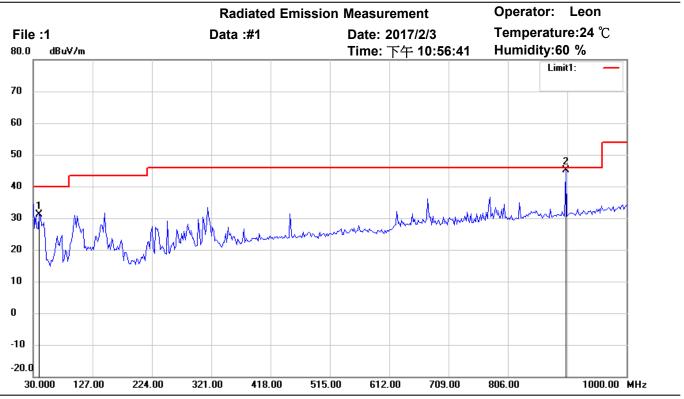

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	39.32	peak	-8.15	31.17	40.00	150	170	-8.83	
*	900.8617	41.30	QP	3.93	45.23	46.00	150	95	-0.77	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

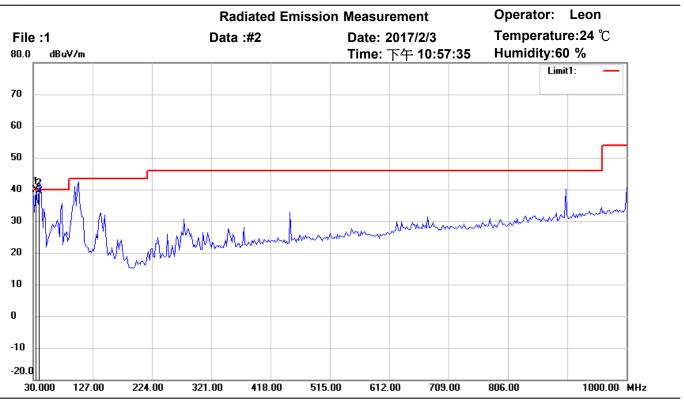

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.19	QP	-7.41	39.78	40.00	150	65	-0.22	
	39.7194	47.63	QP	-8.15	39.48	40.00	150	90	-0.52	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

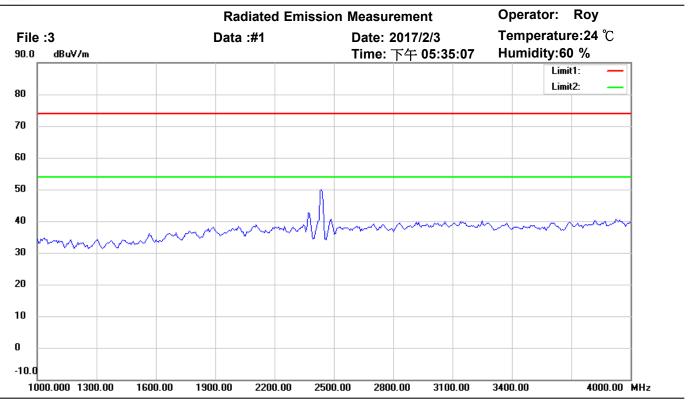

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

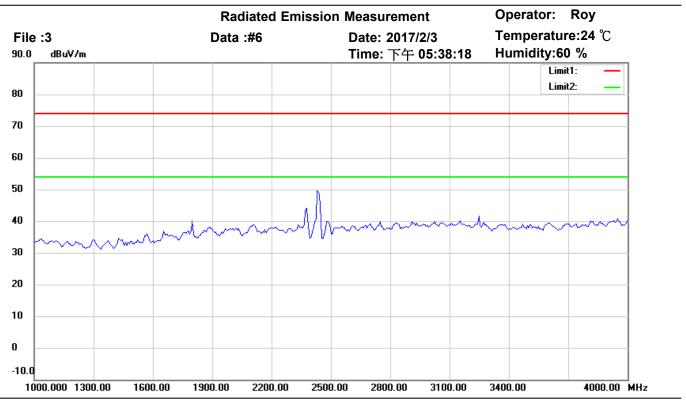

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

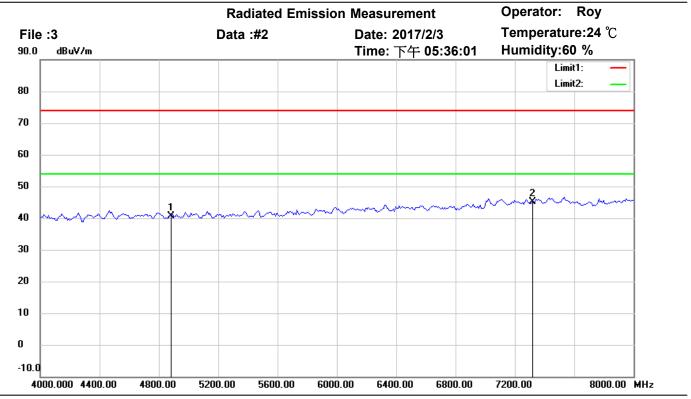

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.18	peak	-0.50	40.68	74.00	150	205	-33.32	
*	7311.000	40.78	peak	4.43	45.21	74.00	150	70	-28.79	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

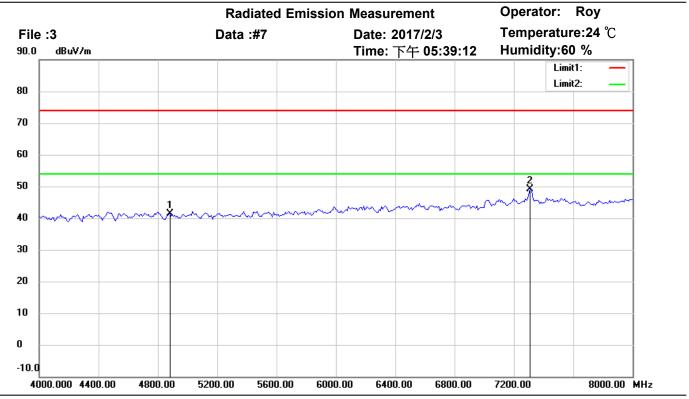

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.79	peak	-0.50	41.29	74.00	150	255	-32.71	
*	7310.621	44.79	peak	4.43	49.22	74.00	150	200	-24.78	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

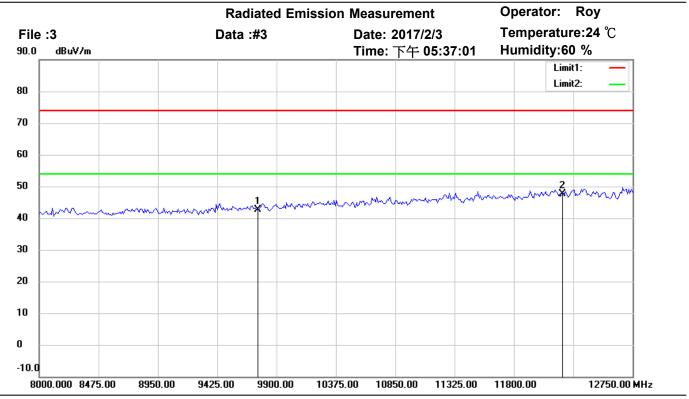

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.03	peak	7.49	42.52	74.00	150	315	-31.48	
*	12185.000	33.78	peak	13.82	47.60	74.00	150	80	-26.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

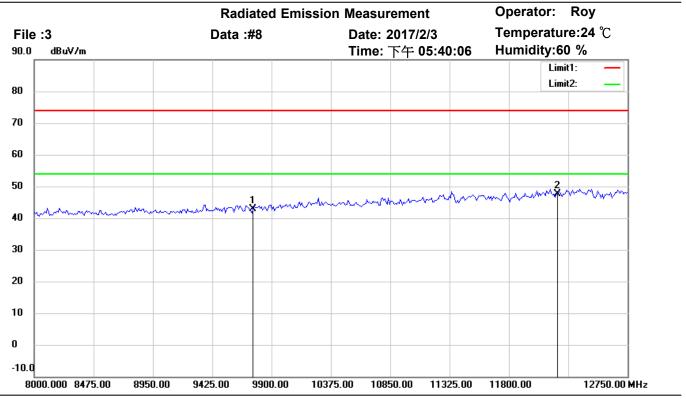

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.32	peak	7.49	42.81	74.00	150	135	-31.19	
*	12185.000	33.86	peak	13.82	47.68	74.00	150	40	-26.32	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

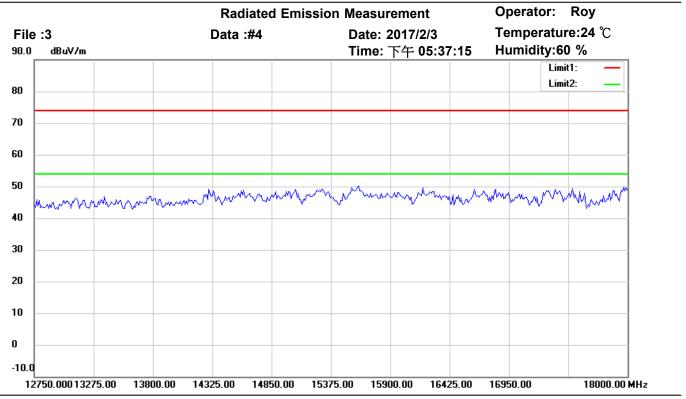

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

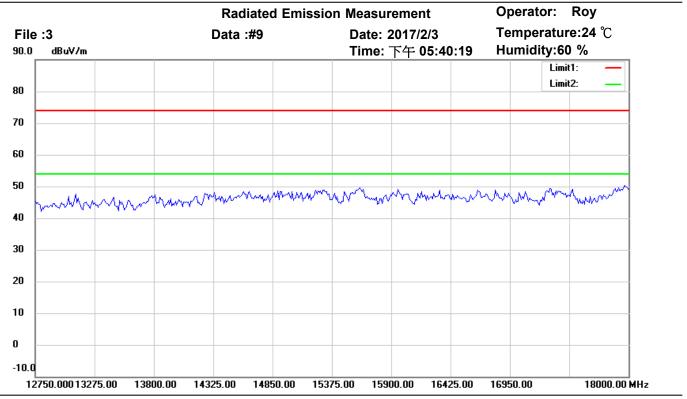

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

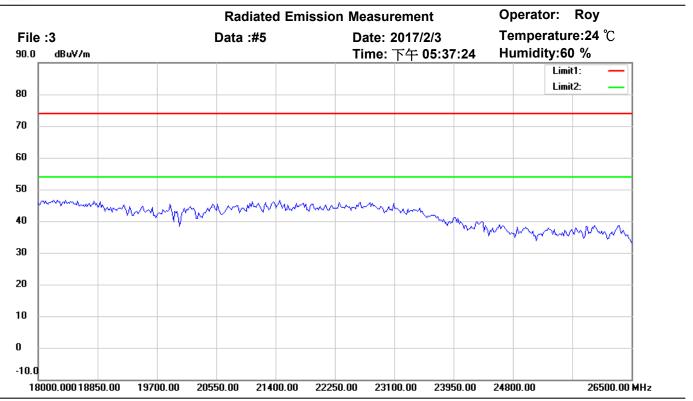

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

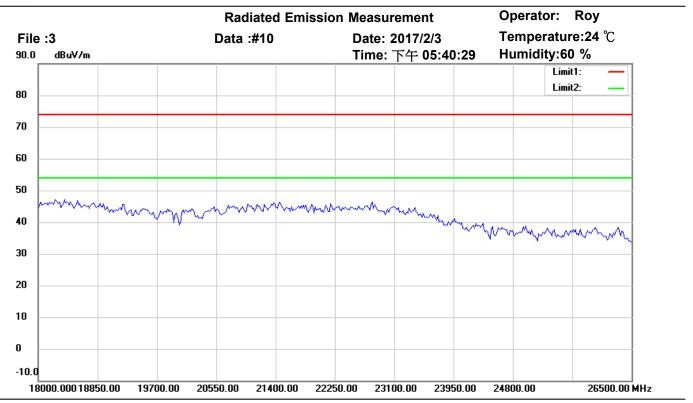

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

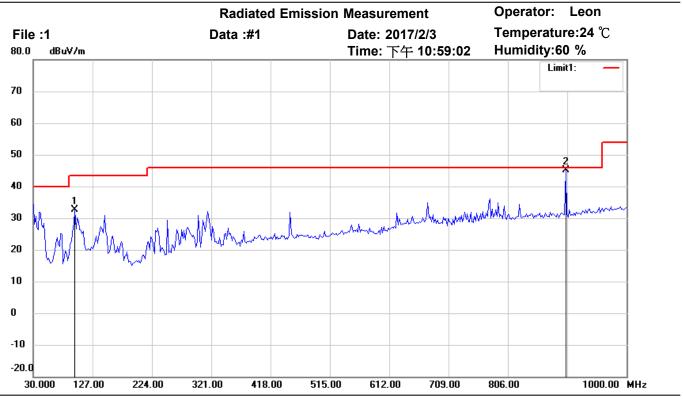

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	98.0361	42.71	peak	-10.19	32.52	43.50	150	160	-10.98	
*	900.8617	41.11	QP	3.93	45.04	46.00	150	230	-0.96	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

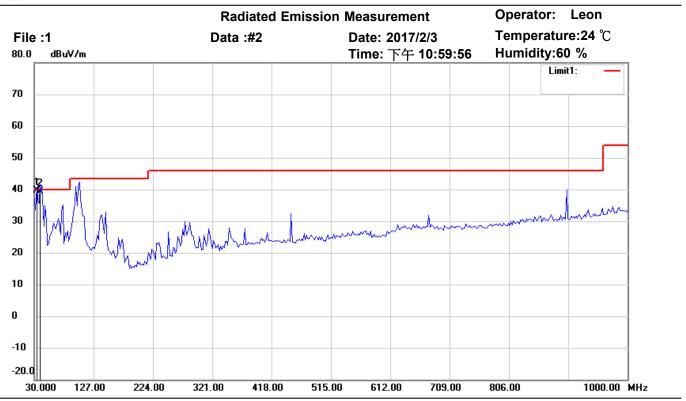

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.15	QP	-7.41	39.74	40.00	150	35	-0.26	
	39.7194	47.63	QP	-8.15	39.48	40.00	150	60	-0.52	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

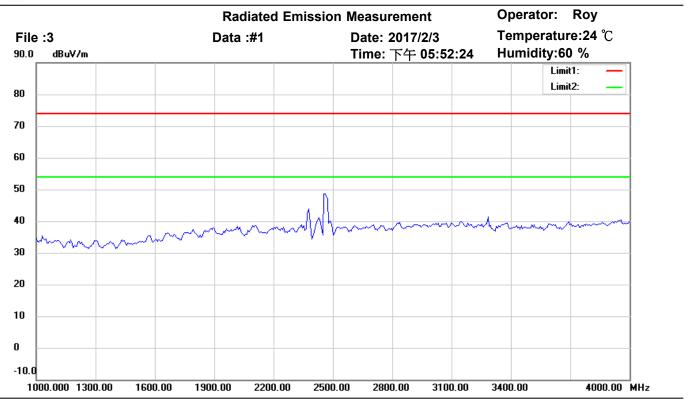

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

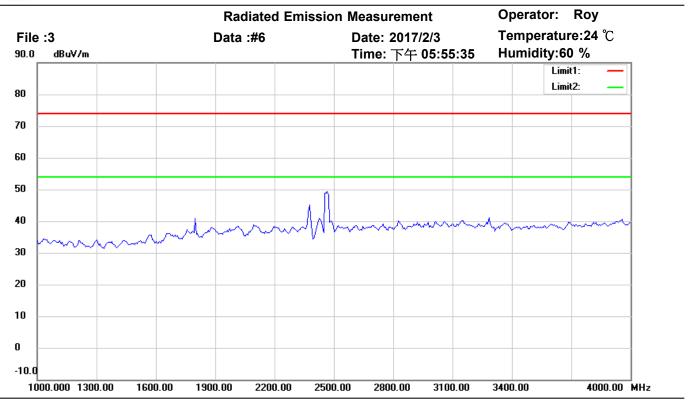

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

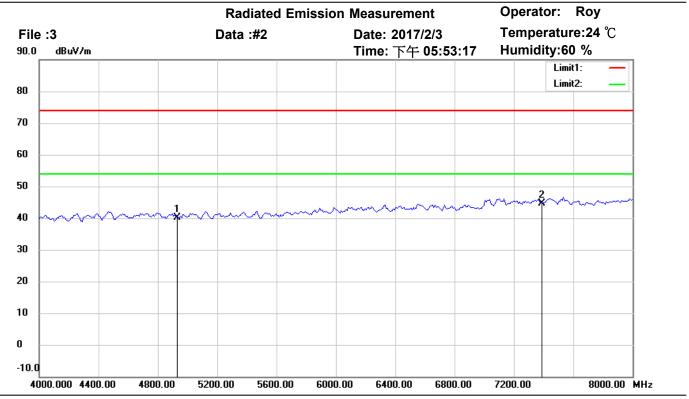

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.44	peak	-0.33	40.11	74.00	150	335	-33.89	
*	7386.000	39.74	peak	4.93	44.67	74.00	150	140	-29.33	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

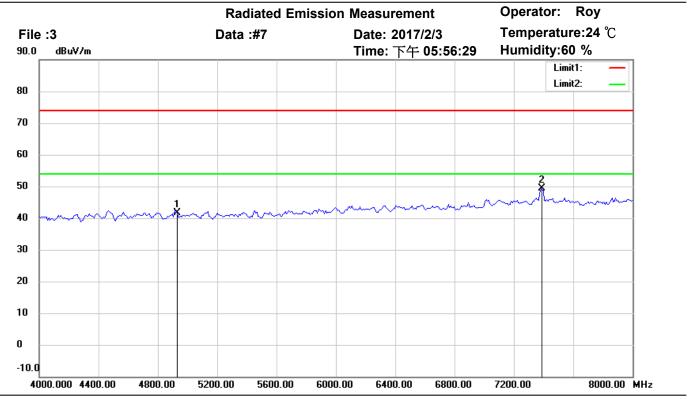

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	42.00	peak	-0.33	41.67	74.00	150	190	-32.33	
*	7382.766	44.42	peak	4.91	49.33	74.00	150	110	-24.67	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

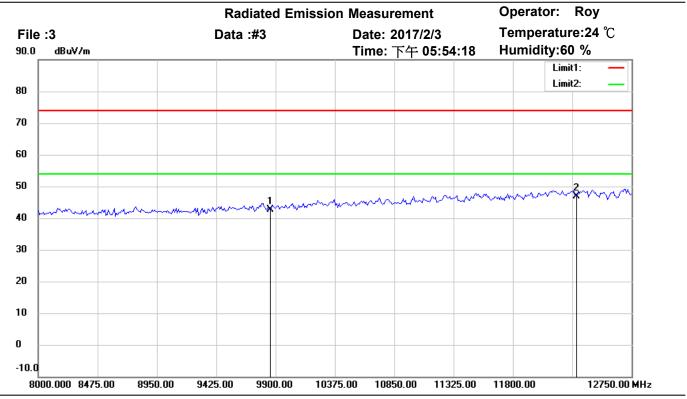

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.83	peak	7.68	42.51	74.00	150	80	-31.49	
*	12310.000	33.75	peak	13.25	47.00	74.00	150	235	-27.00	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

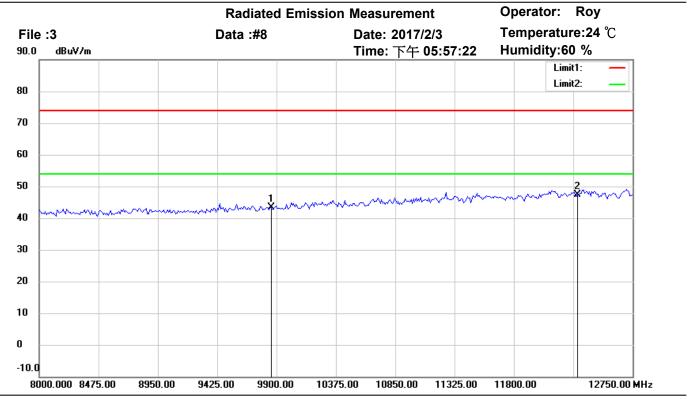

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.59	peak	7.68	43.27	74.00	150	70	-30.73	
*	12310.000	34.25	peak	13.25	47.50	74.00	150	245	-26.50	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

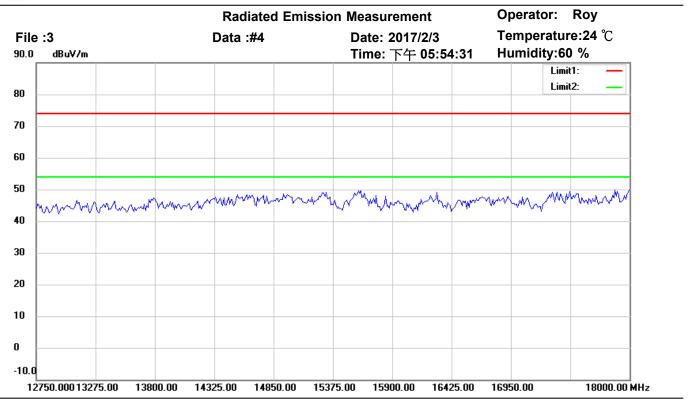

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

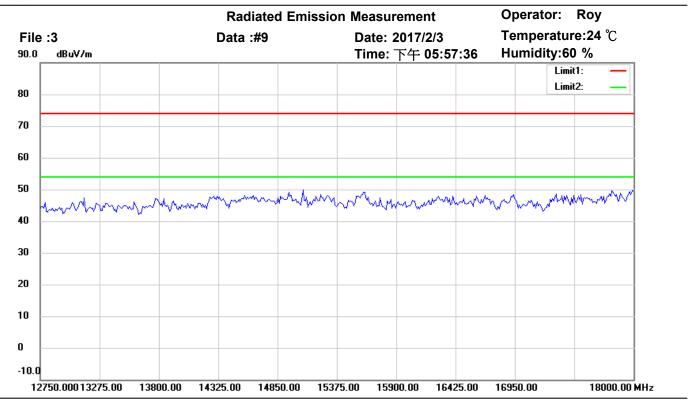

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

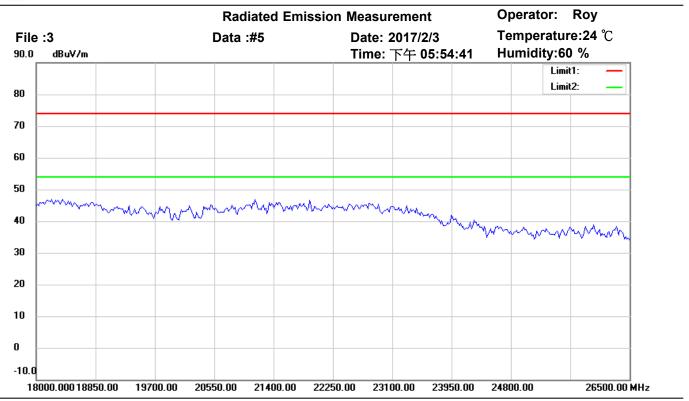

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

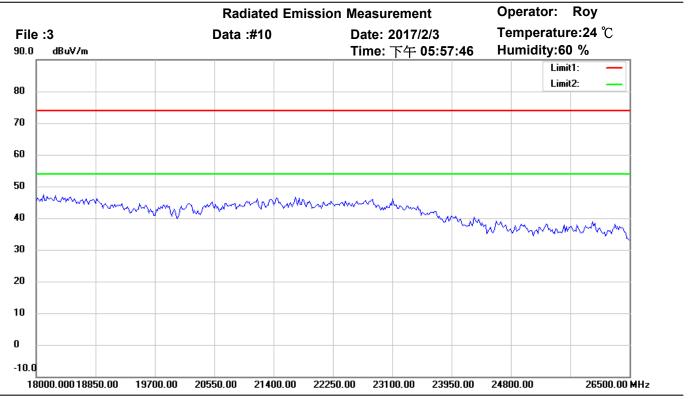

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C


## **Appendix**

## Measurement diagrams

Spurious Emissions radiated\_TX\_ANT1



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

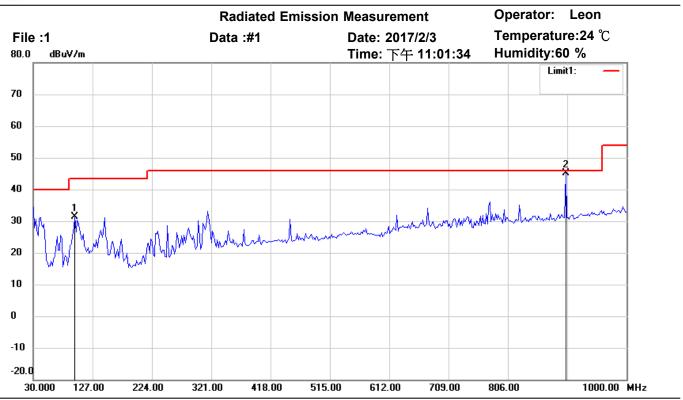

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	98.0361	41.61	peak	-10.19	31.42	43.50	150	170	-12.08	
*	900.8617	41.24	QP	3.93	45.17	46.00	150	335	-0.83	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

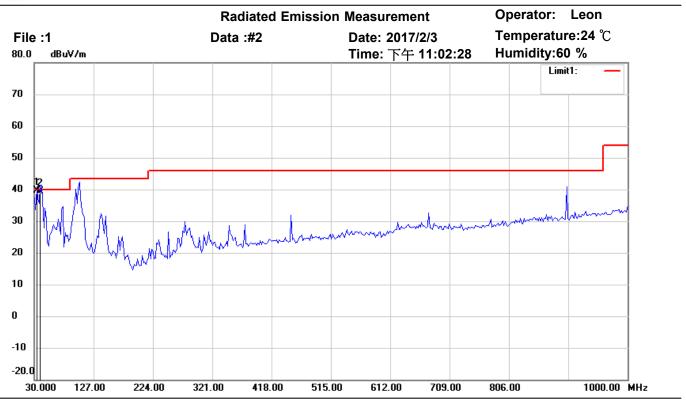

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.15	QP	-7.41	39.74	40.00	150	60	-0.26	
	39.7194	47.56	QP	-8.15	39.41	40.00	150	245	-0.59	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

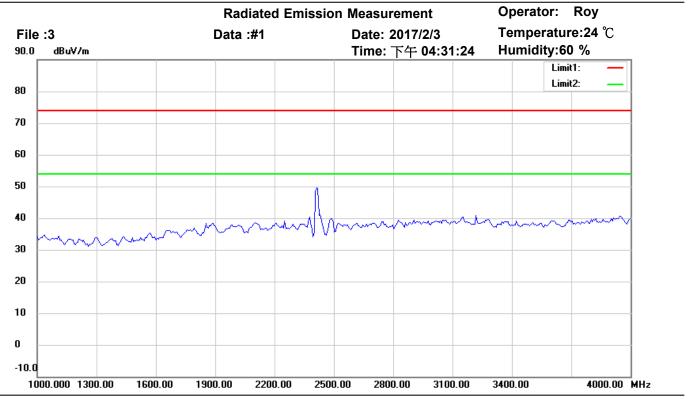

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

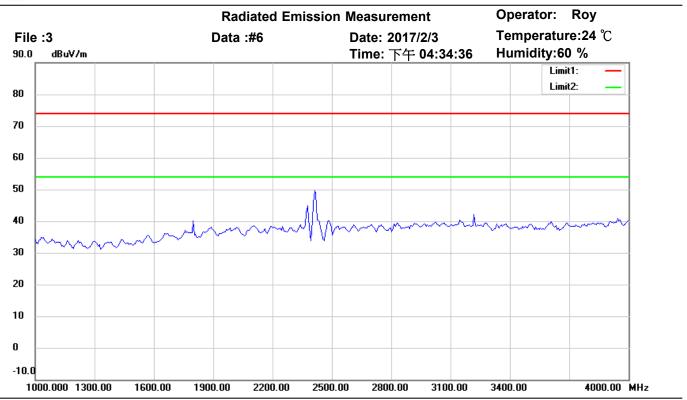

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

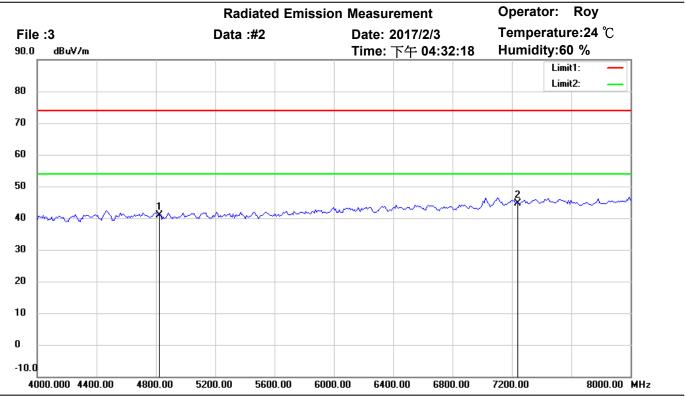

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.47	peak	-0.57	40.90	74.00	150	200	-33.10	
*	7236.000	40.28	peak	4.29	44.57	74.00	150	155	-29.43	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

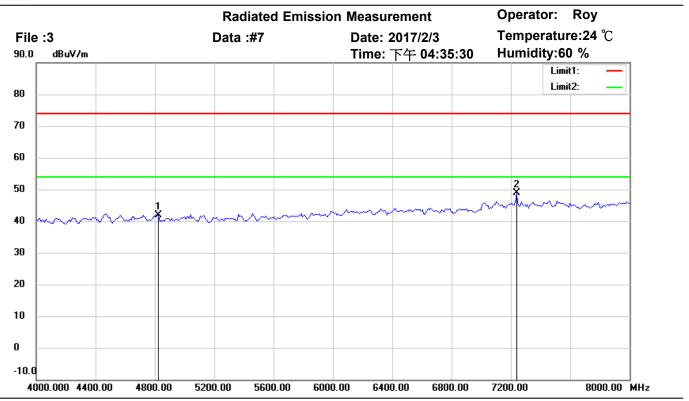

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	42.54	peak	-0.57	41.97	74.00	150	80	-32.03	
*	7238.477	44.55	peak	4.29	48.84	74.00	150	165	-25.16	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

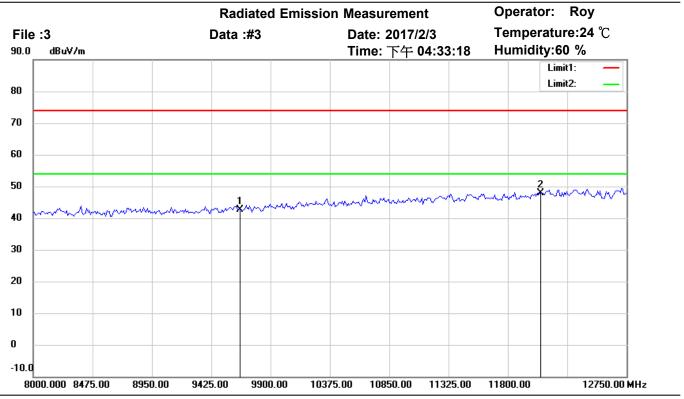

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.23	peak	7.51	42.74	74.00	150	70	-31.26	
*	12060.000	34.58	peak	13.18	47.76	74.00	150	335	-26.24	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

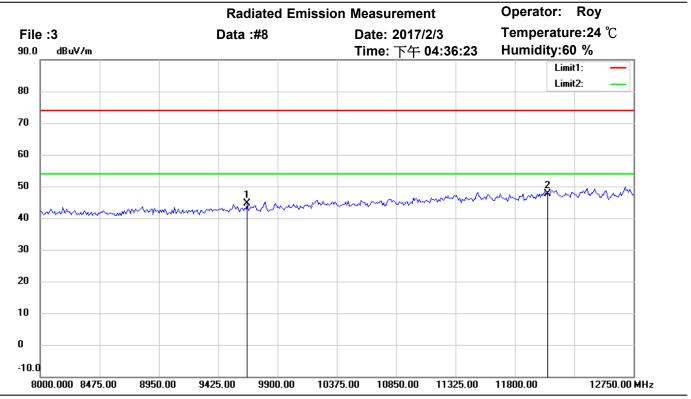

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	37.01	peak	7.51	44.52	74.00	150	305	-29.48	
*	12060.000	34.54	peak	13.18	47.72	74.00	150	190	-26.28	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

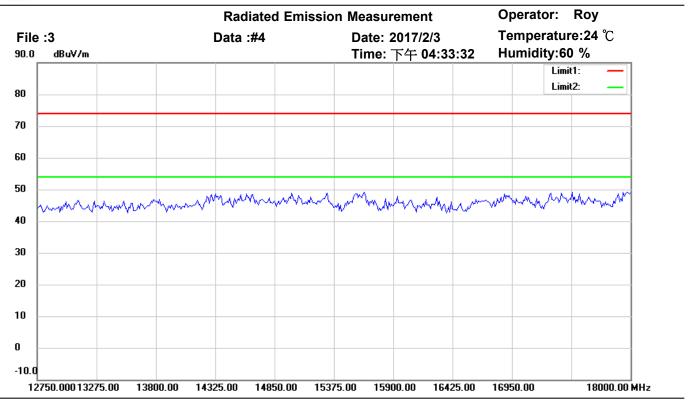

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

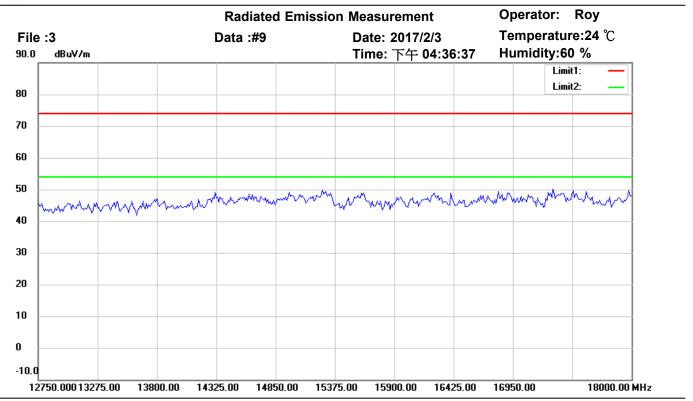

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

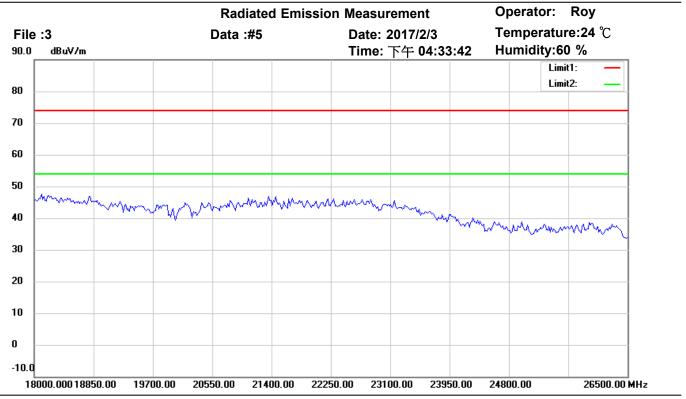

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

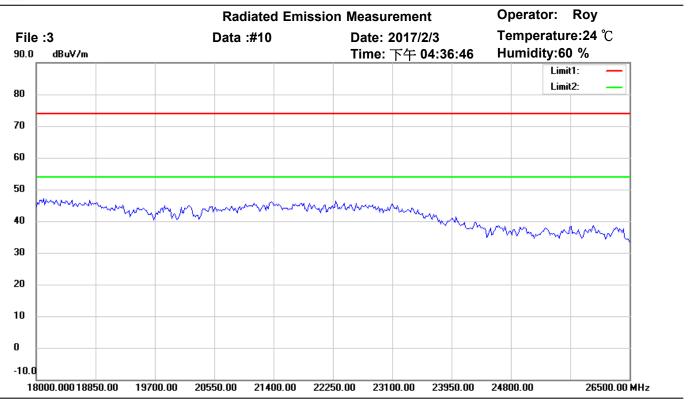

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

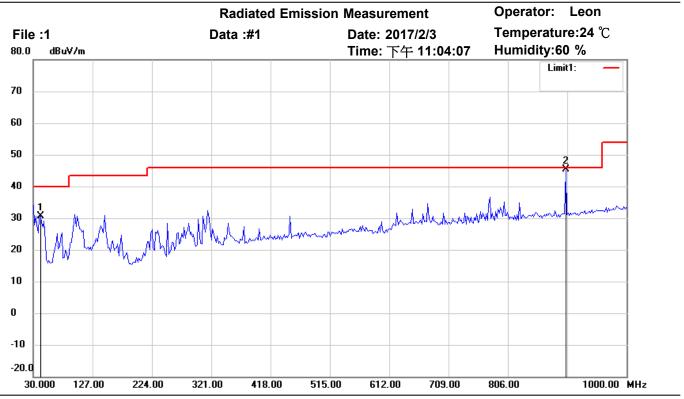

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.02	peak	-8.33	30.69	40.00	150	220	-9.31	
*	900.8617	41.53	QP	3.93	45.46	46.00	150	175	-0.54	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

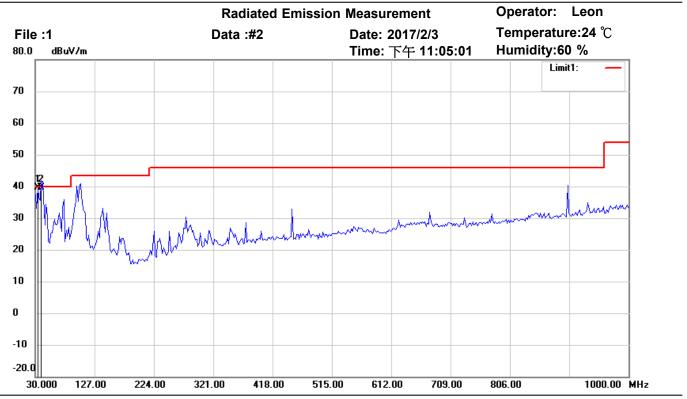

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	33.8878	46.93	QP	-7.41	39.52	40.00	150	255	-0.48	
*	39.7194	47.71	QP	-8.15	39.56	40.00	150	80	-0.44	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

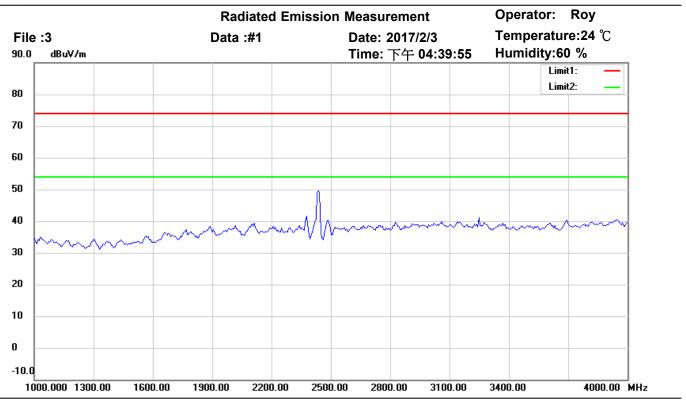

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

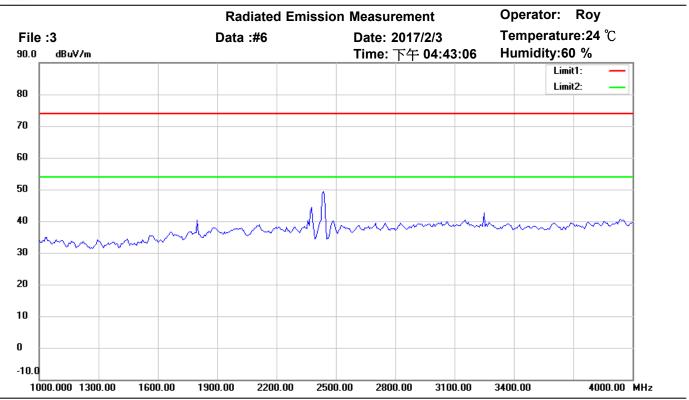

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

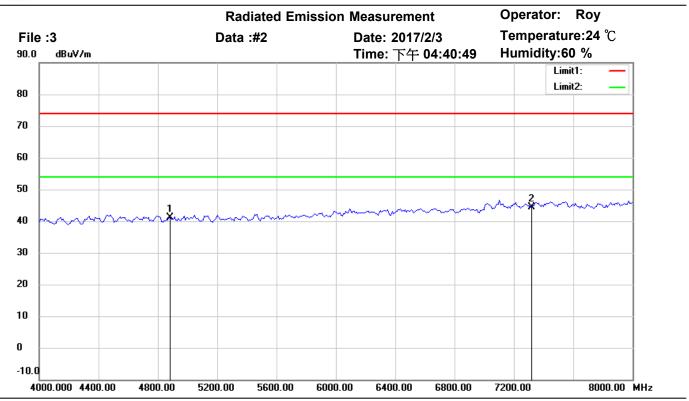

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.69	peak	-0.50	41.19	74.00	150	90	-32.81	
*	7311.000	40.00	peak	4.43	44.43	74.00	150	320	-29.57	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

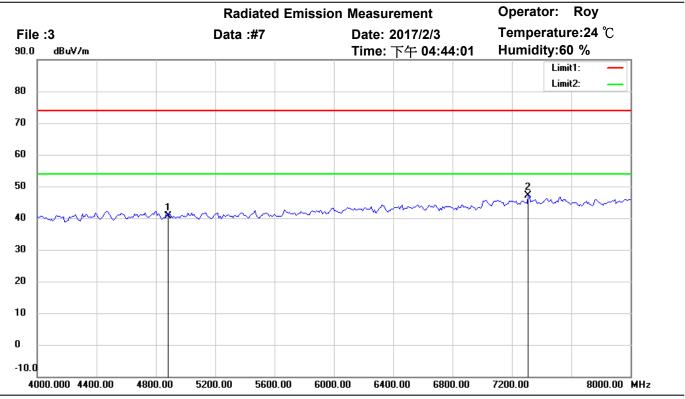

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.21	peak	-0.50	40.71	74.00	150	260	-33.29	
*	7310.621	42.77	peak	4.43	47.20	74.00	150	95	-26.80	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

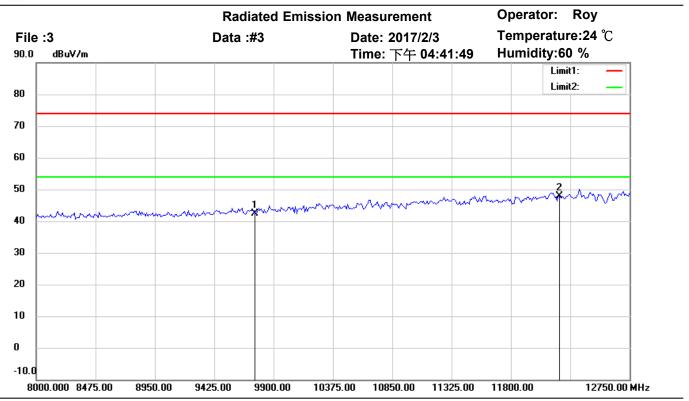

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.86	peak	7.49	42.35	74.00	150	100	-31.65	
*	12185.000	33.99	peak	13.82	47.81	74.00	150	45	-26.19	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

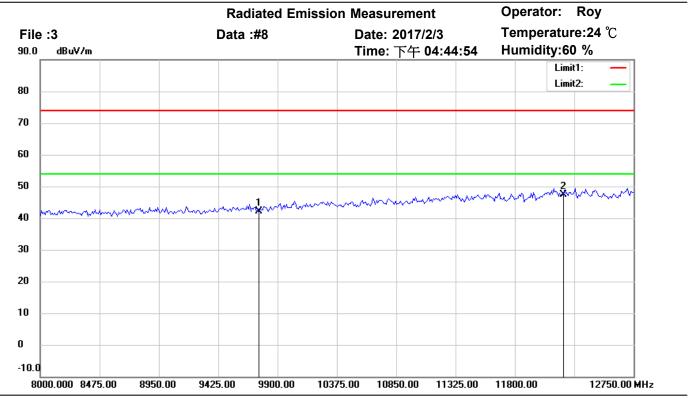

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.72	peak	7.49	42.21	74.00	150	175	-31.79	
*	12185.000	33.48	peak	13.82	47.30	74.00	150	230	-26.70	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

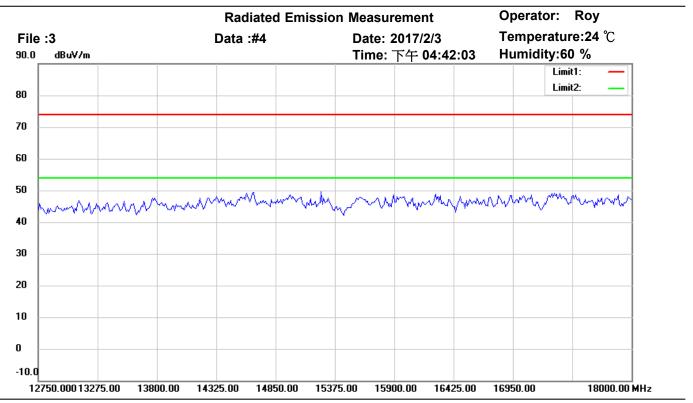

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

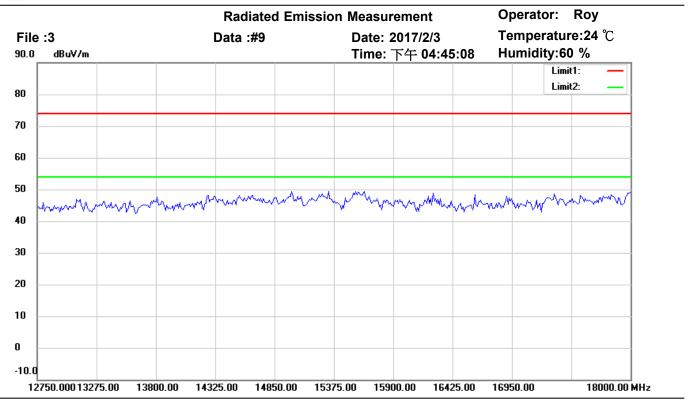

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

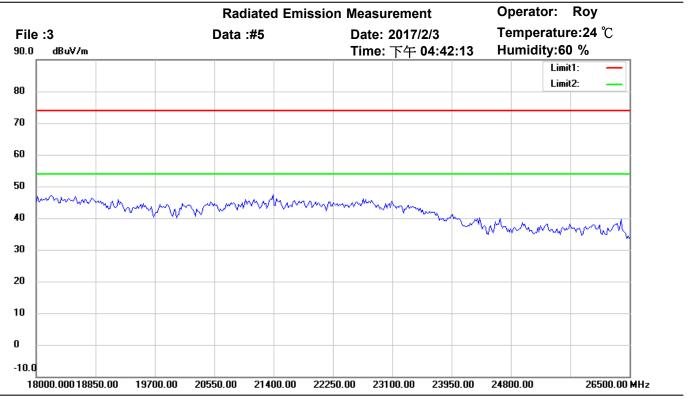

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

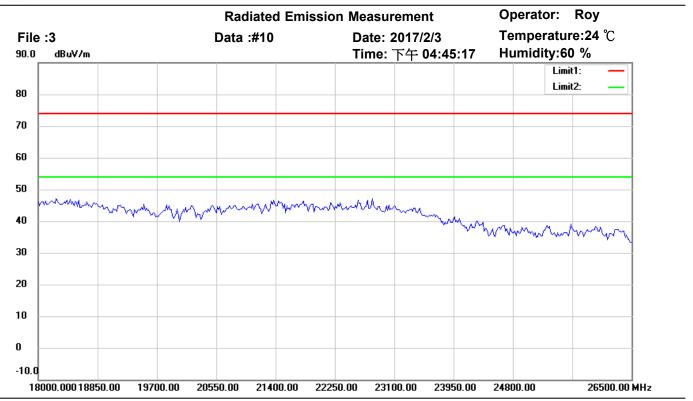

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

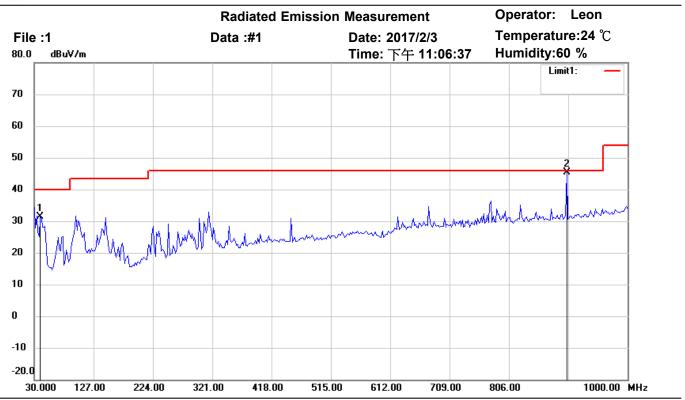

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	39.53	peak	-8.15	31.38	40.00	150	75	-8.62	
*	900.8617	41.34	QP	3.93	45.27	46.00	150	260	-0.73	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

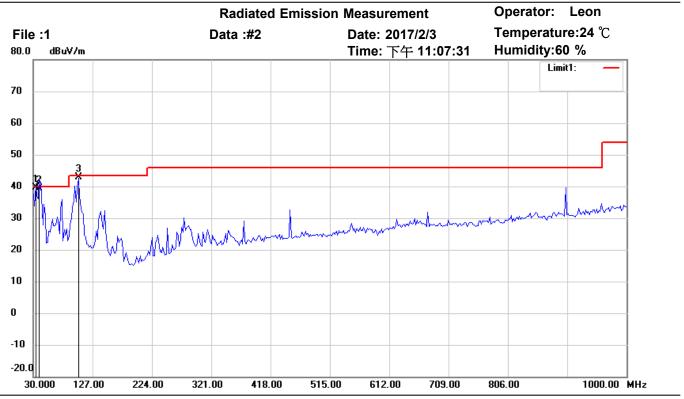

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.05	QP	-7.41	39.64	40.00	150	145	-0.36	
	39.7194	47.63	QP	-8.15	39.48	40.00	150	90	-0.52	
	103.8676	51.36	QP	-8.51	42.85	43.50	150	95	-0.65	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

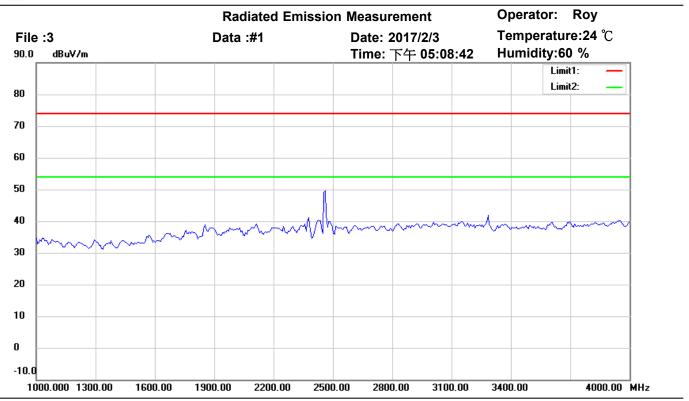

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

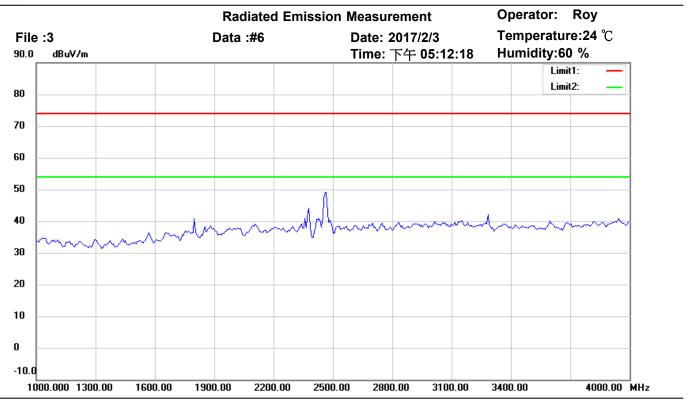

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

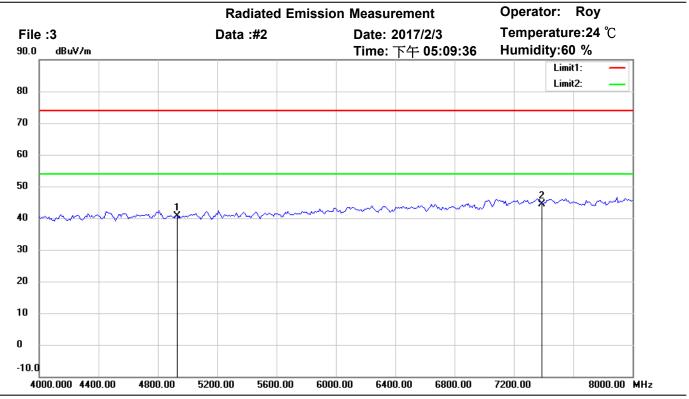

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.98	peak	-0.33	40.65	74.00	150	180	-33.35	
*	7386.000	39.49	peak	4.93	44.42	74.00	150	100	-29.58	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

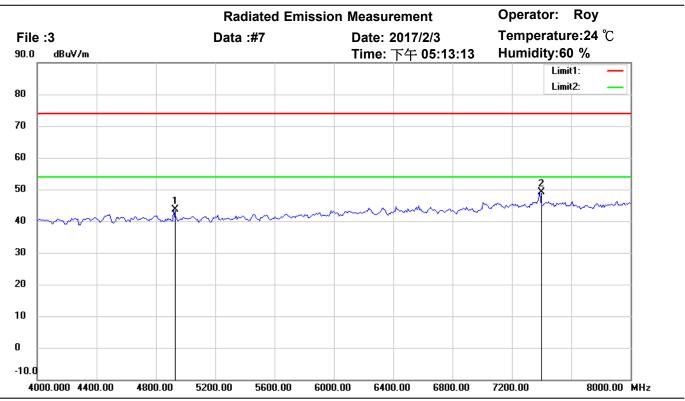

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	44.04	peak	-0.34	43.70	74.00	150	90	-30.30	
*	7390.782	44.10	peak	4.96	49.06	74.00	150	310	-24.94	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

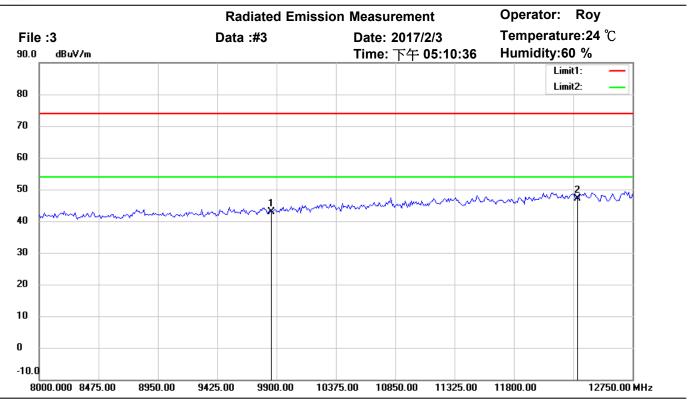

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.27	peak	7.68	42.95	74.00	150	335	-31.05	
*	12310.000	33.86	peak	13.25	47.11	74.00	150	260	-26.89	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

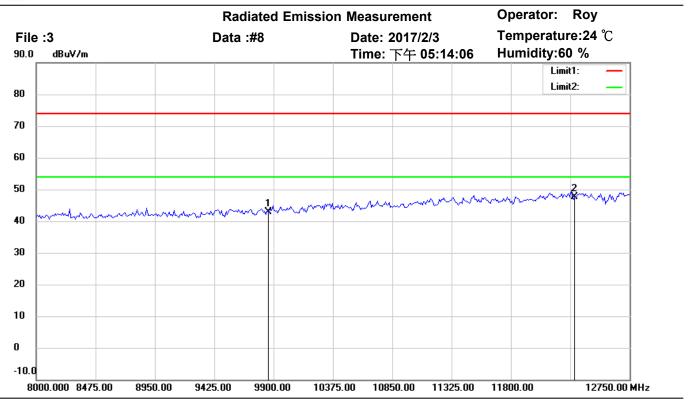

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.31	peak	7.68	42.99	74.00	150	280	-31.01	
*	12310.000	34.34	peak	13.25	47.59	74.00	150	215	-26.41	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

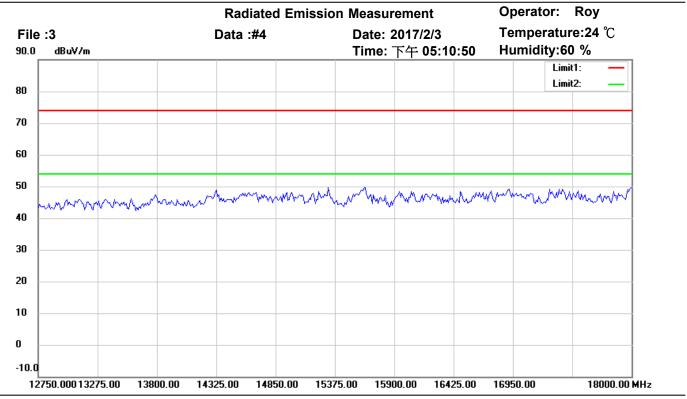

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

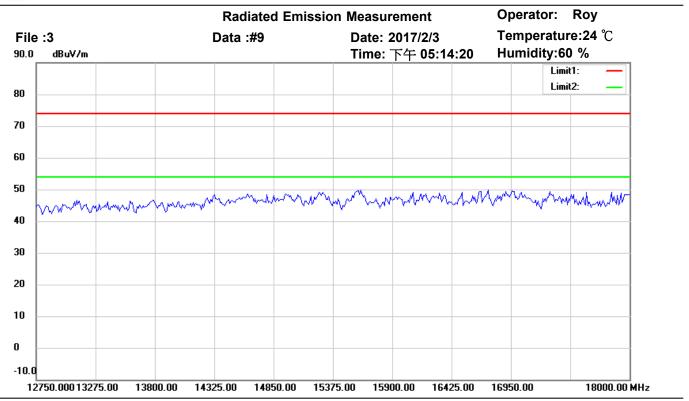

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

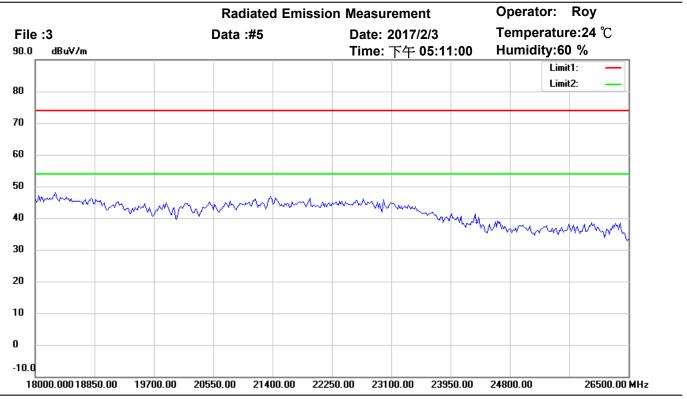

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

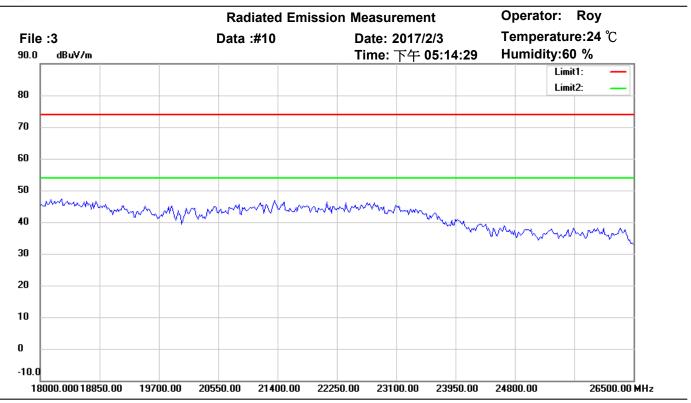

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

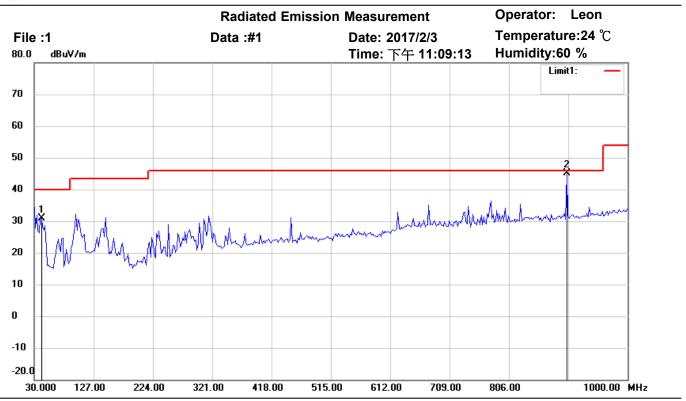

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.29	peak	-8.33	30.96	40.00	150	260	-9.04	
*	900.8617	41.28	QP	3.93	45.21	46.00	150	155	-0.79	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

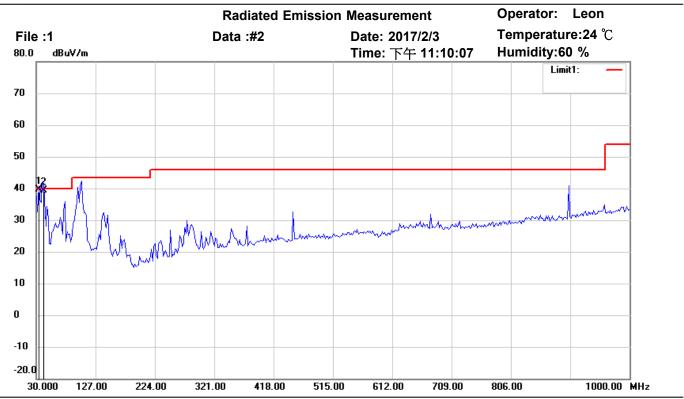

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.09	QP	-7.41	39.68	40.00	150	60	-0.32	
	41.6633	47.67	QP	-8.33	39.34	40.00	150	125	-0.66	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

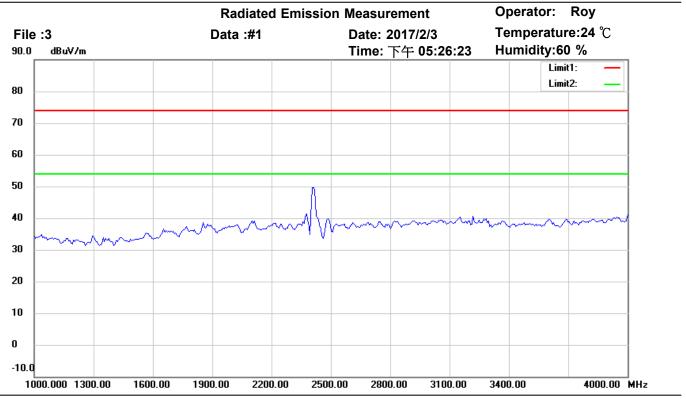

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

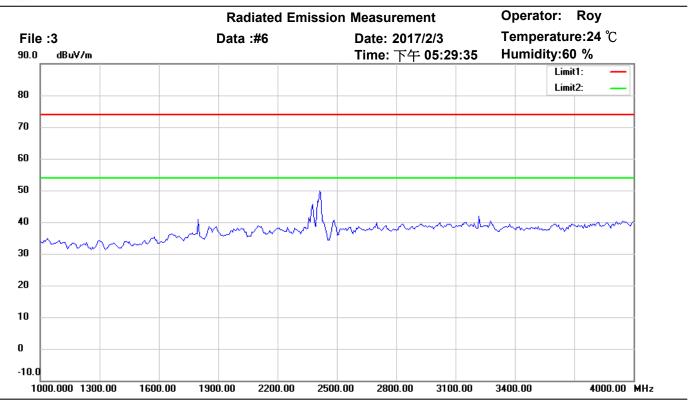

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

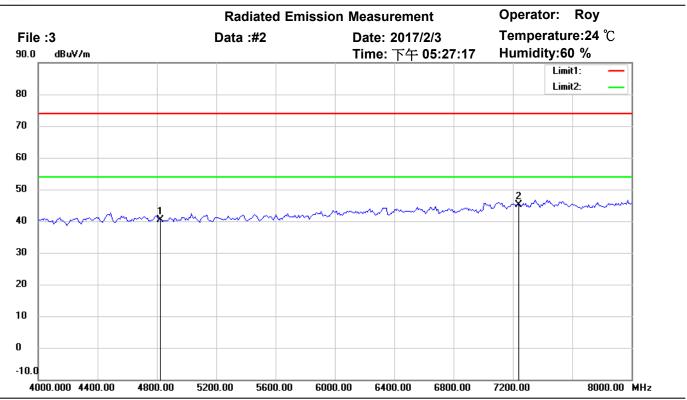

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.91	peak	-0.57	40.34	74.00	150	95	-33.66	
*	7236.000	40.79	peak	4.29	45.08	74.00	150	280	-28.92	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

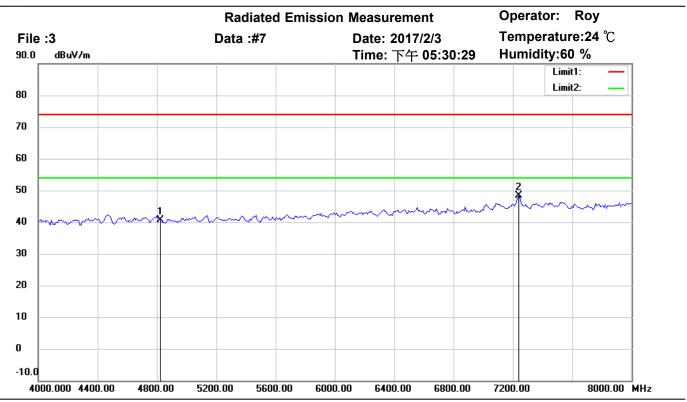

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.27	peak	-0.57	40.70	74.00	150	110	-33.30	
*	7236.000	44.13	peak	4.29	48.42	74.00	150	30	-25.58	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

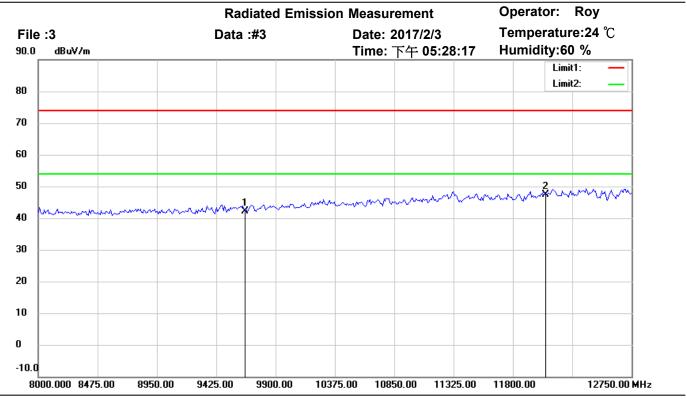

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.71	peak	7.51	42.22	74.00	150	300	-31.78	
*	12060.000	34.18	peak	13.18	47.36	74.00	150	70	-26.64	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

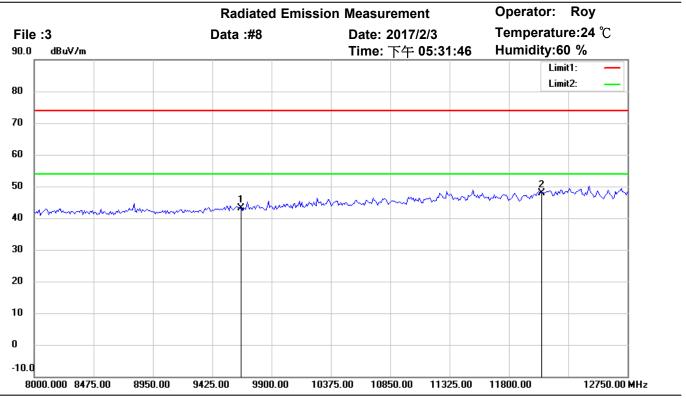

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.66	peak	7.51	43.17	74.00	150	280	-30.83	
*	12060.000	34.81	peak	13.18	47.99	74.00	150	175	-26.01	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

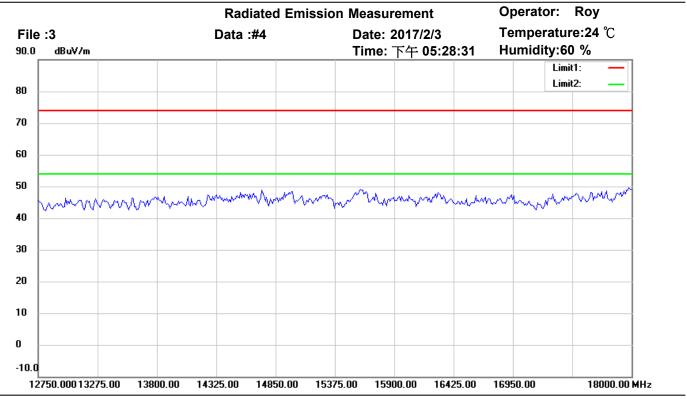

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

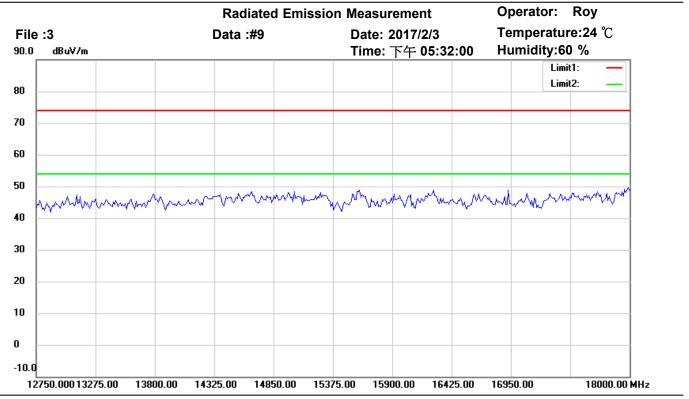

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

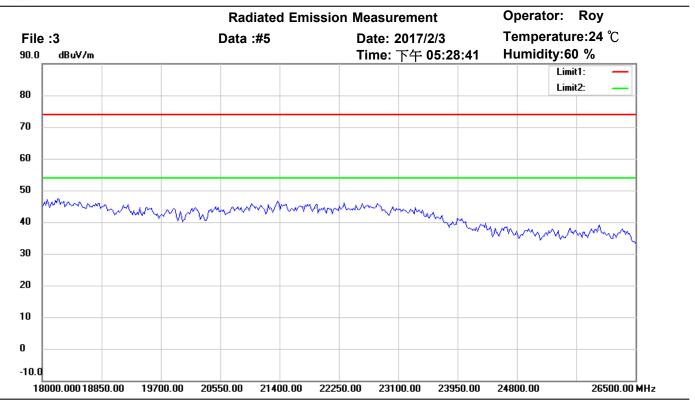

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

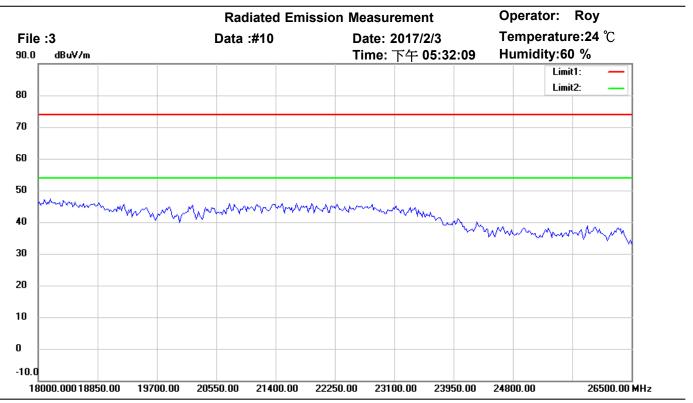

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

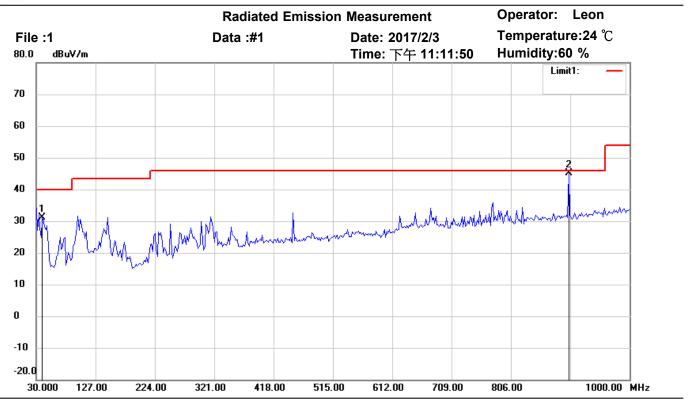

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	39.25	peak	-8.15	31.10	40.00	150	165	-8.90	
*	900.8617	41.26	QP	3.93	45.19	46.00	150	220	-0.81	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

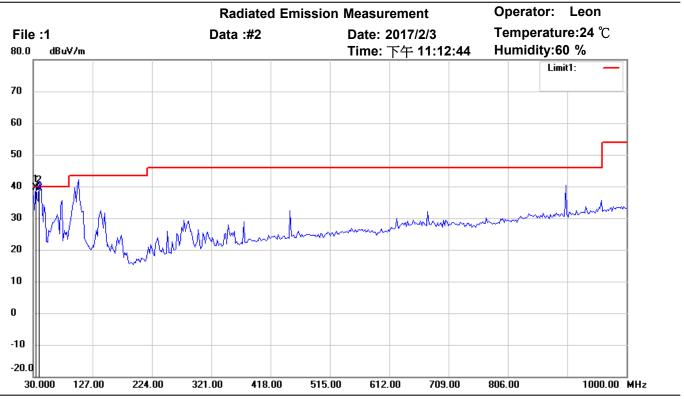

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	46.97	QP	-7.41	39.56	40.00	150	75	-0.44	
	39.7194	47.59	QP	-8.15	39.44	40.00	150	90	-0.56	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

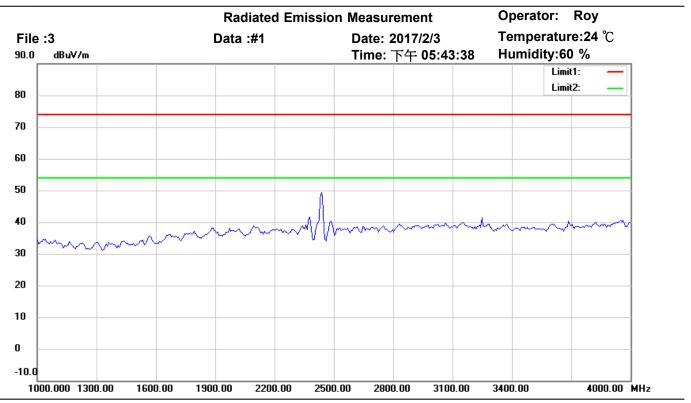

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

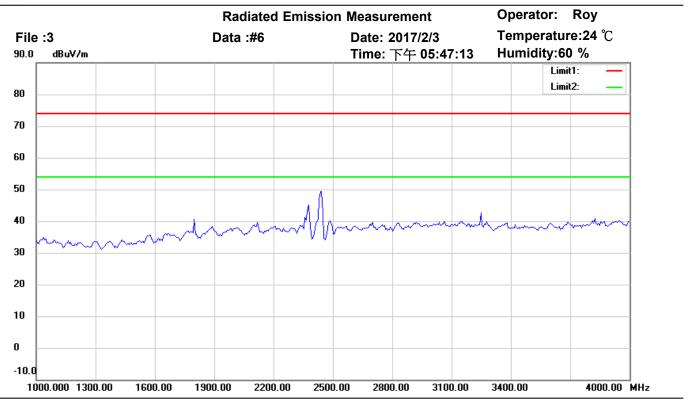

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

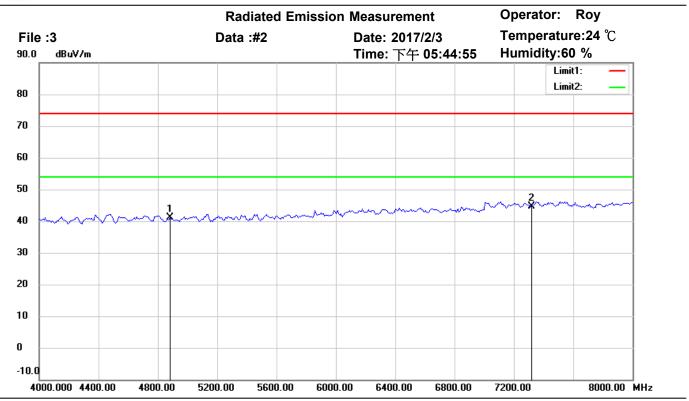

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.75	peak	-0.50	41.25	74.00	150	85	-32.75	
*	7311.000	40.30	peak	4.43	44.73	74.00	150	190	-29.27	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

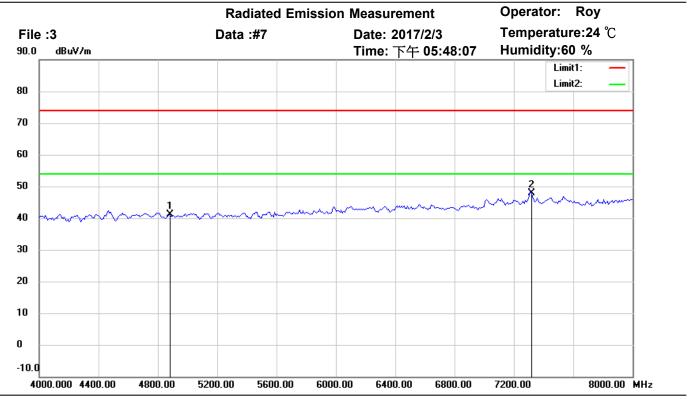

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.56	peak	-0.50	41.06	74.00	150	310	-32.94	
*	7311.000	43.33	peak	4.43	47.76	74.00	150	90	-26.24	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

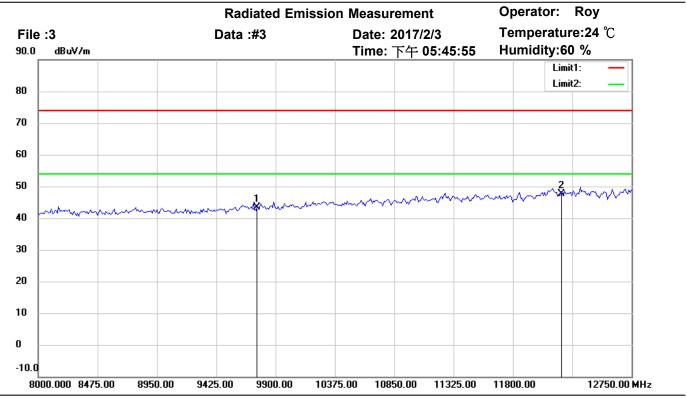

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.79	peak	7.49	43.28	74.00	150	70	-30.72	
*	12185.000	33.87	peak	13.82	47.69	74.00	150	230	-26.31	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

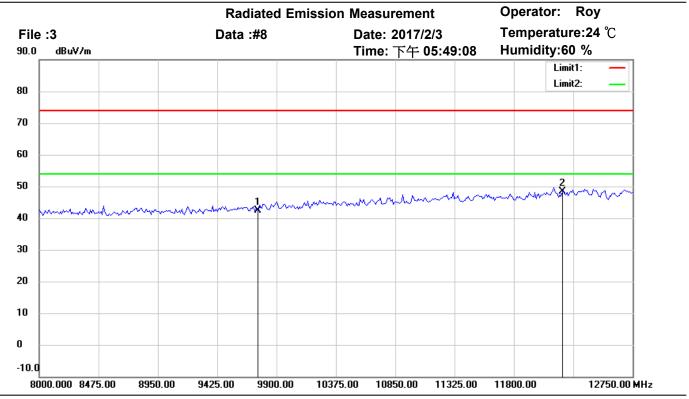

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.86	peak	7.49	42.35	74.00	150	260	-31.65	
*	12185.000	34.58	peak	13.82	48.40	74.00	150	115	-25.60	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

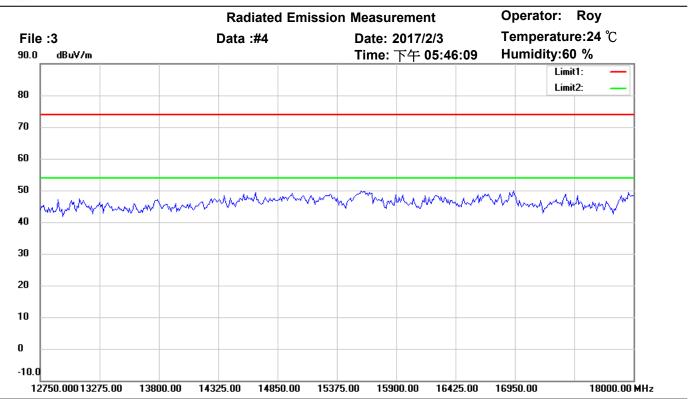

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

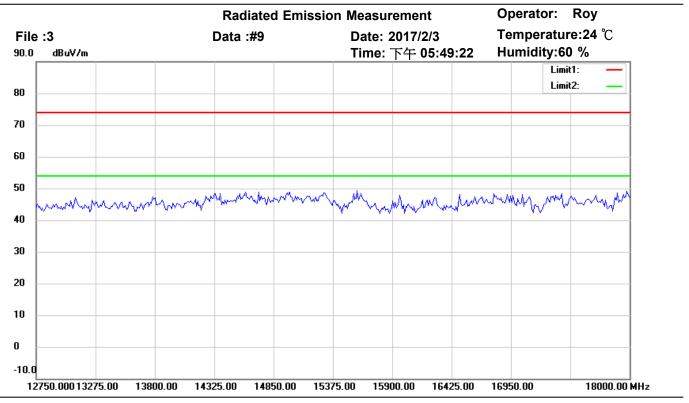

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

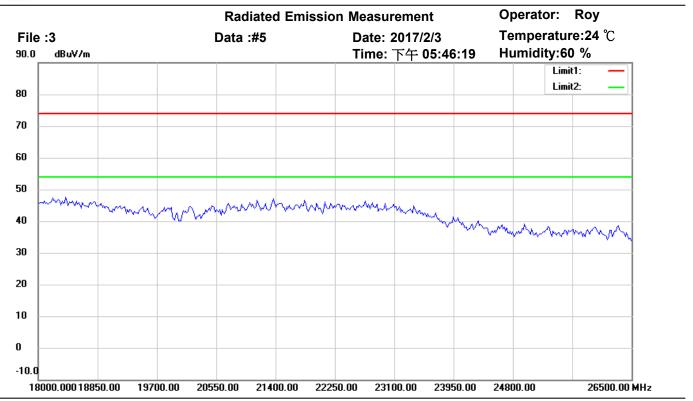

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

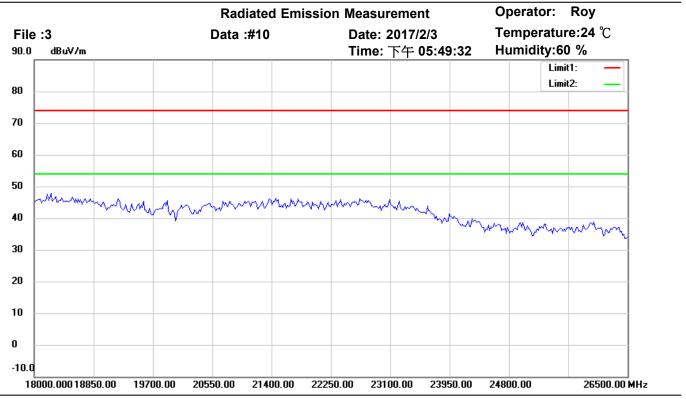

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

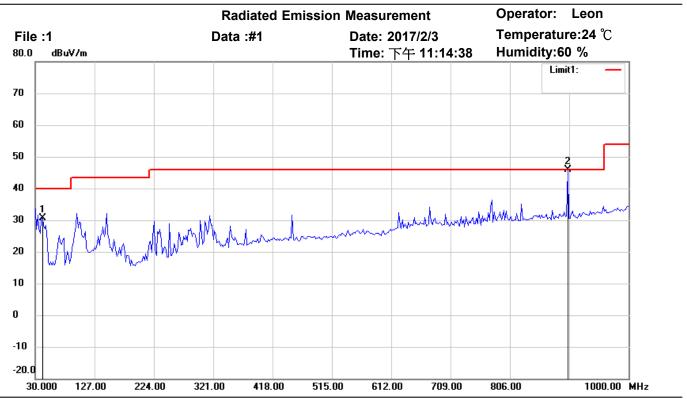

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	38.85	peak	-8.33	30.52	40.00	150	220	-9.48	
*	900.8617	41.83	QP	3.93	45.76	46.00	150	135	-0.24	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

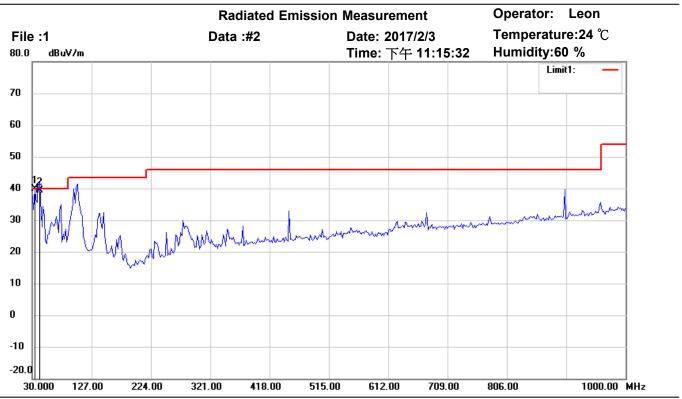

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.22	QP	-7.41	39.81	40.00	150	245	-0.19	
	41.6633	47.72	QP	-8.33	39.39	40.00	150	160	-0.61	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

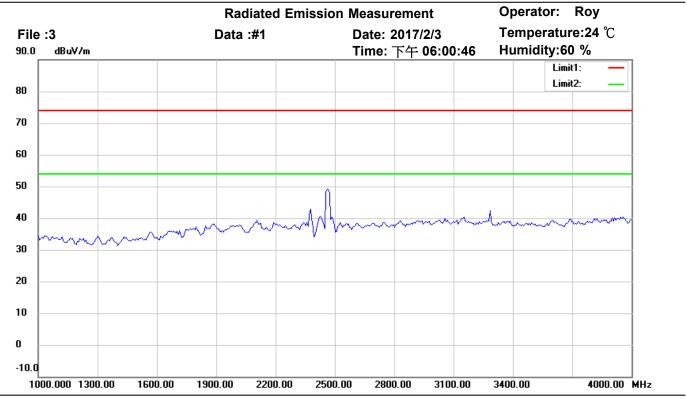

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

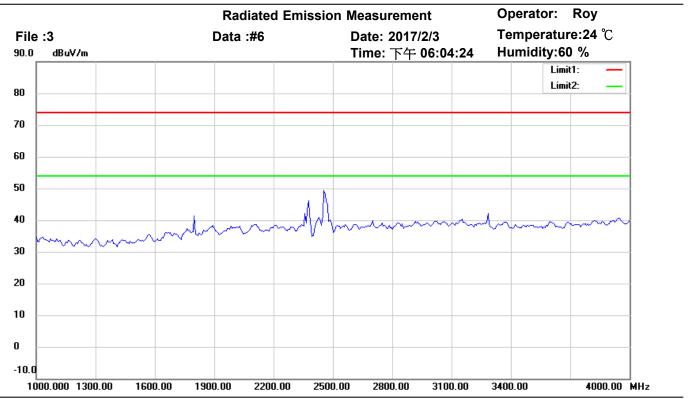

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

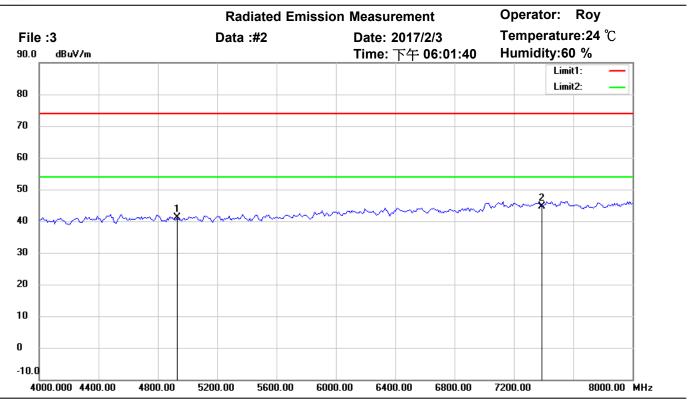

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	41.57	peak	-0.33	41.24	74.00	150	260	-32.76	
*	7386.000	39.81	peak	4.93	44.74	74.00	150	35	-29.26	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

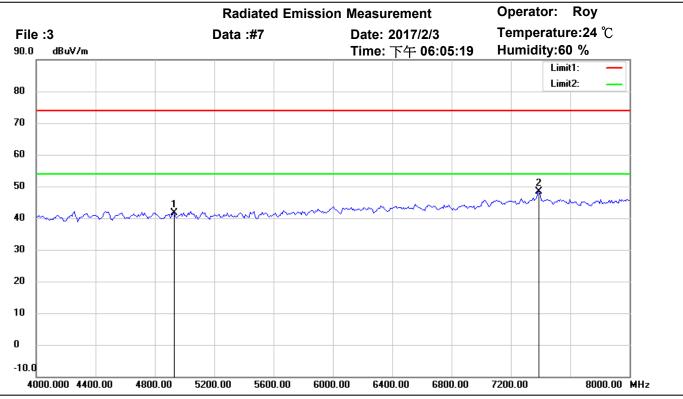

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	41.87	peak	-0.33	41.54	74.00	150	120	-32.46	
*	7386.000	43.46	peak	4.93	48.39	74.00	150	55	-25.61	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

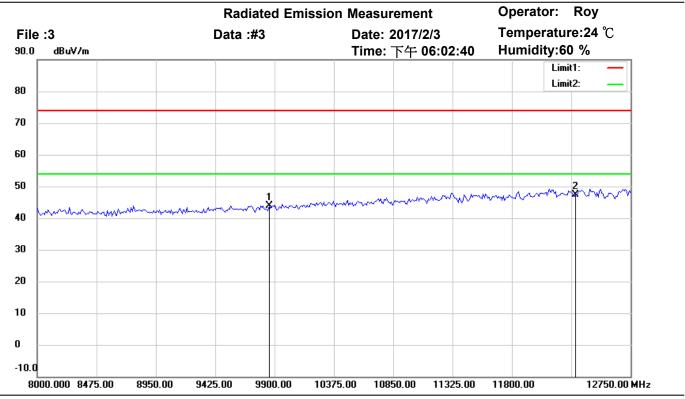

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	36.09	peak	7.68	43.77	74.00	150	115	-30.23	
*	12310.000	34.18	peak	13.25	47.43	74.00	150	220	-26.57	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

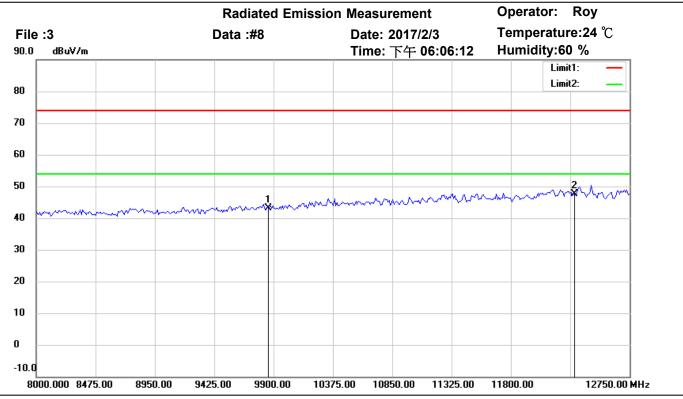

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.57	peak	7.68	43.25	74.00	150	270	-30.75	
*	12310.000	34.48	peak	13.25	47.73	74.00	150	215	-26.27	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

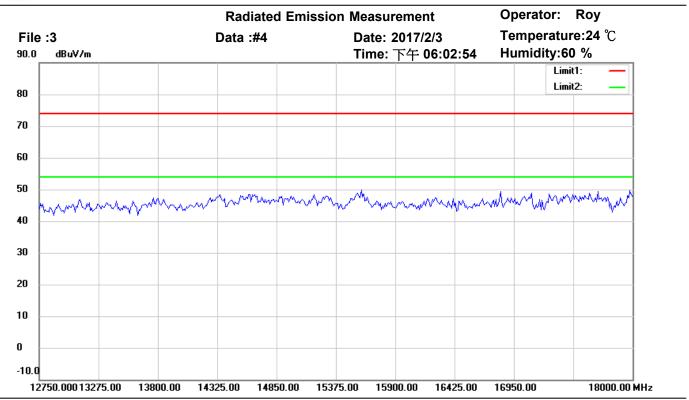

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

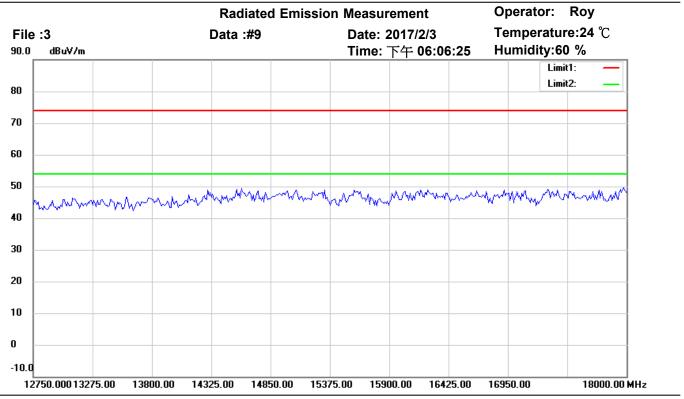

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

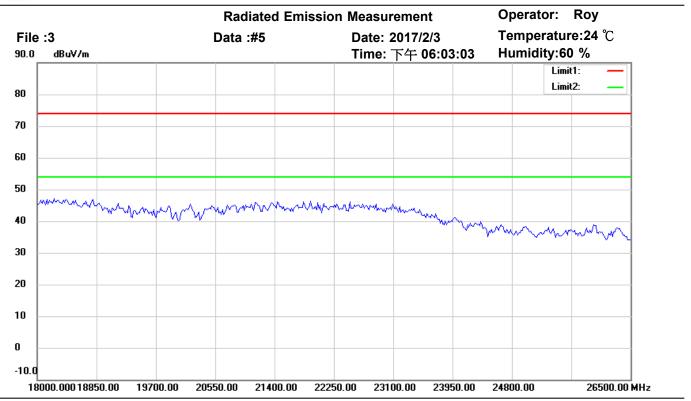

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

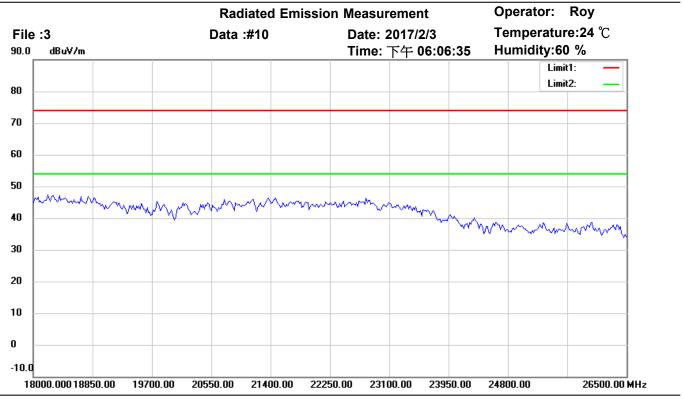

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Registration number: W6M21701-16545-C-1

FCC ID: 2AK34-IAR630C


## **Appendix**

## Measurement diagrams

Spurious Emissions radiated\_TX\_ANT0+ANT1



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

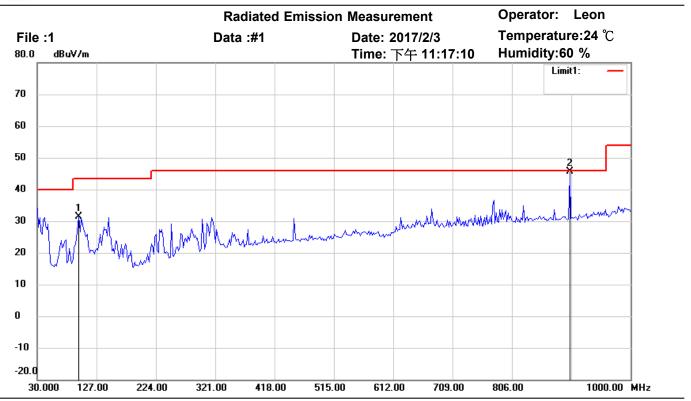

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	98.0361	41.59	peak	-10.19	31.40	43.50	150	170	-12.10	
*	900.8617	41.65	QP	3.93	45.58	46.00	150	235	-0.42	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

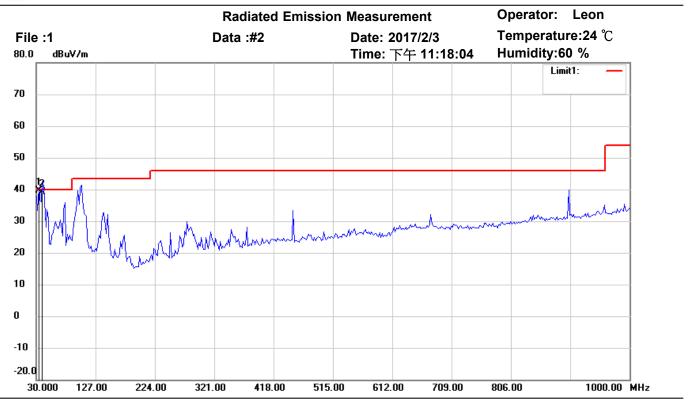

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.16	QP	-7.41	39.75	40.00	150	235	-0.25	
	39.7194	47.29	QP	-8.15	39.14	40.00	150	160	-0.86	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

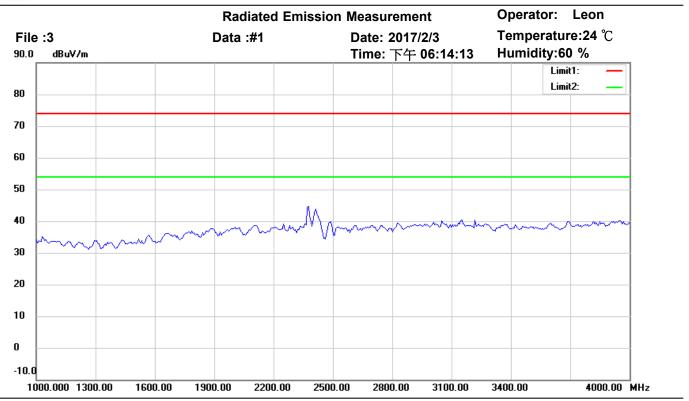

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

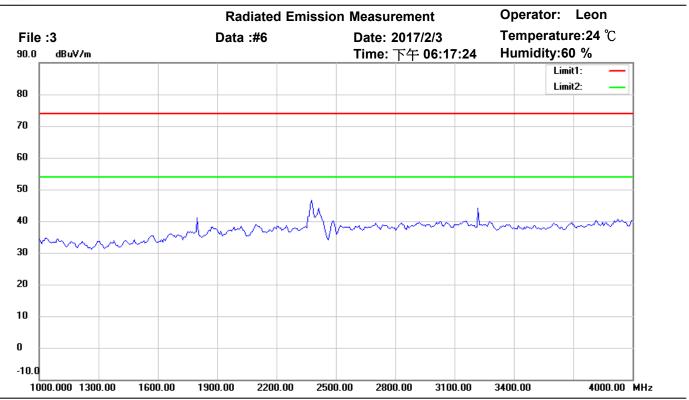

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

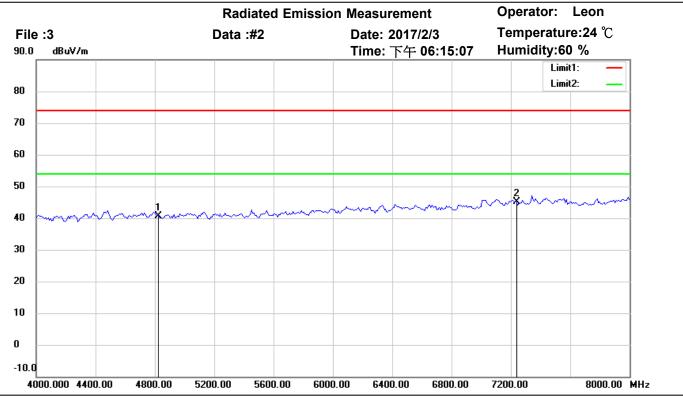

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.29	peak	-0.57	40.72	74.00	150	75	-33.28	
*	7236.000	40.72	peak	4.29	45.01	74.00	150	90	-28.99	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

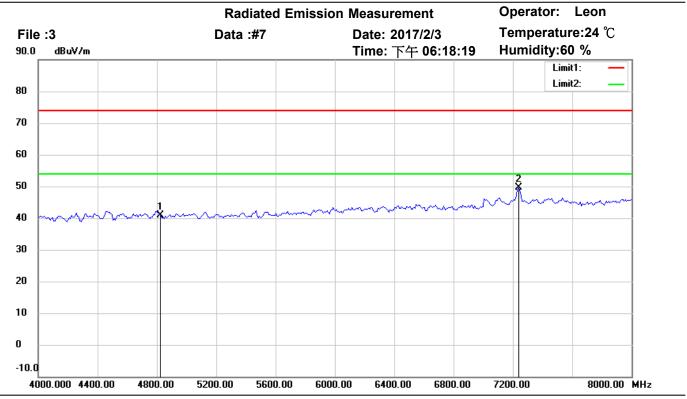

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.43	peak	-0.57	40.86	74.00	150	55	-33.14	
*	7236.000	45.27	peak	4.29	49.56	74.00	150	140	-24.44	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

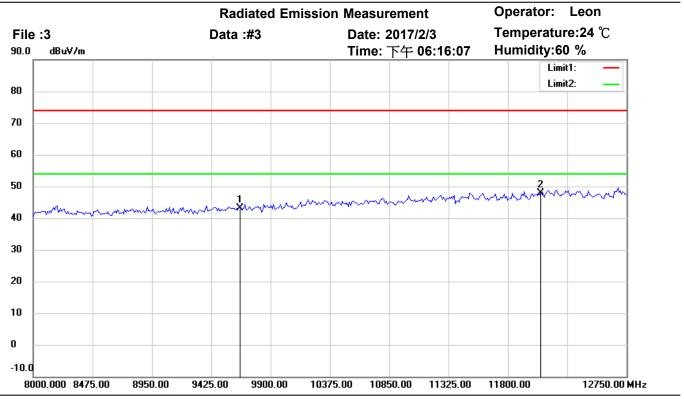

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.68	peak	7.51	43.19	74.00	150	245	-30.81	
*	12060.000	34.62	peak	13.18	47.80	74.00	150	180	-26.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

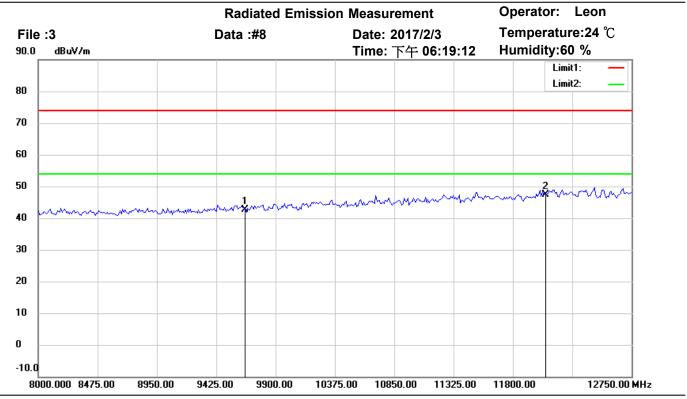

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.11	peak	7.51	42.62	74.00	150	245	-31.38	
*	12060.000	34.13	peak	13.18	47.31	74.00	150	160	-26.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

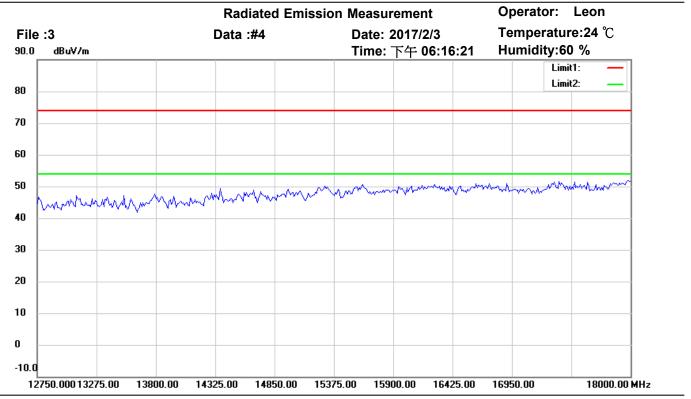

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

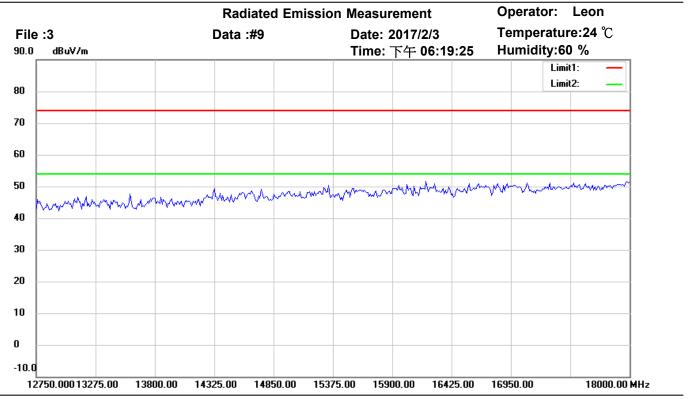

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

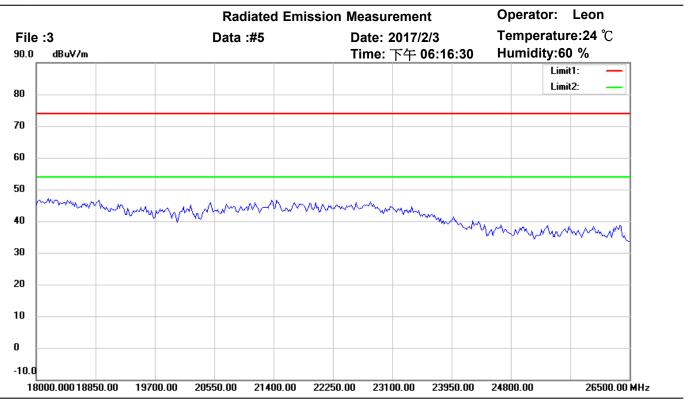

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

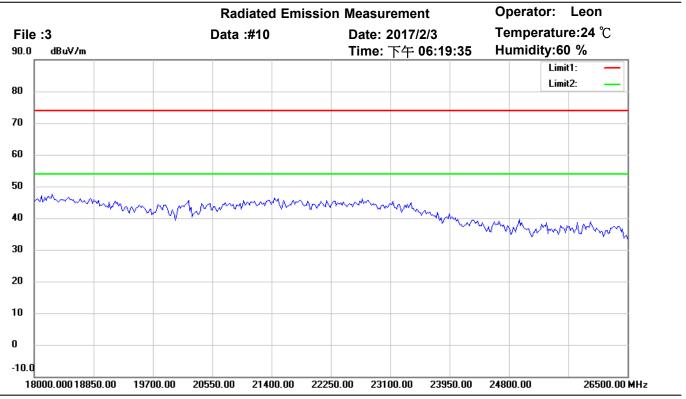

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

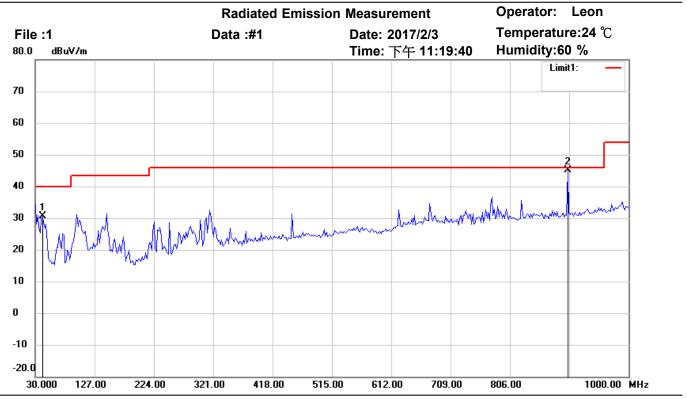

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	38.97	peak	-8.33	30.64	40.00	150	60	-9.36	
*	900.8617	41.31	QP	3.93	45.24	46.00	150	235	-0.76	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

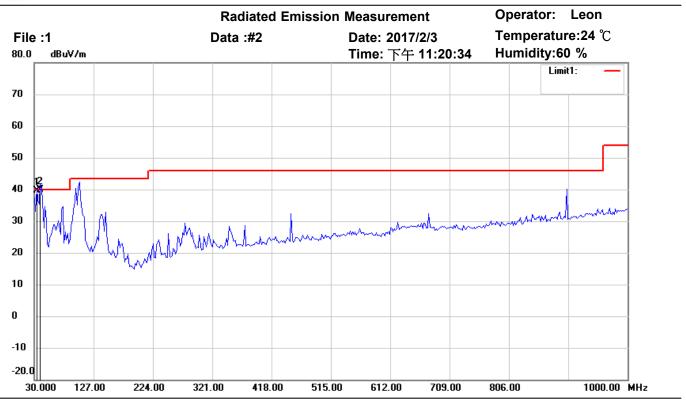

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	33.8878	47.16	QP	-7.41	39.75	40.00	150	45	-0.25	
*	39.7194	47.96	QP	-8.15	39.81	40.00	150	130	-0.19	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

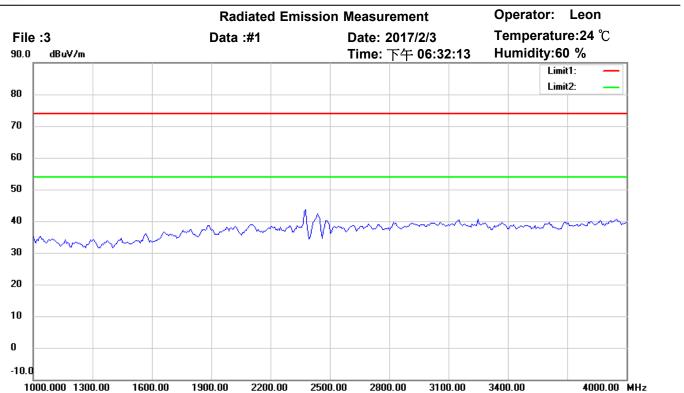

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

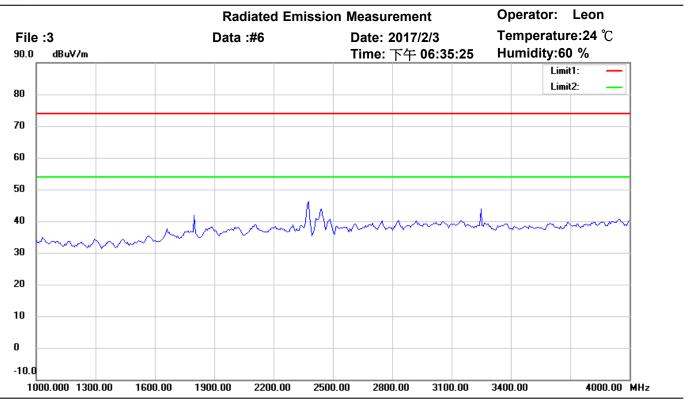

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

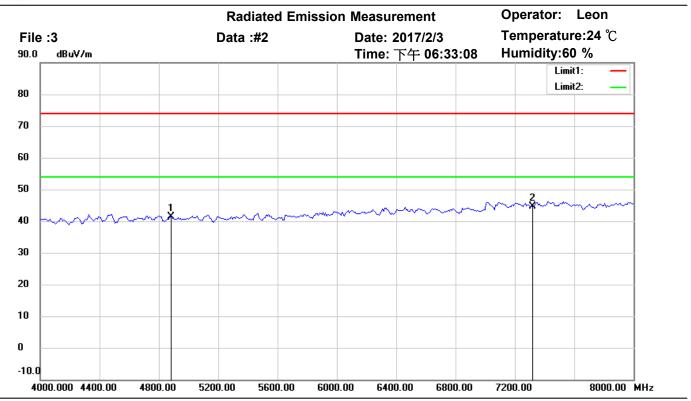

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.93	peak	-0.50	41.43	74.00	150	175	-32.57	
*	7311.000	40.22	peak	4.43	44.65	74.00	150	80	-29.35	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

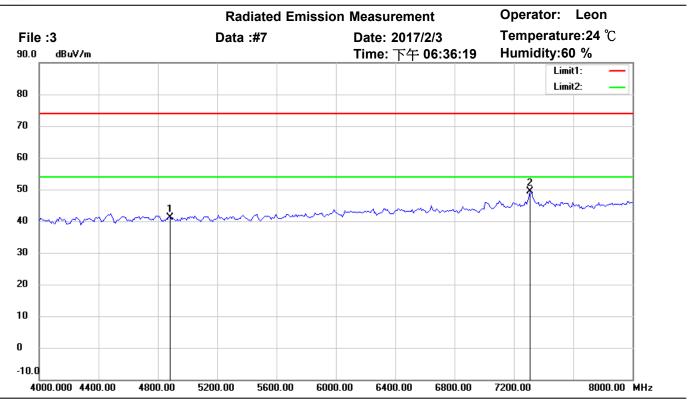

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.67	peak	-0.50	41.17	74.00	150	275	-32.83	
*	7310.621	44.94	peak	4.43	49.37	74.00	150	90	-24.63	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

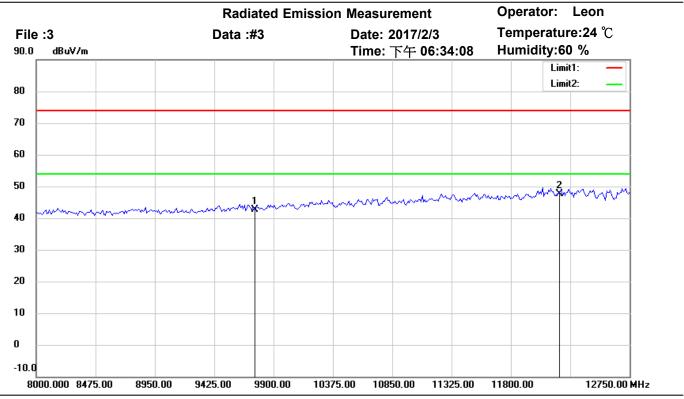

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.04	peak	7.49	42.53	74.00	150	220	-31.47	
*	12185.000	33.83	peak	13.82	47.65	74.00	150	195	-26.35	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

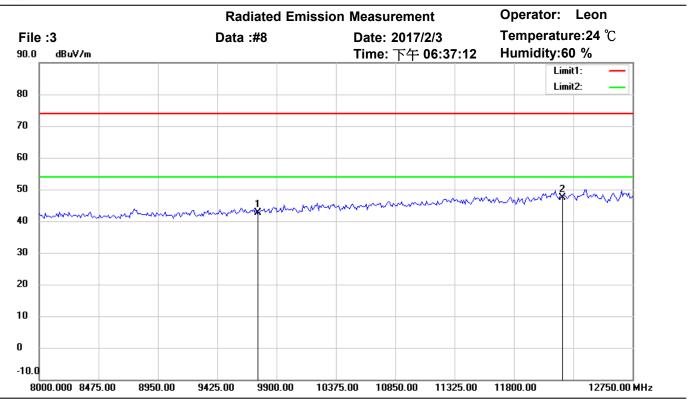

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.16	peak	7.49	42.65	74.00	150	175	-31.35	
*	12185.000	33.60	peak	13.82	47.42	74.00	150	230	-26.58	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

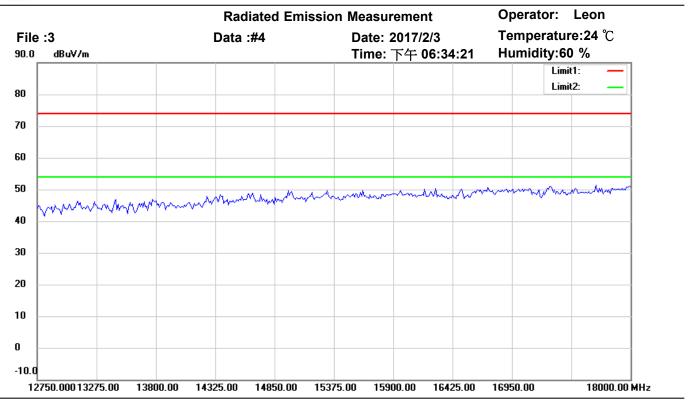

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

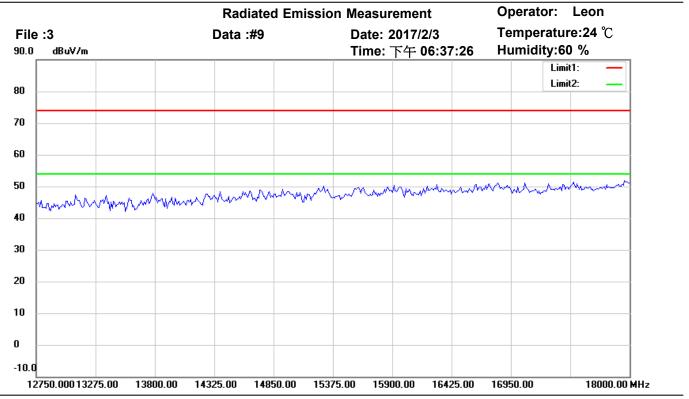

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

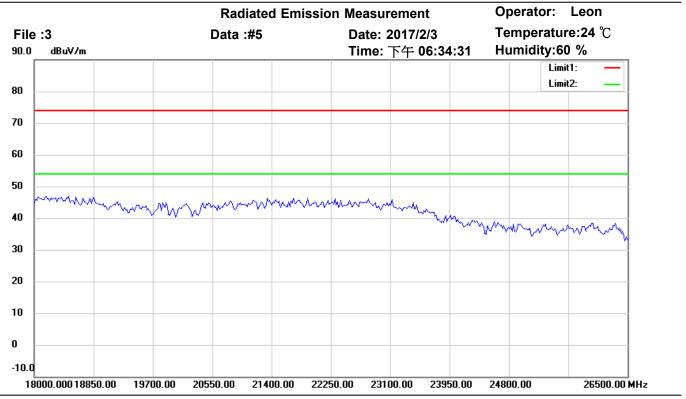

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

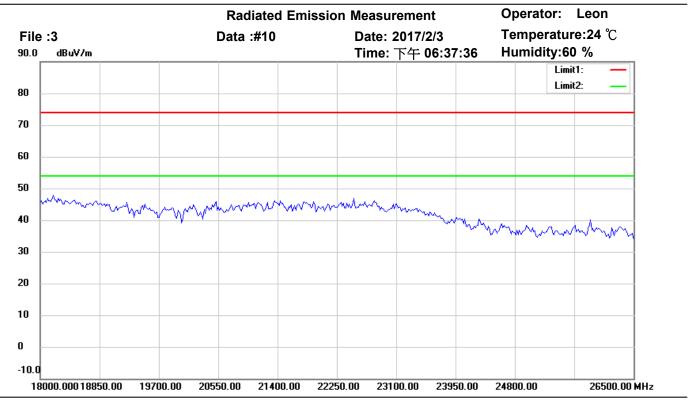

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

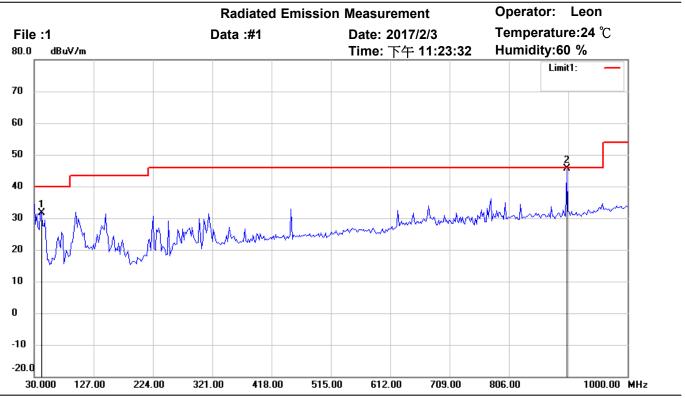

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	40.07	peak	-8.33	31.74	40.00	150	40	-8.26	
*	900.8617	41.62	QP	3.93	45.55	46.00	150	175	-0.45	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

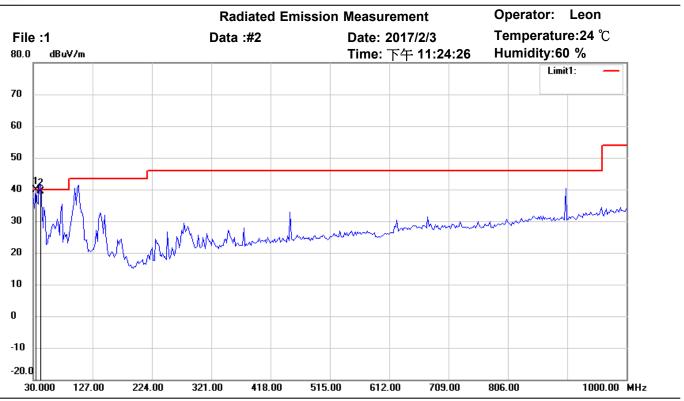

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.23	QP	-7.41	39.82	40.00	150	90	-0.18	
	41.6633	47.61	QP	-8.33	39.28	40.00	150	175	-0.72	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

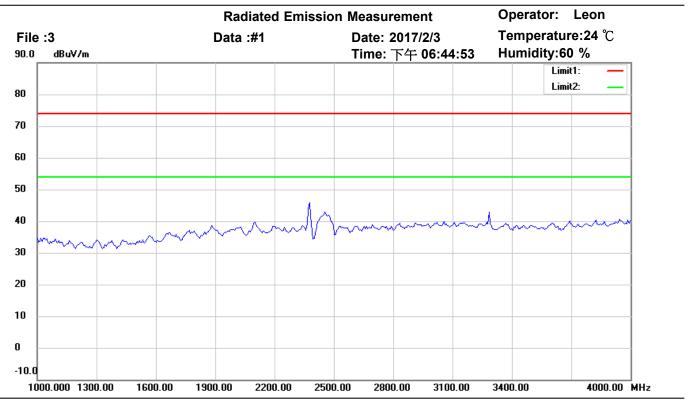

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

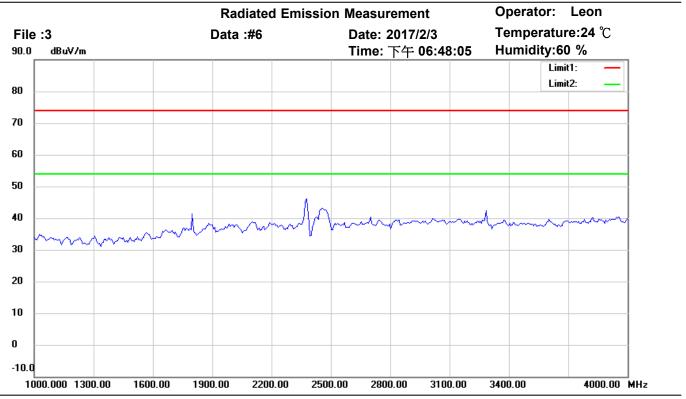

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

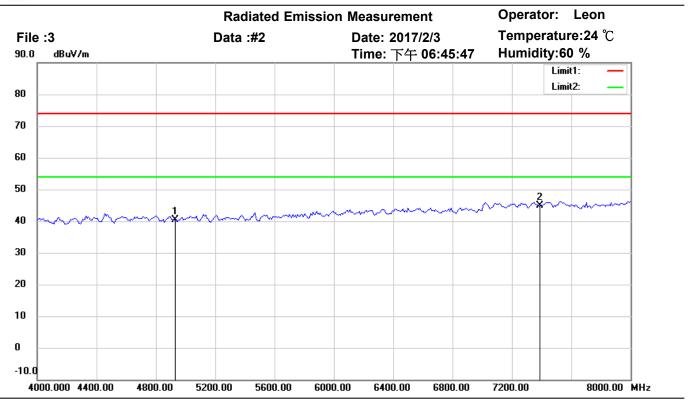

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.79	peak	-0.33	40.46	74.00	150	85	-33.54	
*	7386.000	39.87	peak	4.93	44.80	74.00	150	175	-29.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

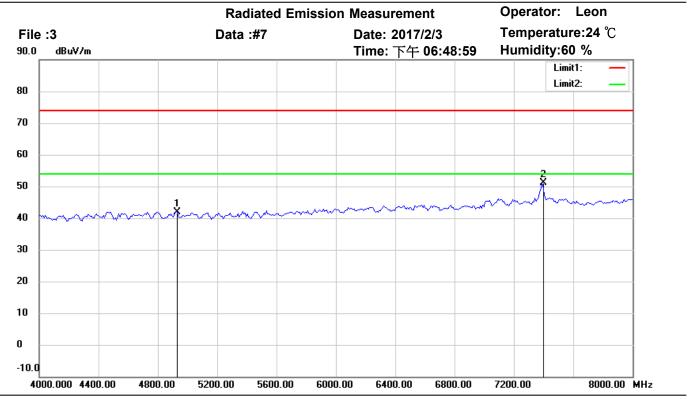

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	42.20	peak	-0.33	41.87	74.00	150	245	-32.13	
*	7390.782	46.27	peak	4.96	51.23	74.00	150	160	-22.77	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

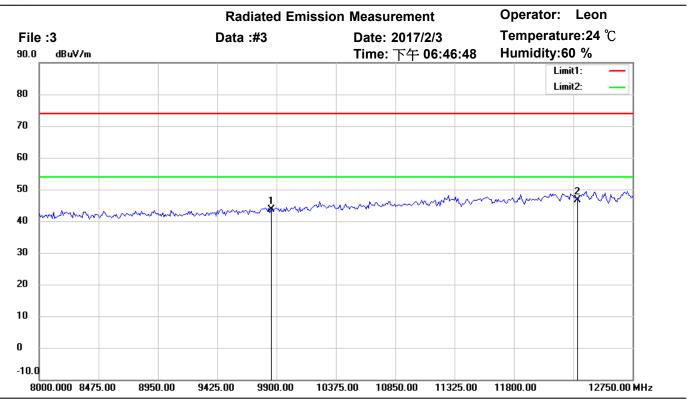

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.95	peak	7.68	43.63	74.00	150	235	-30.37	
*	12310.000	33.36	peak	13.25	46.61	74.00	150	60	-27.39	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

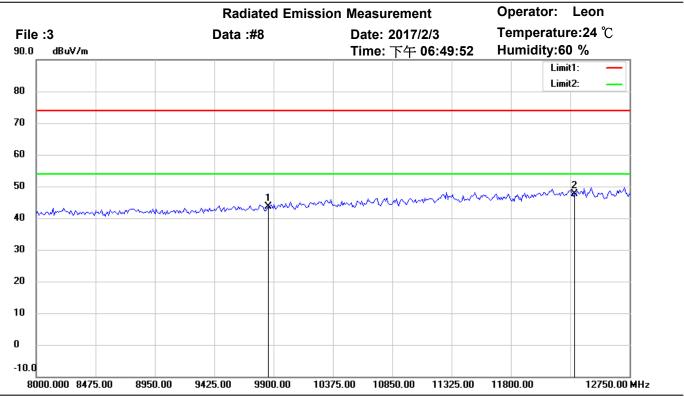

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	36.07	peak	7.68	43.75	74.00	150	75	-30.25	
*	12310.000	34.37	peak	13.25	47.62	74.00	150	90	-26.38	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

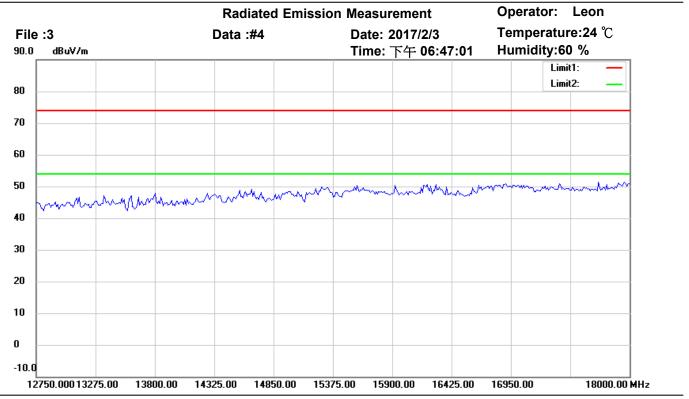

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

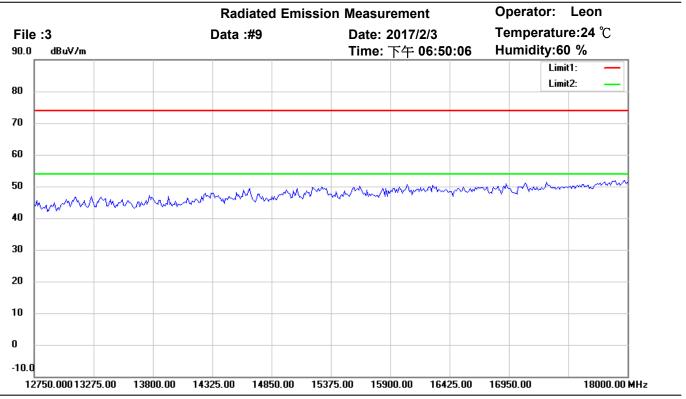

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

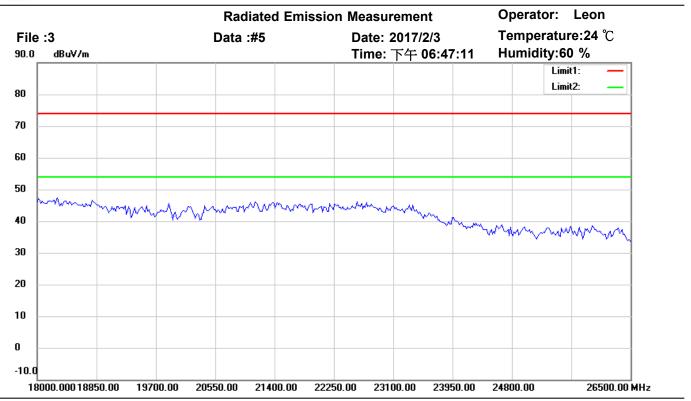

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

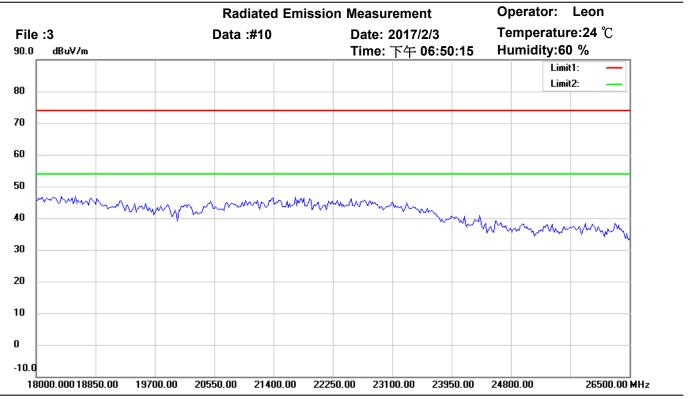

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

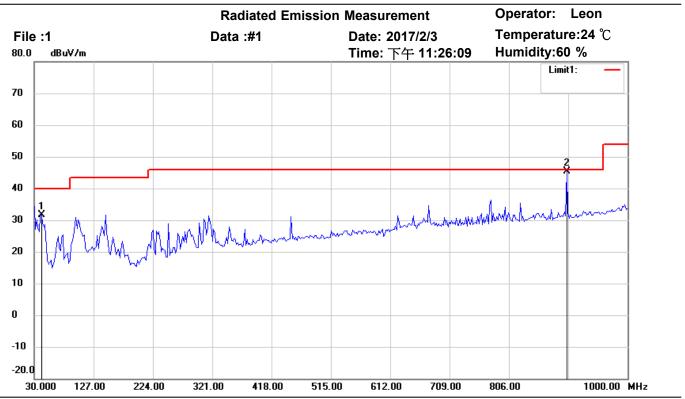

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 40M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.96	peak	-8.33	31.63	40.00	150	60	-8.37	
*	900.8617	41.50	QP	3.93	45.43	46.00	150	85	-0.57	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

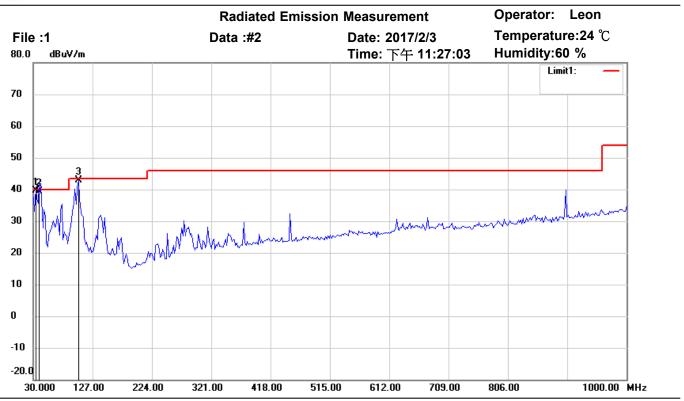

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 40M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	46.99	QP	-7.41	39.58	40.00	150	175	-0.42	
	39.7194	47.53	QP	-8.15	39.38	40.00	150	150	-0.62	
	103.8677	51.43	QP	-8.51	42.92	43.50	150	225	-0.58	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

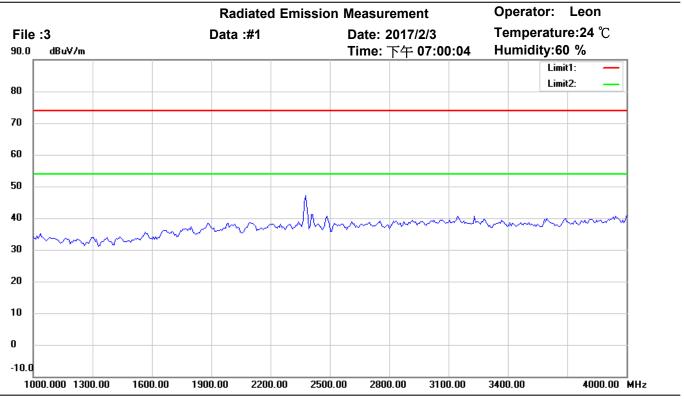

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

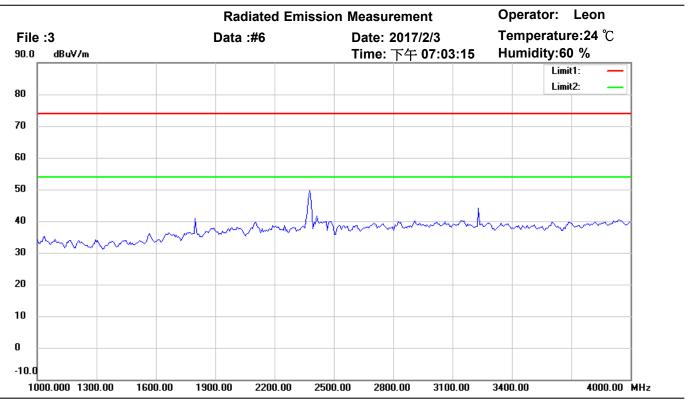

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

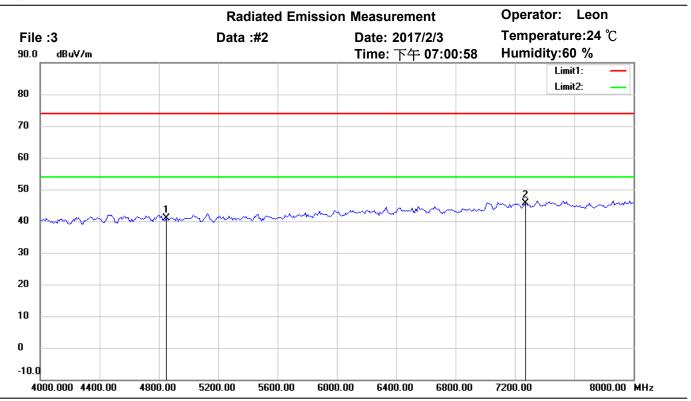

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4844.000	41.54	peak	-0.54	41.00	74.00	150	245	-33.00	
*	7266.000	41.20	peak	4.32	45.52	74.00	150	80	-28.48	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

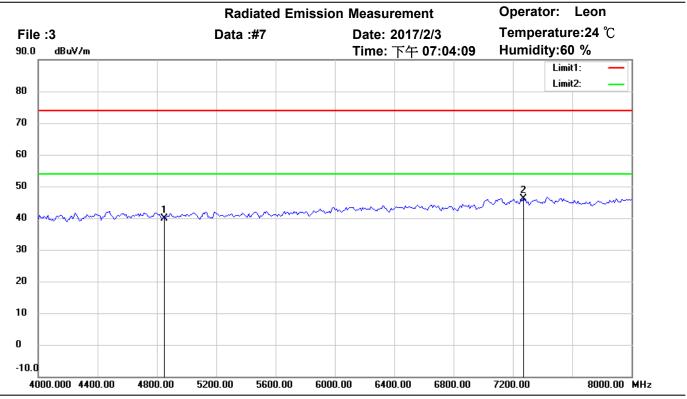

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4844.000	40.34	peak	-0.54	39.80	74.00	150	245	-34.20	
*	7266.000	41.77	peak	4.32	46.09	74.00	150	190	-27.91	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

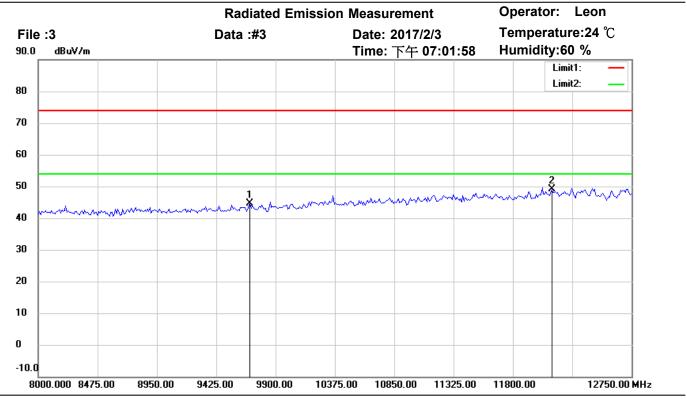

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9688.000	37.17	peak	7.44	44.61	74.00	150	95	-29.39	
*	12110.000	35.42	peak	13.76	49.18	74.00	150	270	-24.82	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

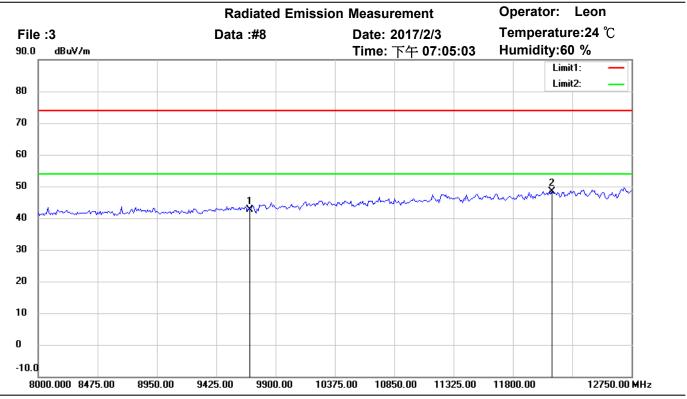

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9688.000	35.28	peak	7.44	42.72	74.00	150	335	-31.28	
*	12110.000	34.61	peak	13.76	48.37	74.00	150	95	-25.63	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

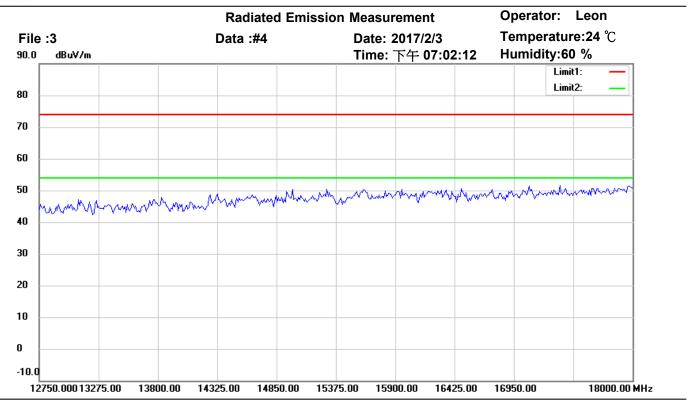

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

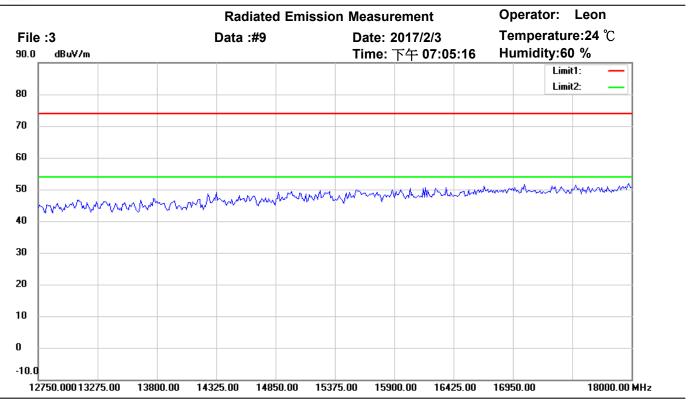

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

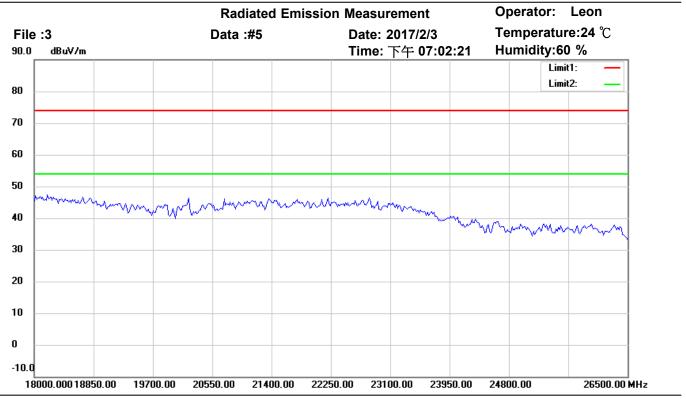

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

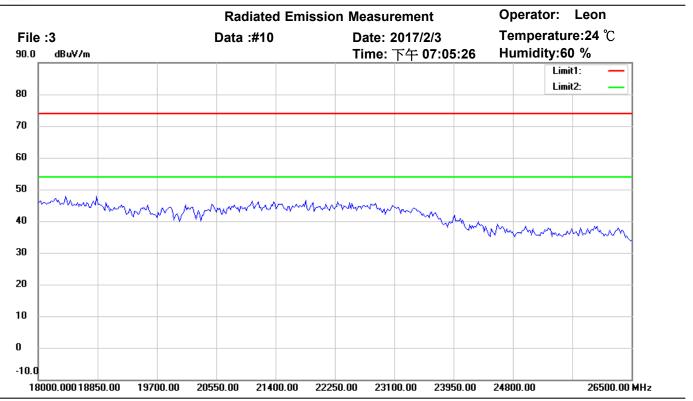

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

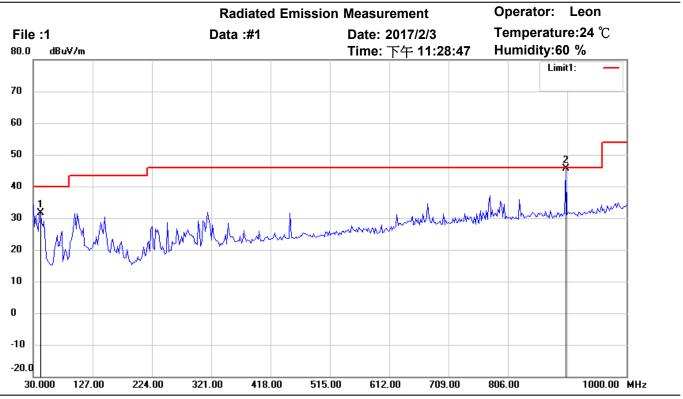

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 40M CH4

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.87	peak	-8.33	31.54	40.00	150	40	-8.46	
*	900.8617	41.66	QP	3.93	45.59	46.00	150	175	-0.41	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

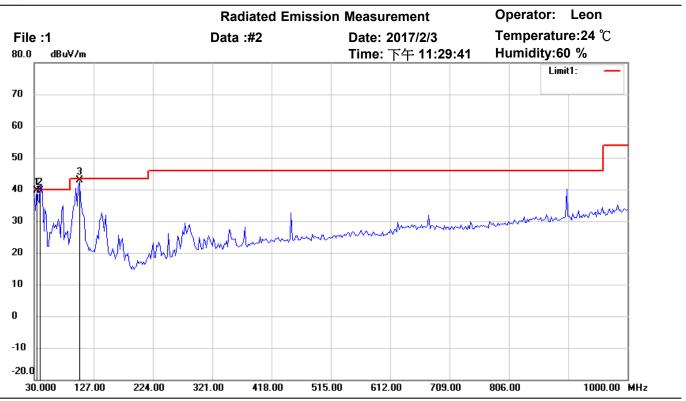

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 40M CH4

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.09	QP	-7.41	39.68	40.00	150	60	-0.32	
	39.7194	47.69	QP	-8.15	39.54	40.00	150	215	-0.46	
	103.8677	51.34	QP	-8.51	42.83	43.50	150	70	-0.67	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

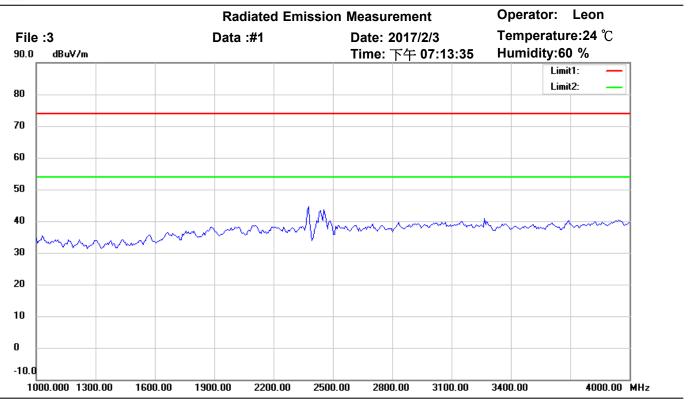

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH4

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

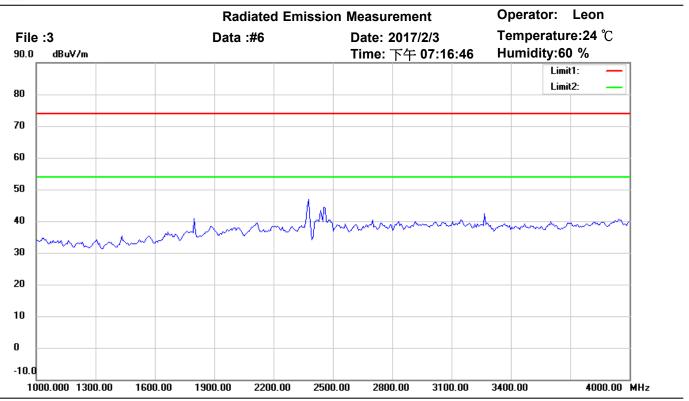

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH4

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

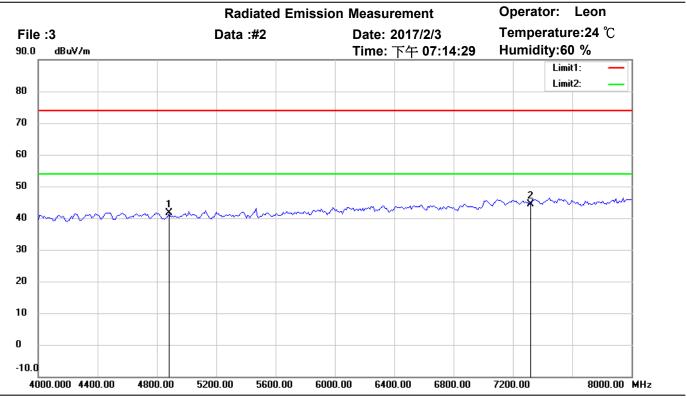

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH4

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	42.15	peak	-0.50	41.65	74.00	150	155	-32.35	
*	7311.000	40.07	peak	4.43	44.50	74.00	150	230	-29.50	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

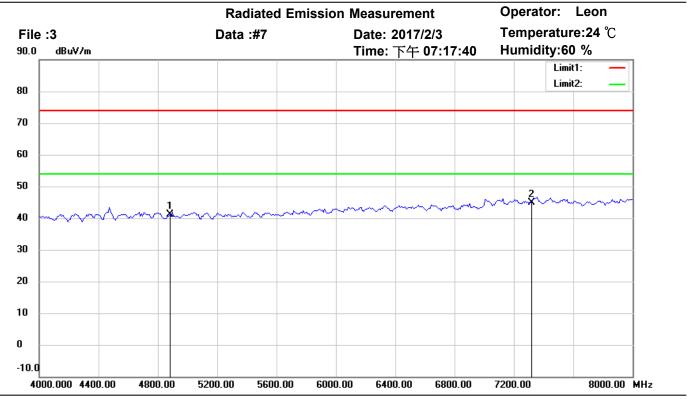

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH4

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.58	peak	-0.50	41.08	74.00	150	135	-32.92	
*	7311.000	40.49	peak	4.43	44.92	74.00	150	240	-29.08	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

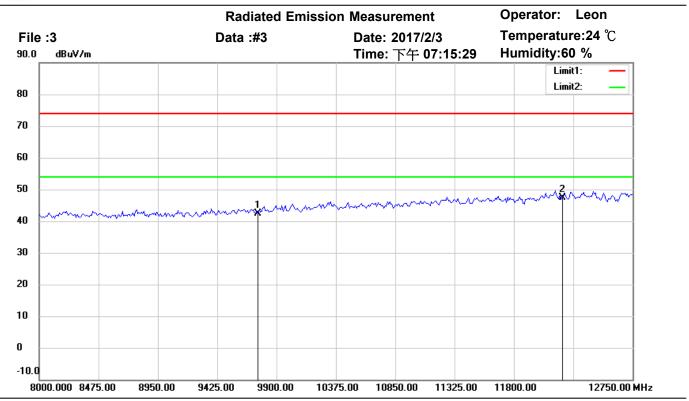

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH4

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.92	peak	7.49	42.41	74.00	150	195	-31.59	
*	12185.000	33.52	peak	13.82	47.34	74.00	150	70	-26.66	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

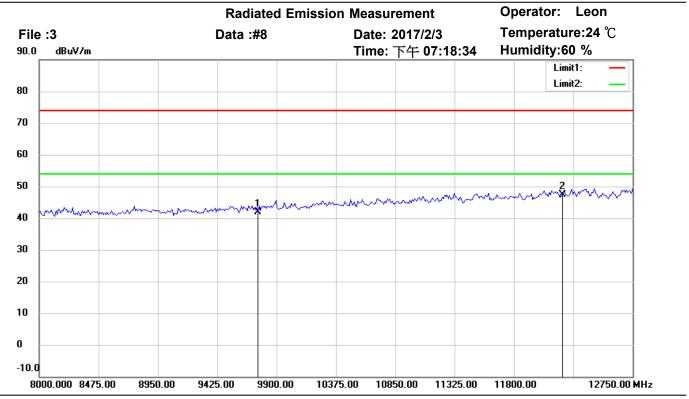

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH4

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.39	peak	7.49	41.88	74.00	150	85	-32.12	
*	12185.000	33.52	peak	13.82	47.34	74.00	150	190	-26.66	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

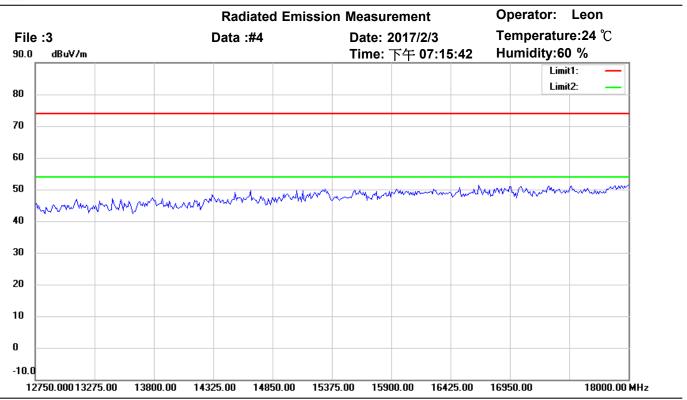

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH4

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

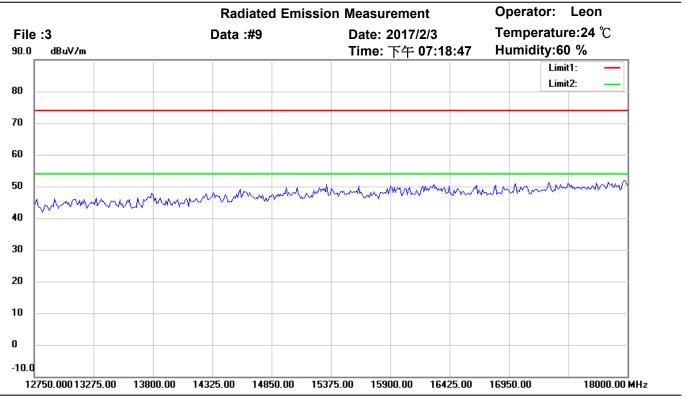

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH4

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

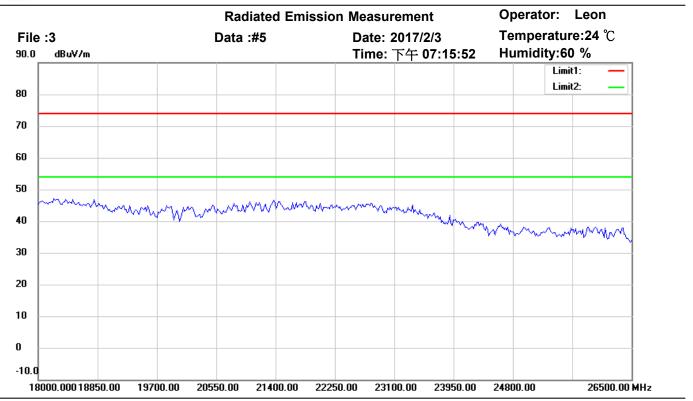

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH4

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

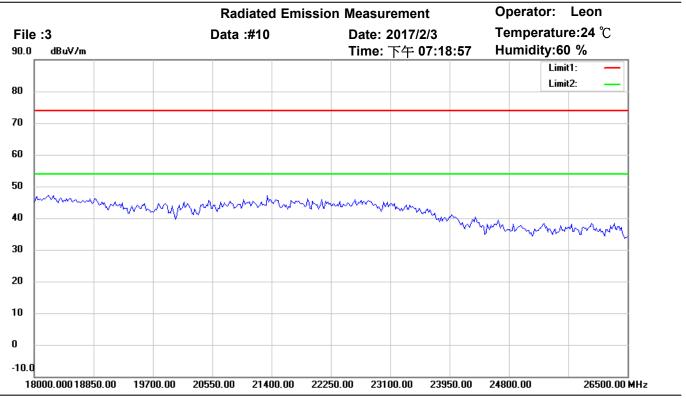

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH4

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

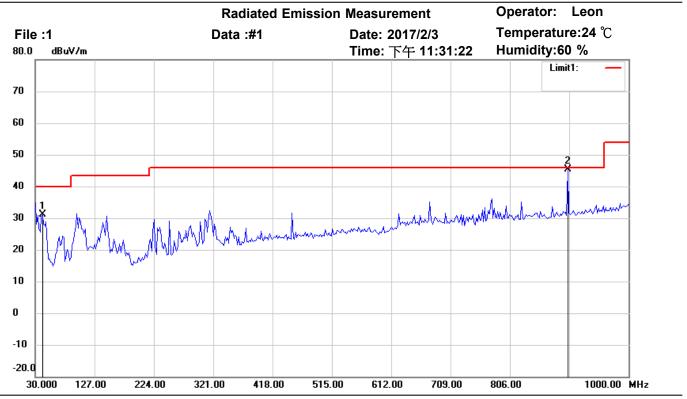

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	41.6632	39.48	peak	-8.33	31.15	40.00	150	220	-8.85	
*	900.8617	41.48	QP	3.93	45.41	46.00	150	45	-0.59	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

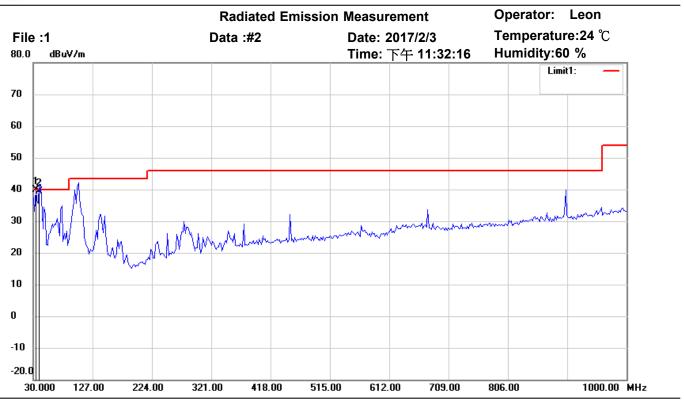

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	47.29	QP	-7.41	39.88	40.00	150	190	-0.12	
	39.7194	47.61	QP	-8.15	39.46	40.00	150	50	-0.54	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

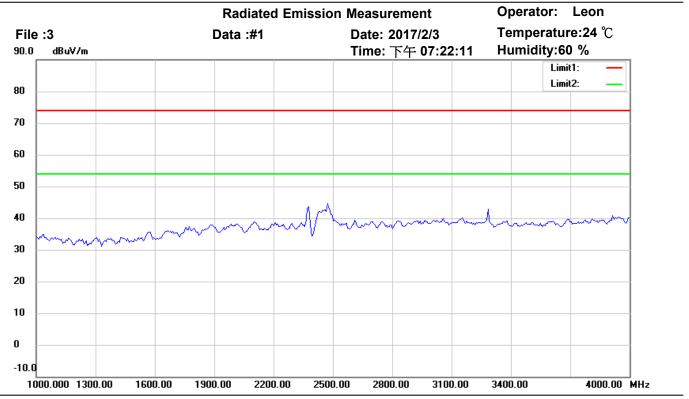

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH7

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

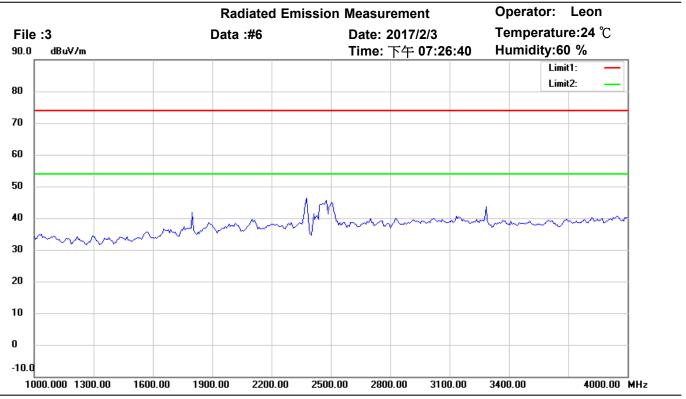

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH7

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

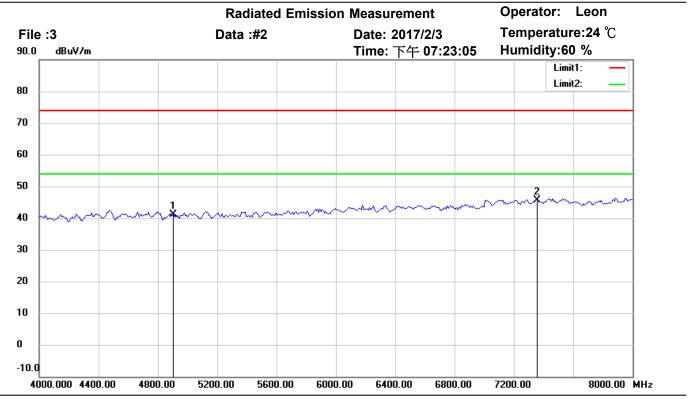

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4904.000	41.60	peak	-0.44	41.16	74.00	150	125	-32.84	
*	7356.000	40.90	peak	4.73	45.63	74.00	150	190	-28.37	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

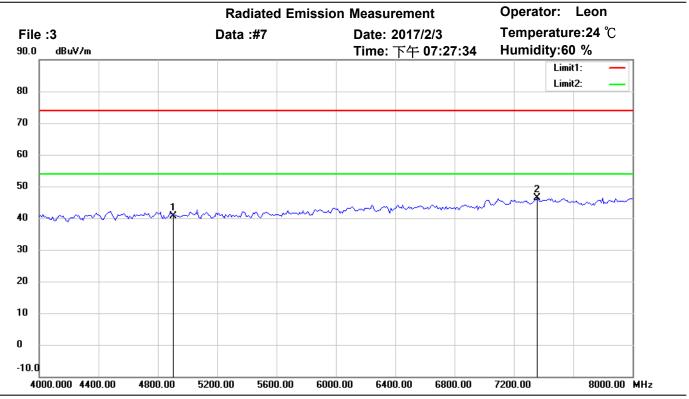

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4904.000	41.17	peak	-0.44	40.73	74.00	150	155	-33.27	
*	7356.000	41.58	peak	4.73	46.31	74.00	150	260	-27.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

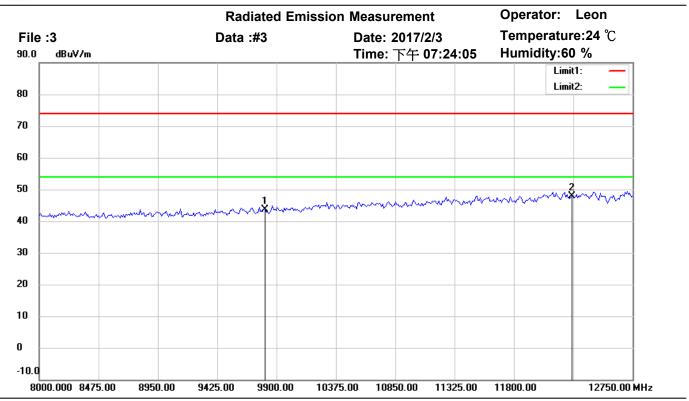

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9808.000	36.04	peak	7.58	43.62	74.00	150	95	-30.38	
*	12260.000	34.51	peak	13.43	47.94	74.00	150	270	-26.06	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

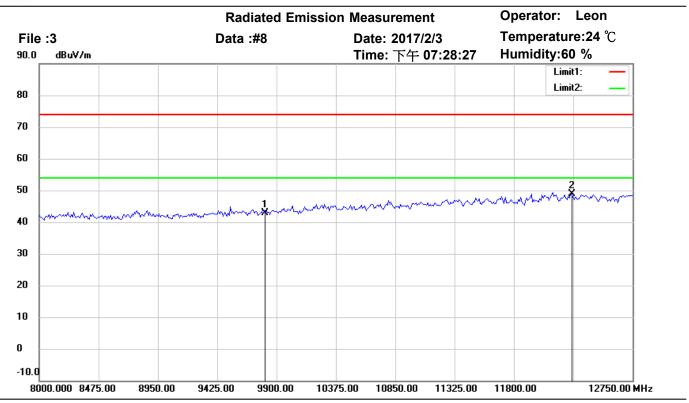

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9808.000	35.34	peak	7.58	42.92	74.00	150	275	-31.08	
*	12260.000	35.41	peak	13.43	48.84	74.00	150	40	-25.16	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

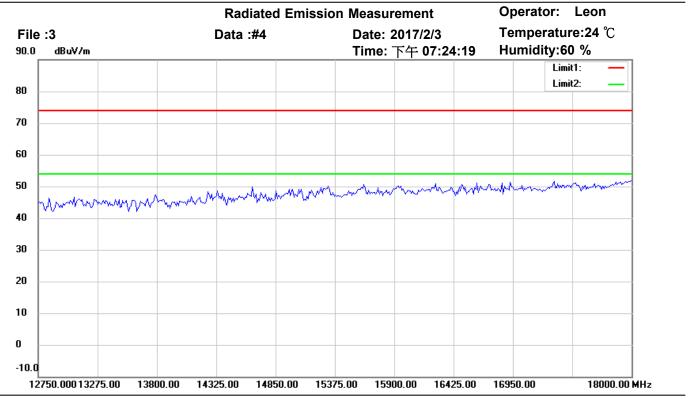

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH7

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

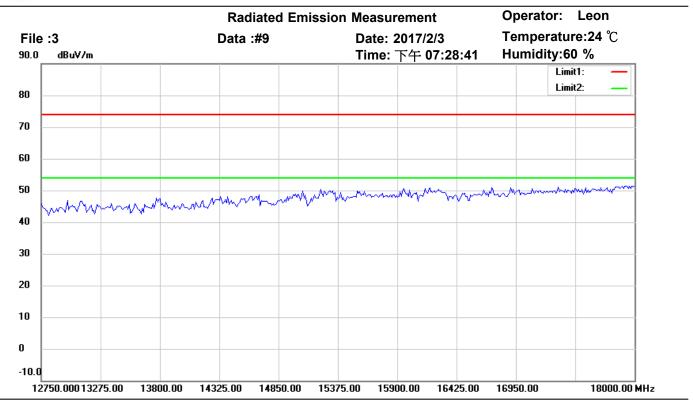

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH7

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

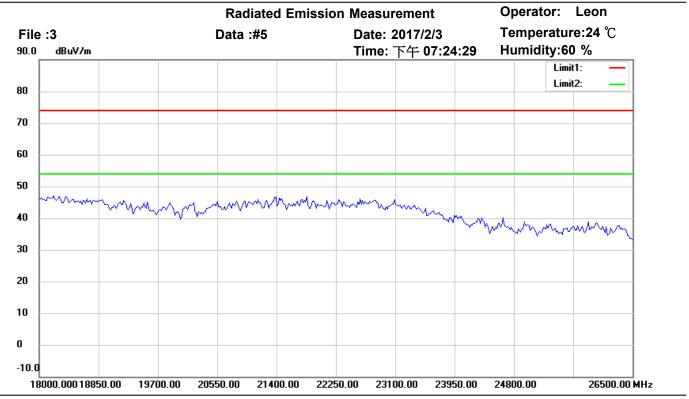

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 40M CH7

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

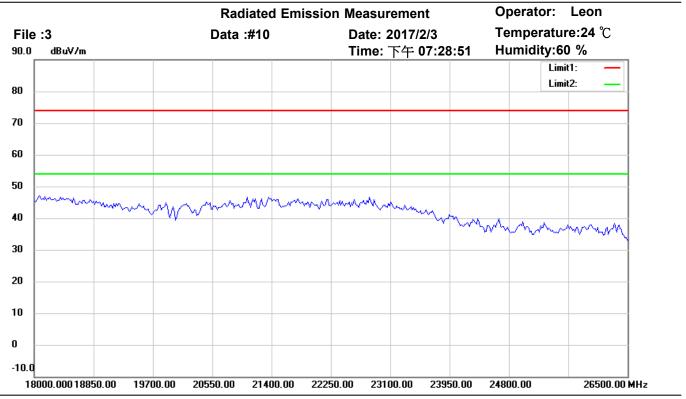

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 40M CH7

Mk.	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	